

FCC C2PC Test Report

FCC ID : MXF-WAPD246ACN
Equipment : WAPD-246ACN_LoRa gateway
Model No. : WAPD-246ACN
Brand Name : Gemtek
Applicant : Gemtek Technology Co., Ltd.
Address : No.15-1 Zhonghua Road, Hsinchu Industrial
Park, Hukou, Hsinchu, Taiwan, 30352
Standard : 47 CFR FCC Part 15.247
Received Date : Mar. 06, 2018
Tested Date : Mar. 07 ~ May 04, 2018

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:



Along Chen / Assistant Manager

Approved by:



Gary Chang / Manager



Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Local Support Equipment List	6
1.3	Test Setup Chart	7
1.4	The Equipment List	8
1.5	Test Standards	10
1.6	Measurement Uncertainty	10
2	TEST CONFIGURATION	11
2.1	Testing Condition	11
2.2	The Worst Test Modes and Channel Details	11
3	TRANSMITTER TEST RESULTS.....	12
3.1	Conducted Emissions.....	12
3.2	6dB and Occupied Bandwidth	25
3.3	RF Output Power	30
3.4	Power Spectral Density	32
3.5	Unwanted Emissions into Restricted Frequency Bands	35
3.6	Emissions in Non-Restricted Frequency Bands	49
4	TEST LABORATORY INFORMATION	52

Release Record

Report No.	Version	Description	Issued Date
FR780201-01	Rev. 01	Initial issue	May 24, 2018

Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	Conducted Emissions	[dBuV]: 6.960MHz 46.96 (Margin -3.04dB) - AV	Pass
15.247(d) 15.209	Radiated Emissions	[dBuV/m at 3m]: 61.04MHz 39.96 (Margin -1.04dB) - QP	Pass
15.247(b)(3)	Maximum Output Power	Max Power [dBm]: 27.21	Pass
15.247(a)(2)	6dB Bandwidth	Meet the requirement of limit	Pass
15.247(e)	Power Spectral Density	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

1 General Description

1.1 Information

This is a Class II Permissive Change report (C2PC).

This report is issued as a supplementary report to original ICC report no. FR780201. The modification is concerned with adding one POE, one antenna and two cores. In this test report, all test items has been re-tested and its data was recorded in the following sections.

1.1.1 Specification of the Equipment under Test (EUT)

RF General Information					
Frequency Range (MHz)	Ch. Freq. (MHz)	Channel Number	Data Rate (bit/sec)	Spread Factor	Channel Bandwidth (kHz)
902 ~ 928	923.3 ~ 927.5	73 ~ 80 [8]	980 ~ 21900	12 ~ 7	500
Note 1: RF output power specifies that Maximum Conducted (Average) Output Power. Note 2: The device uses CSS modulation. Note 3: The device contains 2 same Lora cards. Both Lora cards can transmit simultaneously but different channel					

1.1.2 Antenna Details (New set of antenna was marked in boldface)

Ant. No.	Type	Connector	Gain (dBi)	Remark
1	Dipole	N type	0	---
2	DIPOLE	N-TYPE	8	---

1.1.3 Power Supply Type of Equipment under Test (EUT)

Power Supply Type	56Vdc from POE 55Vdc from POE (for support unit only)
--------------------------	--

1.1.4 Accessories

Accessories		
No.	Equipment	Description
1	POE	Brand Name: PHIHONG Model Name: POE29U-1AT I/P: 100-240Vac, 50-60Hz, 0.8A O/P: 56Vdc, 0.536A Power line: 0.8m non-shielded without core
2	Core (x2)	Brand Name: King core Model Name: KCF-130-B

1.1.5 Channel List

Channel	Frequency(MHz)
73	923.3
74	923.9
75	924.5
76	925.1
77	925.7
78	926.3
79	926.9
80	927.5

1.1.6 Test Tool and Duty Cycle

Test Tool	Putty, version: 0.6	
Duty Cycle and Duty Factor	Duty Cycle (%)	Duty Factor (dB)
	100%	0



1.1.7 Power Setting

Modulation Mode	Test Frequency (MHz)	
	923.3	927.5
CSS	--dig 0 --mix 11 --pa 3	--dig 0 --mix 11 --pa 3

1.2 Local Support Equipment List

Support Equipment List					
No.	Equipment	Brand	Model	FCC ID	Signal cable / Length (m)
1	Notebook	DELL	Latitude E6430	DoC	RJ45, 1m non-shielded. RJ45, 10m non-shielded.
2	POE	Microsemi	PD-9001GR/AC	---	RJ45, 1m non-shielded.

1.3 Test Setup Chart

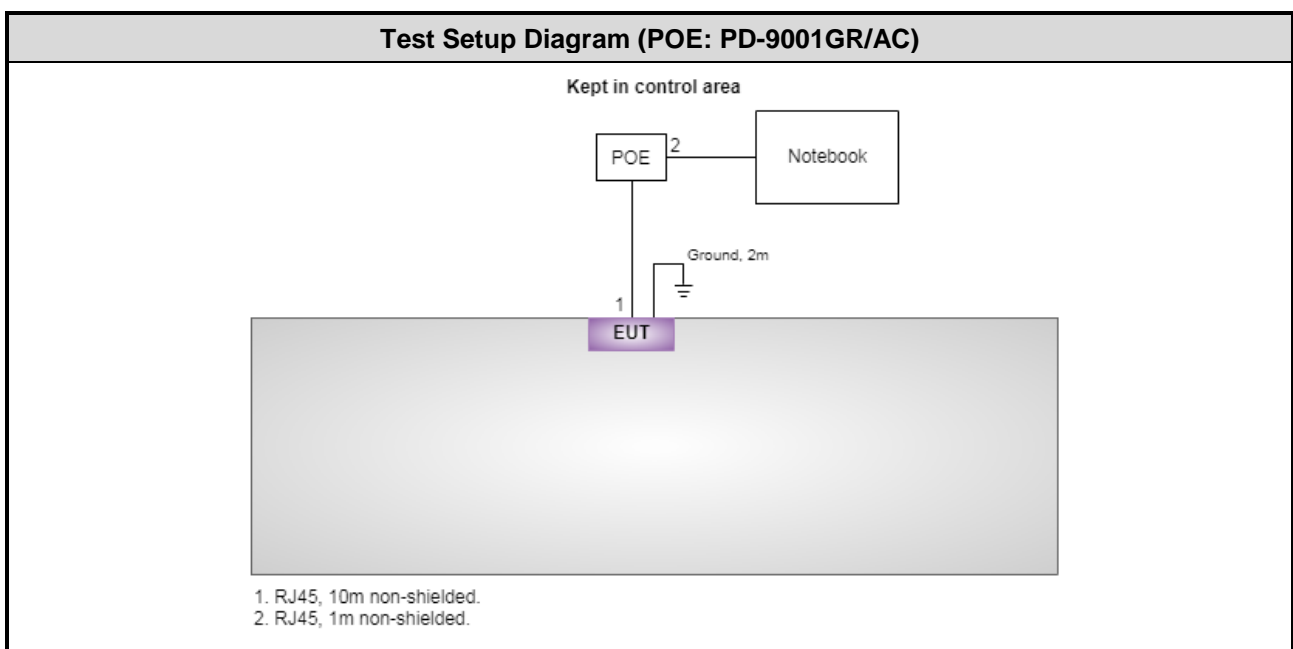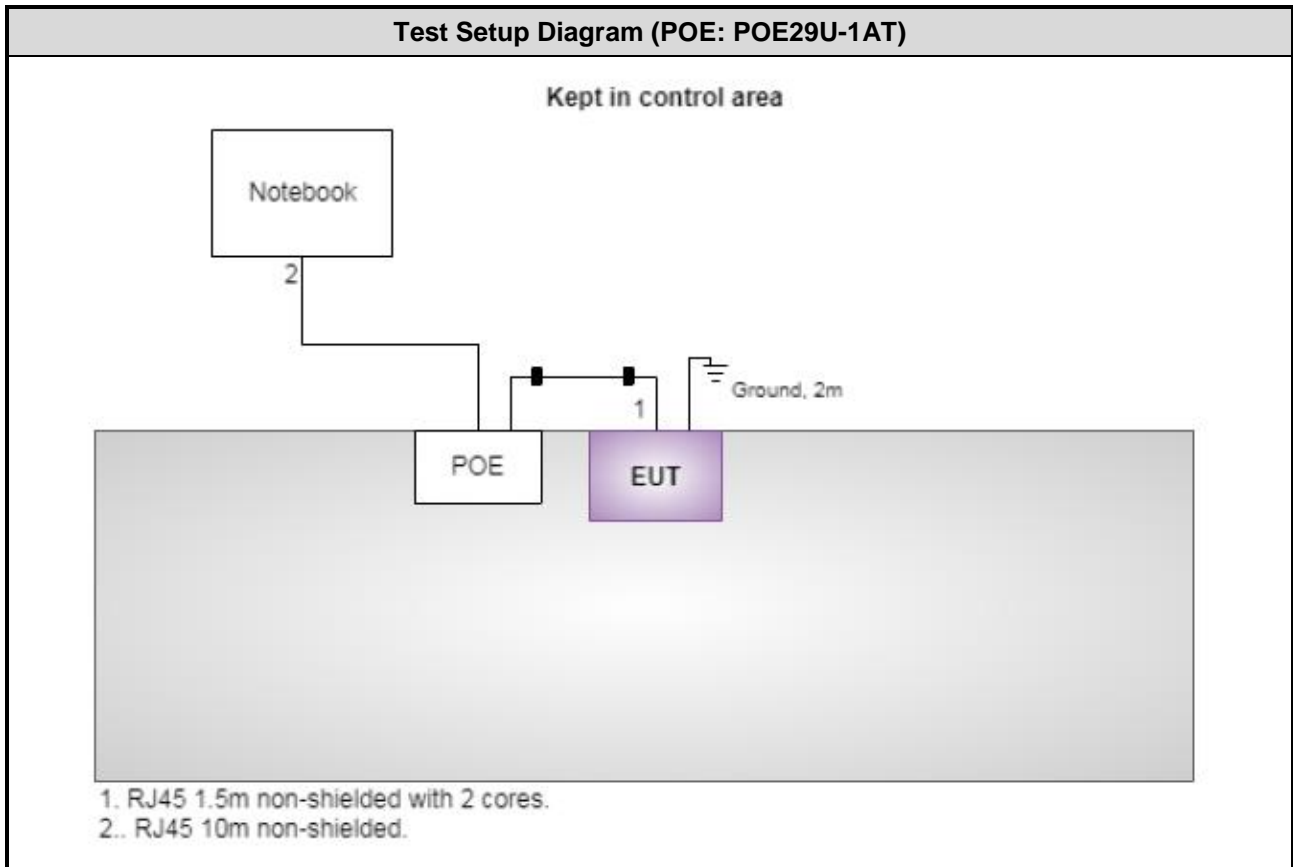

1.4 The Equipment List

Test Item	Conducted Emission				
Test Site	Conduction room 1 / (CO01-WS)				
Tested Date	May 03, 2018				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Receiver	R&S	ESR3	101657	Jan. 05, 2018	Jan. 04, 2019
LISN	SCHWARZBECK	Schwarzbeck 8127	8127-667	Nov. 13, 2017	Nov. 12, 2018
LISN (Support Unit)	SCHWARZBECK	Schwarzbeck 8127	8127-666	Nov. 24, 2017	Nov. 23, 2018
RF Cable-CON	EMC	EMCCFD300-BM-B M-6000	50821	Dec. 18, 2017	Dec. 17, 2018
50 ohm terminal (Support Unit)	NA	50	04	May 12, 2017	May 11, 2018
Measurement Software	AUDIX	e3	6.120210k	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	Radiated Emission below 1GHz				
Test Site	966 chamber 1 / (03CH01-WS)				
Tested Date	Apr. 27 ~ May. 02, 2018				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Receiver	R&S	ESR3	101658	Nov. 20, 2017	Nov. 19, 2018
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 13, 2017	Nov. 12, 2018
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Jul. 25, 2017	Jul. 24, 2018
Preamplifier	EMC	EMC02325	980225	Jul. 28, 2017	Jul. 27, 2018
LF cable 1M	EMC	EMCCFD400-NM-N M-1000	16052	Dec. 07, 2017	Dec. 06, 2018
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-001	Dec. 07, 2017	Dec. 06, 2018
LF cable 10M	Woken	CFD400NL-LW	CFD400NL-002	Dec. 07, 2017	Dec. 06, 2018
Measurement Software	AUDIX	e3	6.120210g	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	Radiated Emission				
Test Site	966 chamber1 / (03CH01-WS)				
Tested Date	Mar. 07, 2018				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101498	Dec. 04, 2017	Dec. 03, 2018
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Dec. 20, 2017	Dec. 19, 2018
Preamplifier	Agilent	83017A	MY39501308	Oct. 06, 2017	Oct. 05, 2018
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16014/4	Dec. 07, 2017	Dec. 06, 2018
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16019/4	Dec. 07, 2017	Dec. 06, 2018
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16139/4	Dec. 07, 2017	Dec. 06, 2018
Measurement Software	AUDIX	e3	6.120210g	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	RF Conducted				
Test Site	(TH01-WS)				
Tested Date	May 04, 2018				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101063	Apr. 16, 2018	Apr. 15, 2019
Power Meter	Anritsu	ML2495A	1241002	Oct. 16, 2017	Oct. 15, 2018
Power Sensor	Anritsu	MA2411B	1207366	Oct. 16, 2017	Oct. 15, 2018
DC POWER SOURCE	GW INSTRON	GPC-6030D	EM892433	Oct. 26, 2017	Oct. 25, 2018
Measurement Software	Sporton	Sporton_1	1.3.30	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

1.5 Test Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.247

ANSI C63.10-2013

FCC KDB 558074 D01 DTS Meas Guidance v04

1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ($k=2$))

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	± 34.134 Hz
Conducted power	± 0.808 dB
Power density	± 0.463 dB
Conducted emission	± 2.670 dB
AC conducted emission	± 2.90 dB
Radiated emission ≤ 1 GHz	± 3.66 dB
Radiated emission > 1 GHz	± 5.63 dB

2 Test Configuration

2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
AC Conduction	CO01-WS	23°C / 56%	Alex Tsai
Radiated Emissions	03CH01-WS	23°C / 63%	Vincent Yeh Roger Lu
RF Conducted	TH01-WS	23°C / 63%	Brad Wu

- FCC Designation No.: TW2732
- FCC site registration No.: 181692
- IC site registration No.: 10807A-1

2.2 The Worst Test Modes and Channel Details

Test item	Test Frequency (MHz)	Channel Bandwidth (kHz)	Modulation / SF	Test Configuration
Conducted Emissions	923.3 / 927.5	500	CSS / 12	1, 3
	923.3 + 927.5	500	CSS / 12	1 + 2 3 + 4
Maximum Output Power 6dB Bandwidth Power Spectral Density	923.3 / 927.5	500	CSS / 12	1, 2
Radiated Emissions ≤1GHz	923.3 / 927.5	500	CSS / 12	1, 3
Radiated Emissions >1GHz	923.3 / 927.5	500	CSS / 12	1

Note:

1. Two Lora card was selected to perform radiated emission test that listed as below configuration.
 Test Configuration 1: Lora card 0, POE: POE29U-1AT
 Test Configuration 2: Lora card 1, POE: POE29U-1AT
 Test Configuration 3: Lora card 0, POE: PD-9001GR/AC
 Test Configuration 4: Lora card 1, POE: PD-9001GR/AC

3 Transmitter Test Results

3.1 Conducted Emissions

3.1.1 Limit of Conducted Emissions

Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.

3.1.2 Test Procedures

1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V / 60Hz.


3.1.3 Test Setup



- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.1.4 Test Result of Conducted Emissions


Modulation / SF	CSS / 12	Test Freq. (MHz)	923.3
Power Phase	Line	Test Configuration	1

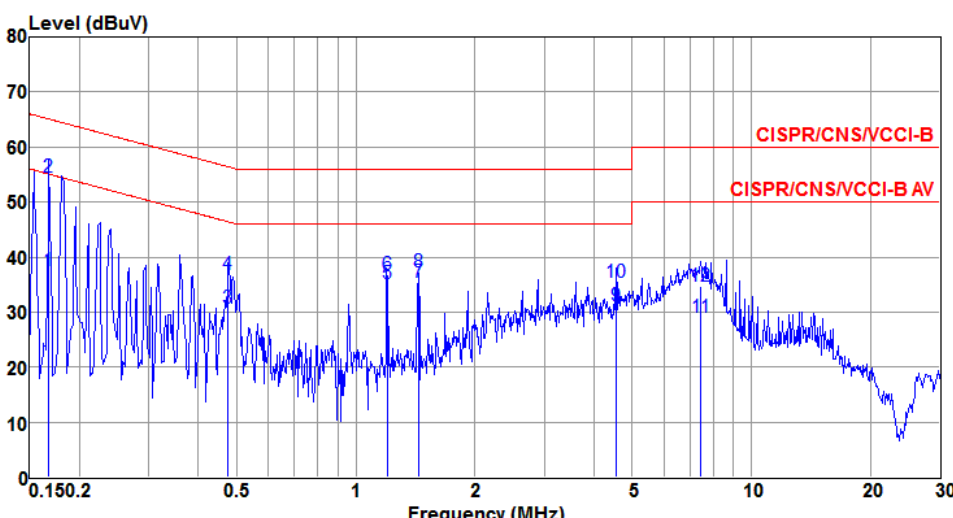

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	LISN factor dB	cable loss dB	Remark
1	0.168	37.43	55.08	-17.65	37.34	0.07	0.02	Average
2②	0.168	54.45	65.08	-10.63	54.36	0.07	0.02	QP
3	0.476	30.81	46.41	-15.60	30.71	0.08	0.02	Average
4	0.476	36.85	56.41	-19.56	36.75	0.08	0.02	QP
5	1.200	35.26	46.00	-10.74	35.11	0.10	0.05	Average
6	1.200	36.81	56.00	-19.19	36.66	0.10	0.05	QP
7	1.440	35.32	46.00	-10.68	35.15	0.10	0.07	Average
8	1.440	37.21	56.00	-18.79	37.04	0.10	0.07	QP
9	4.560	31.26	46.00	-14.74	30.89	0.14	0.23	Average
10	4.560	35.39	56.00	-20.61	35.02	0.14	0.23	QP
11	7.446	28.97	50.00	-21.03	28.50	0.18	0.29	Average
12	7.446	34.66	60.00	-25.34	34.19	0.18	0.29	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB).
 Note 2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).


Modulation / SF	CSS / 12	Test Freq. (MHz)	923.3
Power Phase	Neutral	Test Configuration	1

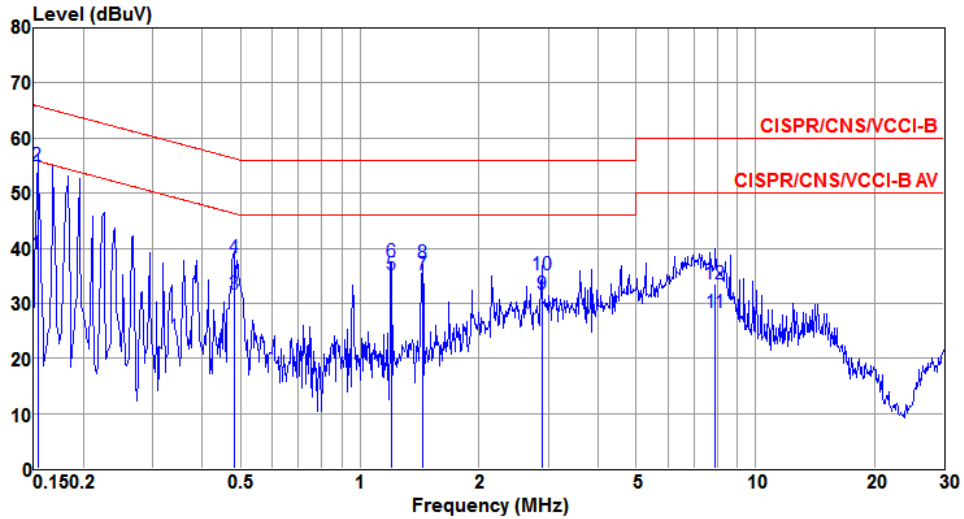

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.153	38.92	55.82	-16.90	38.87	0.04	0.01	Average
2	0.153	54.92	65.82	-10.90	54.87	0.04	0.01	QP
3	0.481	31.52	46.32	-14.80	31.46	0.04	0.02	Average
4	0.481	38.17	56.32	-18.15	38.11	0.04	0.02	QP
5@	1.200	35.22	46.00	-10.78	35.11	0.06	0.05	Average
6	1.200	37.47	56.00	-18.53	37.36	0.06	0.05	QP
7	1.440	35.19	46.00	-10.81	35.06	0.06	0.07	Average
8	1.440	37.37	56.00	-18.63	37.24	0.06	0.07	QP
9	2.881	31.70	46.00	-14.30	31.46	0.08	0.16	Average
10	2.881	35.29	56.00	-20.71	35.05	0.08	0.16	QP
11	7.935	28.35	50.00	-21.65	27.91	0.15	0.29	Average
12	7.935	33.60	60.00	-26.40	33.16	0.15	0.29	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).


Modulation / SF	CSS / 12	Test Freq. (MHz)	927.5
Power Phase	Line	Test Configuration	1

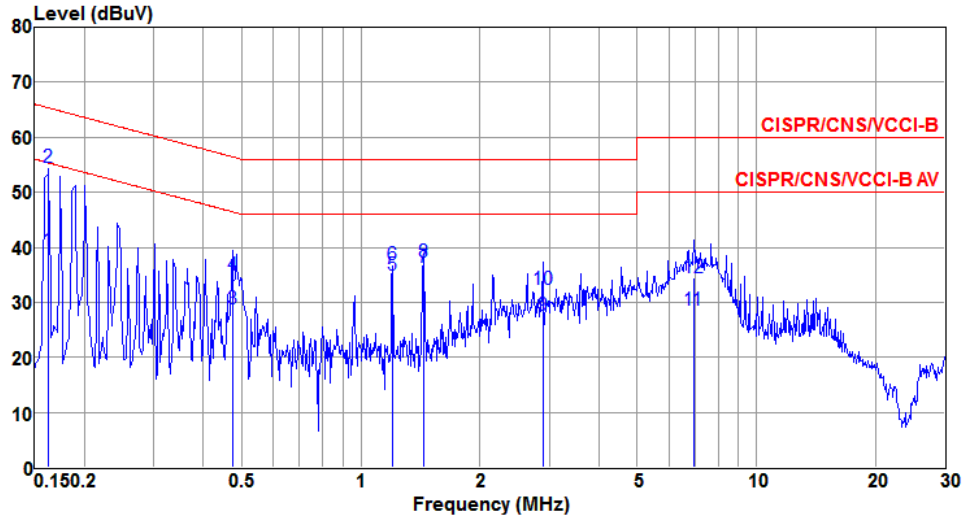

	Freq	Level	Limit	Over	Read	LISN	cable	Remark
	MHz	dBuV	Line	Limit	Level	factor	loss	
			dBuV	dB	dBuV	dB	dB	
1	0.162	39.33	55.34	-16.01	39.24	0.07	0.02	Average
2	0.162	54.54	65.34	-10.80	54.45	0.07	0.02	QP
3	0.474	28.72	46.45	-17.73	28.62	0.08	0.02	Average
4	0.474	34.95	56.45	-21.50	34.85	0.08	0.02	QP
5	1.201	35.03	46.00	-10.97	34.88	0.10	0.05	Average
6	1.201	36.71	56.00	-19.29	36.56	0.10	0.05	QP
7@	1.440	36.26	46.00	-9.74	36.09	0.10	0.07	Average
8	1.440	37.40	56.00	-18.60	37.23	0.10	0.07	QP
9	2.884	27.60	46.00	-18.40	27.32	0.12	0.16	Average
10	2.884	32.27	56.00	-23.73	31.99	0.12	0.16	QP
11	6.951	28.65	50.00	-21.35	28.20	0.17	0.28	Average
12	6.951	34.53	60.00	-25.47	34.08	0.17	0.28	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).
 Note 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).


Modulation / SF	CSS / 12	Test Freq. (MHz)	927.5
Power Phase	Neutral	Test Configuration	1

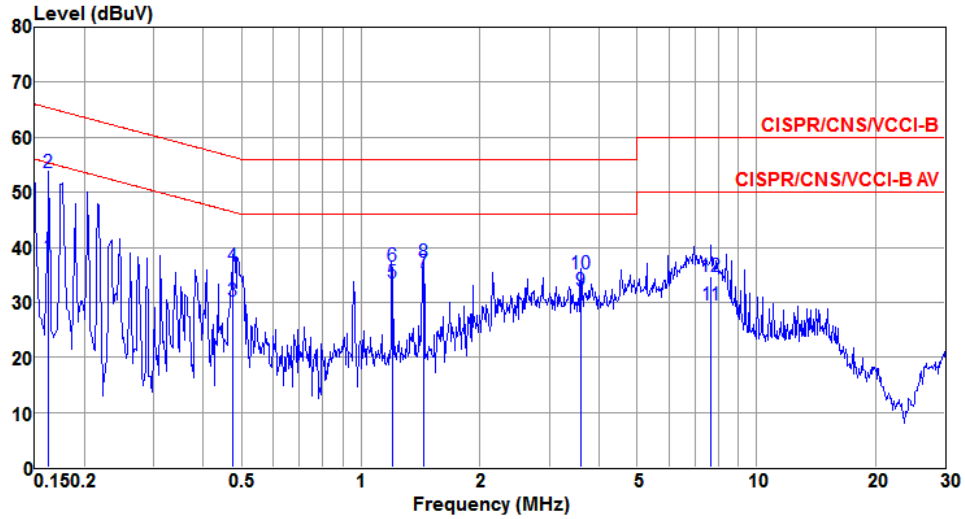

	Freq	Level	Limit	Over	Read	LISN	cable	Remark
	MHz	dBuV	Line	Limit	Level	factor	loss	
			dBuV	dB	dBuV	dB	dB	
1	0.162	38.17	55.34	-17.17	38.11	0.04	0.02	Average
2	0.162	53.68	65.34	-11.66	53.62	0.04	0.02	QP
3	0.476	30.31	46.41	-16.10	30.25	0.04	0.02	Average
4	0.476	36.69	56.41	-19.72	36.63	0.04	0.02	QP
5	1.200	33.52	46.00	-12.48	33.41	0.06	0.05	Average
6	1.200	36.51	56.00	-19.49	36.40	0.06	0.05	QP
7@	1.441	35.47	46.00	-10.53	35.34	0.06	0.07	Average
8	1.441	37.23	56.00	-18.77	37.10	0.06	0.07	QP
9	3.600	31.99	46.00	-14.01	31.70	0.09	0.20	Average
10	3.600	35.06	56.00	-20.94	34.77	0.09	0.20	QP
11	7.687	29.44	50.00	-20.56	29.00	0.15	0.29	Average
12	7.687	34.79	60.00	-25.21	34.35	0.15	0.29	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).
 Note 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).


Modulation / SF	CSS / 12	Test Freq. (MHz)	923.3
Power Phase	Line	Test Configuration	3

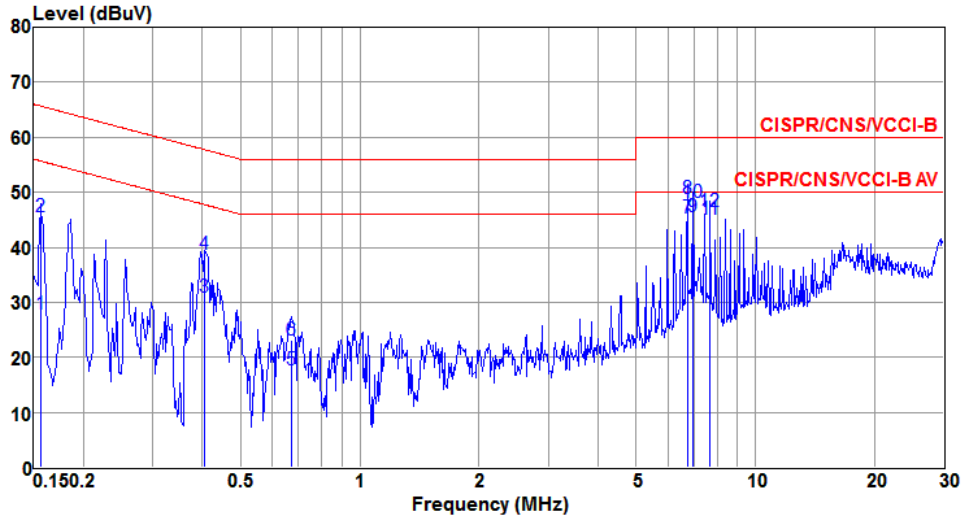

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.156	27.94	55.69	-27.75	27.86	0.07	0.01	Average
2	0.156	45.52	65.69	-20.17	45.44	0.07	0.01	QP
3	0.404	30.91	47.77	-16.86	30.81	0.08	0.02	Average
4	0.404	38.76	57.77	-19.01	38.66	0.08	0.02	QP
5	0.672	17.60	46.00	-28.40	17.48	0.09	0.03	Average
6	0.672	23.20	56.00	-32.80	23.08	0.09	0.03	QP
7	6.720	45.27	50.00	-4.73	44.82	0.17	0.28	Average
8	6.720	48.96	60.00	-11.04	48.51	0.17	0.28	QP
9@	6.960	45.65	50.00	-4.35	45.20	0.17	0.28	Average
10	6.960	48.07	60.00	-11.93	47.62	0.17	0.28	QP
11	7.680	45.19	50.00	-4.81	44.72	0.18	0.29	Average
12	7.680	46.54	60.00	-13.46	46.07	0.18	0.29	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).


Modulation / SF	CSS / 12	Test Freq. (MHz)	923.3
Power Phase	Neutral	Test Configuration	3

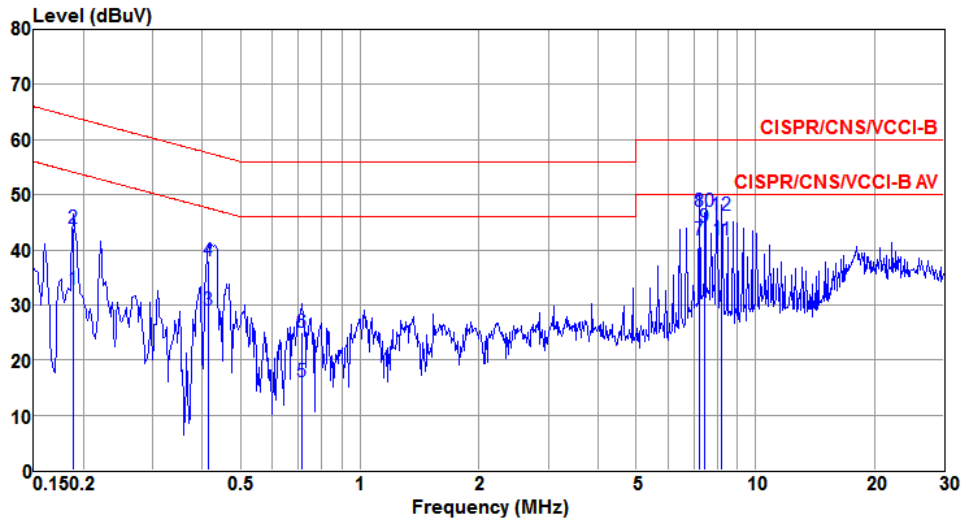

	Freq	Level	Limit	Over	Read	LISN	cable	Remark
	MHz	dBuV	Line	Limit	Level	factor	loss	
			dBuV	dB	dBuV	dB	dB	
1	0.188	32.87	54.11	-21.24	32.80	0.04	0.03	Average
2	0.188	44.02	64.11	-20.09	43.95	0.04	0.03	QP
3	0.415	29.10	47.55	-18.45	29.04	0.04	0.02	Average
4	0.415	37.98	57.55	-19.57	37.92	0.04	0.02	QP
5	0.716	16.10	46.00	-29.90	16.02	0.05	0.03	Average
6	0.716	25.04	56.00	-30.96	24.96	0.05	0.03	QP
7	7.202	41.75	50.00	-8.25	41.33	0.14	0.28	Average
8	7.202	47.03	60.00	-12.97	46.61	0.14	0.28	QP
9	7.441	44.22	50.00	-5.78	43.79	0.14	0.29	Average
10	7.441	46.99	60.00	-13.01	46.56	0.14	0.29	QP
11	8.235	41.67	50.00	-8.33	41.22	0.15	0.30	Average
12	8.235	46.37	60.00	-13.63	45.92	0.15	0.30	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).


Modulation / SF	CSS / 12	Test Freq. (MHz)	927.5
Power Phase	Line	Test Configuration	3

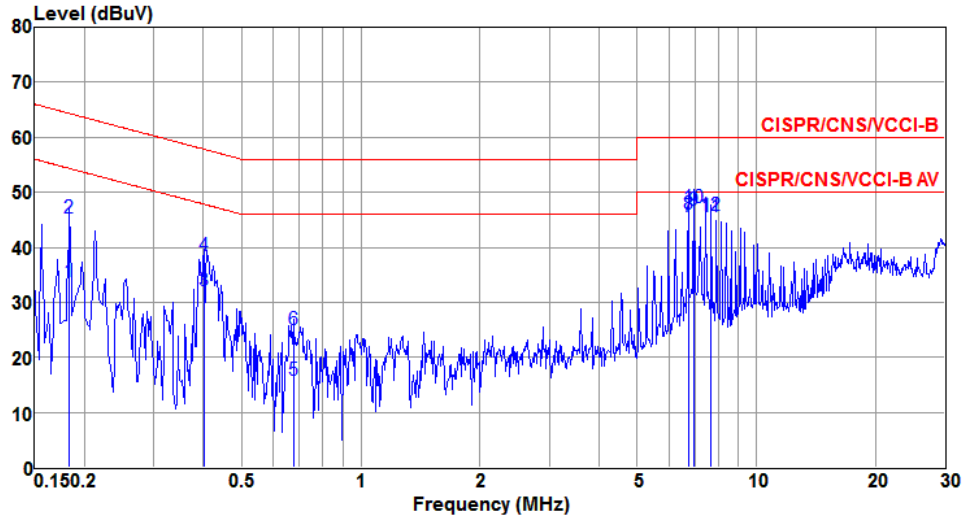

	Freq	Level	Limit	Over	Read	LISN	cable	Remark
	MHz	dBuV	Line	Limit	Level	factor	loss	
			dBuV	dB	dBuV	dB	dB	
1	0.183	33.74	54.33	-20.59	33.64	0.08	0.02	Average
2	0.183	45.39	64.33	-18.94	45.29	0.08	0.02	QP
3	0.402	32.12	47.81	-15.69	32.02	0.08	0.02	Average
4	0.402	38.55	57.81	-19.26	38.45	0.08	0.02	QP
5	0.675	15.90	46.00	-30.10	15.78	0.09	0.03	Average
6	0.675	24.93	56.00	-31.07	24.81	0.09	0.03	QP
7	6.720	45.50	50.00	-4.50	45.05	0.17	0.28	Average
8	6.720	46.03	60.00	-13.97	45.58	0.17	0.28	QP
9@	6.960	46.68	50.00	-3.32	46.23	0.17	0.28	Average
10	6.960	47.11	60.00	-12.89	46.66	0.17	0.28	QP
11	7.681	45.49	50.00	-4.51	45.02	0.18	0.29	Average
12	7.681	45.81	60.00	-14.19	45.34	0.18	0.29	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB).
 2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).


Modulation / SF	CSS / 12	Test Freq. (MHz)	927.5
Power Phase	Neutral	Test Configuration	3

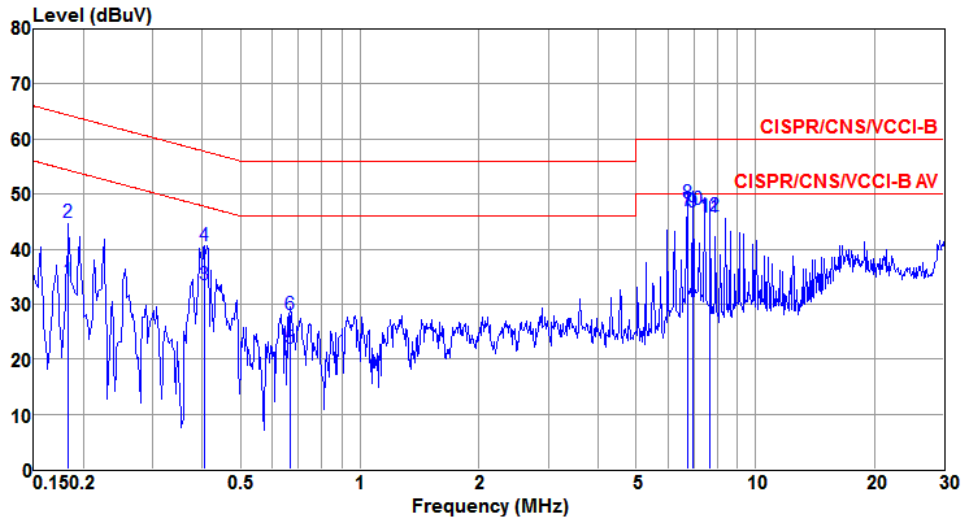

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.183	34.29	54.33	-20.04	34.23	0.04	0.02	Average
2	0.183	44.95	64.33	-19.38	44.89	0.04	0.02	QP
3	0.404	33.56	47.77	-14.21	33.50	0.04	0.02	Average
4	0.404	40.61	57.77	-17.16	40.55	0.04	0.02	QP
5	0.668	22.00	46.00	-24.00	21.92	0.05	0.03	Average
6	0.668	28.18	56.00	-27.82	28.10	0.05	0.03	QP
7@	6.720	46.86	50.00	-3.14	46.44	0.14	0.28	Average
8	6.720	48.32	60.00	-11.68	47.90	0.14	0.28	QP
9	6.960	46.80	50.00	-3.20	46.38	0.14	0.28	Average
10	6.960	47.32	60.00	-12.68	46.90	0.14	0.28	QP
11	7.680	45.76	50.00	-4.24	45.32	0.15	0.29	Average
12	7.680	46.02	60.00	-13.98	45.58	0.15	0.29	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).
 Note 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).


Modulation / SF	CSS / 12	Test Freq. (MHz)	923.3 + 927.5
Power Phase	Line	Test Configuration	1 + 2

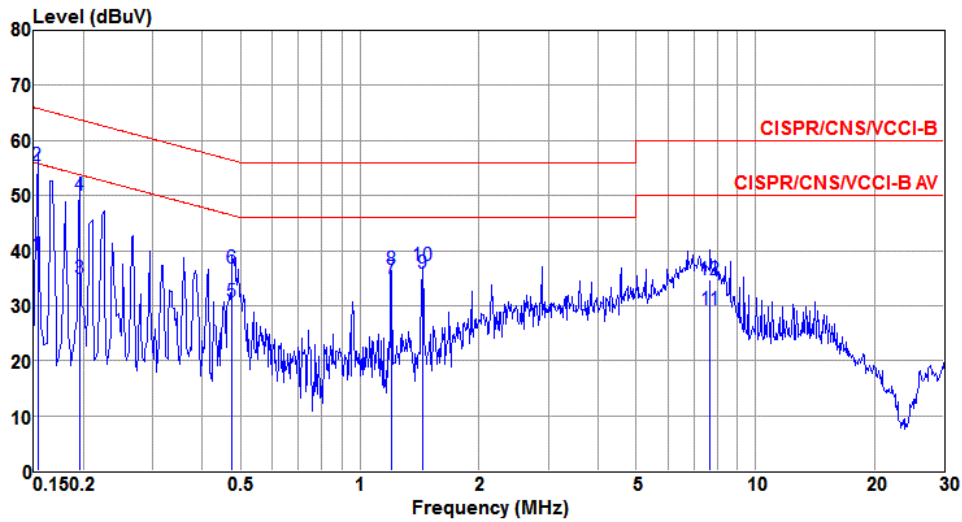

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.153	39.30	55.82	-16.52	39.22	0.07	0.01	Average
2	0.153	55.50	65.82	-10.32	55.42	0.07	0.01	QP
3	0.195	34.85	53.80	-18.95	34.74	0.08	0.03	Average
4	0.195	50.09	63.80	-13.71	49.98	0.08	0.03	QP
5	0.476	30.69	46.41	-15.72	30.59	0.08	0.02	Average
6	0.476	36.79	56.41	-19.62	36.69	0.08	0.02	QP
7	1.199	34.89	46.00	-11.11	34.74	0.10	0.05	Average
8	1.199	36.69	56.00	-19.31	36.54	0.10	0.05	QP
9@	1.441	35.97	46.00	-10.03	35.80	0.10	0.07	Average
10	1.441	37.41	56.00	-18.59	37.24	0.10	0.07	QP
11	7.687	29.27	50.00	-20.73	28.80	0.18	0.29	Average
12	7.687	34.63	60.00	-25.37	34.16	0.18	0.29	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).


Modulation / SF	CSS / 12	Test Freq. (MHz)	923.3 + 927.5
Power Phase	Neutral	Test Configuration	1 + 2

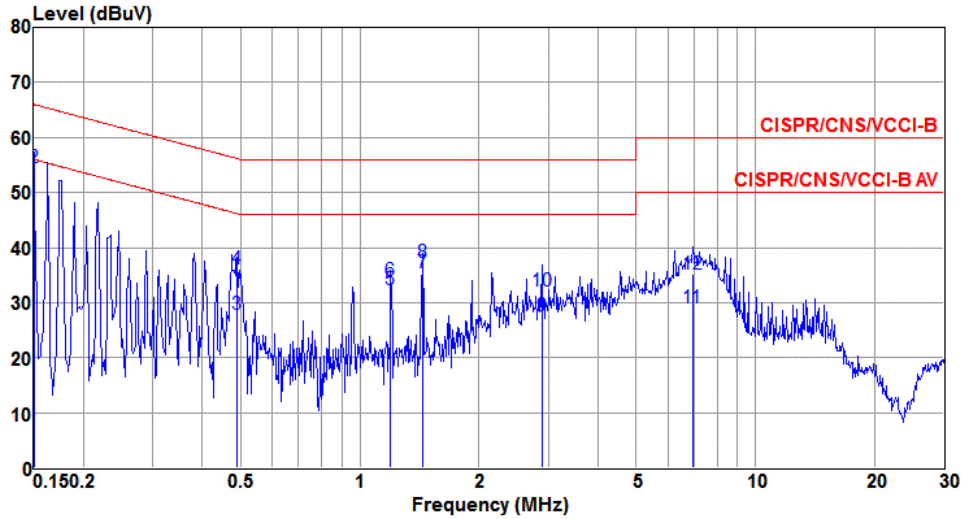

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	LISN factor dB	cable loss dB	Remark
1	0.150	38.74	56.00	-17.26	38.69	0.04	0.01	Average
2	0.150	54.47	66.00	-11.53	54.42	0.04	0.01	QP
3	0.489	27.83	46.19	-18.36	27.77	0.04	0.02	Average
4	0.489	36.18	56.19	-20.01	36.12	0.04	0.02	QP
5	1.197	32.36	46.00	-13.64	32.25	0.06	0.05	Average
6	1.197	34.03	56.00	-21.97	33.92	0.06	0.05	QP
7@	1.440	35.30	46.00	-10.70	35.17	0.06	0.07	Average
8	1.440	37.38	56.00	-18.62	37.25	0.06	0.07	QP
9	2.884	27.55	46.00	-18.45	27.31	0.08	0.16	Average
10	2.884	32.00	56.00	-24.00	31.76	0.08	0.16	QP
11	6.951	29.05	50.00	-20.95	28.63	0.14	0.28	Average
12	6.951	35.12	60.00	-24.88	34.70	0.14	0.28	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB).
 2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).


Modulation / SF	CSS / 12	Test Freq. (MHz)	923.3 + 927.5
Power Phase	Line	Test Configuration	3 + 4

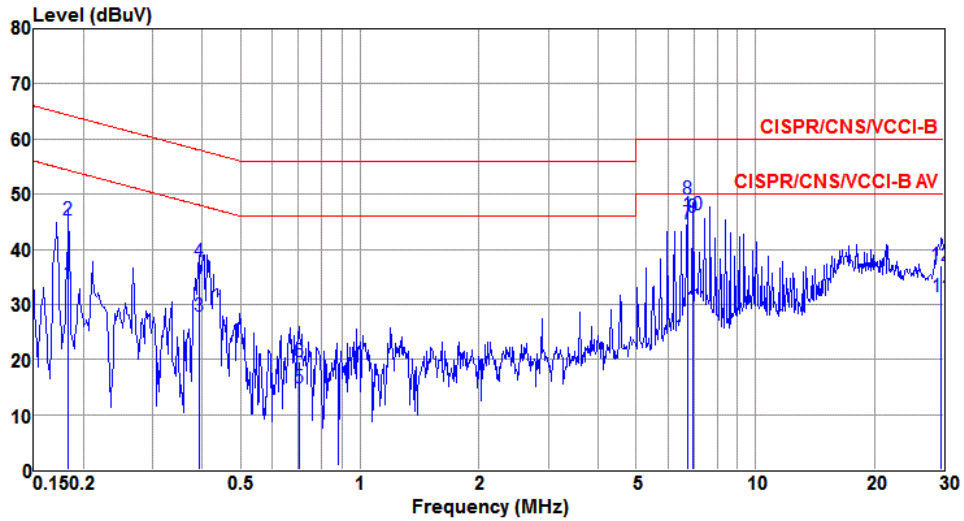

	Freq	Level	Limit	Over	Read	LISN	cable	Remark
	MHz	dBuV	Line	Limit	Level	factor	loss	
			dBuV	dB	dBuV	dB	dB	
1	0.183	33.69	54.33	-20.64	33.59	0.08	0.02	Average
2	0.183	45.31	64.33	-19.02	45.21	0.08	0.02	QP
3	0.393	27.82	47.99	-20.17	27.72	0.08	0.02	Average
4	0.393	37.72	57.99	-20.27	37.62	0.08	0.02	QP
5	0.701	14.77	46.00	-31.23	14.65	0.09	0.03	Average
6	0.701	19.57	56.00	-36.43	19.45	0.09	0.03	QP
7	6.720	44.65	50.00	-5.35	44.20	0.17	0.28	Average
8	6.720	49.01	60.00	-10.99	48.56	0.17	0.28	QP
9@	6.961	45.72	50.00	-4.28	45.27	0.17	0.28	Average
10	6.961	46.15	60.00	-13.85	45.70	0.17	0.28	QP
11	29.527	31.33	50.00	-18.67	30.64	0.29	0.40	Average
12	29.527	36.97	60.00	-23.03	36.28	0.29	0.40	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB).
 Note 2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).

Modulation / SF	CSS / 12	Test Freq. (MHz)	923.3 + 927.5
Power Phase	Neutral	Test Configuration	3 + 4

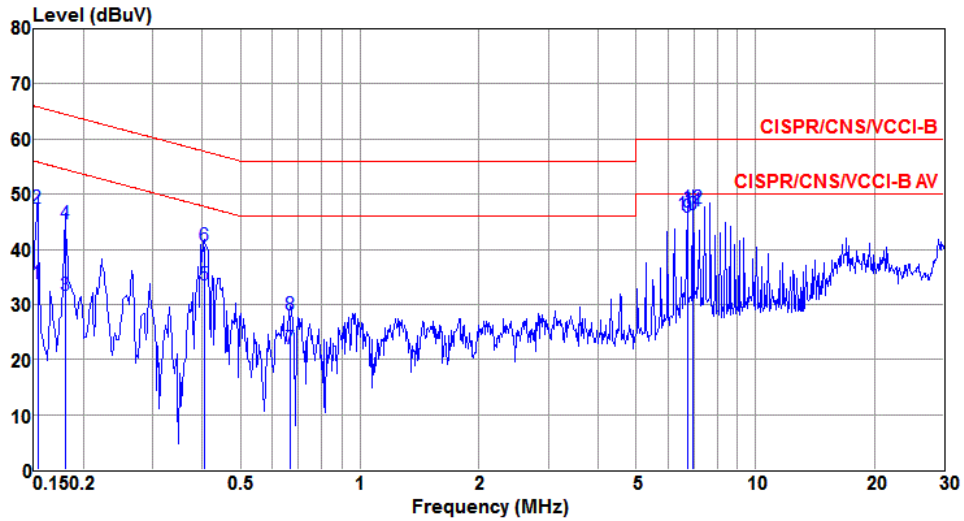

	Freq	Level	Limit	Over	Read	LISN	cable	Remark
	MHz	dBuV	Line	Limit	Level	factor	loss	
			dBuV	dB	dBuV	dB	dB	
1	0.153	33.80	55.82	-22.02	33.75	0.04	0.01	Average
2	0.153	47.33	65.82	-18.49	47.28	0.04	0.01	QP
3	0.180	31.57	54.50	-22.93	31.51	0.04	0.02	Average
4	0.180	44.69	64.50	-19.81	44.63	0.04	0.02	QP
5	0.404	33.46	47.77	-14.31	33.40	0.04	0.02	Average
6	0.404	40.55	57.77	-17.22	40.49	0.04	0.02	QP
7	0.668	22.03	46.00	-23.97	21.95	0.05	0.03	Average
8	0.668	28.21	56.00	-27.79	28.13	0.05	0.03	QP
9	6.720	45.84	50.00	-4.16	45.42	0.14	0.28	Average
10	6.720	46.24	60.00	-13.76	45.82	0.14	0.28	QP
11	6.960	46.96	50.00	-3.04	46.54	0.14	0.28	Average
12	6.960	47.38	60.00	-12.62	46.96	0.14	0.28	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB).
 2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).

3.2 6dB and Occupied Bandwidth

3.2.1 Limit of 6dB Bandwidth

The minimum 6dB bandwidth shall be at least 500 kHz.

3.2.2 Test Procedures


6dB Bandwidth

1. Set resolution bandwidth (RBW) = 100 kHz, Video bandwidth = 300 kHz.
2. Detector = Peak, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

Occupied Bandwidth

1. Set resolution bandwidth (RBW) = 10kHz, Video bandwidth = 30kHz.
2. Detector = Sample, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Use the OBW measurement function of spectrum analyzer to measure the occupied bandwidth.


3.2.3 Test Setup



3.2.4 Test Result of 6dB and Occupied Bandwidth


Lora card 0

Modulation / SF	Freq. (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
CSS / 12	923.3	0.597	0.5
CSS / 12	927.5	0.591	0.5

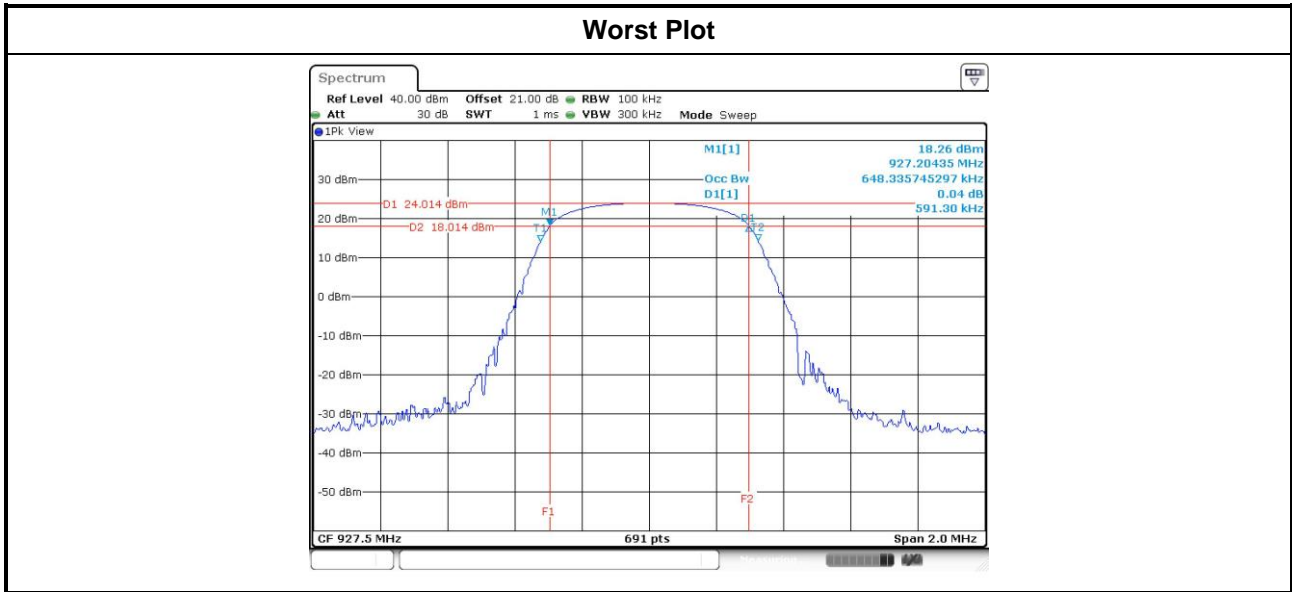


Lora card 1

Modulation / SF	Freq. (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
CSS / 12	923.3	0.591	0.5
CSS / 12	927.5	0.588	0.5

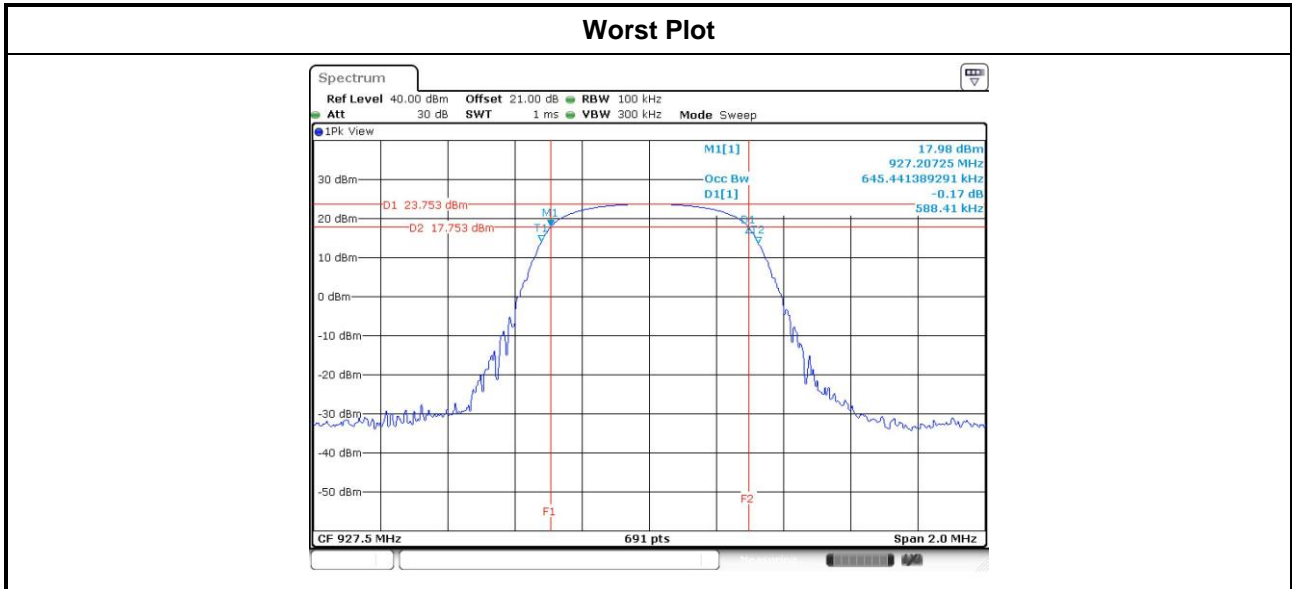


Lora card 0

Modulation / SF	Freq. (MHz)	99% Occupied Bandwidth (MHz)
CSS / 12	923.3	0.498
CSS / 12	927.5	0.496

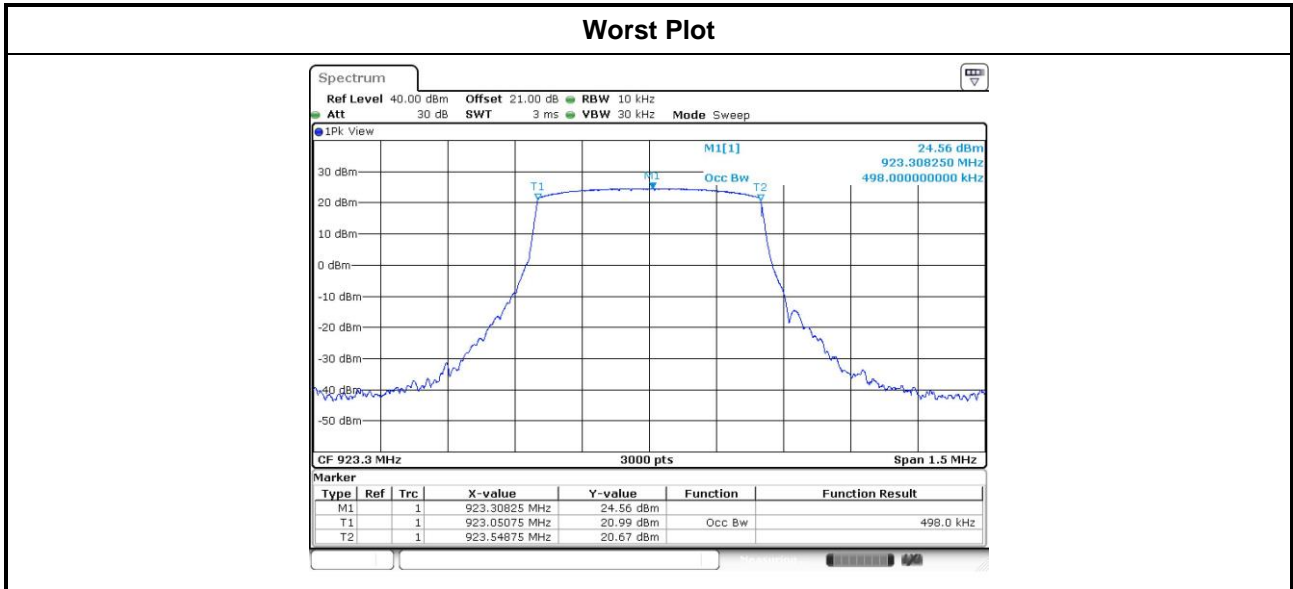

Lora card 1

Modulation / SF	Freq. (MHz)	99% Occupied Bandwidth (MHz)
CSS / 12	923.3	0.496
CSS / 12	927.5	0.498

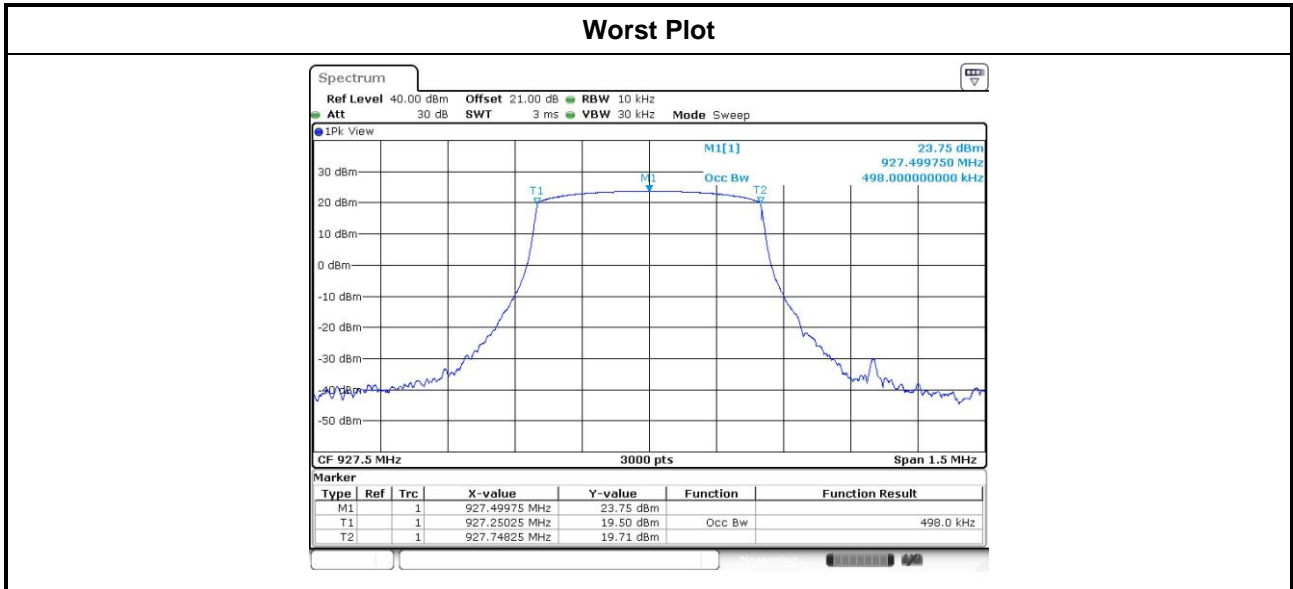

3.3 RF Output Power

3.3.1 Limit of RF Output Power

Conducted power shall not exceed 1Watt.


- Antenna gain \leq 6dBi, no any corresponding reduction is in output power limit.
- Antenna gain $>$ 6dBi

Transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi

3.3.2 Test Procedures

- Maximum Peak Conducted Output Power
 - Spectrum analyzer**
 1. Set RBW = 1MHz, VBW = 3MHz, Detector = Peak.
 2. Sweep time = auto, Trace mode = max hold, Allow trace to fully stabilize.
 3. Use the spectrum analyzer channel power measurement function with the band limits set equal to the DTS bandwidth edges.
 - Power meter**
 1. A broadband Peak RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.
- Maximum Conducted Output Power
 - Power meter**
 1. A broadband Average RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.

3.3.3 Test Setup



3.3.4 Test Result of Maximum Output Power

Lora Card 0

Modulation / SF	Freq. (MHz)	Output Power (mW)	Output Power (dBm)	Limit (dBm)
CSS / 12	923.3	254.683	24.06	28
CSS / 12	927.5	272.898	24.36	28

Note: Antenna gain is 8dBi > 6dBi, thus limit shall be reduced to 30 dBm – (8 dBi – 6 dBi) = 28 dBm

Lora Card 1

Modulation / SF	Freq. (MHz)	Output Power (mW)	Output Power (dBm)	Limit (dBm)
CSS / 12	923.3	252.348	24.02	28
CSS / 12	927.5	271.644	24.34	28

Note: Antenna gain is 8dBi > 6dBi, thus limit shall be reduced to 30 dBm – (8 dBi – 6 dBi) = 28 dBm

Total Power in the same band

Both Lora cards can transmit simultaneously but different channel

Mode	Card	Freq. (MHz)	Output Power (dBm)	Total Power (mW)	Total Power (dBm)	Limit (dBm)
1	Lora Card 0	923.3	24.06	526.327	27.21	28
	Lora Card 1	927.5	24.34			
2	Lora Card 0	927.5	24.36	525.246	27.20	28
	Lora Card 1	923.3	24.02			

3.4 Power Spectral Density


3.4.1 Limit of Power Spectral Density

Power spectral density shall not be greater than 8 dBm in any 3 kHz band.

3.4.2 Test Procedures

- Maximum peak conducted output power was used to demonstrate compliance to the fundamental output power limit.
 1. Set the RBW = 3kHz, VBW = 10kHz.
 2. Detector = Peak, Sweep time = auto couple.
 3. Trace mode = max hold, allow trace to fully stabilize.
 4. Use the peak marker function to determine the maximum amplitude level.
- Maximum (average) conducted output power was used to demonstrate compliance to the fundamental output power limit.
 1. Set the RBW = 3kHz, VBW = 10 kHz.
 2. Detector = RMS, Sweep time = auto couple.
 3. Employ trace averaging (RMS) mode over a minimum of 100 traces
 4. Use the peak marker function to determine the maximum amplitude level.

3.4.3 Test Setup




3.4.4 Test Result of Power Spectral Density

Lora Card 0

Modulation / SF	Freq. (MHz)	Total Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)
CSS / 12	923.3	3.86	6.00
CSS / 12	927.5	3.88	6.00


Note: Antenna gain is 8dBi > 6dBi, thus limit shall be reduced to 8 dBm – (8 dBi – 6 dBi) = 6 dBm

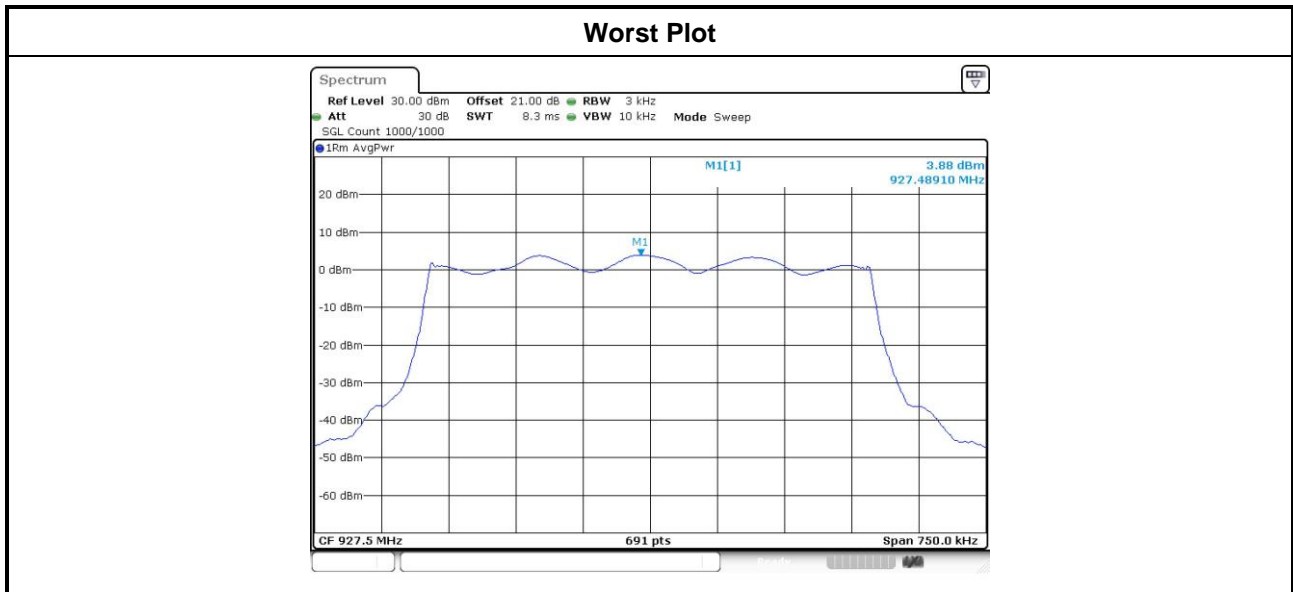

Lora Card 1

Modulation / SF	Freq. (MHz)	Total Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)
CSS / 12	923.3	2.94	8.00
CSS / 12	927.5	2.91	8.00

Note: Antenna gain is 8dBi > 6dBi, thus limit shall be reduced to 8 dBm – (8 dBi – 6 dBi) = 6 dBm

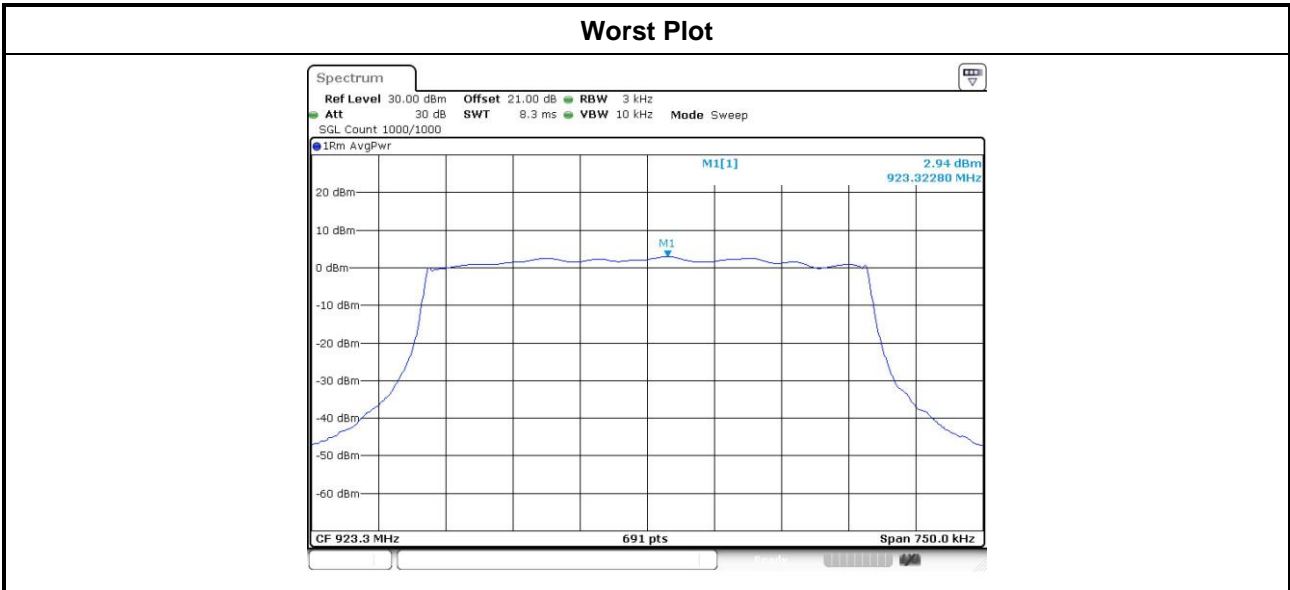

3.5 Unwanted Emissions into Restricted Frequency Bands

3.5.1 Limit of Unwanted Emissions into Restricted Frequency Bands

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1:
Quasi-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

Note 2:
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.


3.5.2 Test Procedures

1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:


1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

3.5.3 Test Setup

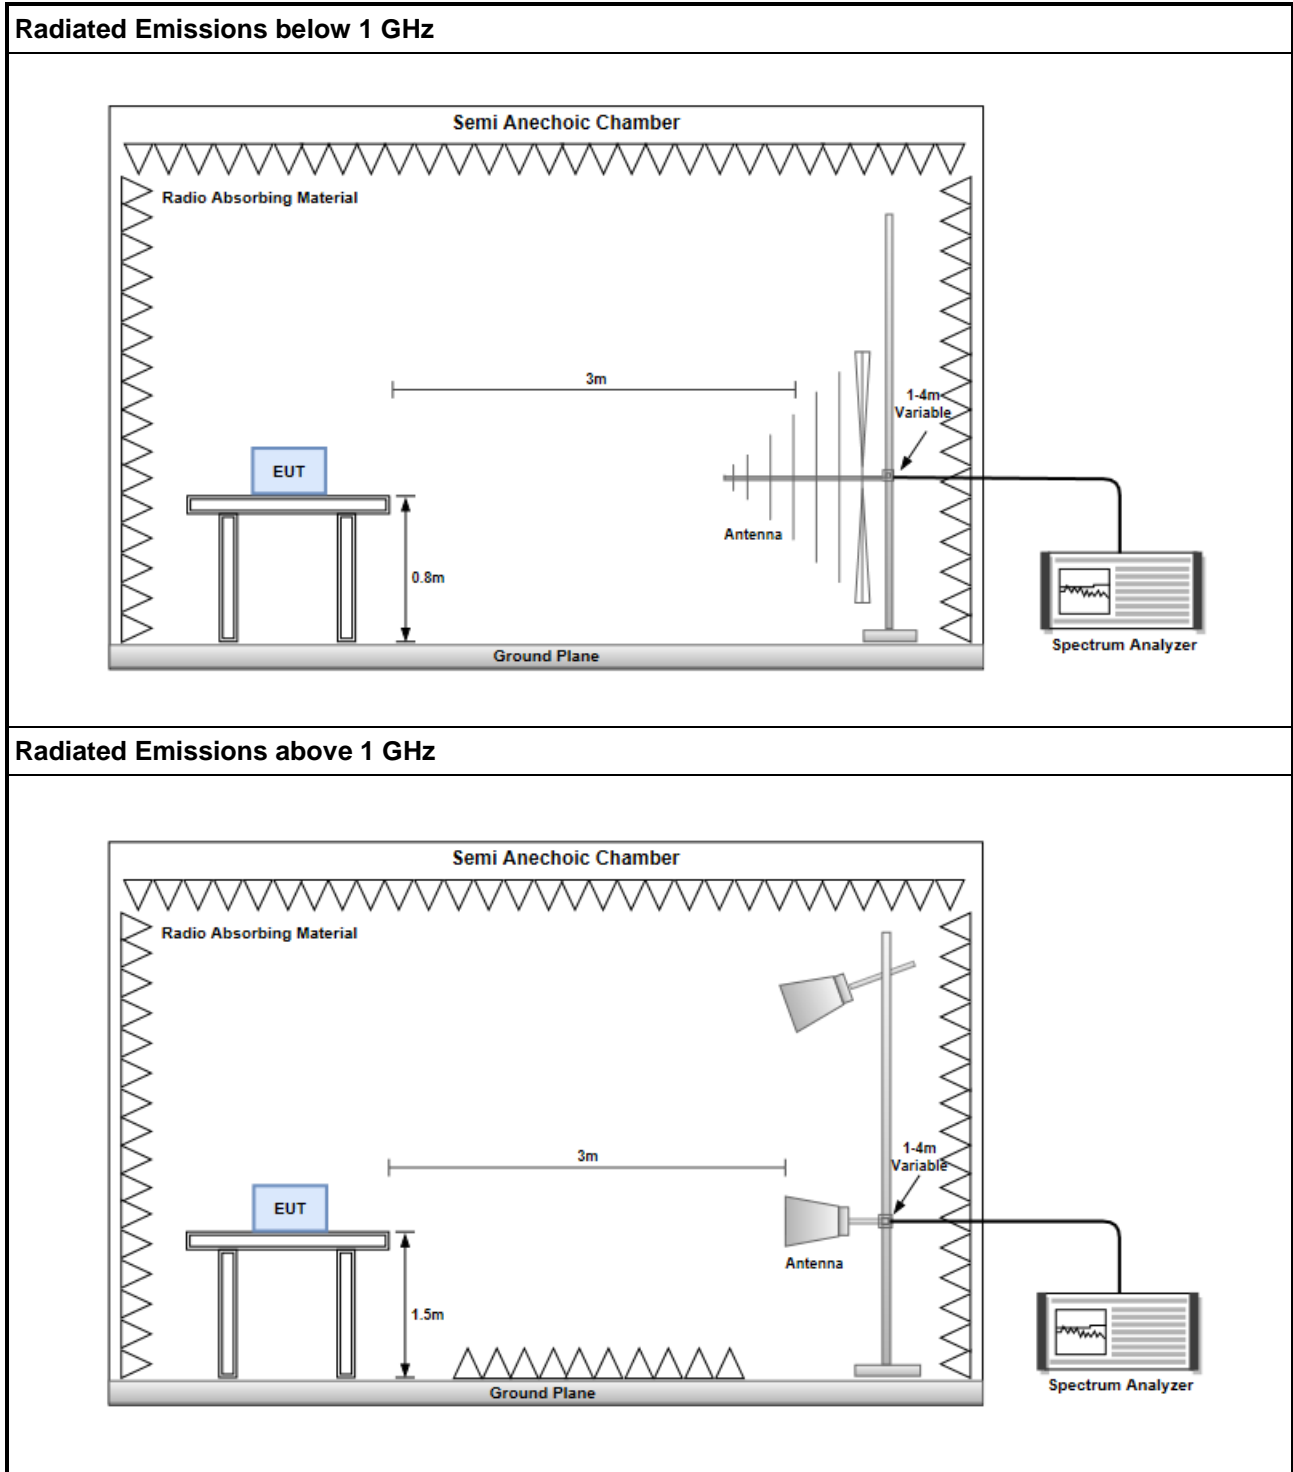

3.5.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

Modulation / SF	CSS / 12	Test Freq. (MHz)	923.3
Polarization	Horizontal	Test Configuration	1

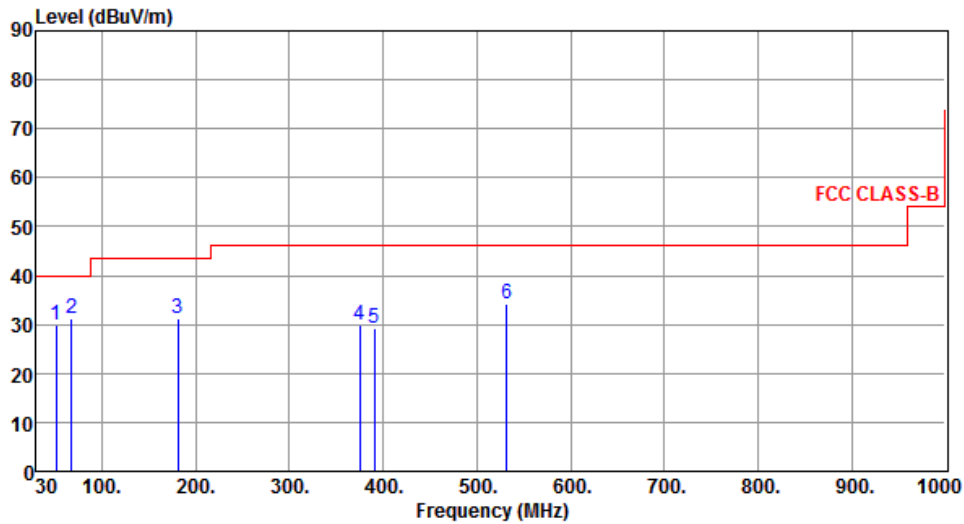

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	51.34	29.77	40.00	-10.23	37.54	-7.77	Peak	---	---
2	67.83	31.28	40.00	-8.72	41.49	-10.21	Peak	---	---
3	181.32	31.29	43.50	-12.21	41.14	-9.85	Peak	---	---
4	375.32	29.92	46.00	-16.08	35.58	-5.66	Peak	---	---
5	390.84	29.14	46.00	-16.86	34.35	-5.21	Peak	---	---
6	531.49	34.30	46.00	-11.70	36.44	-2.14	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Modulation / SF	CSS / 12	Test Freq. (MHz)	923.3
Polarization	Vertical	Test Configuration	1

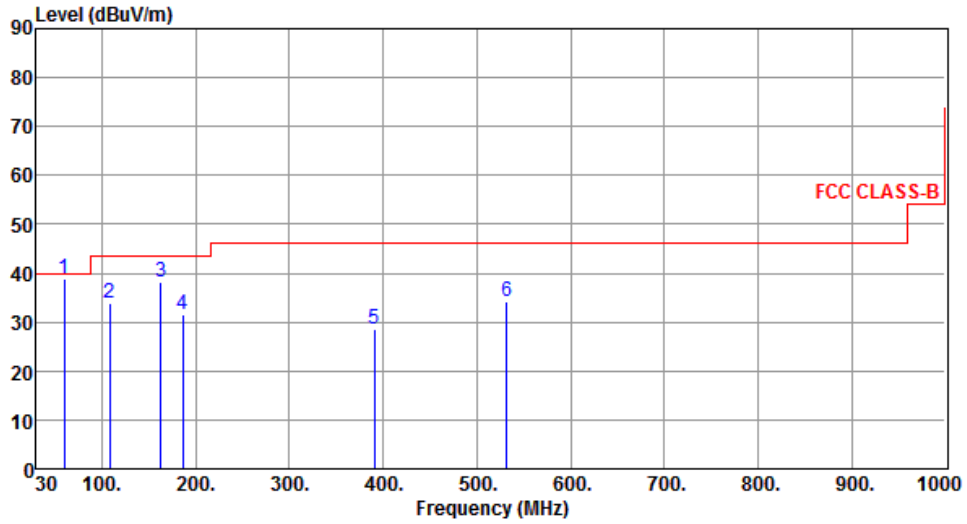

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	60.15	38.95	40.00	-1.05	47.42	-8.47	QP	100	145
2	108.57	33.75	43.50	-9.75	45.50	-11.75	Peak	---	---
3	162.89	38.26	43.50	-5.24	46.57	-8.31	Peak	---	---
4	186.17	31.62	43.50	-11.88	41.90	-10.28	Peak	---	---
5	390.84	28.56	46.00	-17.44	33.77	-5.21	Peak	---	---
6	531.49	34.25	46.00	-11.75	36.39	-2.14	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Modulation / SF	CSS / 12	Test Freq. (MHz)	927.5
Polarization	Horizontal	Test Configuration	1

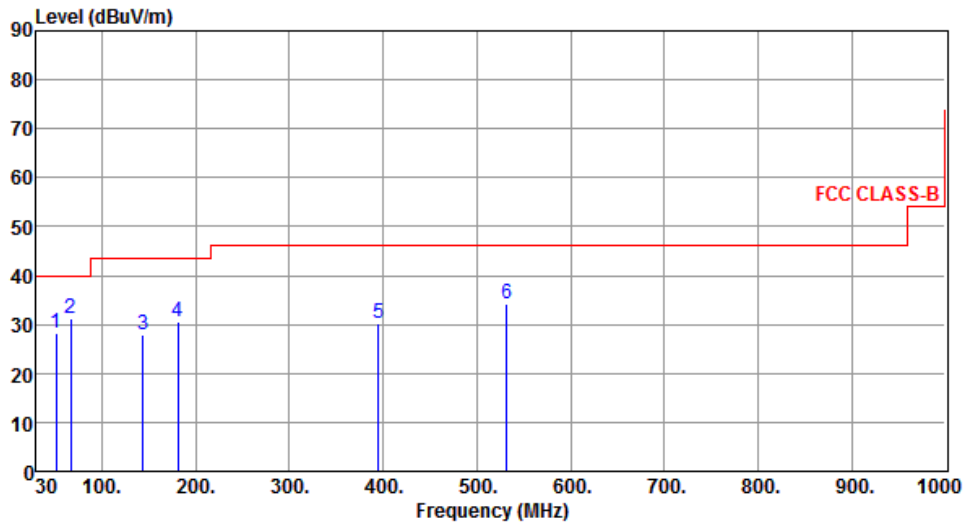

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	51.34	28.38	40.00	-11.62	36.15	-7.77	Peak	---	---
2	66.86	31.27	40.00	-8.73	41.27	-10.00	Peak	---	---
3	143.49	28.06	43.50	-15.44	36.57	-8.51	Peak	---	---
4	181.32	30.40	43.50	-13.10	40.25	-9.85	Peak	---	---
5	394.72	30.20	46.00	-15.80	35.30	-5.10	Peak	---	---
6	531.49	34.06	46.00	-11.94	36.20	-2.14	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Modulation / SF	CSS / 12	Test Freq. (MHz)	927.5
Polarization	Vertical	Test Configuration	1

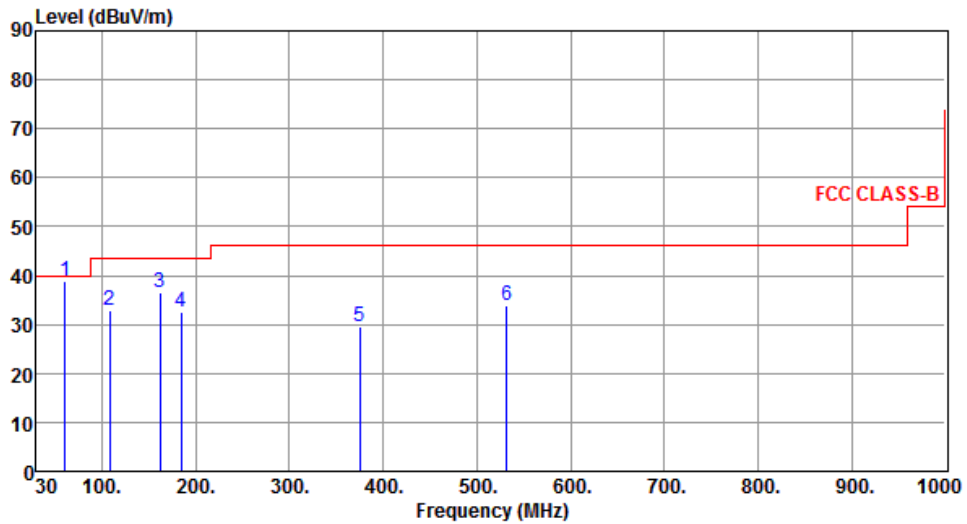

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	61.04	38.96	40.00	-1.04	47.64	-8.68	QP	100	146
2	108.57	33.03	43.50	-10.47	44.78	-11.75	Peak	---	---
3	161.92	36.57	43.50	-6.93	44.84	-8.27	Peak	---	---
4	184.23	32.52	43.50	-10.98	42.62	-10.10	Peak	---	---
5	375.32	29.61	46.00	-16.39	35.27	-5.66	Peak	---	---
6	531.49	33.95	46.00	-12.05	36.09	-2.14	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Modulation / SF	CSS / 12	Test Freq. (MHz)	923.3
Polarization	Horizontal	Test Configuration	3

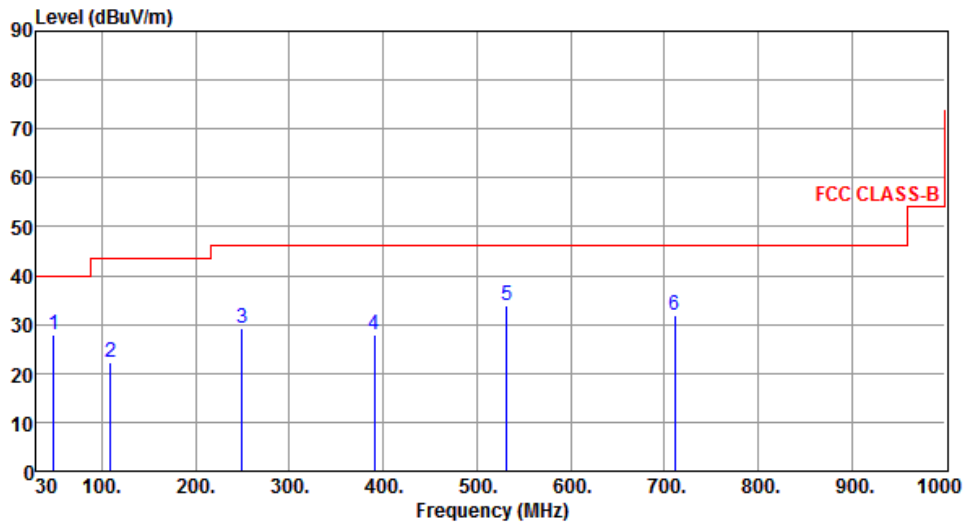

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	48.43	27.78	40.00	-12.22	35.48	-7.70	Peak	---	---
2	109.54	22.40	43.50	-21.10	34.00	-11.60	Peak	---	---
3	249.22	29.22	46.00	-16.78	38.57	-9.35	Peak	---	---
4	390.84	27.85	46.00	-18.15	33.06	-5.21	Peak	---	---
5	531.49	33.75	46.00	-12.25	35.89	-2.14	Peak	---	---
6	710.94	31.72	46.00	-14.28	30.71	1.01	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Modulation / SF	CSS / 12	Test Freq. (MHz)	923.3
Polarization	Vertical	Test Configuration	3

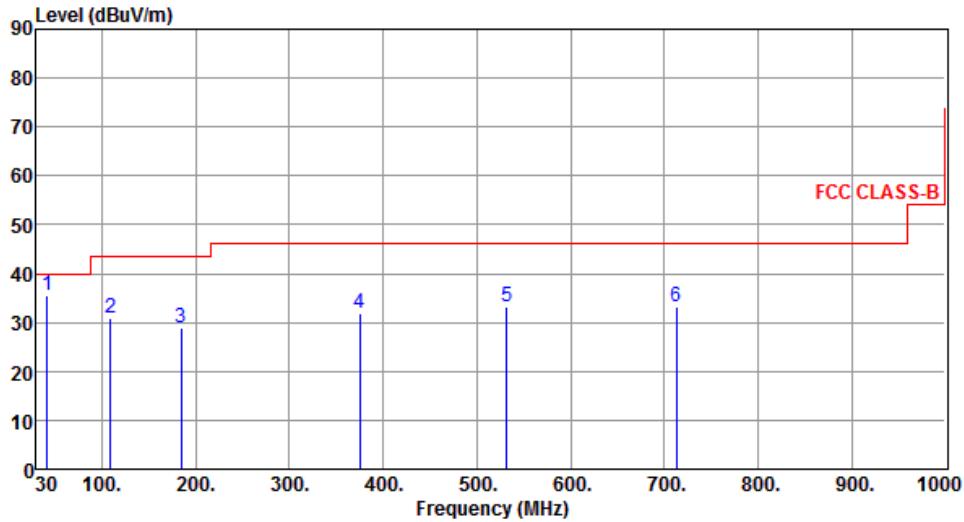

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	41.64	35.46	40.00	-4.54	43.46	-8.00	QP	100	311
2	109.54	30.89	43.50	-12.61	42.49	-11.60	Peak	---	---
3	184.23	29.00	43.50	-14.50	39.10	-10.10	Peak	---	---
4	375.32	31.85	46.00	-14.15	37.51	-5.66	Peak	---	---
5	531.49	33.14	46.00	-12.86	35.28	-2.14	Peak	---	---
6	712.88	33.09	46.00	-12.91	32.05	1.04	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Modulation / SF	CSS / 12	Test Freq. (MHz)	927.5
Polarization	Horizontal	Test Configuration	3

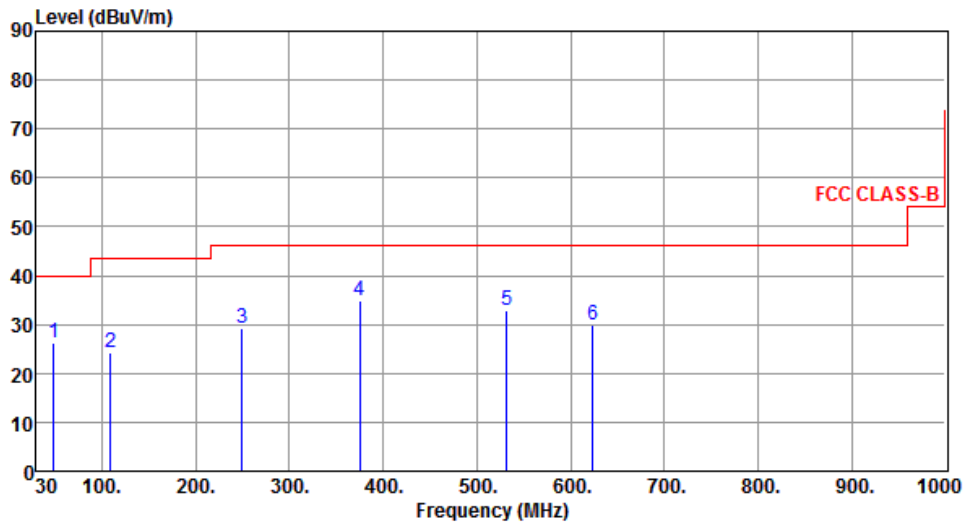

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	48.43	26.31	40.00	-13.69	34.01	-7.70	Peak	---	---
2	109.54	24.15	43.50	-19.35	35.75	-11.60	Peak	---	---
3	249.22	29.38	46.00	-16.62	38.73	-9.35	Peak	---	---
4	375.32	34.94	46.00	-11.06	40.60	-5.66	Peak	---	---
5	531.49	32.86	46.00	-13.14	35.00	-2.14	Peak	---	---
6	623.64	29.90	46.00	-16.10	30.31	-0.41	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Modulation / SF	CSS / 12	Test Freq. (MHz)	927.5
Polarization	Vertical	Test Configuration	3

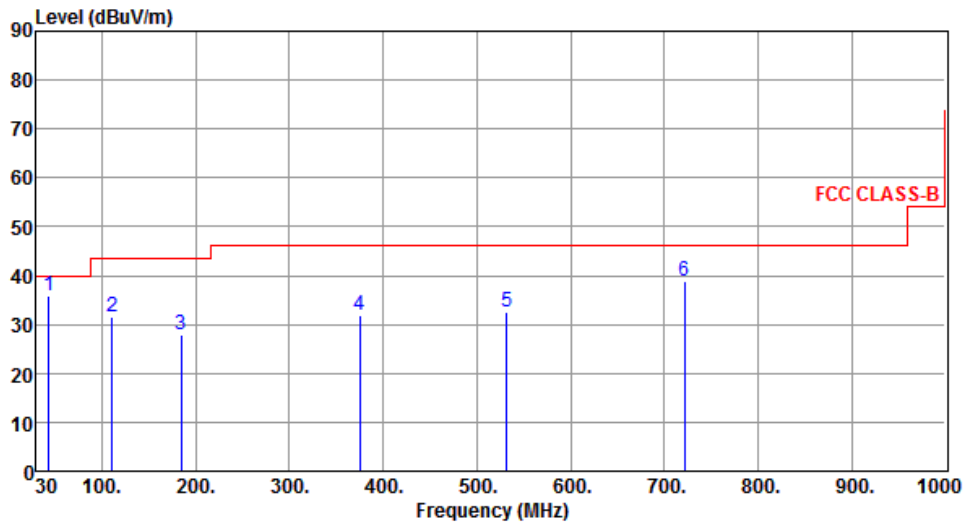

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	43.58	35.82	40.00	-4.18	43.69	-7.87	QP	100	321
2	110.51	31.55	43.50	-11.95	43.04	-11.49	Peak	---	---
3	184.23	27.96	43.50	-15.54	38.06	-10.10	Peak	---	---
4	375.32	31.96	46.00	-14.04	37.62	-5.66	Peak	---	---
5	531.49	32.68	46.00	-13.32	34.82	-2.14	Peak	---	---
6	721.61	38.89	46.00	-7.11	37.66	1.23	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

3.5.5 Transmitter Radiated Unwanted Emissions (Above 1GHz)

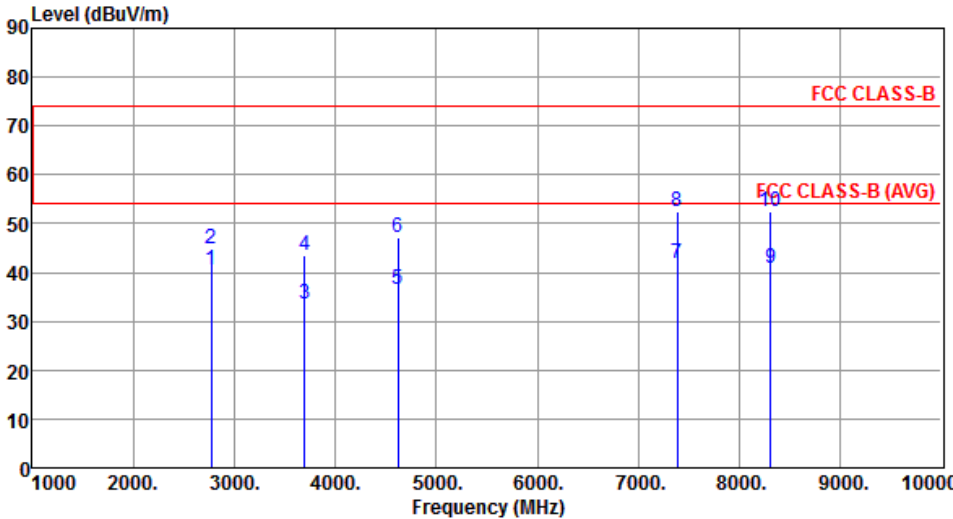Modulation / SF	CSS / 12	Test Freq. (MHz)	923.3																																																																																																														
Polarization	Horizontal	Test Configuration	1																																																																																																														
 <table border="1"> <thead> <tr> <th>Point</th> <th>Freq. MHz</th> <th>Emission level dBuV/m</th> <th>Limit dBuV/m</th> <th>Margin dB</th> <th>SA reading dBuV</th> <th>Factor dB</th> <th>Remark</th> <th>ANT High cm</th> <th>Turn Table deg</th> </tr> </thead> <tbody> <tr><td>1</td><td>2769.90</td><td>40.45</td><td>54.00</td><td>-13.55</td><td>42.61</td><td>-2.16</td><td>Average</td><td>153</td><td>37</td></tr> <tr><td>2</td><td>2769.90</td><td>44.97</td><td>74.00</td><td>-29.03</td><td>47.13</td><td>-2.16</td><td>Peak</td><td>153</td><td>37</td></tr> <tr><td>3</td><td>3693.20</td><td>33.57</td><td>54.00</td><td>-20.43</td><td>33.49</td><td>0.08</td><td>Average</td><td>100</td><td>284</td></tr> <tr><td>4</td><td>3693.20</td><td>43.62</td><td>74.00</td><td>-30.38</td><td>43.54</td><td>0.08</td><td>Peak</td><td>100</td><td>284</td></tr> <tr><td>5</td><td>4616.50</td><td>36.41</td><td>54.00</td><td>-17.59</td><td>33.46</td><td>2.95</td><td>Average</td><td>265</td><td>45</td></tr> <tr><td>6</td><td>4616.50</td><td>47.02</td><td>74.00</td><td>-26.98</td><td>44.07</td><td>2.95</td><td>Peak</td><td>265</td><td>45</td></tr> <tr><td>7</td><td>7386.40</td><td>41.85</td><td>54.00</td><td>-12.15</td><td>33.61</td><td>8.24</td><td>Average</td><td>115</td><td>90</td></tr> <tr><td>8</td><td>7386.40</td><td>52.36</td><td>74.00</td><td>-21.64</td><td>44.12</td><td>8.24</td><td>Peak</td><td>115</td><td>90</td></tr> <tr><td>9</td><td>8309.70</td><td>41.01</td><td>54.00</td><td>-12.99</td><td>31.75</td><td>9.26</td><td>Average</td><td>100</td><td>268</td></tr> <tr><td>10</td><td>8309.70</td><td>52.43</td><td>74.00</td><td>-21.57</td><td>43.17</td><td>9.26</td><td>Peak</td><td>100</td><td>268</td></tr> </tbody> </table>				Point	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg	1	2769.90	40.45	54.00	-13.55	42.61	-2.16	Average	153	37	2	2769.90	44.97	74.00	-29.03	47.13	-2.16	Peak	153	37	3	3693.20	33.57	54.00	-20.43	33.49	0.08	Average	100	284	4	3693.20	43.62	74.00	-30.38	43.54	0.08	Peak	100	284	5	4616.50	36.41	54.00	-17.59	33.46	2.95	Average	265	45	6	4616.50	47.02	74.00	-26.98	44.07	2.95	Peak	265	45	7	7386.40	41.85	54.00	-12.15	33.61	8.24	Average	115	90	8	7386.40	52.36	74.00	-21.64	44.12	8.24	Peak	115	90	9	8309.70	41.01	54.00	-12.99	31.75	9.26	Average	100	268	10	8309.70	52.43	74.00	-21.57	43.17	9.26	Peak	100	268
Point	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg																																																																																																								
1	2769.90	40.45	54.00	-13.55	42.61	-2.16	Average	153	37																																																																																																								
2	2769.90	44.97	74.00	-29.03	47.13	-2.16	Peak	153	37																																																																																																								
3	3693.20	33.57	54.00	-20.43	33.49	0.08	Average	100	284																																																																																																								
4	3693.20	43.62	74.00	-30.38	43.54	0.08	Peak	100	284																																																																																																								
5	4616.50	36.41	54.00	-17.59	33.46	2.95	Average	265	45																																																																																																								
6	4616.50	47.02	74.00	-26.98	44.07	2.95	Peak	265	45																																																																																																								
7	7386.40	41.85	54.00	-12.15	33.61	8.24	Average	115	90																																																																																																								
8	7386.40	52.36	74.00	-21.64	44.12	8.24	Peak	115	90																																																																																																								
9	8309.70	41.01	54.00	-12.99	31.75	9.26	Average	100	268																																																																																																								
10	8309.70	52.43	74.00	-21.57	43.17	9.26	Peak	100	268																																																																																																								
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>																																																																																																																	

Modulation / SF	CSS / 12	Test Freq. (MHz)	923.3
Polarization	Vertical	Test Configuration	1

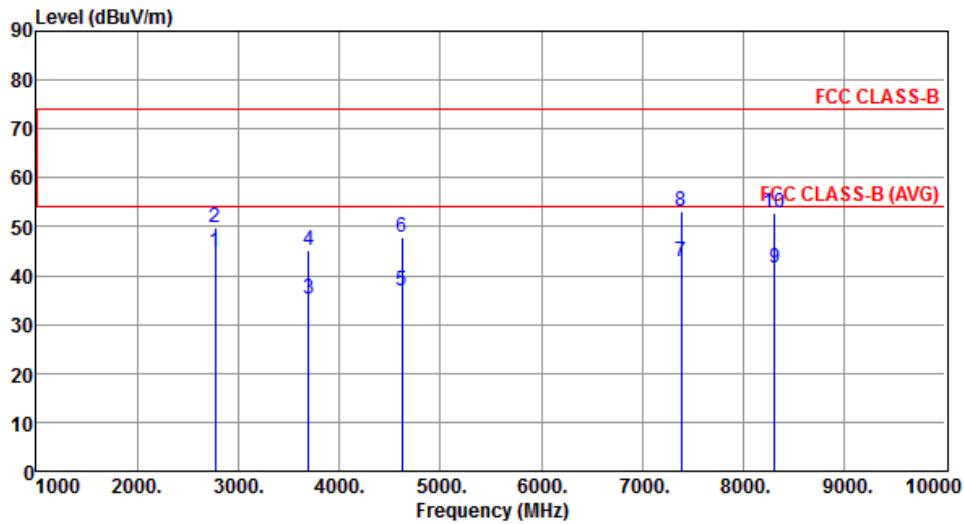


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2769.90	44.69	54.00	-9.31	46.85	-2.16	Average	372	11
2	2769.90	49.77	74.00	-24.23	51.93	-2.16	Peak	372	11
3	3693.20	35.31	54.00	-18.69	35.23	0.08	Average	232	3
4	3693.20	45.28	74.00	-28.72	45.20	0.08	Peak	232	3
5	4616.50	36.83	54.00	-17.17	33.88	2.95	Average	238	352
6	4616.50	47.76	74.00	-26.24	44.81	2.95	Peak	238	352
7	7386.40	42.86	54.00	-11.14	34.62	8.24	Average	167	200
8	7386.40	53.29	74.00	-20.71	45.05	8.24	Peak	167	200
9	8309.70	41.52	54.00	-12.48	32.26	9.26	Average	100	56
10	8309.70	52.66	74.00	-21.34	43.40	9.26	Peak	100	56

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation / SF	CSS / 12	Test Freq. (MHz)	927.5
Polarization	Horizontal	Test Configuration	1

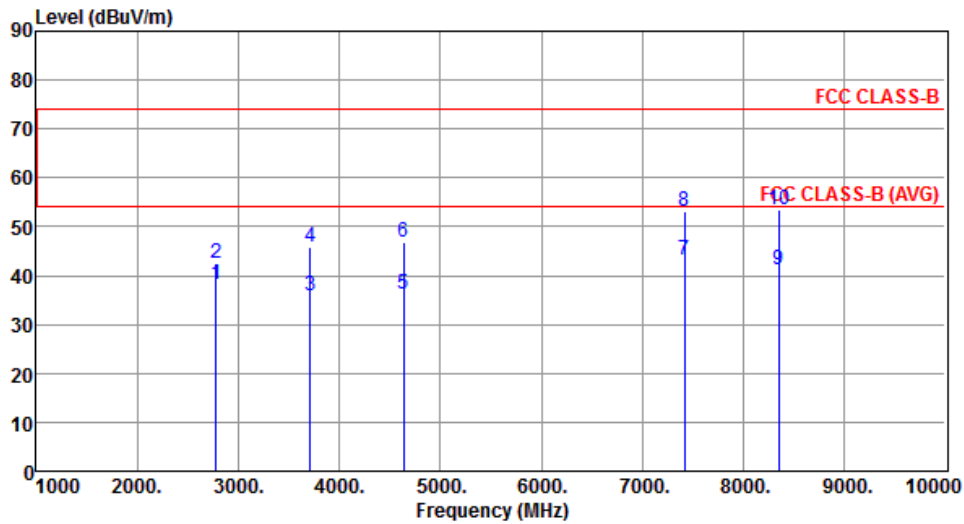


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2782.50	38.07	54.00	-15.93	40.18	-2.11	Average	153	82
2	2782.50	42.45	74.00	-31.55	44.56	-2.11	Peak	153	82
3	3710.00	35.71	54.00	-18.29	35.60	0.11	Average	119	279
4	3710.00	45.81	74.00	-28.19	45.70	0.11	Peak	119	279
5	4637.50	36.24	54.00	-17.76	33.22	3.02	Average	260	38
6	4637.50	46.97	74.00	-27.03	43.95	3.02	Peak	260	38
7	7420.00	43.07	54.00	-10.93	34.77	8.30	Average	100	88
8	7420.00	53.14	74.00	-20.86	44.84	8.30	Peak	100	88
9	8347.50	41.14	54.00	-12.86	31.85	9.29	Average	100	285
10	8347.50	53.36	74.00	-20.64	44.07	9.29	Peak	100	285

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation / SF	CSS / 12	Test Freq. (MHz)	927.5
Polarization	Vertical	Test Configuration	1

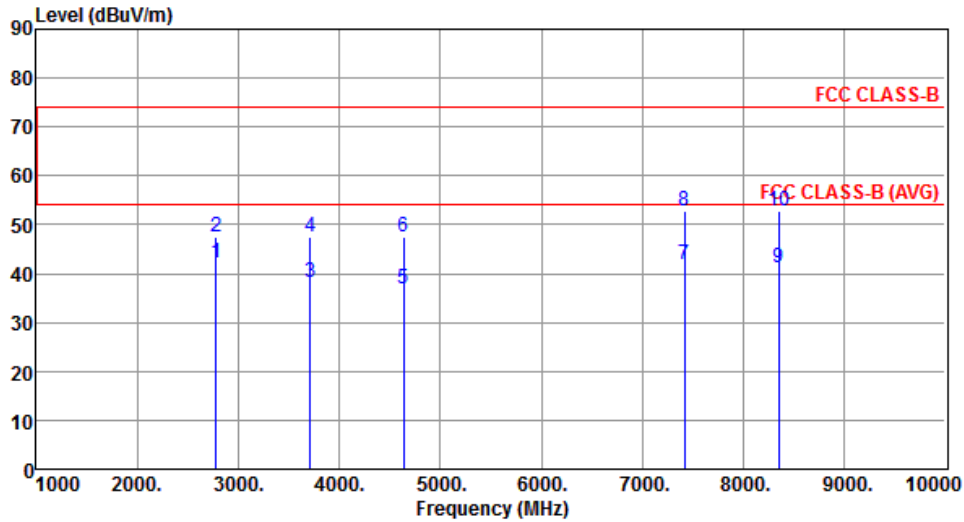

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2782.50	42.07	54.00	-11.93	44.18	-2.11	Average	366	14
2	2782.50	47.53	74.00	-26.47	49.64	-2.11	Peak	366	14
3	3710.00	38.19	54.00	-15.81	38.08	0.11	Average	145	4
4	3710.00	47.50	74.00	-26.50	47.39	0.11	Peak	145	4
5	4637.50	36.77	54.00	-17.23	33.75	3.02	Average	209	5
6	4637.50	47.52	74.00	-26.48	44.50	3.02	Peak	209	5
7	7420.00	41.91	54.00	-12.09	33.61	8.30	Average	155	196
8	7420.00	52.96	74.00	-21.04	44.66	8.30	Peak	155	196
9	8347.50	41.06	54.00	-12.94	31.77	9.29	Average	100	70
10	8347.50	52.65	74.00	-21.35	43.36	9.29	Peak	100	70

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

3.6 Emissions in Non-Restricted Frequency Bands

3.6.1 Emissions in Non-Restricted Frequency Bands Limit

Peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz

3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.6.3 Test Procedures


Reference level measurement

1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Use the peak marker function to determine the maximum PSD level

Emission level measurement


1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Scan Frequency range is up to 10GHz
4. Use the peak marker function to determine the maximum amplitude level

3.6.4 Test Setup

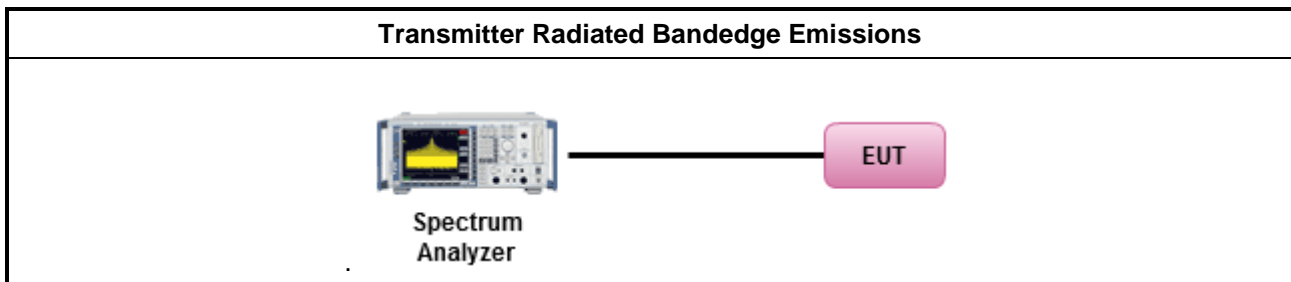


3.6.5 Unwanted Emissions into Non-Restricted Frequency Bands

Lora Card 0

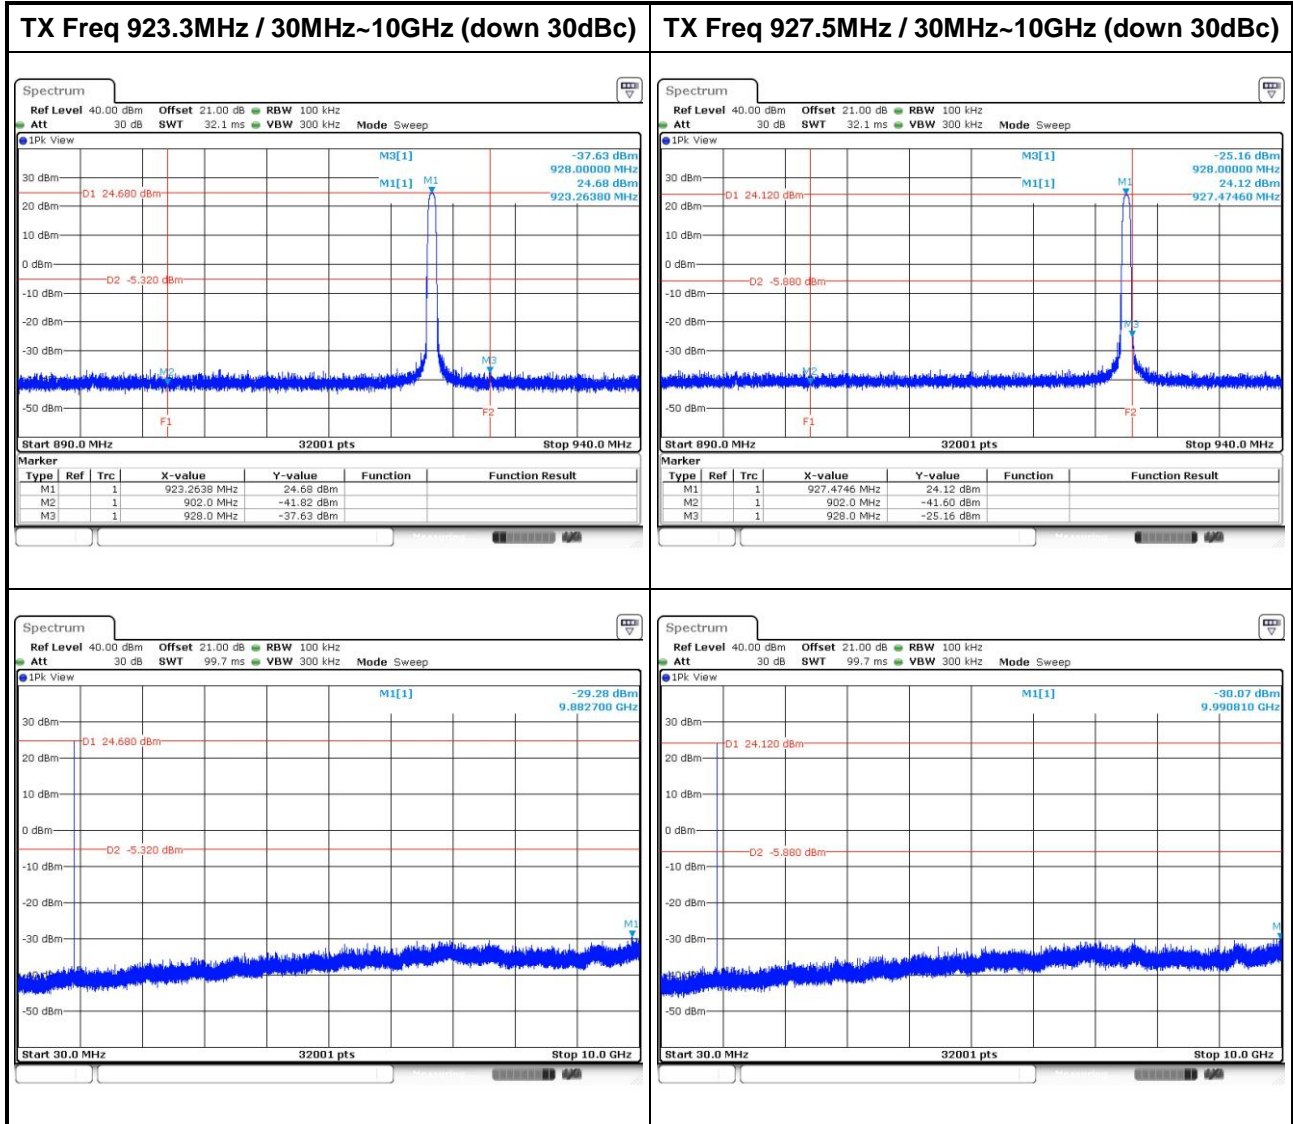

Lora Card 1

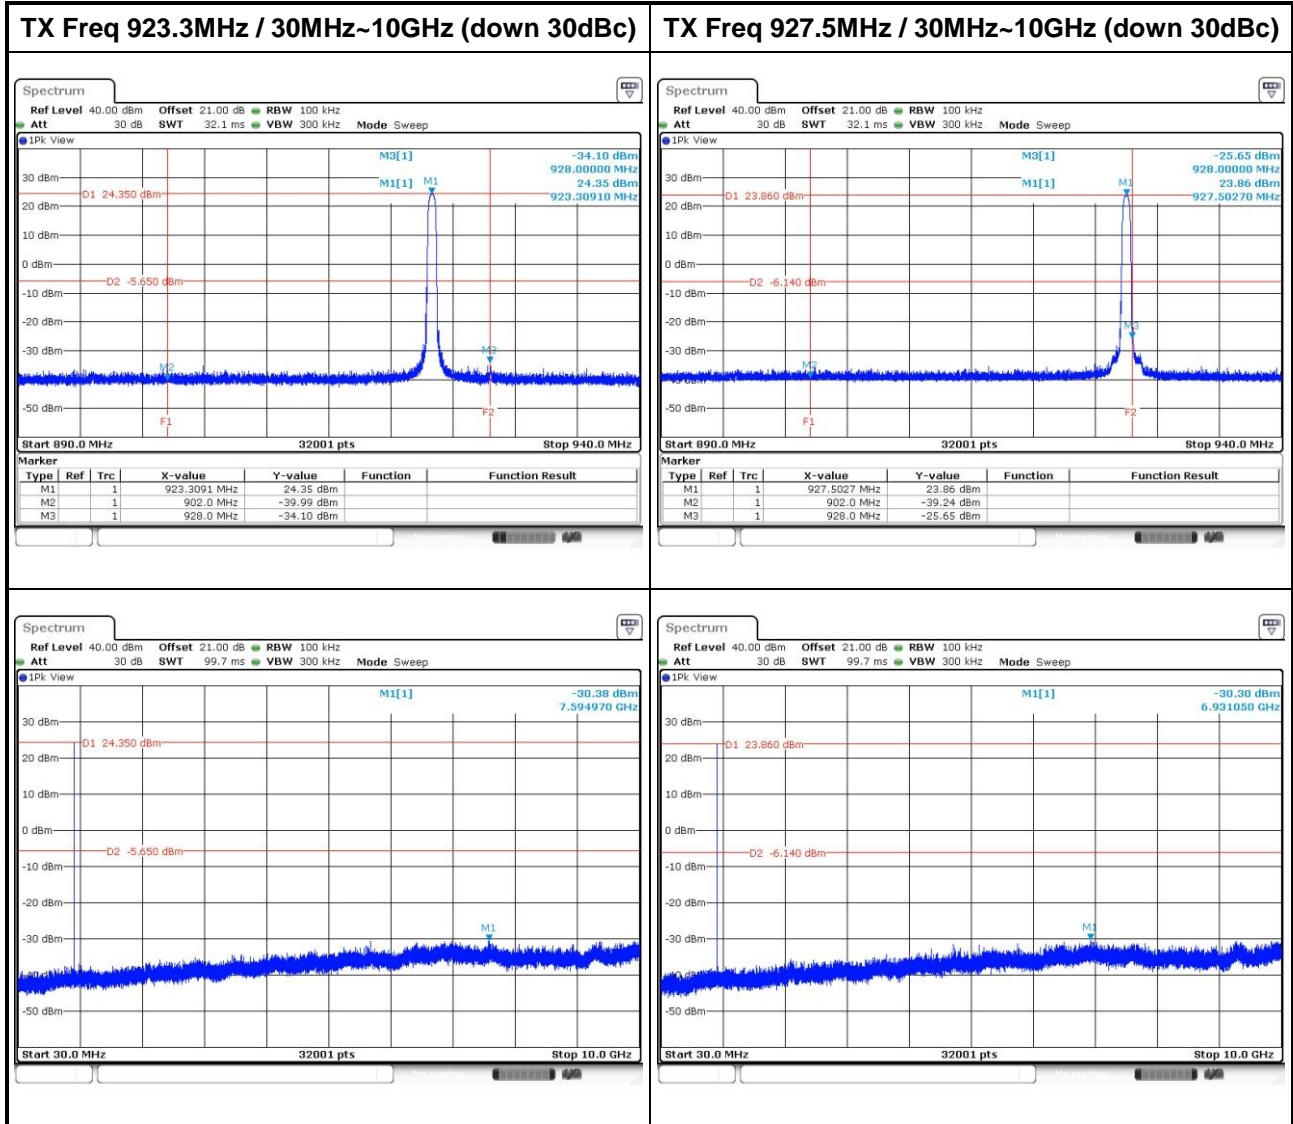

4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <http://www.icertifi.com.tw>.

Linkou

Tel: 886-2-2601-1640

No. 30-2, Ding Fwu Tsuen, Lin
Kou District, New Taipei City,
Taiwan, R.O.C.

Kwei Shan

Tel: 886-3-271-8666

No. 3-1, Lane 6, Wen San 3rd St.,
Kwei Shan District, Tao Yuan City
333, Taiwan, R.O.C.

Kwei Shan Site II

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd
St., Kwei Shan District, Tao Yuan
City 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Email: ICC_Service@icertifi.com.tw

==END==