



FCC TEST REPORT (PART 24)

REPORT NO.: RF111121C23-3

MODEL NO.: WIXHSM-100

FCC ID: MXF- WIXHSM-100

RECEIVED: Nov. 21, 2011

TESTED: Dec. 12 ~ Dec. 26, 2011

ISSUED: Dec. 30, 2011

APPLICANT: Gemtek Technology Co., Ltd.

ADDRESS: No. 15-1, Zhonghua Rd, Hsinchu Industrial Park,
Hsinchu County, Taiwan, R.O.C. 303

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Vil., Lin Kou Dist.,
New Taipei City, Taiwan (R.O.C)

TEST LOCATION: No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei
Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This test report consists of 69 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by TAF or any government agencies. The test results in the report only apply to the tested sample.





TABLE OF CONTENTS

| | |
|---|----|
| RELEASE CONTROL RECORD | 4 |
| 1 CERTIFICATION | 5 |
| 2 SUMMARY OF TEST RESULTS | 6 |
| 2.1 MEASUREMENT UNCERTAINTY | 6 |
| 3 GENERAL INFORMATION..... | 7 |
| 3.1 GENERAL DESCRIPTION OF EUT | 7 |
| 3.2 DESCRIPTION OF TEST MODES | 8 |
| 3.2.1 CONFIGURATION OF SYSTEM UNDER TEST | 9 |
| 3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL | 10 |
| 3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS | 14 |
| 3.4 DESCRIPTION OF SUPPORT UNITS | 14 |
| 4 TEST TYPES AND RESULTS | 15 |
| 4.1 OUTPUT POWER MEASUREMENT | 15 |
| 4.1.1 LIMITS OF OUTPUT POWER MEASUREMENT | 15 |
| 4.1.2 TEST INSTRUMENTS..... | 16 |
| 4.1.3 TEST PROCEDURES | 17 |
| 4.1.4 TEST SETUP..... | 18 |
| 4.1.5 EUT OPERATING CONDITIONS | 18 |
| 4.1.6 TEST RESULTS | 19 |
| 4.2 FREQUENCY STABILITY MEASUREMENT..... | 24 |
| 4.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT | 24 |
| 4.2.2 TEST INSTRUMENTS..... | 24 |
| 4.2.3 TEST PROCEDURE..... | 25 |
| 4.2.4 TEST SETUP..... | 25 |
| 4.2.5 TEST RESULTS | 26 |
| 4.3 OCCUPIED BANDWIDTH MEASUREMENT | 28 |
| 4.3.1 LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT | 28 |
| 4.3.2 TEST INSTRUMENTS..... | 28 |
| 4.3.3 TEST SETUP..... | 28 |
| 4.3.4 TEST PROCEDURES | 29 |
| 4.3.5 EUT OPERATING CONDITION | 29 |
| 4.3.6 TEST RESULTS | 30 |
| 4.4 BAND EDGE MEASUREMENT..... | 36 |
| 4.4.1 LIMITS OF BAND EDGE MEASUREMENT | 36 |
| 4.4.2 TEST INSTRUMENTS..... | 36 |



A D T

| | | |
|-------|---|----|
| 4.4.3 | TEST SETUP..... | 36 |
| 4.4.4 | TEST PROCEDURES | 37 |
| 4.4.5 | EUT OPERATING CONDITION | 37 |
| 4.4.6 | TEST RESULTS | 38 |
| 4.5 | CONDUCTED SPURIOUS EMISSIONS..... | 44 |
| 4.5.1 | LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT | 44 |
| 4.5.2 | TEST INSTRUMENTS..... | 44 |
| 4.5.3 | TEST PROCEDURE..... | 45 |
| 4.5.4 | TEST SETUP..... | 45 |
| 4.5.5 | EUT OPERATING CONDITIONS | 45 |
| 4.5.6 | TEST RESULTS | 46 |
| 4.6 | RADIATED EMISSION MEASUREMENT | 56 |
| 4.6.1 | LIMITS OF RADIATED EMISSION MEASUREMENT..... | 56 |
| 4.6.2 | TEST INSTRUMENTS..... | 56 |
| 4.6.3 | TEST PROCEDURES | 57 |
| 4.6.4 | DEVIATION FROM TEST STANDARD | 57 |
| 4.6.5 | TEST SETUP..... | 58 |
| 4.6.6 | EUT OPERATING CONDITIONS | 58 |
| 4.6.7 | TEST RESULTS | 59 |
| 5 | PHOTOGRAPHS OF THE TEST CONFIGURATION..... | 67 |
| 6 | INFORMATION ON THE TESTING LABORATORIES | 68 |
| 7 | APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB | 69 |



A D T

RELEASE CONTROL RECORD

| ISSUE NO. | REASON FOR CHANGE | DATE ISSUED |
|------------------|-------------------|---------------|
| Original release | N/A | Dec. 30, 2011 |



1 CERTIFICATION

PRODUCT: WiMAX Smart Phone
MODEL NO.: WIXHSM-100
BRAND: Gemtek
APPLICANT: Gemtek Technology Co., Ltd.
TEST SAMPLE: ENGINEERING SAMPLE
TESTED: Dec. 12 ~ Dec. 26, 2011
TEST STANDARDS: **FCC Part 24, Subpart E**
ANSI C63.4-2003

The above equipment (model: WIXHSM-100) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY :  , DATE : Dec. 30, 2011
Pettie Chen / Specialist

APPROVED BY :  , DATE : Dec. 30, 2011
Gary Chang / Technical Manager

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

| APPLIED STANDARD: FCC Part 24 & Part 2 | | | |
|--|--|--------|--|
| STANDARD SECTION | TEST TYPE AND LIMIT | RESULT | REMARK |
| 2.1046 24.232 | Maximum Peak Output Power Limit: max. 2 watts e.i.r.p peak power | PASS | Meet the requirement of limit. Max. e.i.r.p is 29.4dBm at 1880.0MHz. |
| 2.1055 24.235 | Frequency Stability AFC Freq. Error vs. Voltage AFC Freq. Error vs. Temperature Limit: max. +/-2.5ppm | PASS | Meet the requirement of limit. |
| 2.1049 24.238(b) | Occupied Bandwidth | PASS | Meet the requirement of limit. |
| 24.238(b) | Band Edge Measurements | PASS | Meet the requirement of limit. |
| 2.1051 24.238 | Conducted Spurious Emissions | PASS | Meet the requirement of limit. |
| 2.1053 24.238 | Radiated Spurious Emissions | PASS | Meet the requirement of limit. Minimum passing margin is -5.2dB at 3700.40MHz. |

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

| MEASUREMENT | FREQUENCY | UNCERTAINTY |
|---------------------|-----------------|-------------|
| Conducted emissions | 9kHz~30MHz | 2.44 dB |
| Radiated emissions | 30MHz ~ 200MHz | 3.34 dB |
| | 200MHz ~1000MHz | 3.35 dB |
| | 1GHz ~ 18GHz | 2.26 dB |
| | 18GHz ~ 40GHz | 1.94 dB |

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

| | | |
|------------------------------|---|-----------------------|
| EUT | WiMAX Smart Phone | |
| MODEL NO. | WIXHSM-100 | |
| FCC ID | MXF-WIXHSM-100 | |
| POWER SUPPLY | 5.0Vdc (adapter or host equipment) 3.7Vdc (battery) | |
| MODULATION TYPE | GSM, GPRS, E-GPRS | GMSK, 8PSK |
| | WCDMA | BPSK |
| FREQUENCY RANGE | GSM, GPRS, E-GPRS | 1850.2MHz ~ 1909.8MHz |
| | WCDMA | 1852.4MHz ~ 1907.6MHz |
| MAX. EIRP POWER | GSM | 0.8710Watts |
| | GPRS | 0.7413Watts |
| | E-GPRS | 0.3162Watts |
| | WCDMA | 0.1698Watts |
| MULTI-SLOTS CLASS | 12 | |
| WCDMA RELEASE VERSION | 6 | |
| ANTENNA TYPE | PIFA antenna with 1dBi gain | |
| I/O PORTS | Refer to users' manual | |
| DATA CABLE | 1.2 m shielded USB cable without core | |
| ACCESSORY DEVICES | Battery, Adapter, Earphone (1.3m non-shielded w/o core) | |

NOTE:

- The EUT was powered by the following adapters and battery:

| ADAPTER 1 | |
|------------------|--|
| BRAND: | DVE |
| MODEL: | DSC-5PFC-05 FUS 050100 DSC-5PFC-05 FUS 052100 (For Marketing different) |
| INPUT: | 100-240Vac, 50-60Hz, 0.2A |
| OUTPUT: | 5Vdc, 1A |

| ADAPTER 2 | |
|------------------|---------------------|
| BRAND: | SPPS Travel Charger |
| MODEL: | LFS0501000D-A8S |
| INPUT: | 100-240Vac, 50-60Hz |
| OUTPUT: | 5Vdc, 1000mA |

| BATTERY | |
|----------------|------------------|
| BRAND: | Skypower |
| MODEL: | GT-1920 |
| RATING: | 3.7Vdc, 1920 mAh |

- The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

FOR GSM, GPRS & E-GPRS:

299 channels are provided to this EUT. Therefore, the low, middle and high channels are chosen for testing.

| | CHANNEL | FREQUENCY | TX MODE |
|--------|---------|------------|-------------------|
| LOW | 512 | 1850.2 MHz | GSM, GPRS, E-GPRS |
| MIDDLE | 661 | 1880.0 MHz | GSM, GPRS, E-GPRS |
| HIGH | 810 | 1909.8 MHz | GSM, GPRS, E-GPRS |

NOTE:

1. Below 1 GHz, the channel 512, 661, and 810 were pre-tested in chamber. The channel 661 was chosen for final test.
2. Above 1 GHz, the channel 512, 661, and 810 were tested individually.
3. The worst case for final test is chosen when the power control level set 0.
4. The channel space is 0.2MHz.
5. The EUT is a GPRS class 12 device (Multislot class: 12, Mobile Terminal B), which provide 4 up-link. After pre-tested 4 functions, found up-link with 1 time slot is worse, therefore, test results of output power, frequency stability, occupied bandwidth and band edge tests came out from this.
6. The EUT is an E-GPRS class 12 device (Multislot class: 12, Mobile Terminal B), which provide 4 up-link. After pre-tested 4 functions, found up-link with 1 time slot is worse, therefore, test results of output power, frequency stability, occupied bandwidth and band edge tests came out from this.
7. The EUT has GSM, GPRS & E-GPRS functions. After pre-testing, GSM function is the worst case for all the emission tests.

FOR WCDMA:


277 channels are provided to this EUT. Therefore, the low, middle and high channels are chosen for testing.

| | CHANNEL | FREQUENCY | TX MODE |
|--------|---------|------------|---------------------|
| LOW | 9262 | 1852.4 MHz | WCDMA, HSDPA, HSUPA |
| MIDDLE | 9400 | 1880.0 MHz | WCDMA, HSDPA, HSUPA |
| HIGH | 9538 | 1907.6 MHz | WCDMA, HSDPA, HSUPA |

NOTE:

1. Below 1 GHz, the channel 9262, 9400 and 9538 were pre-tested in chamber. The channel 9262 was chosen for final test.
2. Above 1 GHz, the channel 9262, 9400 and 9538 were tested individually.
3. The channel space is 0.2MHz.
4. After pretest of output power and spurious emission under WCDMA-RMC, WCDMA-AMR & HSDPA, HSUPA mode, find the worst mode is WCDMA-RMC. Therefore, select WCDMA-RMC mode to do final test.

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

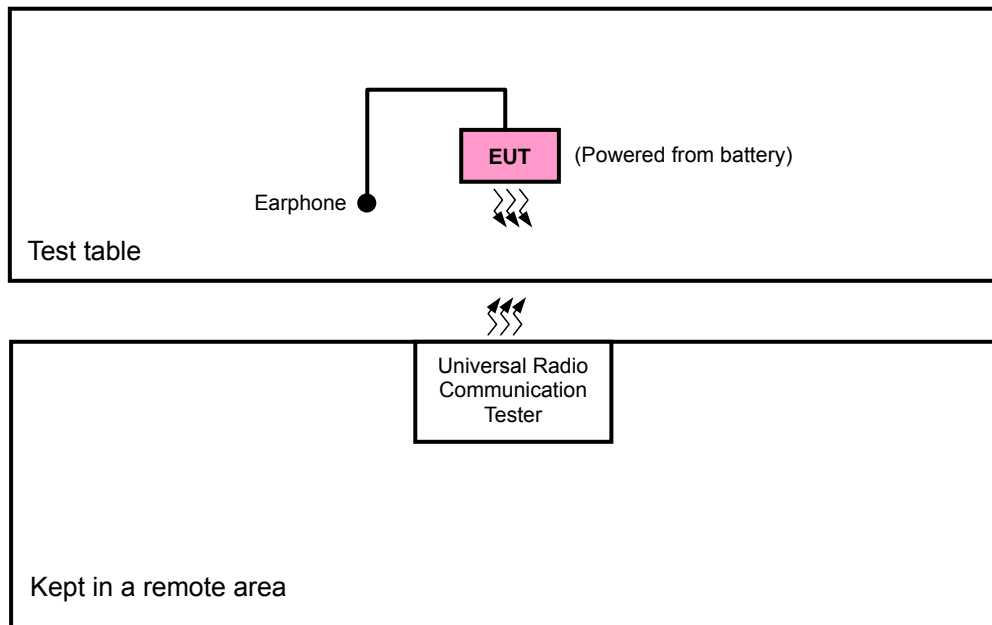

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

FOR GSM, GPRS & E-GPRS:

| EUT CONFIGURE MODE | APPLICABLE TO | | | | | | | DESCRIPTION |
|--------------------|---------------|----|----|----|----|-------|-------|-------------|
| | OP | FS | OB | BE | CE | RE<1G | RE≥1G | |
| - | √ | √ | √ | √ | √ | √ | √ | - |

Where **OP**: Output power **FS**: Frequency stability
OB: Occupied bandwidth **BE**: Band edge
CE: Conducted spurious emissions **RE<1G**: Radiated emission below 1GHz
RE≥1G: Radiated emission above 1GHz

OUTPUT POWER MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | AXIS |
|-------------------|----------------|-----------------------|------|
| 512 to 810 | 512, 661, 810 | GSM, GPRS, E-GPRS | X |

FREQUENCY STABILITY MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY |
|-------------------|----------------|-----------------------|
| 512 to 810 | 661 | GSM |

OCCUPIED BANDWIDTH MEASUREMENT:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY |
|-------------------|----------------|-----------------------|
| 512 to 810 | 512, 661, 810 | GSM, GPRS, EGPRS |

BAND EDGE MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY |
|-------------------|----------------|-----------------------|
| 512 to 810 | 512, 810 | GSM, GPRS, EGPRS |

CONDUCTED SPURIOUS EMISSIONS MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY |
|-------------------|----------------|-----------------------|
| 512 to 810 | 512, 661, 810 | GSM |

RADIATED EMISSION MEASUREMENT (BELOW 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | AXIS |
|-------------------|----------------|-----------------------|------|
| 512 to 810 | 661 | GSM | Y |

RADIATED EMISSION MEASUREMENT (ABOVE 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | AXIS |
|-------------------|----------------|-----------------------|------|
| 512 to 810 | 512, 661, 810 | GSM | Y |

TEST CONDITION:

| APPLICABLE TO | ENVIRONMENTAL CONDITIONS | INPUT POWER | TESTED BY |
|---------------|--------------------------|--------------|-------------|
| OP | 25deg. C, 65%RH | 3.7Vdc | Kay Wu |
| FS | 25deg. C, 65%RH | 3.7Vdc | Kay Wu |
| OB | 25deg. C, 65%RH | 3.7Vdc | Kay Wu |
| EM | 25deg. C, 65%RH | 3.7Vdc | Kay Wu |
| BE | 25deg. C, 65%RH | 3.7Vdc | Kay Wu |
| CE | 25deg. C, 65%RH | 3.7Vdc | Kay Wu |
| RE < 1G | 25deg. C, 65%RH | 120Vac, 60Hz | Kay Wu |
| RE ≥ 1G | 24deg. C, 67%RH | 120Vac, 60Hz | David Huang |



FOR WCDMA:

| EUT CONFIGURE MODE | APPLICABLE TO | | | | | | | DESCRIPTION |
|--------------------|---------------|----|----|----|----|-------|-------|-------------|
| | OP | FS | OB | BE | CE | RE<1G | RE≥1G | |
| - | √ | √ | √ | √ | √ | √ | √ | - |

Where **OP**: Output power **FS**: Frequency stability
OB: Occupied bandwidth **BE**: Band edge
CE: Conducted spurious emissions **RE<1G**: Radiated emission below 1GHz
RE≥1G: Radiated emission above 1GHz

OUTPUT POWER MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | AXIS |
|-------------------|------------------|-----------------------|------|
| 9262 to 9538 | 9262, 9400, 9538 | WCDMA | X |

FREQUENCY STABILITY MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY |
|-------------------|----------------|-----------------------|
| 9262 to 9538 | 9400 | WCDMA |

OCCUPIED BANDWIDTH MEASUREMENT:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY |
|-------------------|------------------|-----------------------|
| 9262 to 9538 | 9262, 9400, 9538 | WCDMA |

BAND EDGE MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY |
|-------------------|----------------|-----------------------|
| 9262 to 9538 | 9262, 9538 | WCDMA |

CONDUCTED SPURIOUS EMISSIONS MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY |
|-------------------|------------------|-----------------------|
| 9262 to 9538 | 9262, 9400, 9538 | WCDMA |

RADIATED EMISSION MEASUREMENT (BELOW 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | AXIS |
|-------------------|----------------|-----------------------|------|
| 9262 to 9538 | 9262 | WCDMA | Y |

RADIATED EMISSION MEASUREMENT (ABOVE 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | AXIS |
|-------------------|------------------|-----------------------|------|
| 9262 to 9538 | 9262, 9400, 9538 | WCDMA | Y |

TEST CONDITION:

| APPLICABLE TO | ENVIRONMENTAL CONDITIONS | INPUT POWER | TESTED BY |
|---------------|--------------------------|--------------|-------------|
| OP | 25deg. C, 65%RH | 3.7Vdc | Kay Wu |
| FS | 25deg. C, 65%RH | 3.7Vdc | Kay Wu |
| OB | 25deg. C, 65%RH | 3.7Vdc | Kay Wu |
| EM | 25deg. C, 65%RH | 3.7Vdc | Kay Wu |
| BE | 25deg. C, 65%RH | 3.7Vdc | Kay Wu |
| CE | 25deg. C, 65%RH | 3.7Vdc | Kay Wu |
| RE < 1G | 25deg. C, 65%RH | 120Vac, 60Hz | Kay Wu |
| RE ≥ 1G | 19deg. C, 67%RH | 120Vac, 60Hz | David Huang |



3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 24

ANSI C63.4-2003

ANSI/TIA/EIA-603-C 2004

NOTE: All test items have been performed and recorded as per the above standards.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| NO. | PRODUCT | BRAND | MODEL NO. | SERIAL NO. | FCC ID |
|-----|--------------------------------------|-------|-----------|------------|--------|
| 1 | UNIVERSAL RADIO COMMUNICATION TESTER | R&S | CMU200 | 104484 | NA |
| 2 | GPRS+WCDMA SIMULATOR | JRC | NJZ-2000 | ET00054 | NA |

| NO. | SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS |
|-----|---|
| 1 | NA |
| 2 | NA |

NOTE 1: All power cords of the above support units are non shielded (1.8m).

NOTE 2: Item 1-2 acted as a communication partners to transfer data.

4 TEST TYPES AND RESULTS

4.1 OUTPUT POWER MEASUREMENT

4.1.1 LIMITS OF OUTPUT POWER MEASUREMENT

The radiated peak output power shall be according to the specific rule Part 24.232(b) that “Mobile / Portable station are limited to 2 watts e.i.r.p” and 24.232(c) specific that “Peak transmit power must be measure over any interval of continuous transmission using instrumentation calibration in terms of rms-equivalent voltage.”

4.1.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | DATE OF CALIBRATION | DUE DATE OF CALIBRATION |
|---|------------------------------|------------------|---------------------|-------------------------|
| Test Receiver ROHDE & SCHWARZ | ESIB7 | 100212 | Aug. 02, 2011 | Aug. 01, 2012 |
| Spectrum Analyzer ROHDE & SCHWARZ | FSP40 | 100041 | Jul. 21, 2011 | Jul. 20, 2012 |
| BILOG Antenna SCHWARZBECK | VULB9168 | 9168-160 | Apr. 13, 2011 | Apr. 12, 2012 |
| HORN Antenna SCHWARZBECK | 9120D | 209 | Aug. 25, 2011 | Aug. 24, 2012 |
| HORN Antenna SCHWARZBECK | BBHA 9170 | 148 | Jul. 20, 2011 | Jul. 19, 2012 |
| Preamplifier Agilent | 8447D | 2944A10633 | Oct. 29, 2011 | Oct. 28, 2012 |
| Preamplifier Agilent | 8449B | 3008A01964 | Oct. 29, 2011 | Oct. 28, 2012 |
| RF signal cable HUBER+SUHNNER | SUCOFLEX 104 | 250723/4 | Aug. 30, 2011 | Aug. 29, 2012 |
| RF signal cable HUBER+SUHNNER | SUCOFLEX 106 | 12738/6+309224/4 | Aug. 30, 2011 | Aug. 29, 2012 |
| Software ADT. | ADT_Radiated_ V7.6.15.9.2 | NA | NA | NA |
| Antenna Tower inn-co GmbH | MA 4000 | 013303 | NA | NA |
| Antenna Tower Controller inn-co GmbH | CO2000 | 017303 | NA | NA |
| Turn Table ADT. | TT100. | TT93021703 | NA | NA |
| Turn Table Controller ADT. | SC100. | SC93021703 | NA | NA |

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 3.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The FCC Site Registration No. is 988962.
 5. The IC Site Registration No. is IC 7450F-3.

4.1.3 TEST PROCEDURES

EIRP MEASUREMENT:


- a. The power was measured with R&S Spectrum Analyzer. All measurements were done at 3 channels, 512, 661 and 810 (GSM, GPRS & E-GPRS) / 9262, 9400 and 9538 (WCDMA) (low, middle and high operational frequency range.) RWB and VBW is 1MHz for GSM/GPRS/EGPRS and 5MHz for WCDMA mode.
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- c. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a tx cable . Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value” of step c. Record the power level of S.G
- d. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn.}$

CONDUCTED POWER MEASUREMENT:

- a. The EUT was set up for the maximum power with GSM, GPRS & EGPRS/WCDMA link data modulation and link up with simulator.
- b. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.


4.1.4 TEST SETUP

EIRP POWER MEASUREMENT:

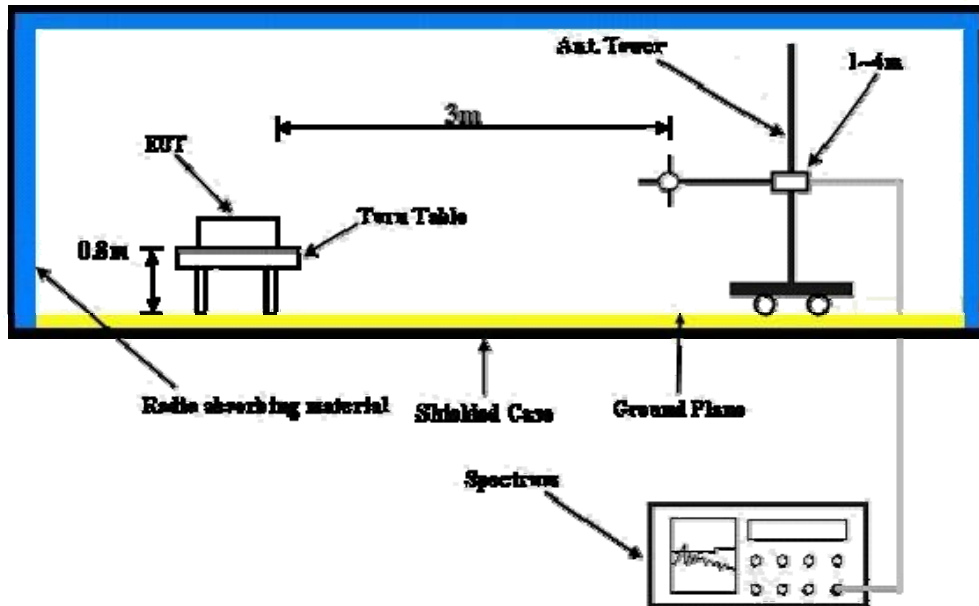

For the actual test configuration, please refer to the attached file (Test Setup Photo).

CONDUCTED POWER MEASUREMENT:



For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.5 EUT OPERATING CONDITIONS

- a. The EUT makes a call to the communication simulator.
- b. The communication simulator station system controlled an EUT to export maximum output power under transmission mode and specific channel frequency.

4.1.6 TEST RESULTS

CONDUCTED OUTPUT POWER (dBm)

| Band | GSM1900 | | |
|-----------------|---------|-------|--------|
| Channel | 512 | 661 | 810 |
| Frequency (MHz) | 1850.2 | 1880 | 1909.8 |
| GSM | 29.43 | 29.70 | 29.69 |
| GPRS 8 | 29.44 | 29.70 | 29.70 |
| GPRS 10 | 28.69 | 28.95 | 28.96 |
| GPRS 12 | 26.40 | 26.66 | 26.67 |
| EDGE 8 (MCS9) | 26.45 | 26.71 | 26.72 |
| EDGE 10 (MCS9) | 26.43 | 26.69 | 26.69 |
| EDGE 12 (MCS9) | 26.40 | 26.65 | 26.65 |

| Band | WCDMA II | | |
|-----------------|----------|-------|--------|
| Channel | 9262 | 9400 | 9538 |
| Frequency (MHz) | 1852.4 | 1880 | 1907.6 |
| RMC 12.2K | 22.84 | 22.83 | 22.75 |
| HSDPA Subtest-1 | 22.83 | 22.87 | 22.73 |
| HSDPA Subtest-2 | 21.79 | 21.83 | 21.70 |
| HSDPA Subtest-3 | 21.37 | 21.37 | 21.22 |
| HSDPA Subtest-4 | 21.28 | 21.32 | 21.17 |
| HSUPA Subtest-1 | 20.85 | 20.95 | 20.75 |
| HSUPA Subtest-2 | 19.87 | 19.92 | 19.80 |
| HSUPA Subtest-3 | 20.37 | 20.42 | 20.31 |
| HSUPA Subtest-4 | 20.86 | 20.98 | 20.78 |
| HSUPA Subtest-5 | 22.34 | 22.36 | 22.25 |

EIRP POWER

FOR GSM MODE

| MODE | | TX channel 512 | | | | | |
|---|-------------|----------------|-----------------------|------------------------|------------|-------------|-------------|
| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | |
| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
| 1 | 1850.2 | -8.5 | 26.4 | 1.1 | 27.5 | 33.0 | -5.5 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | |
| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
| 1 | 1850.2 | -8.7 | 26.2 | 1.1 | 27.3 | 33.0 | -5.7 |

NOTE: Power Value (dBum) = S.G Power Value (dBm) + Correction Factor (dB).

| MODE | | TX channel 661 | | | | | |
|---|-------------|----------------|-----------------------|------------------------|------------|-------------|-------------|
| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | |
| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
| 1 | 1880.0 | -6.1 | 28.3 | 1.1 | 29.4 | 33.0 | -3.6 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | |
| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
| 1 | 1880.0 | -11.4 | 23.0 | 1.1 | 24.1 | 33.0 | -8.9 |

NOTE: Power Value (dBum) = S.G Power Value (dBm) + Correction Factor (dB).

| MODE | | TX channel 810 | | | | | |
|---|-------------|----------------|-----------------------|------------------------|------------|-------------|-------------|
| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | |
| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
| 1 | 1909.8 | -11.2 | 24.2 | 1.1 | 25.3 | 33.0 | -7.7 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | |
| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
| 1 | 1909.8 | -8.0 | 27.4 | 1.1 | 28.5 | 33.0 | -4.5 |

NOTE: Power Value (dBum) = S.G Power Value (dBm) + Correction Factor (dB).

FOR GPRS MODE

| MODE | | TX channel 512 | | | | | |
|--|-------------|----------------|-----------------------|------------------------|------------|-------------|-------------|
| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | |
| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
| 1 | 1850.2 | -9.5 | 26.6 | 1.1 | 27.7 | 33.0 | -5.3 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | |
| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
| 1 | 1850.2 | -9.4 | 25.5 | 1.1 | 26.6 | 33.0 | -6.4 |

NOTE: Power Value (dBum) = S.G Power Value (dBm) + Correction Factor (dB).

| MODE | | TX channel 661 | | | | | |
|--|-------------|----------------|-----------------------|------------------------|------------|-------------|-------------|
| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | |
| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
| 1 | 1880.0 | -7.9 | 27.6 | 1.1 | 28.7 | 33.0 | -4.3 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | |
| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
| 1 | 1880.0 | -11.8 | 22.6 | 1.1 | 23.7 | 33.0 | -9.3 |

NOTE: Power Value (dBum) = S.G Power Value (dBm) + Correction Factor (dB).

| MODE | | TX channel 810 | | | | | |
|--|-------------|----------------|-----------------------|------------------------|------------|-------------|-------------|
| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | |
| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
| 1 | 1909.8 | -9.0 | 26.4 | 1.1 | 27.5 | 33.0 | -5.5 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | |
| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
| 1 | 1909.8 | -11.8 | 23.6 | 1.1 | 24.7 | 33.0 | -8.3 |

NOTE: Power Value (dBum) = S.G Power Value (dBm) + Correction Factor (dB).

FOR E-GPRS MODE

| MODE | | TX channel 512 | | | | | |
|--|-------------|----------------|-----------------------|------------------------|-------------|-------------|-------------|
| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | |
| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
| 1 | 1850.2 | -12.2 | 23.9 | 1.1 | 25.0 | 33.0 | -8.0 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | |
| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
| 1 | 1850.2 | -18.2 | 16.7 | 1.1 | 17.8 | 33.0 | -15.2 |

NOTE: Power Value (dBum) = S.G Power Value (dBm) + Correction Factor (dB).

| MODE | | TX channel 661 | | | | | |
|--|-------------|----------------|-----------------------|------------------------|------------|-------------|-------------|
| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | |
| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
| 1 | 1880.0 | -12.2 | 23.3 | 1.1 | 24.4 | 33.0 | -8.6 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | |
| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
| 1 | 1880.0 | -16.8 | 17.6 | 1.1 | 18.7 | 33.0 | -14.3 |

NOTE: Power Value (dBum) = S.G Power Value (dBm) + Correction Factor (dB).

| MODE | | TX channel 810 | | | | | |
|--|-------------|----------------|-----------------------|------------------------|------------|-------------|-------------|
| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | |
| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
| 1 | 1909.8 | -12.4 | 23.0 | 1.1 | 24.1 | 33.0 | -8.9 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | |
| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
| 1 | 1909.8 | -17.2 | 18.2 | 1.1 | 19.3 | 33.0 | -13.7 |

NOTE: Power Value (dBum) = S.G Power Value (dBm) + Correction Factor (dB).



FOR WCDMA:

WCDMA-RMC MODE

| MODE | | TX channel 9262 | | | | | |
|--|-------------|-----------------|-----------------------|------------------------|------------|-------------|-------------|
| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | |
| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
| 1 | 1852.4 | -14.8 | 21.2 | 1.1 | 22.3 | 33.0 | -10.7 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | |
| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
| 1 | 1852.4 | -17.6 | 17.3 | 1.1 | 18.4 | 33.0 | -14.6 |

NOTE: Power Value (dBum) = S.G Power Value (dBm) + Correction Factor (dB).

| MODE | | TX channel 9400 | | | | | |
|--|-------------|-----------------|-----------------------|------------------------|------------|-------------|-------------|
| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | |
| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
| 1 | 1880.0 | -14.4 | 21.1 | 1.1 | 22.2 | 33.0 | -10.8 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | |
| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
| 1 | 1880.0 | -17.3 | 17.7 | 1.1 | 18.8 | 33.0 | -14.2 |

NOTE: Power Value (dBum) = S.G Power Value (dBm) + Correction Factor (dB).

| MODE | | TX channel 9538 | | | | | |
|--|-------------|-----------------|-----------------------|------------------------|------------|-------------|-------------|
| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | |
| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
| 1 | 1907.6 | -14.2 | 21.2 | 1.1 | 22.3 | 33.0 | -10.7 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | |
| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
| 1 | 1907.6 | -18.1 | 17.2 | 1.1 | 18.3 | 33.0 | -14.7 |

NOTE: Power Value (dBum) = S.G Power Value (dBm) + Correction Factor (dB).



4.2 FREQUENCY STABILITY MEASUREMENT

4.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT

According to the FCC part 24.235 shall be tested the frequency stability. The rule is defined that "The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block." The frequency error rate is according to the JTC standard that the frequency error rate shall be accurate to within 2.5ppm of the received frequency from the base station. The test extreme voltage is according to the 2.1055(d)(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment and the extreme temperature rule is comply with the 2.1055(a)(1) $-30^{\circ}\text{C} \sim 55^{\circ}\text{C}$.

4.2.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | DATE OF CALIBRATION | DUE DATE OF CALIBRATION |
|---|--------------|------------|---------------------|-------------------------|
| Spectrum Analyzer Agilent | E4446A | MY43360128 | Feb. 22, 2011 | Feb. 21, 2012 |
| Hewlett Packard RF cable | 8120-6192 | 01428251 | NA | NA |
| RF cable | SUCOFLEX 104 | 257029 | Sep. 11, 2011 | Sep. 10, 2012 |
| WIT Standard Temperature & Humidity Chamber | MHU-225AU | 920842 | Jun. 15, 2011 | Jun. 14, 2012 |


NOTE: The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

4.2.3 TEST PROCEDURE

- a. Because of the measure the carrier frequency under the condition of the AFC lock, it shall be used the mobile station in the GSM / WCDMA link mode. This is accomplished with the use of the R&S CMU200 / JRC NJZ-2000 simulator station. The oven room could control the temperatures and humidity. The GSM link channel is the 190 and the WCDMA link channel is the 9400.
- b. Power must be removed when changing from one temperature to another or one voltage to another voltage. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- c. EUT is connected the external power supply to control the DC input power. The various Volts from the minimum 3.4Volts to 4.2Volts. Each step shall be record the frequency error rate.
- d. The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing.
- e. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the GSM simulator.

4.2.4 TEST SETUP

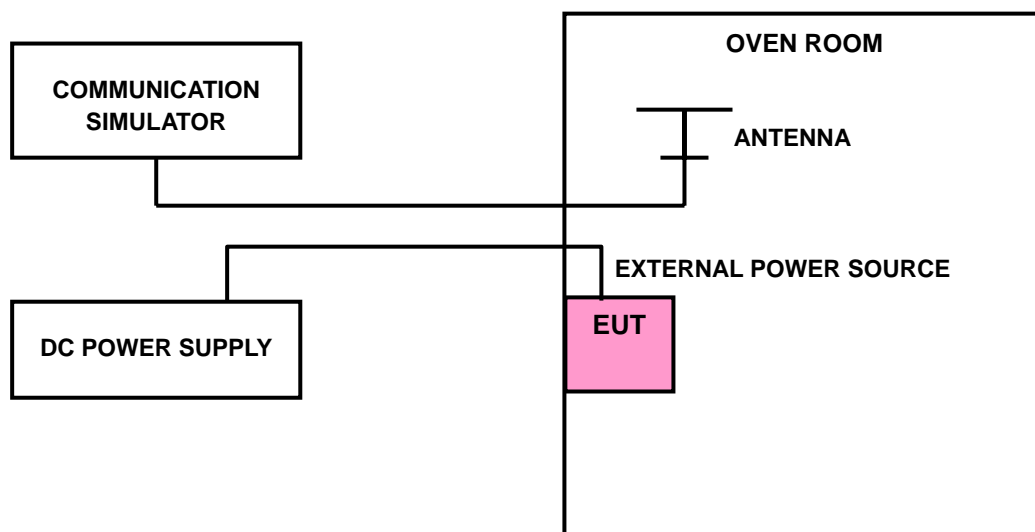

4.2.5 TEST RESULTS

FOR GSM:

| AFC FREQUENCY ERROR vs. VOLTAGE | | | |
|---------------------------------|----------------------|-----------------------|-------------|
| VOLTAGE (Volts) | FREQUENCY ERROR (Hz) | FREQUENCY ERROR (ppm) | LIMIT (ppm) |
| 3.4 | 28 | 0.015 | 2.5 |
| 4.2 | 21 | 0.011 | 2.5 |

NOTE: The applicant defined the normal working voltage of the battery is from 3.4Vdc to 4.2Vdc.

| AFC FREQUENCY ERROR vs. TEMP. | | | |
|-------------------------------|----------------------|-----------------------|-------------|
| TEMP. (°C) | FREQUENCY ERROR (Hz) | FREQUENCY ERROR (ppm) | LIMIT (ppm) |
| 50 | 28 | 0.015 | 2.5 |
| 40 | 26 | 0.014 | 2.5 |
| 30 | 27 | 0.014 | 2.5 |
| 20 | 28 | 0.015 | 2.5 |
| 10 | 26 | 0.014 | 2.5 |
| 0 | 28 | 0.015 | 2.5 |
| -10 | 29 | 0.015 | 2.5 |
| -20 | 32 | 0.017 | 2.5 |
| -30 | 31 | 0.016 | 2.5 |

FOR WCDMA:

| AFC FREQUENCY ERROR vs. VOLTAGE | | | |
|--|-----------------------------|------------------------------|--------------------|
| VOLTAGE (Volts) | FREQUENCY ERROR (Hz) | FREQUENCY ERROR (ppm) | LIMIT (ppm) |
| 3.4 | 35 | 0.019 | 2.5 |
| 4.2 | 36 | 0.019 | 2.5 |

NOTE: The applicant defined the normal working voltage of the battery is from 3.4Vdc to 4.2Vdc.

| AFC FREQUENCY ERROR vs. TEMP. | | | |
|--------------------------------------|-----------------------------|------------------------------|--------------------|
| TEMP. (°C) | FREQUENCY ERROR (Hz) | FREQUENCY ERROR (ppm) | LIMIT (ppm) |
| 50 | 42 | 0.022 | 2.5 |
| 40 | 44 | 0.023 | 2.5 |
| 30 | 43 | 0.023 | 2.5 |
| 20 | 44 | 0.023 | 2.5 |
| 10 | 41 | 0.022 | 2.5 |
| 0 | 40 | 0.021 | 2.5 |
| -10 | 45 | 0.024 | 2.5 |
| -20 | 46 | 0.024 | 2.5 |
| -30 | 48 | 0.026 | 2.5 |

4.3 OCCUPIED BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT


The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 %of the totalmean power of a given emission.

4.3.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | DATE OF CALIBRATION | DUE DATE OF CALIBRATION |
|------------------------------|--------------|------------|---------------------|-------------------------|
| SPECTRUM ANALYZER R&S | FSP40 | 100039 | Jan. 11, 2011 | Jan. 10, 2012 |
| Mini-Circuits Power Splitter | ZN2PD-9G | NA | May 25, 2011 | May 24, 2012 |
| RF cable | SUCOFLEX 104 | 274403/4 | Aug. 20, 2011 | Aug. 19, 2012 |
| RF cable | SUCOFLEX 104 | 250729/4 | Aug. 19, 2011 | Aug. 18, 2012 |
| RF cable | SUCOFLEX 104 | 214377/4 | Aug. 19, 2011 | Aug. 18, 2012 |
| JFW 20dB attenuation | 50HF-020-SMA | NA | NA | NA |

NOTE: The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST SETUP

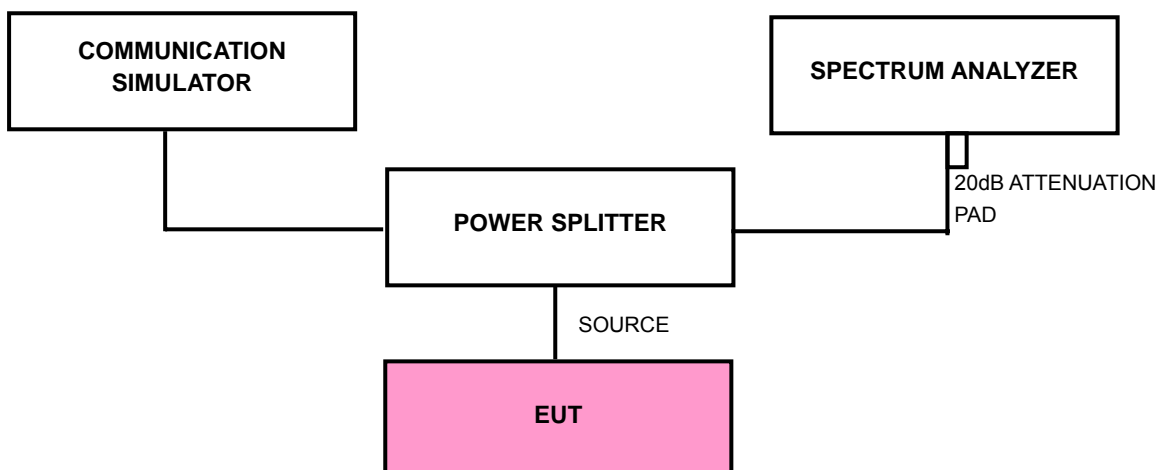

4.3.4 TEST PROCEDURES

- a. The EUT makes a call to the communication simulator. The power was measured with R&S Spectrum Analyzer. All measurements were done at 3 channels, 512, 661 and 810 (GSM/GPRS / E-GPRS) / 9262, 9400 and 9538 (WCDMA) (low, middle and high operational frequency range.)
- b. The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.
- c. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

4.3.5 EUT OPERATING CONDITION

- a. The EUT makes a call to the communication simulator.
- b. The communication simulator station system controlled a EUT to export maximum and minimum output power under transmission mode and specific channel frequency.



A D T


4.3.6 TEST RESULTS

FOR GSM, GPRS & E-GPRS:

FOR GSM MODE

| CHANNEL | FREQUENCY (MHz) | 99% OCCUPIED BANDWIDTH (kHz) |
|---------|-----------------|------------------------------|
| 512 | 1850.2 | 248 |
| 661 | 1880.0 | 246 |
| 810 | 1909.8 | 246 |

CH 512

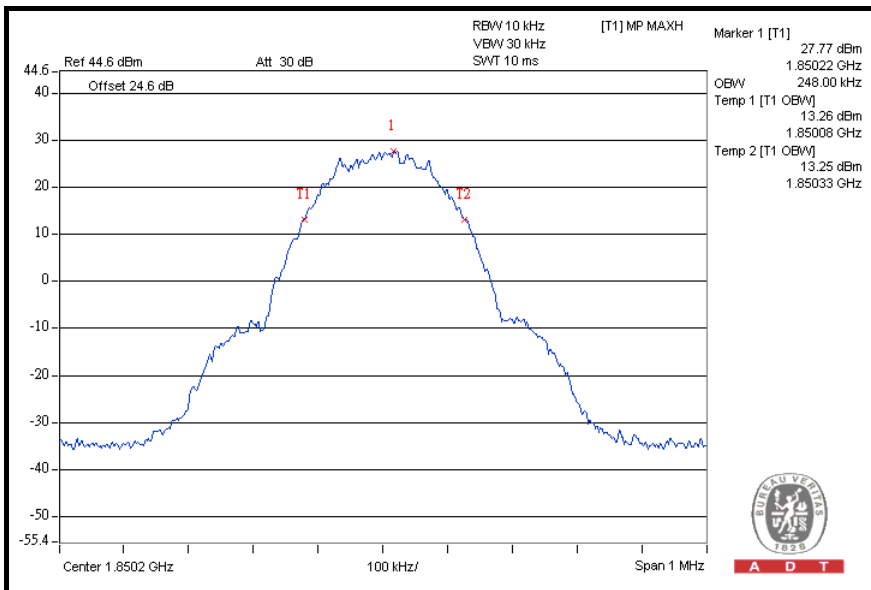




A D T

FOR GPRS MODE

| CHANNEL | FREQUENCY (MHz) | 99% OCCUPIED BANDWIDTH (kHz) |
|---------|-----------------|------------------------------|
| 512 | 1850.2 | 248 |
| 661 | 1880.0 | 246 |
| 810 | 1909.8 | 244 |

CH 512

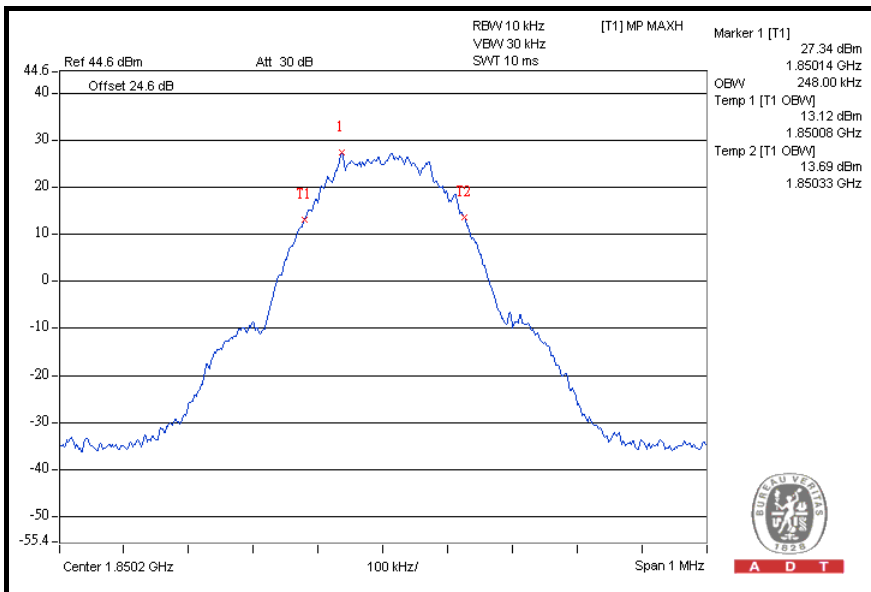




A D T

FOR E-GPRS MODE

| CHANNEL | FREQUENCY (MHz) | 99% OCCUPIED BANDWIDTH (kHz) |
|---------|-----------------|------------------------------|
| 512 | 1850.2 | 250 |
| 661 | 1880.0 | 246 |
| 810 | 1909.8 | 246 |

CH 512

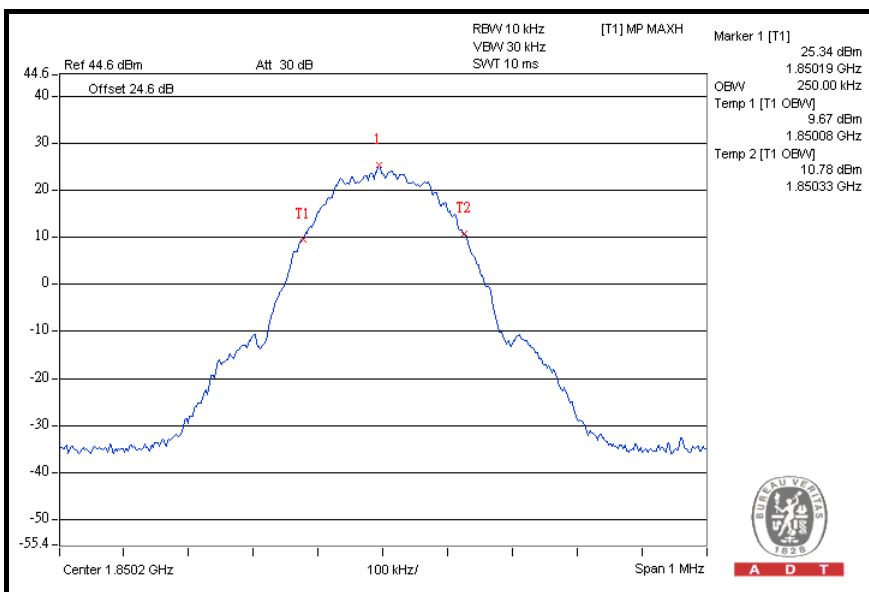

A D T




A D T

FOR WCDMA

FOR WCDMA:

| CHANNEL | FREQUENCY (MHz) | 99% OCCUPIED BANDWIDTH (MHz) |
|---------|-----------------|------------------------------|
| 9262 | 1852.4 | 4.18 |
| 9400 | 1880.0 | 4.20 |
| 9538 | 1907.6 | 4.20 |

CH 9538

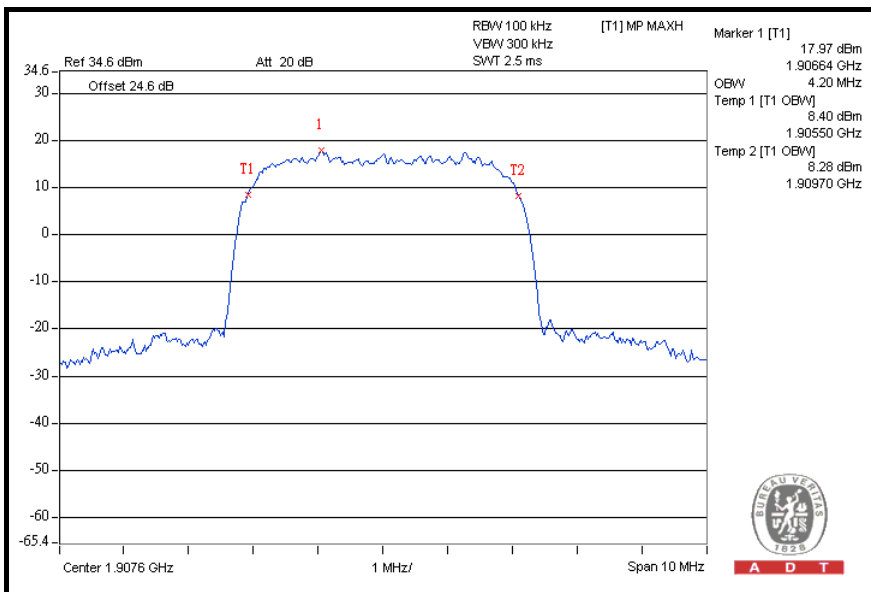

A D T




A D T

FOR HSDPA:

| CHANNEL | FREQUENCY (MHz) | 99% OCCUPIED BANDWIDTH (MHz) |
|---------|-----------------|------------------------------|
| 9262 | 1852.4 | 4.18 |
| 9400 | 1880.0 | 4.18 |
| 9538 | 1907.6 | 4.20 |

CH 9538

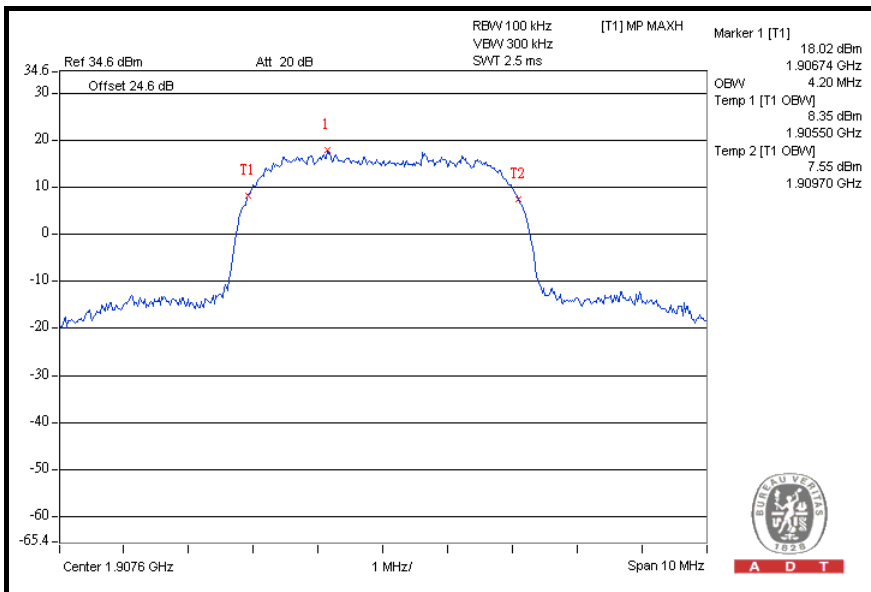




A D T

FOR HSUPA:

| CHANNEL | FREQUENCY (MHz) | 99% OCCUPIED BANDWIDTH (MHz) |
|---------|-----------------|------------------------------|
| 9262 | 1852.4 | 4.20 |
| 9400 | 1880.0 | 4.20 |
| 9538 | 1907.6 | 4.20 |

CH 9262

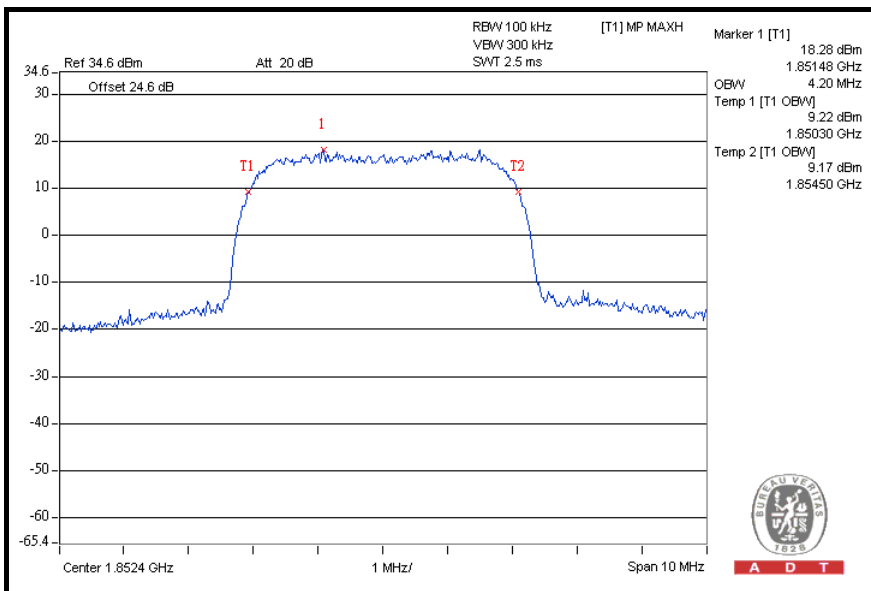

4.4 BAND EDGE MEASUREMENT

4.4.1 LIMITS OF BAND EDGE MEASUREMENT


According to FCC 24.238(a) specified that power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

4.4.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | DATE OF CALIBRATION | DUE DATE OF CALIBRATION |
|------------------------------|--------------|------------|---------------------|-------------------------|
| SPECTRUM ANALYZER R&S | FSP40 | 100039 | Jan. 11, 2011 | Jan. 10, 2012 |
| Mini-Circuits Power Splitter | ZN2PD-9G | NA | May 25, 2011 | May 24, 2012 |
| RF cable | SUCOFLEX 104 | 274403/4 | Aug. 20, 2011 | Aug. 19, 2012 |
| RF cable | SUCOFLEX 104 | 250729/4 | Aug. 19, 2011 | Aug. 18, 2012 |
| RF cable | SUCOFLEX 104 | 214377/4 | Aug. 19, 2011 | Aug. 18, 2012 |
| JFW 20dB attenuation | 50HF-020-SMA | NA | NA | NA |

NOTE: The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

4.4.3 TEST SETUP

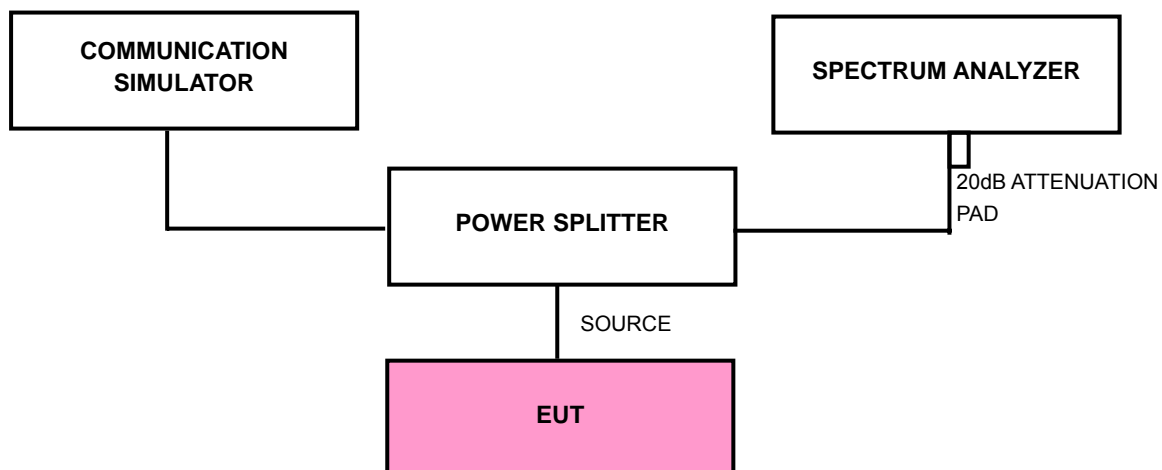

4.4.4 TEST PROCEDURES

- a. The EUT makes a call to the communication simulator. The power was measured with R&S Spectrum Analyzer. All measurements were done at 2 channels, 512 and 810 (GSM/GPRS/ E-GPRS) / 9262 and 9538 (WCDMA) (low and high operational frequency range.)
- b. The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.
- c. The center frequency of spectrum is the band edge frequency and span is 1.5 MHz. RB of the spectrum is 3kHz and VB of the spectrum is 10kHz (GSM/GPRS/ E-GPRS).
- d. The center frequency of spectrum is the band edge frequency and span is 10 MHz. RB of the spectrum is 100kHz and VB of the spectrum is 300kHz (WCDMA).
- e. Record the max trace plot into the test report.

4.4.5 EUT OPERATING CONDITION

- a. The EUT makes a call to the communication simulator.
- b. The communication simulator station system controlled an EUT to export maximum output power under transmission mode and specific channel frequency.




A D T

4.4.6 TEST RESULTS


FOR GSM / GPRS / E-GPRS:

FOR GSM MODE

LOWER BAND EDGE

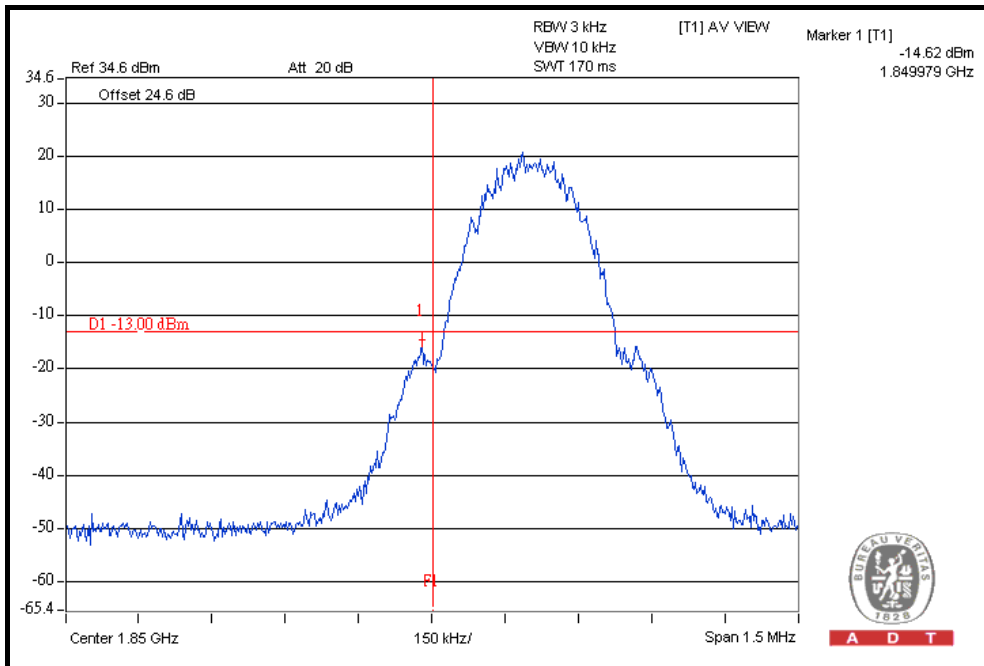

HIGHER BAND EDGE

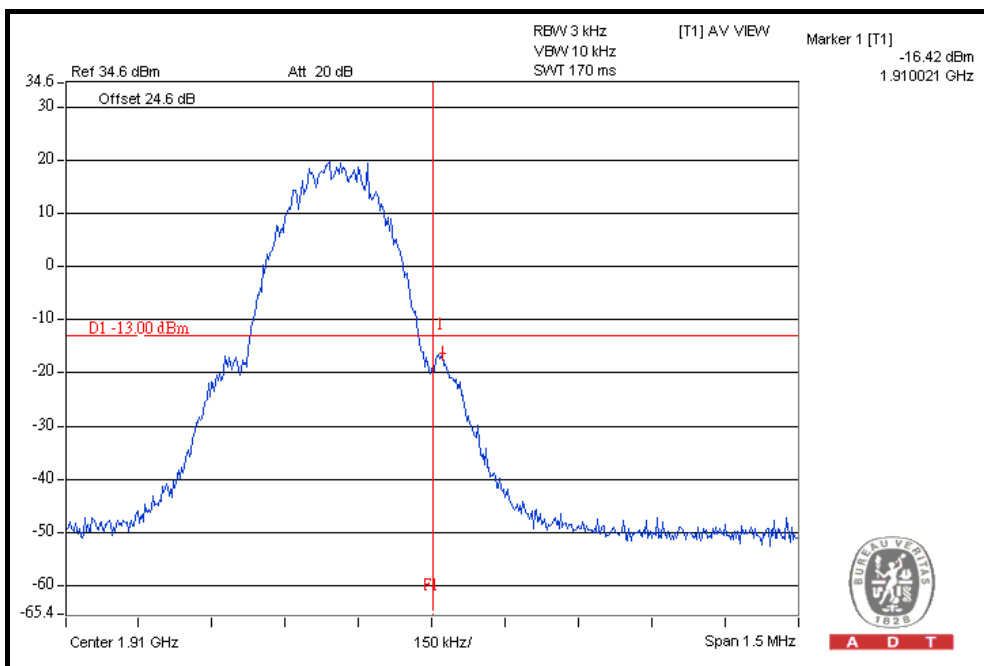





A D T

FOR GPRS MODE

LOWER BAND EDGE

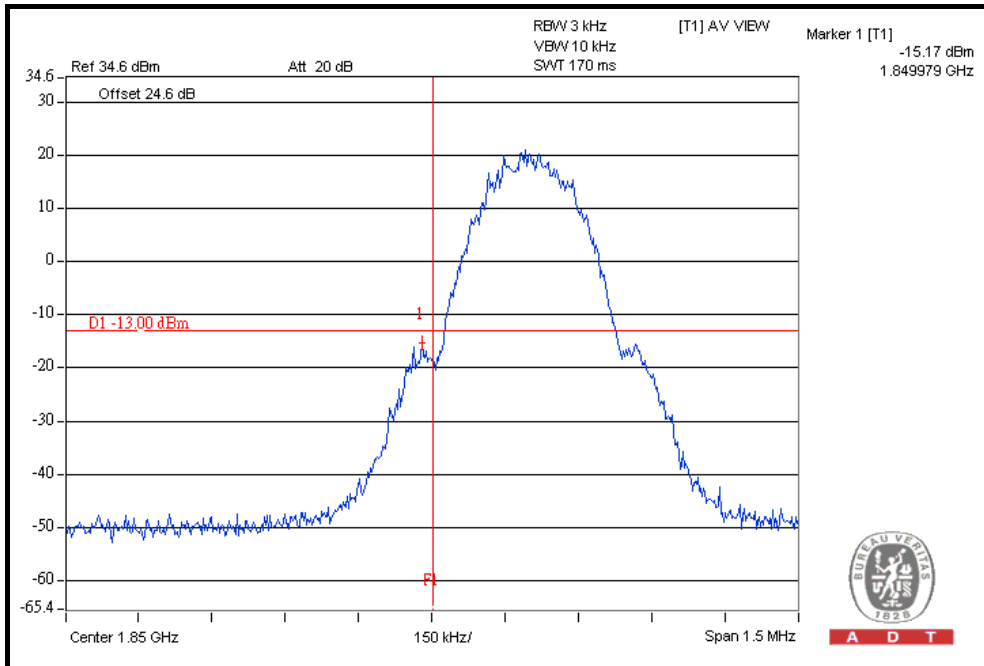

HIGHER BAND EDGE

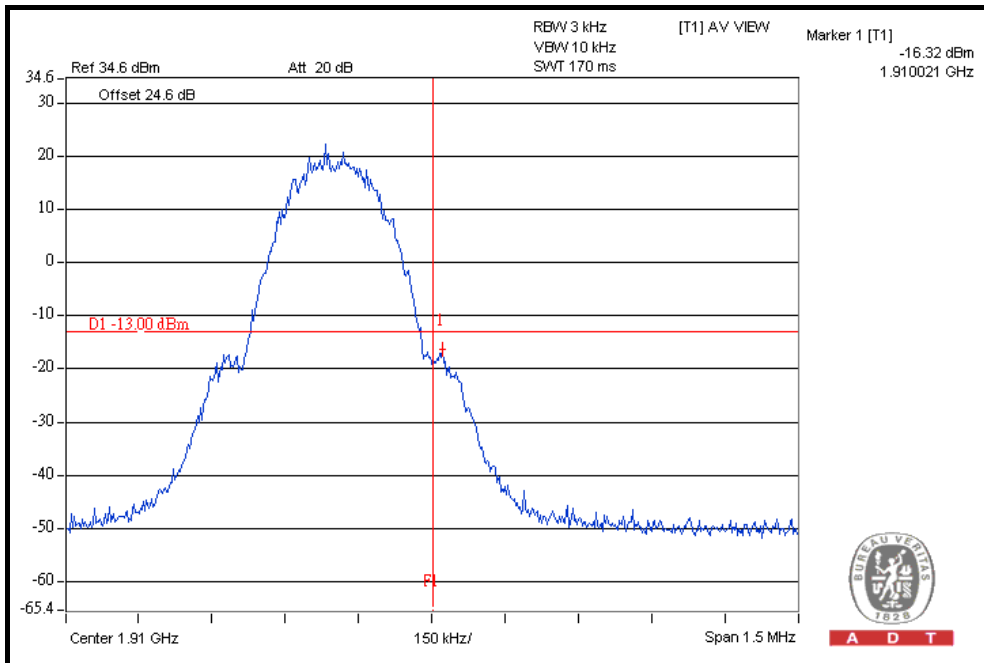





A D T

FOR E-GPRS MODE (UP-LINK WITH 1 TIME SLOT)

LOWER BAND EDGE

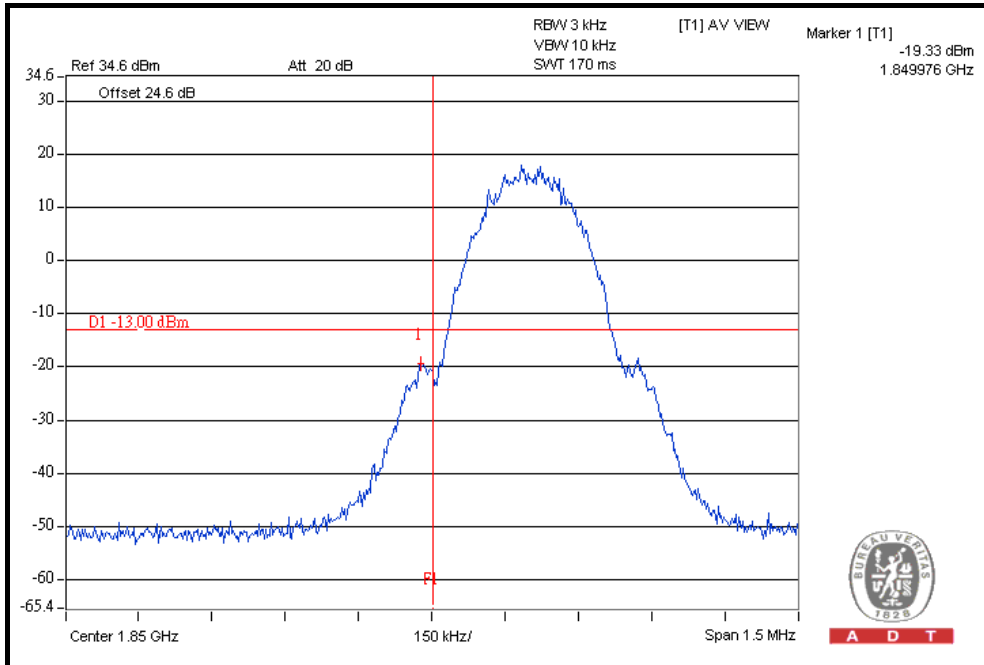

HIGHER BAND EDGE

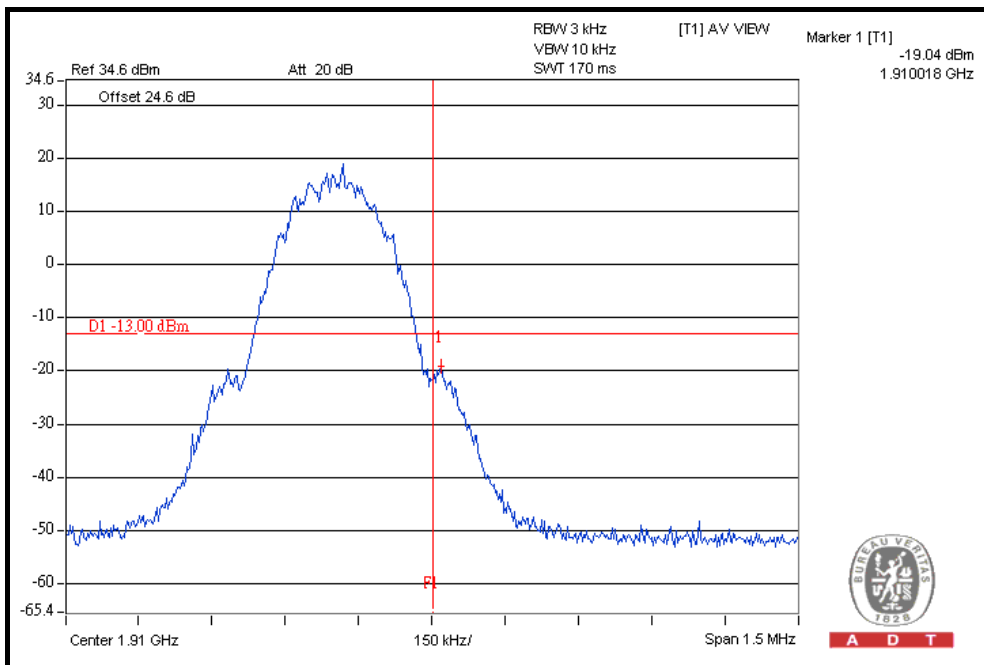




A D T


FOR WCDMA:

WCDMA-RMC MODE

LOWER BAND EDGE

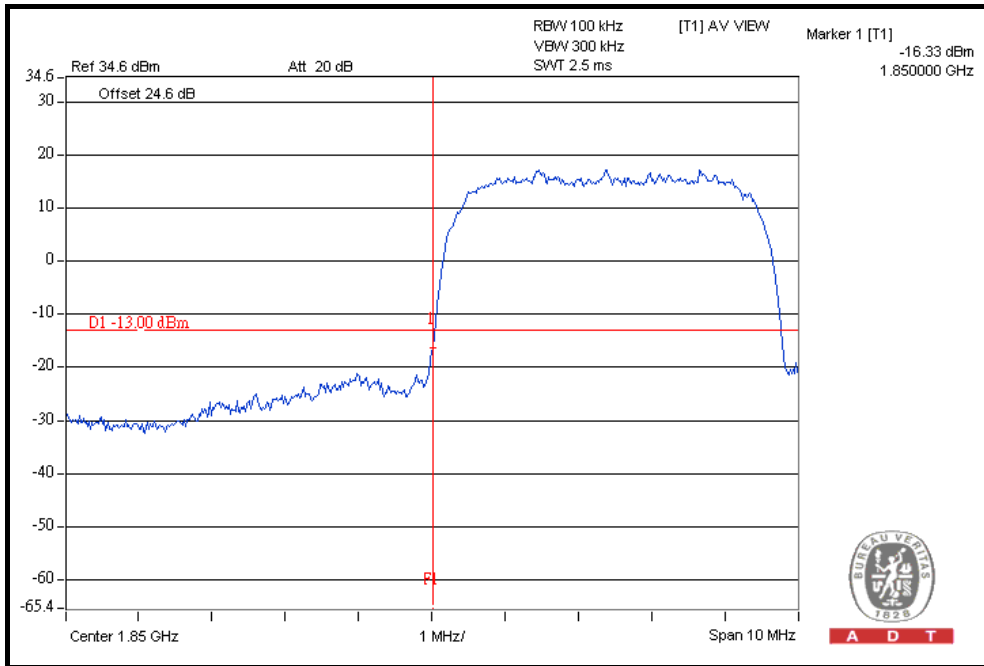

HIGHER BAND EDGE

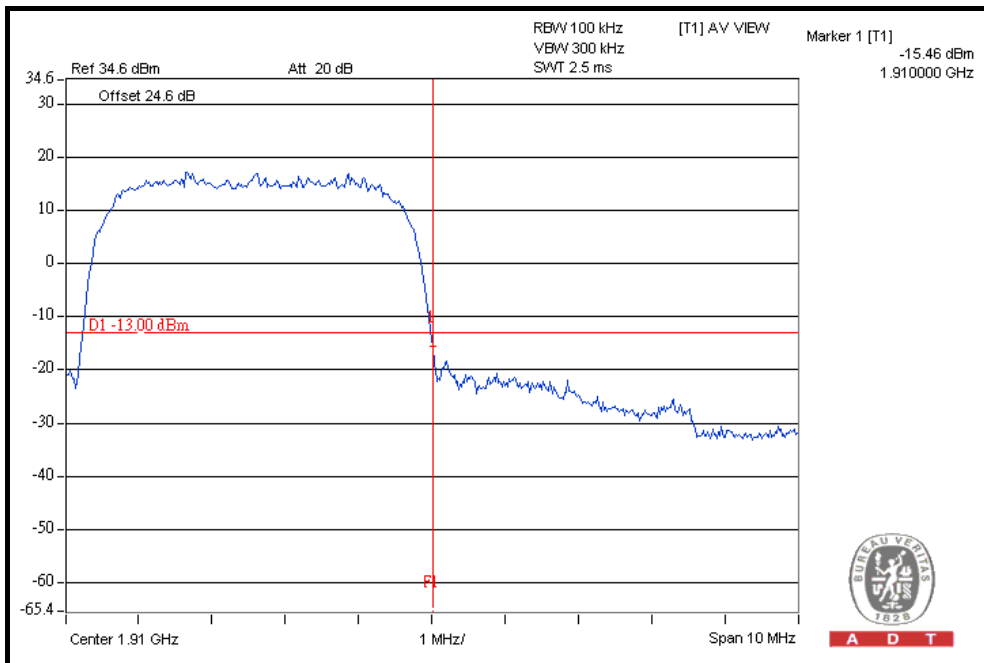





A D T

FOR HSDPA MODE

LOWER BAND EDGE

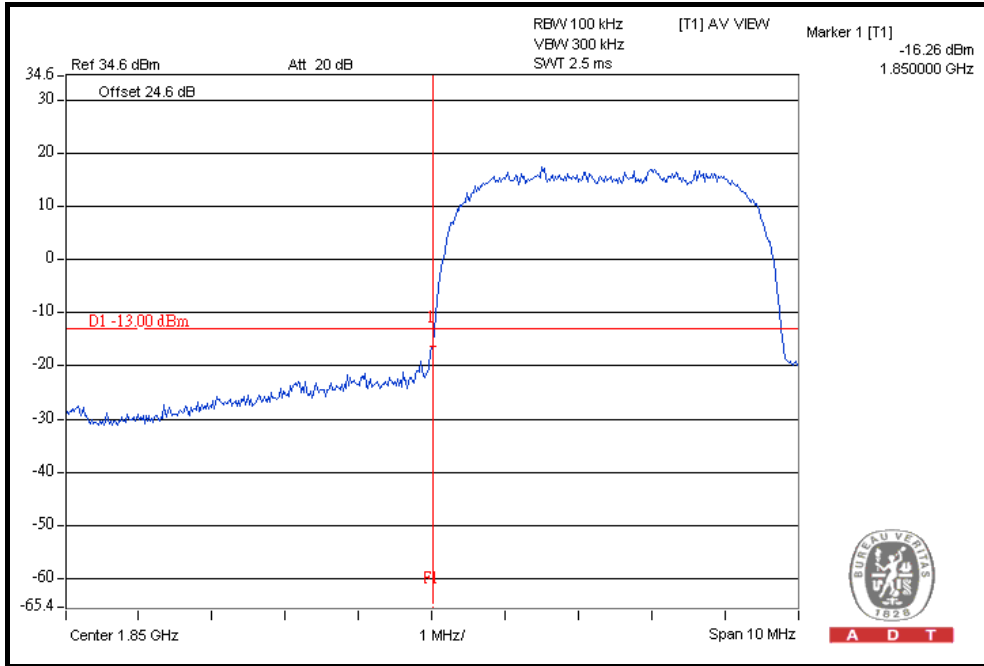

HIGHER BAND EDGE

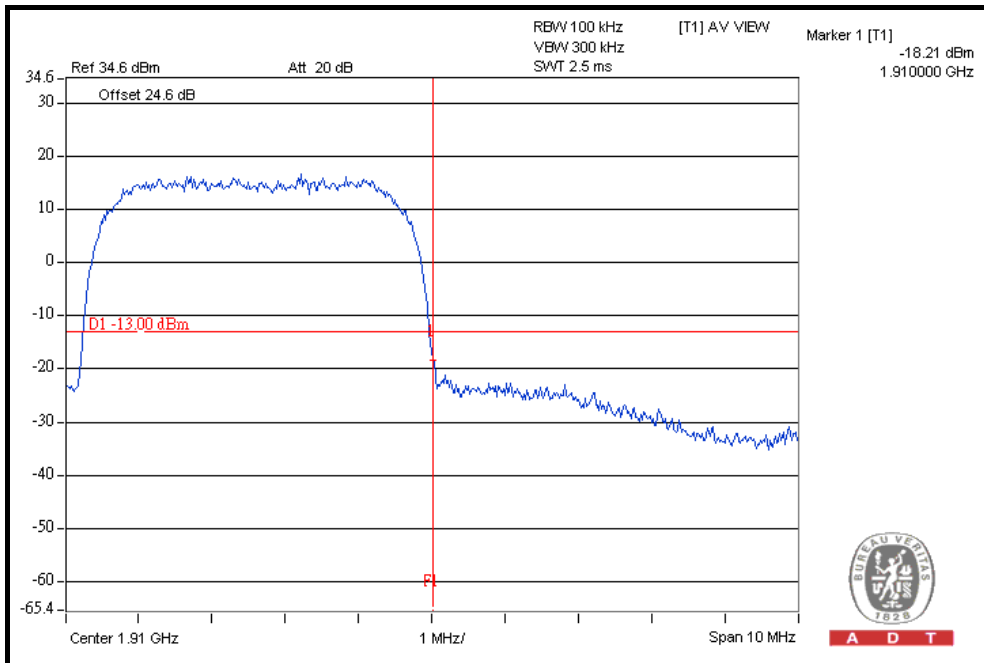




A D T


FOR HSUPA MODE

LOWER BAND EDGE

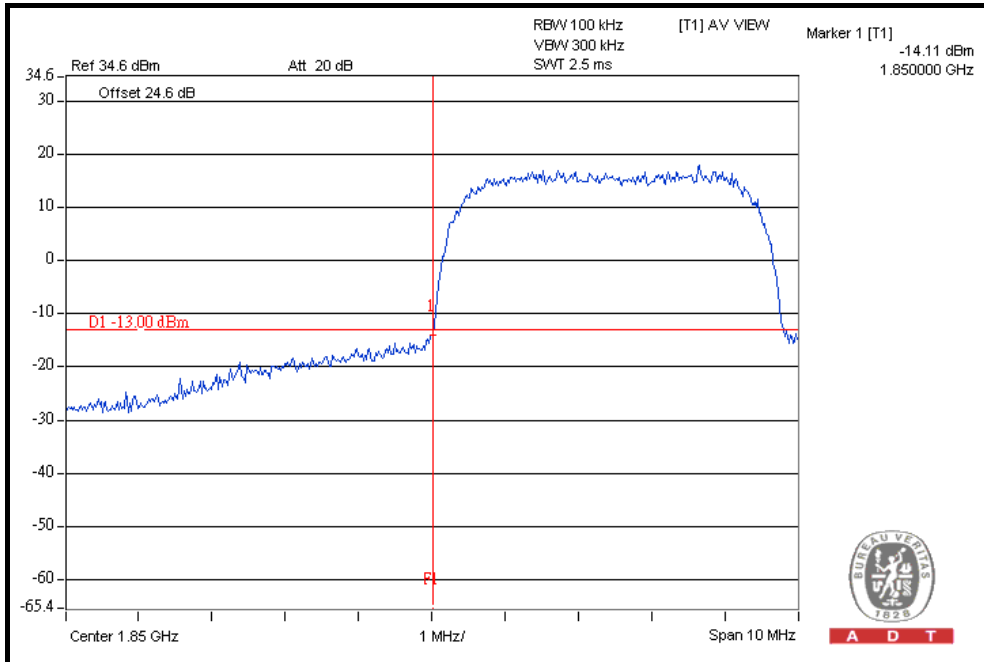

A D T

HIGHER BAND EDGE

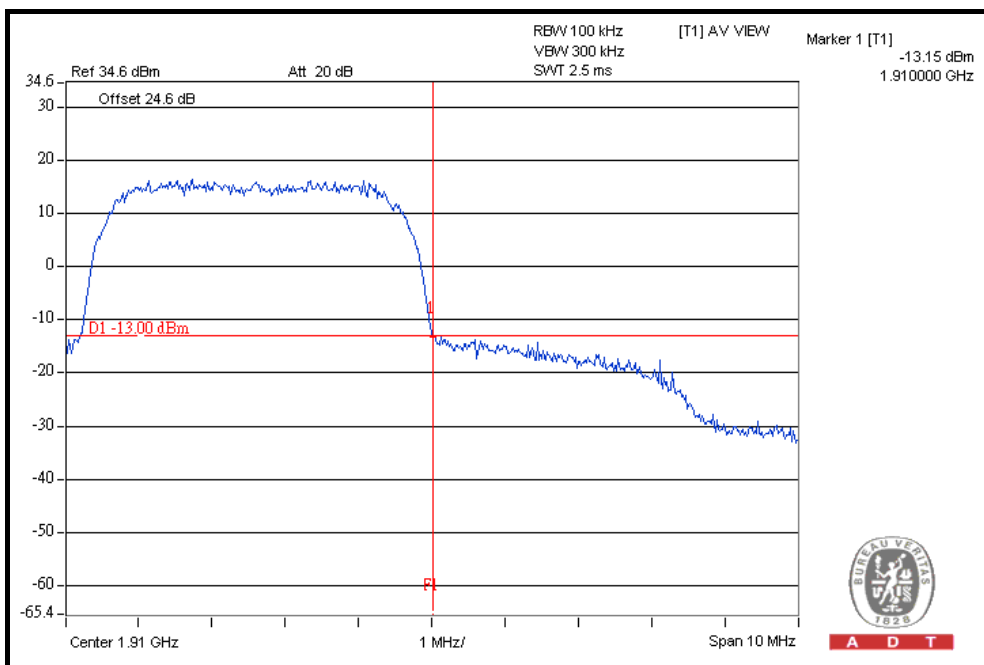

A D T



4.5 CONDUCTED SPURIOUS EMISSIONS

4.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

In the FCC 24.238(a), On any frequency outside a licensee's frequency block within USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB. The specified minimum attenuation becomes 43dB and the limit of emission equal to -13dBm .

4.5.2 TEST INSTRUMENTS


| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | DATE OF CALIBRATION | DUE DATE OF CALIBRATION |
|------------------------------|--------------|------------|---------------------|-------------------------|
| SPECTRUM ANALYZER R&S | FSP40 | 100039 | Jan. 11, 2011 | Jan. 10, 2012 |
| Mini-Circuits Power Splitter | ZN2PD-9G | NA | May 25, 2011 | May 24, 2012 |
| RF cable | SUCOFLEX 104 | 274403/4 | Aug. 20, 2011 | Aug. 19, 2012 |
| RF cable | SUCOFLEX 104 | 250729/4 | Aug. 19, 2011 | Aug. 18, 2012 |
| RF cable | SUCOFLEX 104 | 214377/4 | Aug. 19, 2011 | Aug. 18, 2012 |
| JFW 20dB attenuation | 50HF-020-SMA | NA | NA | NA |

NOTE: The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE

- a. The EUT makes a phone call to the communication simulator. The power was measured with R&S Spectrum Analyzer. All measurements were done at 3 channels, 512, 661 and 810 (GSM) / 9262, 9400 and 9538 (WCDMA) (low, middle and high operational frequency range.)
- b. The conducted spurious emission used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.
- c. Measuring frequency range is from 9 kHz to 20GHz. 20dB attenuation pad is connected with spectrum. RBW=1MHz and VBW=3MHz is used for conducted emission measurement.

4.5.4 TEST SETUP

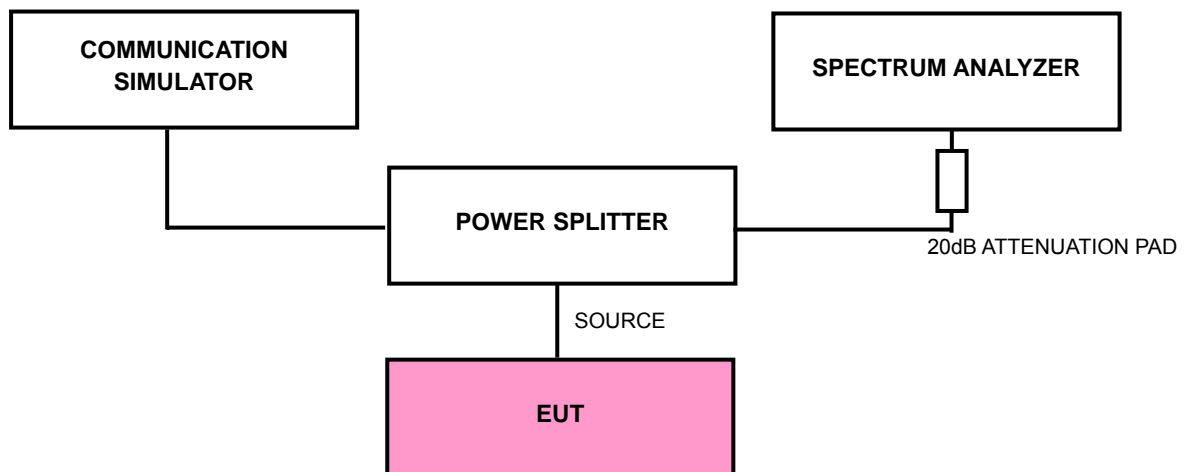

4.5.5 EUT OPERATING CONDITIONS

- a. The EUT makes a call to the communication simulator.
- b. The communication simulator station system controlled an EUT to export maximum output power under transmission mode and specific channel frequency.




A D T


4.5.6 TEST RESULTS

FOR GSM:

CH 512: 9kHz ~ 3GHz

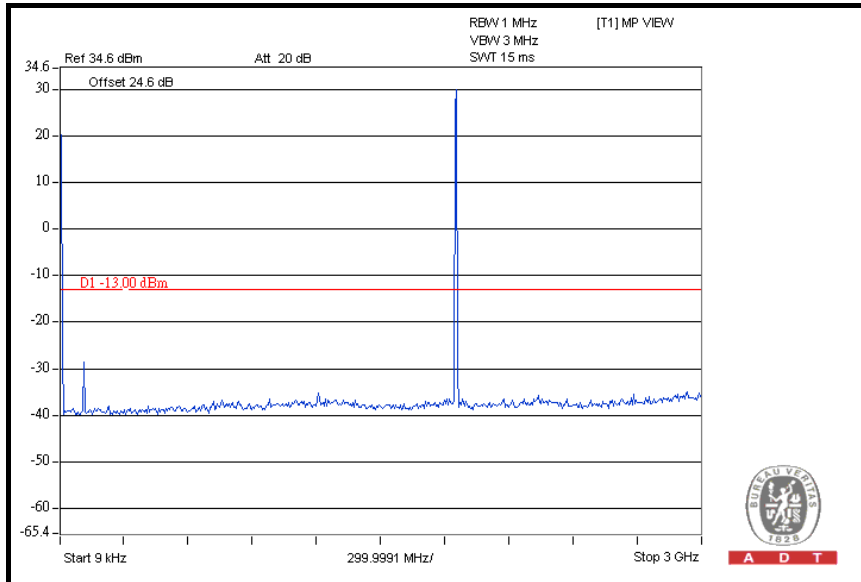


3GHz ~ 10GHz

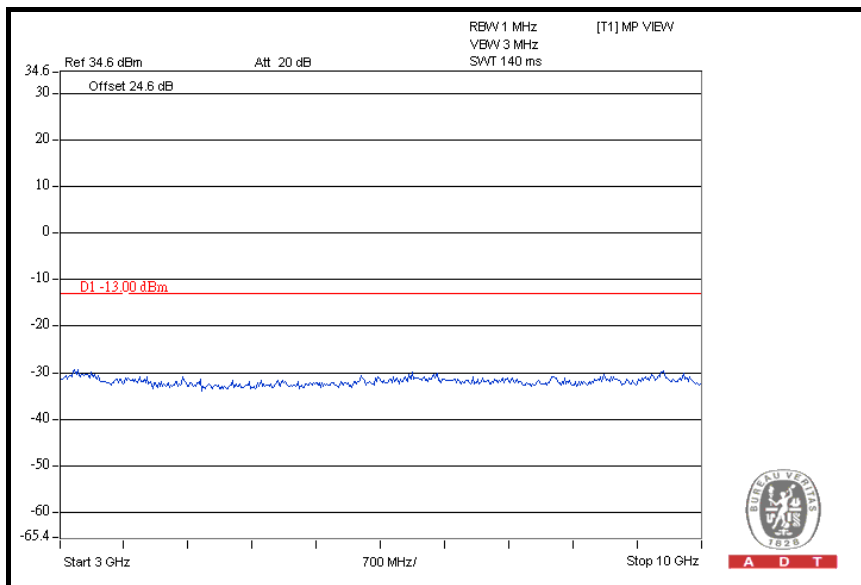




A D T

10GHz ~ 20GHz

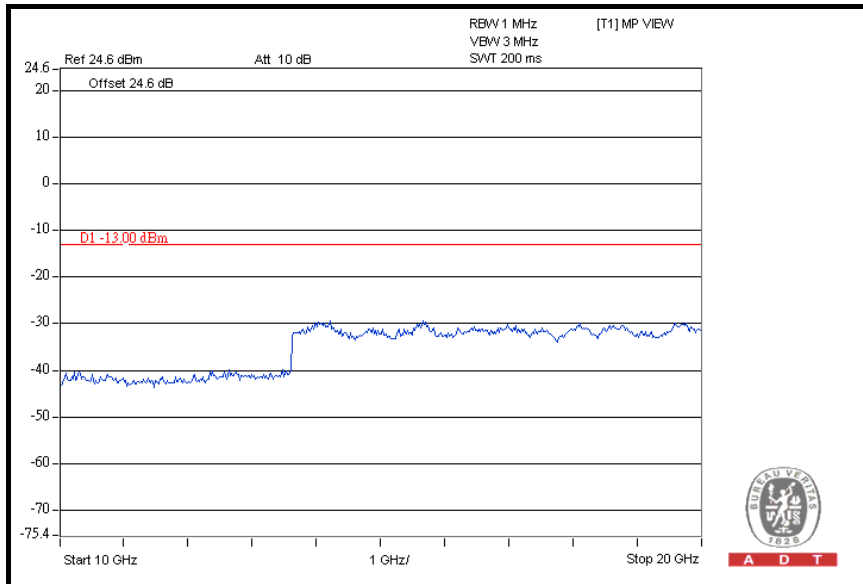


CH 661: 9kHz ~ 3GHz

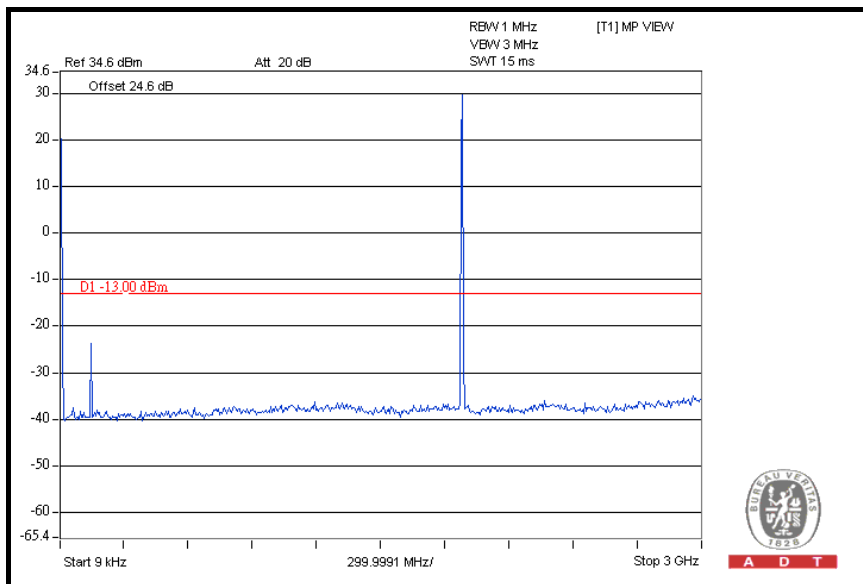




A D T

3GHz ~ 10GHz

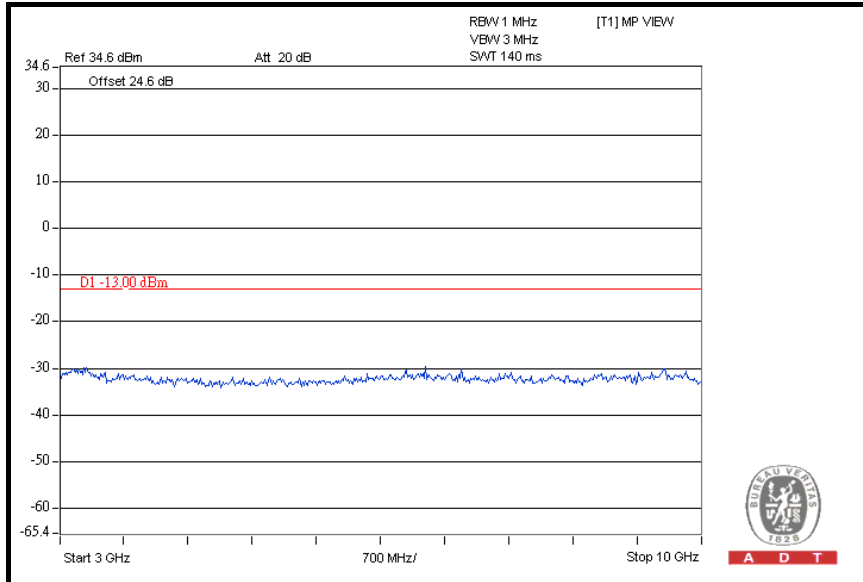


10GHz ~ 20GHz

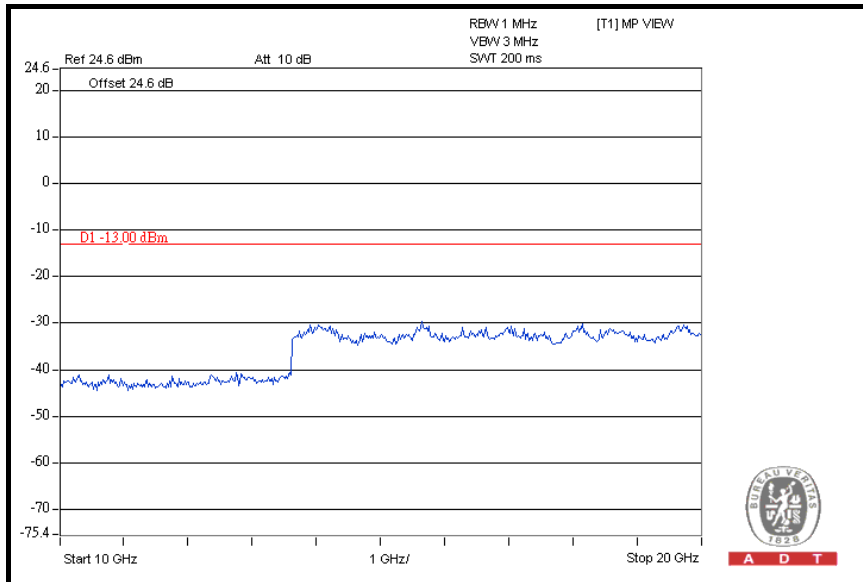




A D T

CH 810: 9kHz ~ 3GHz

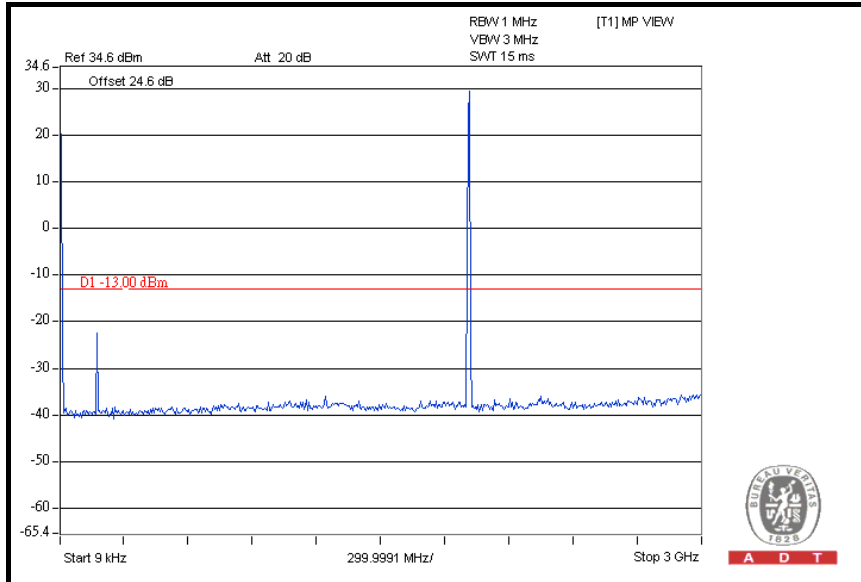


3GHz ~ 10GHz

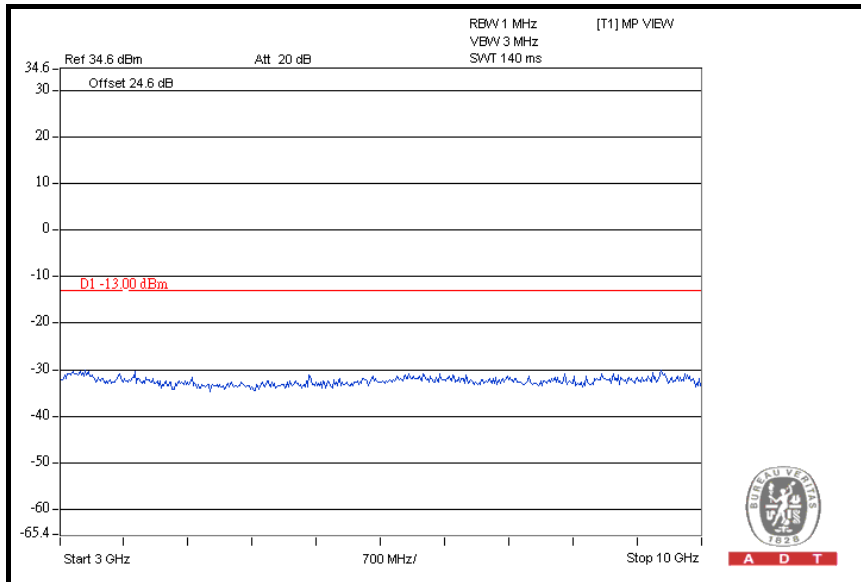



A D T

10GHz ~ 20GHz

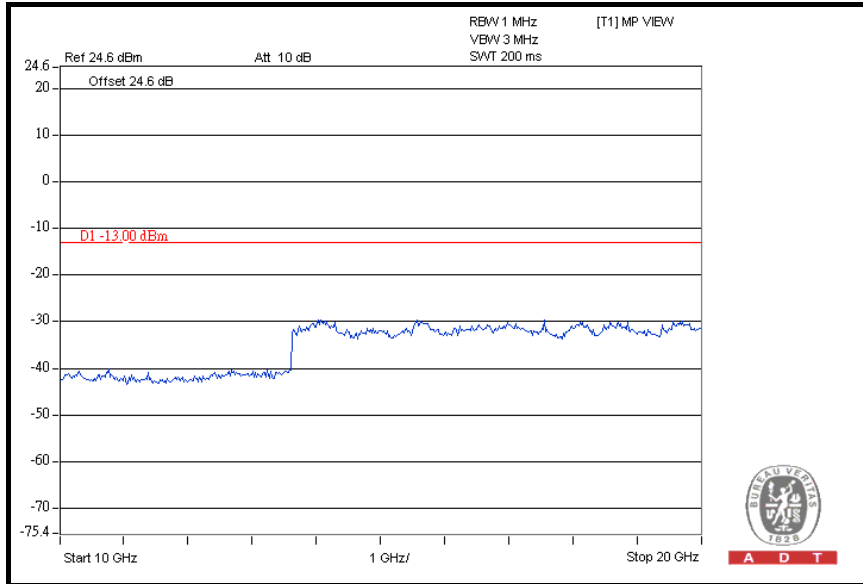




A D T


FOR WCDMA:

CH 9262: 9kHz ~ 3GHz

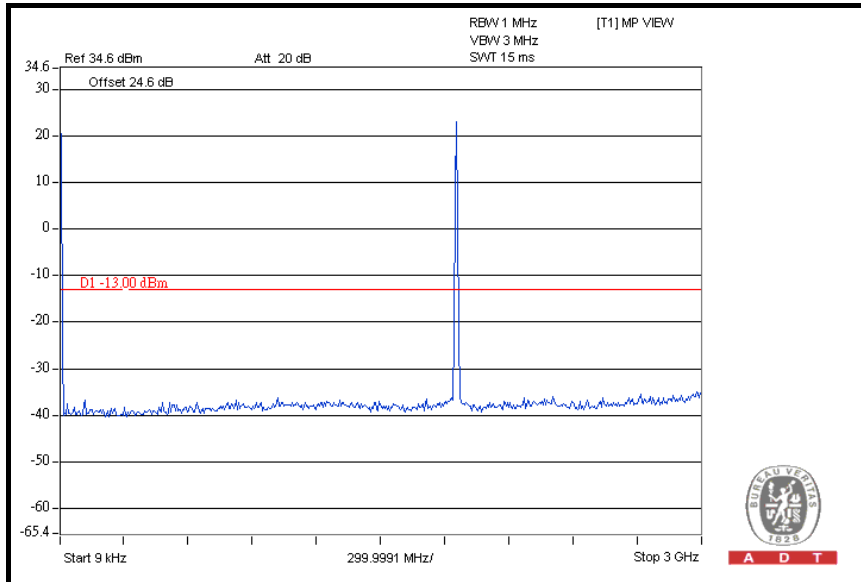

A D T

3GHz ~ 10GHz

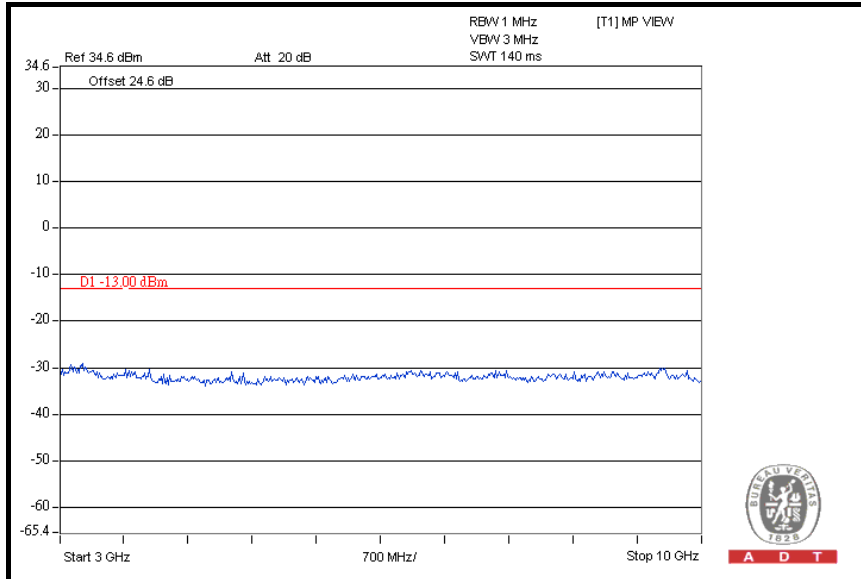


A D T




A D T

10GHz ~ 20GHz

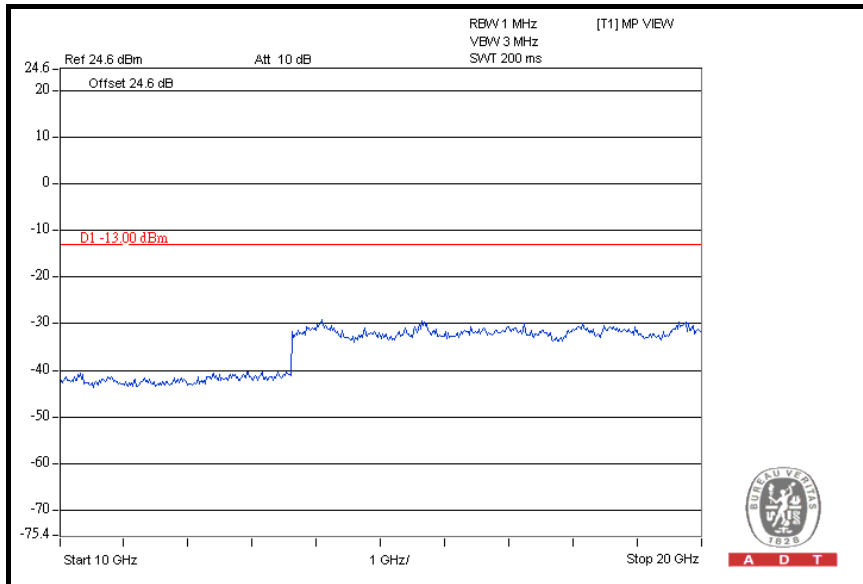


CH 9400: 9kHz ~ 3GHz

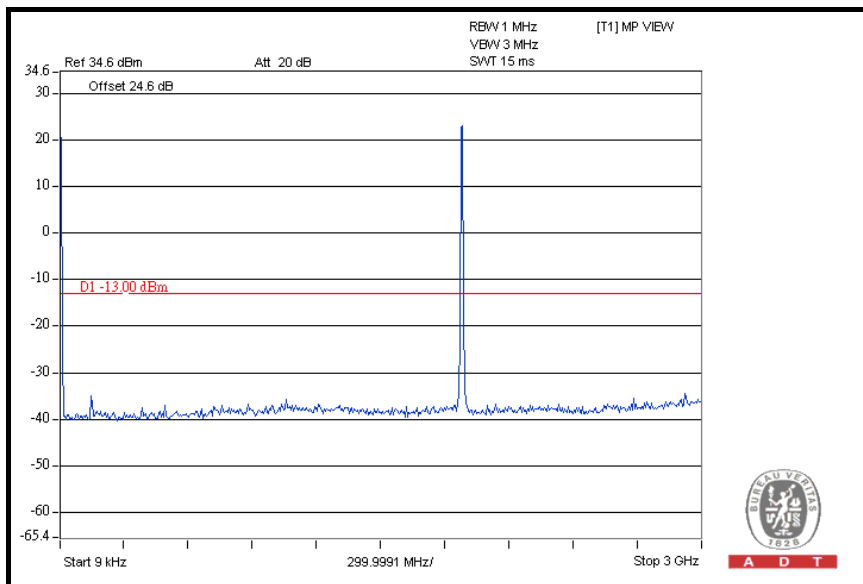




A D T

3GHz ~ 10GHz

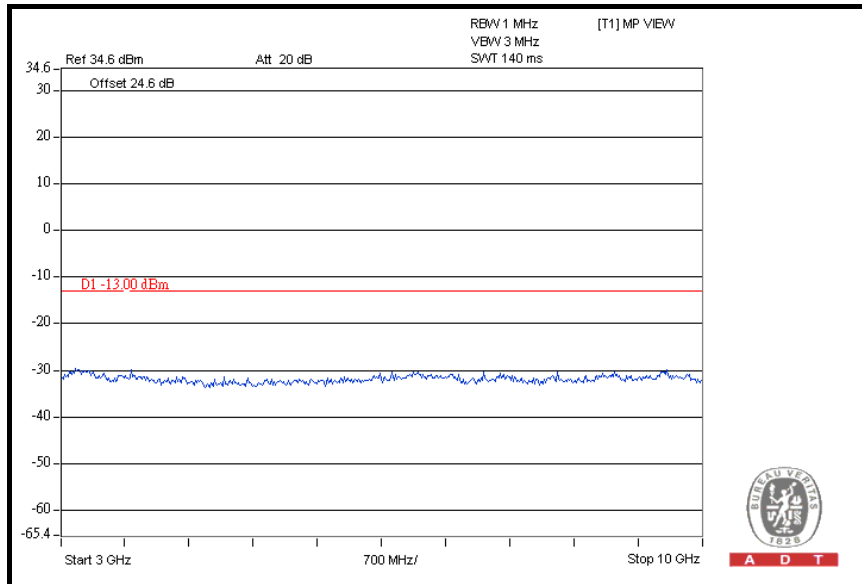


10GHz ~ 20GHz

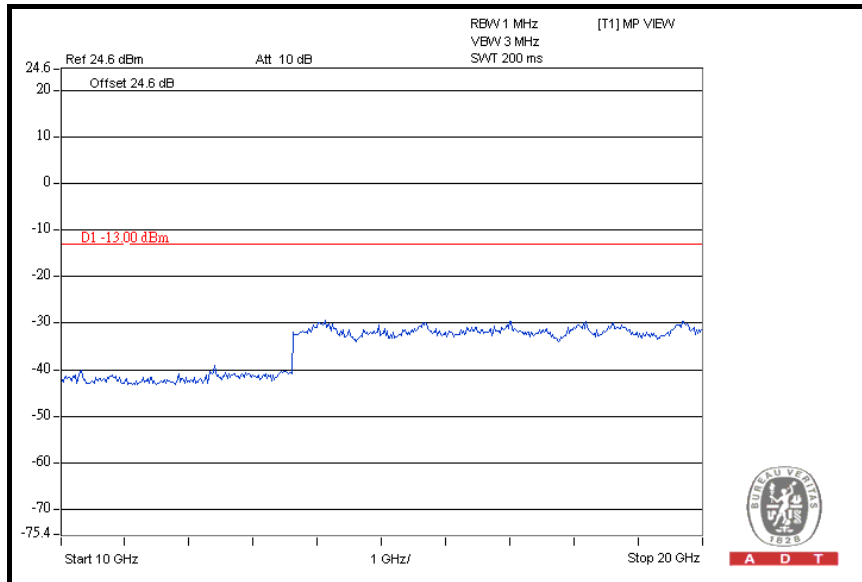




A D T

CH 9538: 9kHz ~ 3GHz

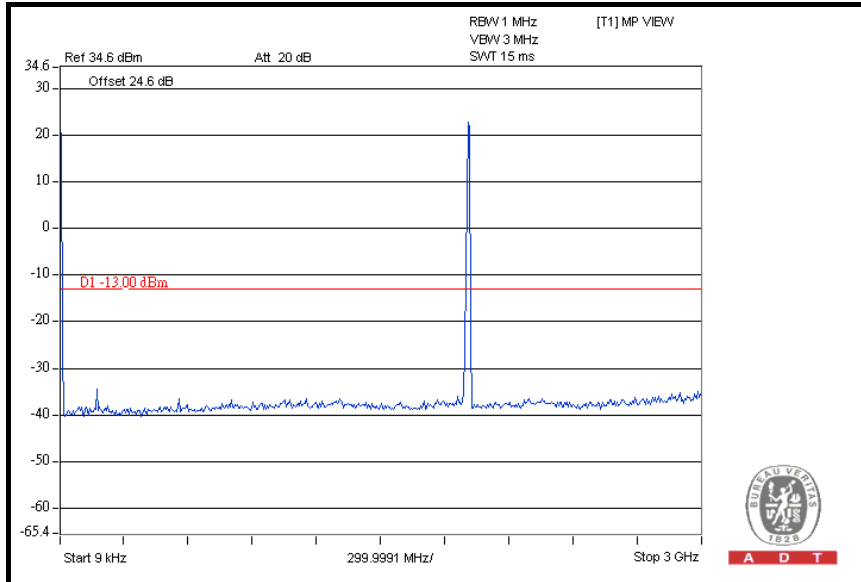


3GHz ~ 10GHz

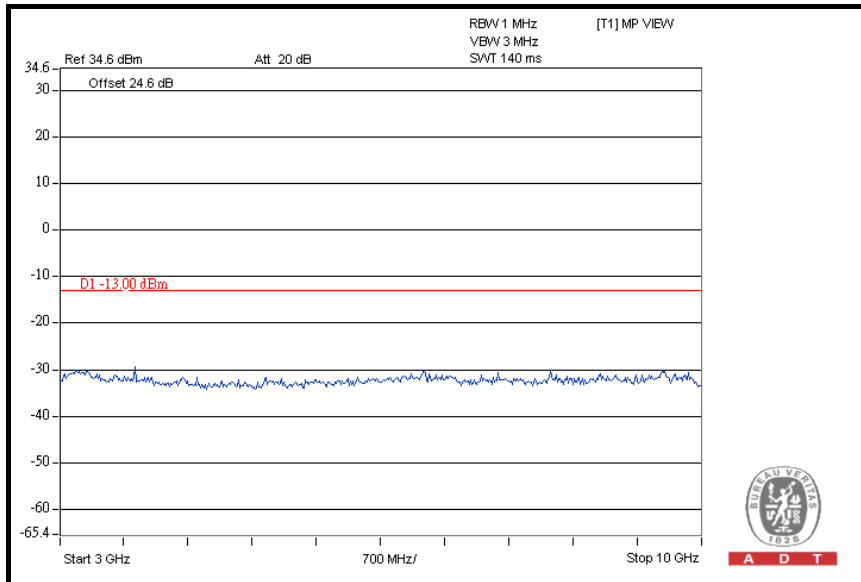



A D T

10GHz ~ 20GHz

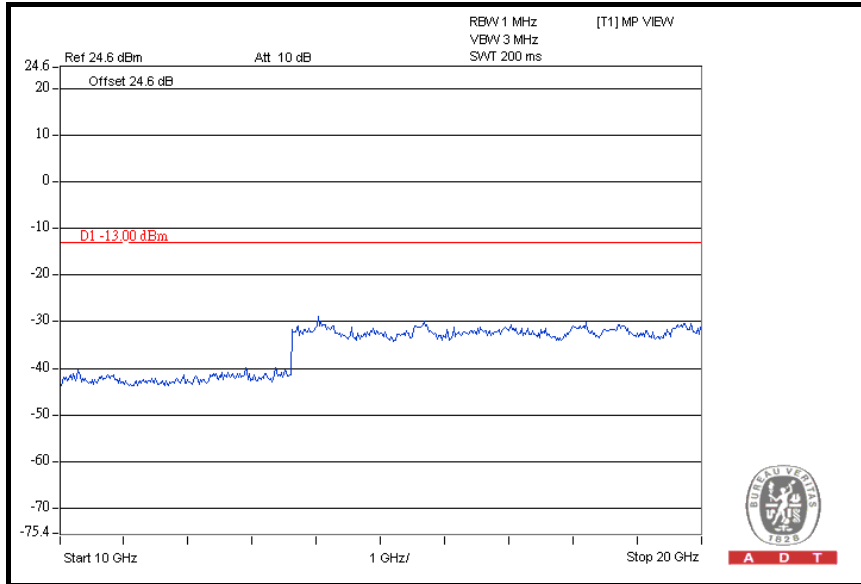



4.6 RADIATED EMISSION MEASUREMENT

4.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT

In the FCC 24.238(a), On any frequency outside a licensee's frequency block within USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB. The emission of limit equal to -13dBm .

4.6.2 TEST INSTRUMENTS

Same as 4.1.2.

4.6.3 TEST PROCEDURES


- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value” of step a. Record the power level of S.G
- c. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn.}$

NOTE: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 TEST SETUP

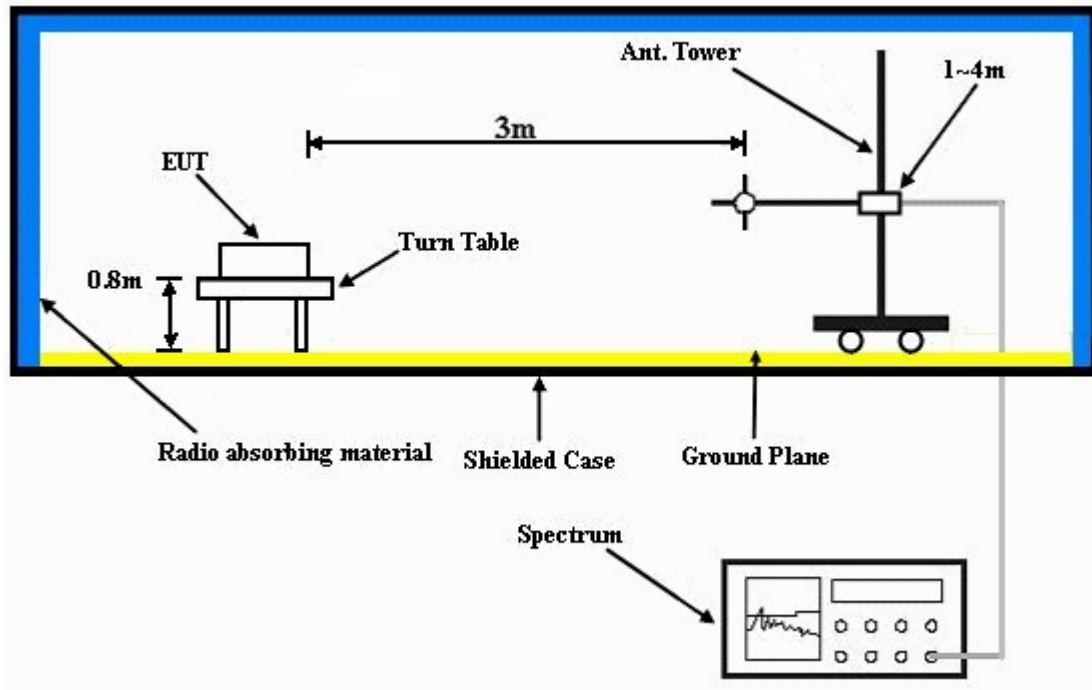

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.6.6 EUT OPERATING CONDITIONS

- The EUT makes a call to the communication simulator.
- The communication simulator station system controlled an EUT to export maximum output power under transmission mode and specific channel frequency.

4.6.7 TEST RESULTS

Below 1GHz

FOR GSM:

| | | | |
|---------------------------------|-----------------|------------------------|----------------|
| MODE | TX channel 661 | FREQUENCY RANGE | Below 1000 MHz |
| ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH | INPUT POWER | 120Vac, 60 Hz |
| TESTED BY | Kay Wu | | |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | |
|---|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
| 1 | 35.83 | -54.2 | -38.3 | -11.9 | -50.2 | -13.0 | -37.2 |
| 2 | 121.36 | -50.5 | -57.4 | 0.0 | -57.4 | -13.0 | -44.4 |
| 3 | 189.40 | -51.0 | -61.2 | 4.1 | -57.1 | -13.0 | -44.1 |
| 4 | 253.55 | -64.0 | -74.4 | 5.4 | -69.0 | -13.0 | -56.0 |
| 5 | 527.64 | -68.1 | -72.7 | 4.8 | -67.9 | -13.0 | -54.9 |
| 6 | 786.17 | -69.3 | -68.1 | 4.2 | -63.9 | -13.0 | -50.9 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | |
| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
| 1 | 33.89 | -42.2 | -36.8 | -12.1 | -48.9 | -13.0 | -35.9 |
| 2 | 123.31 | -51.9 | -56.6 | 0.0 | -56.6 | -13.0 | -43.6 |
| 3 | 224.39 | -65.4 | -73.3 | 5.4 | -67.9 | -13.0 | -54.9 |
| 4 | 374.07 | -66.8 | -71.9 | 5.2 | -66.7 | -13.0 | -53.7 |
| 5 | 547.07 | -68.4 | -70.6 | 4.7 | -65.9 | -13.0 | -52.9 |
| 6 | 797.84 | -70.9 | -67.7 | 4.0 | -63.7 | -13.0 | -50.7 |

NOTE: Power Value (dBum) = S.G Power Value (dBm) + Correction Factor (dB).



A D T

FOR WCDMA:

| | | | |
|---------------------------------|-----------------|------------------------|----------------|
| MODE | TX channel 9262 | FREQUENCY RANGE | Below 1000 MHz |
| ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH | INPUT POWER | 120Vac, 60 Hz |
| TESTED BY | Kay Wu | | |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | |
|--|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
| 1 | 30.00 | -63.7 | -47.2 | -12.6 | -59.8 | -13.0 | -46.8 |
| 2 | 49.44 | -64.6 | -53.0 | -9.8 | -62.8 | -13.0 | -49.8 |
| 3 | 121.36 | -62.4 | -69.3 | 0.0 | -69.3 | -13.0 | -56.3 |
| 4 | 183.57 | -62.6 | -71.8 | 3.4 | -68.4 | -13.0 | -55.4 |
| 5 | 449.88 | -69.6 | -74.3 | 5.1 | -69.2 | -13.0 | -56.2 |
| 6 | 725.91 | -69.4 | -69.8 | 4.9 | -64.9 | -13.0 | -51.9 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | |
| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
| 1 | 33.89 | -56.3 | -50.9 | -12.1 | -63.0 | -13.0 | -50.0 |
| 2 | 70.82 | -57.4 | -59.2 | -4.7 | -63.9 | -13.0 | -50.9 |
| 3 | 121.36 | -58.0 | -63.1 | 0.0 | -63.1 | -13.0 | -50.1 |
| 4 | 331.30 | -69.9 | -76.1 | 5.2 | -70.9 | -13.0 | -57.9 |
| 5 | 552.91 | -64.8 | -66.8 | 4.6 | -62.2 | -13.0 | -49.2 |
| 6 | 871.7 | -69.8 | -65.2 | 3.9 | -61.3 | -13.0 | -48.3 |

NOTE: Power Value (dBum) = S.G Power Value (dBm) + Correction Factor (dB).



A D T

Above 1GHz

FOR GSM:

| | | | |
|---------------------------------|-----------------|------------------------|----------------|
| MODE | TX channel 512 | FREQUENCY RANGE | Above 1000 MHz |
| ENVIRONMENTAL CONDITIONS | 24deg. C, 67%RH | INPUT POWER | 120Vac, 60 Hz |
| TESTED BY | David Huang | | |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | |
|---|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
| 1 | 3700.40 | -29.2 | -25.4 | 7.2 | -18.2 | -13.0 | -5.2 |
| 2 | 5550.60 | -46.1 | -36.7 | 6.8 | -29.9 | -13.0 | -16.9 |
| 3 | 7400.80 | -60.1 | -43.6 | 4.3 | -39.3 | -13.0 | -26.3 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | |
| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
| 1 | 3700.40 | -33.9 | -30.1 | 7.2 | -22.9 | -13.0 | -9.9 |
| 2 | 5550.60 | -50.6 | -41.2 | 6.8 | -34.4 | -13.0 | -21.4 |
| 3 | 7400.80 | -63.7 | -47.2 | 4.3 | -42.9 | -13.0 | -29.9 |

NOTE: Power Value (dBum) = S.G Power Value (dBm) + Correction Factor (dB).



A D T

| | | | |
|---------------------------------|-----------------|------------------------|----------------|
| MODE | TX channel 661 | FREQUENCY RANGE | Above 1000 MHz |
| ENVIRONMENTAL CONDITIONS | 24deg. C, 67%RH | INPUT POWER | 120Vac, 60 Hz |
| TESTED BY | David Huang | | |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | |
|--|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
| 1 | 3760.00 | -29.6 | -25.6 | 7.1 | -18.5 | -13.0 | -5.5 |
| 2 | 5640.00 | -46.2 | -36.5 | 6.8 | -29.7 | -13.0 | -16.7 |
| 3 | 7520.00 | -59.4 | -42.6 | 4.2 | -38.4 | -13.0 | -25.4 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | |
| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
| 1 | 3760.00 | -34.0 | -30.0 | 7.1 | -22.9 | -13.0 | -9.9 |
| 2 | 5640.00 | -46.8 | -37.1 | 6.8 | -30.3 | -13.0 | -17.3 |
| 3 | 7520.00 | -62.1 | -45.3 | 4.2 | -41.1 | -13.0 | -28.1 |

NOTE: Power Value (dBum) = S.G Power Value (dBm) + Correction Factor (dB).



A D T

| | | | |
|---------------------------------|-----------------|------------------------|----------------|
| MODE | TX channel 810 | FREQUENCY RANGE | Above 1000 MHz |
| ENVIRONMENTAL CONDITIONS | 24deg. C, 67%RH | INPUT POWER | 120Vac, 60 Hz |
| TESTED BY | David Huang | | |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | |
|--|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
| 1 | 3819.60 | -33.1 | -29.0 | 7.1 | -21.9 | -13.0 | -8.9 |
| 2 | 5729.40 | -49.3 | -39.1 | 6.7 | -32.4 | -13.0 | -19.4 |
| 3 | 7639.20 | -64.2 | -47.3 | 4.2 | -43.1 | -13.0 | -30.1 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | |
| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
| 1 | 3819.60 | -39.7 | -35.6 | 7.1 | -28.5 | -13.0 | -15.5 |
| 2 | 5729.40 | -49.4 | -39.2 | 6.7 | -32.5 | -13.0 | -19.5 |
| 3 | 7639.20 | -64.3 | -47.4 | 4.2 | -43.2 | -13.0 | -30.2 |

NOTE: Power Value (dBum) = S.G Power Value (dBm) + Correction Factor (dB).



A D T

FOR WCDMA:

| | | | |
|---------------------------------|-----------------|------------------------|----------------|
| MODE | TX channel 9262 | FREQUENCY RANGE | Above 1000 MHz |
| ENVIRONMENTAL CONDITIONS | 19deg. C, 67%RH | INPUT POWER | 120Vac, 60 Hz |
| TESTED BY | David Huang | | |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | |
|--|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
| 1 | 3704.80 | -56.4 | -52.3 | 7.2 | -45.1 | -13.0 | -32.1 |
| 2 | 5557.20 | -50.9 | -40.0 | 6.8 | -33.2 | -13.0 | -20.2 |
| 3 | 7409.60 | -63.3 | -46.1 | 4.3 | -41.8 | -13.0 | -28.8 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | |
| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
| 1 | 3704.80 | -55.6 | -51.8 | 7.2 | -44.6 | -13.0 | -31.6 |
| 2 | 5557.20 | -58.5 | -49.0 | 6.8 | -42.2 | -13.0 | -29.2 |
| 3 | 7409.60 | -63.2 | -46.7 | 4.3 | -42.4 | -13.0 | -29.4 |

NOTE: Power Value (dBum) = S.G Power Value (dBm) + Correction Factor (dB).



A D T

| | | | |
|---------------------------------|-----------------|------------------------|----------------|
| MODE | TX channel 9400 | FREQUENCY RANGE | Above 1000 MHz |
| ENVIRONMENTAL CONDITIONS | 19deg. C, 67%RH | INPUT POWER | 120Vac, 60 Hz |
| TESTED BY | David Huang | | |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | |
|--|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
| 1 | 3760.00 | -55.4 | -51.0 | 7.1 | -43.9 | -13.0 | -30.9 |
| 2 | 5640.00 | -48.4 | -37.4 | 6.8 | -30.6 | -13.0 | -17.6 |
| 3 | 7520.00 | -61.5 | -43.9 | 4.2 | -39.7 | -13.0 | -26.7 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | |
| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
| 1 | 3760.00 | -55.7 | -51.7 | 7.1 | -44.6 | -13.0 | -31.6 |
| 2 | 5640.00 | -59.4 | -49.7 | 6.8 | -42.9 | -13.0 | -29.9 |
| 3 | 7520.00 | -62.2 | -45.4 | 4.2 | -41.2 | -13.0 | -28.2 |

NOTE: Power Value (dBum) = S.G Power Value (dBm) + Correction Factor (dB).



A D T

| | | | |
|---------------------------------|-----------------|------------------------|----------------|
| MODE | TX channel 9538 | FREQUENCY RANGE | Above 1000 MHz |
| ENVIRONMENTAL CONDITIONS | 19deg. C, 67%RH | INPUT POWER | 120Vac, 60 Hz |
| TESTED BY | David Huang | | |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | |
|---|-------------|---------------|-----------------------|------------------------|------------|-------------|-------------|
| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
| 1 | 3815.20 | -51.6 | -47.1 | 7.1 | -40.0 | -13.0 | -27.0 |
| 2 | 5722.80 | -50.1 | -39.0 | 6.7 | -32.3 | -13.0 | -19.3 |
| 3 | 7630.40 | -62.5 | -44.7 | 4.2 | -40.5 | -13.0 | -27.5 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | |
| No. | Freq. (MHz) | Reading (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
| 1 | 3815.20 | -55.3 | -51.2 | 7.1 | -44.1 | -13.0 | -31.1 |
| 2 | 5722.80 | -57.3 | -47.2 | 6.7 | -40.5 | -13.0 | -27.5 |
| 3 | 7630.40 | -62.9 | -46.0 | 4.2 | -41.8 | -13.0 | -28.8 |

NOTE: Power Value (dBum) = S.G Power Value (dBm) + Correction Factor (dB).



5 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



6 INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

Copies of accreditation and authorization certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5.phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Email: service.adt@tw.bureauveritas.com

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.

7 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

---END---