

FCC Co-Location Test Report

FCC ID : MXF-WLTFGT145EUD

Equipment : WLTFGT-145ACN LTE Cat 12 B48 Indoor CPE

Model No. : WLTFGT-145ACN

Brand Name : Gemtek

Applicant : Gemtek Technology Co., Ltd.

Address : No. 15-1 Zhonghua Road, Hsinchu Industrial

Park, Hukou, Hsinchu, Taiwan, 30352.

Standard : 47 CFR FCC Part 15.247

47 CFR FCC Part 15.407 47 CFR FCC Part 96

Received Date : Nov. 19, 2020

Tested Date : Mar. 02, 2021

We, International Certification Corporation, would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by: Approved by:

long Chen/ Assistant Manager 🛮 Gary Chang / Manager

2732

Testing Laboratory

Report No.: FR0N1902CO Page: 1 of 15



Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information	5
1.2	The Equipment List	
1.3	Test Standards	7
1.4	Reference Guidance	
1.5	Deviation from Test Standard and Measurement Procedure	7
1.6	Measurement Uncertainty	7
2	TEST CONFIGURATION	8
2.1	Testing Facility	8
2.2	The Worst Test Modes and Channel Details	8
3	TRANSMITTER TEST RESULTS	9
3.1	Unwanted Emissions into Restricted Frequency Bands	g
4	TEST LABORATORY INFORMATION	15



Release Record

Report No.	Version	Description	Issued Date
FR0N1902CO	Rev. 01	Initial issue	Mar. 19, 2021

Report No.: FR0N1902CO Page: 3 of 15



Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.247(d) 15.407(b) 15.209 2.1053 / 96.41(e)	Radiated Emissions	[dBuV/m at 3m]: 50.49MHz 38.87 (Margin -1.13dB) - QP	Pass

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Report No.: FR0N1902CO Page: 4 of 15



1 General Description

1.1 Information

1.1.1 Specification of the Equipment under Test (EUT)

WLAN	VLAN				
Operating Frequency	802.11b/g/n: 2412 MHz ~ 2462 MHz 802.11a/n/ac: 5180 MHz ~ 5240 MHz; 5745 MHz ~ 5825 MHz				
Antenna Type	Dipole antenna				
Modulation Type	802.11b: DSSS (DBPSK/DQPSK/CCK) 802.11a/g/n/ac: OFDM (BPSK/QPSK/16QAM/64QAM/256QAM)				
LTE					
Operating Frequency	Band 48 Channel Bandwidth: 10MHz: 3555.0 MHz ~ 3695.0 MHz Channel Bandwidth: 20MHz: 3560.0 MHz ~ 3690.0 MHz				
Antenna Type	Dipole antenna				
Modulation Type	QPSK, 16QAM, 64QAM (Uplink) QPSK, 16QAM, 64QAM, 256QAM (Downlink)				

1.1.2 Antenna Details

WLAN

Ant. No.	o. Type Connector		Operating Frequencies (MHz) / Antenna Gain (dBi)		
AIII. NO.	Туре	Connector	2400~2483.5	5150~5250	5725~5850
1	dipole	I-PEX	2.45	3.27	3.3

LTE B48

Ant. No.	Туре	Connector	Gain (dBi)	Remark
1	Dipole	I-PEX	4	

1.1.3 Power Supply Type of Equipment under Test (EUT)

Power Supply Type	12Vdc from adapter

Report No.: FR0N1902CO Page: 5 of 15



1.2 The Equipment List

Test Item	Radiated Emission				
Test Site	966 chamber1 / (03CH01-WS)				
Tested Date	Mar. 02, 2021				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101498	Dec. 04, 2020	Dec. 03, 2021
Receiver	R&S	ESR3	101658	Feb. 08, 2021	Feb. 07, 2022
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Jul. 10, 2020	Jul. 09, 2021
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Dec. 11, 2020	Dec. 10, 2021
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 06, 2020	Nov. 05, 2021
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 17, 2020	Nov. 16, 2021
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Oct. 06, 2020	Oct. 05, 2021
Preamplifier	EMC	EMC02325	980225	Jul. 03, 2020	Jul. 02, 2021
Preamplifier	Agilent	83017A	MY39501308	Sep. 26, 2020	Sep. 25, 2021
Preamplifier	EMC	EMC184045B	980192	Jul. 21, 2020	Jul. 20, 2021
RF Cable	EMC	EMC104-SM-SM-80 00	181106	Oct. 06, 2020	Oct. 05, 2021
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16019/4	Oct. 06, 2020	Oct. 05, 2021
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16014/4	Oct. 06, 2020	Oct. 05, 2021
LF cable 1M	EMC	EMCCFD400-NM-N M-1000	160502	Oct. 06, 2020	Oct. 05, 2021
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-001	Oct. 06, 2020	Oct. 05, 2021
LF cable 11M	EMC	EMCCFD400-NW-N W-11000	200801	Oct. 06, 2020	Oct. 05, 2021
Measurement Software	AUDIX	e3	6.120210g	NA	NA

Report No.: FR0N1902CO Page: 6 of 15



1.3 Test Standards

47 CFR FCC Part 15.247 47 CFR FCC Part 15.407 47 CFR FCC Part 96 ANSI C63.10-2013 ANSI C63.26-2015

FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01

FCC KDB 971168 D01 Power Meas License Digital Systems v03r01

1.4 Reference Guidance

ANSI C63.4-2014
FCC KDB 558074 D01 15.247 Meas Guidance v05r02
FCC KDB 662911 D01 Multiple Transmitter Output v02r01
FCC KDB 412172 D01 Determining ERP and EIRP v01r01

1.5 Deviation from Test Standard and Measurement Procedure

None

1.6 Measurement Uncertainty

The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)).

Measurement Uncertainty		
Parameters Uncertainty		
Radiated emission ≤ 1GHz	±3.41 dB	
Radiated emission > 1GHz	±4.59 dB	

Report No.: FR0N1902CO Page: 7 of 15



2 Test Configuration

2.1 Testing Facility

Test Laboratory International Certification Corporation		
Test Site	9 03CH01-WS	
Address of Test Site	No.3-1, Lane 6, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 33381, Taiwan (R.O.C.)	

FCC Designation No.: TW2732FCC site registration No.: 181692

➤ ISED#: 10807A

➤ CAB identifier: TW2732

2.2 The Worst Test Modes and Channel Details

Test item	Test Mode
Radiated Emissions	11G CH06 + 11A CH157 +B48 CDD 20M QPSK 3625MHz

Report No.: FR0N1902CO Page: 8 of 15



3 Transmitter Test Results

3.1 Unwanted Emissions into Restricted Frequency Bands

3.1.1 Limit of Unwanted Emissions into Restricted Frequency Bands

Restricted Band Emissions Limit						
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)			
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300			
0.490~1.705	24000/F(kHz)	33.8 - 23	30			
1.705~30.0	30	29	30			
30~88	100	40	3			
88~216	150	43.5	3			
216~960	200	46	3			
Above 960	500	54	3			

Note 1:

Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit **Note 2**:

Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

3.1.2 Test Procedures

- Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m.
- 2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
- 3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.


Note:

- 1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
- RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
- RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

Report No.: FR0N1902CO Page: 9 of 15




3.1.3 Test Setup

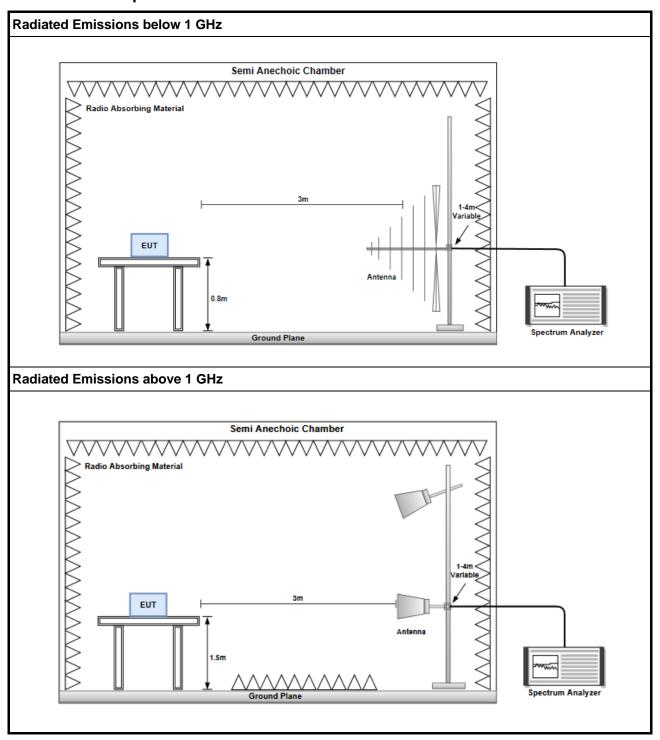

Report No.: FR0N1902CO Page: 10 of 15



3.1.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

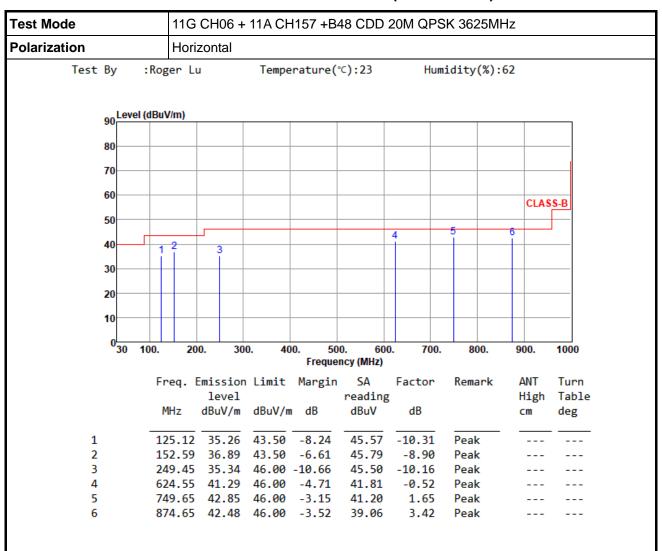

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Report No.: FR0N1902CO Page: 11 of 15



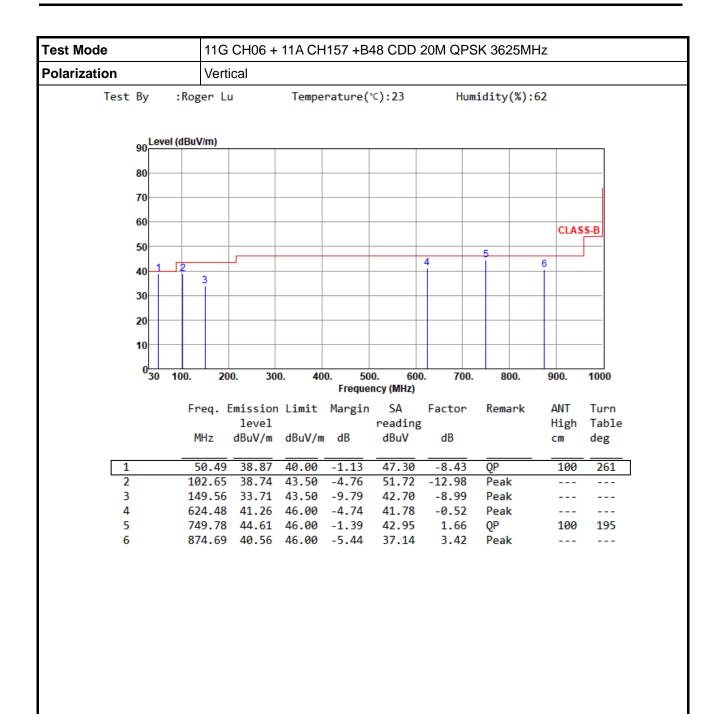

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Report No.: FR0N1902CO Page: 12 of 15



3.1.5 Transmitter Radiated Unwanted Emissions (Above 1GHz)

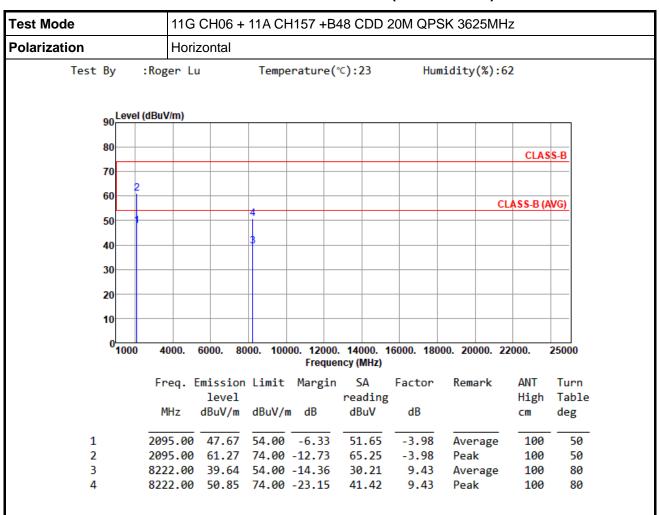


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR0N1902CO Page: 13 of 15



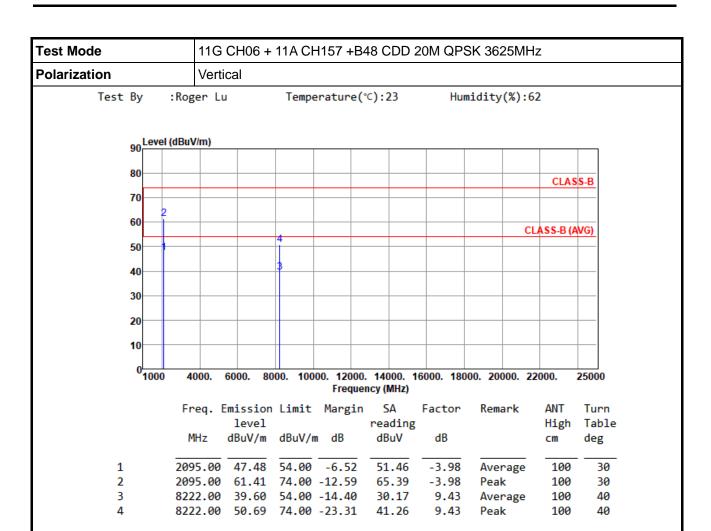

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR0N1902CO Page: 14 of 15



4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corporation (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website http://www.icertifi.com.tw.

		n	v	^	
_	_1		n	u	u

Tel: 886-2-2601-1640

No.30-2, Ding Fwu Tsuen, Lin Kou District, New Taipei City, Taiwan

(R.O.C.)

Kwei Shan

Tel: 886-3-271-8666 No.3-1, Lane 6, Wen San 3rd

St., Kwei Shan Dist., Tao Yuan City 33381, Taiwan (R.O.C.)

Kwei Shan Site II

Tel: 886-3-271-8640

No.14-1, Lane 19, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 333, Taiwan (R.O.C.)

If you have any suggestion, please feel free to contact us as below information

Tel: 886-3-271-8666 Fax: 886-3-318-0155

Email: ICC Service@icertifi.com.tw

==END==

Report No.: FR0N1902CO Page: 15 of 15