

FCC Test Report

FCC ID : MXF-WRTM-331
Equipment : THINGS
Model No. : TH-GW10, VC-FLX1
(Marketing difference)
Brand Name : Toshiba, Onkyo
(Marketing difference)
Applicant : Gemtek Technology Co., Ltd.
Address : No. 15-1 Zhonghua Road, Hsinchu Industrial
Park, Hukou, Hsinchu, Taiwan, 30352.
Standard : 47 CFR FCC Part 15.247
Received Date : Apr. 12, 2017
Tested Date : Apr. 20 ~ May 03, 2017

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:


Along Chen / Assistant Manager

Approved by:


Gary Chang / Manager



Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Local Support Equipment List	7
1.3	Test Setup Chart	7
1.4	The Equipment List	8
1.5	Test Standards	9
1.6	Measurement Uncertainty	9
2	TEST CONFIGURATION	10
2.1	Testing Condition	10
2.2	The Worst Test Modes and Channel Details	10
3	TRANSMITTER TEST RESULTS.....	11
3.1	Conducted Emissions.....	11
3.2	6dB and Occupied Bandwidth	14
3.3	RF Output Power	17
3.4	Power Spectral Density	19
3.5	Unwanted Emissions into Restricted Frequency Bands	21
3.6	Emissions in Non-Restricted Frequency Bands	49
4	TEST LABORATORY INFORMATION	62

Release Record

Report No.	Version	Description	Issued Date
FR741201AC	Rev. 01	Initial issue	Aug. 08, 2017

Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	Conducted Emissions	[dBuV]: 0.350MHz 35.61 (Margin -13.35dB) - AV	Pass
15.247(d) 15.209	Radiated Emissions	[dBuV/m at 3m]: 4874.00MHz 52.99 (Margin -1.01dB) - AV	Pass
15.247(b)(3)	Maximum Output Power	Max Power [dBm]: 27.67	Pass
15.247(a)(2)	6dB Bandwidth	Meet the requirement of limit	Pass
15.247(e)	Power Spectral Density	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

1 General Description

1.1 Information

1.1.1 Specification of the Equipment under Test (EUT)

RF General Information					
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N _{TX})	Data Rate / MCS
2400-2483.5	b	2412-2462	1-11 [11]	2	1-11 Mbps
2400-2483.5	g	2412-2462	1-11 [11]	2	6-54 Mbps
2400-2483.5	n (HT20)	2412-2462	1-11 [11]	2	MCS 0-15
2400-2483.5	n (HT40)	2422-2452	3-9 [7]	2	MCS 0-15

Note 1: RF output power specifies that Maximum Peak Conducted Output Power.
 Note 2: 802.11b uses a combination of DSSS-DBPSK, DQPSK, CCK modulation.
 Note 3: 802.11g/n uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.

1.1.2 Antenna Details

Ant. No.	Model	Type	Connector	Operating Frequencies (MHz) / Antenna Gain (dBi)		
				2400~2483.5	5150~5250	5725~5850
1	A8-A006-00391	Dipole	IPEX	3.61	4.34	4.34
2	A8-A006-00392	Dipole	IPEX	3.61	4.34	4.34

1.1.3 Power Supply Type of Equipment under Test (EUT)

Power Supply Type	12Vdc from adapter
--------------------------	--------------------

1.1.4 Accessories

Accessories		
No.	Equipment	Description
1	AC adapter	Brand: APD Model: WA-36A12FU Power Rating: I/P: 100-240Vac, 50-60Hz, 0.9A Max. O/P: 12Vdc, 3A Power Line: 1.8m non-shielded without core

1.1.5 Channel List

Frequency band (MHz)		2400~2483.5	
802.11 b / g / n HT20		802.11n HT40	
Channel	Frequency(MHz)	Channel	Frequency(MHz)
1	2412	3	2422
2	2417	4	2427
3	2422	5	2432
4	2427	6	2437
5	2432	7	2442
6	2437	8	2447
7	2442	9	2452
8	2447	---	---
9	2452	---	---
10	2457	---	---
11	2462	---	---

1.1.6 Test Tool and Duty Cycle

Test Tool	MT7615QA, V0.0.1.63		
Duty Cycle and Duty Factor	Mode	Duty cycle (%)	Duty factor (dB)
	11b	97.02%	0.13
	11g	82.01%	0.86
	HT20	82.30%	0.85
	HT40	69.47%	1.58


1.1.7 Power Setting

Modulation Mode	Test Frequency (MHz)	Power Set
11b	2412	2A
11b	2437	2A
11b	2462	2A
11g	2412	2E
11g	2437	34
11g	2462	31
HT20	2412	2C
HT20	2437	34
HT20	2462	2F
HT40	2422	24
HT40	2437	2E
HT40	2452	29

1.2 Local Support Equipment List

Support Equipment List						
No.	Equipment	Brand	Model	S/N	FCC ID	Signal cable / Length (m)
1	USB Flash	Kingston	DTSE9G2	TXVV6	---	---

1.3 Test Setup Chart

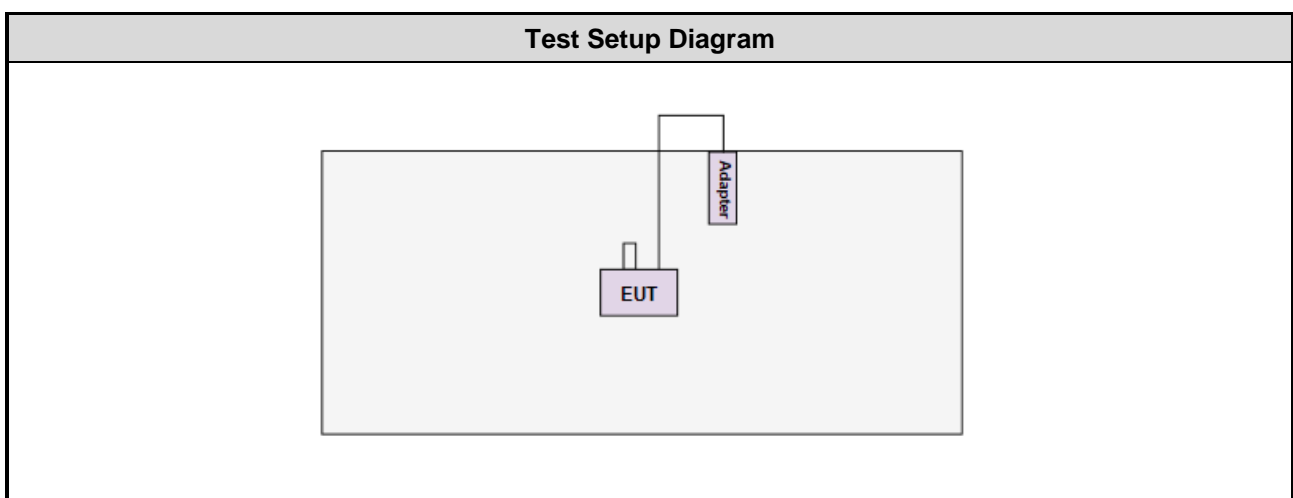

1.4 The Equipment List

Test Item	Conducted Emission				
Test Site	Conduction room 1 / (CO01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Receiver	R&S	ESR3	101657	Dec. 21, 2016	Dec. 20, 2017
LISN	SCHWARZBECK	Schwarzbeck 8127	8127-667	Nov. 08, 2016	Nov. 07, 2017
RF Cable-CON	EMC	EMCCFD300-BM-BM-6000	50821	Dec. 20, 2016	Dec. 19, 2017
Measurement Software	AUDIX	e3	6.120210k	NA	NA

Note: Calibration Interval of instruments listed above is one year.

Test Item	Radiated Emission				
Test Site	966 chamber1 / (03CH01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101498	Nov. 25, 2016	Nov. 24, 2017
Receiver	R&S	ESR3	101658	Nov. 24, 2016	Nov. 23, 2017
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Aug. 04, 2016	Aug. 03, 2017
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Dec. 21, 2016	Dec. 20, 2017
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Oct. 25, 2016	Oct. 24, 2017
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 10, 2016	Nov. 09, 2017
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Dec. 09, 2016	Dec. 08, 2017
Preamplifier	EMC	EMC02325	980225	Aug. 05, 2016	Aug. 04, 2017
Preamplifier	Agilent	83017A	MY39501308	Oct. 06, 2016	Oct. 05, 2017
Preamplifier	EMC	EMC184045B	980192	Aug. 24, 2016	Aug. 23, 2017
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16014/4	Dec. 09, 2016	Dec. 08, 2017
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16019/4	Dec. 09, 2016	Dec. 08, 2017
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16139/4	Dec. 09, 2016	Dec. 08, 2017
LF cable 1M	EMC	EMCCFD400-NM-N M-1000	16052	Dec. 09, 2016	Dec. 08, 2017
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-001	Dec. 09, 2016	Dec. 08, 2017
LF cable 10M	Woken	CFD400NL-LW	CFD400NL-002	Dec. 09, 2016	Dec. 08, 2017
Measurement Software	AUDIX	e3	6.120210g	NA	NA

Note: Calibration Interval of instruments listed above is one year.

Test Item	RF Conducted				
Test Site	(TH01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101063	Mar. 15, 2017	Mar. 14, 2018
Power Meter	Anritsu	ML2495A	1241002	Oct. 06, 2016	Oct. 05, 2017
Power Sensor	Anritsu	MA2411B	1207366	Oct. 06, 2016	Oct. 05, 2017
AC POWER SOURCE	APC	AFC-500W	F312060012	Oct. 28, 2016	Oct. 27, 2017
Measurement Software	Sporton	Sporton_1	1.3.30	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

1.5 Test Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.247

ANSI C63.10-2013

FCC KDB 558074 D01 DTS Meas Guidance v04

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	±34.134 Hz
Conducted power	±0.808 dB
Power density	±0.463 dB
Conducted emission	±2.670 dB
AC conducted emission	±2.90 dB
Radiated emission ≤ 1GHz	±3.66 dB
Radiated emission > 1GHz	±5.63 dB

2 Test Configuration

2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
AC Conduction	CO01-WS	20°C / 57%	Alex Tsai
Radiated Emissions	03CH01-WS	22-24°C / 62-64%	Vincent Yen Kevin Lee
RF Conducted	TH01-WS	22°C / 64%	Brad Wu

- FCC Designation No.: TW2732
- FCC site registration No.: 181692
- IC site registration No.: 10807A-1

2.2 The Worst Test Modes and Channel Details

Test item	Modulation Mode	Test Frequency (MHz)	Data Rate	Test Configuration
Conducted Emissions	11g	2437	6 Mbps	---
Radiated Emissions ≤1GHz	11g	2437	6 Mbps	---
Radiated Emissions >1GHz	11b	2412 / 2437 / 2462	1 Mbps	---
Maximum Output Power	11g	2412 / 2437 / 2462	6 Mbps	
6dB bandwidth	HT20	2412 / 2437 / 2462	MCS 0	
Power spectral density	HT40	2422 / 2437 / 2452	MCS 0	

3 Transmitter Test Results

3.1 Conducted Emissions

3.1.1 Limit of Conducted Emissions


Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.

3.1.2 Test Procedures


1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V / 60Hz.

3.1.3 Test Setup

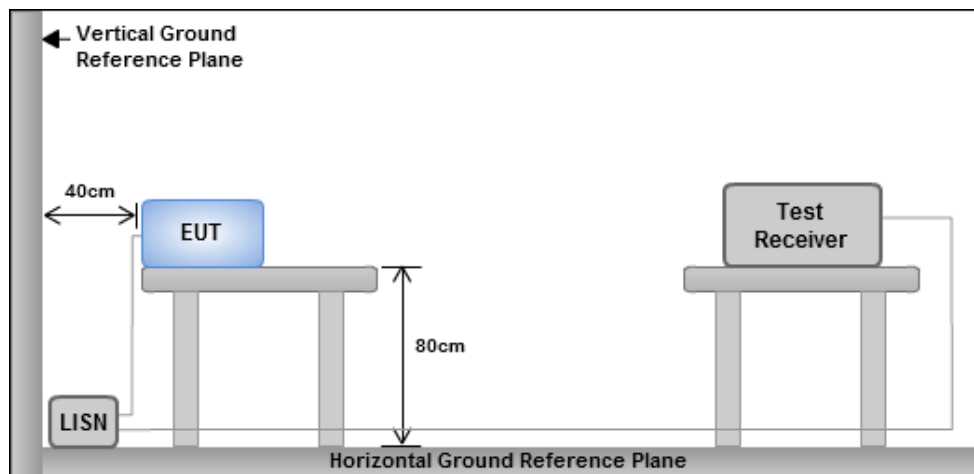


- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.1.4 Test Result of Conducted Emissions

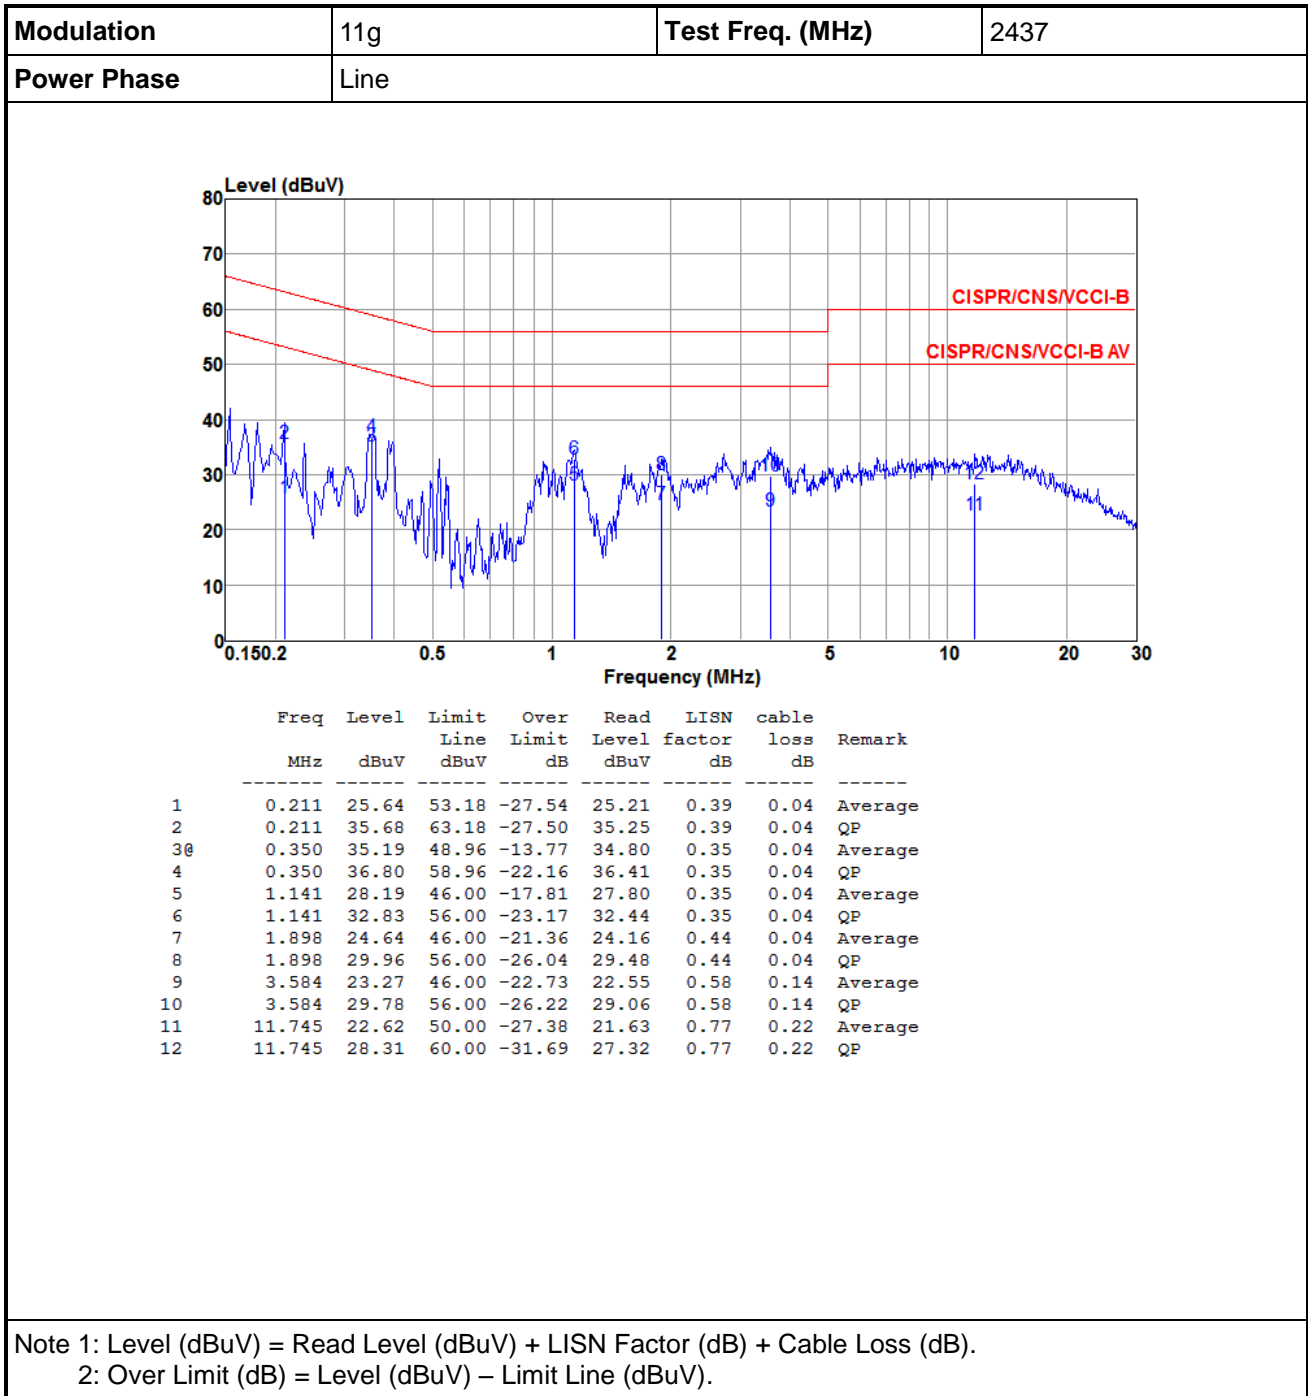

Modulation	11g	Test Freq. (MHz)	2437
Power Phase	Neutral		

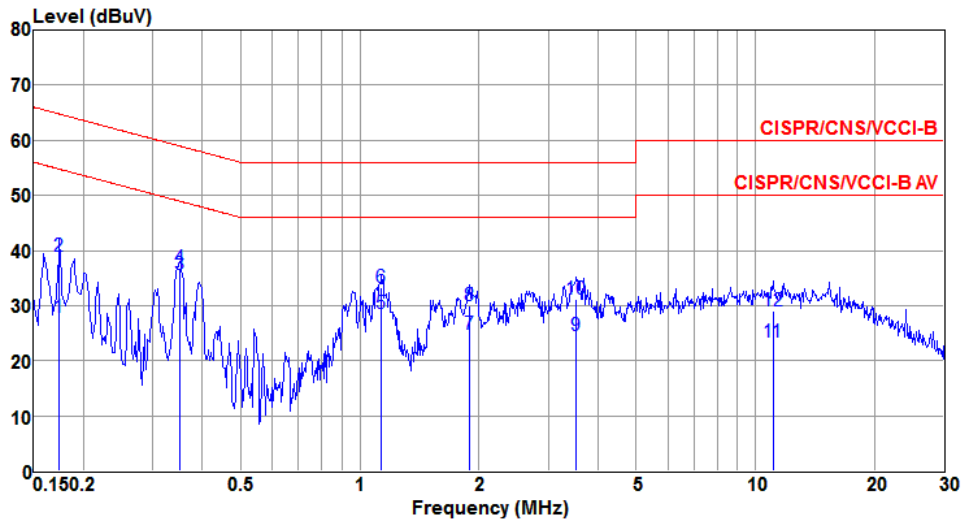

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.174	27.88	54.77	-26.89	27.50	0.34	0.04	Average
2	0.174	38.96	64.77	-25.81	38.58	0.34	0.04	QP
3	0.350	35.61	48.96	-13.35	35.20	0.37	0.04	Average
4	0.350	36.91	58.96	-22.05	36.50	0.37	0.04	QP
5	1.135	28.60	46.00	-17.40	28.18	0.38	0.04	Average
6	1.135	33.20	56.00	-22.80	32.78	0.38	0.04	QP
7	1.888	24.68	46.00	-21.32	24.18	0.46	0.04	Average
8	1.888	30.07	56.00	-25.93	29.57	0.46	0.04	QP
9	3.528	24.66	46.00	-21.34	23.98	0.54	0.14	Average
10	3.528	31.09	56.00	-24.91	30.41	0.54	0.14	QP
11	11.080	23.44	50.00	-26.56	22.65	0.57	0.22	Average
12	11.080	28.94	60.00	-31.06	28.15	0.57	0.22	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).
 Note 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

3.2 6dB and Occupied Bandwidth

3.2.1 Limit of 6dB Bandwidth

The minimum 6dB bandwidth shall be at least 500 kHz.

3.2.2 Test Procedures


6dB Bandwidth

1. Set resolution bandwidth (RBW) = 100 kHz, Video bandwidth = 300 kHz.
2. Detector = Peak, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

Occupied Bandwidth


1. Set resolution bandwidth (RBW) = 1 MHz, Video bandwidth = 3 MHz.
2. Detector = Sample, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Use the OBW measurement function of spectrum analyzer to measure the occupied bandwidth.

3.2.3 Test Setup

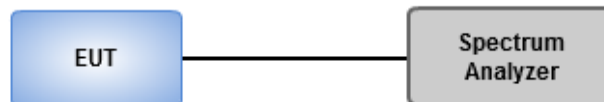


3.2.4 Test Result of 6dB and Occupied Bandwidth

Modulation Mode	N _{TX}	Freq. (MHz)	6dB Bandwidth (MHz)				Limit (kHz)
			Chain 0	Chain 1	Chain 2	Chain 3	
11b	2	2412	9.04	9.04	---	---	500
11b	2	2437	8.99	8.58	---	---	500
11b	2	2462	9.04	9.04	---	---	500
11g	2	2412	15.13	15.13	---	---	500
11g	2	2437	15.01	15.13	---	---	500
11g	2	2462	15.07	15.01	---	---	500
HT20	2	2412	13.86	15.71	---	---	500
HT20	2	2437	15.07	16.29	---	---	500
HT20	2	2462	15.13	15.65	---	---	500
HT40	2	2422	35.13	35.13	---	---	500
HT40	2	2437	35.13	35.13	---	---	500
HT40	2	2452	35.13	35.13	---	---	500

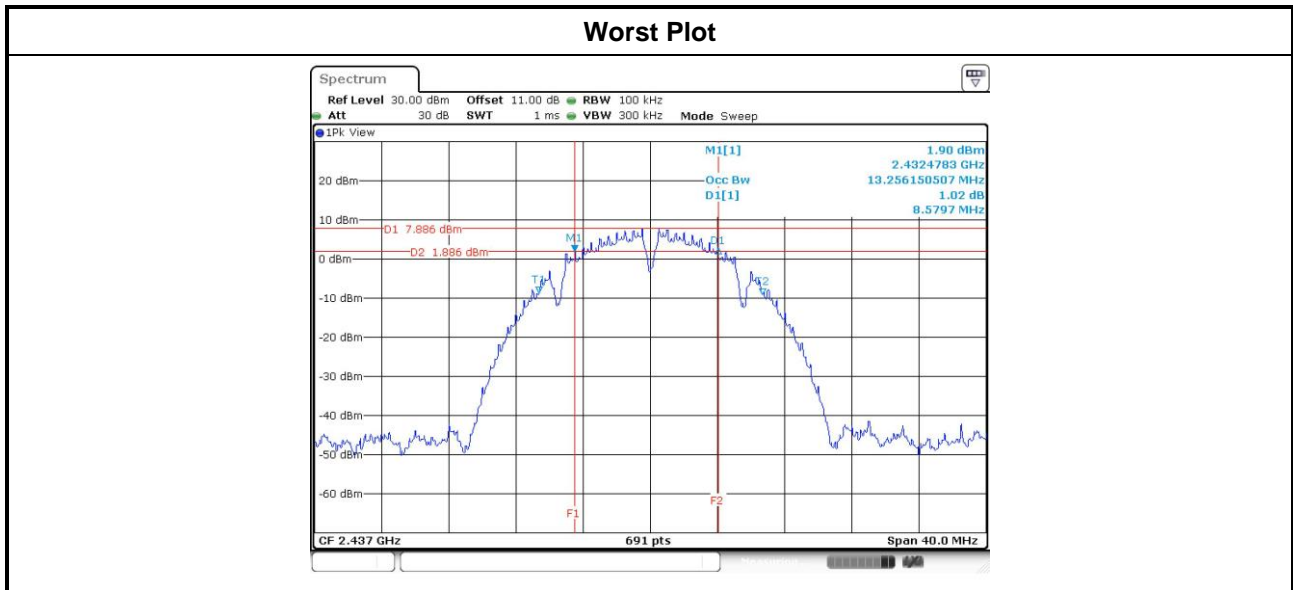

Modulation Mode	N _{TX}	Freq. (MHz)	99% Occupied Bandwidth (MHz)			
			Chain 0	Chain 1	Chain 2	Chain 3
11b	2	2412	13.40	13.25	---	---
11b	2	2437	13.37	13.24	---	---
11b	2	2462	13.33	13.23	---	---
11g	2	2412	16.85	16.49	---	---
11g	2	2437	17.32	16.91	---	---
11g	2	2462	16.93	16.67	---	---
HT20	2	2412	17.72	17.63	---	---
HT20	2	2437	18.28	18.15	---	---
HT20	2	2462	17.79	17.73	---	---
HT40	2	2422	36.00	35.95	---	---
HT40	2	2437	36.27	36.13	---	---
HT40	2	2452	36.05	36.00	---	---

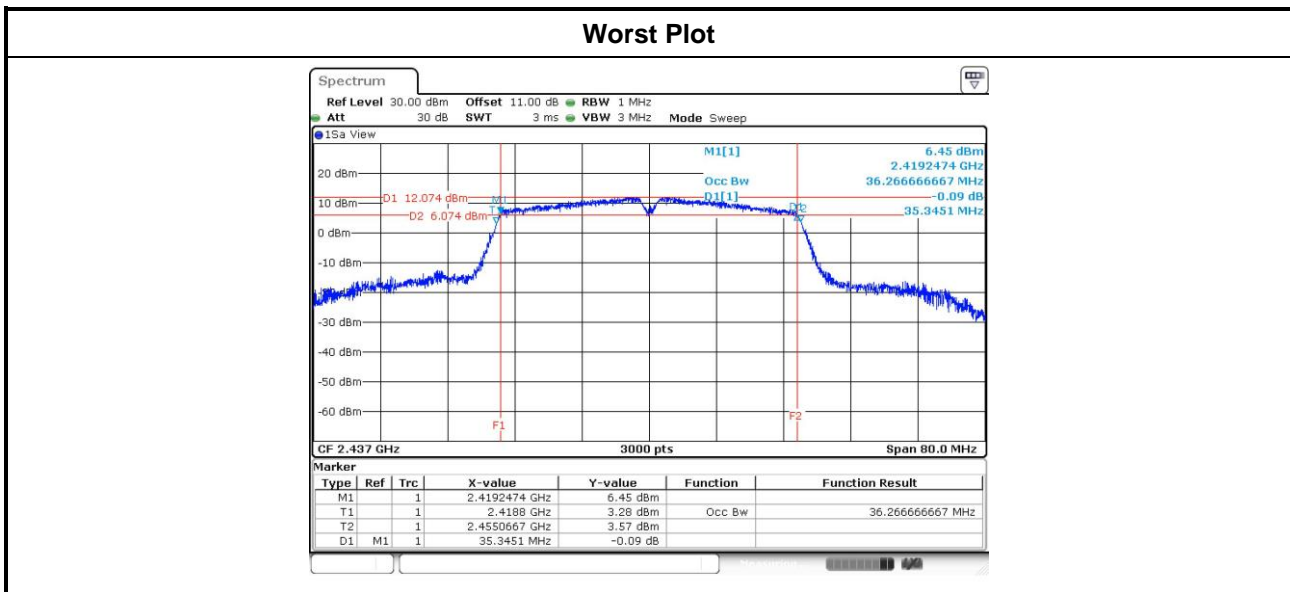

3.3 RF Output Power

3.3.1 Limit of RF Output Power

Conducted power shall not exceed 1Watt.


- Antenna gain \leq 6dBi, no any corresponding reduction is in output power limit.
- Antenna gain $>$ 6dBi
 - Non Fixed, point to point operations.
The conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dB
 - Fixed, point to point operations
Systems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point Operations, maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 5725–5850 MHz band that are used exclusively for fixed, point-to-point operations ,no any corresponding reduction is in transmitter peak output power

3.3.2 Test Procedures

- Maximum Peak Conducted Output Power
 - Spectrum analyzer**
 1. Set RBW = 1MHz, VBW = 3MHz, Detector = Peak.
 2. Sweep time = auto, Trace mode = max hold, Allow trace to fully stabilize.
 3. Use the spectrum analyzer channel power measurement function with the band limits set equal to the DTS bandwidth edges.
 - Power meter**
 1. A broadband Peak RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.
- Maximum Conducted Output Power (For reference only)
 - Power meter**
 1. A broadband Average RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.

3.3.3 Test Setup



3.3.4 Test Result of Maximum Output Power

Modulation Mode	N _{TX}	Freq. (MHz)	Peak conducted Output Power (dBm)							Ant. Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)
			Chain 0	Chain 1	Chain 2	Chain 3	Total Power (mW)	Total Power (dBm)	Limit (dBm)			
11b	2	2412	18.38	17.79	---	---	128.983	21.11	30.00	3.61	24.72	36.00
11b	2	2437	18.77	18.3	---	---	142.944	21.55	30.00	3.61	25.16	36.00
11b	2	2462	18.87	18.1	---	---	141.656	21.51	30.00	3.61	25.12	36.00
11g	2	2412	23.99	23.05	---	---	452.448	26.56	30.00	3.61	30.17	36.00
11g	2	2437	24.82	24.5	---	---	585.227	27.67	30.00	3.61	31.28	36.00
11g	2	2462	24.27	23.87	---	---	511.082	27.08	30.00	3.61	30.69	36.00
HT20	2	2412	23.51	22.64	---	---	408.042	26.11	30.00	3.61	29.72	36.00
HT20	2	2437	24.87	24.42	---	---	583.596	27.66	30.00	3.61	31.27	36.00
HT20	2	2462	24.47	23.51	---	---	504.286	27.03	30.00	3.61	30.64	36.00
HT40	2	2422	20.89	20.59	---	---	237.295	23.75	30.00	3.61	27.36	36.00
HT40	2	2437	23.91	23.55	---	---	472.501	26.74	30.00	3.61	30.35	36.00
HT40	2	2452	22.67	21.84	---	---	337.683	25.29	30.00	3.61	28.90	36.00

Modulation Mode	N _{TX}	Freq. (MHz)	Conducted (Average) Output Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)
			Chain 0	Chain 1	Chain 2	Chain 3			
11b	2	2412	16.16	15.52	---	---	76.950	18.86	---
11b	2	2437	16.52	16.07	---	---	85.332	19.31	---
11b	2	2462	16.6	15.87	---	---	84.346	19.26	---
11g	2	2412	16.96	16.41	---	---	93.411	19.70	---
11g	2	2437	19.46	18.91	---	---	166.112	22.20	---
11g	2	2462	18.33	17.59	---	---	125.489	20.99	---
HT20	2	2412	16.48	15.79	---	---	82.395	19.16	---
HT20	2	2437	19.62	18.92	---	---	169.605	22.29	---
HT20	2	2462	17.72	16.85	---	---	107.573	20.32	---
HT40	2	2422	12.62	12.36	---	---	35.500	15.50	---
HT40	2	2437	17.29	16.82	---	---	101.664	20.07	---
HT40	2	2452	15.16	14.36	---	---	60.099	17.79	---

Note: Conducted average output power is for reference only.

3.4 Power Spectral Density


3.4.1 Limit of Power Spectral Density

Power spectral density shall not be greater than 8 dBm in any 3 kHz band.

3.4.2 Test Procedures

- Maximum peak conducted output power was used to demonstrate compliance to the fundamental output power limit.
 1. Set the RBW = 3kHz, VBW = 10kHz.
 2. Detector = Peak, Sweep time = auto couple.
 3. Trace mode = max hold, allow trace to fully stabilize.
 4. Use the peak marker function to determine the maximum amplitude level.
- Maximum (average) conducted output power was used to demonstrate compliance to the fundamental output power limit.
 1. Set the RBW = 100kHz, VBW = 300 kHz.
 2. Detector = RMS, Sweep time = auto couple.
 3. Set the sweep time to: $\geq 10 \times (\text{number of measurement points in sweep}) \times (\text{maximum data rate per stream})$.
 4. Perform the measurement over a single sweep.
 5. Use the peak marker function to determine the maximum amplitude level.

3.4.3 Test Setup

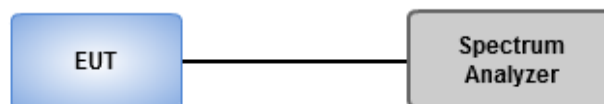


3.4.4 Test Result of Power Spectral Density

Modulation Mode	N _{TX}	Freq. (MHz)	Total Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)
11b	2	2412	5.16	7.38
11b	2	2437	4.34	7.38
11b	2	2462	4.49	7.38
11g	2	2412	-6.73	7.38
11g	2	2437	-4.14	7.38
11g	2	2462	-5.55	7.38
HT20	2	2412	-7.24	7.38
HT20	2	2437	-3.59	7.38
HT20	2	2462	-5.67	7.38
HT40	2	2422	-12.79	7.38
HT40	2	2437	-8.43	7.38
HT40	2	2452	-10.28	7.38

Note:

1. Test result is bin-by-bin summing measured value of each TX port.
2. Directional gain = $3.61 + 10 \cdot \log(2/1) = 6.62 \text{ dBi} > 6 \text{ dBi}$.
Limit shall be reduced to $8 \text{ dBm} - (6.62 \text{ dBi} - 6 \text{ dBi}) = 7.38 \text{ dBm}$.

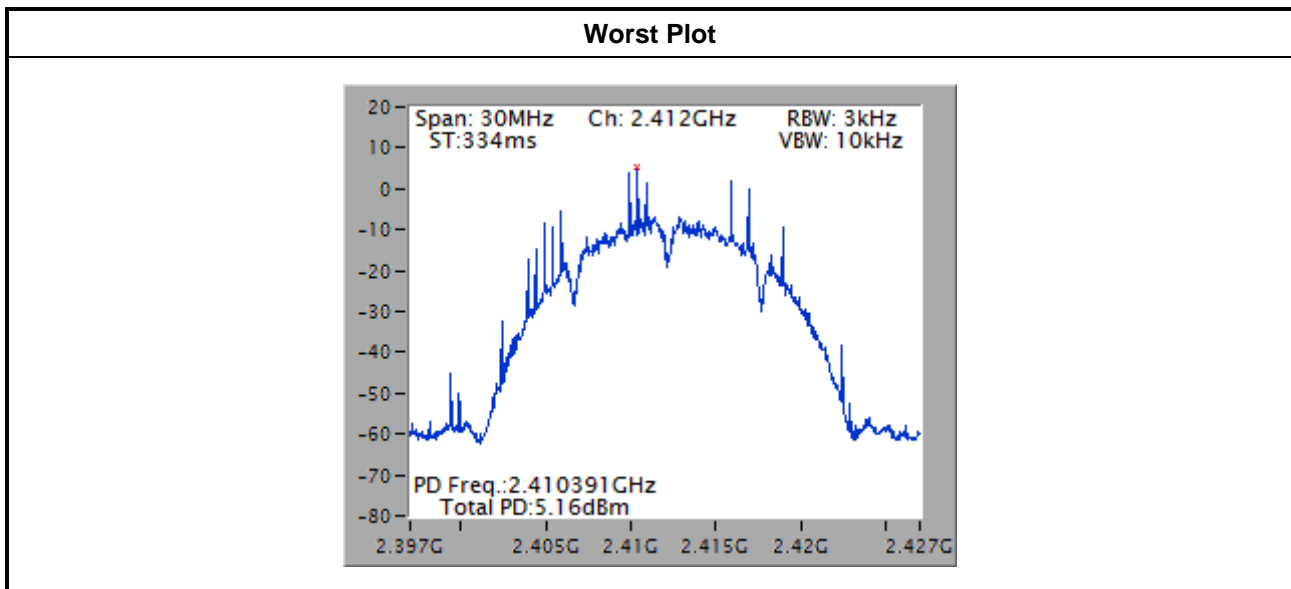

3.5 Unwanted Emissions into Restricted Frequency Bands

3.5.1 Limit of Unwanted Emissions into Restricted Frequency Bands

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1:
Quasi-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

Note 2:
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

3.5.2 Test Procedures


1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:


1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

3.5.3 Test Setup

Radiated Emissions below 1 GHz

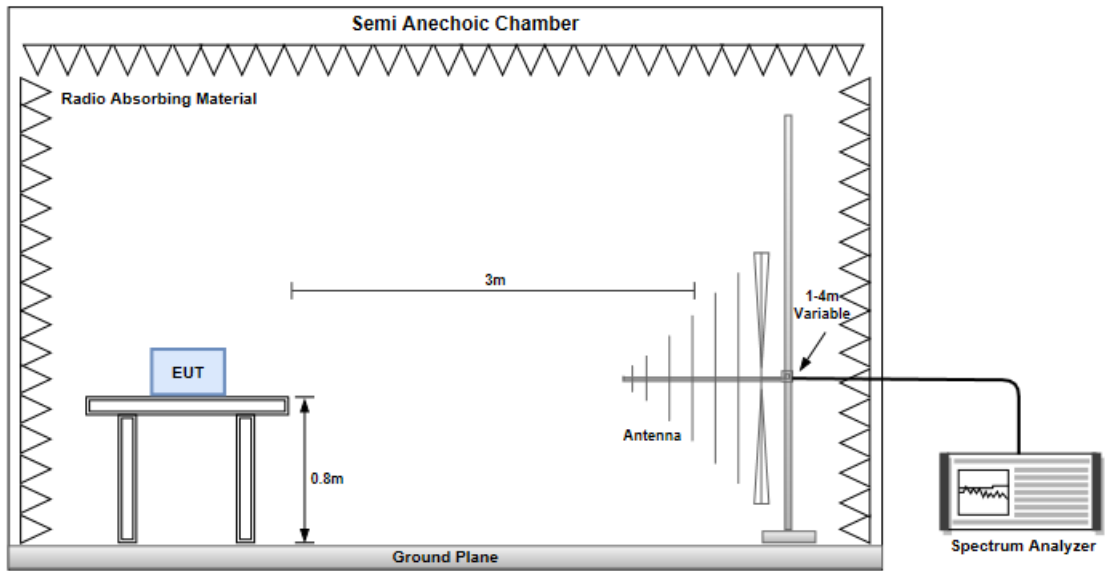


Radiated Emissions above 1 GHz

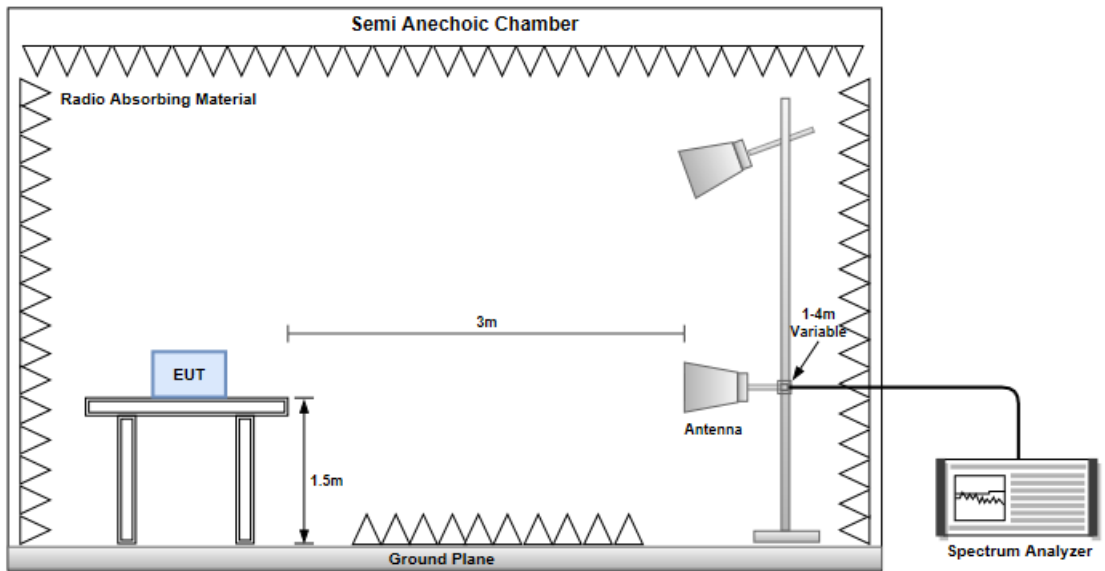

3.5.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

Modulation	11g	Test Freq. (MHz)	2437
Polarization	Horizontal		

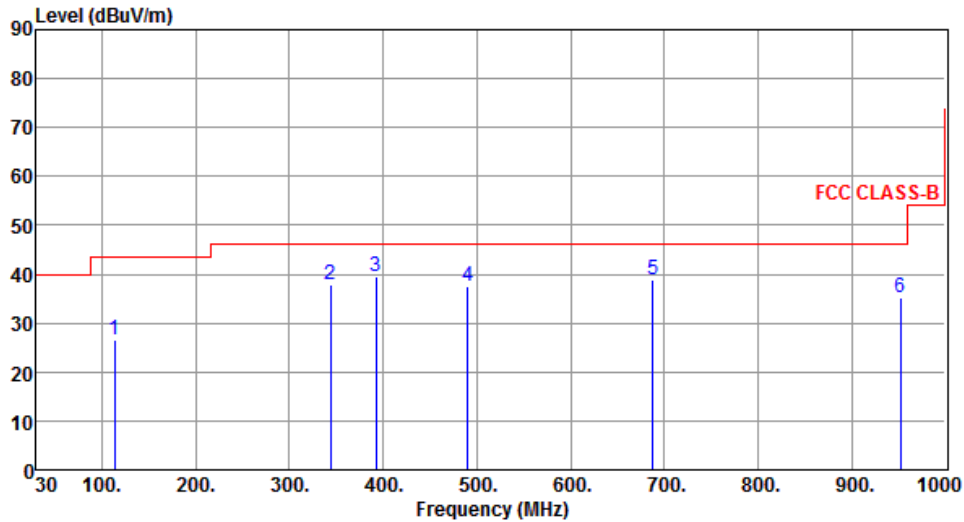

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	113.63	26.65	43.50	-16.85	37.44	-10.79	Peak	---	---
2	343.75	37.82	46.00	-8.18	44.22	-6.40	Peak	---	---
3	392.26	39.42	46.00	-6.58	44.61	-5.19	Peak	---	---
4	490.16	37.64	46.00	-8.36	40.64	-3.00	Peak	---	---
5	687.42	38.81	46.00	-7.19	38.23	0.58	Peak	---	---
6	952.33	35.15	46.00	-10.85	30.25	4.90	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Modulation	11g	Test Freq. (MHz)	2437
Polarization	Vertical		

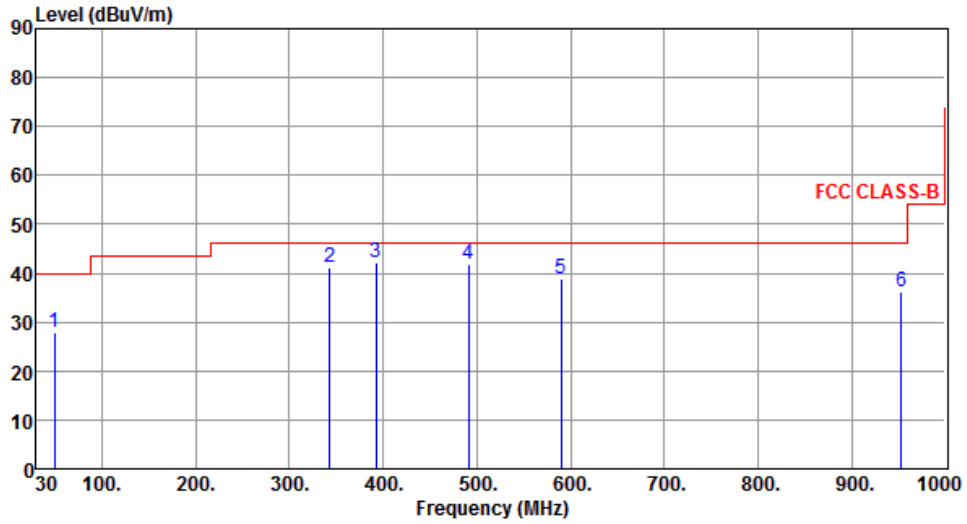

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	49.40	28.06	40.00	-11.94	35.69	-7.63	Peak	---	---
2	343.31	41.06	46.00	-4.94	47.47	-6.41	Peak	---	---
3	392.66	42.08	46.00	-3.92	47.25	-5.17	Peak	125	199
4	490.75	41.69	46.00	-4.31	44.68	-2.99	Peak	---	---
5	589.69	38.87	46.00	-7.13	39.77	-0.90	Peak	---	---
6	952.47	36.19	46.00	-9.81	31.29	4.90	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

3.5.5 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11b

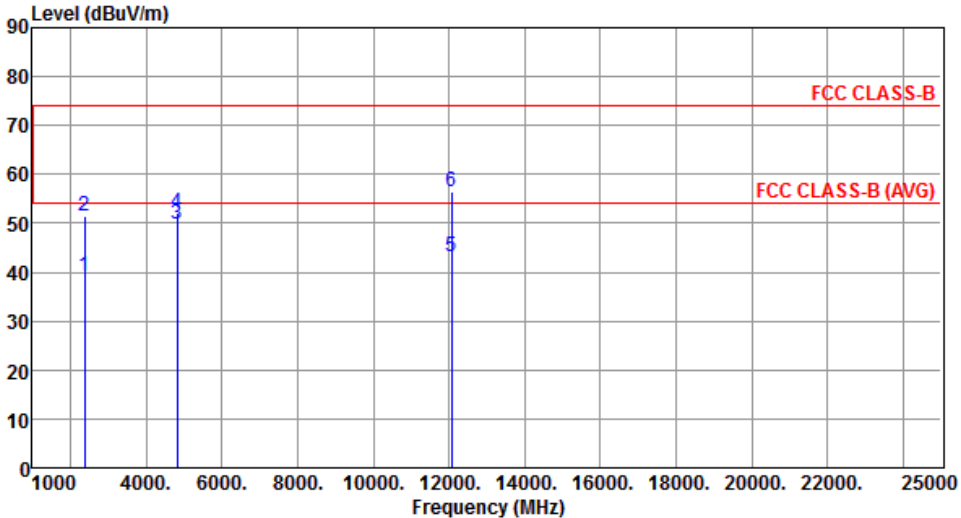Modulation	11b	Test Freq. (MHz)	2412						
Polarization	Horizontal								
									
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2390.00	39.18	54.00	-14.82	42.36	-3.18	Average	102	74
2	2390.00	51.58	74.00	-22.42	54.76	-3.18	Peak	102	74
3	4824.00	49.68	54.00	-4.32	45.90	3.78	Average	128	204
4	4824.00	52.29	74.00	-21.71	48.51	3.78	Peak	128	204
5	12060.00	43.19	54.00	-10.81	29.61	13.58	Average	100	136
6	12060.00	56.52	74.00	-17.48	42.94	13.58	Peak	100	136
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>									

Modulation	11b	Test Freq. (MHz)	2412
Polarization	Vertical		

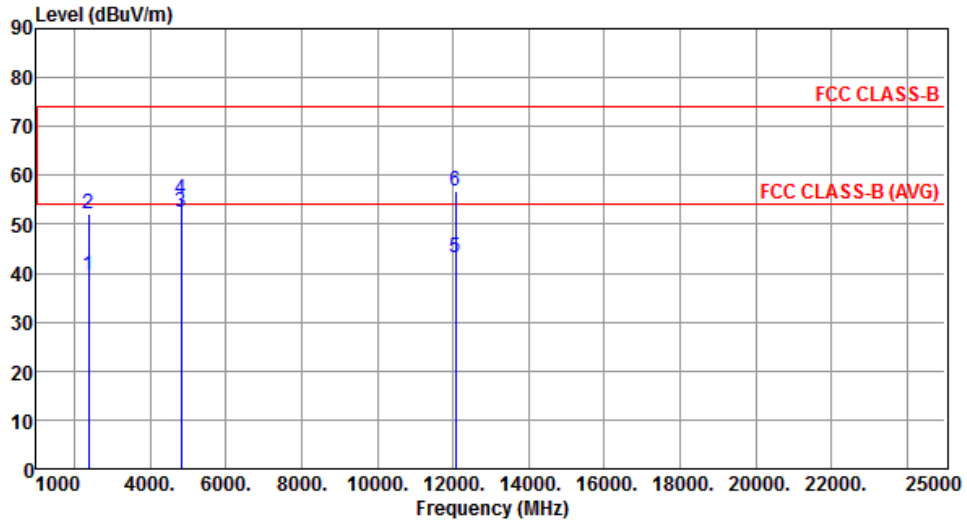


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	39.60	54.00	-14.40	42.78	-3.18	Average	254	167
2	2390.00	51.98	74.00	-22.02	55.16	-3.18	Peak	254	167
3	4824.00	52.49	54.00	-1.51	48.71	3.78	Average	191	1
4	4824.00	55.06	74.00	-18.94	51.28	3.78	Peak	191	1
5	12060.00	43.30	54.00	-10.70	29.72	13.58	Average	175	330
6	12060.00	56.70	74.00	-17.30	43.12	13.58	Peak	175	330

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11b	Test Freq. (MHz)	2437
Polarization	Horizontal		

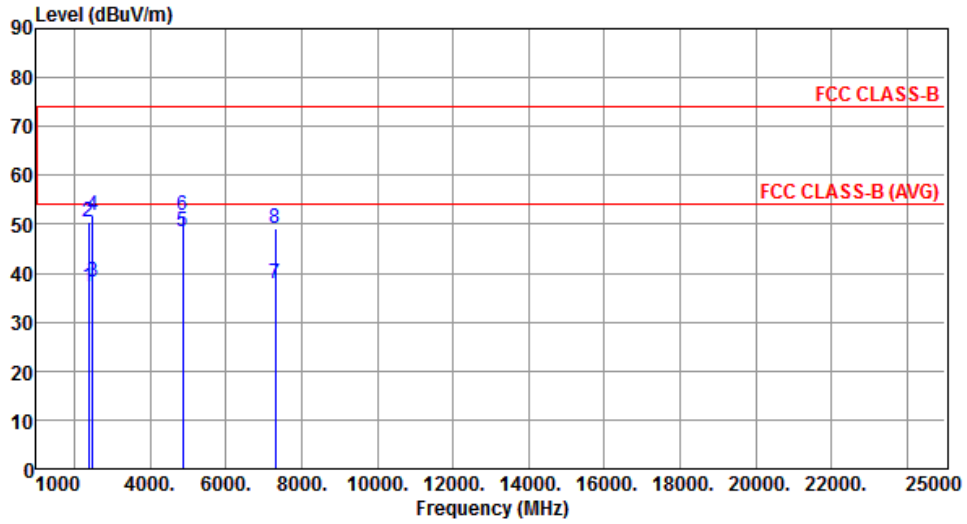


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	37.11	54.00	-16.89	40.29	-3.18	Average	106	62
2	2390.00	50.32	74.00	-23.68	53.50	-3.18	Peak	106	62
3	2483.50	38.23	54.00	-15.77	41.03	-2.80	Average	106	62
4	2483.50	51.71	74.00	-22.29	54.51	-2.80	Peak	106	62
5	4874.00	48.58	54.00	-5.42	44.64	3.94	Average	131	216
6	4874.00	51.92	74.00	-22.08	47.98	3.94	Peak	131	216
7	7311.00	37.90	54.00	-16.10	29.49	8.41	Average	151	229
8	7311.00	49.22	74.00	-24.78	40.81	8.41	Peak	151	229

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11b	Test Freq. (MHz)	2437
Polarization	Vertical		

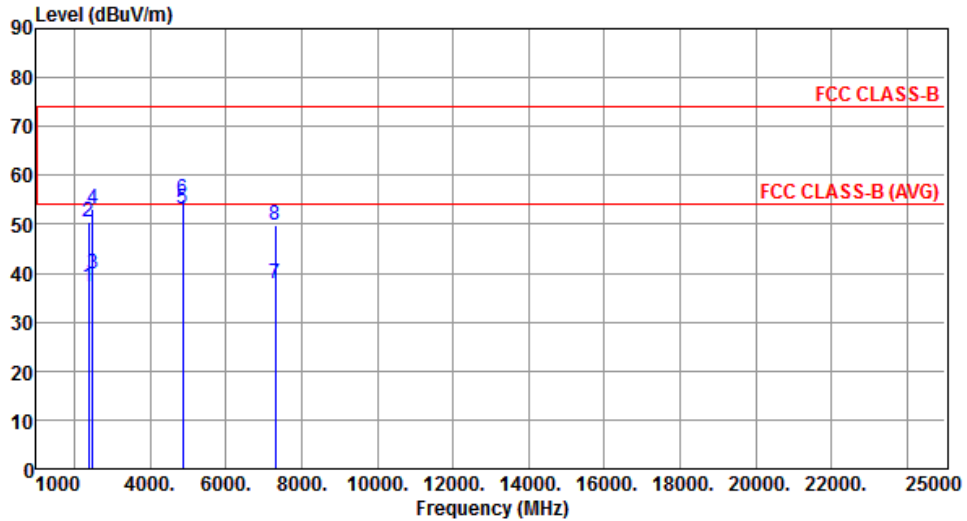


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	37.10	54.00	-16.90	40.28	-3.18	Average	277	188
2	2390.00	50.58	74.00	-23.42	53.76	-3.18	Peak	277	188
3	2483.50	39.76	54.00	-14.24	42.56	-2.80	Average	277	188
4	2483.50	53.22	74.00	-20.78	56.02	-2.80	Peak	277	193
5	4874.00	52.99	54.00	-1.01	49.05	3.94	Average	184	8
6	4874.00	55.11	74.00	-18.89	51.17	3.94	Peak	184	8
7	7311.00	37.75	54.00	-16.25	29.34	8.41	Average	342	188
8	7311.00	49.68	74.00	-24.32	41.27	8.41	Peak	342	188

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11b	Test Freq. (MHz)	2462
Polarization	Horizontal		

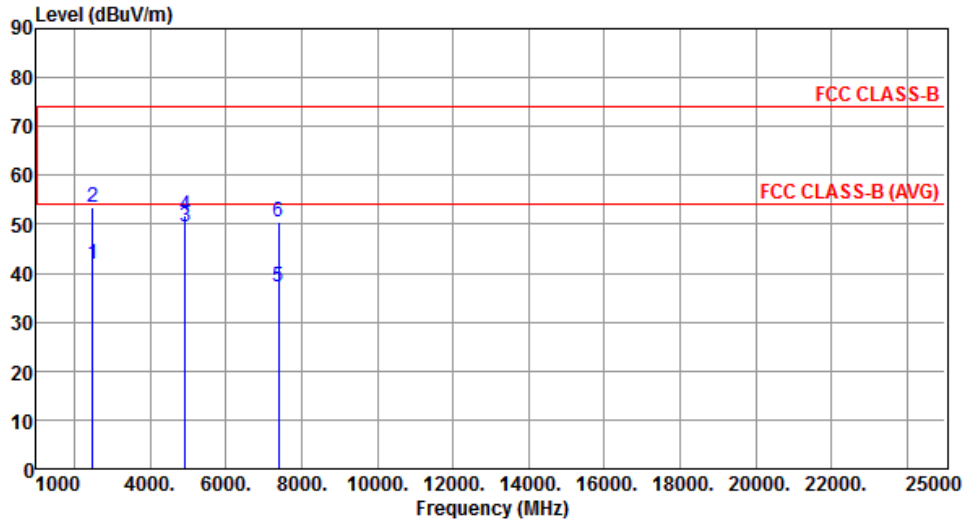


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	41.86	54.00	-12.14	44.66	-2.80	Average	105	68
2	2483.50	53.46	74.00	-20.54	56.26	-2.80	Peak	105	68
3	4924.00	49.38	54.00	-4.62	45.28	4.10	Average	138	221
4	4924.00	51.73	74.00	-22.27	47.63	4.10	Peak	138	221
5	7386.00	37.06	54.00	-16.94	28.62	8.44	Average	146	237
6	7386.00	50.46	74.00	-23.54	42.02	8.44	Peak	146	237

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11b	Test Freq. (MHz)	2462
Polarization	Vertical		

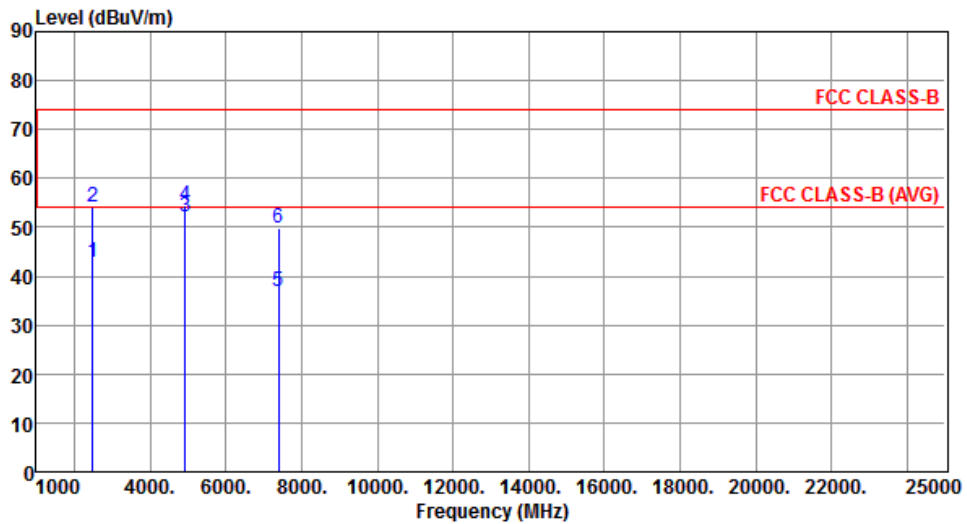

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	42.75	54.00	-11.25	45.55	-2.80	Average	270	190
2	2483.50	54.17	74.00	-19.83	56.97	-2.80	Peak	270	190
3	4924.00	52.24	54.00	-1.76	48.14	4.10	Average	199	11
4	4924.00	54.59	74.00	-19.41	50.49	4.10	Peak	199	11
5	7386.00	36.88	54.00	-17.12	28.44	8.44	Average	331	173
6	7386.00	49.77	74.00	-24.23	41.33	8.44	Peak	331	173

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

3.5.6 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11g

Modulation	11g	Test Freq. (MHz)	2412						
Polarization	Horizontal								
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	52.34	54.00	-1.66	55.52	-3.18	Average	103	57
2	2390.00	68.92	74.00	-5.08	72.10	-3.18	Peak	103	57
3	4824.00	39.04	54.00	-14.96	35.26	3.78	Average	110	209
4	4824.00	51.71	74.00	-22.29	47.93	3.78	Peak	110	209
5	12060.00	43.45	54.00	-10.55	29.87	13.58	Average	100	196
6	12060.00	55.68	74.00	-18.32	42.10	13.58	Peak	100	196

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	11g	Test Freq. (MHz)	2412
Polarization	Vertical		

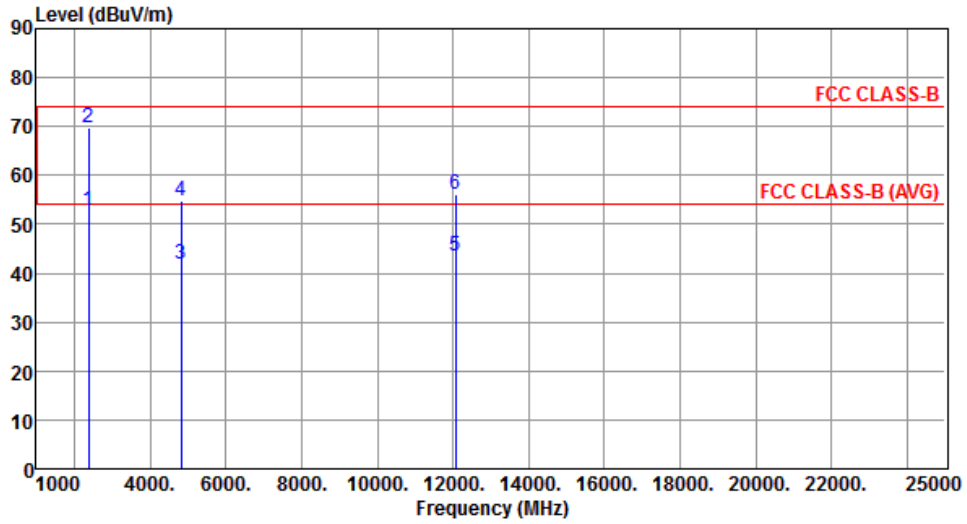


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	52.67	54.00	-1.33	55.85	-3.18	Average	293	218
2	2390.00	69.80	74.00	-4.20	72.98	-3.18	Peak	293	218
3	4824.00	41.93	54.00	-12.07	38.15	3.78	Average	105	183
4	4824.00	54.69	74.00	-19.31	50.91	3.78	Peak	105	183
5	12060.00	43.62	54.00	-10.38	30.04	13.58	Average	139	283
6	12060.00	56.09	74.00	-17.91	42.51	13.58	Peak	139	283

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11g	Test Freq. (MHz)	2437
Polarization	Horizontal		

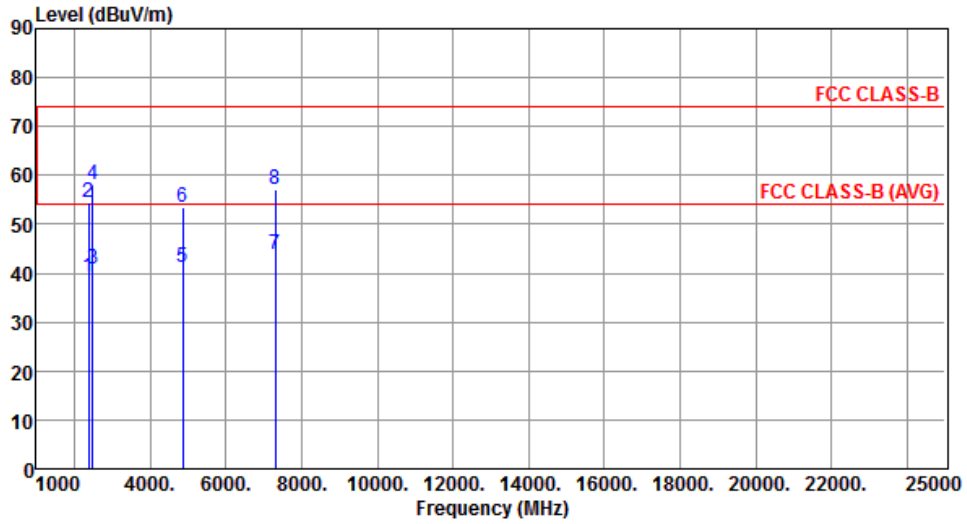


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	39.17	54.00	-14.83	42.35	-3.18	Average	101	56
2	2390.00	54.42	74.00	-19.58	57.60	-3.18	Peak	101	56
3	2483.50	40.84	54.00	-13.16	43.64	-2.80	Average	101	56
4	2483.50	58.16	74.00	-15.84	60.96	-2.80	Peak	101	56
5	4874.00	41.10	54.00	-12.90	37.16	3.94	Average	106	222
6	4874.00	53.52	74.00	-20.48	49.58	3.94	Peak	106	222
7	7311.00	43.82	54.00	-10.18	35.41	8.41	Average	130	301
8	7311.00	57.02	74.00	-16.98	48.61	8.41	Peak	130	301

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11g	Test Freq. (MHz)	2437
Polarization	Vertical		

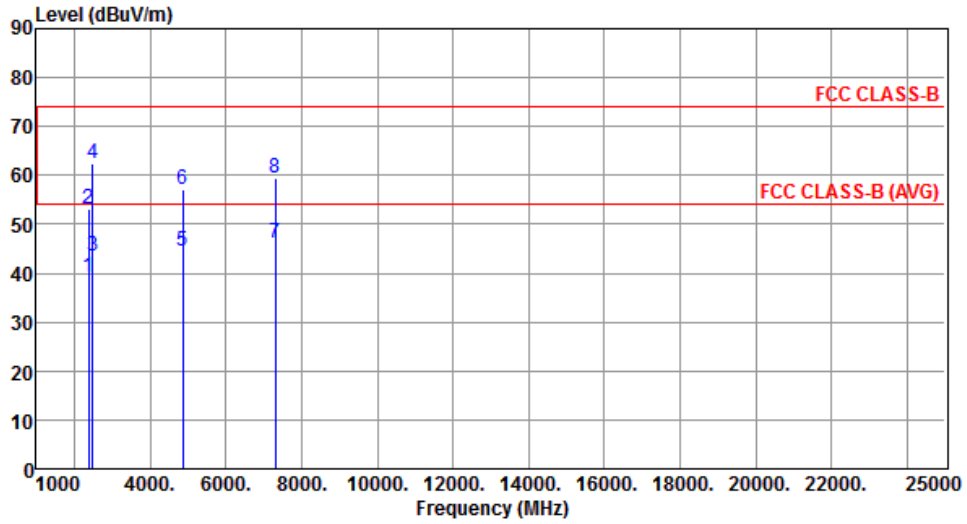


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	39.06	54.00	-14.94	42.24	-3.18	Average	215	353
2	2390.00	53.16	74.00	-20.84	56.34	-3.18	Peak	215	353
3	2483.50	43.61	54.00	-10.39	46.41	-2.80	Average	215	353
4	2483.50	62.34	74.00	-11.66	65.14	-2.80	Peak	215	353
5	4874.00	44.46	54.00	-9.54	40.52	3.94	Average	110	182
6	4874.00	57.00	74.00	-17.00	53.06	3.94	Peak	110	182
7	7311.00	46.04	54.00	-7.96	37.63	8.41	Average	142	171
8	7311.00	59.55	74.00	-14.45	51.14	8.41	Peak	142	171

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11g	Test Freq. (MHz)	2462
Polarization	Horizontal		

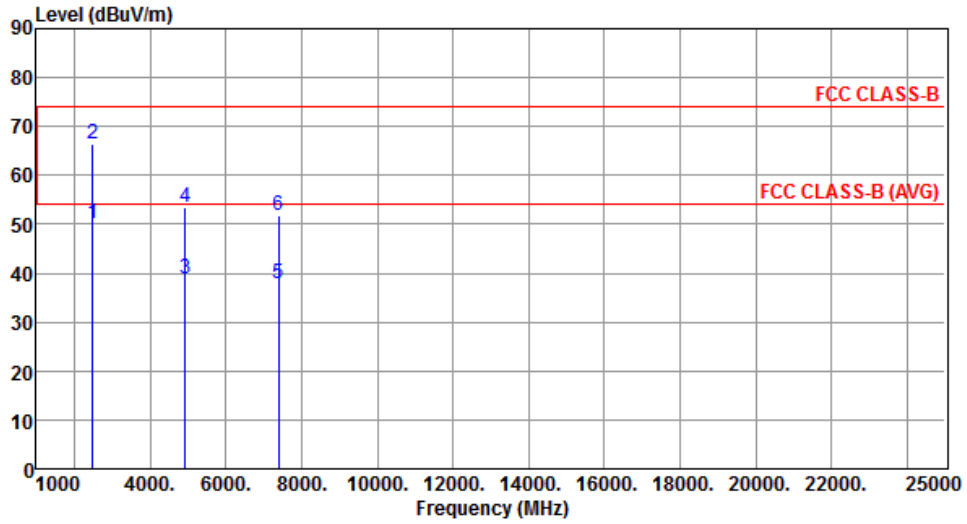


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	50.19	54.00	-3.81	52.99	-2.80	Average	105	63
2	2483.50	66.53	74.00	-7.47	69.33	-2.80	Peak	105	63
3	4924.00	38.76	54.00	-15.24	34.66	4.10	Average	104	215
4	4924.00	53.59	74.00	-20.41	49.49	4.10	Peak	104	215
5	7386.00	37.82	54.00	-16.18	29.38	8.44	Average	126	288
6	7386.00	51.70	74.00	-22.30	43.26	8.44	Peak	126	288

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11g	Test Freq. (MHz)	2462
Polarization	Vertical		

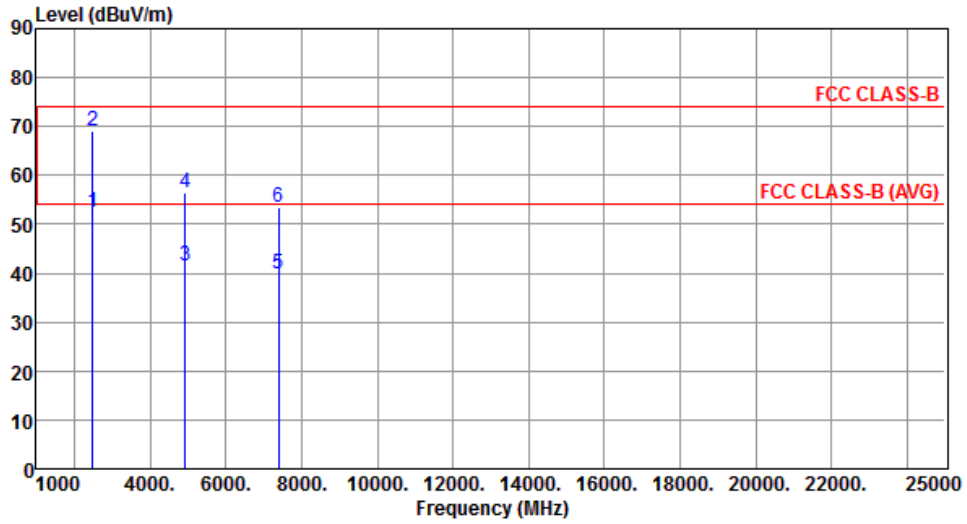


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	52.47	54.00	-1.53	55.27	-2.80	Average	178	346
2	2483.50	69.10	74.00	-4.90	71.90	-2.80	Peak	178	346
3	4924.00	41.56	54.00	-12.44	37.46	4.10	Average	100	179
4	4924.00	56.37	74.00	-17.63	52.27	4.10	Peak	100	179
5	7386.00	39.76	54.00	-14.24	31.32	8.44	Average	128	173
6	7386.00	53.54	74.00	-20.46	45.10	8.44	Peak	128	173

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

3.5.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT20

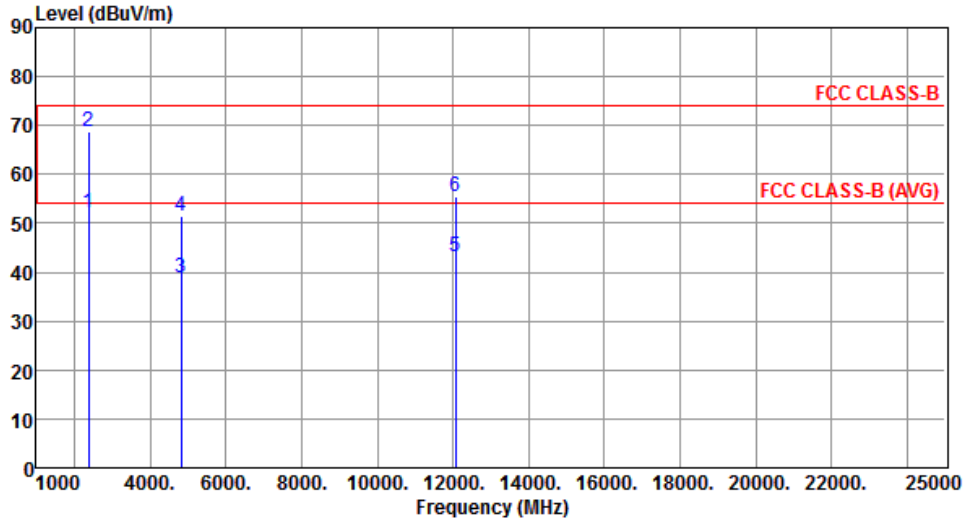Modulation	HT20	Test Freq. (MHz)	2412						
Polarization	Horizontal								
									
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2390.00	52.24	54.00	-1.76	55.42	-3.18	Average	62	0
2	2390.00	68.71	74.00	-5.29	71.89	-3.18	Peak	62	0
3	4824.00	38.71	54.00	-15.29	34.93	3.78	Average	106	213
4	4824.00	51.59	74.00	-22.41	47.81	3.78	Peak	106	213
5	12060.00	43.22	54.00	-10.78	29.64	13.58	Average	100	182
6	12060.00	55.46	74.00	-18.54	41.88	13.58	Peak	100	182
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>									

Modulation	HT20	Test Freq. (MHz)	2412
Polarization	Vertical		

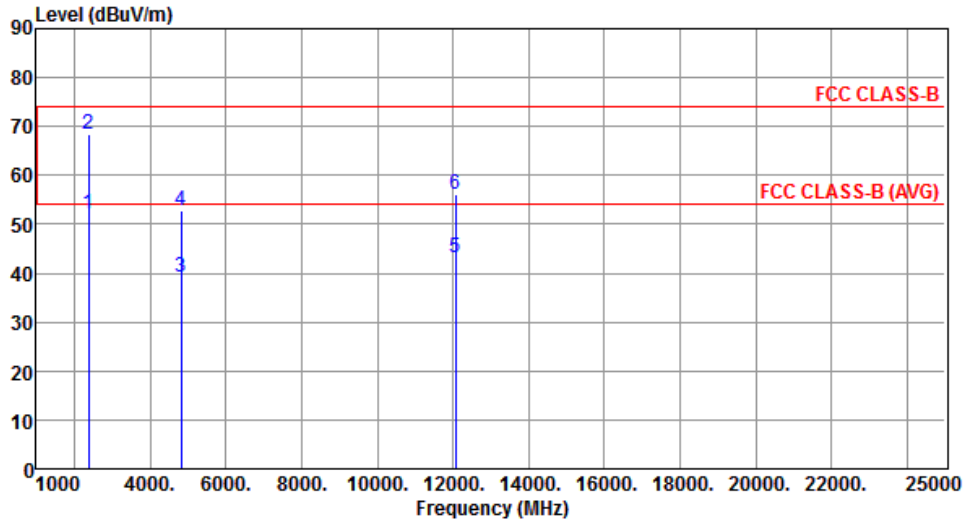


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	52.17	54.00	-1.83	55.35	-3.18	Average	263	217
2	2390.00	68.54	74.00	-5.46	71.72	-3.18	Peak	263	217
3	4824.00	39.15	54.00	-14.85	35.37	3.78	Average	190	11
4	4824.00	52.92	74.00	-21.08	49.14	3.78	Peak	190	11
5	12060.00	43.27	54.00	-10.73	29.69	13.58	Average	243	186
6	12060.00	56.27	74.00	-17.73	42.69	13.58	Peak	243	186

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	HT20	Test Freq. (MHz)	2437
Polarization	Horizontal		

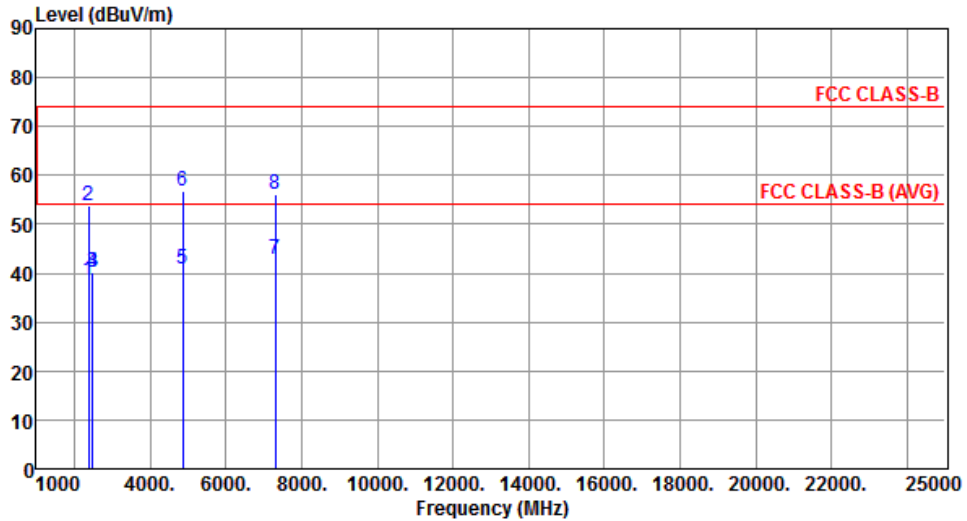


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	38.64	54.00	-15.36	41.82	-3.18	Average	100	62
2	2390.00	53.87	74.00	-20.13	57.05	-3.18	Peak	100	62
3	2483.50	40.31	54.00	-13.69	43.11	-2.80	Average	100	62
4	2483.50	40.26	74.00	-33.74	43.06	-2.80	Peak	100	62
5	4874.00	40.81	54.00	-13.19	36.87	3.94	Average	104	210
6	4874.00	56.71	74.00	-17.29	52.77	3.94	Peak	104	210
7	7311.00	42.73	54.00	-11.27	34.32	8.41	Average	126	286
8	7311.00	56.12	74.00	-17.88	47.71	8.41	Peak	126	286

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	HT20	Test Freq. (MHz)	2437
Polarization	Vertical		

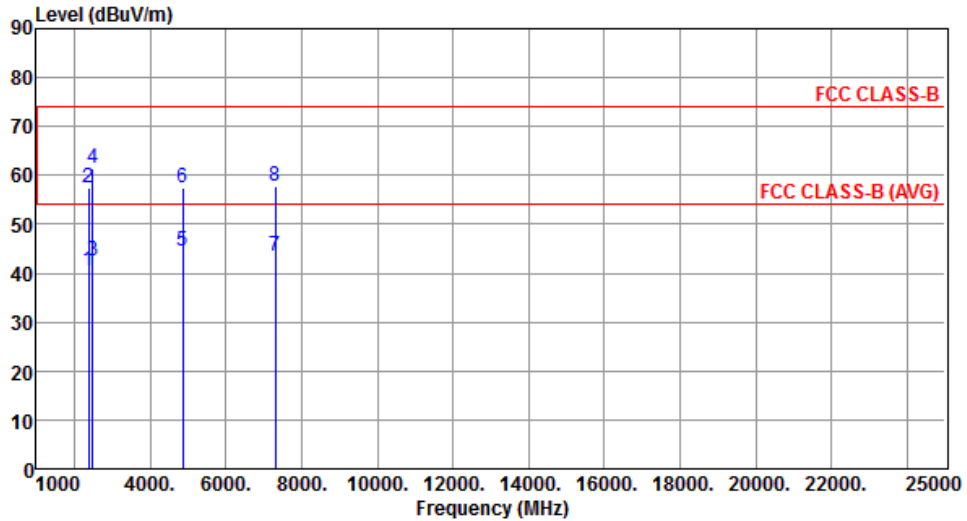


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	40.54	54.00	-13.46	43.72	-3.18	Average	303	252
2	2390.00	57.57	74.00	-16.43	60.75	-3.18	Peak	303	252
3	2483.50	42.42	54.00	-11.58	45.22	-2.80	Average	303	252
4	2483.50	61.47	74.00	-12.53	64.27	-2.80	Peak	303	252
5	4874.00	44.59	54.00	-9.41	40.65	3.94	Average	185	12
6	4874.00	57.53	74.00	-16.47	53.59	3.94	Peak	185	12
7	7311.00	43.59	54.00	-10.41	35.18	8.41	Average	143	171
8	7311.00	57.85	74.00	-16.15	49.44	8.41	Peak	143	171

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	HT20	Test Freq. (MHz)	2462
Polarization	Horizontal		

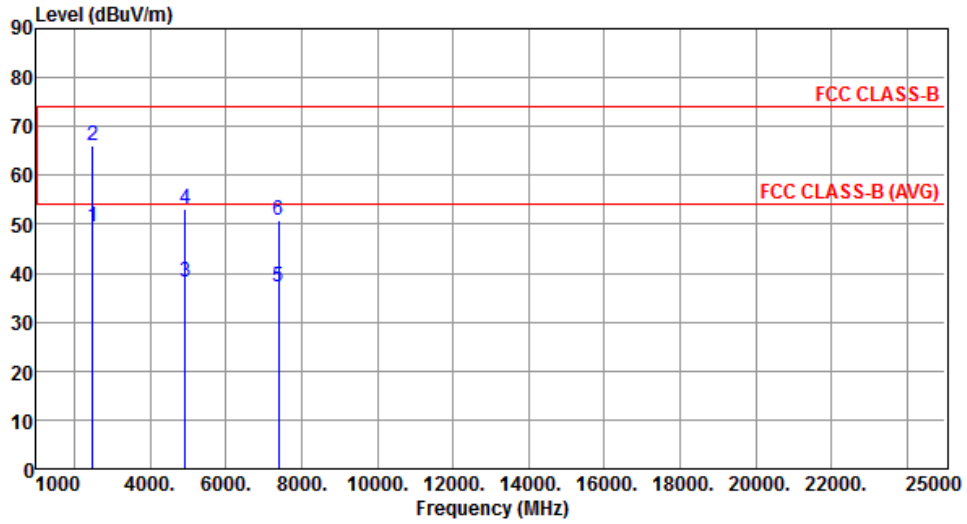


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	49.62	54.00	-4.38	52.42	-2.80	Average	103	61
2	2483.50	66.16	74.00	-7.84	68.96	-2.80	Peak	103	61
3	4924.00	38.28	54.00	-15.72	34.18	4.10	Average	102	212
4	4924.00	53.19	74.00	-20.81	49.09	4.10	Peak	102	212
5	7386.00	37.17	54.00	-16.83	28.73	8.44	Average	122	290
6	7386.00	50.83	74.00	-23.17	42.39	8.44	Peak	122	290

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	HT20	Test Freq. (MHz)	2462
Polarization	Vertical		

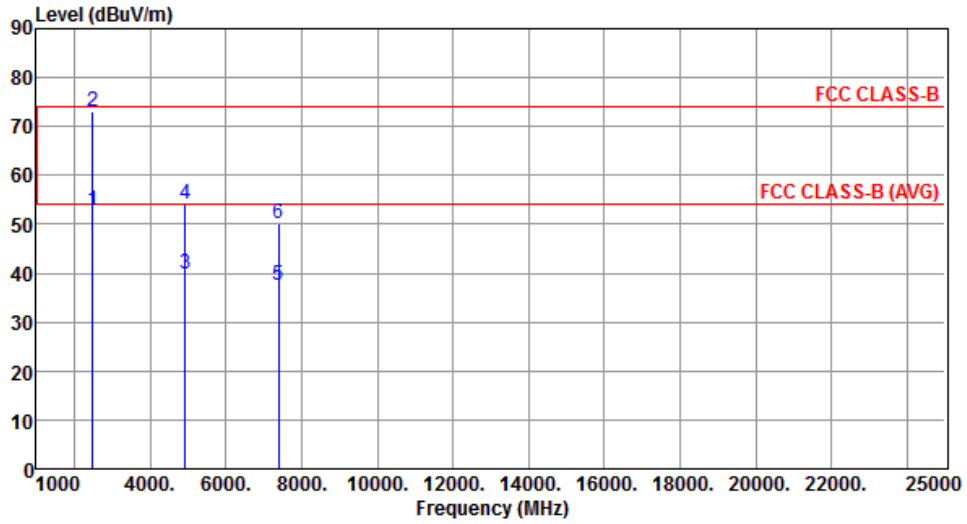


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	52.90	54.00	-1.10	55.70	-2.80	Average	215	354
2	2483.50	72.91	74.00	-1.09	75.71	-2.80	Peak	215	354
3	4924.00	40.00	54.00	-14.00	35.90	4.10	Average	192	14
4	4924.00	54.22	74.00	-19.78	50.12	4.10	Peak	192	14
5	7386.00	37.69	54.00	-16.31	29.25	8.44	Average	136	219
6	7386.00	50.07	74.00	-23.93	41.63	8.44	Peak	136	219

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

3.5.8 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT40

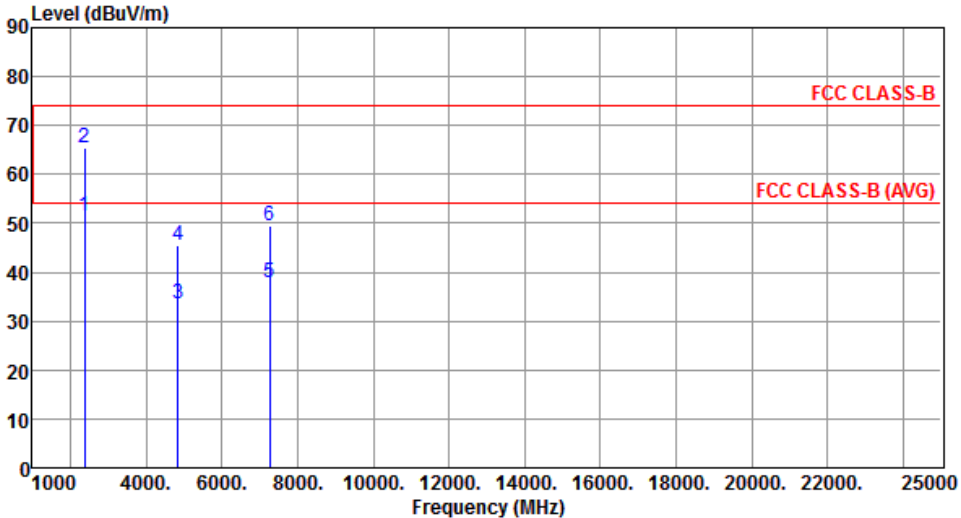Modulation	HT40	Test Freq. (MHz)	2422						
Polarization	Horizontal								
									
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBUV/m	dBUV/m	dB	dBUV	dB		cm	deg
1	2390.00	51.33	54.00	-2.67	54.51	-3.18	Average	100	57
2	2390.00	65.49	74.00	-8.51	68.67	-3.18	Peak	100	57
3	4844.00	33.43	54.00	-20.57	29.58	3.85	Average	115	269
4	4844.00	45.38	74.00	-28.62	41.53	3.85	Peak	103	205
5	7266.00	37.73	54.00	-16.27	29.34	8.39	Average	114	264
6	7266.00	49.53	74.00	-24.47	41.14	8.39	Peak	114	264
<p>Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).</p>									

Modulation	HT40	Test Freq. (MHz)	2422
Polarization	Vertical		

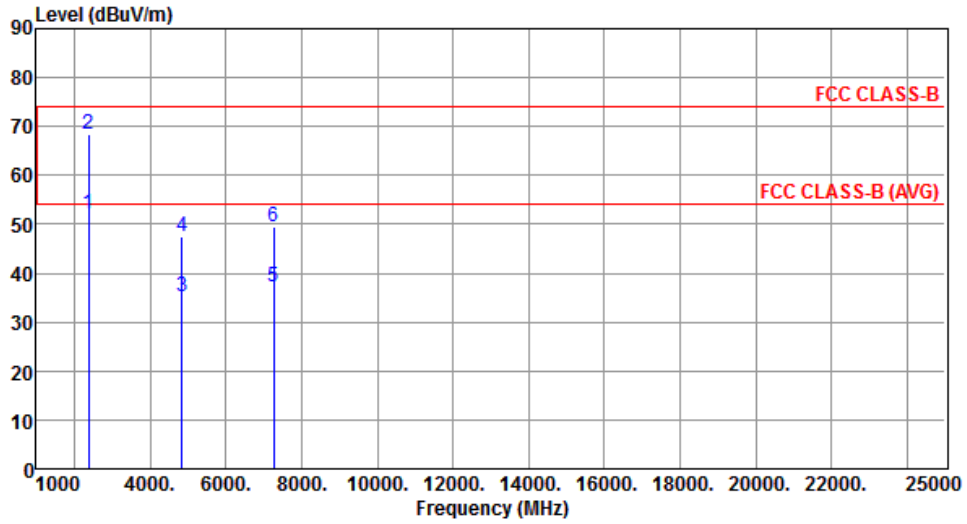


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	52.31	54.00	-1.69	55.49	-3.18	Average	365	53
2	2390.00	68.27	74.00	-5.73	71.45	-3.18	Peak	365	53
3	4844.00	35.31	54.00	-18.69	31.46	3.85	Average	129	179
4	4844.00	47.34	74.00	-26.66	43.49	3.85	Peak	129	179
5	7266.00	37.35	54.00	-16.65	28.96	8.39	Average	176	231
6	7266.00	49.36	74.00	-24.64	40.97	8.39	Peak	176	231

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	HT40	Test Freq. (MHz)	2437
Polarization	Horizontal		

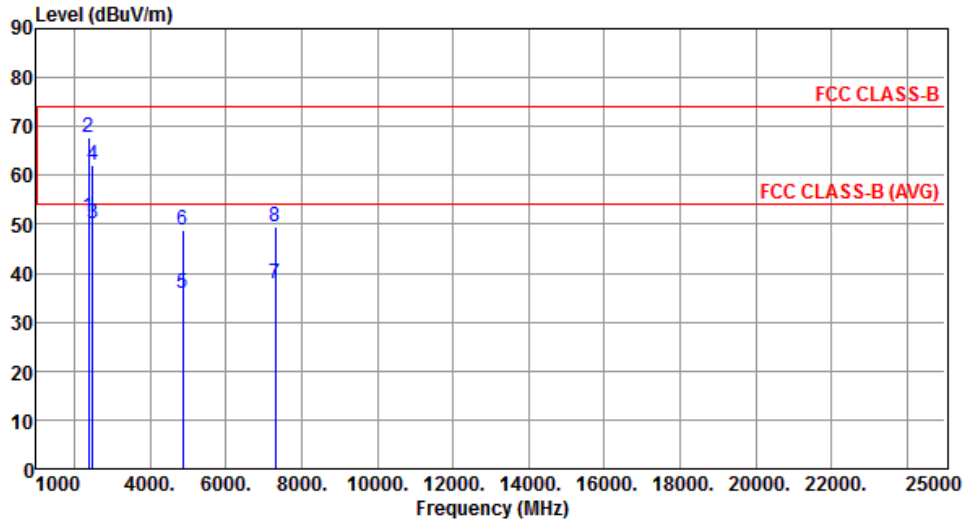


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	51.64	54.00	-2.36	54.82	-3.18	Average	100	52
2	2390.00	67.87	74.00	-6.13	71.05	-3.18	Peak	100	52
3	2483.50	50.31	54.00	-3.69	53.11	-2.80	Average	100	52
4	2483.50	62.26	74.00	-11.74	65.06	-2.80	Peak	100	52
5	4874.00	35.81	54.00	-18.19	31.87	3.94	Average	102	206
6	4874.00	48.71	74.00	-25.29	44.77	3.94	Peak	102	206
7	7311.00	37.73	54.00	-16.27	29.32	8.41	Average	112	276
8	7311.00	49.62	74.00	-24.38	41.21	8.41	Peak	112	276

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	HT40	Test Freq. (MHz)	2437
Polarization	Vertical		

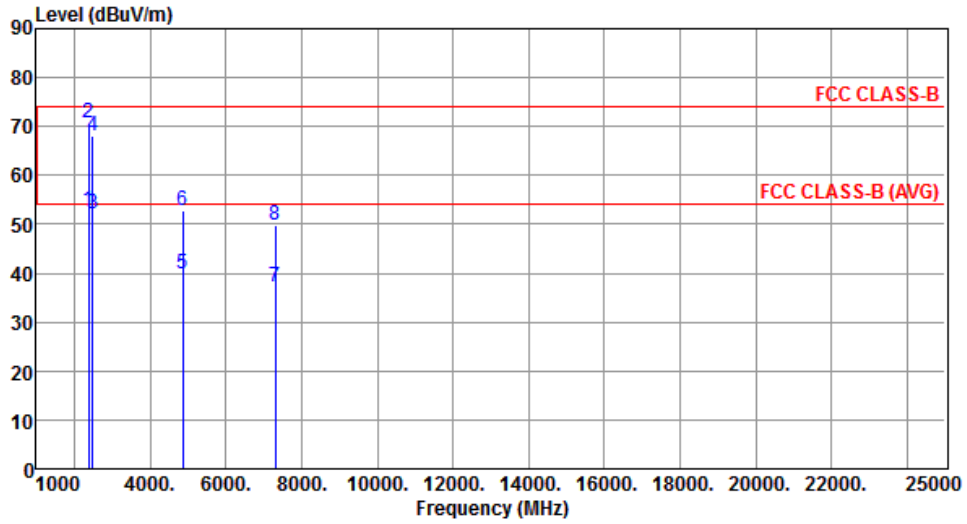


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	52.83	54.00	-1.17	56.01	-3.18	Average	296	253
2	2390.00	70.60	74.00	-3.40	73.78	-3.18	Peak	296	253
3	2483.50	52.21	54.00	-1.79	55.01	-2.80	Average	182	254
4	2483.50	67.95	74.00	-6.05	70.75	-2.80	Peak	182	254
5	4874.00	39.92	54.00	-14.08	35.98	3.94	Average	182	11
6	4874.00	52.74	74.00	-21.26	48.80	3.94	Peak	182	11
7	7311.00	37.36	54.00	-16.64	28.95	8.41	Average	202	149
8	7311.00	49.83	74.00	-24.17	41.42	8.41	Peak	202	149

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	HT40	Test Freq. (MHz)	2452
Polarization	Horizontal		

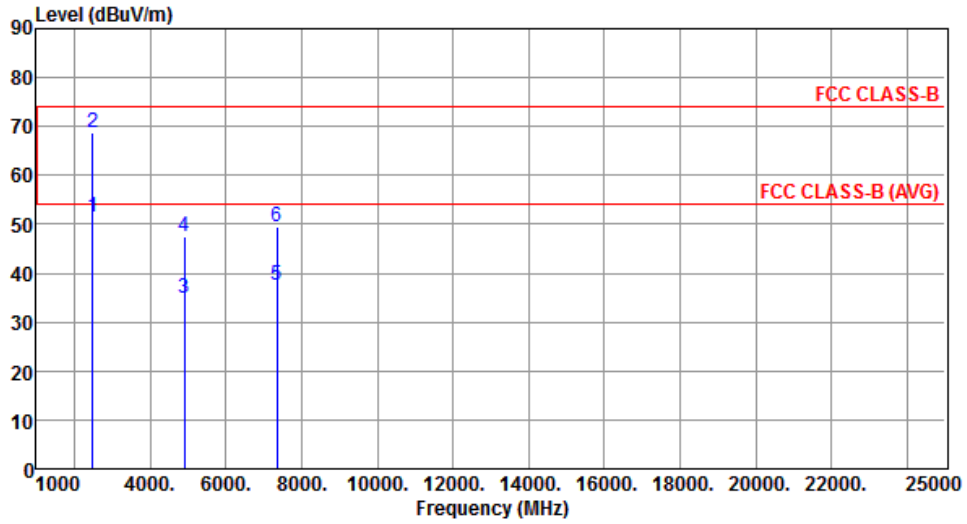


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	51.37	54.00	-2.63	54.17	-2.80	Average	100	64
2	2483.50	68.72	74.00	-5.28	71.52	-2.80	Peak	100	64
3	4904.00	34.86	54.00	-19.14	30.81	4.05	Average	106	122
4	4904.00	47.51	74.00	-26.49	43.46	4.05	Peak	106	122
5	7356.00	37.59	54.00	-16.41	29.16	8.43	Average	126	208
6	7356.00	49.63	74.00	-24.37	41.20	8.43	Peak	126	208

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	HT40	Test Freq. (MHz)	2452
Polarization	Vertical		

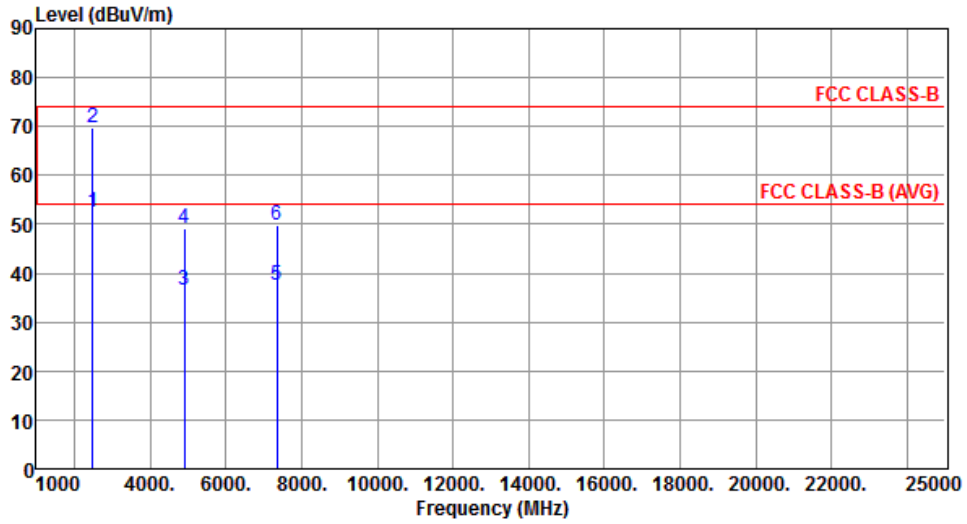

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	52.37	54.00	-1.63	55.17	-2.80	Average	220	352
2	2483.50	69.59	74.00	-4.41	72.39	-2.80	Peak	220	352
3	4904.00	36.58	54.00	-17.42	32.53	4.05	Average	100	11
4	4904.00	49.18	74.00	-24.82	45.13	4.05	Peak	100	11
5	7356.00	37.37	54.00	-16.63	28.94	8.43	Average	121	18
6	7356.00	49.86	74.00	-24.14	41.43	8.43	Peak	121	18

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

3.6 Emissions in Non-Restricted Frequency Bands

3.6.1 Emissions in Non-Restricted Frequency Bands Limit

Peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz

3.6.2 Test Procedures


Reference level measurement

1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Use the peak marker function to determine the maximum PSD level

Emission level measurement

1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Scan Frequency range is up to 25GHz
4. Use the peak marker function to determine the maximum amplitude level

3.6.3 Test Setup

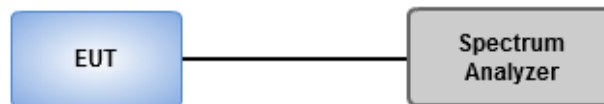



3.6.4 Test Result of Emissions in non-restricted frequency bands


This test item is performed on each TX output individually without summing or adding $10 \log(N_{ANT})$ since measurements are made relative to the in-band emissions on the individual outputs. Only worst test result of each operating mode is presented.

3.6.5 Unwanted Emissions into Non-Restricted Frequency Bands


802.11b

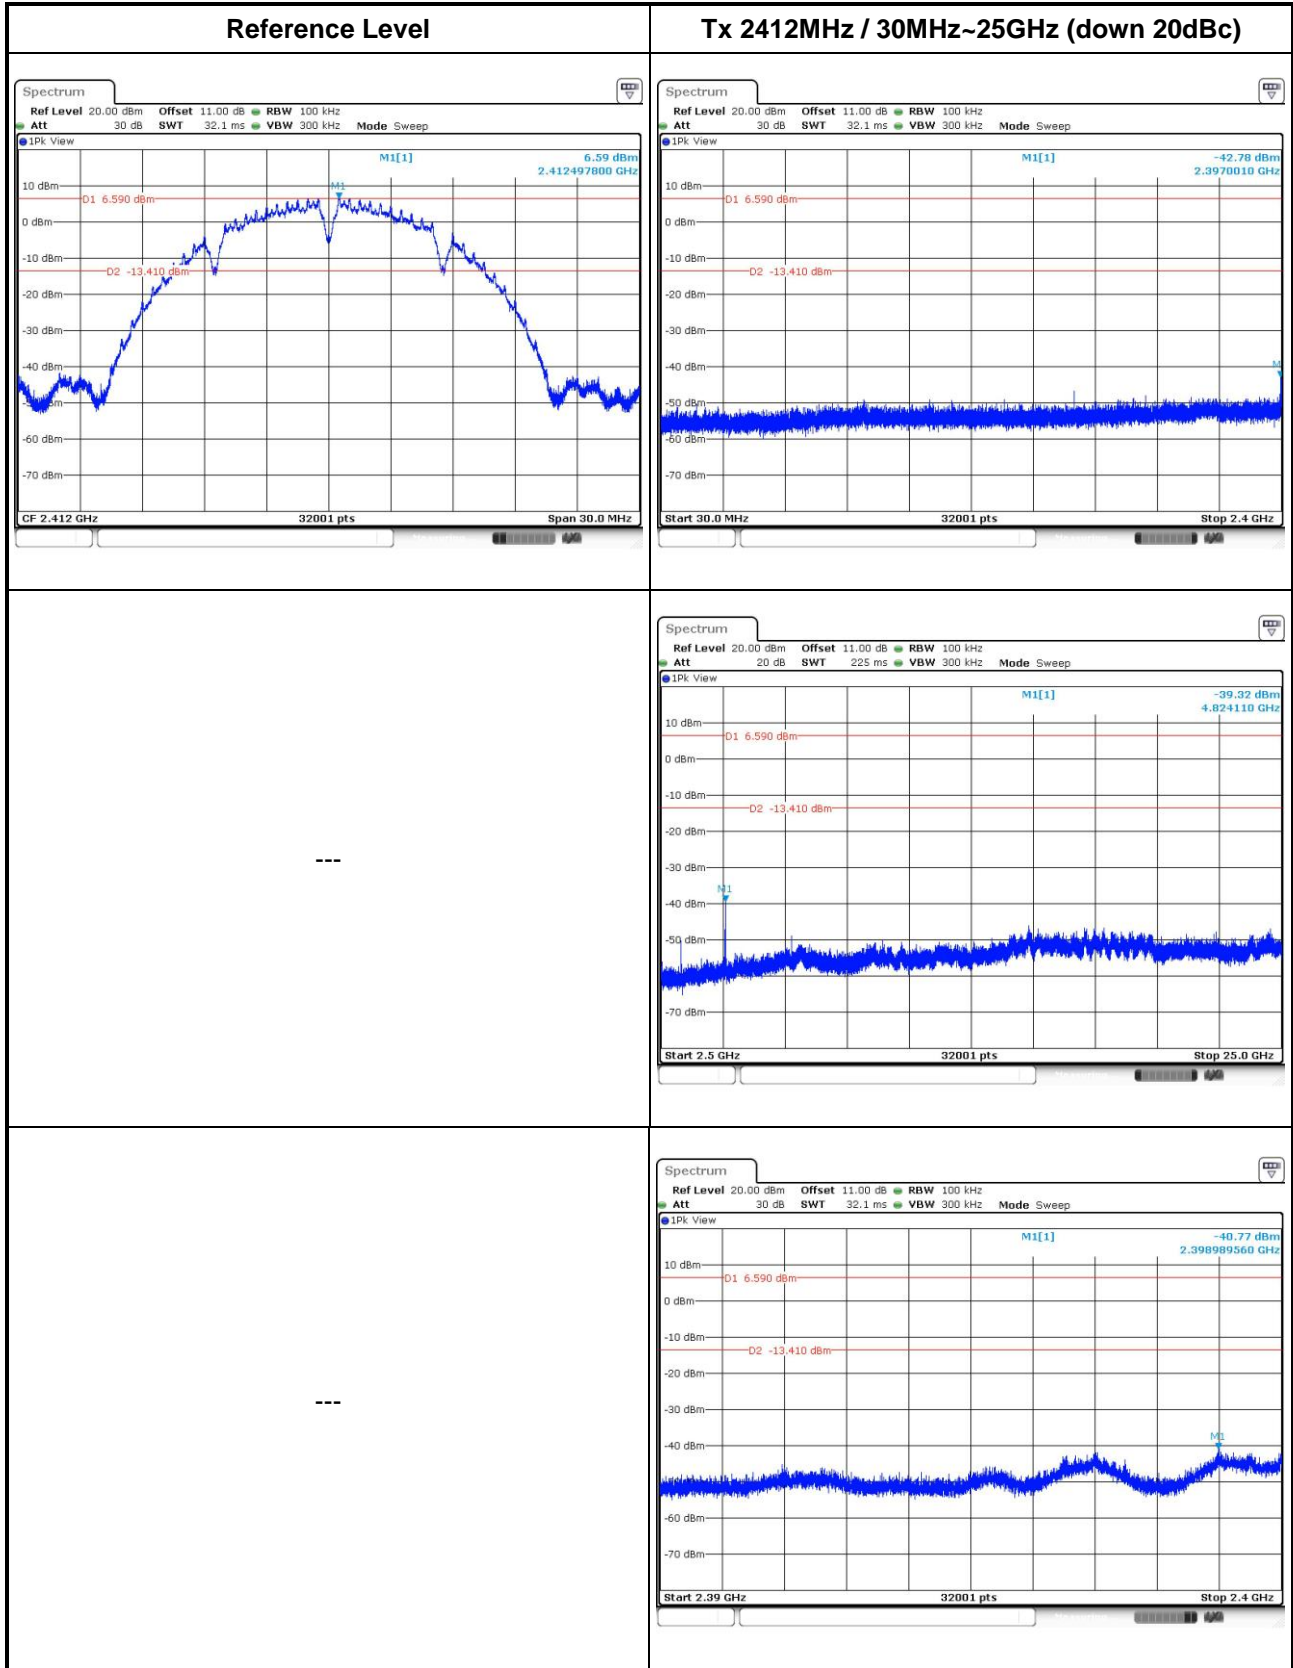


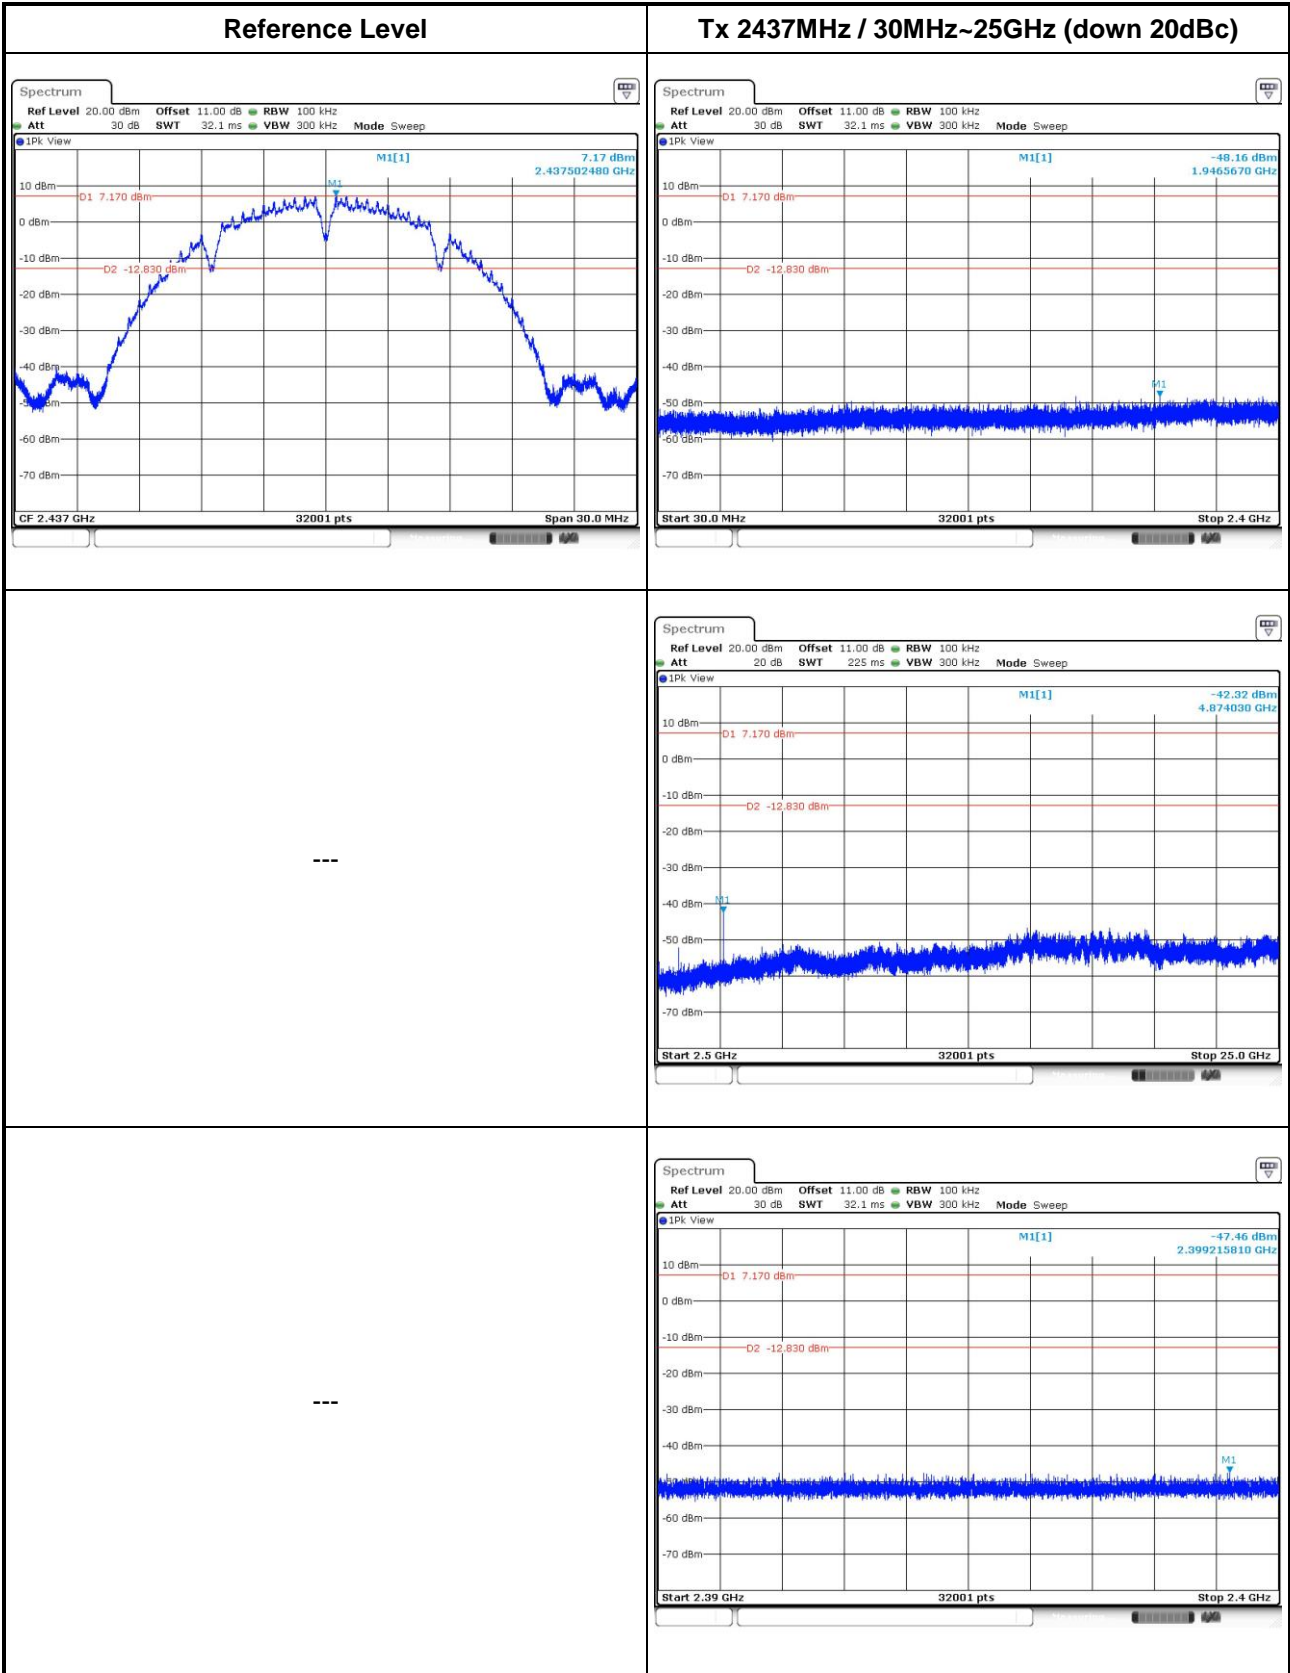


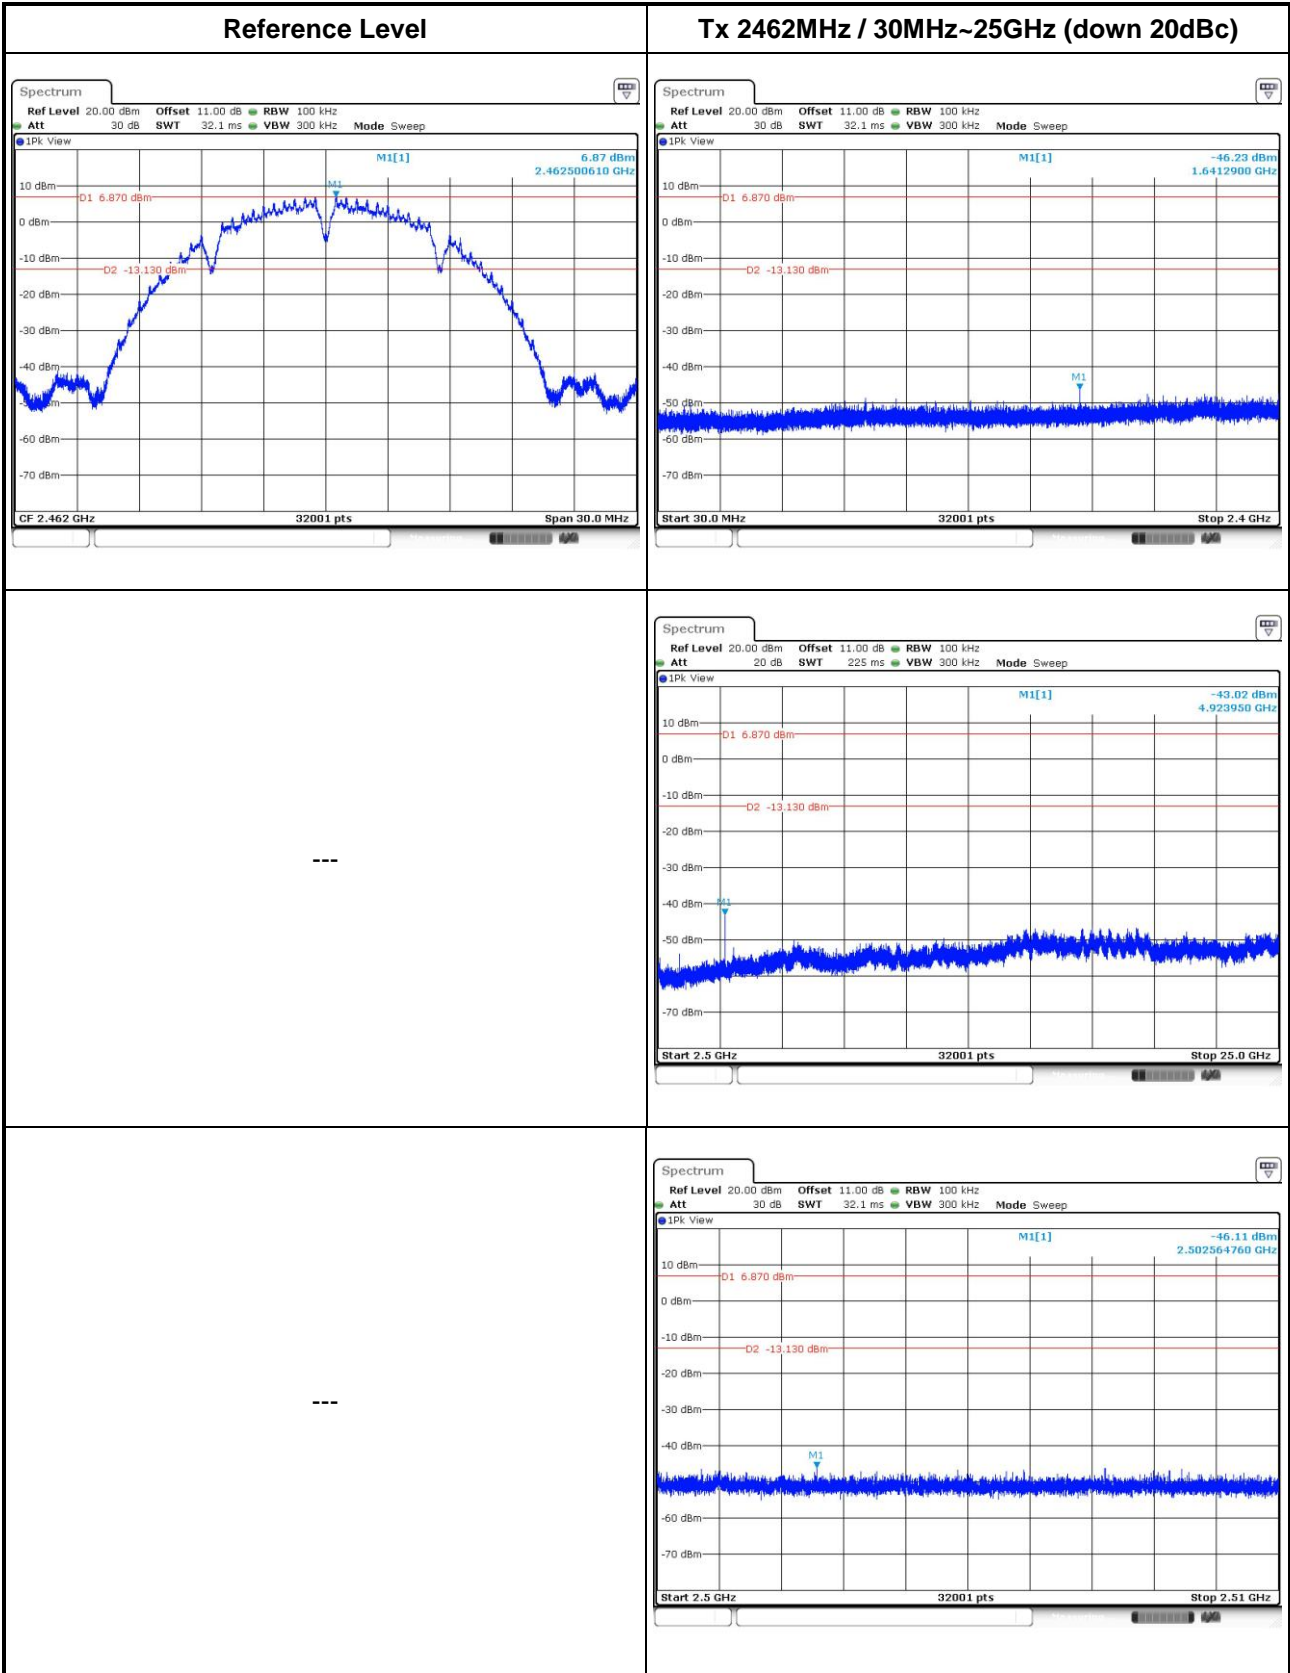


802.11g

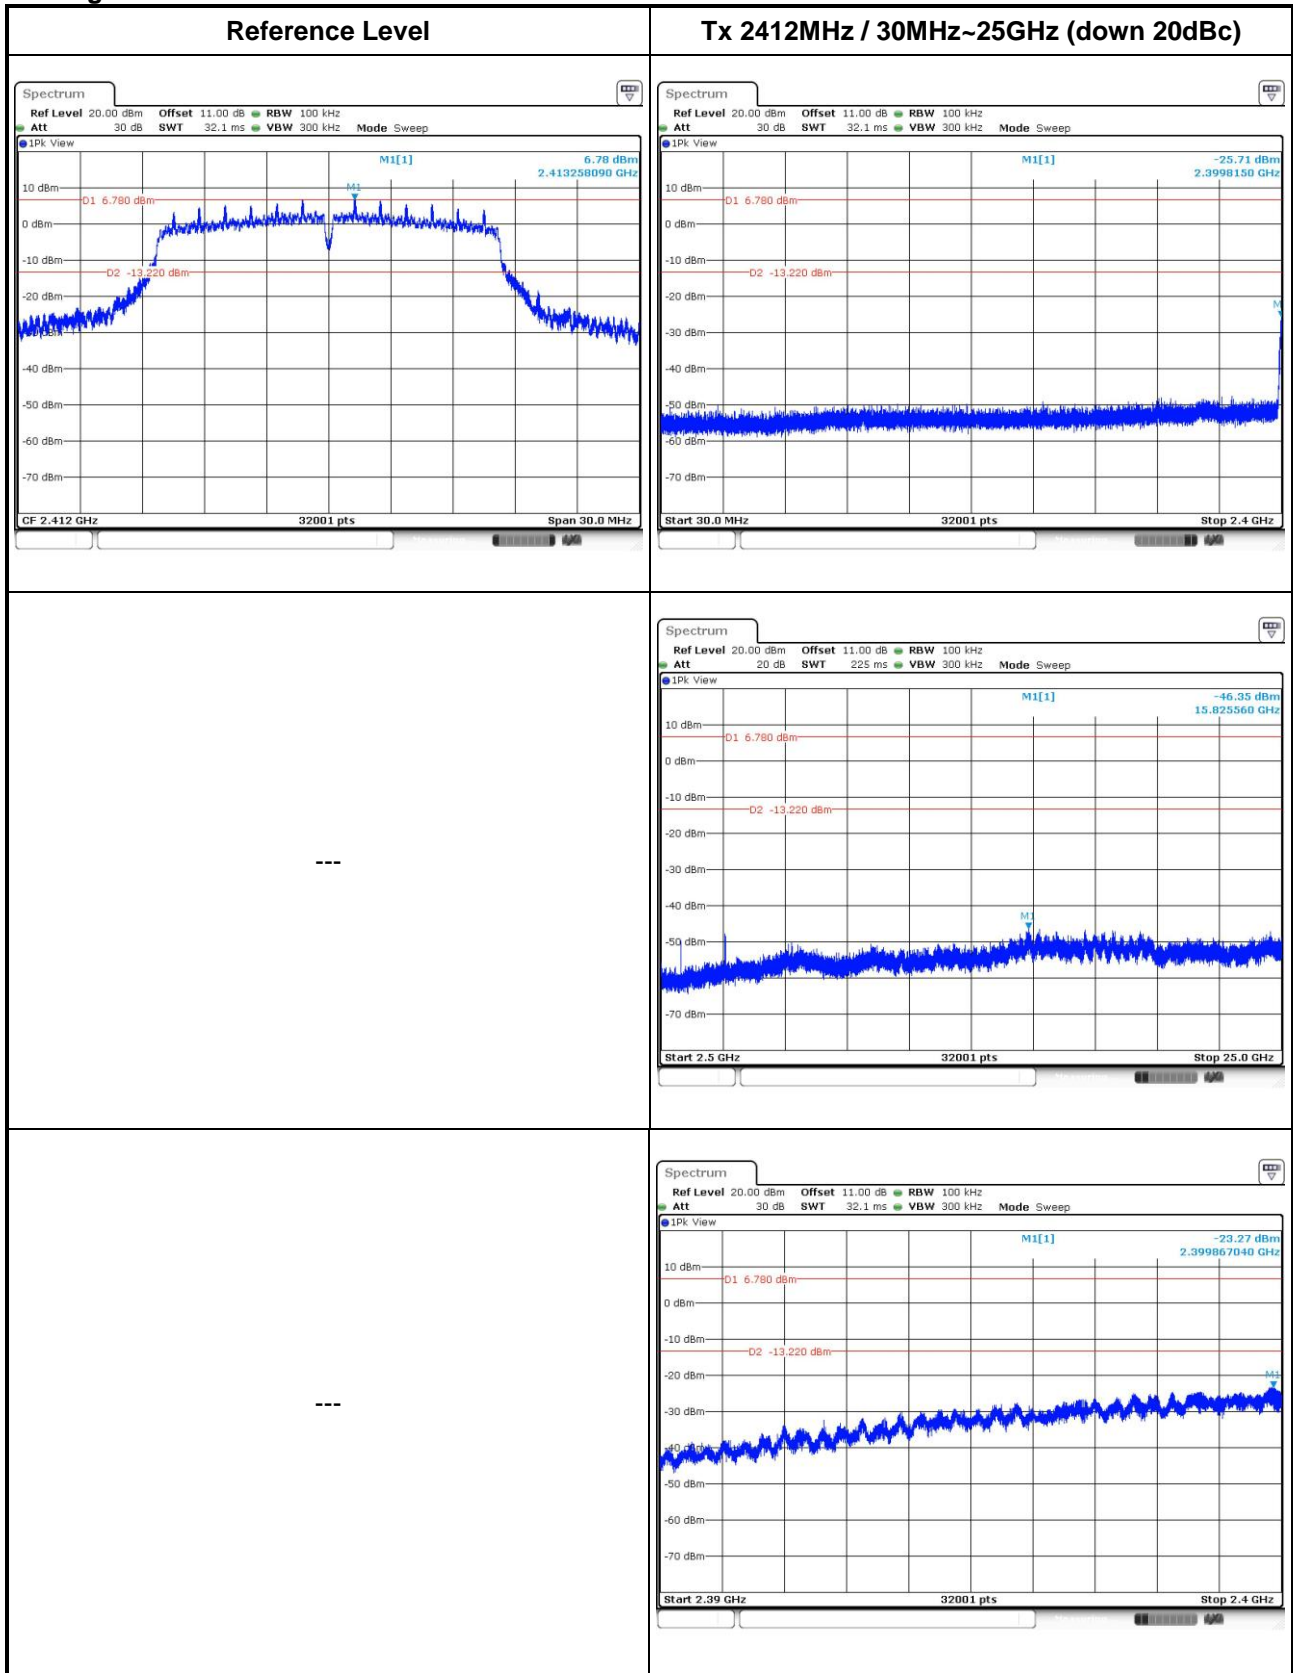


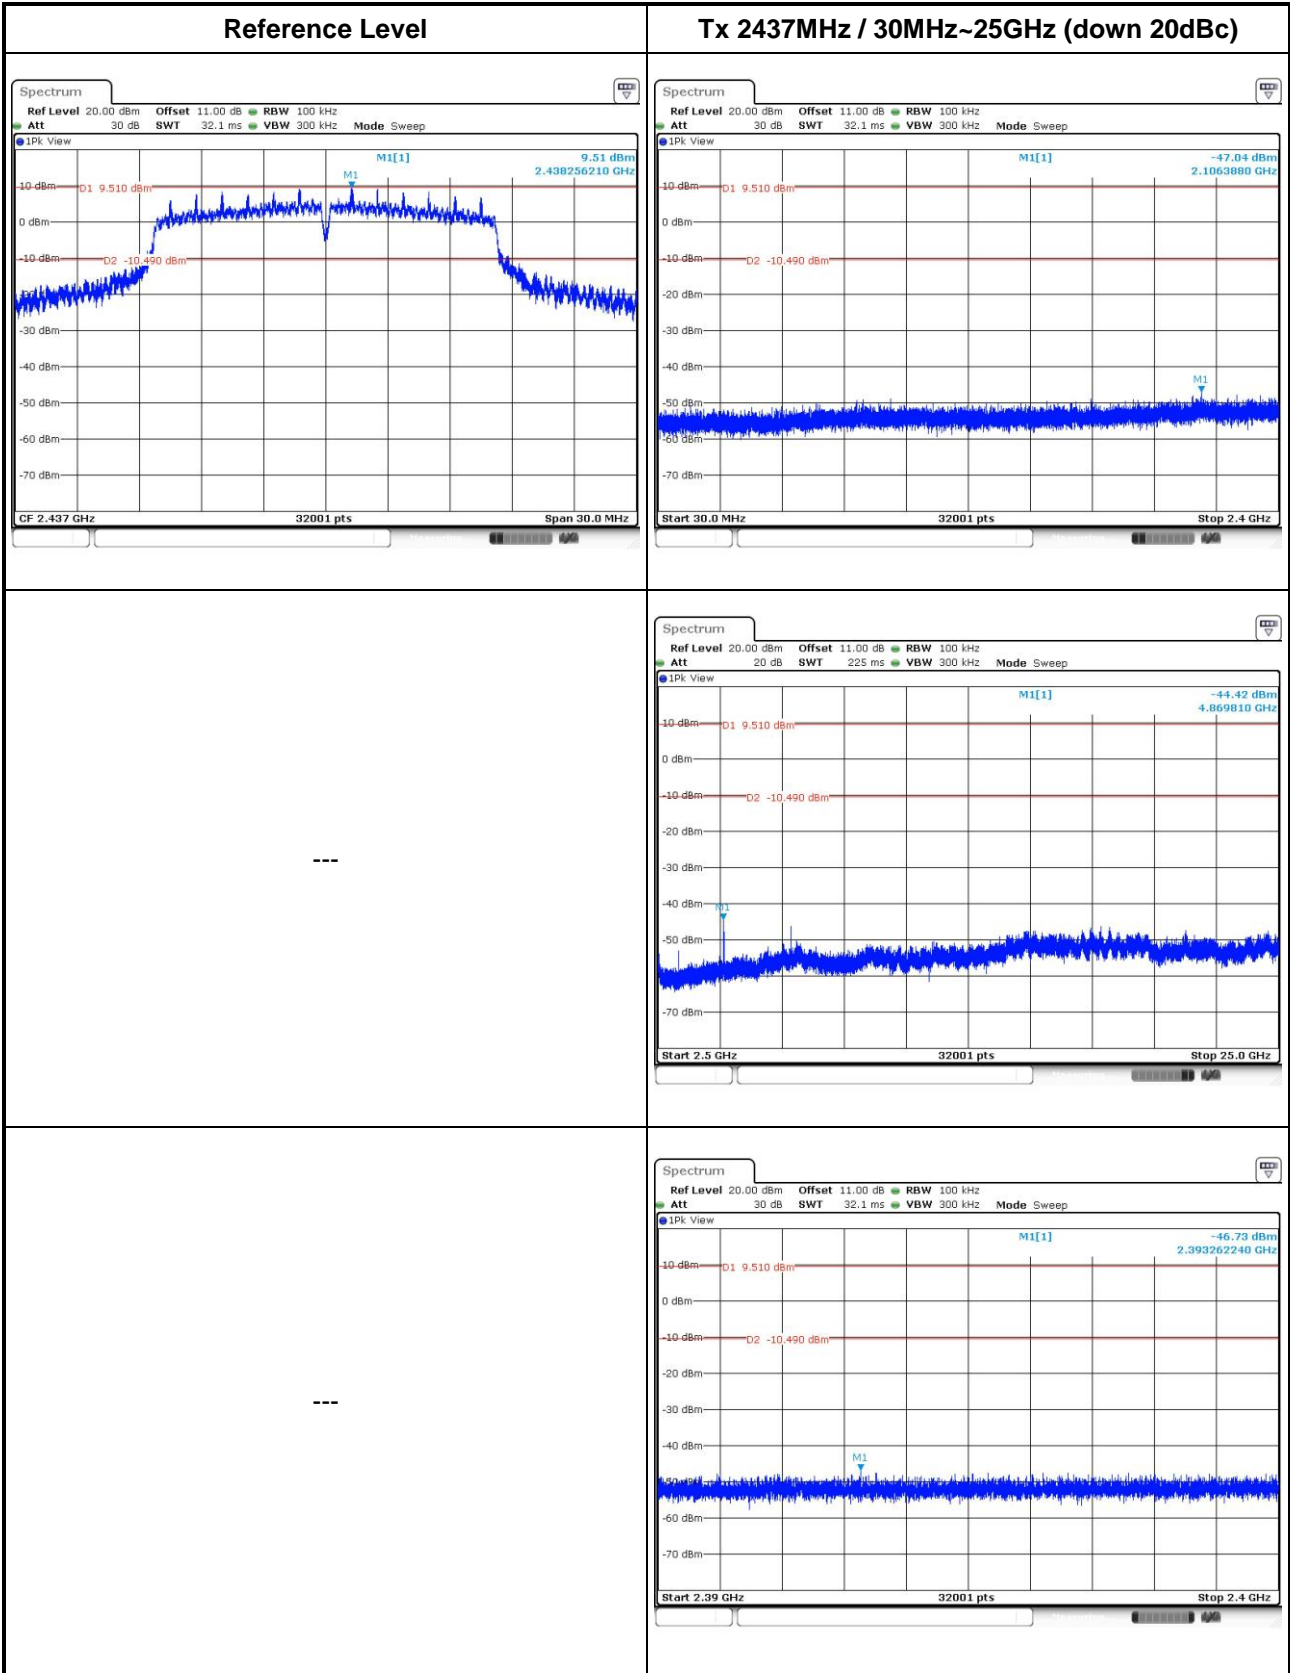


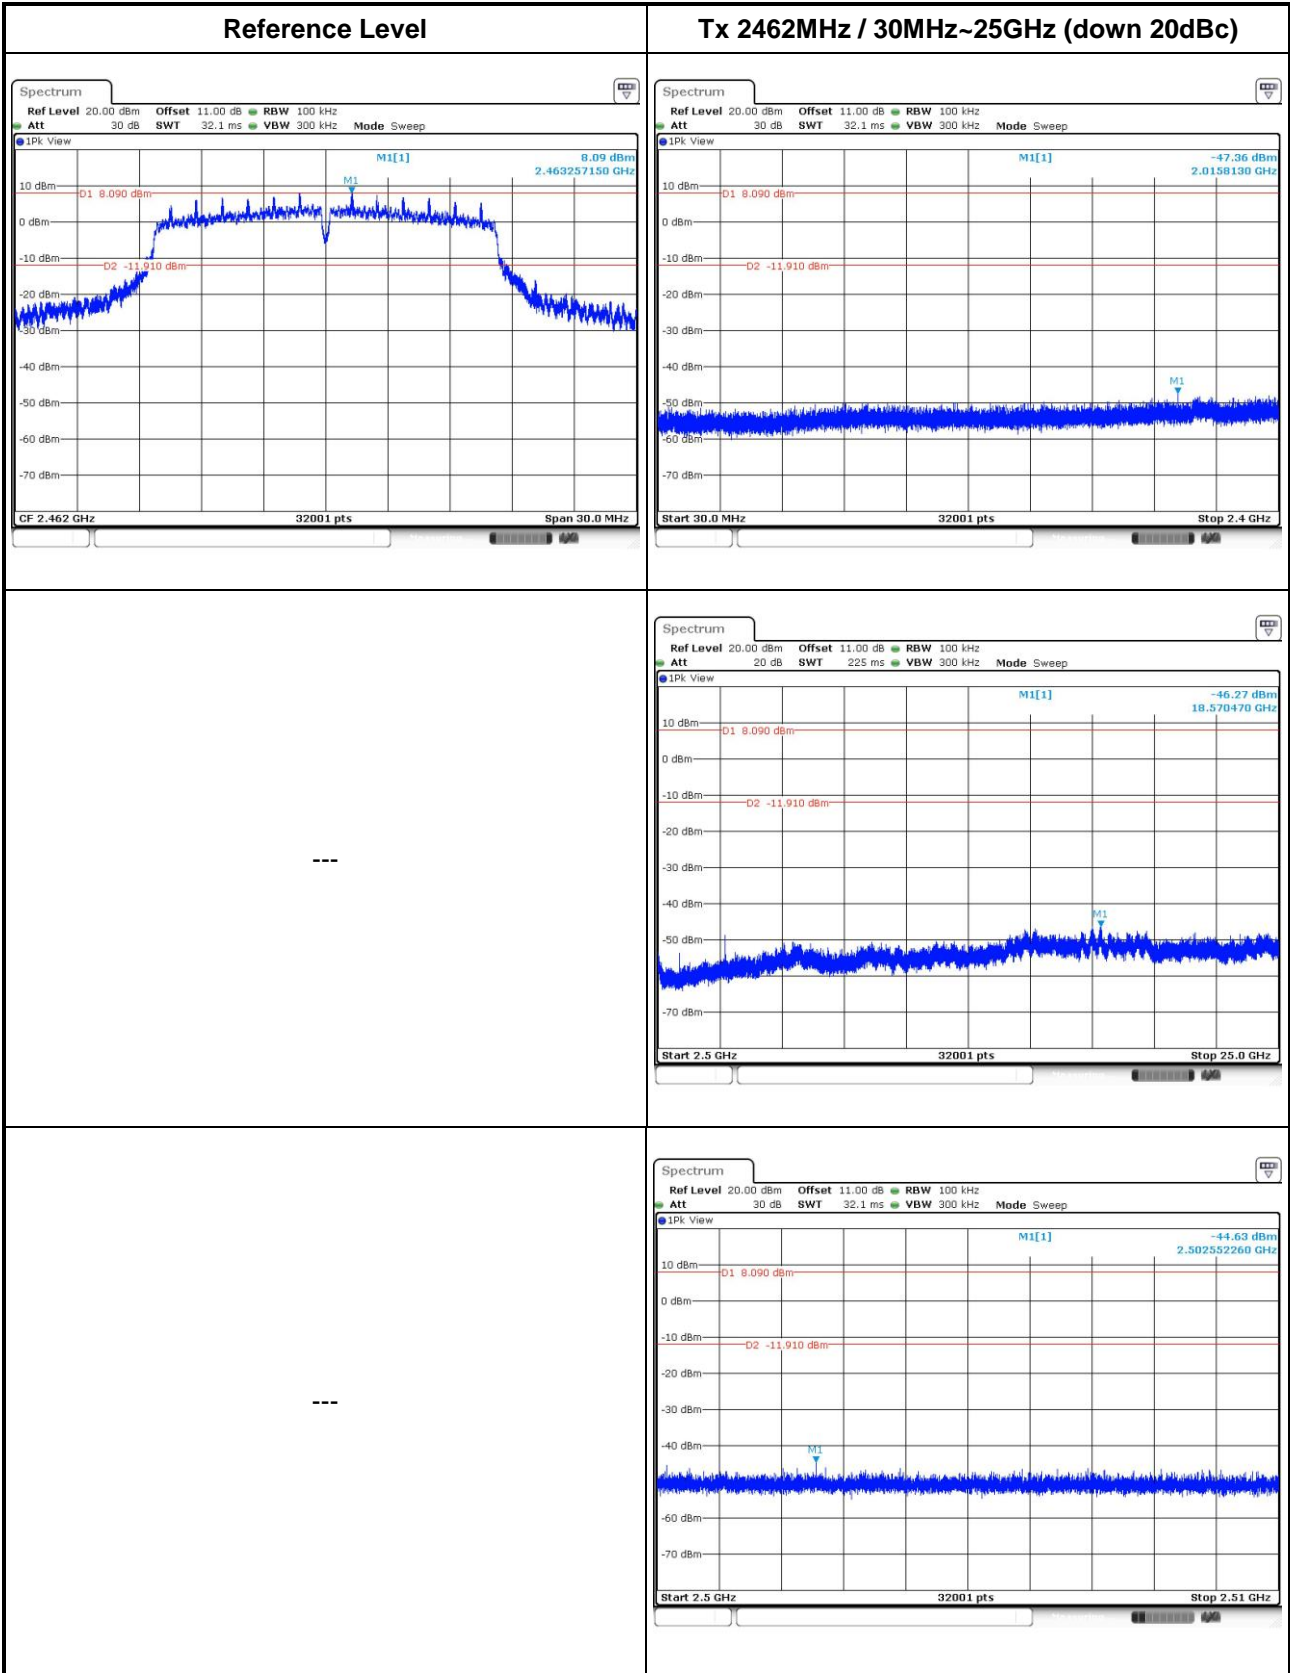


802.11n HT20

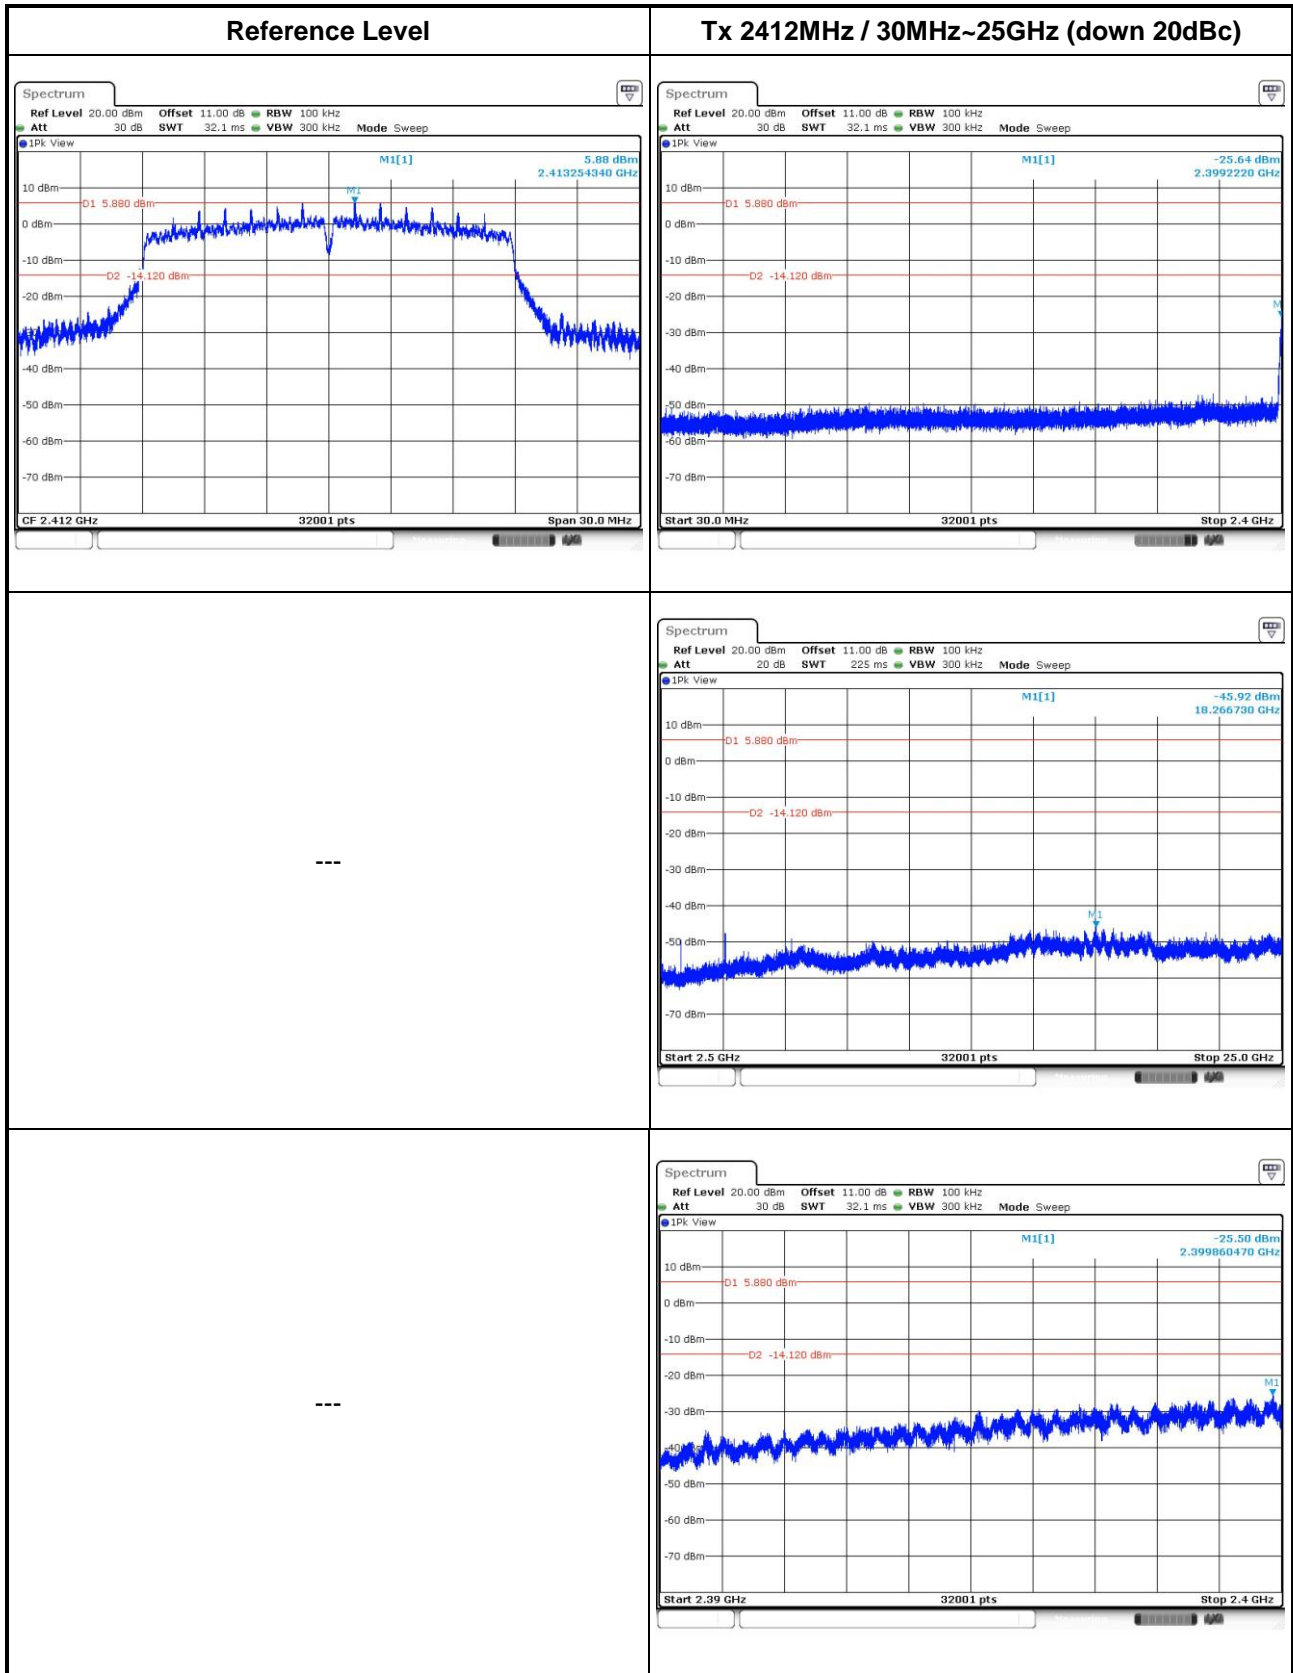


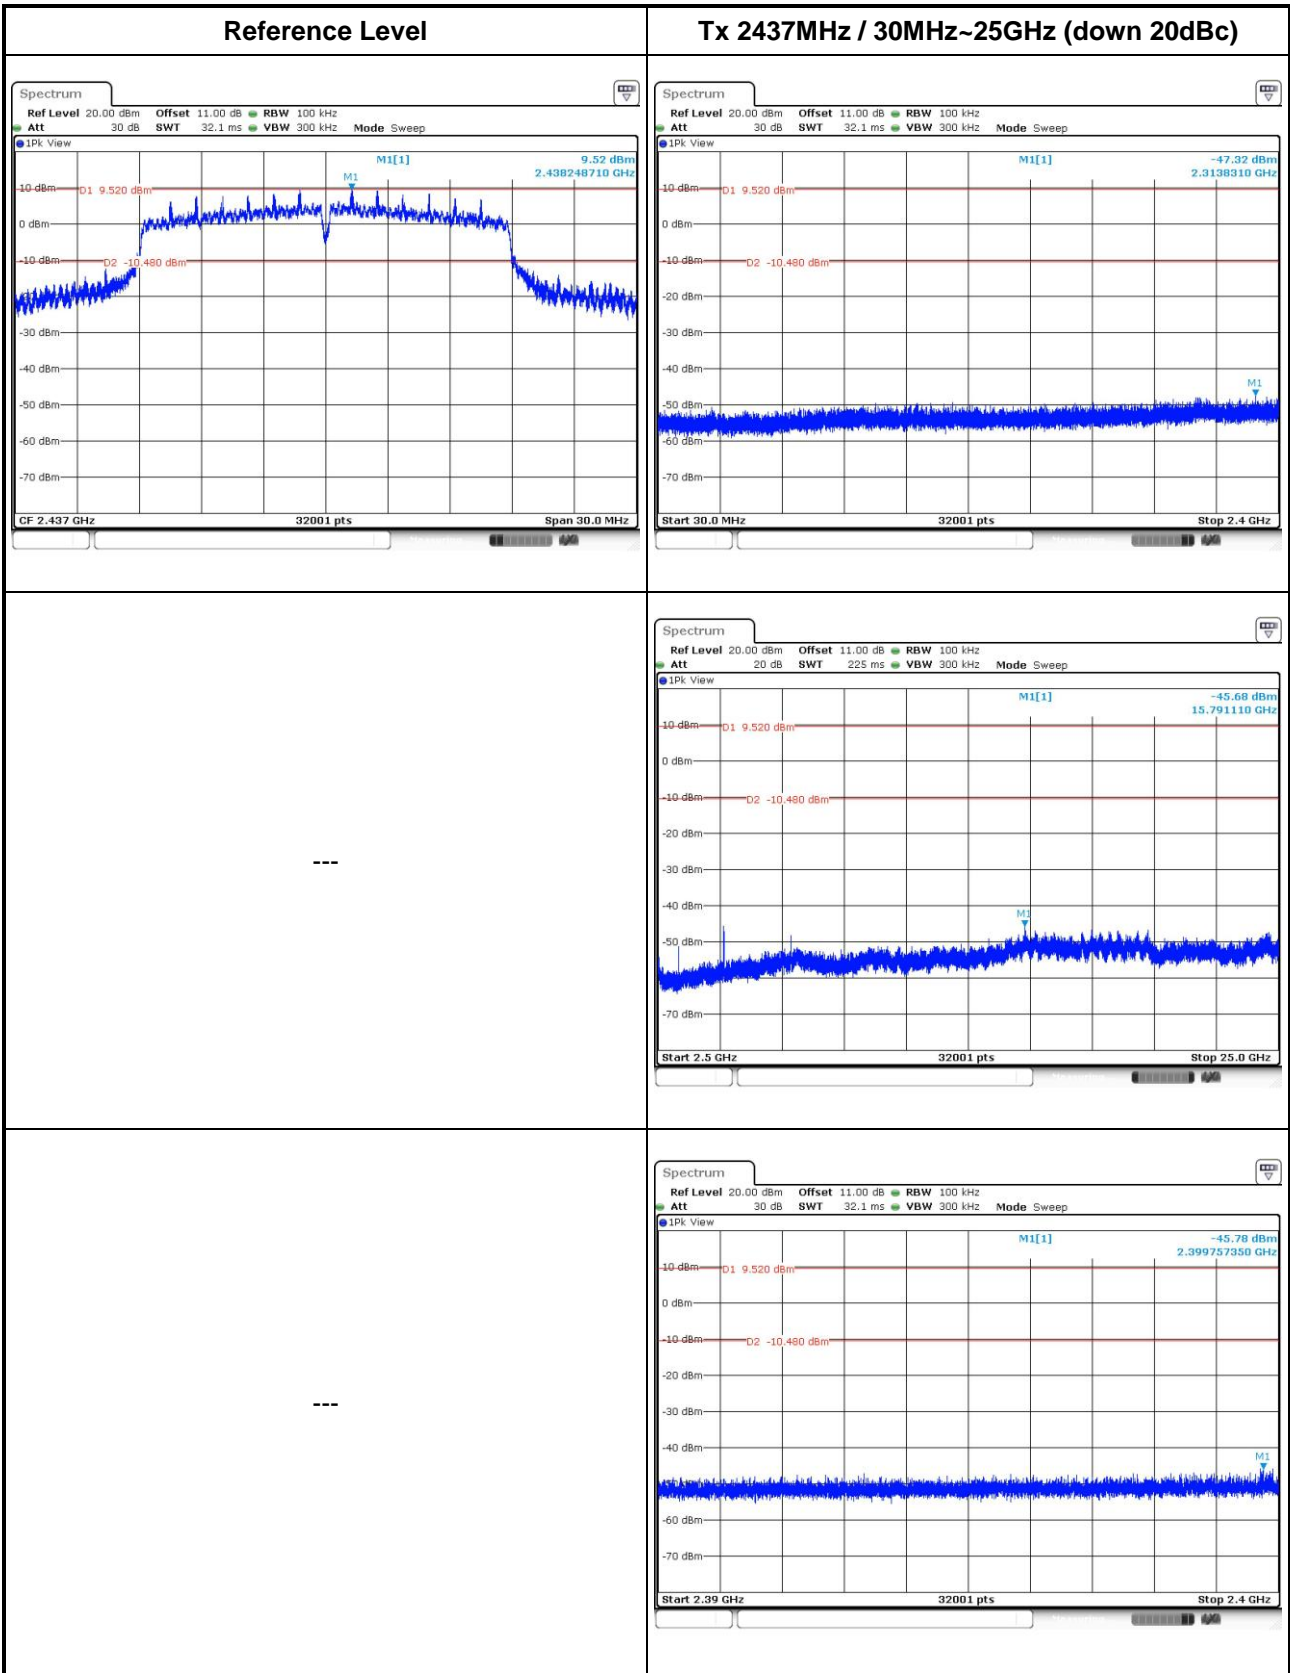


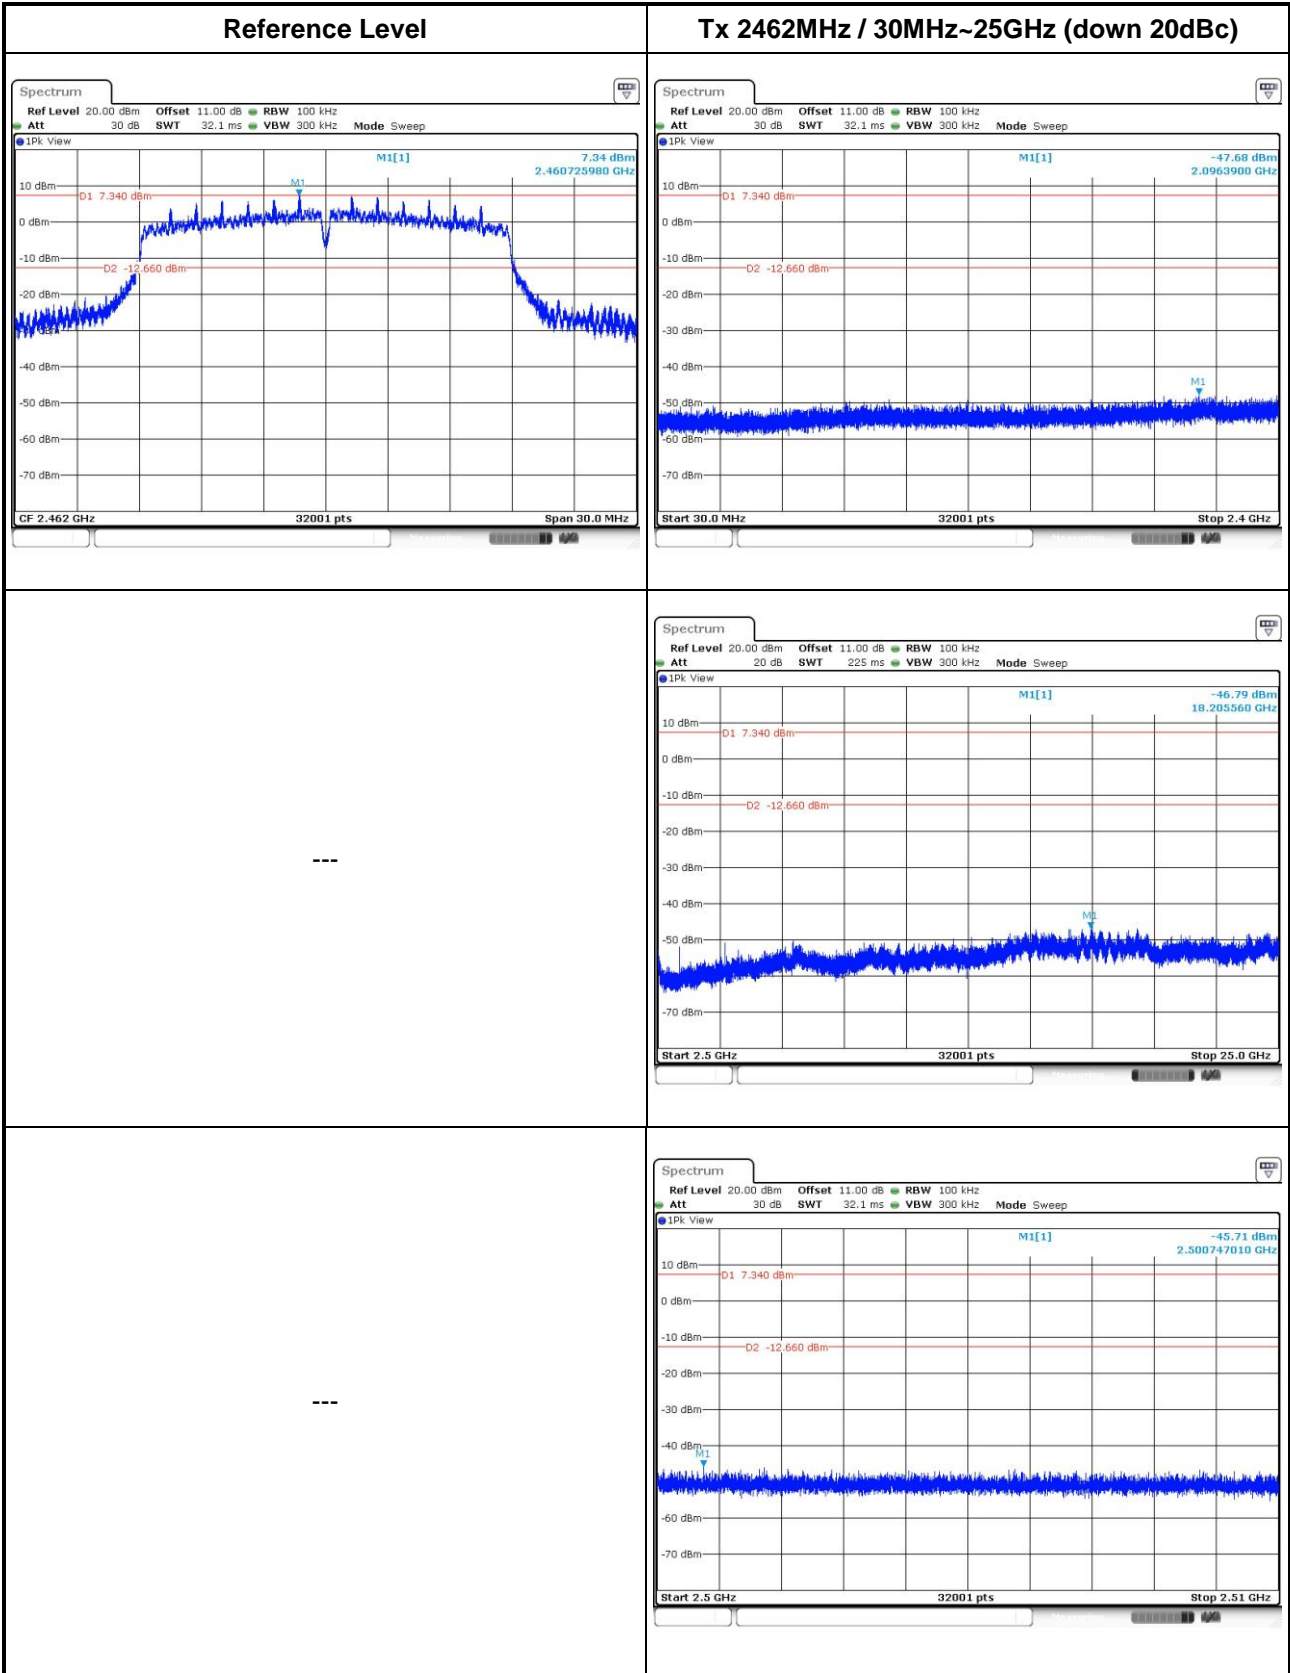

802.11n HT40

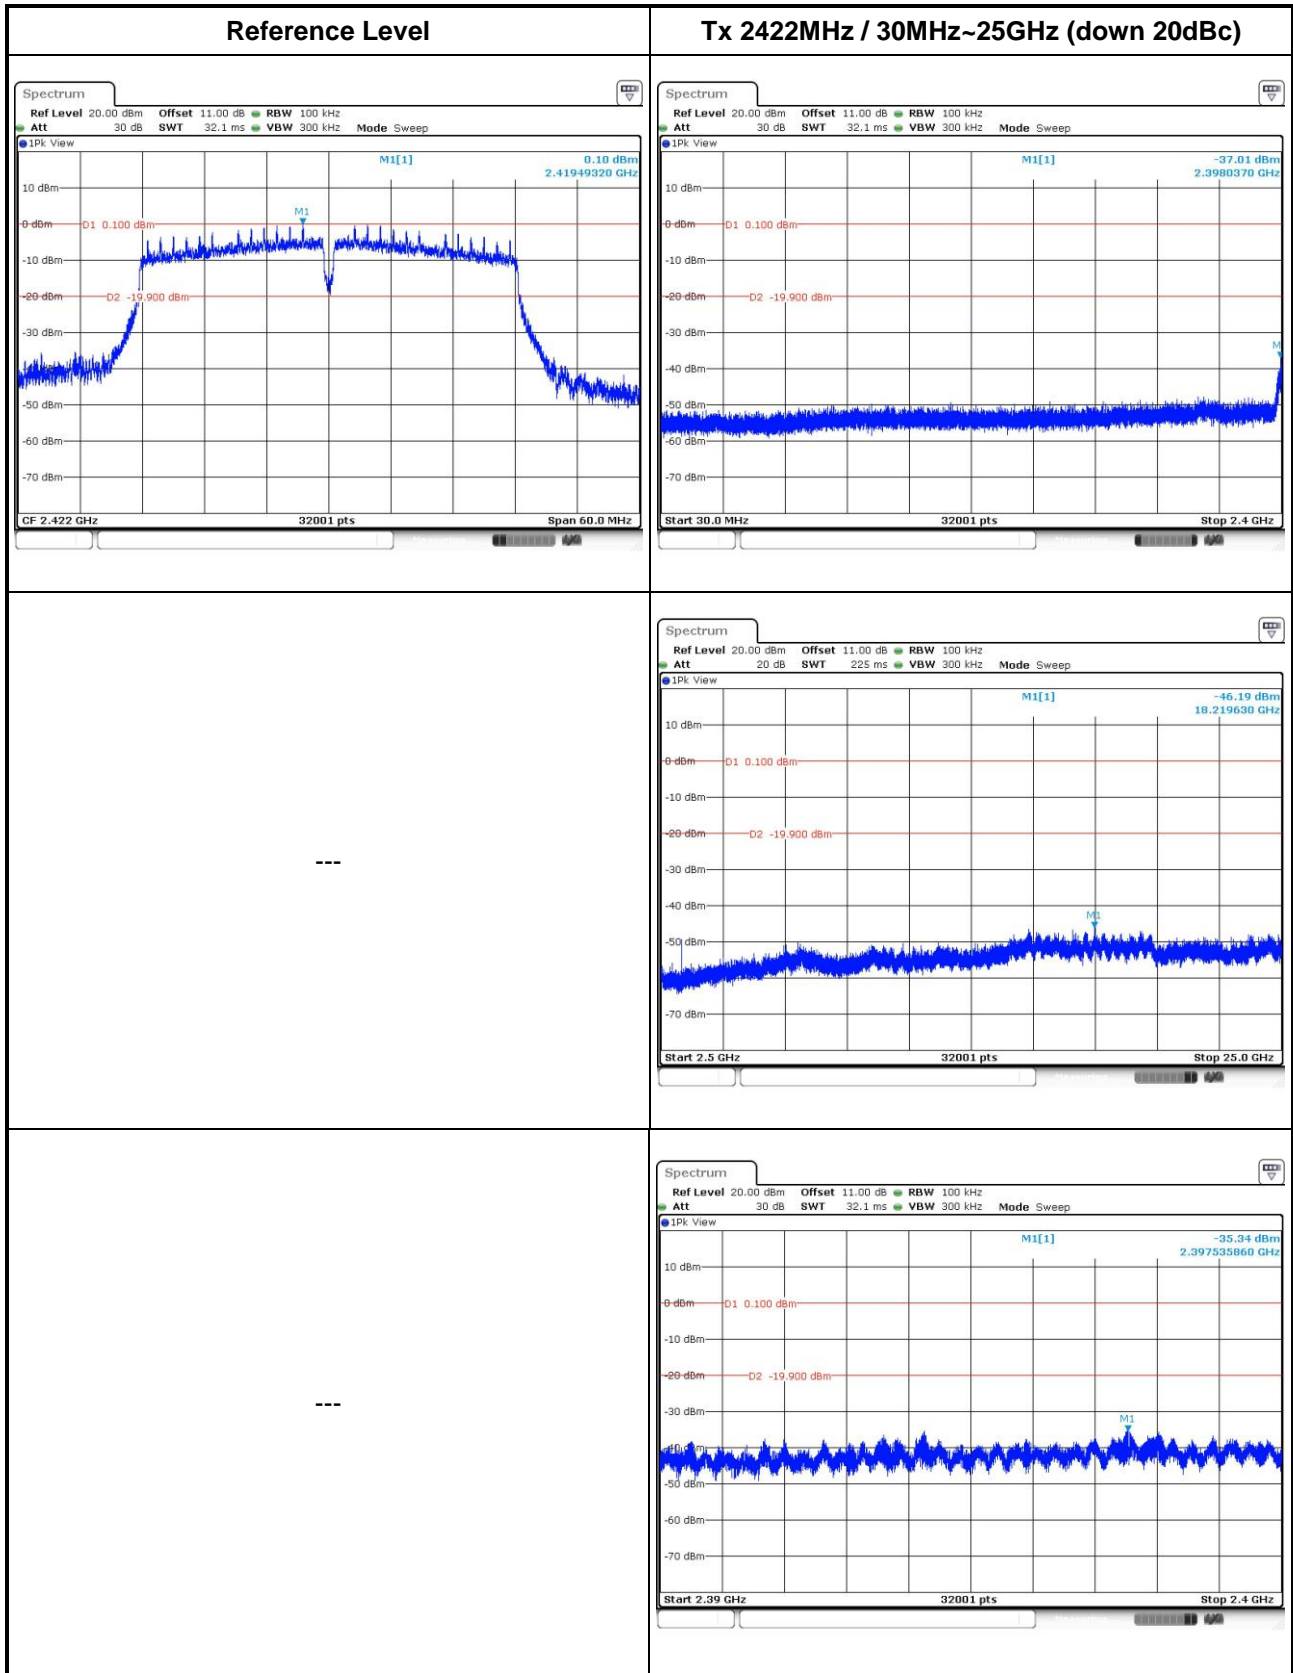

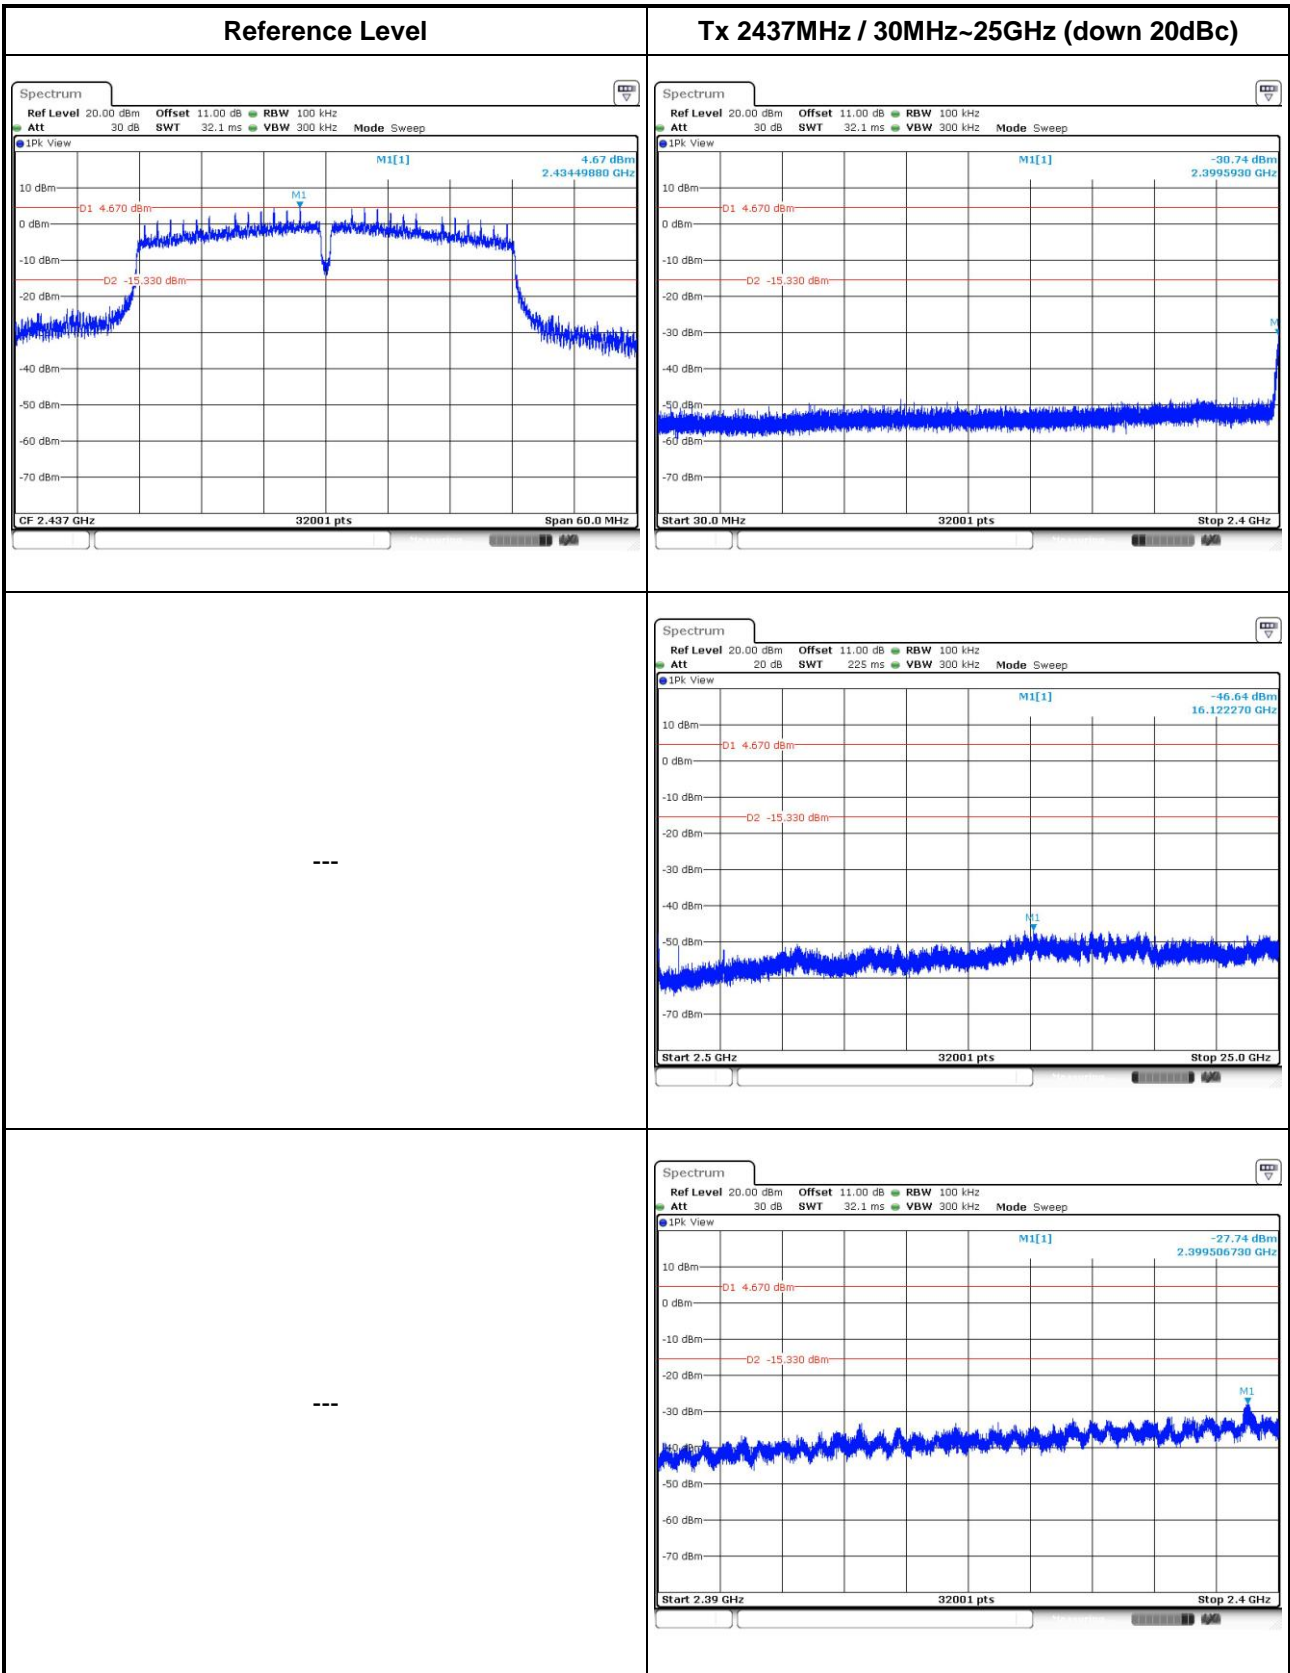

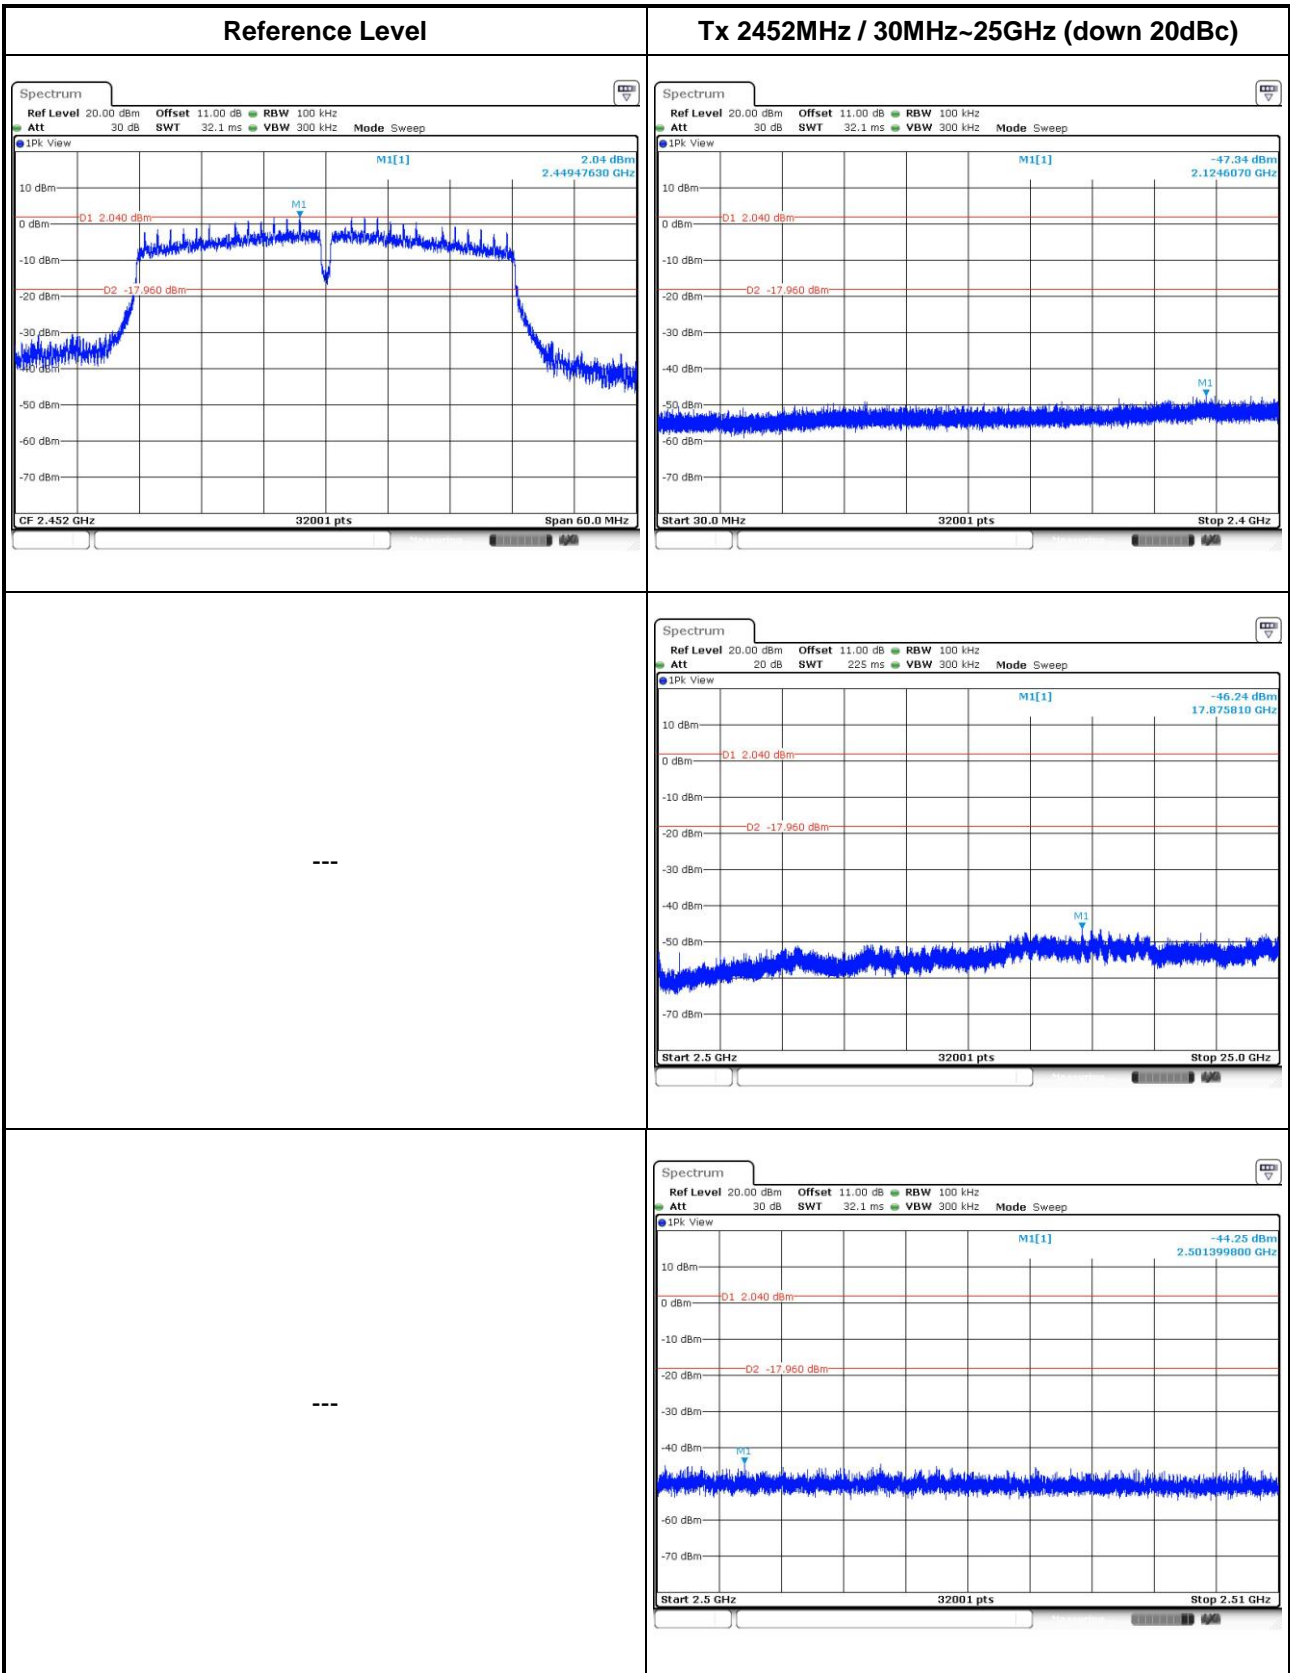

4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <http://www.icertifi.com.tw>.

Linkou

Tel: 886-2-2601-1640

No. 30-2, Ding Fwu Tsuen, Lin
Kou District, New Taipei City,
Taiwan, R.O.C.

Kwei Shan

Tel: 886-3-271-8666

No. 3-1, Lane 6, Wen San 3rd St.,
Kwei Shan District, Tao Yuan City
333, Taiwan, R.O.C.

Kwei Shan Site II

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd
St., Kwei Shan District, Tao Yuan
City 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Email: ICC_Service@icertifi.com.tw

==END==