

# FCC Test Report

**FCC ID** : MXF-WRTQ-337  
**Equipment** : Router  
**Model No.** : AC1300  
**Brand Name** : Onelink  
**Applicant** : Gemtek Technology Co., Ltd.  
**Address** : No.15-1 Zhonghua Rd, Hsinchu Industrial  
Park, Hukou, Hsinchu, Taiwan, R.O.C  
**Standard** : 47 CFR FCC Part 15.247  
**Received Date** : Nov. 05, 2018  
**Tested Date** : Nov. 08 ~ Nov. 20, 2018

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:

  
Along Chen / Assistant Manager

Approved by:

  
Gary Chang / Manager



---

## Table of Contents

<b>1</b>	<b>GENERAL DESCRIPTION .....</b>	<b>5</b>
1.1	Information.....	5
1.2	Local Support Equipment List .....	8
1.3	Test Setup Chart .....	8
1.4	The Equipment List .....	9
1.5	Test Standards .....	10
1.6	Measurement Uncertainty .....	10
<b>2</b>	<b>TEST CONFIGURATION .....</b>	<b>11</b>
2.1	Testing Condition .....	11
2.2	The Worst Test Modes and Channel Details .....	11
<b>3</b>	<b>TRANSMITTER TEST RESULTS.....</b>	<b>12</b>
3.1	Conducted Emissions.....	12
3.2	6dB and Occupied Bandwidth .....	15
3.3	RF Output Power .....	21
3.4	Power Spectral Density .....	23
3.5	Unwanted Emissions into Restricted Frequency Bands .....	29
3.6	Emissions in Non-Restricted Frequency Bands .....	57
<b>4</b>	<b>TEST LABORATORY INFORMATION .....</b>	<b>62</b>

---

## Release Record

Report No.	Version	Description	Issued Date
FR8N0502AC	Rev. 01	Initial issue	Nov. 26, 2018

## Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	Conducted Emissions	[dBuV]: 1.839MHz 32.95 (Margin -13.05dB) - AV	Pass
15.247(d) 15.209	Radiated Emissions	[dBuV/m at 3m]: 2390.00MHz 52.99 (Margin -1.01dB) - AV	Pass
15.247(b)(3)	Maximum Output Power	Max Power [dBm]: 26.40	Pass
15.247(a)(2)	6dB Bandwidth	Meet the requirement of limit	Pass
15.247(e)	Power Spectral Density	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

# 1 General Description

## 1.1 Information

### 1.1.1 Specification of the Equipment under Test (EUT)

RF General Information					
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N <sub>TX</sub> )	Data Rate / MCS
2400-2483.5	b	2412-2462	1-11 [11]	2	1-11 Mbps
2400-2483.5	g	2412-2462	1-11 [11]	2	6-54 Mbps
2400-2483.5	n (HT20)	2412-2462	1-11 [11]	2	MCS 0-15
2400-2483.5	n (HT40)	2422-2452	3-9 [7]	2	MCS 0-15

Note 1: RF output power specifies that Maximum Conducted (Average) Output Power.  
 Note 2: 802.11b uses a combination of DSSS-DBPSK, DQPSK, CCK modulation.  
 Note 3: 802.11g/n uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.

### 1.1.2 Antenna Details

Ant. No.	Model	Type	Connector	Operating Frequencies (MHz) / Antenna Gain (dBi)		
				2400~2483.5	5150~5250	5725~5850
1	2.4GHz single antenna	PCB	No	3	---	---
2	5GHz single antenna	PCB	No	---	5.1	5.1
3	Dual band antenna	Dipole	No	2.7	3.8	3.8

### 1.1.3 Power Supply Type of Equipment under Test (EUT)

<b>Power Supply Type</b>	12Vdc from adapter
--------------------------	--------------------

### 1.1.4 Accessories

Accessories		
No.	Equipment	Description
1	AC adapter	Brand: APD Model: WB-18D12FU Power Rating: I/P: 100-240Vac, 50-60Hz O/P: 12Vdc, 1.5A Power Line: 1.5m non-shielded without core
2	RJ45 (white)	1.5m non-shielded without core

### 1.1.5 Channel List

Frequency band (MHz)		2400~2483.5	
802.11 b / g / n HT20		802.11n HT40	
Channel	Frequency(MHz)	Channel	Frequency(MHz)
1	2412	3	2422
2	2417	4	2427
3	2422	5	2432
4	2427	6	2437
5	2432	7	2442
6	2437	8	2447
7	2442	9	2452
8	2447	---	---
9	2452	---	---
10	2457	---	---
11	2462	---	---

### 1.1.6 Test Tool and Duty Cycle

Test Tool	QRCT, V 3.0.106.0		
Duty Cycle and Duty Factor	Mode	Duty cycle (%)	Duty factor (dB)
	11b	100.00%	0.00
	11g	97.17%	0.12
	HT20	98.89%	0.05
	HT40	97.18%	0.12


### 1.1.7 Power Setting

Modulation Mode	Test Frequency (MHz)	Power Set
11b	2412	23
11b	2437	24.5
11b	2462	24
11g	2412	17.5
11g	2437	23.5
11g	2462	17
HT20	2412	17.5
HT20	2437	23
HT20	2462	17
HT40	2422	15
HT40	2437	18.5
HT40	2452	16

## 1.2 Local Support Equipment List

Support Equipment List					
No.	Equipment	Brand	Model	FCC ID	Remarks
1	Notebook	DELL	Latitude E6430	DoC	---
2	Notebook	DELL	Latitude E5470	DoC	---

## 1.3 Test Setup Chart

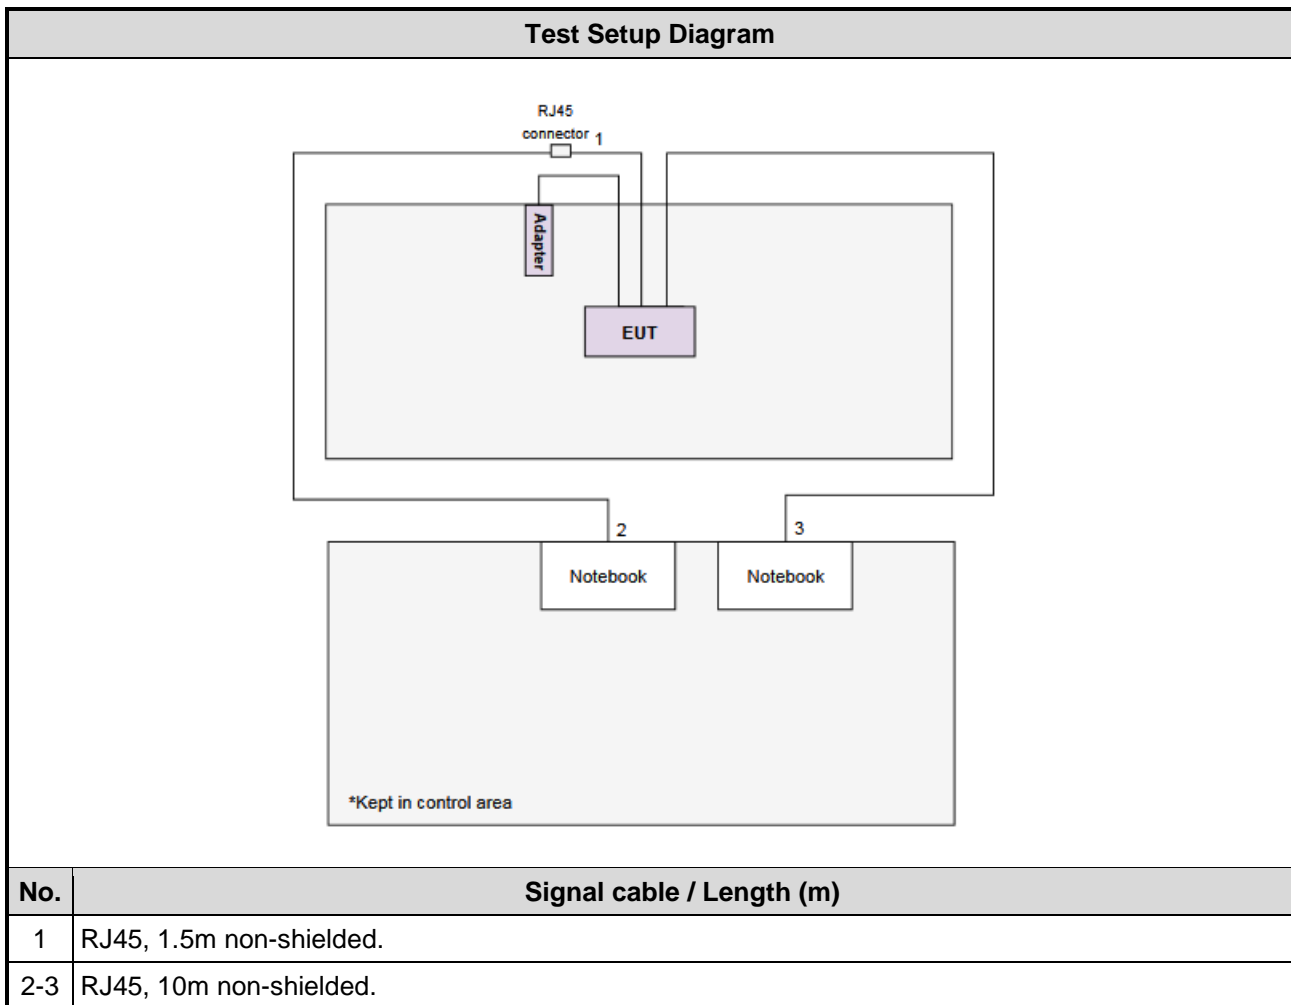



## 1.4 The Equipment List

<b>Test Item</b>	Conducted Emission				
<b>Test Site</b>	Conduction room 1 / (CO01-WS)				
<b>Tested Date</b>	Nov. 19, 2018				
<b>Instrument</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Calibration Date</b>	<b>Calibration Until</b>
Receiver	R&S	ESR3	101657	Jan. 05, 2018	Jan. 04, 2019
LISN	SCHWARZBECK	Schwarzbeck 8127	8127-667	Nov. 05, 2018	Nov. 04, 2019
RF Cable-CON	EMC	EMCCFD300-BM-BM-6000	50821	Dec. 18, 2017	Dec. 17, 2018
Measurement Software	AUDIX	e3	6.120210k	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

<b>Test Item</b>	Radiated Emission				
<b>Test Site</b>	966 chamber 3 / (03CH03-WS)				
<b>Tested Date</b>	Nov. 08 ~ Nov. 09, 2018				
<b>Instrument</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Calibration Date</b>	<b>Calibration Until</b>
Spectrum Analyzer	R&S	FSV40	101499	Jan. 03, 2018	Jan. 02, 2019
Receiver	R&S	ESR3	101658	Nov. 20, 2017	Nov. 19, 2018
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-685	Apr. 19, 2018	Apr. 18, 2019
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1206	Jan. 18, 2018	Jan. 17, 2019
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 23, 2017	Nov. 22, 2018
Loop Antenna	TESEQ	HLA 6120	31244	Mar. 29, 2018	Mar. 28, 2019
Preamplifier	EMC	EMC02325	980187	Aug. 24, 2018	Aug. 23, 2019
Preamplifier	Agilent	83017A	MY53270014	Aug. 09, 2018	Aug. 08, 2019
Preamplifier	EMC	EMC184045B	980192	Aug. 09, 2018	Aug. 08, 2019
RF cable-3M	HUBER+SUHNER	SUCOFLEX104	MY22620/4	Nov. 27, 2017	Nov. 26, 2018
RF cable-8M	HUBER+SUHNER	SUCOFLEX104	MY32487/4	Nov. 27, 2017	Nov. 26, 2018
RF cable-1M	HUBER+SUHNER	SUCOFLEX104	MY22624/4	Nov. 27, 2017	Nov. 26, 2018
LF cable-0.8M	EMC	EMC8D-NM-NM-800	EMC8D-NM-NM-800-001	Nov. 27, 2017	Nov. 26, 2018
LF cable-3M	EMC	EMC8D-NM-NM-3000	131103	Nov. 27, 2017	Nov. 26, 2018
LF cable-13M	EMC	EMC8D-NM-NM-13000	131104	Nov. 27, 2017	Nov. 26, 2018
Measurement Software	AUDIX	e3	6.120210g	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

<b>Test Item</b>	RF Conducted				
<b>Test Site</b>	(TH01-WS)				
<b>Tested Date</b>	Nov. 16 ~ Nov. 20, 2018				
<b>Instrument</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Calibration Date</b>	<b>Calibration Until</b>
Spectrum Analyzer	R&S	FSV40	101063	Apr. 16, 2018	Apr. 15, 2019
Power Meter	Anritsu	ML2495A	1241002	Oct. 09, 2018	Oct. 08, 2019
Power Sensor	Anritsu	MA2411B	1207366	Oct. 09, 2018	Oct. 08, 2019
AC POWER SOURCE	APC	AFC-500W	F312060012	Dec. 01, 2017	Nov. 30, 2018
Measurement Software	Sporton	Sporton_1	1.3.30	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

## 1.5 Test Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.247

ANSI C63.10-2013

FCC KDB 558074 D01 15.247 Meas Guidance v05

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

## 1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ( $k=2$ ))

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	±34.134 Hz
Conducted power	±0.808 dB
Power density	±0.463 dB
Conducted emission	±2.670 dB
AC conducted emission	±2.90 dB
Radiated emission ≤ 1GHz	±3.66 dB
Radiated emission > 1GHz	±5.37 dB

## 2 Test Configuration

### 2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
AC Conduction	CO01-WS	25°C / 56%	Alex Tsai
Radiated Emissions	03CH03-WS	24-25°C / 62-63%	Akun Chung Aska Huang
RF Conducted	TH01-WS	23°C / 62%	Felix Sung

- FCC Designation No.: TW0009
- FCC site registration No.: 207696
- IC site registration No.: 10807C-1

### 2.2 The Worst Test Modes and Channel Details

Test item	Modulation Mode	Test Frequency (MHz)	Data Rate	Test Configuration
Conducted Emissions	11b	2437	1 Mbps	---
Radiated Emissions ≤1GHz	11b	2437	1 Mbps	---
Radiated Emissions >1GHz	11b	2412 / 2437 / 2462	1 Mbps	---
Maximum Output Power	11g	2412 / 2437 / 2462	6 Mbps	
6dB bandwidth	HT20	2412 / 2437 / 2462	MCS 0	
Power spectral density	HT40	2422 / 2437 / 2452	MCS 0	

## 3 Transmitter Test Results

### 3.1 Conducted Emissions

#### 3.1.1 Limit of Conducted Emissions


Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: \* Decreases with the logarithm of the frequency.

#### 3.1.2 Test Procedures

1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50  $\Omega$  LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V / 60Hz.

#### 3.1.3 Test Setup

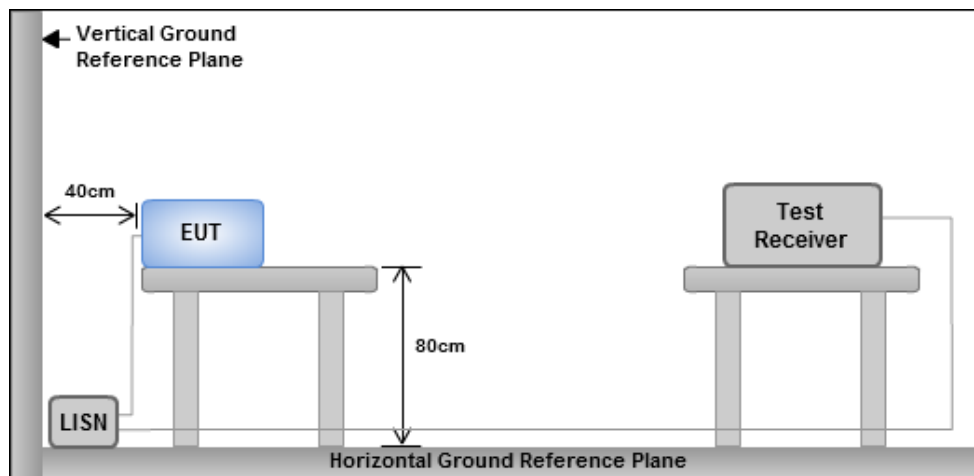


- Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

### 3.1.4 Test Result of Conducted Emissions

<b>Modulation</b>	11b	<b>Test Freq. (MHz)</b>	2437
<b>Power Phase</b>	Line		


  

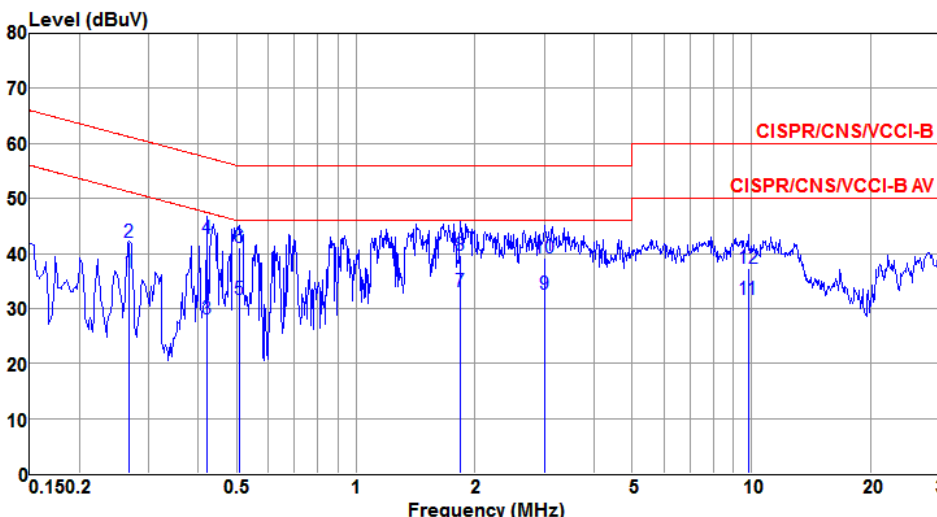

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.267	36.64	51.20	-14.56	36.42	0.06	0.03	Average
2	0.267	41.97	61.20	-19.23	41.75	0.06	0.03	QP
3	0.419	28.10	47.46	-19.36	27.87	0.06	0.02	Average
4	0.419	42.65	57.46	-14.81	42.42	0.06	0.02	QP
5	0.507	31.69	46.00	-14.31	31.43	0.07	0.02	Average
6	0.507	41.17	56.00	-14.83	40.91	0.07	0.02	QP
7*	1.839	32.95	46.00	-13.05	32.53	0.09	0.09	Average
8	1.839	39.73	56.00	-16.27	39.31	0.09	0.09	QP
9	3.009	32.51	46.00	-13.49	31.99	0.10	0.17	Average
10	3.009	39.23	56.00	-16.77	38.71	0.10	0.17	QP
11	9.809	31.69	50.00	-18.31	30.90	0.18	0.32	Average
12	9.809	37.27	60.00	-22.73	36.48	0.18	0.32	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).  
 Note 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

<b>Modulation</b>	11b	<b>Test Freq. (MHz)</b>	2437
<b>Power Phase</b>	Neutral		

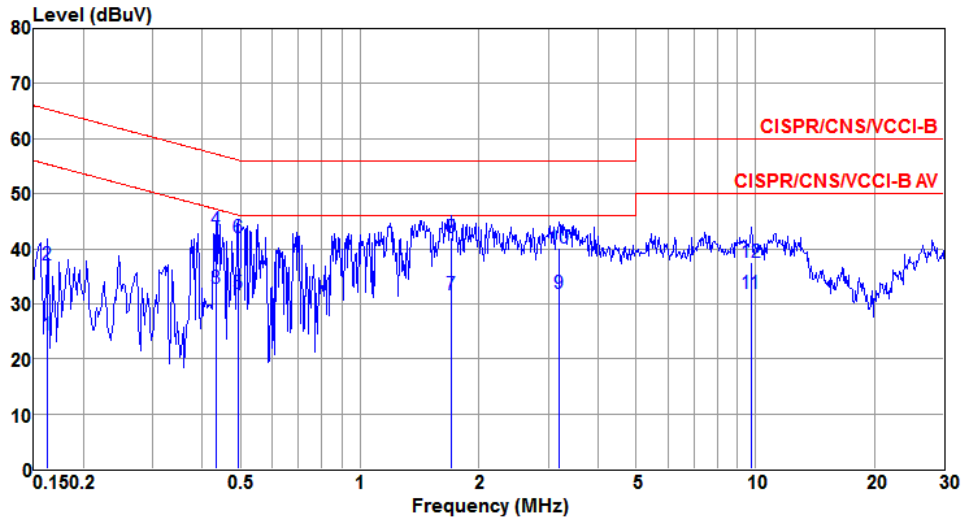

	Freq	Level	Limit	Over	Read	LISN	cable	Remark
	MHz	dBuV	Line	Limit	Level	factor	loss	
			dBuV	dB	dBuV	dB	dB	
1	0.162	24.26	55.34	-31.08	24.09	0.05	0.02	Average
2	0.162	37.13	65.34	-28.21	36.96	0.05	0.02	QP
3	0.433	32.78	47.20	-14.42	32.55	0.05	0.02	Average
4*	0.433	43.33	57.20	-13.87	43.10	0.05	0.02	QP
5	0.491	31.79	46.14	-14.35	31.56	0.05	0.02	Average
6	0.491	42.05	56.14	-14.09	41.82	0.05	0.02	QP
7	1.707	31.72	46.00	-14.28	31.34	0.07	0.08	Average
8	1.707	42.04	56.00	-13.96	41.66	0.07	0.08	QP
9	3.190	31.93	46.00	-14.07	31.42	0.08	0.18	Average
10	3.190	40.21	56.00	-15.79	39.70	0.08	0.18	QP
11	9.757	31.83	50.00	-18.17	31.04	0.18	0.32	Average
12	9.757	37.63	60.00	-22.37	36.84	0.18	0.32	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).  
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

## 3.2 6dB and Occupied Bandwidth

### 3.2.1 Limit of 6dB Bandwidth

The minimum 6dB bandwidth shall be at least 500 kHz.

### 3.2.2 Test Procedures

#### 6dB Bandwidth

1. Set resolution bandwidth (RBW) = 100 kHz, Video bandwidth = 300 kHz.
2. Detector = Peak, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

#### Occupied Bandwidth

1. Set resolution bandwidth (RBW) = 1% ~ 5 % of OBW, Video bandwidth = 3 x RBW
2. Detector = Sample, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Use the OBW measurement function of spectrum analyzer to measure the occupied bandwidth.

### 3.2.3 Test Setup



### 3.2.4 Test Result of 6dB and Occupied Bandwidth

#### Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
802.11b_Nss1,(1Mbps)_2TX	8.043M	13.531M	13M5G1D	7.029M	12.59M
802.11g_Nss1,(6Mbps)_2TX	16.377M	20.912M	20M9D1D	16.087M	16.57M
802.11n HT20_Nss1,(MCS0)_2TX	17.609M	19.682M	19M7D1D	17.536M	17.728M
802.11n HT40_Nss1,(MCS0)_2TX	36.232M	36.469M	36M5D1D	35.362M	36.324M

**Max-N dB** = Maximum 6dB down bandwidth; **Max-OBW** = Maximum 99% occupied bandwidth;  
**Min-N dB** = Minimum 6dB down bandwidth; **Min-OBW** = Minimum 99% occupied bandwidth;

#### Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11b_Nss1,(1Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	500k	7.029M	12.59M	8.043M	13.025M
2437MHz	Pass	500k	7.029M	13.025M	8.043M	13.531M
2462MHz	Pass	500k	7.029M	13.097M	8.043M	13.169M
802.11g_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	500k	16.377M	16.643M	16.304M	16.643M
2437MHz	Pass	500k	16.377M	19.537M	16.304M	20.912M
2462MHz	Pass	500k	16.087M	16.57M	16.304M	16.57M
802.11n HT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	500k	17.609M	17.873M	17.609M	17.8M
2437MHz	Pass	500k	17.609M	18.741M	17.536M	19.682M
2462MHz	Pass	500k	17.609M	17.728M	17.609M	17.8M
802.11n HT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2422MHz	Pass	500k	36.232M	36.324M	36.087M	36.469M
2437MHz	Pass	500k	35.507M	36.324M	36.232M	36.469M
2452MHz	Pass	500k	35.362M	36.324M	36.087M	36.469M


**Port X-N dB** = Port X 6dB down bandwidth; **Port X-OBW** = Port X 99% occupied bandwidth;



### 802.11b\_Nss1,(1Mbps)\_2TX

EBW


2412MHz

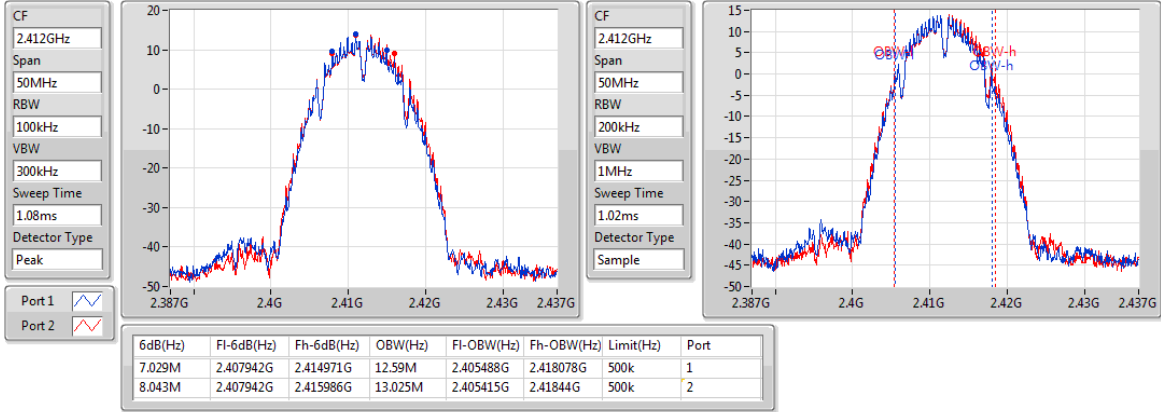

### 802.11b\_Nss1,(1Mbps)\_2TX

EBW


2437MHz

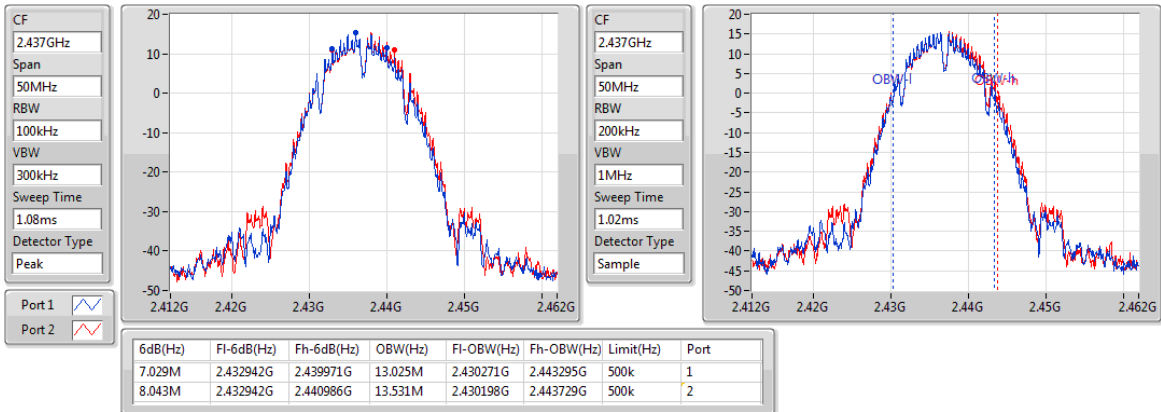

### 802.11b\_Nss1,(1Mbps)\_2TX

EBW


2462MHz

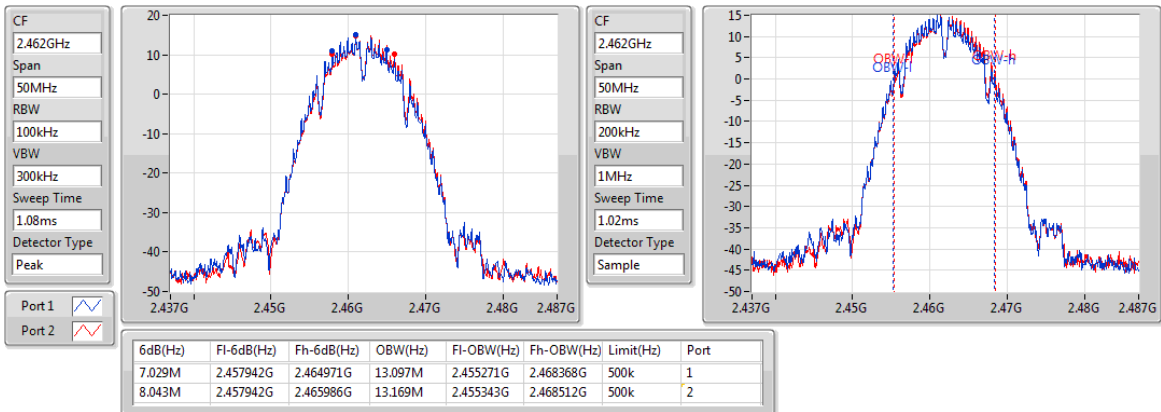

### 802.11g\_Nss1,(6Mbps)\_2TX

EBW


2412MHz

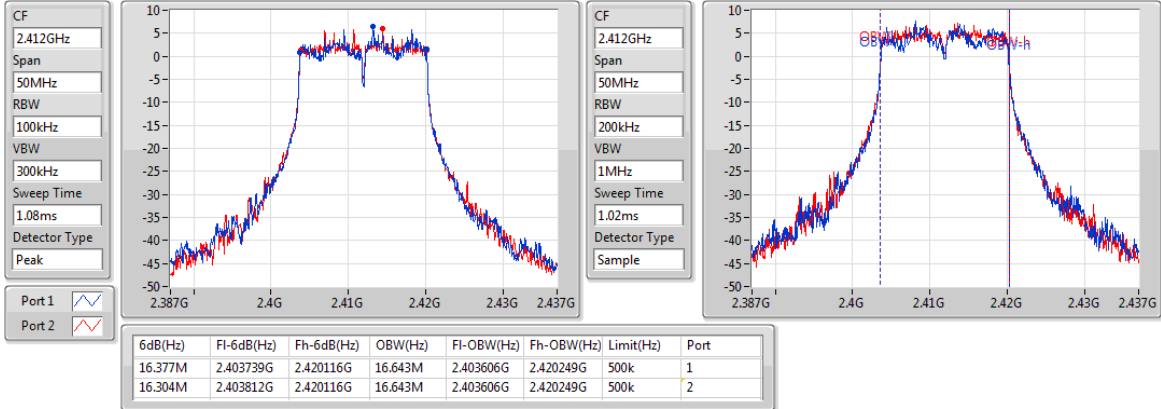

### 802.11g\_Nss1,(6Mbps)\_2TX

EBW


2437MHz

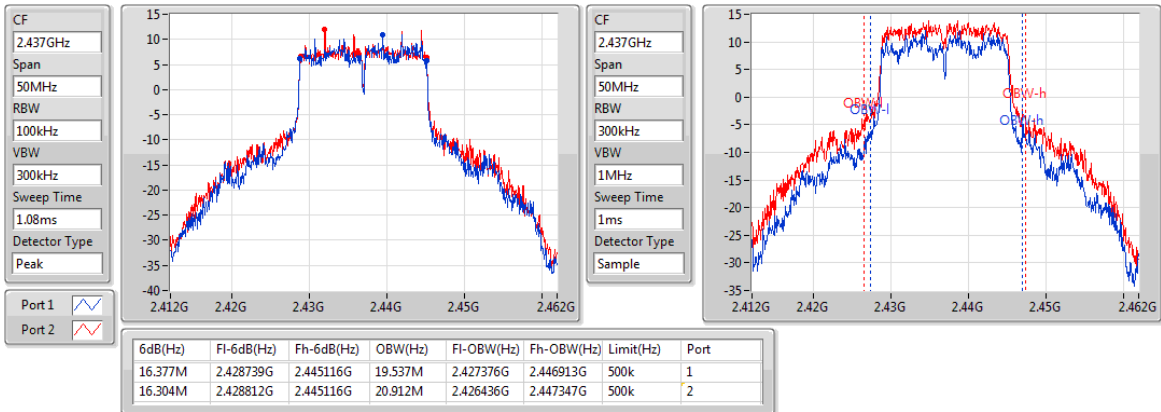

### 802.11g\_Nss1,(6Mbps)\_2TX

EBW


2462MHz

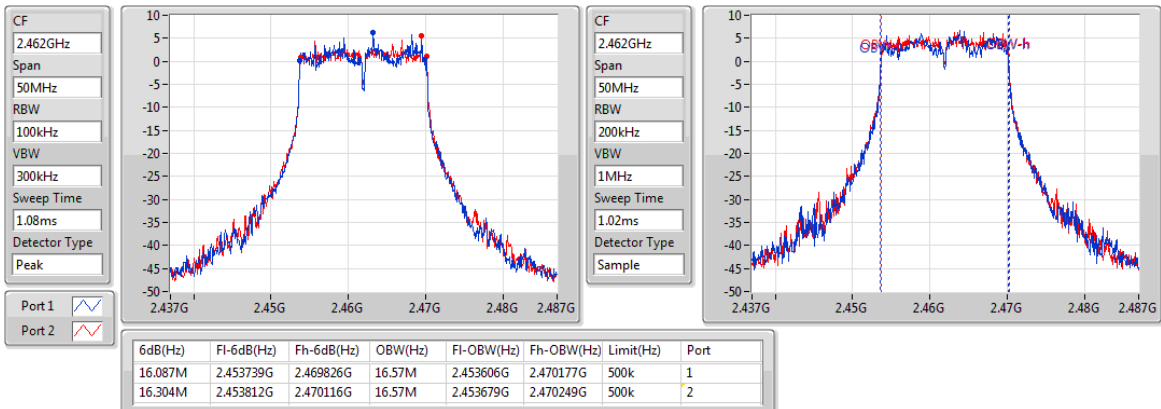

### 802.11n HT20\_Nss1,(MCS0)\_2TX

EBW


#### 2412MHz

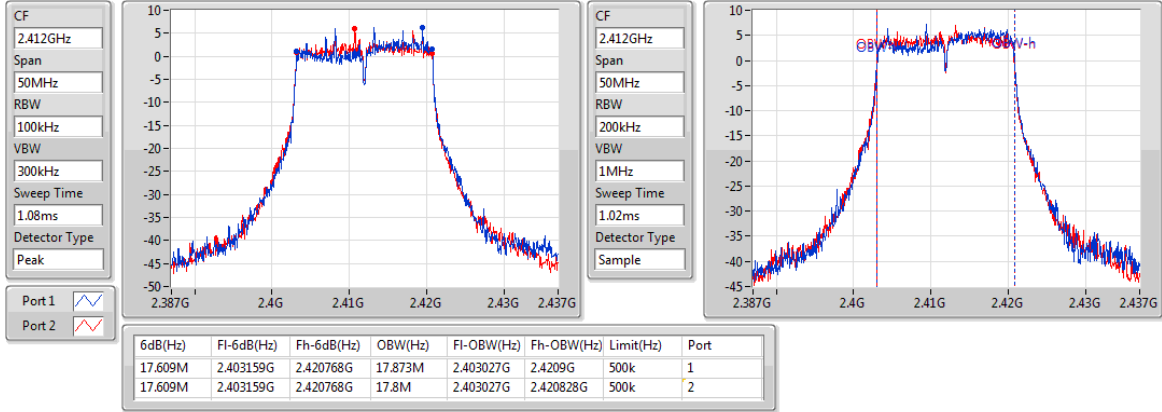

### 802.11n HT20\_Nss1,(MCS0)\_2TX

EBW


#### 2437MHz

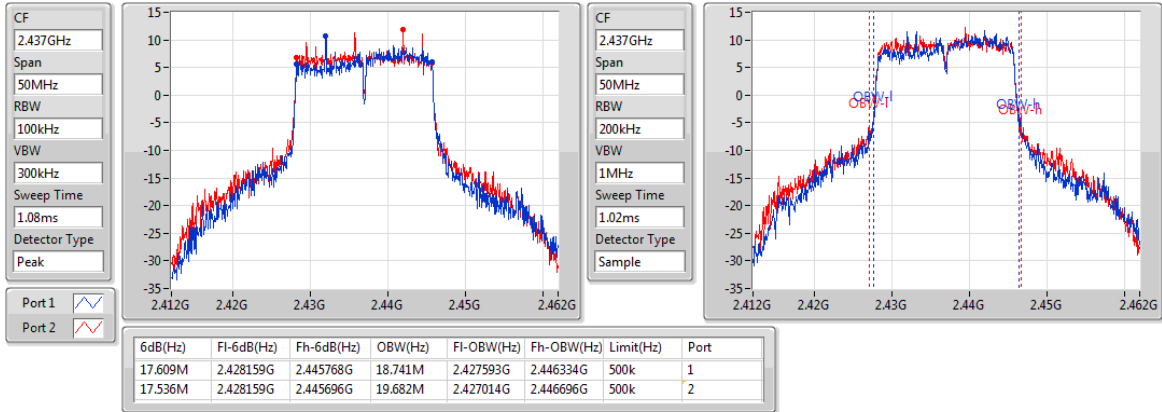

### 802.11n HT20\_Nss1,(MCS0)\_2TX

EBW


#### 2462MHz

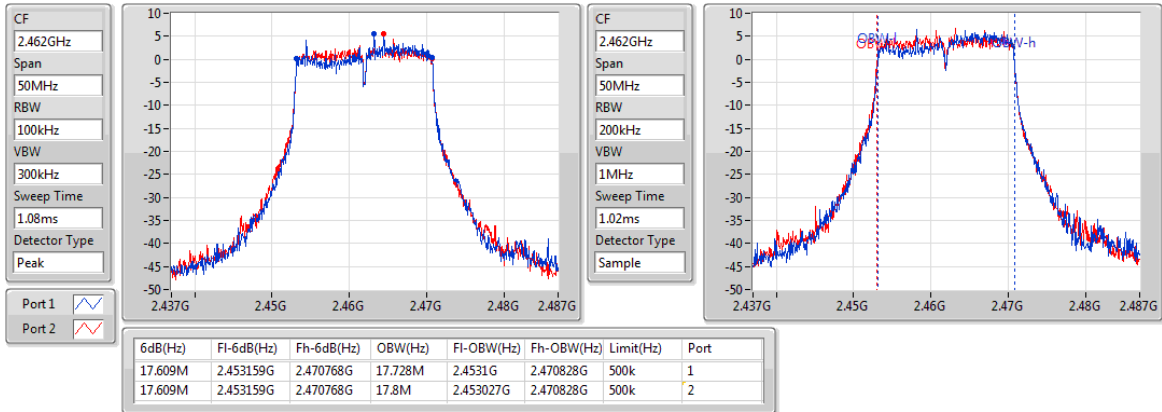

### 802.11n HT40\_Nss1,(MCS0)\_2TX

EBW


2422MHz

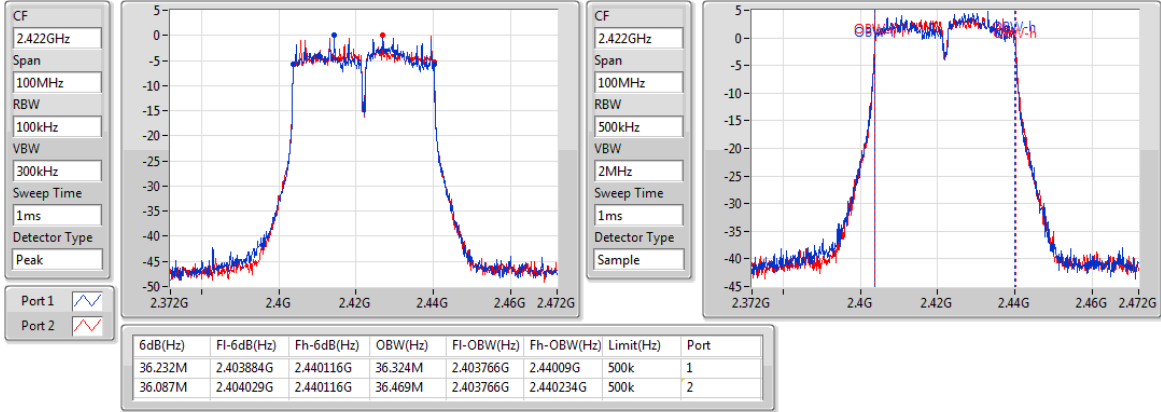

### 802.11n HT40\_Nss1,(MCS0)\_2TX

EBW


2437MHz

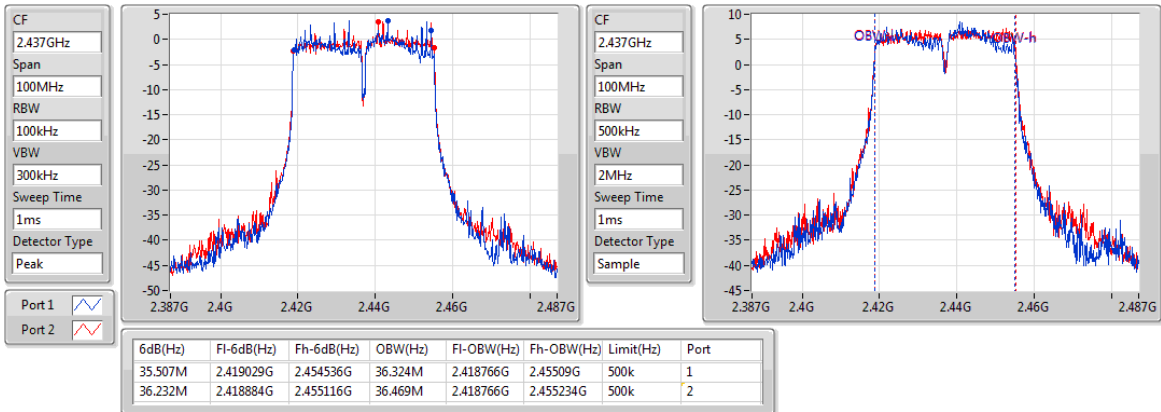

### 802.11n HT40\_Nss1,(MCS0)\_2TX

EBW

2452MHz

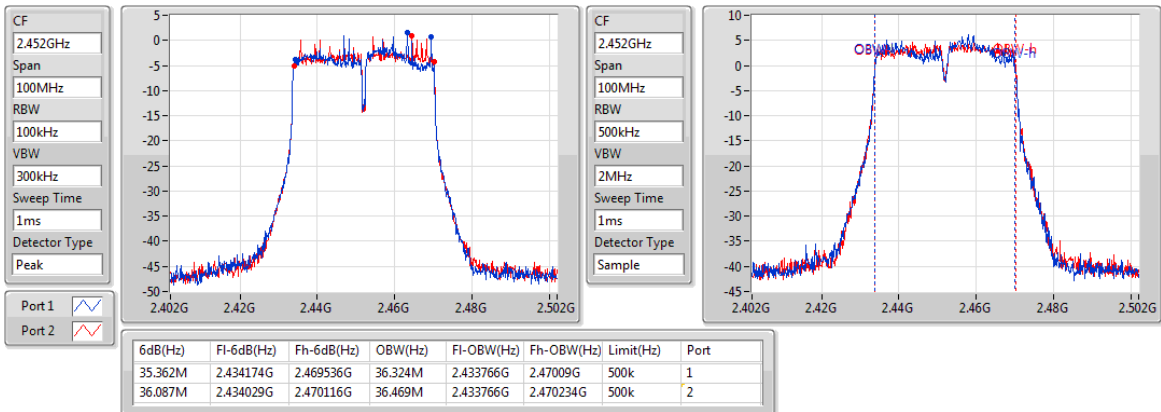

### 3.3 RF Output Power

#### 3.3.1 Limit of RF Output Power


Conducted power shall not exceed 1Watt.

Antenna gain  $\leq 6\text{dBi}$ , no any corresponding reduction is in output power limit.

#### 3.3.2 Test Procedures

A broadband RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.

#### 3.3.3 Test Setup



### 3.3.4 Test Result of Maximum Output Power

#### Summary of Conducted (Average) Output Power

Mode	Total Power (dBm)	Total Power (W)
2.4-2.4835GHz	-	-
802.11b_Nss1,(1Mbps)_2TX	26.40	0.43652
802.11g_Nss1,(6Mbps)_2TX	25.79	0.37931
802.11n HT20_Nss1,(MCS0)_2TX	25.31	0.33963
802.11n HT40_Nss1,(MCS0)_2TX	20.56	0.11376

#### Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11b_Nss1,(1Mbps)_2TX	-	-	-	-	-	-	-	-
2412MHz	Pass	3.00	21.97	21.55	24.78	30.00	27.78	36.00
2437MHz	Pass	3.00	23.64	23.12	26.40	30.00	29.40	36.00
2462MHz	Pass	3.00	23.27	22.76	26.03	30.00	29.03	36.00
802.11g_Nss1,(6Mbps)_2TX	-	-	-	-	-	-	-	-
2412MHz	Pass	3.00	17.57	17.22	20.41	30.00	23.41	36.00
2437MHz	Pass	3.00	22.97	22.58	25.79	30.00	28.79	36.00
2462MHz	Pass	3.00	17.18	16.89	20.05	30.00	23.05	36.00
802.11n HT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
2412MHz	Pass	3.00	17.55	16.97	20.28	30.00	23.28	36.00
2437MHz	Pass	3.00	22.51	22.08	25.31	30.00	28.31	36.00
2462MHz	Pass	3.00	17.13	16.91	20.03	30.00	23.03	36.00
802.11n HT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
2422MHz	Pass	3.00	14.37	14.08	17.24	30.00	20.24	36.00
2437MHz	Pass	3.00	17.71	17.38	20.56	30.00	23.56	36.00
2452MHz	Pass	3.00	15.37	14.72	18.07	30.00	21.07	36.00

DG = Directional Gain; Port X = Port X output power

## 3.4 Power Spectral Density

### 3.4.1 Limit of Power Spectral Density

Power spectral density shall not be greater than 8 dBm in any 3 kHz band.

### 3.4.2 Test Procedures

#### Peak PSD

1. Set the RBW = 3 kHz, VBW = 10 kHz.
2. Detector = Peak, Sweep time = auto couple.
3. Trace mode = max hold, allow trace to fully stabilize.
4. Use the peak marker function to determine the maximum amplitude level.


#### Average PSD, duty cycle $\geq 98\%$

1. Set the RBW = 30 kHz, VBW = 100 kHz.
2. Detector = RMS, Sweep time = auto couple.
3. Sweep time = auto couple.
4. Employ trace averaging (RMS) mode over a minimum of 100 traces.
5. Use the peak marker function to determine the maximum amplitude level.

#### Average PSD, duty cycle $< 98\%$

1. Set the RBW = 30 kHz, VBW = 100 kHz. Detector = RMS.
2. Set the sweep time to:  $\geq 10$  (number of measurement points in sweep) x (total on/off period of the transmitted signal).
3. Perform the measurement over a single sweep.
4. Use the peak marker function to determine the maximum amplitude level.
5. Add  $10 \log (1/x)$ , where x is the duty cycle.

### 3.4.3 Test Setup

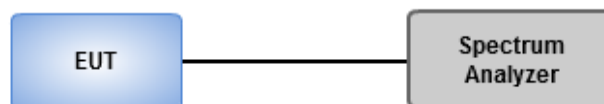

### 3.4.4 Test Result of Power Spectral Density

#### Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
802.11b_Nss1,(1Mbps)_2TX	4.79
802.11g_Nss1,(6Mbps)_2TX	0.80
802.11n HT20_Nss1,(MCS0)_2TX	0.74
802.11n HT40_Nss1,(MCS0)_2TX	-7.24

RBW=3kHz.

#### Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11b_Nss1,(1Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	5.86	0.58	0.41	3.07	8.00
2437MHz	Pass	5.86	1.97	2.19	4.79	8.00
2462MHz	Pass	5.86	1.41	1.40	4.38	8.00
802.11g_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	5.86	-6.76	-7.64	-4.27	8.00
2437MHz	Pass	5.86	-1.88	-2.28	0.80	8.00
2462MHz	Pass	5.86	-7.37	-8.09	-4.77	8.00
802.11n HT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	5.86	-6.32	-7.20	-4.00	8.00
2437MHz	Pass	5.86	-1.68	-1.91	0.74	8.00
2462MHz	Pass	5.86	-6.80	-7.21	-4.01	8.00
802.11n HT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2422MHz	Pass	5.86	-13.15	-13.84	-10.56	8.00
2437MHz	Pass	5.86	-9.90	-10.44	-7.24	8.00
2452MHz	Pass	5.86	-12.21	-12.97	-9.64	8.00

DG = Directional Gain;

PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; **Port X** = Port X power density;


Directional gain =  $10 * \log((10^{3/20} + 10^{2.7/20})^2 / 2) = 5.86$  dBi



### 802.11b\_Nss1,(1Mbps)\_2TX

PSD

2412MHz

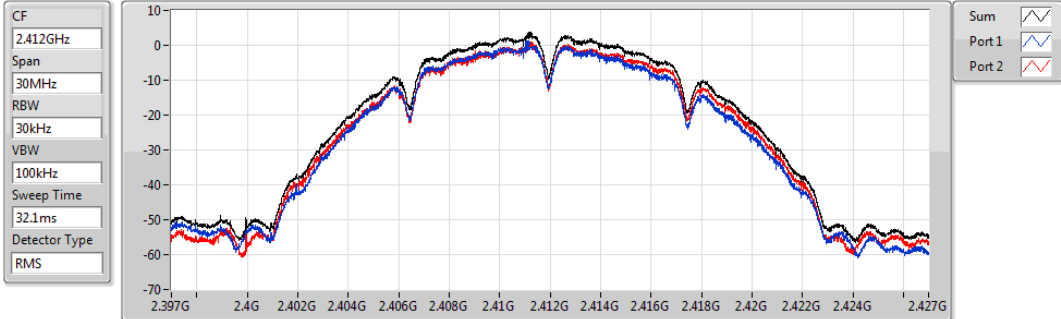


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
3.07	3.07	0.58	0.41

### 802.11b\_Nss1,(1Mbps)\_2TX

PSD

2437MHz

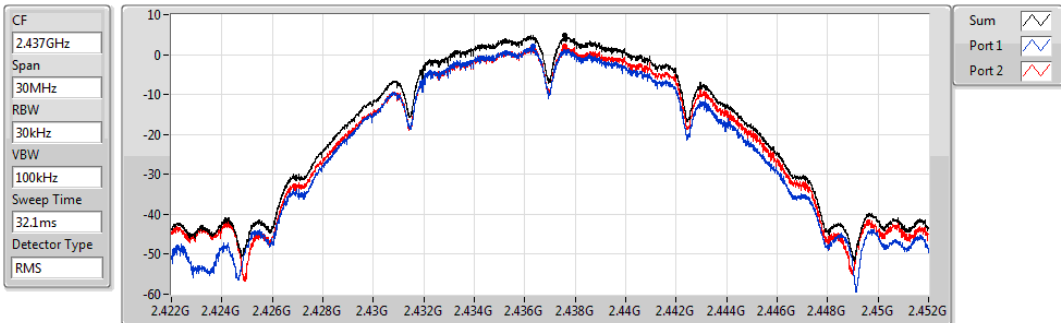


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
4.79	4.79	1.97	2.19

### 802.11b\_Nss1,(1Mbps)\_2TX

PSD

2462MHz

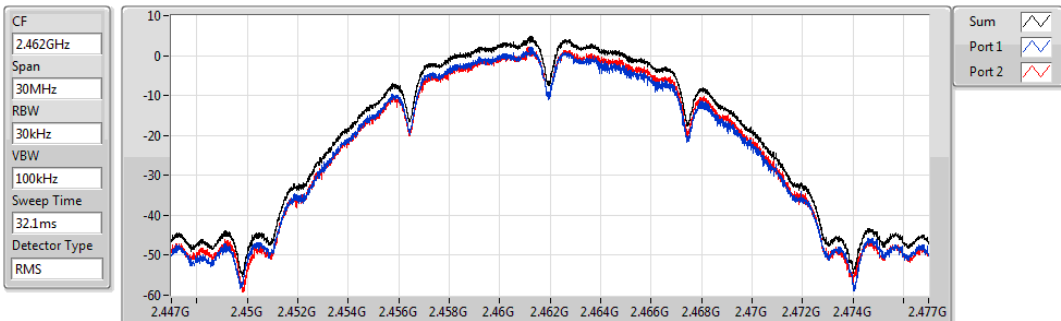


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
4.38	4.38	1.41	1.40

### 802.11g\_Nss1,(6Mbps)\_2TX

PSD

2412MHz

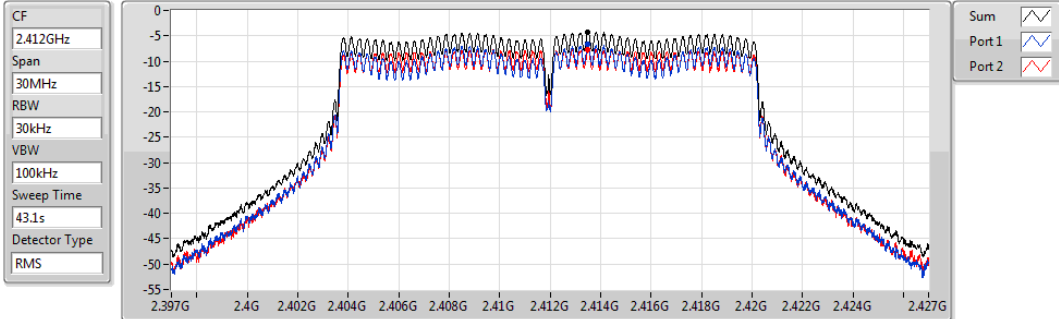


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-4.27	-4.27	-6.76	-7.64

### 802.11g\_Nss1,(6Mbps)\_2TX

PSD

2437MHz

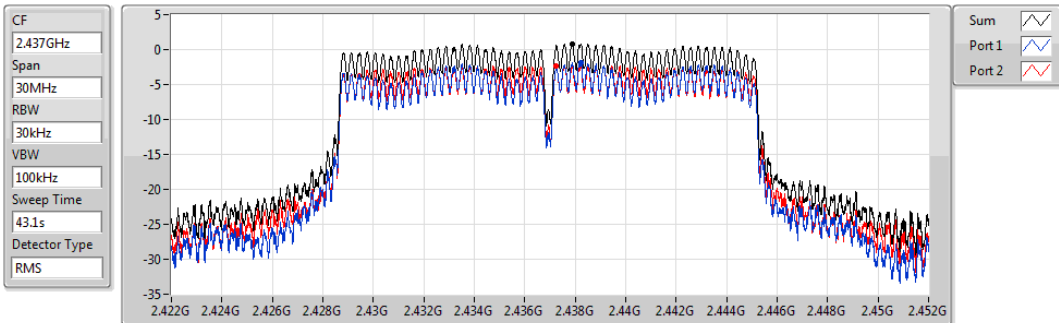


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
0.80	0.80	-1.88	-2.28

### 802.11g\_Nss1,(6Mbps)\_2TX

PSD

2462MHz

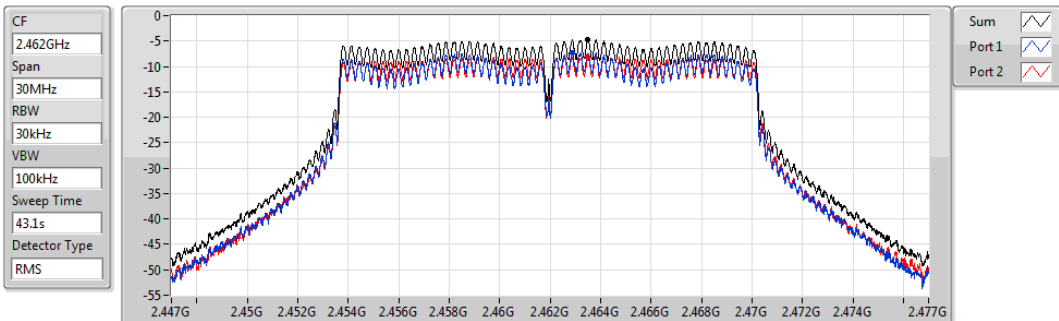


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-4.77	-4.77	-7.37	-8.09

### 802.11n HT20\_Nss1,(MCS0)\_2TX

PSD

2412MHz

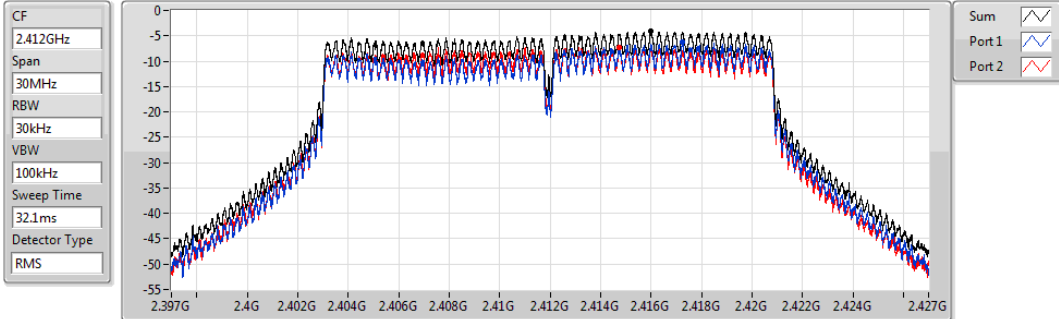


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-4.00	-4.00	-6.32	-7.20

### 802.11n HT20\_Nss1,(MCS0)\_2TX

PSD

2437MHz

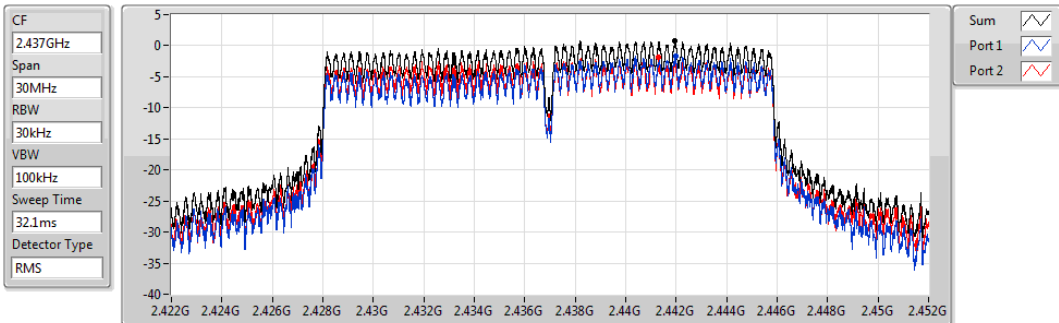


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
0.74	0.74	-1.68	-1.91

### 802.11n HT20\_Nss1,(MCS0)\_2TX

PSD

2462MHz

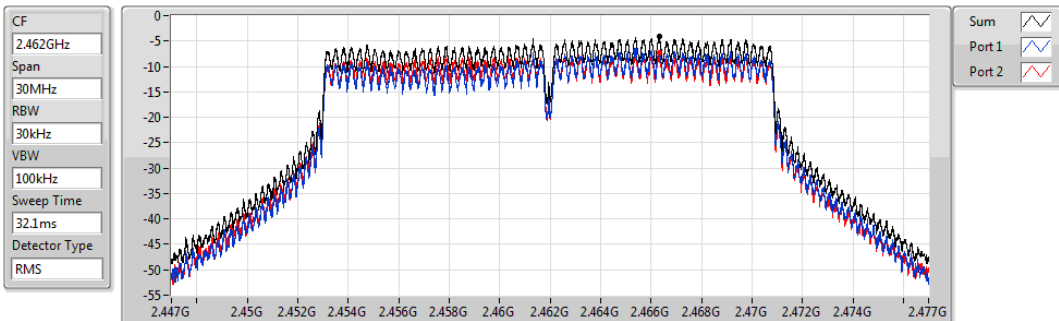


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-4.01	-4.01	-6.80	-7.21

### 802.11n HT40\_Nss1,(MCS0)\_2TX

PSD

2422MHz

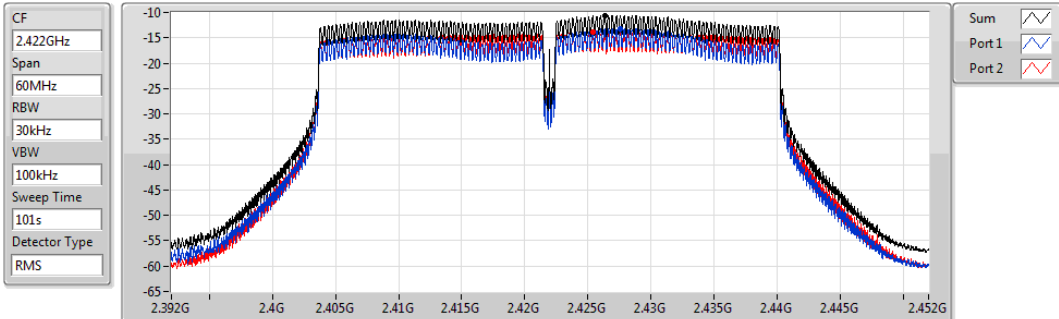


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-10.56	-10.56	-13.15	-13.84

### 802.11n HT40\_Nss1,(MCS0)\_2TX

PSD

2437MHz

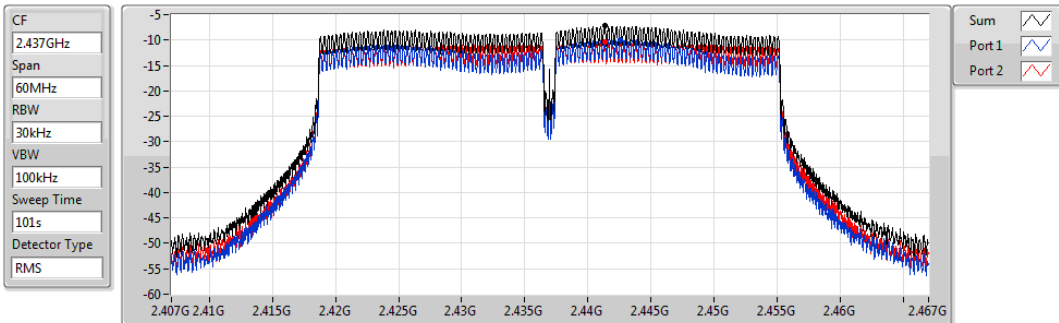


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-7.24	-7.24	-9.90	-10.44

### 802.11n HT40\_Nss1,(MCS0)\_2TX

PSD

2452MHz

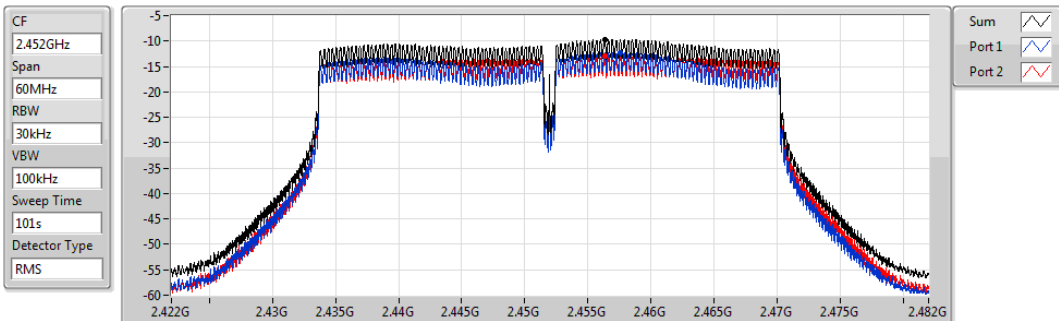

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-9.64	-9.64	-12.21	-12.97

## 3.5 Unwanted Emissions into Restricted Frequency Bands

### 3.5.1 Limit of Unwanted Emissions into Restricted Frequency Bands

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

**Note 1:**  
Quasi-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

**Note 2:**  
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.


### 3.5.2 Test Procedures

1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

**Note:**


1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

### 3.5.3 Test Setup

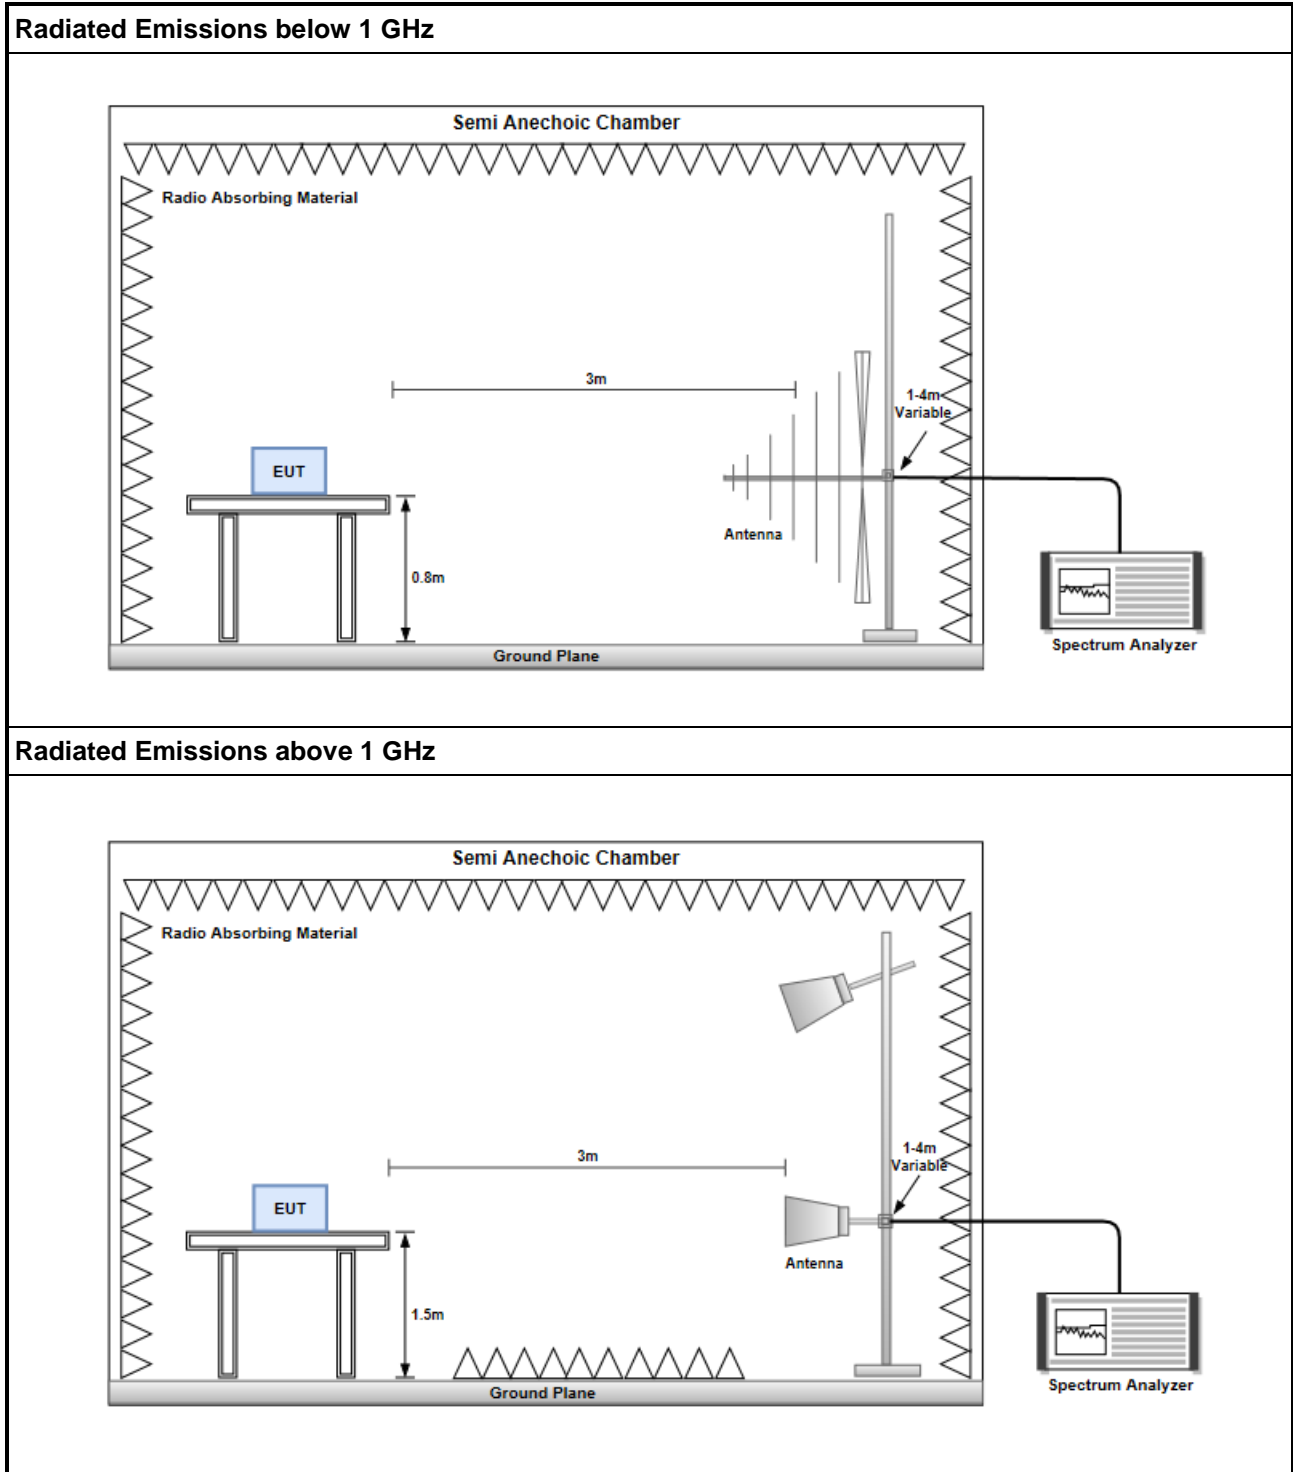

### 3.5.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

<b>Modulation</b>	11b	<b>Test Freq. (MHz)</b>	2437
<b>Polarization</b>	Horizontal		

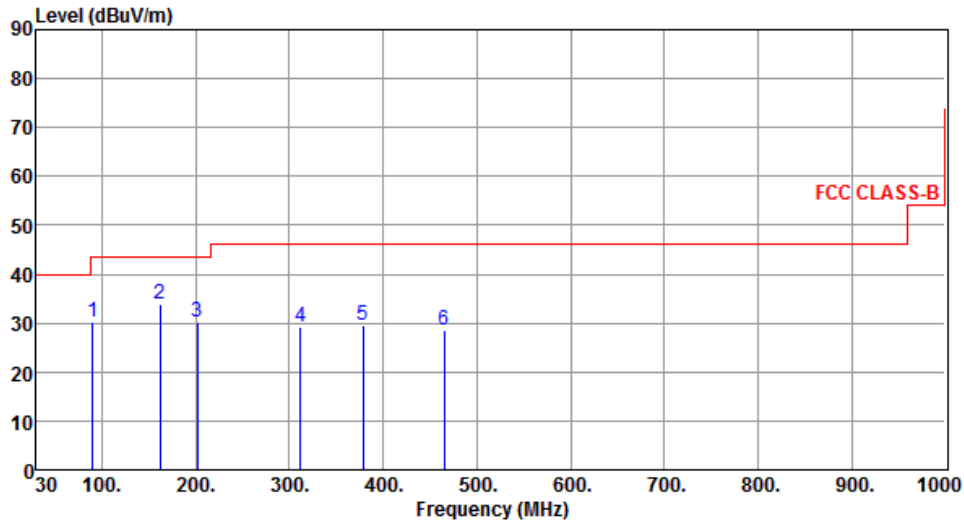

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	90.14	30.33	43.50	-13.17	44.79	-14.46	Peak	---	---
2	161.92	33.72	43.50	-9.78	41.99	-8.27	Peak	---	---
3	201.69	30.31	43.50	-13.19	41.33	-11.02	Peak	---	---
4	312.27	29.07	46.00	-16.93	36.44	-7.37	Peak	---	---
5	378.23	29.61	46.00	-16.39	35.20	-5.59	Peak	---	---
6	465.53	28.52	46.00	-17.48	31.98	-3.46	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

<b>Modulation</b>	11b	<b>Test Freq. (MHz)</b>	2437
<b>Polarization</b>	Vertical		

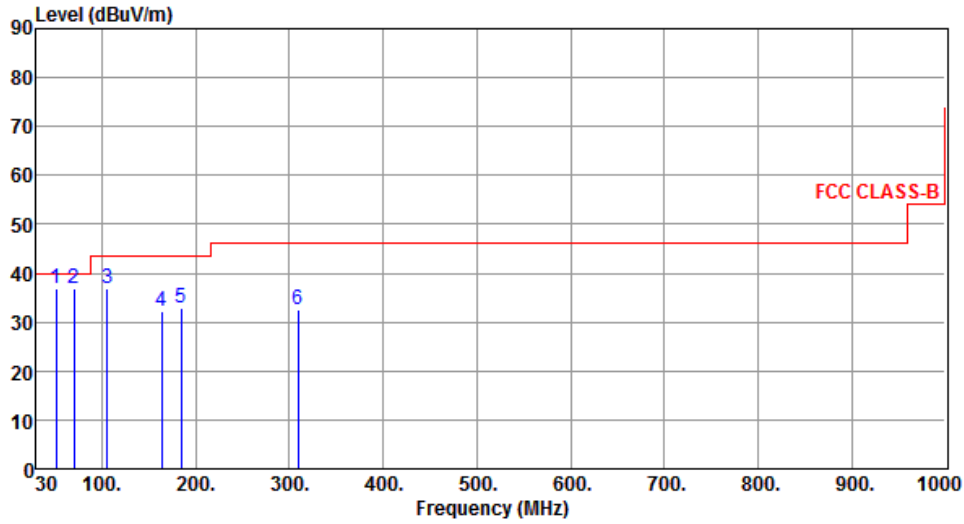

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	51.28	36.75	40.00	-3.25	44.71	-7.96	QP	100	5
2	69.77	36.74	40.00	-3.26	47.19	-10.45	Peak	---	---
3	105.66	36.81	43.50	-6.69	49.34	-12.53	Peak	---	---
4	163.86	32.07	43.50	-11.43	40.40	-8.33	Peak	---	---
5	184.23	32.80	43.50	-10.70	42.98	-10.18	Peak	---	---
6	309.36	32.53	46.00	-13.47	39.97	-7.44	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



### 3.5.5 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11b

<b>Modulation</b>	11b	<b>Test Freq. (MHz)</b>	2412
<b>Polarization</b>	Horizontal		


  

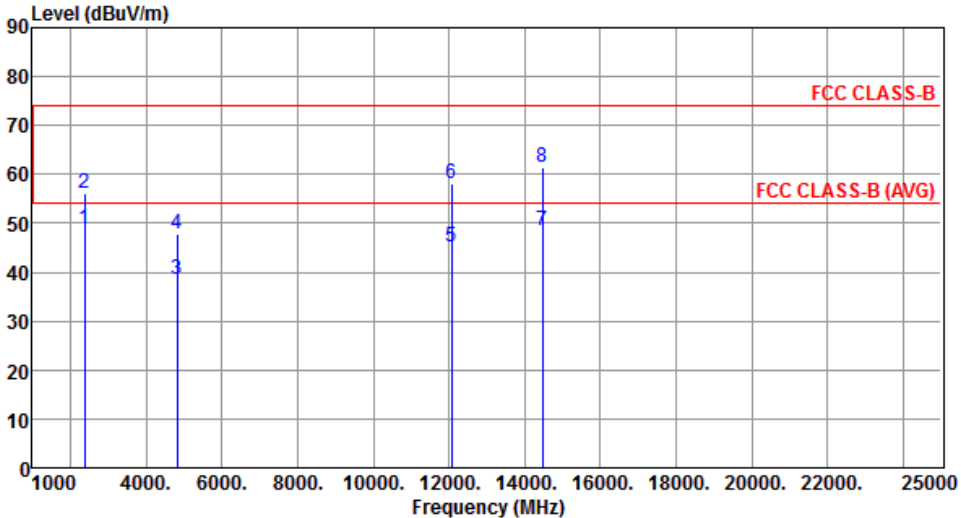

	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	48.88	54.00	-5.12	50.12	-1.24	Average	100	60
2	2390.00	56.17	74.00	-17.83	57.41	-1.24	Peak	100	60
3	4824.00	38.68	54.00	-15.32	33.12	5.56	Average	100	160
4	4824.00	47.71	74.00	-26.29	42.15	5.56	Peak	100	160
5	12060.00	45.08	54.00	-8.92	29.41	15.67	Average	100	30
6	12060.00	58.06	74.00	-15.94	42.39	15.67	Peak	100	30
7	14472.00	48.54	54.00	-5.46	29.45	19.09	Average	100	50
8	14472.00	61.50	74.00	-12.50	42.41	19.09	Peak	100	50

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor\* (dB)  
\*Factor includes antenna factor , cable loss and amplifier gain  
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

<b>Modulation</b>	11b	<b>Test Freq. (MHz)</b>	2412
<b>Polarization</b>	Vertical		

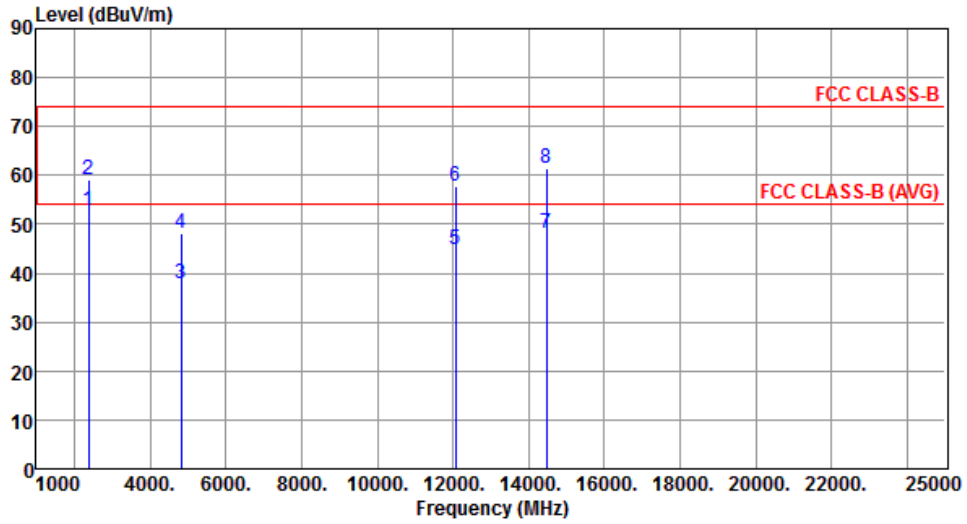


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	52.75	54.00	-1.25	53.99	-1.24	Average	216	89
2	2390.00	58.96	74.00	-15.04	60.20	-1.24	Peak	216	89
3	4824.00	37.72	54.00	-16.28	32.16	5.56	Average	100	359
4	4824.00	48.10	74.00	-25.90	42.54	5.56	Peak	100	359
5	12060.00	44.93	54.00	-9.07	29.26	15.67	Average	100	70
6	12060.00	57.78	74.00	-16.22	42.11	15.67	Peak	100	70
7	14472.00	48.30	54.00	-5.70	29.21	19.09	Average	100	30
8	14472.00	61.56	74.00	-12.44	42.47	19.09	Peak	100	30

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11b	<b>Test Freq. (MHz)</b>	2437
<b>Polarization</b>	Horizontal		

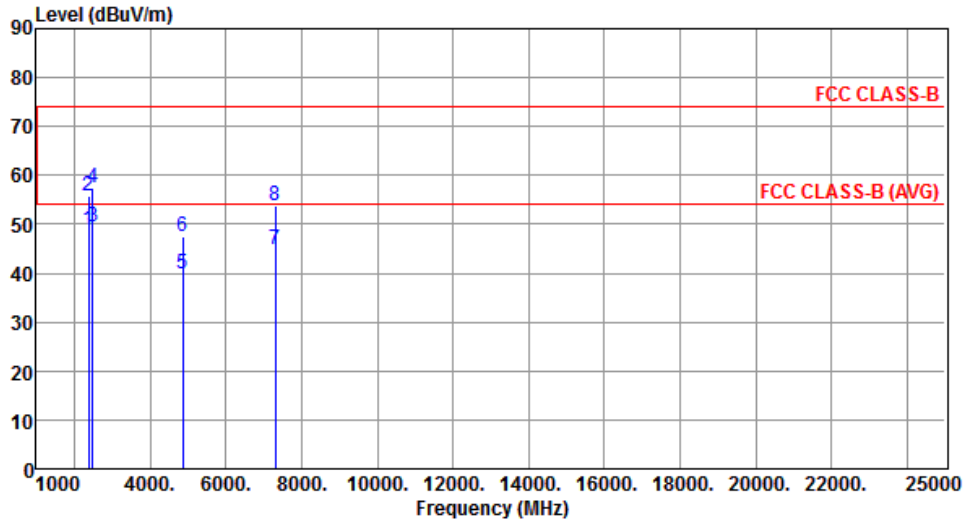


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	48.88	54.00	-5.12	50.12	-1.24	Average	100	54
2	2390.00	55.74	74.00	-18.26	56.98	-1.24	Peak	100	54
3	2483.50	49.51	54.00	-4.49	50.39	-0.88	Average	100	54
4	2483.50	57.58	74.00	-16.42	58.46	-0.88	Peak	100	54
5	4874.00	39.78	54.00	-14.22	34.09	5.69	Average	100	158
6	4874.00	47.42	74.00	-26.58	41.73	5.69	Peak	100	158
7	7311.00	44.79	54.00	-9.21	33.91	10.88	Average	125	340
8	7311.00	53.69	74.00	-20.31	42.81	10.88	Peak	125	340

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11b	<b>Test Freq. (MHz)</b>	2437
<b>Polarization</b>	Vertical		

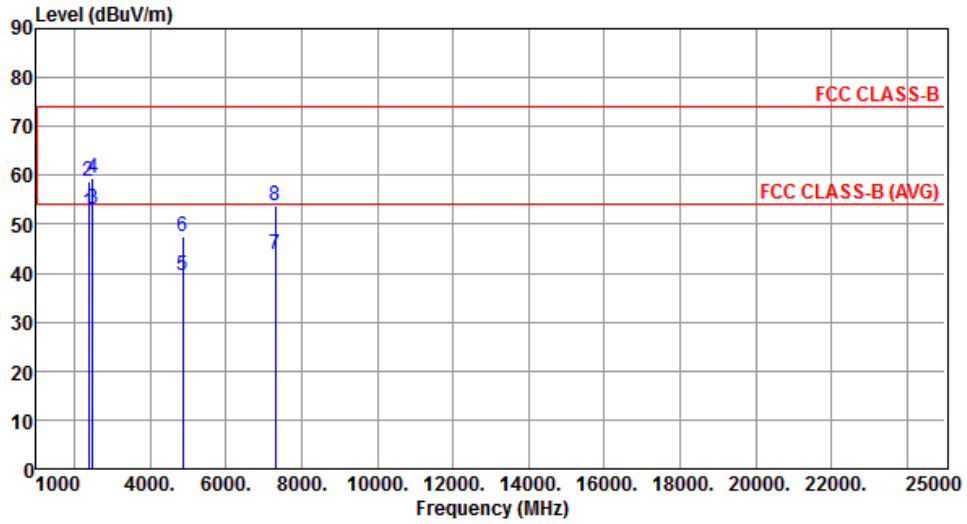


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	52.43	54.00	-1.57	53.67	-1.24	Average	207	93
2	2390.00	58.84	74.00	-15.16	60.08	-1.24	Peak	207	93
3	2483.50	52.98	54.00	-1.02	53.86	-0.88	Average	220	91
4	2483.50	59.52	74.00	-14.48	60.40	-0.88	Peak	220	91
5	4874.00	39.53	54.00	-14.47	33.84	5.69	Average	100	358
6	4874.00	47.44	74.00	-26.56	41.75	5.69	Peak	100	358
7	7311.00	43.70	54.00	-10.30	32.82	10.88	Average	100	76
8	7311.00	53.65	74.00	-20.35	42.77	10.88	Peak	100	76

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11b	<b>Test Freq. (MHz)</b>	2462
<b>Polarization</b>	Horizontal		

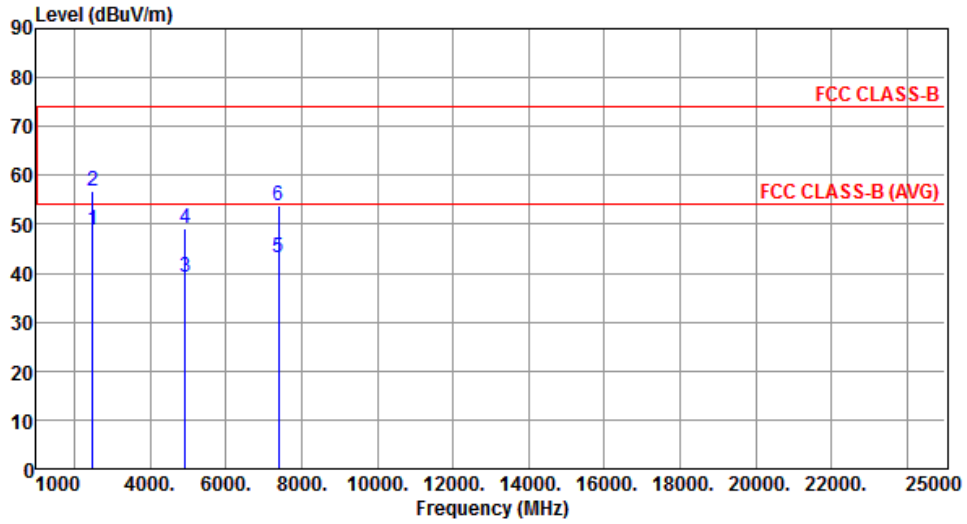


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	48.98	54.00	-5.02	49.86	-0.88	Average	100	61
2	2483.50	56.76	74.00	-17.24	57.64	-0.88	Peak	100	61
3	4924.00	39.09	54.00	-14.91	33.27	5.82	Average	100	160
4	4924.00	49.04	74.00	-24.96	43.22	5.82	Peak	100	160
5	7386.00	43.21	54.00	-10.79	32.01	11.20	Average	100	335
6	7386.00	53.65	74.00	-20.35	42.45	11.20	Peak	100	335

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11b	<b>Test Freq. (MHz)</b>	2462
<b>Polarization</b>	Vertical		

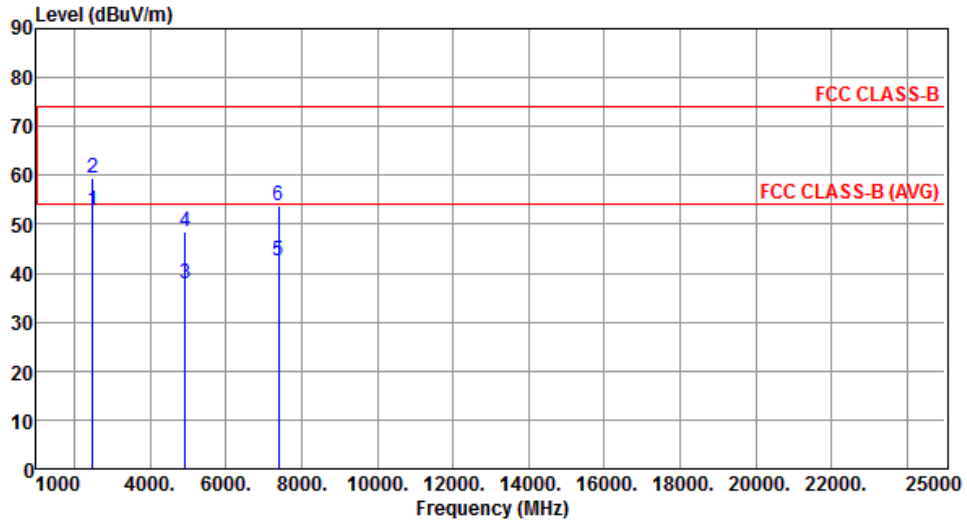


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	52.81	54.00	-1.19	53.69	-0.88	Average	267	93
2	2483.50	59.58	74.00	-14.42	60.46	-0.88	Peak	267	93
3	4924.00	37.99	54.00	-16.01	32.17	5.82	Average	100	359
4	4924.00	48.51	74.00	-25.49	42.69	5.82	Peak	100	359
5	7386.00	42.46	54.00	-11.54	31.26	11.20	Average	100	75
6	7386.00	53.87	74.00	-20.13	42.67	11.20	Peak	100	75

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

### 3.5.6 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11g

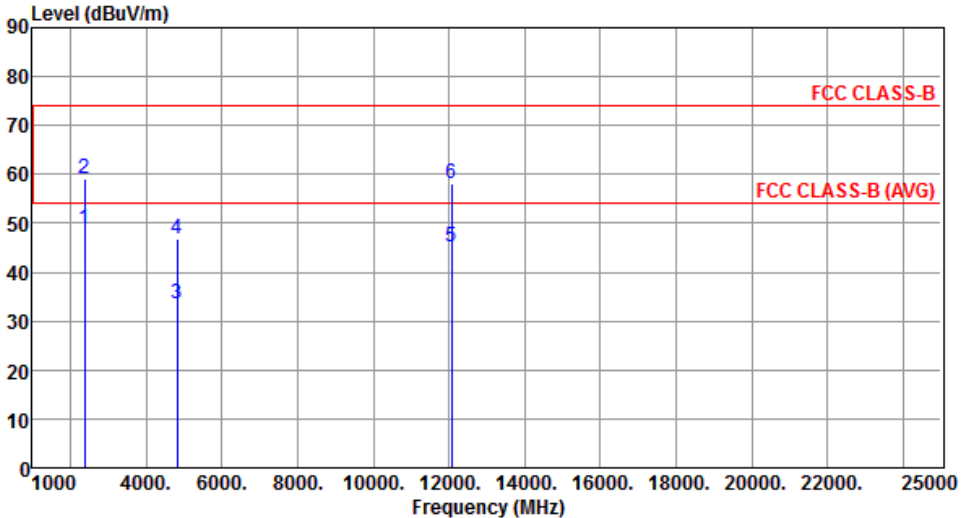Modulation	11g	Test Freq. (MHz)	2412						
Polarization	Horizontal								
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	48.88	54.00	-5.12	50.12	-1.24	Average	100	63
2	2390.00	58.99	74.00	-15.01	60.23	-1.24	Peak	100	63
3	4824.00	33.69	54.00	-20.31	28.13	5.56	Average	100	5
4	4824.00	46.83	74.00	-27.17	41.27	5.56	Peak	100	5
5	12060.00	45.03	54.00	-8.97	29.36	15.67	Average	100	20
6	12060.00	58.23	74.00	-15.77	42.56	15.67	Peak	100	20

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)  
\*Factor includes antenna factor , cable loss and amplifier gain  
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11g	<b>Test Freq. (MHz)</b>	2412
<b>Polarization</b>	Vertical		

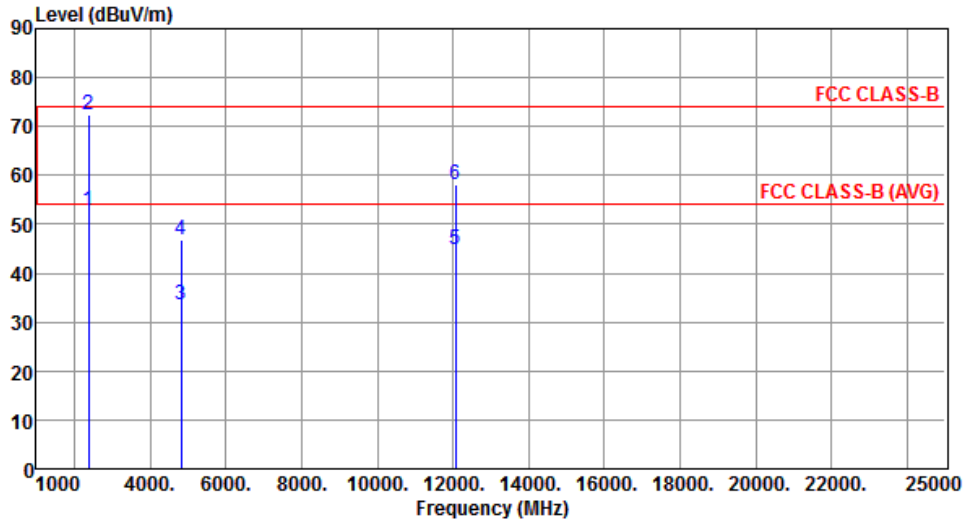

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	52.93	54.00	-1.07	54.17	-1.24	Average	252	111
2	2390.00	72.32	74.00	-1.68	73.56	-1.24	Peak	252	111
3	4824.00	33.68	54.00	-20.32	28.12	5.56	Average	100	20
4	4824.00	46.77	74.00	-27.23	41.21	5.56	Peak	100	20
5	12060.00	44.81	54.00	-9.19	29.14	15.67	Average	100	40
6	12060.00	58.06	74.00	-15.94	42.39	15.67	Peak	100	40


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



<b>Modulation</b>	11g	<b>Test Freq. (MHz)</b>	2437
<b>Polarization</b>	Horizontal		

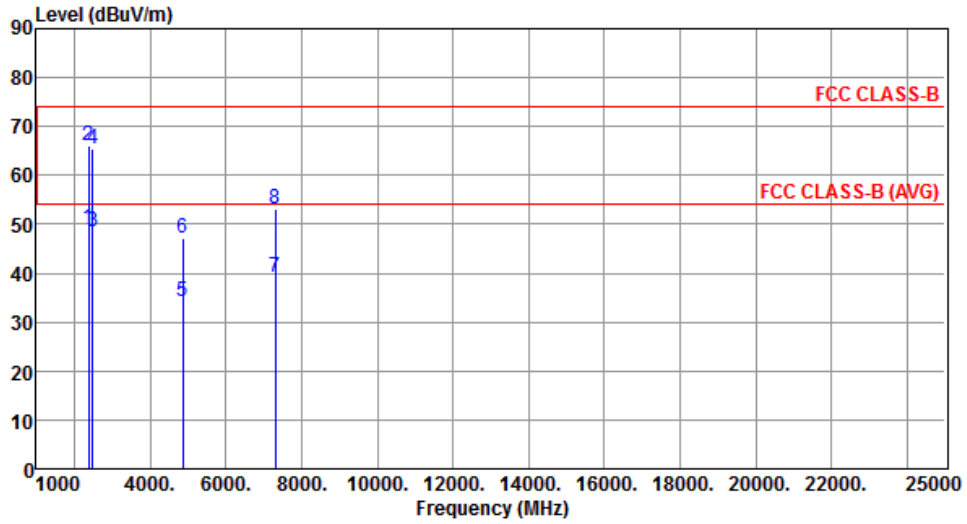


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	49.02	54.00	-4.98	50.26	-1.24	Average	100	49
2	2390.00	66.08	74.00	-7.92	67.32	-1.24	Peak	100	49
3	2483.50	48.33	54.00	-5.67	49.21	-0.88	Average	100	49
4	2483.50	65.56	74.00	-8.44	66.44	-0.88	Peak	100	49
5	4874.00	34.27	54.00	-19.73	28.58	5.69	Average	100	60
6	4874.00	47.16	74.00	-26.84	41.47	5.69	Peak	100	60
7	7311.00	39.34	54.00	-14.66	28.46	10.88	Average	100	80
8	7311.00	53.19	74.00	-20.81	42.31	10.88	Peak	100	80

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11g	<b>Test Freq. (MHz)</b>	2437
<b>Polarization</b>	Vertical		

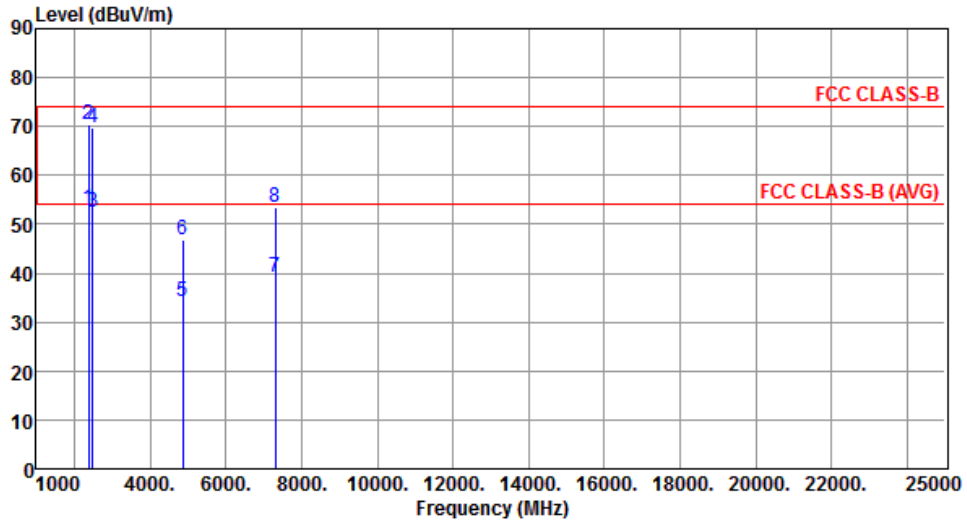


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	52.99	54.00	-1.01	54.23	-1.24	Average	234	92
2	2390.00	70.51	74.00	-3.49	71.75	-1.24	Peak	234	92
3	2483.50	52.50	54.00	-1.50	53.38	-0.88	Average	217	92
4	2483.50	69.65	74.00	-4.35	70.53	-0.88	Peak	217	92
5	4874.00	34.14	54.00	-19.86	28.45	5.69	Average	100	60
6	4874.00	46.98	74.00	-27.02	41.29	5.69	Peak	100	60
7	7311.00	39.34	54.00	-14.66	28.46	10.88	Average	100	50
8	7311.00	53.46	74.00	-20.54	42.58	10.88	Peak	100	50

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11g	<b>Test Freq. (MHz)</b>	2462
<b>Polarization</b>	Horizontal		

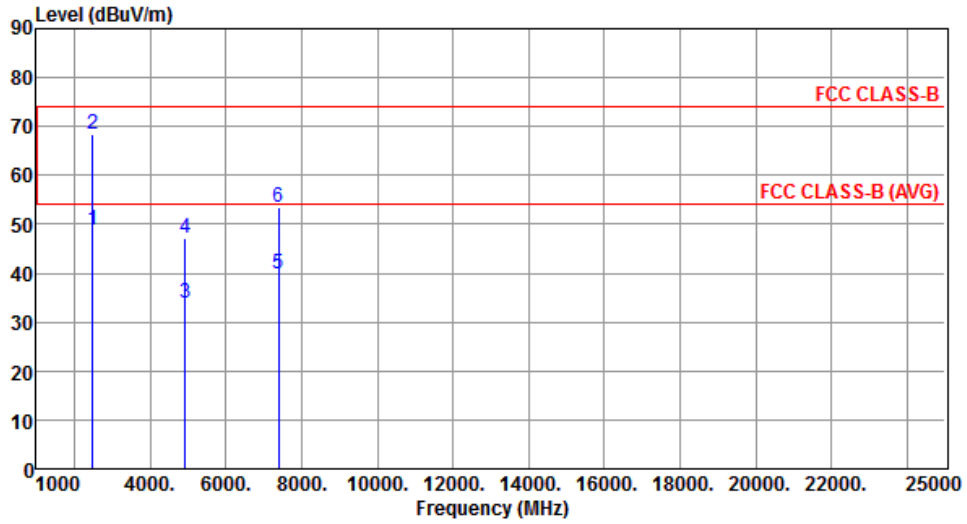


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	48.97	54.00	-5.03	49.85	-0.88	Average	105	54
2	2483.50	68.26	74.00	-5.74	69.14	-0.88	Peak	105	54
3	4924.00	33.89	54.00	-20.11	28.07	5.82	Average	100	70
4	4924.00	47.05	74.00	-26.95	41.23	5.82	Peak	100	70
5	7386.00	39.74	54.00	-14.26	28.54	11.20	Average	100	90
6	7386.00	53.48	74.00	-20.52	42.28	11.20	Peak	100	90

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11g	<b>Test Freq. (MHz)</b>	2462
<b>Polarization</b>	Vertical		

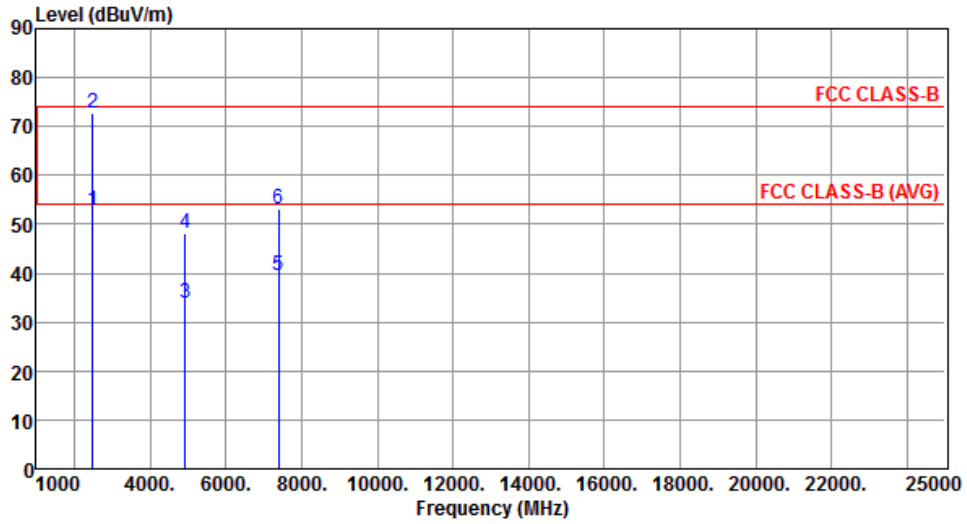


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	52.72	54.00	-1.28	53.60	-0.88	Average	225	92
2	2483.50	72.84	74.00	-1.16	73.72	-0.88	Peak	225	92
3	4924.00	33.96	54.00	-20.04	28.14	5.82	Average	100	20
4	4924.00	48.01	74.00	-25.99	42.19	5.82	Peak	100	20
5	7386.00	39.61	54.00	-14.39	28.41	11.20	Average	100	30
6	7386.00	53.30	74.00	-20.70	42.10	11.20	Peak	100	30

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

### 3.5.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT20

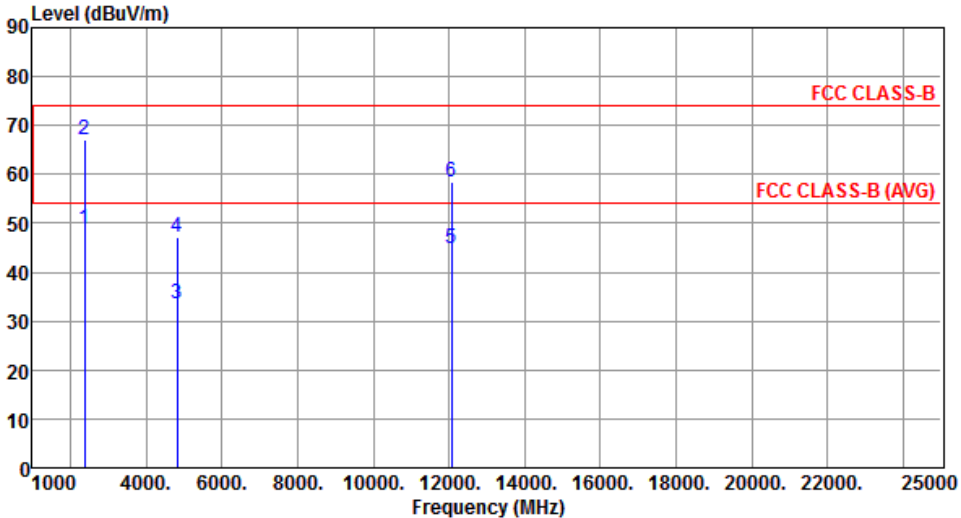Modulation	HT20	Test Freq. (MHz)	2412						
Polarization	Horizontal								
									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	48.97	54.00	-5.03	50.21	-1.24	Average	100	62
2	2390.00	67.21	74.00	-6.79	68.45	-1.24	Peak	100	62
3	4824.00	33.69	54.00	-20.31	28.13	5.56	Average	100	30
4	4824.00	47.14	74.00	-26.86	41.58	5.56	Peak	100	30
5	12060.00	44.94	54.00	-9.06	29.27	15.67	Average	100	50
6	12060.00	58.33	74.00	-15.67	42.66	15.67	Peak	100	50

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor\* (dB)  
\*Factor includes antenna factor , cable loss and amplifier gain  
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

<b>Modulation</b>	HT20	<b>Test Freq. (MHz)</b>	2412
<b>Polarization</b>	Vertical		

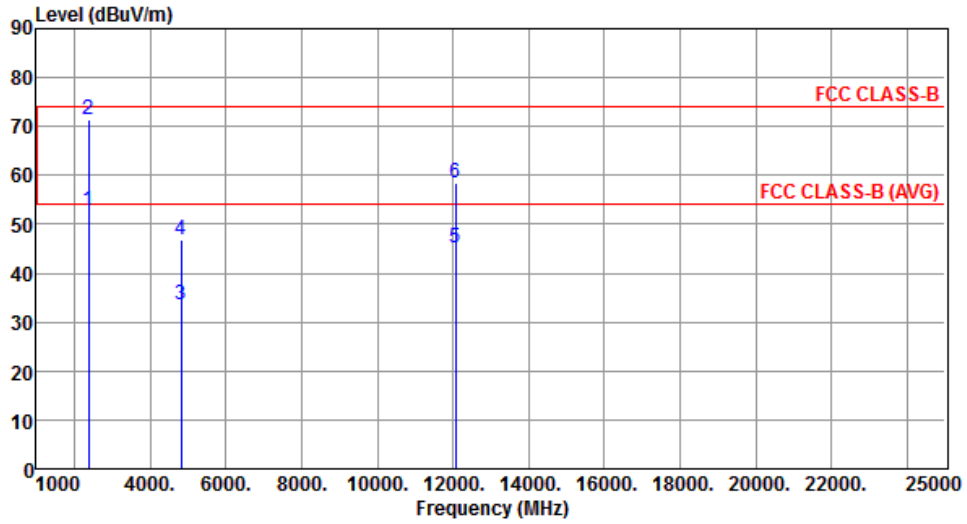


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	52.92	54.00	-1.08	54.16	-1.24	Average	290	92
2	2390.00	71.38	74.00	-2.62	72.62	-1.24	Peak	290	92
3	4824.00	33.57	54.00	-20.43	28.01	5.56	Average	100	30
4	4824.00	46.77	74.00	-27.23	41.21	5.56	Peak	100	30
5	12060.00	45.30	54.00	-8.70	29.63	15.67	Average	100	25
6	12060.00	58.36	74.00	-15.64	42.69	15.67	Peak	100	25

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	HT20	<b>Test Freq. (MHz)</b>	2437
<b>Polarization</b>	Horizontal		

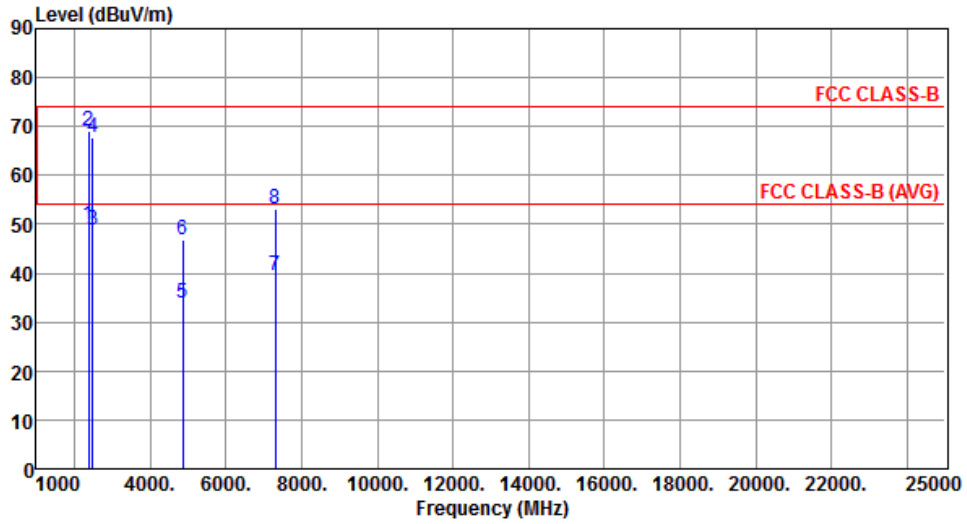


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	49.97	54.00	-4.03	51.21	-1.24	Average	100	52
2	2390.00	68.99	74.00	-5.01	70.23	-1.24	Peak	100	52
3	2483.50	48.68	54.00	-5.32	49.56	-0.88	Average	100	52
4	2483.50	67.79	74.00	-6.21	68.67	-0.88	Peak	100	52
5	4874.00	33.74	54.00	-20.26	28.05	5.69	Average	100	60
6	4874.00	46.92	74.00	-27.08	41.23	5.69	Peak	100	60
7	7311.00	39.53	54.00	-14.47	28.65	10.88	Average	100	90
8	7311.00	53.14	74.00	-20.86	42.26	10.88	Peak	100	90

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	HT20	<b>Test Freq. (MHz)</b>	2437
<b>Polarization</b>	Vertical		

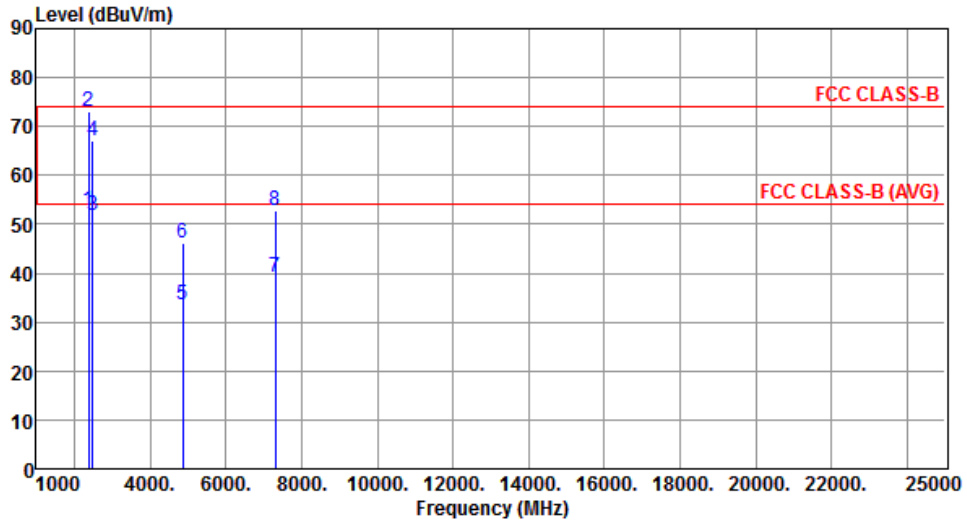

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	52.86	54.00	-1.14	54.10	-1.24	Average	264	94
2	2390.00	72.92	74.00	-1.08	74.16	-1.24	Peak	264	94
3	2483.50	51.89	54.00	-2.11	52.77	-0.88	Average	219	91
4	2483.50	67.07	74.00	-6.93	67.95	-0.88	Peak	219	91
5	4874.00	33.67	54.00	-20.33	27.98	5.69	Average	100	50
6	4874.00	46.01	74.00	-27.99	40.32	5.69	Peak	100	50
7	7311.00	39.29	54.00	-14.71	28.41	10.88	Average	100	60
8	7311.00	52.67	74.00	-21.33	41.79	10.88	Peak	100	60


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



<b>Modulation</b>	HT20	<b>Test Freq. (MHz)</b>	2462
<b>Polarization</b>	Horizontal		

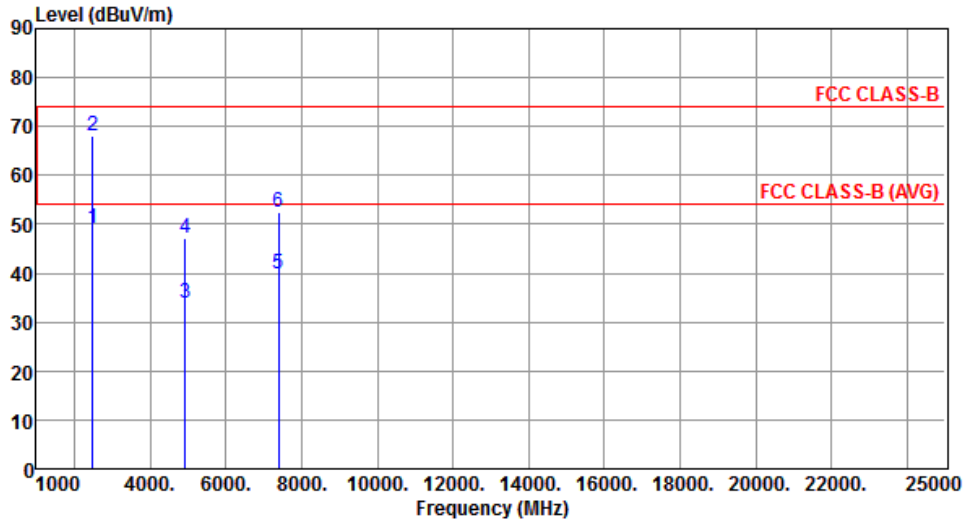


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	49.26	54.00	-4.74	50.14	-0.88	Average	100	62
2	2483.50	68.24	74.00	-5.76	69.12	-0.88	Peak	100	62
3	4924.00	33.85	54.00	-20.15	28.03	5.82	Average	100	100
4	4924.00	47.16	74.00	-26.84	41.34	5.82	Peak	100	100
5	7386.00	39.75	54.00	-14.25	28.55	11.20	Average	100	30
6	7386.00	52.47	74.00	-21.53	41.27	11.20	Peak	100	30

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	HT20	<b>Test Freq. (MHz)</b>	2462
<b>Polarization</b>	Vertical		

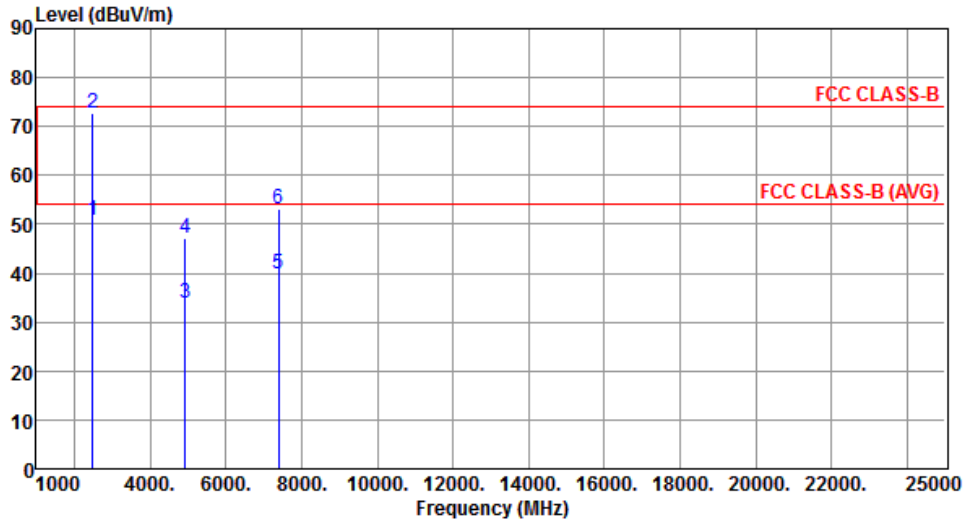


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	50.95	54.00	-3.05	51.83	-0.88	Average	224	92
2	2483.50	72.87	74.00	-1.13	73.75	-0.88	Peak	224	92
3	4924.00	33.97	54.00	-20.03	28.15	5.82	Average	100	30
4	4924.00	47.11	74.00	-26.89	41.29	5.82	Peak	100	30
5	7386.00	39.76	54.00	-14.24	28.56	11.20	Average	100	90
6	7386.00	53.21	74.00	-20.79	42.01	11.20	Peak	100	90

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

### 3.5.8 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT40

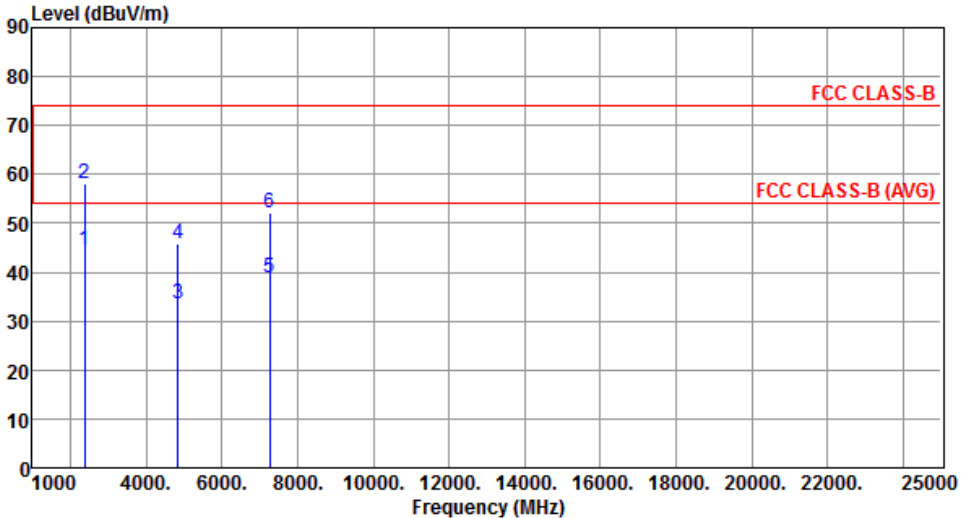Modulation	HT40	Test Freq. (MHz)	2422						
Polarization	Horizontal								
									
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2390.00	44.55	54.00	-9.45	45.79	-1.24	Average	100	55
2	2390.00	58.04	74.00	-15.96	59.28	-1.24	Peak	100	55
3	4844.00	33.59	54.00	-20.41	27.97	5.62	Average	100	30
4	4844.00	45.93	74.00	-28.07	40.31	5.62	Peak	100	30
5	7266.00	38.92	54.00	-15.08	28.24	10.68	Average	100	50
6	7266.00	52.07	74.00	-21.93	41.39	10.68	Peak	100	50
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)  *Factor includes antenna factor , cable loss and amplifier gain</p> <p>Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>									

<b>Modulation</b>	HT40	<b>Test Freq. (MHz)</b>	2422
<b>Polarization</b>	Vertical		

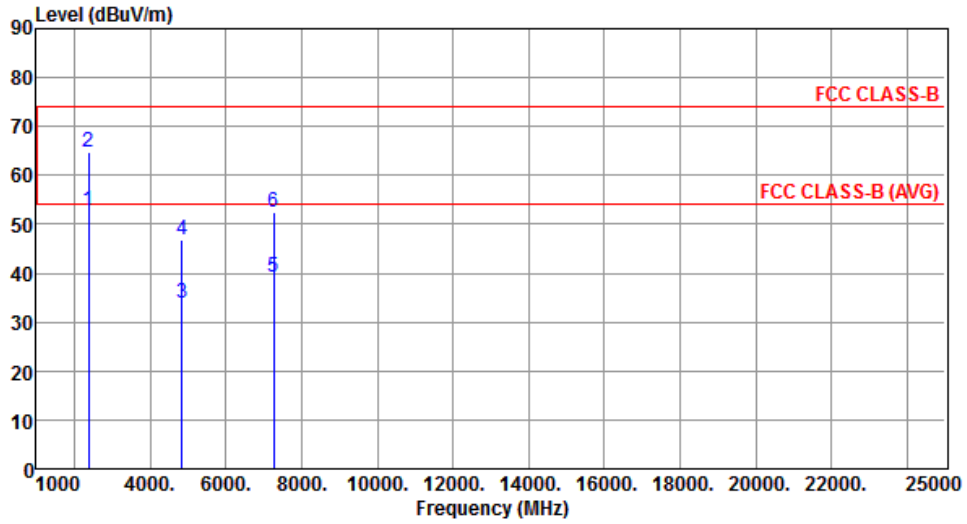


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	52.85	54.00	-1.15	54.09	-1.24	Average	240	119
2	2390.00	64.84	74.00	-9.16	66.08	-1.24	Peak	240	119
3	4844.00	33.75	54.00	-20.25	28.13	5.62	Average	100	200
4	4844.00	46.87	74.00	-27.13	41.25	5.62	Peak	100	200
5	7266.00	39.13	54.00	-14.87	28.45	10.68	Average	100	60
6	7266.00	52.33	74.00	-21.67	41.65	10.68	Peak	100	60

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	HT40	<b>Test Freq. (MHz)</b>	2437
<b>Polarization</b>	Horizontal		

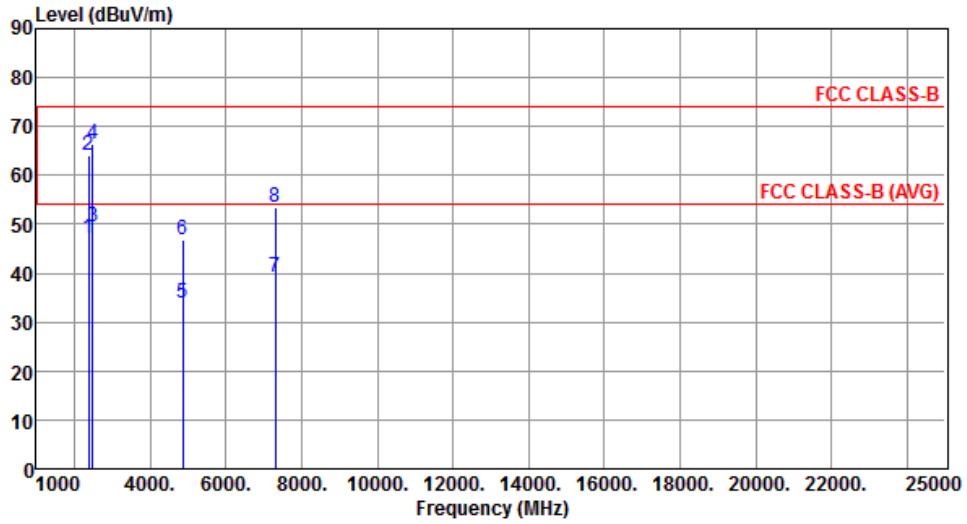


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	47.02	54.00	-6.98	48.26	-1.24	Average	100	49
2	2390.00	63.99	74.00	-10.01	65.23	-1.24	Peak	100	49
3	2483.50	49.33	54.00	-4.67	50.21	-0.88	Average	100	49
4	2483.50	66.53	74.00	-7.47	67.41	-0.88	Peak	100	49
5	4874.00	33.84	54.00	-20.16	28.15	5.69	Average	100	60
6	4874.00	46.96	74.00	-27.04	41.27	5.69	Peak	100	60
7	7311.00	39.29	54.00	-14.71	28.41	10.88	Average	100	90
8	7311.00	53.42	74.00	-20.58	42.54	10.88	Peak	100	90

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	HT40	<b>Test Freq. (MHz)</b>	2437
<b>Polarization</b>	Vertical		

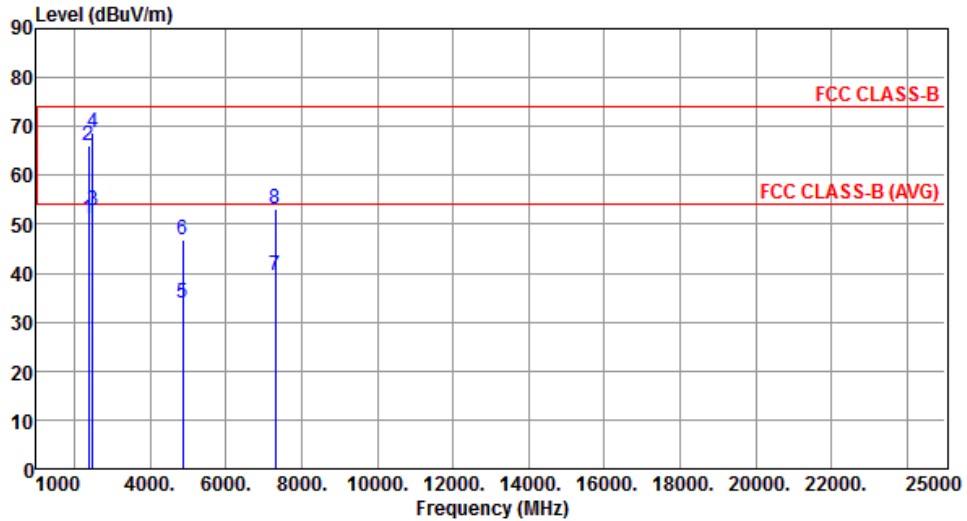


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	51.19	54.00	-2.81	52.43	-1.24	Average	223	90
2	2390.00	66.03	74.00	-7.97	67.27	-1.24	Peak	223	90
3	2483.50	52.87	54.00	-1.13	53.75	-0.88	Average	223	90
4	2483.50	68.72	74.00	-5.28	69.60	-0.88	Peak	223	90
5	4874.00	33.81	54.00	-20.19	28.12	5.69	Average	100	30
6	4874.00	46.96	74.00	-27.04	41.27	5.69	Peak	100	30
7	7311.00	39.42	54.00	-14.58	28.54	10.88	Average	100	60
8	7311.00	53.19	74.00	-20.81	42.31	10.88	Peak	100	60

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	HT40	<b>Test Freq. (MHz)</b>	2452
<b>Polarization</b>	Horizontal		

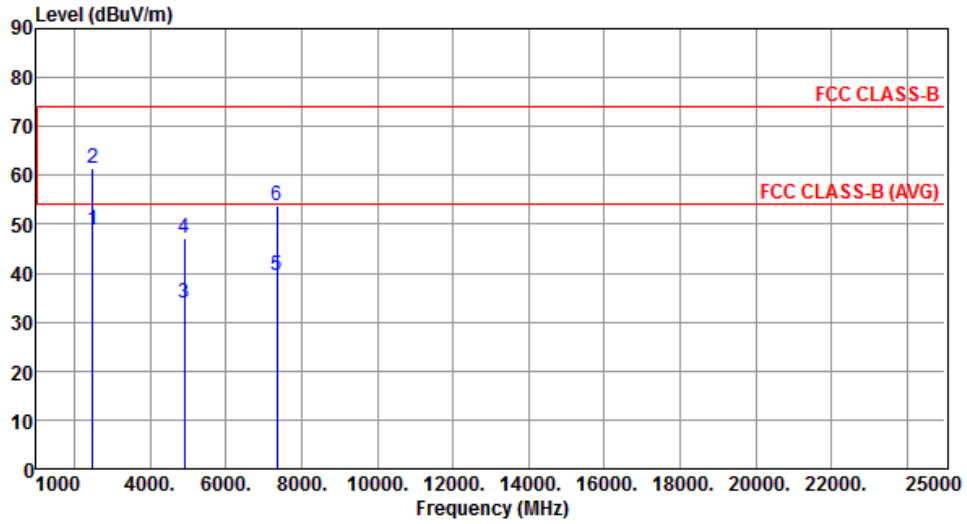


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	48.98	54.00	-5.02	49.86	-0.88	Average	100	54
2	2483.50	61.58	74.00	-12.42	62.46	-0.88	Peak	100	54
3	4904.00	33.78	54.00	-20.22	28.01	5.77	Average	100	30
4	4904.00	46.99	74.00	-27.01	41.22	5.77	Peak	100	30
5	7356.00	39.62	54.00	-14.38	28.55	11.07	Average	100	25
6	7356.00	53.64	74.00	-20.36	42.57	11.07	Peak	100	25

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	HT40	<b>Test Freq. (MHz)</b>	2452
<b>Polarization</b>	Vertical		

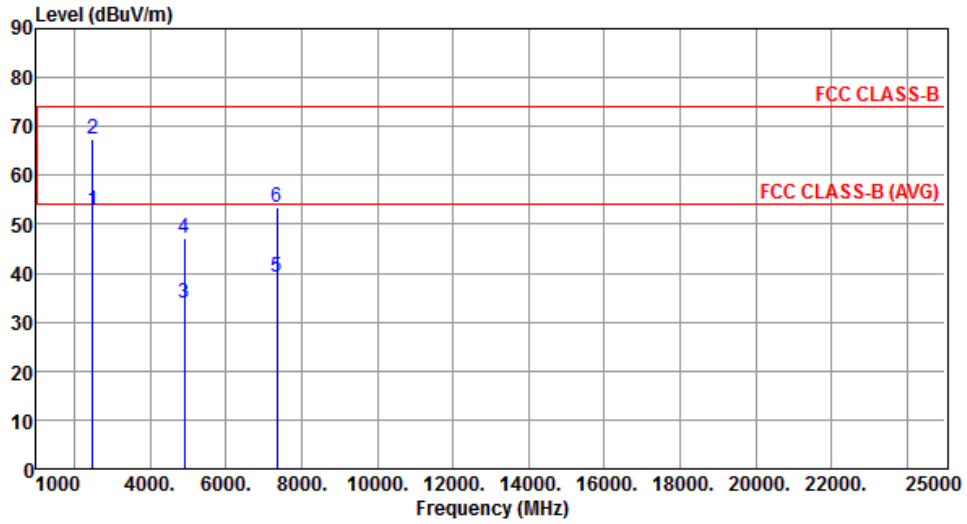

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	52.80	54.00	-1.20	53.68	-0.88	Average	216	92
2	2483.50	67.57	74.00	-6.43	68.45	-0.88	Peak	216	92
3	4904.00	33.79	54.00	-20.21	28.02	5.77	Average	100	40
4	4904.00	47.03	74.00	-26.97	41.26	5.77	Peak	100	40
5	7356.00	39.31	54.00	-14.69	28.24	11.07	Average	100	30
6	7356.00	53.35	74.00	-20.65	42.28	11.07	Peak	100	30

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



## 3.6 Emissions in Non-Restricted Frequency Bands

### 3.6.1 Emissions in Non-Restricted Frequency Bands Limit

Peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz.

### 3.6.2 Test Procedures


#### Reference level measurement

1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Use the peak marker function to determine the maximum PSD level


#### Emission level measurement




1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Scan Frequency range is up to 25GHz
4. Use the peak marker function to determine the maximum amplitude level




### 3.6.3 Test Setup



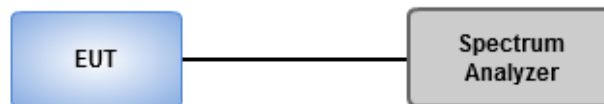


### 3.6.4 Unwanted Emissions into Non-Restricted Frequency Bands

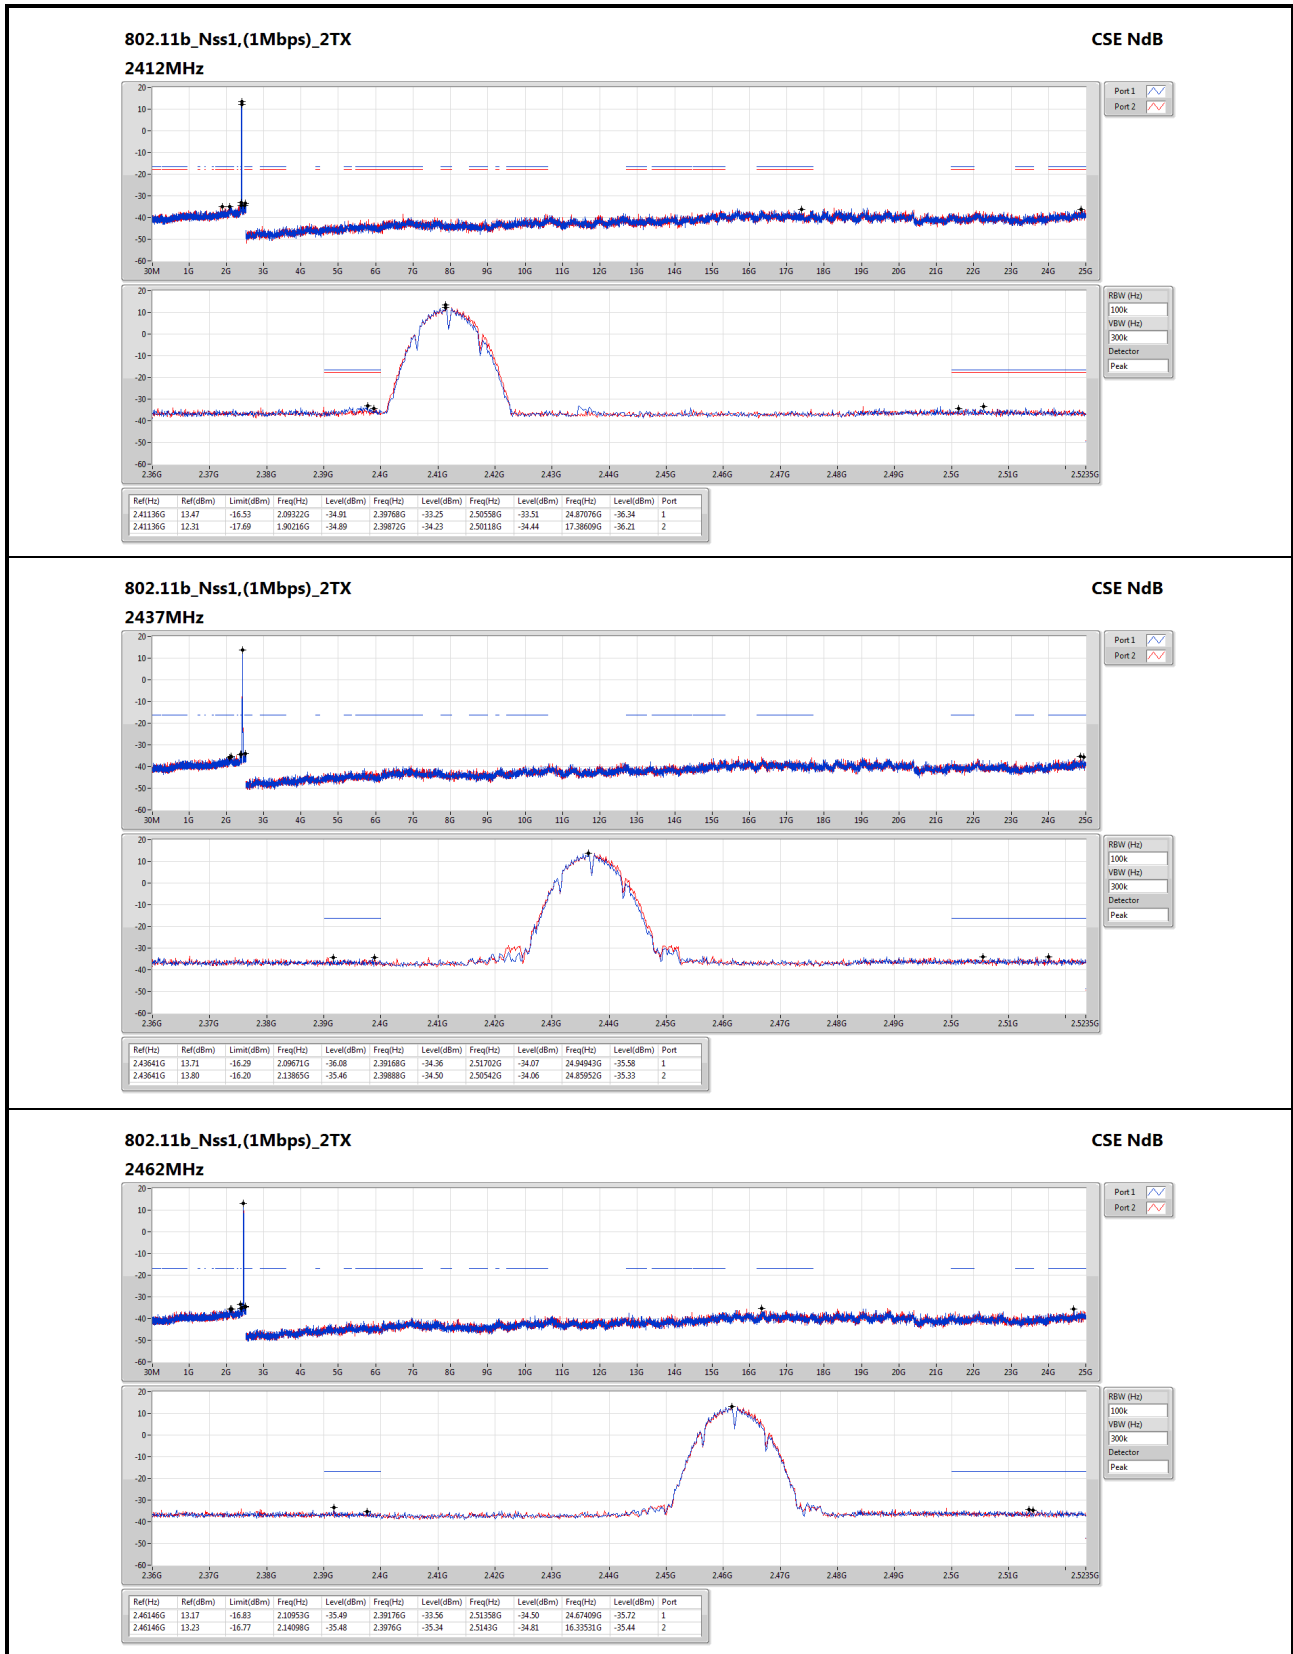

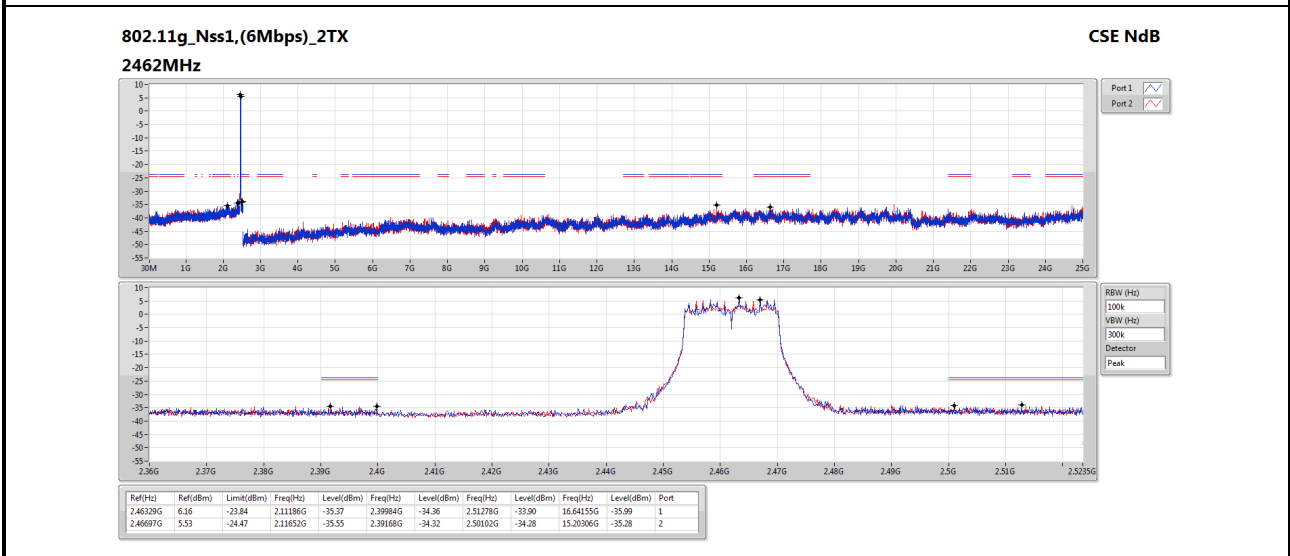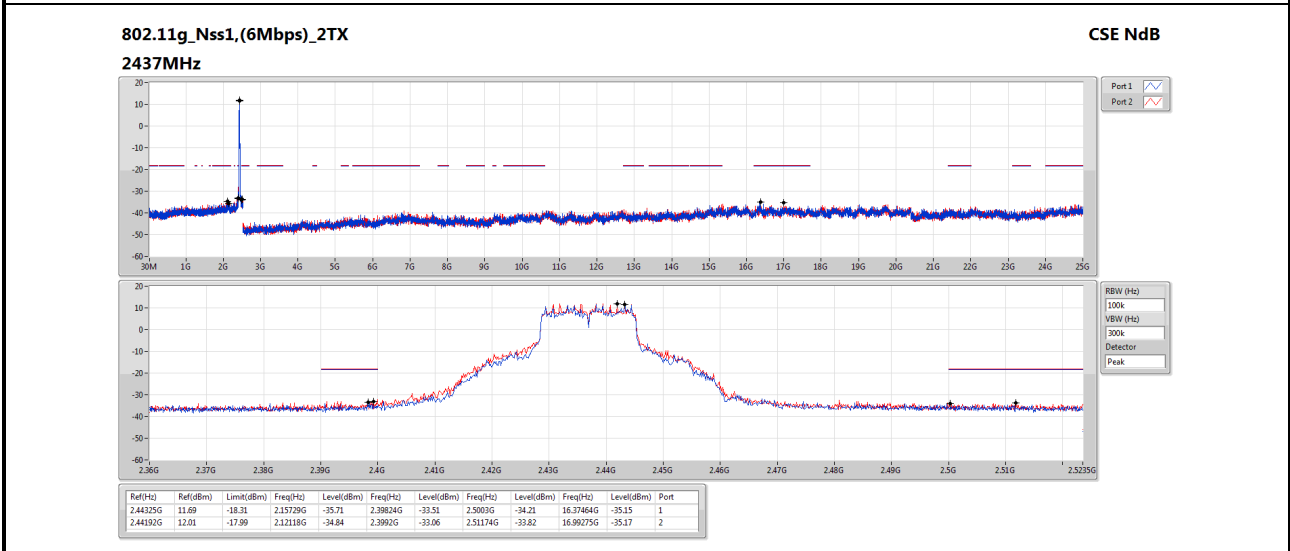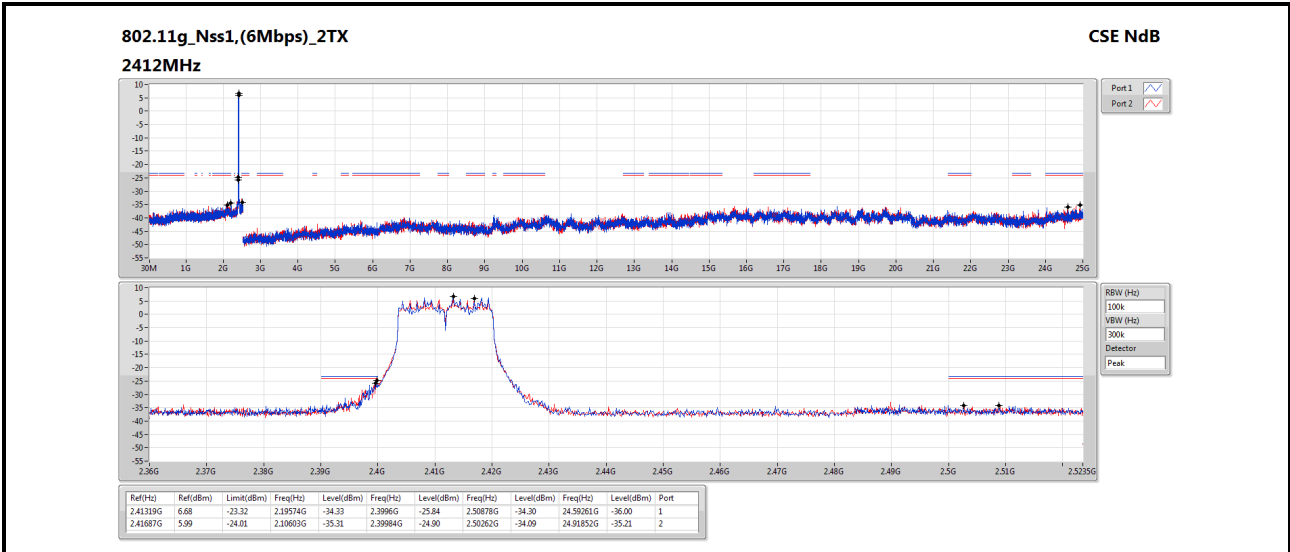

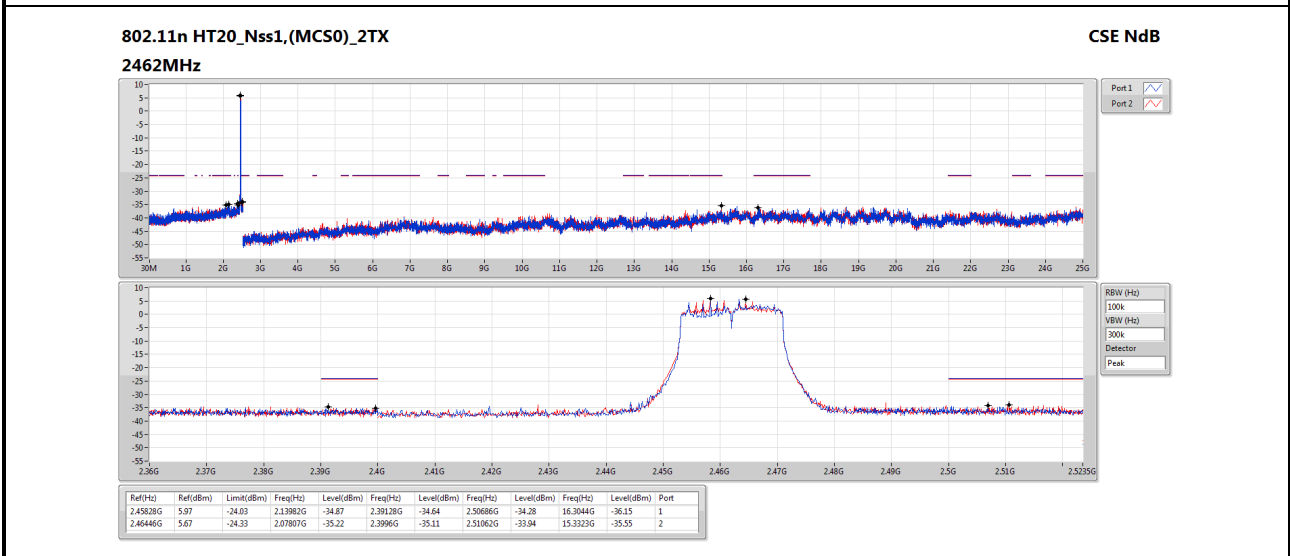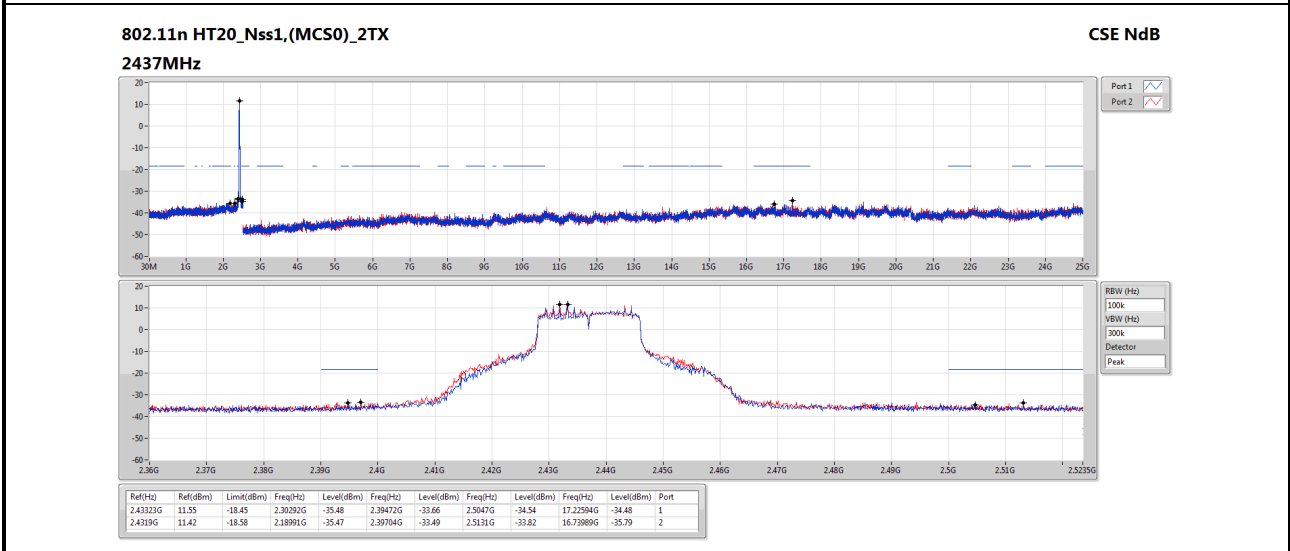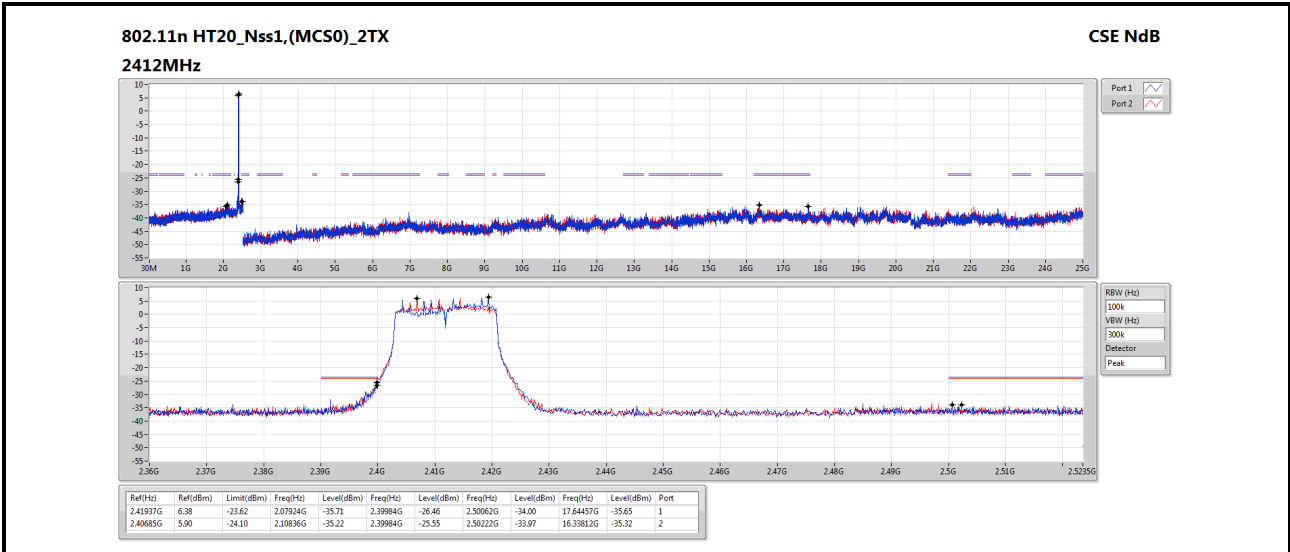

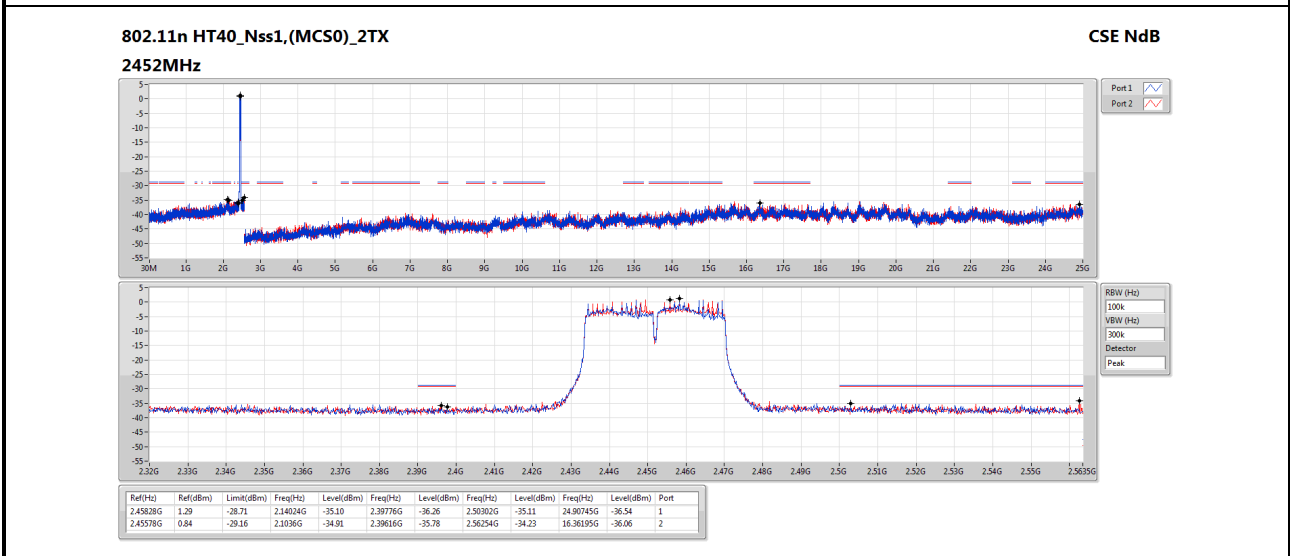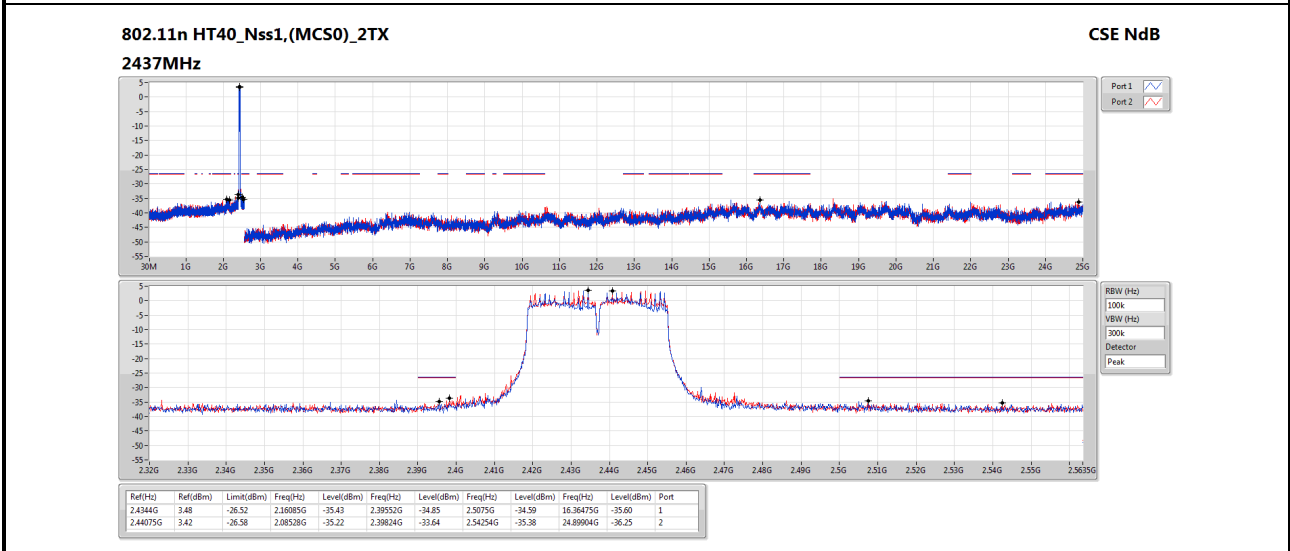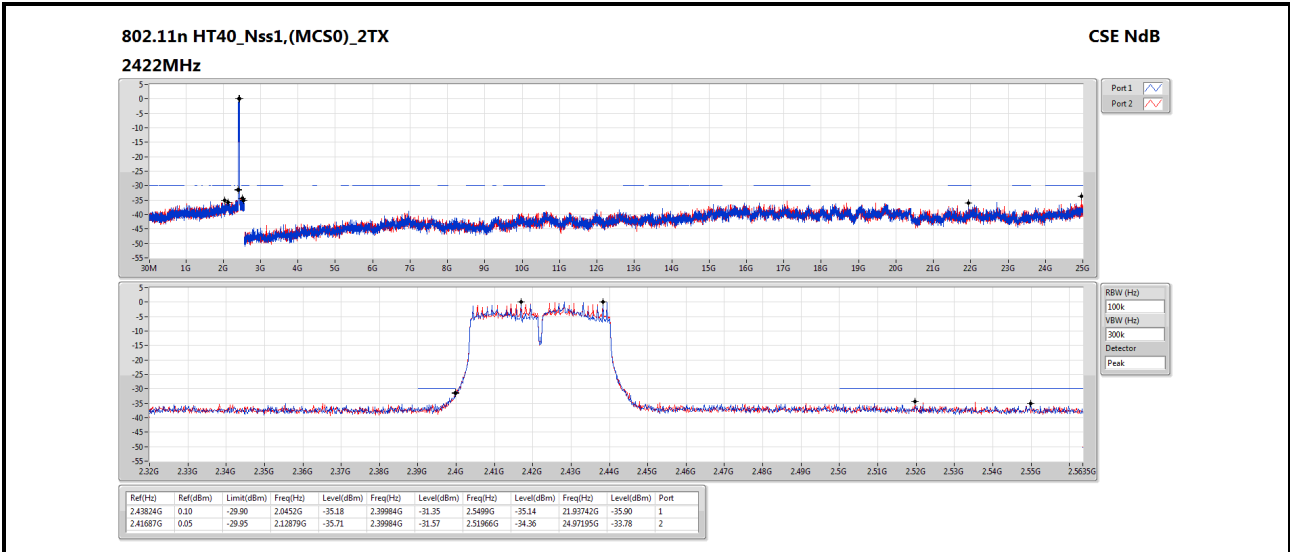

## 4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <http://www.icertifi.com.tw>.

### **Linkou**

Tel: 886-2-2601-1640

No. 30-2, Ding Fwu Tsuen, Lin  
Kou District, New Taipei City,  
Taiwan, R.O.C.

### **Kwei Shan**

Tel: 886-3-271-8666

No. 3-1, Lane 6, Wen San 3rd St.,  
Kwei Shan District, Tao Yuan City  
333, Taiwan, R.O.C.

### **Kwei Shan Site II**

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd  
St., Kwei Shan District, Tao Yuan  
City 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Email: ICC\_Service@icertifi.com.tw

==END==