

# FCC Test Report

**FCC ID** : MXF-WSMS-140  
**Equipment** : Telemetry Unit  
**Model No.** : WSMS-140\_C  
(Refer to item 1.1.1 for more details.)  
**Brand Name** : Gemtek/Linde  
**Applicant** : Gemtek Technology Co., Ltd.  
**Address** : No. 15-1 Zhonghua Road, Hsinchu Industrial  
Park, Hukou, Hsinchu, Taiwan, 30352.  
**Standard** : 47 CFR FCC Part 15.247  
**Received Date** : Jul. 09, 2018  
**Tested Date** : Jul. 25 ~ Jul. 26, 2018

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:

  
Along Chen / Assistant Manager

Approved by:

  
Gary Chang / Manager



---

## Table of Contents

<b>1</b>	<b>GENERAL DESCRIPTION .....</b>	<b>5</b>
1.1	Information.....	5
1.2	Local Support Equipment List .....	6
1.3	Test Setup Chart .....	7
1.4	The Equipment List .....	8
1.5	Test Standards .....	9
1.6	Measurement Uncertainty .....	9
<b>2</b>	<b>TEST CONFIGURATION .....</b>	<b>10</b>
2.1	Testing Condition .....	10
2.2	The Worst Test Modes and Channel Details .....	10
<b>3</b>	<b>TRANSMITTER TEST RESULTS.....</b>	<b>11</b>
3.1	Unwanted Emissions into Restricted Frequency Bands .....	11
3.2	Unwanted Emissions into Non-Restricted Frequency Bands .....	37
3.3	Conducted Output Power .....	40
3.4	Number of Hopping Frequency .....	41
3.5	20dB and Occupied Bandwidth .....	42
3.6	Channel Separation.....	44
3.7	Number of Dwell Time.....	46
3.8	Power Spectral Density .....	51
<b>4</b>	<b>TEST LABORATORY INFORMATION .....</b>	<b>53</b>

---

## Release Record

Report No.	Version	Description	Issued Date
FR870901	Rev. 01	Initial issue	Aug. 21, 2018

## Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	Conducted Emissions	Note <sup>1</sup>	N/A
15.247(d) 15.209	Radiated Emissions	[dBuV/m at 3m]: 9149.00MHz 50.96 (Margin -3.04dB) - AV	Pass
15.247(d)	Band Edge	Meet the requirement of limit	Pass
15.247(b)(2)(3)	Conducted Output Power	Power [dBm]: 18.94	Pass
15.247(a)(1)(i)	Number of Hopping Channels	Meet the requirement of limit	Pass
15.247(a)(1)	Hopping Channel Separation	Meet the requirement of limit	Pass
15.247(f)	Dwell Time	Meet the requirement of limit	Pass
15.247(f)	Power spectral density	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass
<p>N/A means Not Applicable.            Note<sup>1</sup>: The EUT consumes DC power, so the test is not required.</p>			

# 1 General Description

## 1.1 Information

### 1.1.1 Product Details

The following models are provided to this EUT.

Brand Name	Model Name	Product Name	Description
Gemtek/Linde	WSMS-140_C	Telemetry Unit	4-20mA current sense
	WSMS-140_B		Modbus RS-485 communication
	WSMS-140_G		Hall sensor for magnet sense

### 1.1.2 Specification of the Equipment under Test (EUT)

RF General Information					
Frequency Range (MHz)	Ch. Freq. (MHz)	Channel Number	Physical bit rate (bit/s)	Spread Factor	Channel Bandwidth (kHz)
902 ~ 928	902.3 ~ 914.9	1-64 [64]	11000 ~ 980	7 ~ 10	125
Note 1: RF output power specifies that Maximum Conducted (Average) Output Power. Note 2: The device uses LORA modulation. Note 3: The device supports hybrid mode.					

### 1.1.3 Antenna Details

Ant. No.	Type	Connector	Gain (dBi)
1	Omni-directional fiberglass pipe	N type	0

### 1.1.4 Power Supply Type of Equipment under Test (EUT)

Power Supply Type	3.3Vdc
-------------------	--------

### 1.1.5 Accessories

Accessories		
No.	Equipment	Description
1	External cable (for model WSMS-140_G)	1m non-shielded without core
2	External cable (for model WSMS-140_C)	0.5m non-shielded without core

### 1.1.6 Channel List

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	902.3	17	905.5	33	908.7	49	911.9
2	902.5	18	905.7	34	908.9	50	912.1
3	902.7	19	905.9	35	909.1	51	912.3
4	902.9	20	906.1	36	909.3	52	912.5
5	903.1	21	906.3	37	909.5	53	912.7
6	903.3	22	906.5	38	909.7	54	912.9
7	903.5	23	906.7	39	909.9	55	913.1
8	903.7	24	906.9	40	910.1	56	913.3
9	903.9	25	907.1	41	910.3	57	913.5
10	904.1	26	907.3	42	910.5	58	913.7
11	904.3	27	907.5	43	910.7	59	913.9
12	904.5	28	907.7	44	910.9	60	914.1
13	904.7	29	907.9	45	911.1	61	914.3
14	904.9	30	908.1	46	911.3	62	914.5
15	905.1	31	908.3	47	911.5	63	914.7
16	905.3	32	908.5	48	911.7	64	914.9

### 1.1.7 Test Tool and Duty Cycle

Test Tool	Tera Term, version: 4.74
-----------	--------------------------


### 1.1.8 Power Setting


Modulation Mode	Test Frequency (MHz)		
	902.3	908.5	914.9
LORA	20	20	20


## 1.2 Local Support Equipment List

Support Equipment List					
No.	Equipment	Brand	Model	S/N	Remarks
1	Load	ICC	---	---	---

### 1.3 Test Setup Chart

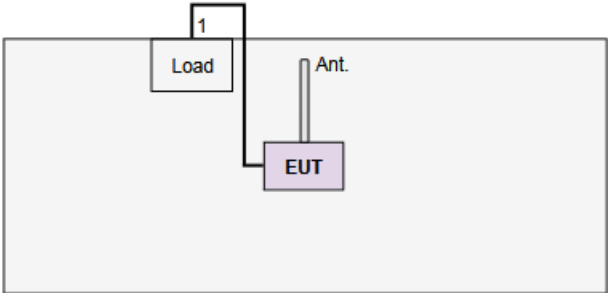Test Setup Diagram	
<p>For model WSMS-140_C</p> 	
No.	Signal cable / Length (m)
1	External cable, 0.5m non-shielded without core.

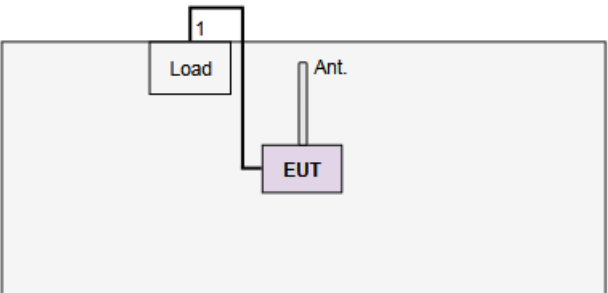Test Setup Diagram	
<p>For model WSMS-140_B</p> 	
No.	Signal cable / Length (m)
1	1m non-shielded without core.

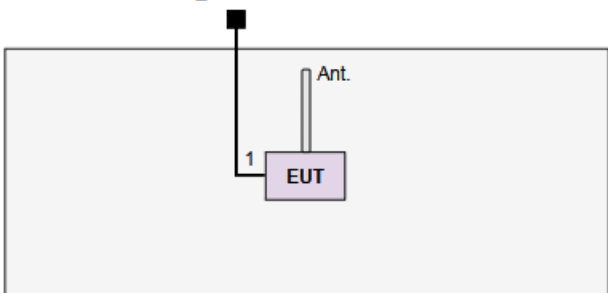Test Setup Diagram	
<p>For model WSMS-140_G</p> 	
No.	Signal cable / Length (m)
1	External cable, 1m non-shielded without core.

## 1.4 The Equipment List

Test Item	Radiated Emission				
Test Site	966 chamber1 / (03CH01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101498	Dec. 04, 2017	Dec. 03, 2018
Receiver	R&S	ESR3	101658	Nov. 20, 2017	Nov. 19, 2018
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-523	Nov. 10, 2017	Nov. 09, 2018
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Dec. 20, 2017	Dec. 19, 2018
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 23, 2017	Nov. 22, 2018
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 13, 2017	Nov. 12, 2018
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Dec. 07, 2017	Dec. 06, 2018
Preamplifier	EMC	EMC02325	980194	Sep. 25, 2017	Sep. 24, 2018
Preamplifier	Agilent	83017A	MY39501308	Oct. 06, 2017	Oct. 05, 2018
Preamplifier	EMC	EMC184045B	980192	Aug. 22, 2017	Aug. 21, 2018
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16140/4	May 09, 2018	May 08, 2019
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16019/4	Dec. 07, 2017	Dec. 06, 2018
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16139/4	Dec. 07, 2017	Dec. 06, 2018
LF cable 1M	EMC	EMCCFD400-NM-N M-1000	16052	Dec. 07, 2017	Dec. 06, 2018
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-001	Dec. 07, 2017	Dec. 06, 2018
LF cable 10M	Woken	CFD400NL-LW	CFD400NL-002	Dec. 07, 2017	Dec. 06, 2018
Measurement Software	AUDIX	e3	6.120210g	NA	NA

Note: Calibration Interval of instruments listed above is one year.

Test Item	RF Conducted				
Test Site	(TH01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101486	Nov. 21, 2017	Nov. 20, 2018
Power Sensor	Agilent	U2021XA	MY53480019	Jan. 29, 2018	Jan. 28, 2019
DC POWER SOURCE	GW INSTRUK	GPC-6030D	EM892433	Oct. 26, 2017	Oct. 25, 2018
Measurement Software	Sporton	Sporton_1	1.3.30	NA	NA
Measurement Software	Agilent	EN RF test	1.1501125	NA	NA

Note: Calibration Interval of instruments listed above is one year.



## 1.5 Test Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.247

ANSI C63.10-2013

FCC KDB 558074 D01 DTS Meas Guidance v04

FCC KDB 453039

## 1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ( $k=2$ ))

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	$\pm 34.134$ Hz
Conducted power	$\pm 0.808$ dB
Power density	$\pm 0.463$ dB
Conducted emission	$\pm 2.670$ dB
AC conducted emission	$\pm 2.90$ dB
Radiated emission $\leq 1$ GHz	$\pm 3.66$ dB
Radiated emission $> 1$ GHz	$\pm 5.63$ dB

## 2 Test Configuration

### 2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
Radiated Emissions	03CH01-WS	25-26°C / 61-63%	Roger Lu
RF Conducted	TH01-WS	23°C / 64%	Brad Wu

- FCC Designation No.: TW2732
- FCC site registration No.: 181692
- IC site registration No.: 10807A-1

### 2.2 The Worst Test Modes and Channel Details

Test item	Test Frequency (MHz)	Channel Bandwidth (kHz)	Modulation / SF	Test Configuration
Radiated Emissions ≤ 1GHz	902.3 / 908.5 / 914.9	125	LORA / 10	1, 2, 3
Radiated Emissions > 1GHz Conducted Output Power Hopping Channel Separation 20dB and Occupied bandwidth Power Spectral Density	902.3 / 908.5 / 914.9	125	LORA / 10	3
Number of Hopping Channels	902.3 ~ 914.9	125	LORA / 10	3
Dwell Time	902.3	125	LORA: 10 / 9 / 8 / 7	3
<b>NOTE:</b>				
1. Test Configurations are listed as follows:				
1) Test Configuration 1: For model: WSMS-140_C				
2) Test Configuration 2: For model: WSMS-140_B				
3) Test Configuration 3: For model: WSMS-140_G				

### 3 Transmitter Test Results

#### 3.1 Unwanted Emissions into Restricted Frequency Bands

##### 3.1.1 Limit of Unwanted Emissions into Restricted Frequency Bands

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

**Note 1:**  
Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

**Note 2:**  
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

##### 3.1.2 Test Procedures


1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

**Note:**


1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

### 3.1.3 Test Setup

#### Radiated Emissions below 1 GHz

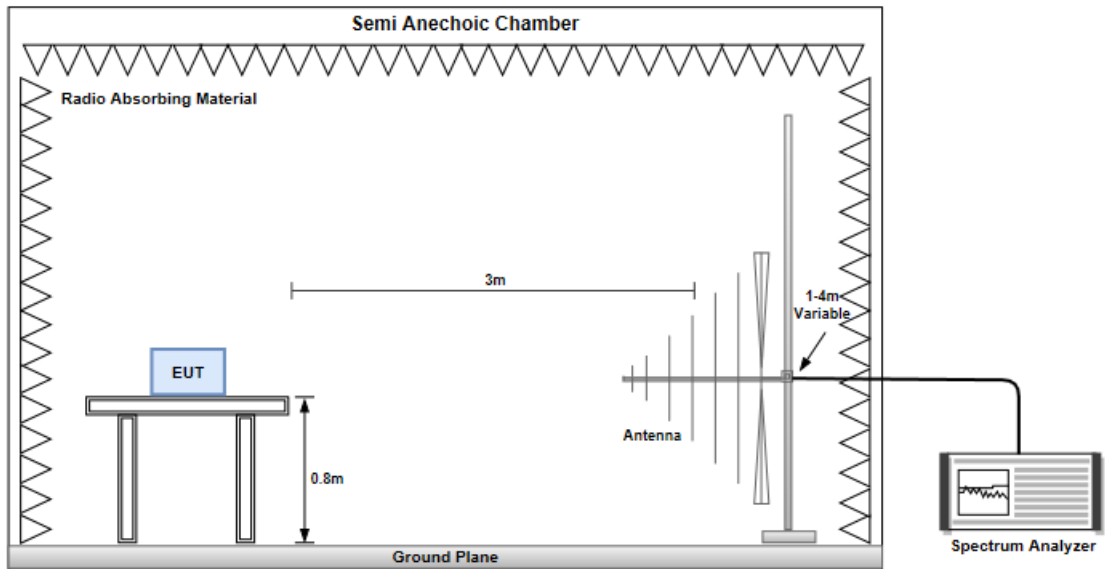


#### Radiated Emissions above 1 GHz

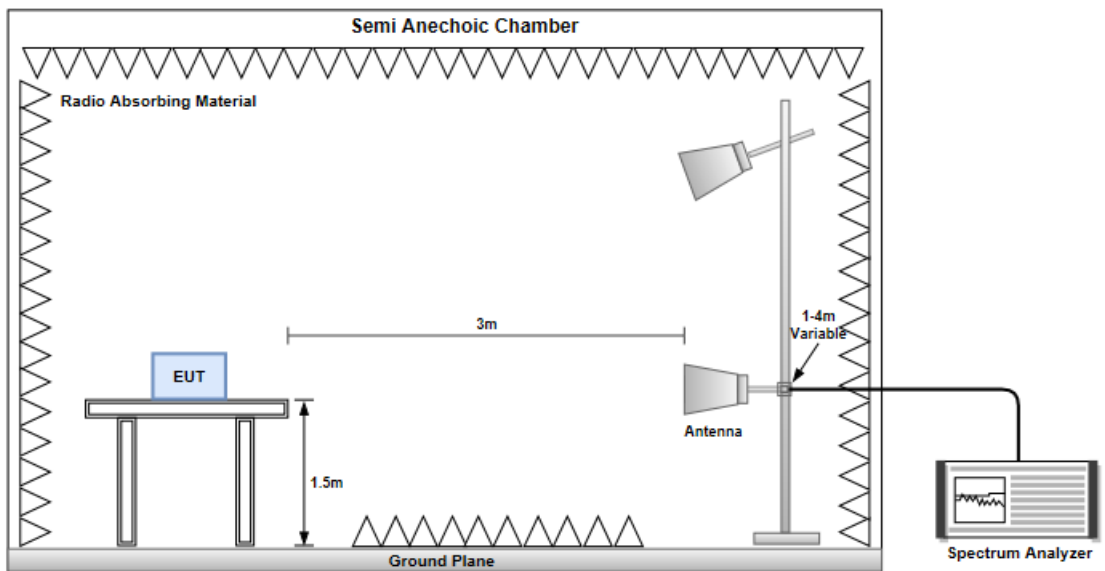

**Test Configuration 1: For model: WSMS-140\_C**

**3.1.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)**

<b>Modulation / SF</b>	LORA / 10	<b>Test Freq. (MHz)</b>	902.3
<b>Polarization</b>	Horizontal		

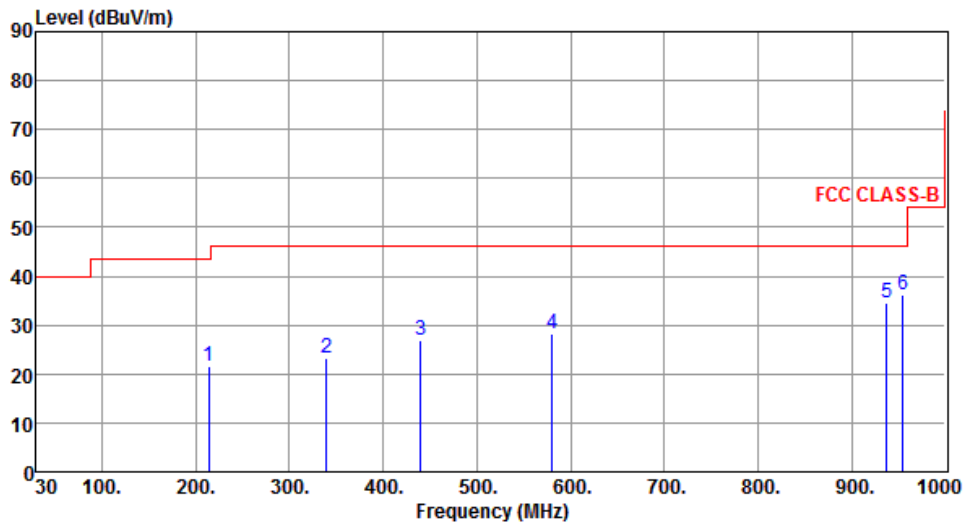

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	213.60	21.47	43.50	-22.03	32.45	-10.98	Peak	---	---
2	339.20	23.17	46.00	-22.83	30.06	-6.89	Peak	---	---
3	440.00	27.01	46.00	-18.99	31.42	-4.41	Peak	---	---
4	580.00	28.11	46.00	-17.89	29.52	-1.41	Peak	---	---
5	937.60	34.70	46.00	-11.30	30.85	3.85	Peak	---	---
6	954.40	36.36	46.00	-9.64	32.29	4.07	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

<b>Modulation / SF</b>	LORA / 10	<b>Test Freq. (MHz)</b>	902.3
<b>Polarization</b>	Vertical		

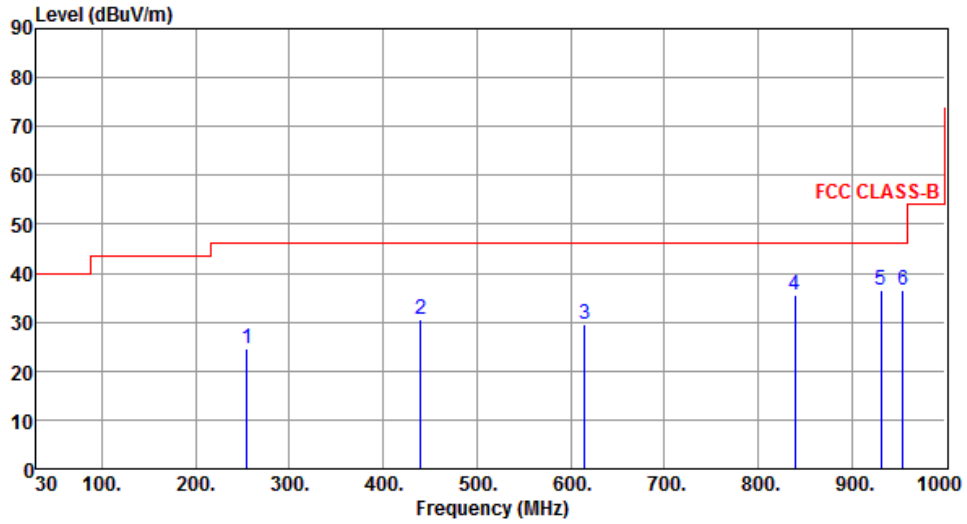

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	254.40	24.41	46.00	-21.59	33.69	-9.28	Peak	---	---
2	440.00	30.43	46.00	-15.57	34.84	-4.41	Peak	---	---
3	615.20	29.69	46.00	-16.31	30.39	-0.70	Peak	---	---
4	839.20	35.52	46.00	-10.48	32.85	2.67	Peak	---	---
5	931.20	36.65	46.00	-9.35	32.84	3.81	Peak	---	---
6	954.40	36.46	46.00	-9.54	32.39	4.07	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

<b>Modulation / SF</b>	LORA / 10	<b>Test Freq. (MHz)</b>	908.5
<b>Polarization</b>	Horizontal		

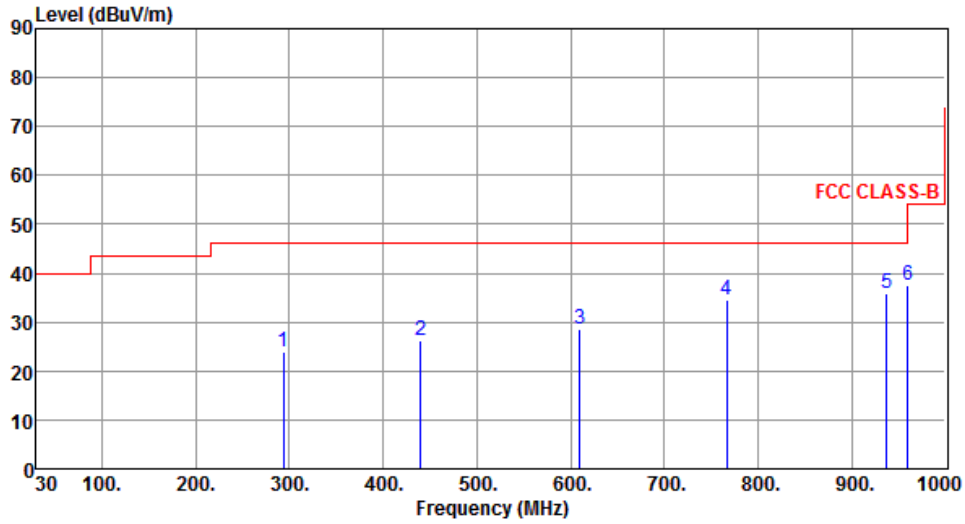

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	293.60	23.80	46.00	-22.20	31.90	-8.10	Peak	---	---
2	440.00	26.37	46.00	-19.63	30.78	-4.41	Peak	---	---
3	609.60	28.55	46.00	-17.45	29.28	-0.73	Peak	---	---
4	766.40	34.67	46.00	-11.33	33.07	1.60	Peak	---	---
5	937.60	35.96	46.00	-10.04	32.11	3.85	Peak	---	---
6	960.00	37.44	46.00	-8.56	33.23	4.21	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

<b>Modulation / SF</b>	LORA / 10	<b>Test Freq. (MHz)</b>	908.5
<b>Polarization</b>	Vertical		

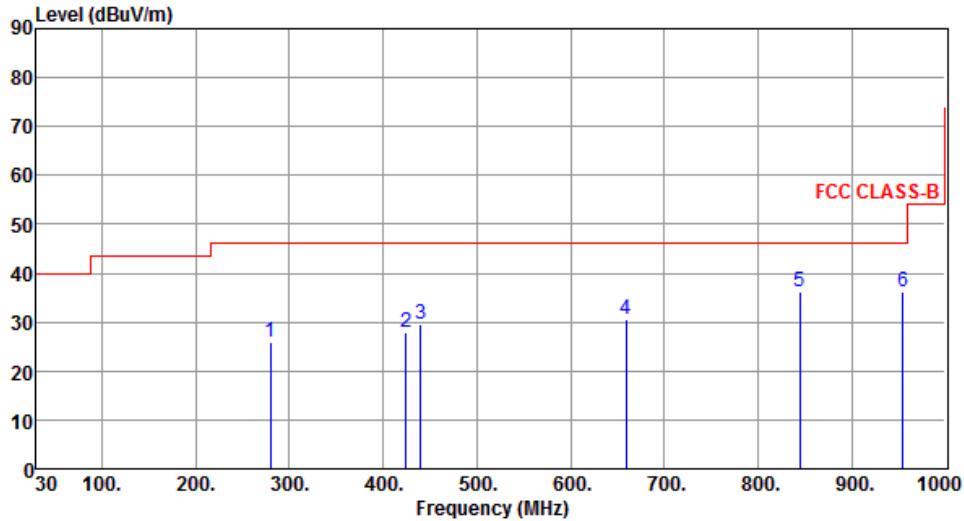

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	280.00	26.06	46.00	-19.94	34.36	-8.30	Peak	---	---
2	424.80	27.80	46.00	-18.20	32.46	-4.66	Peak	---	---
3	440.00	29.41	46.00	-16.59	33.82	-4.41	Peak	---	---
4	659.20	30.50	46.00	-15.50	30.70	-0.20	Peak	---	---
5	844.80	36.15	46.00	-9.85	33.35	2.80	Peak	---	---
6	954.40	36.25	46.00	-9.75	32.18	4.07	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



<b>Modulation / SF</b>	LORA / 10	<b>Test Freq. (MHz)</b>	914.9
<b>Polarization</b>	Horizontal		

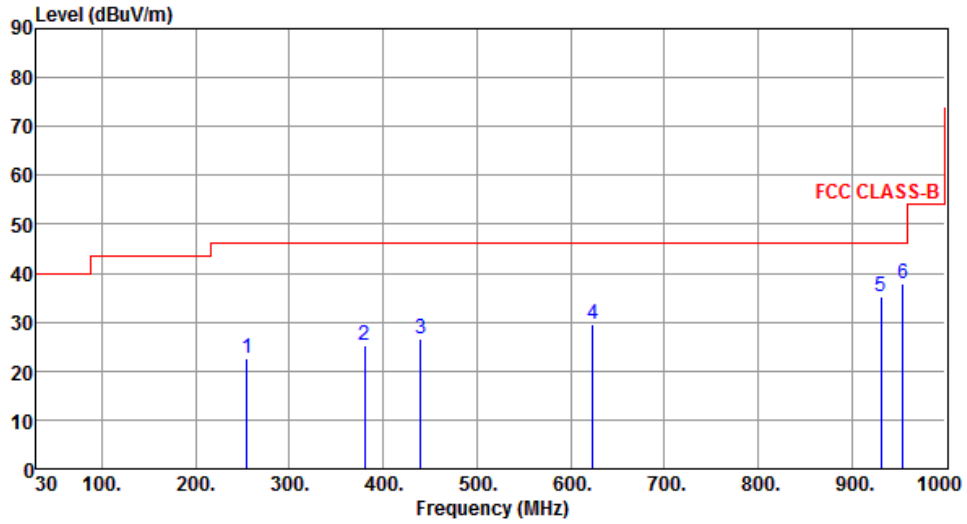

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	254.40	22.44	46.00	-23.56	31.72	-9.28	Peak	---	---
2	380.00	25.20	46.00	-20.80	30.97	-5.77	Peak	---	---
3	440.00	26.41	46.00	-19.59	30.82	-4.41	Peak	---	---
4	624.00	29.45	46.00	-16.55	29.96	-0.51	Peak	---	---
5	931.20	35.36	46.00	-10.64	31.55	3.81	Peak	---	---
6	954.40	37.76	46.00	-8.24	33.69	4.07	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

<b>Modulation / SF</b>	LORA / 10	<b>Test Freq. (MHz)</b>	914.9
<b>Polarization</b>	Vertical		

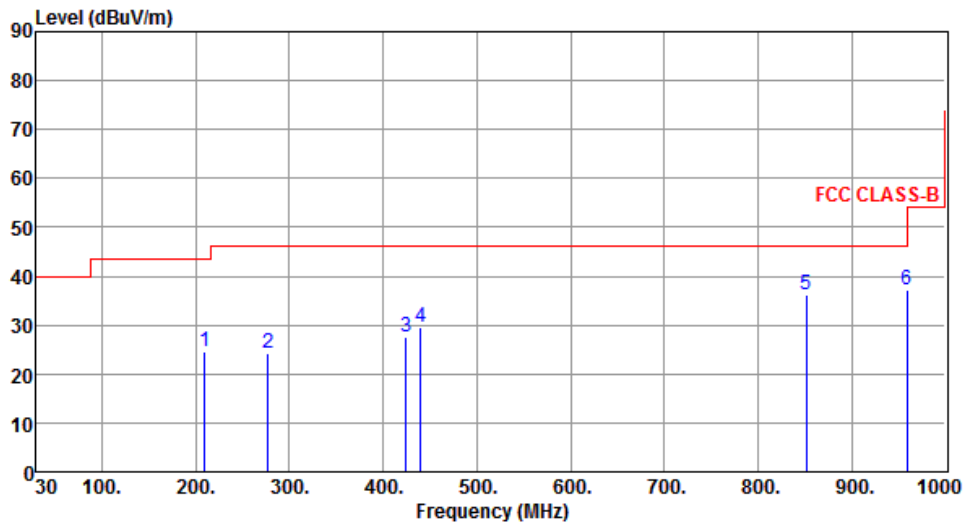

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	209.60	24.53	43.50	-18.97	35.58	-11.05	Peak	---	---
2	277.60	24.31	46.00	-21.69	32.66	-8.35	Peak	---	---
3	424.80	27.73	46.00	-18.27	32.39	-4.66	Peak	---	---
4	440.00	29.49	46.00	-16.51	33.90	-4.41	Peak	---	---
5	851.20	36.23	46.00	-9.77	33.50	2.73	Peak	---	---
6	959.20	37.28	46.00	-8.72	33.09	4.19	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

**Test Configuration 2: For model: WSMS-140\_B**

**3.1.5 Transmitter Radiated Unwanted Emissions (Below 1GHz)**

<b>Modulation / SF</b>	LORA / 10	<b>Test Freq. (MHz)</b>	902.3
<b>Polarization</b>	Horizontal		

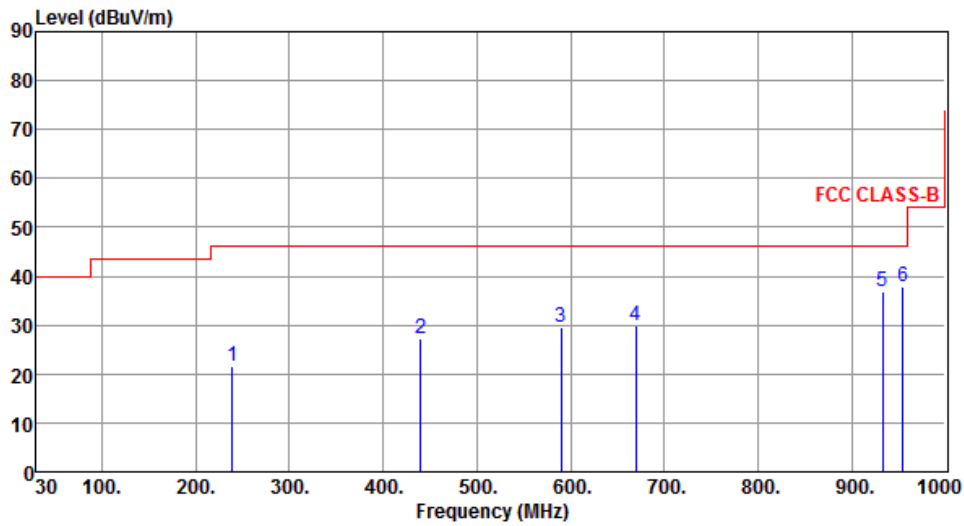

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	239.20	21.66	46.00	-24.34	31.41	-9.75	Peak	---	---
2	440.00	27.25	46.00	-18.75	31.66	-4.41	Peak	---	---
3	589.60	29.58	46.00	-16.42	30.76	-1.18	Peak	---	---
4	669.60	29.86	46.00	-16.14	29.81	0.05	Peak	---	---
5	932.80	36.81	46.00	-9.19	33.00	3.81	Peak	---	---
6	954.40	37.72	46.00	-8.28	33.65	4.07	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

<b>Modulation / SF</b>	LORA / 10	<b>Test Freq. (MHz)</b>	902.3
<b>Polarization</b>	Vertical		

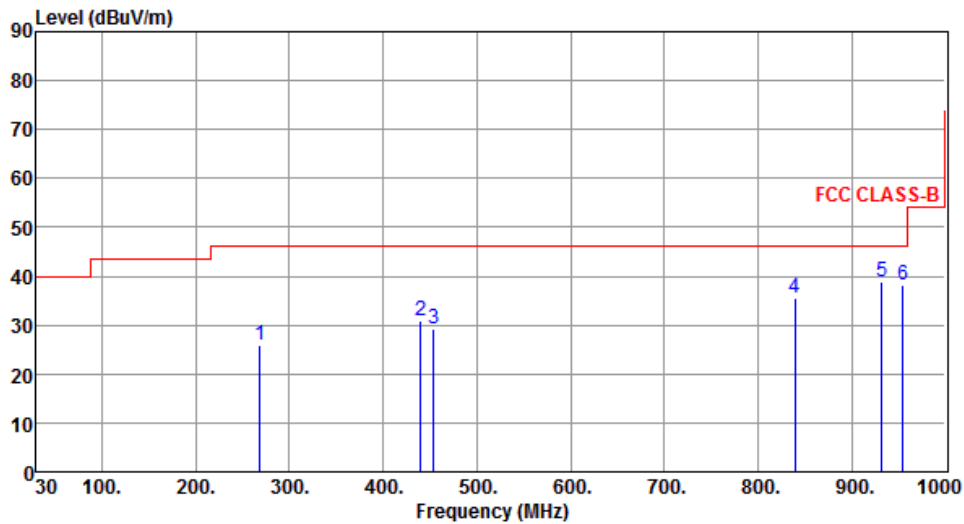

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	268.80	25.89	46.00	-20.11	34.66	-8.77	Peak	---	---
2	440.00	30.87	46.00	-15.13	35.28	-4.41	Peak	---	---
3	453.60	29.08	46.00	-16.92	33.18	-4.10	Peak	---	---
4	839.20	35.66	46.00	-10.34	32.99	2.67	Peak	---	---
5	932.00	38.75	46.00	-7.25	34.94	3.81	Peak	---	---
6	954.40	38.16	46.00	-7.84	34.09	4.07	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

<b>Modulation / SF</b>	LORA / 10	<b>Test Freq. (MHz)</b>	908.5
<b>Polarization</b>	Horizontal		

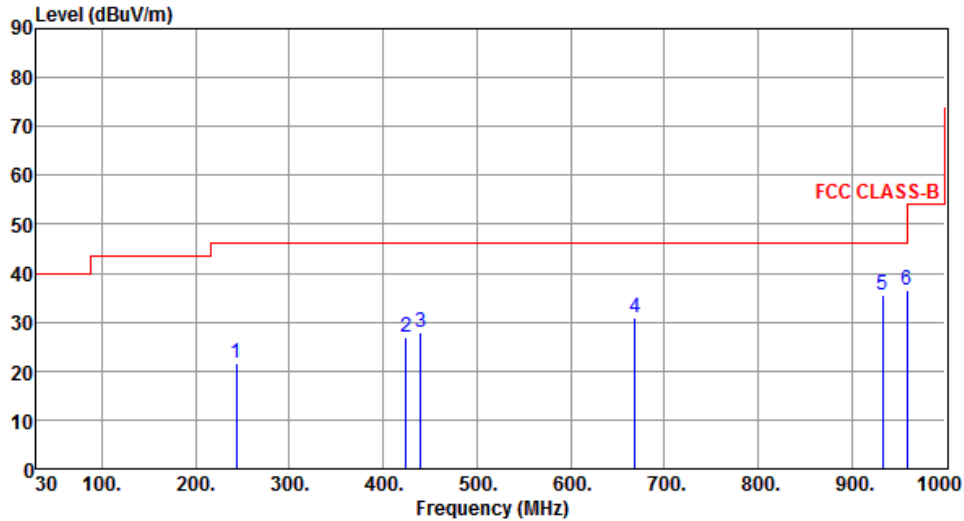

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	243.20	21.73	46.00	-24.27	31.36	-9.63	Peak	---	---
2	424.80	26.99	46.00	-19.01	31.65	-4.66	Peak	---	---
3	440.00	27.76	46.00	-18.24	32.17	-4.41	Peak	---	---
4	668.80	30.86	46.00	-15.14	30.84	0.02	Peak	---	---
5	932.80	35.68	46.00	-10.32	31.87	3.81	Peak	---	---
6	959.20	36.57	46.00	-9.43	32.38	4.19	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

<b>Modulation / SF</b>	LORA / 10	<b>Test Freq. (MHz)</b>	908.5
<b>Polarization</b>	Vertical		

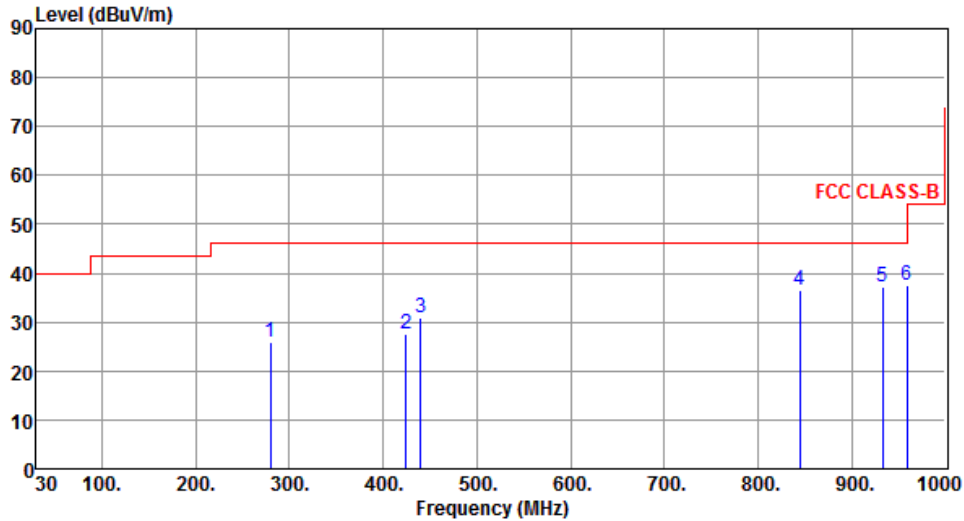

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	280.00	26.07	46.00	-19.93	34.37	-8.30	Peak	---	---
2	424.80	27.66	46.00	-18.34	32.32	-4.66	Peak	---	---
3	440.00	30.94	46.00	-15.06	35.35	-4.41	Peak	---	---
4	844.80	36.42	46.00	-9.58	33.62	2.80	Peak	---	---
5	932.80	37.10	46.00	-8.90	33.29	3.81	Peak	---	---
6	959.20	37.56	46.00	-8.44	33.37	4.19	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

<b>Modulation / SF</b>	LORA / 10	<b>Test Freq. (MHz)</b>	914.9
<b>Polarization</b>	Horizontal		

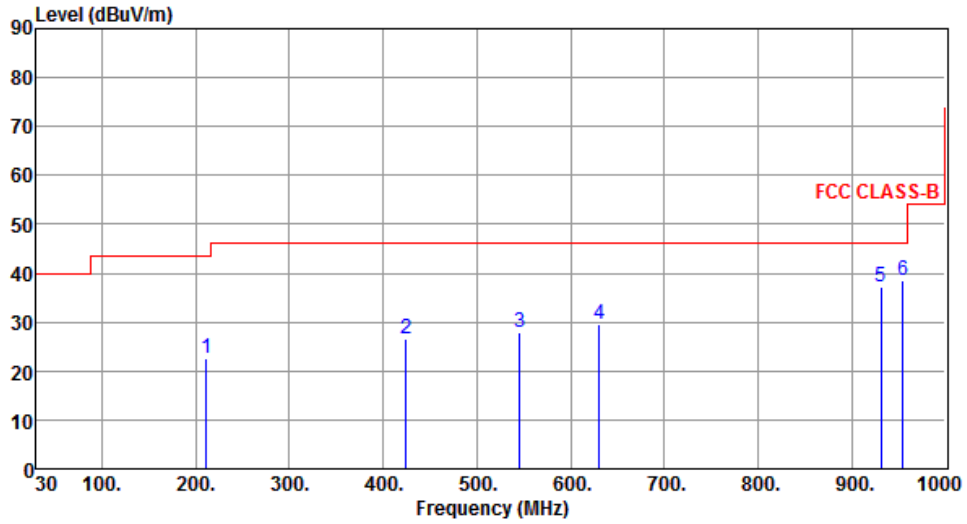

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	211.20	22.69	43.50	-20.81	33.72	-11.03	Peak	---	---
2	424.80	26.69	46.00	-19.31	31.35	-4.66	Peak	---	---
3	545.60	27.80	46.00	-18.20	29.90	-2.10	Peak	---	---
4	630.40	29.42	46.00	-16.58	29.98	-0.56	Peak	---	---
5	931.20	37.11	46.00	-8.89	33.30	3.81	Peak	---	---
6	954.40	38.52	46.00	-7.48	34.45	4.07	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

<b>Modulation / SF</b>	LORA / 10	<b>Test Freq. (MHz)</b>	914.9
<b>Polarization</b>	Vertical		

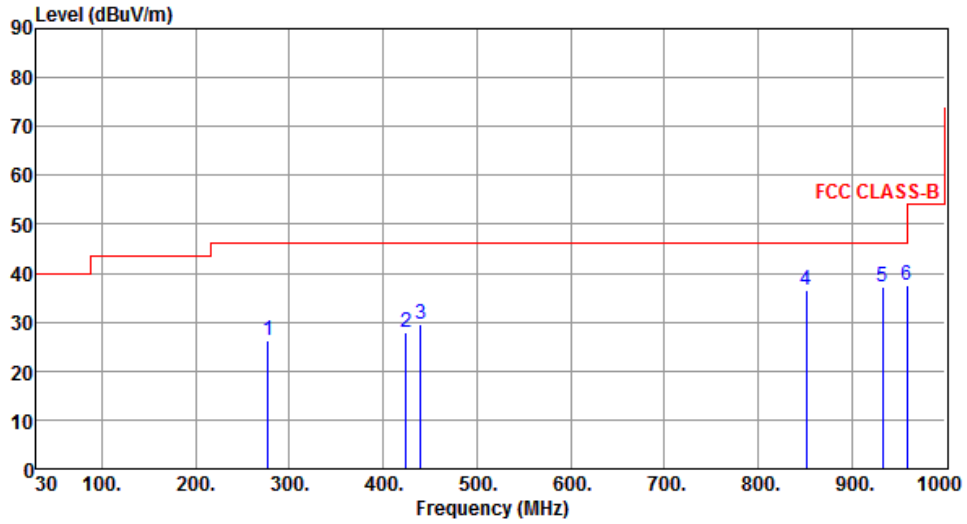

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	276.80	26.35	46.00	-19.65	34.72	-8.37	Peak	---	---
2	424.80	27.93	46.00	-18.07	32.59	-4.66	Peak	---	---
3	440.00	29.69	46.00	-16.31	34.10	-4.41	Peak	---	---
4	851.20	36.69	46.00	-9.31	33.96	2.73	Peak	---	---
5	932.80	37.26	46.00	-8.74	33.45	3.81	Peak	---	---
6	959.20	37.38	46.00	-8.62	33.19	4.19	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



**Test Configuration 3: For model: WSMS-140\_G**

**3.1.6 Transmitter Radiated Unwanted Emissions (Below 1GHz)**

<b>Modulation / SF</b>	LORA / 10	<b>Test Freq. (MHz)</b>	902.3
<b>Polarization</b>	Horizontal		

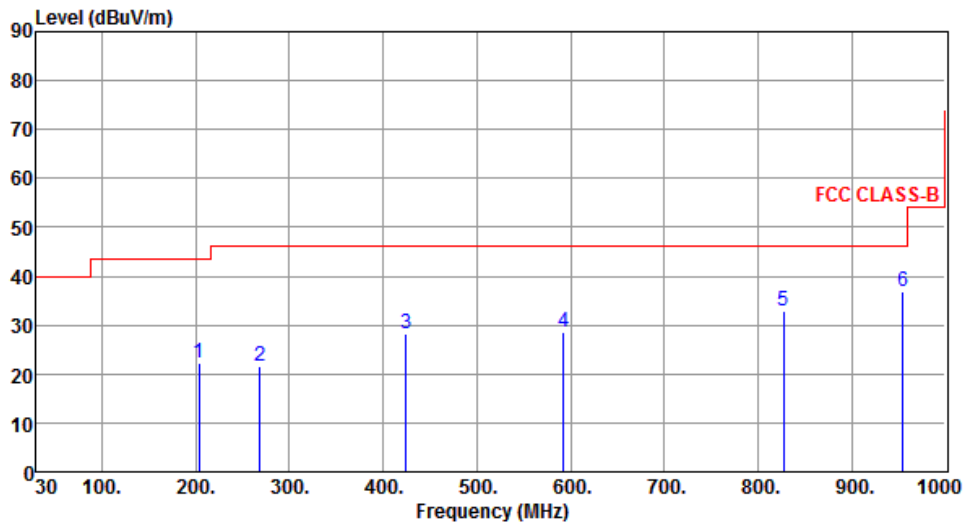

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	203.20	22.37	43.50	-21.13	33.39	-11.02	Peak	---	---
2	268.80	21.72	46.00	-24.28	30.49	-8.77	Peak	---	---
3	424.80	28.32	46.00	-17.68	32.98	-4.66	Peak	---	---
4	592.80	28.66	46.00	-17.34	29.77	-1.11	Peak	---	---
5	827.20	32.79	46.00	-13.21	30.23	2.56	Peak	---	---
6	954.40	36.85	46.00	-9.15	32.78	4.07	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

<b>Modulation / SF</b>	LORA / 10	<b>Test Freq. (MHz)</b>	902.3
<b>Polarization</b>	Vertical		

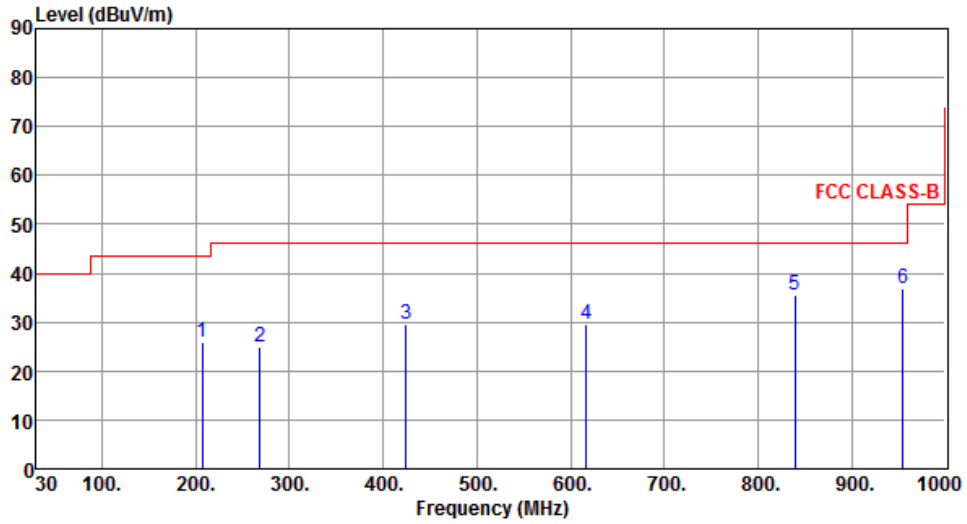

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	207.20	26.04	43.50	-17.46	37.10	-11.06	Peak	---	---
2	268.80	24.92	46.00	-21.08	33.69	-8.77	Peak	---	---
3	424.80	29.53	46.00	-16.47	34.19	-4.66	Peak	---	---
4	616.80	29.46	46.00	-16.54	30.12	-0.66	Peak	---	---
5	839.20	35.41	46.00	-10.59	32.74	2.67	Peak	---	---
6	954.40	36.74	46.00	-9.26	32.67	4.07	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

<b>Modulation / SF</b>	LORA / 10	<b>Test Freq. (MHz)</b>	908.5
<b>Polarization</b>	Horizontal		

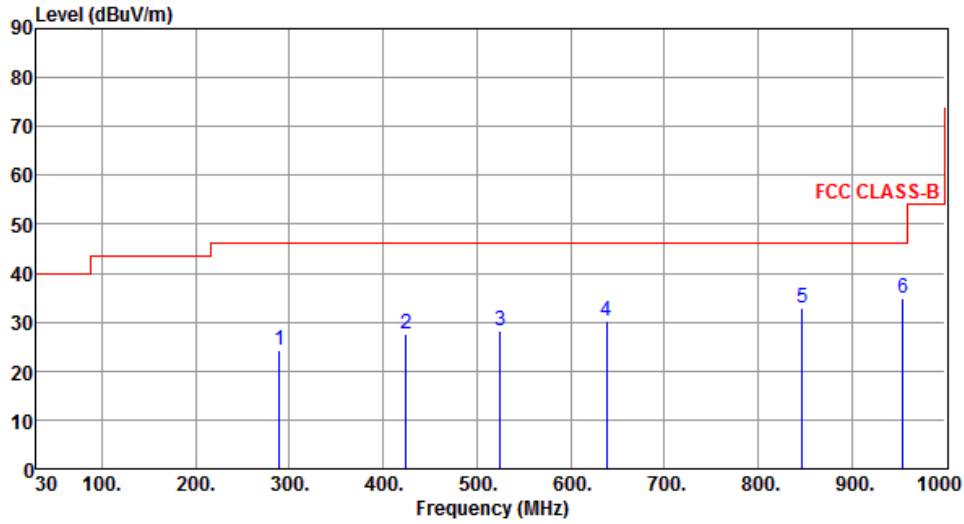

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	289.60	24.13	46.00	-21.87	32.30	-8.17	Peak	---	---
2	424.80	27.47	46.00	-18.53	32.13	-4.66	Peak	---	---
3	524.80	28.08	46.00	-17.92	30.54	-2.46	Peak	---	---
4	638.40	30.37	46.00	-15.63	30.75	-0.38	Peak	---	---
5	847.20	32.81	46.00	-13.19	30.05	2.76	Peak	---	---
6	954.40	34.77	46.00	-11.23	30.70	4.07	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

<b>Modulation / SF</b>	LORA / 10	<b>Test Freq. (MHz)</b>	908.5
<b>Polarization</b>	Vertical		

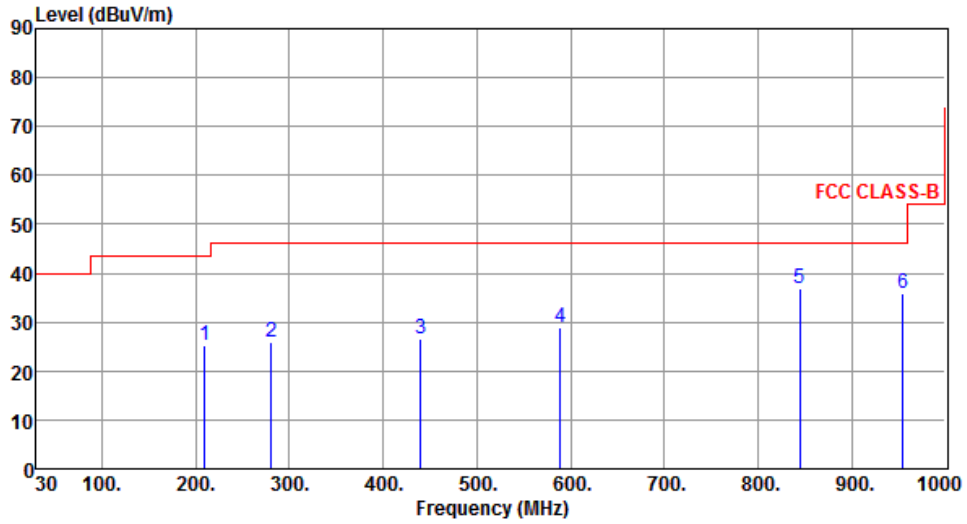

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	209.60	25.19	43.50	-18.31	36.24	-11.05	Peak	---	---
2	280.80	25.81	46.00	-20.19	34.09	-8.28	Peak	---	---
3	440.00	26.59	46.00	-19.41	31.00	-4.41	Peak	---	---
4	588.80	28.92	46.00	-17.08	30.12	-1.20	Peak	---	---
5	844.80	36.74	46.00	-9.26	33.94	2.80	Peak	---	---
6	954.40	35.91	46.00	-10.09	31.84	4.07	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

<b>Modulation / SF</b>	LORA / 10	<b>Test Freq. (MHz)</b>	914.9
<b>Polarization</b>	Horizontal		

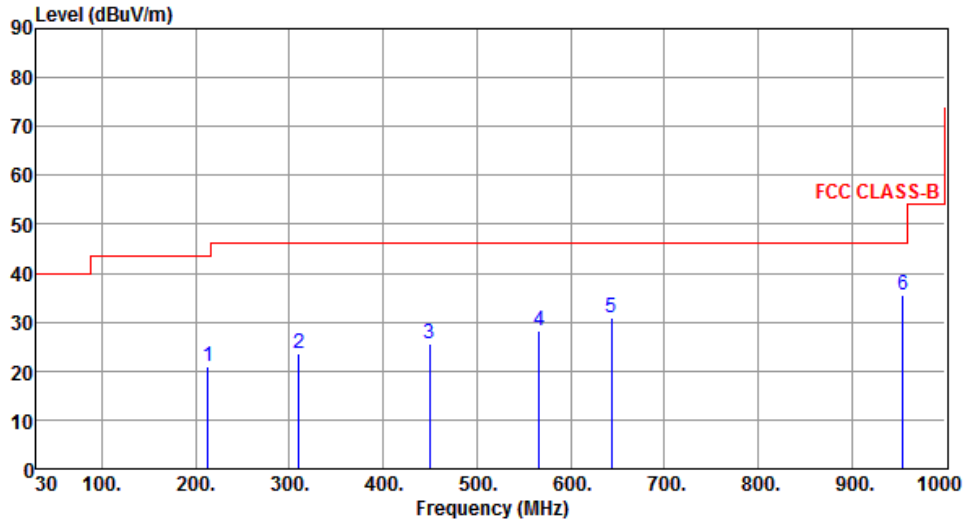

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	212.80	21.05	43.50	-22.45	32.04	-10.99	Peak	---	---
2	310.40	23.62	46.00	-22.38	31.33	-7.71	Peak	---	---
3	449.60	25.44	46.00	-20.56	29.64	-4.20	Peak	---	---
4	566.40	28.38	46.00	-17.62	30.10	-1.72	Peak	---	---
5	644.00	30.75	46.00	-15.25	31.10	-0.35	Peak	---	---
6	954.40	35.46	46.00	-10.54	31.39	4.07	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

<b>Modulation / SF</b>	LORA / 10	<b>Test Freq. (MHz)</b>	914.9
<b>Polarization</b>	Vertical		

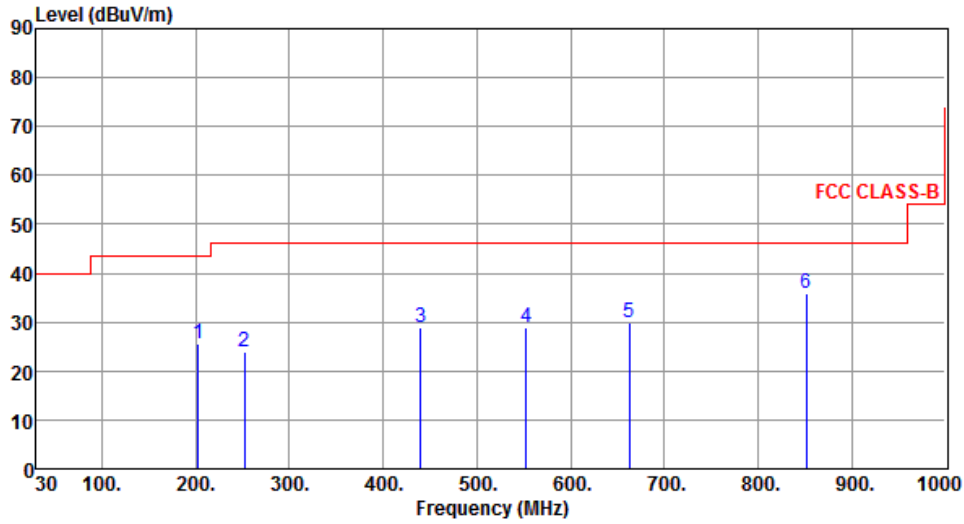

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	202.40	25.50	43.50	-18.00	36.52	-11.02	Peak	---	---
2	252.00	23.85	46.00	-22.15	33.24	-9.39	Peak	---	---
3	440.00	28.84	46.00	-17.16	33.25	-4.41	Peak	---	---
4	552.80	28.90	46.00	-17.10	30.78	-1.88	Peak	---	---
5	662.40	29.87	46.00	-16.13	30.04	-0.17	Peak	---	---
6	851.20	36.03	46.00	-9.97	33.30	2.73	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

### 3.1.7 Transmitter Radiated Unwanted Emissions (Above 1GHz)

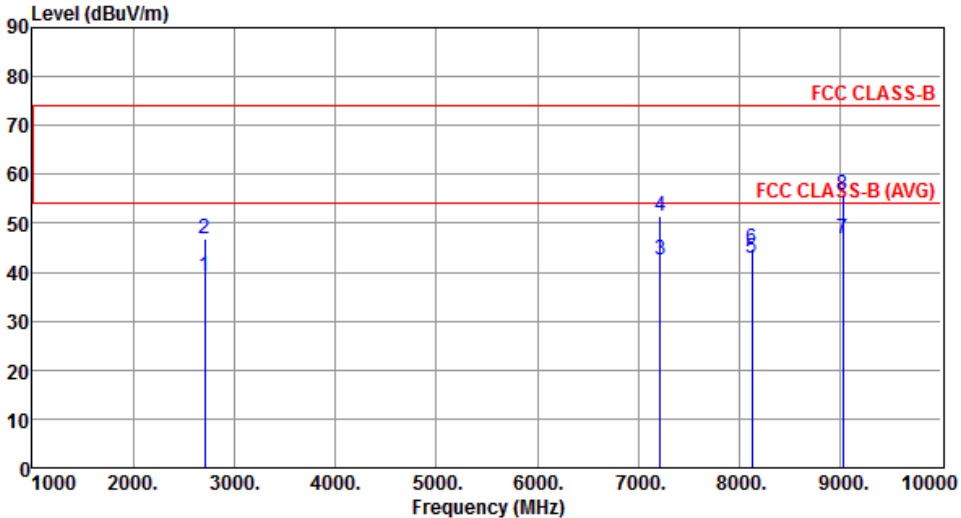Modulation / SF	LORA / 10	Test Freq. (MHz)	902.3						
Polarization	Horizontal								
									
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2706.90	39.21	54.00	-14.79	41.52	-2.31	Average	175	240
2	2706.90	46.67	74.00	-27.33	48.98	-2.31	Peak	175	240
3	7218.40	42.38	54.00	-11.62	34.20	8.18	Average	100	139
4	7218.40	51.59	74.00	-22.41	43.41	8.18	Peak	100	139
5	8120.70	42.70	54.00	-11.30	33.27	9.43	Average	130	222
6	8120.70	45.00	74.00	-29.00	35.57	9.43	Peak	130	222
7	9023.00	46.87	54.00	-7.13	35.80	11.07	Average	110	15
8	9023.00	55.82	74.00	-18.18	44.75	11.07	Peak	110	15

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)  
\*Factor includes antenna factor , cable loss and amplifier gain  
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation / SF</b>	LORA / 10	<b>Test Freq. (MHz)</b>	902.3
<b>Polarization</b>	Vertical		

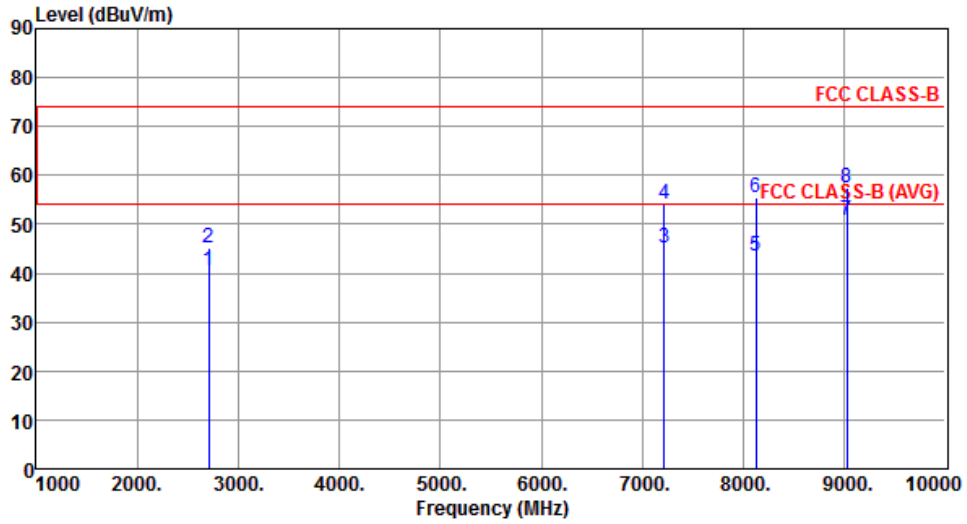

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2706.90	40.45	54.00	-13.55	42.76	-2.31	Average	131	239
2	2706.90	45.10	74.00	-28.90	47.41	-2.31	Peak	131	239
3	7218.40	45.03	54.00	-8.97	36.85	8.18	Average	135	146
4	7218.40	54.06	74.00	-19.94	45.88	8.18	Peak	135	146
5	8120.70	43.60	54.00	-10.40	34.17	9.43	Average	256	161
6	8120.70	55.41	74.00	-18.59	45.98	9.43	Peak	256	161
7	9023.00	50.77	54.00	-3.23	39.70	11.07	Average	103	336
8	9023.00	57.52	74.00	-16.48	46.45	11.07	Peak	103	336


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



<b>Modulation / SF</b>	LORA / 10	<b>Test Freq. (MHz)</b>	908.5
<b>Polarization</b>	Horizontal		

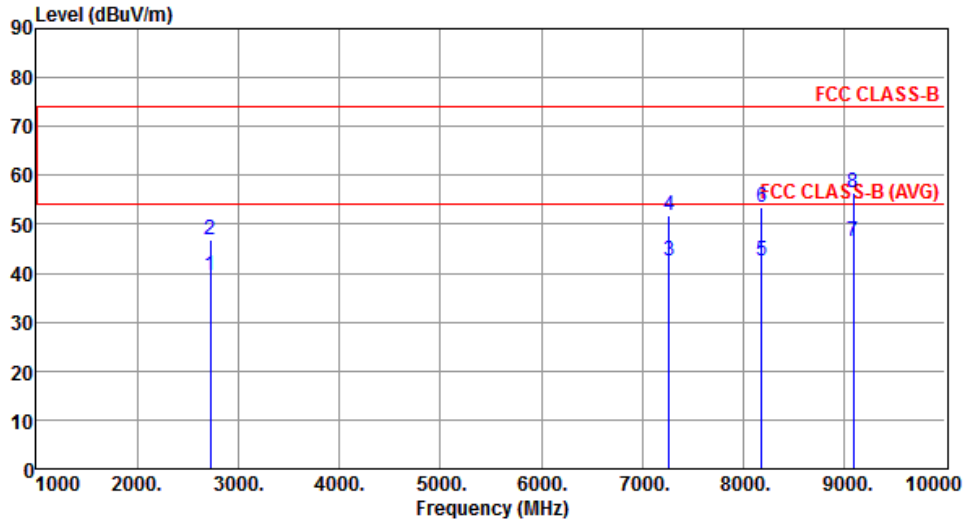


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2725.50	39.43	54.00	-14.57	41.67	-2.24	Average	176	235
2	2725.50	46.88	74.00	-27.12	49.12	-2.24	Peak	176	235
3	7268.00	42.63	54.00	-11.37	34.34	8.29	Average	103	140
4	7268.00	51.86	74.00	-22.14	43.57	8.29	Peak	103	140
5	8176.50	42.52	54.00	-11.48	33.17	9.35	Average	128	221
6	8176.50	53.37	74.00	-20.63	44.02	9.35	Peak	128	221
7	9085.00	46.63	54.00	-7.37	35.40	11.23	Average	115	16
8	9085.00	56.38	74.00	-17.62	45.15	11.23	Peak	115	16

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation / SF</b>	LORA / 10	<b>Test Freq. (MHz)</b>	908.5
<b>Polarization</b>	Vertical		

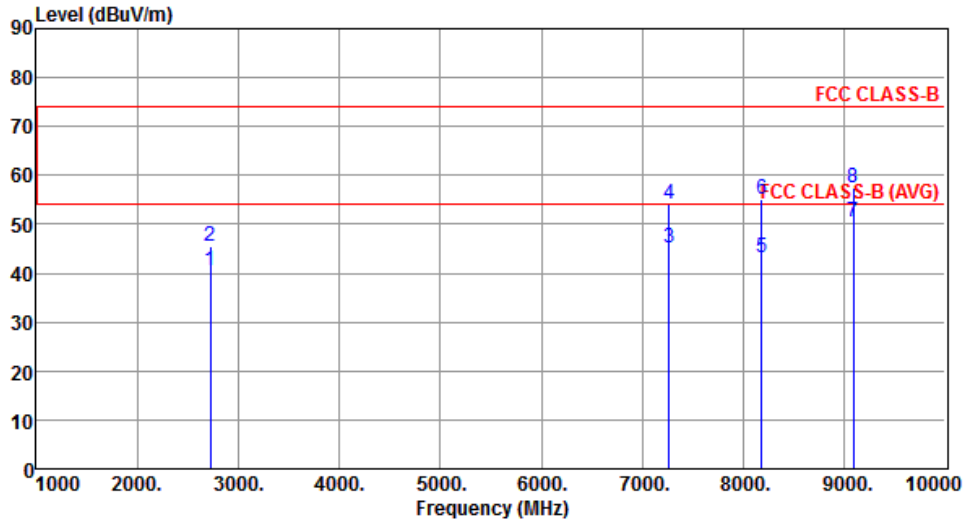

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2725.50	40.66	54.00	-13.34	42.90	-2.24	Average	123	241
2	2725.50	45.43	74.00	-28.57	47.67	-2.24	Peak	123	241
3	7268.00	45.19	54.00	-8.81	36.90	8.29	Average	134	145
4	7268.00	54.23	74.00	-19.77	45.94	8.29	Peak	134	145
5	8176.50	43.34	54.00	-10.66	33.99	9.35	Average	257	157
6	8176.50	55.16	74.00	-18.84	45.81	9.35	Peak	257	157
7	9085.00	50.45	54.00	-3.55	39.22	11.23	Average	111	338
8	9085.00	57.46	74.00	-16.54	46.23	11.23	Peak	111	338


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

T

<b>Modulation / SF</b>	LORA / 10	<b>Test Freq. (MHz)</b>	914.9
<b>Polarization</b>	Horizontal		

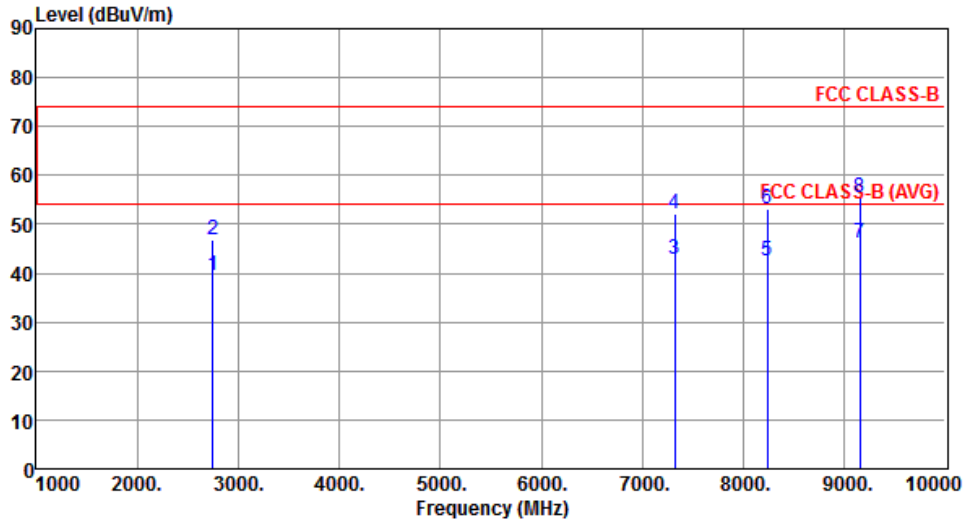


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2744.70	39.36	54.00	-14.64	41.55	-2.19	Average	175	239
2	2744.70	46.88	74.00	-27.12	49.07	-2.19	Peak	175	239
3	7319.20	42.97	54.00	-11.03	34.56	8.41	Average	100	136
4	7319.20	52.11	74.00	-21.89	43.70	8.41	Peak	100	136
5	8234.10	42.62	54.00	-11.38	33.26	9.36	Average	125	223
6	8234.10	53.21	74.00	-20.79	43.85	9.36	Peak	125	223
7	9149.00	46.22	54.00	-7.78	34.84	11.38	Average	120	17
8	9149.00	55.50	74.00	-18.50	44.12	11.38	Peak	120	17

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation / SF</b>	LORA / 10	<b>Test Freq. (MHz)</b>	914.9
<b>Polarization</b>	Vertical		

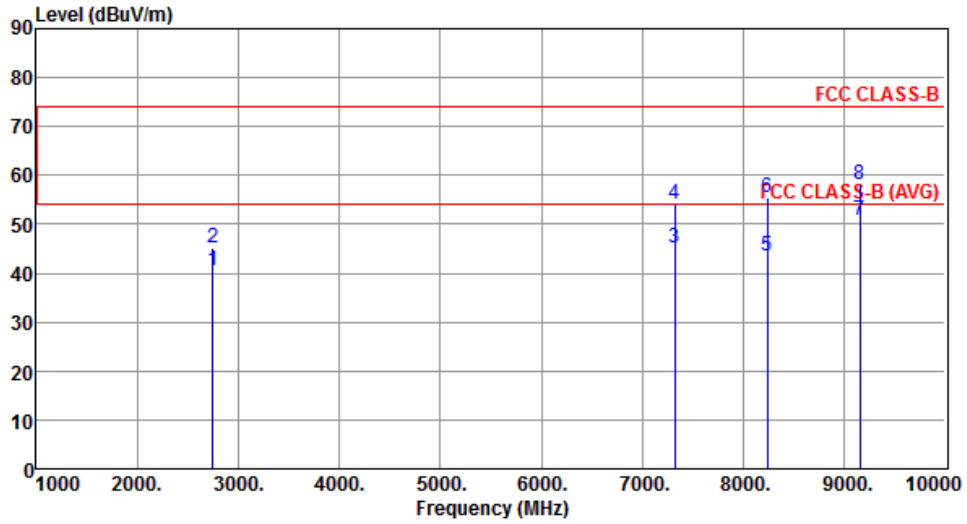

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2744.70	40.57	54.00	-13.43	42.76	-2.19	Average	125	243
2	2744.70	45.33	74.00	-28.67	47.52	-2.19	Peak	125	243
3	7319.20	45.16	54.00	-8.84	36.75	8.41	Average	135	144
4	7319.20	54.18	74.00	-19.82	45.77	8.41	Peak	135	144
5	8234.10	43.62	54.00	-10.38	34.26	9.36	Average	256	159
6	8234.10	55.39	74.00	-18.61	46.03	9.36	Peak	256	159
7	9149.00	50.96	54.00	-3.04	39.58	11.38	Average	126	337
8	9149.00	58.08	74.00	-15.92	46.70	11.38	Peak	126	337

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

## 3.2 Unwanted Emissions into Non-Restricted Frequency Bands

### 3.2.1 Limit of Unwanted Emissions into Non-Restricted Frequency Bands

The peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz.

### 3.2.2 Test Procedures


#### Reference Level Measurement

1. Set the RBW = 100 kHz, VBW = 300 kHz, Detector = peak.
2. Set Sweep time = auto couple, Trace mode = max hold.
3. Allow trace to fully stabilize.
4. Use the peak marker function to determine the maximum amplitude level.


#### Unwanted Emissions Level Measurement

1. Set RBW = 100 kHz, VBW = 300 kHz, Detector = peak.
2. Trace Mode = max hold, Sweep = auto couple.
3. Allow the trace to stabilize.
4. Use peak marker function to determine maximum amplitude of all unwanted emissions within any 100 kHz bandwidth.

### 3.2.3 Test Setup





### 3.2.4 Unwanted Emissions into Non-Restricted Frequency Bands


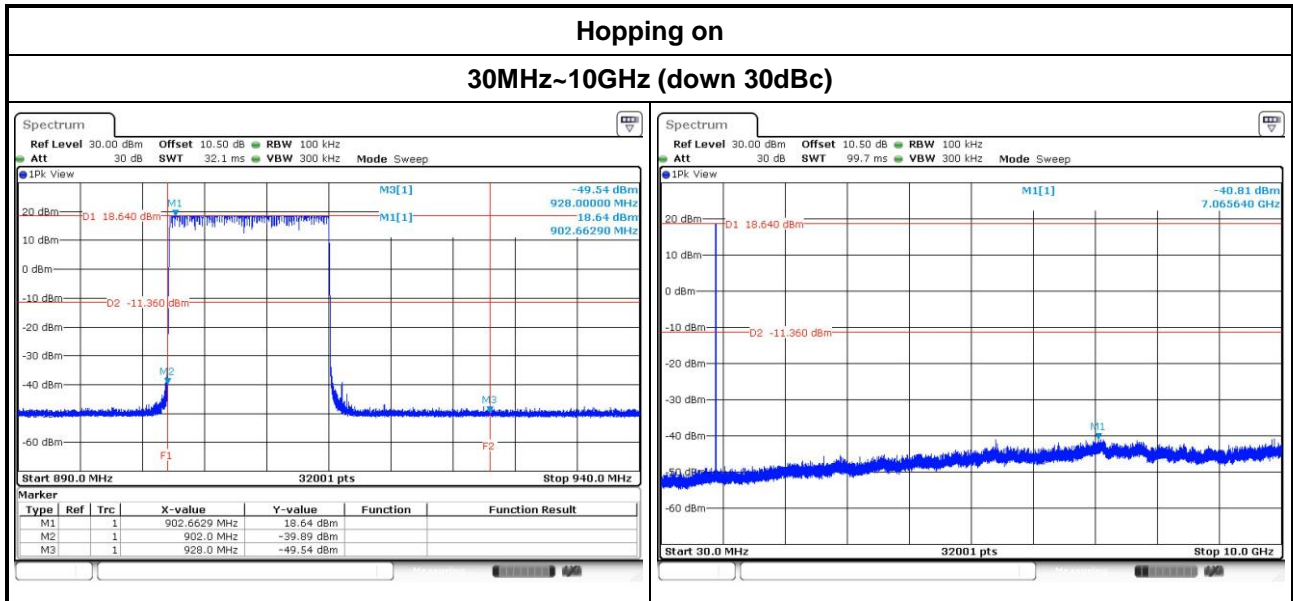


### Hopping off



#### TX Frequency 902.3MHz / 30MHz~10GHz (down 30dBc)

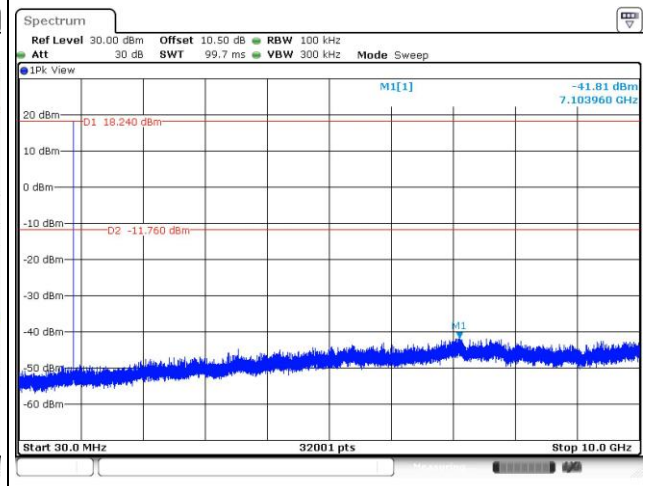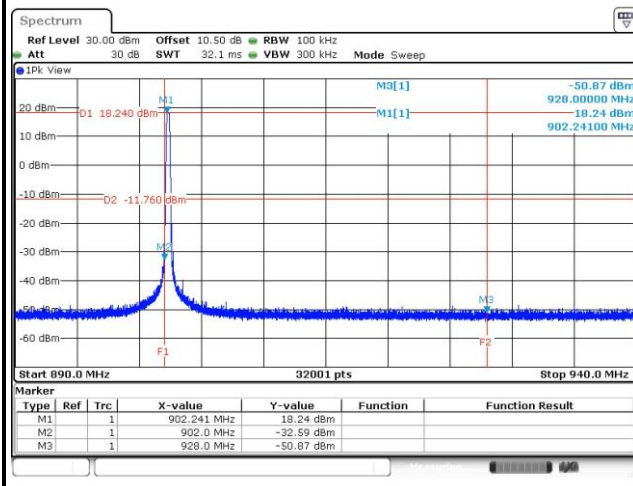

#### TX Frequency 908.5MHz / 30MHz~10GHz (down 30dBc)

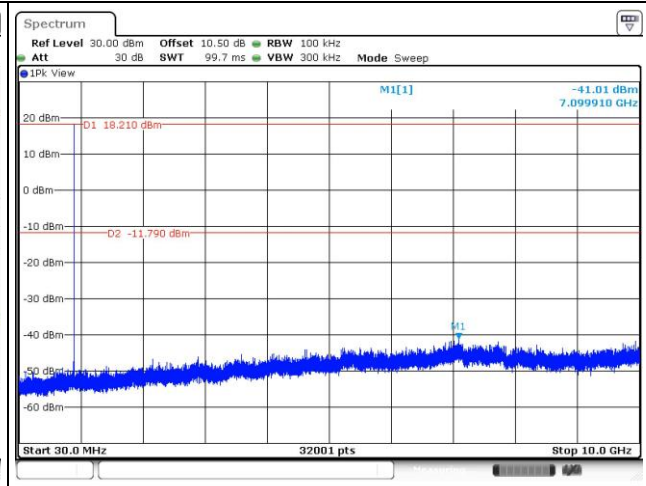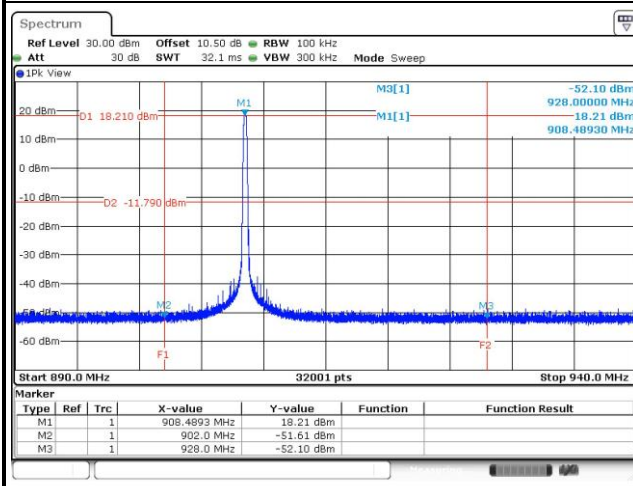

#### TX Frequency 914.9MHz / 30MHz~10GHz (down 30dBc)

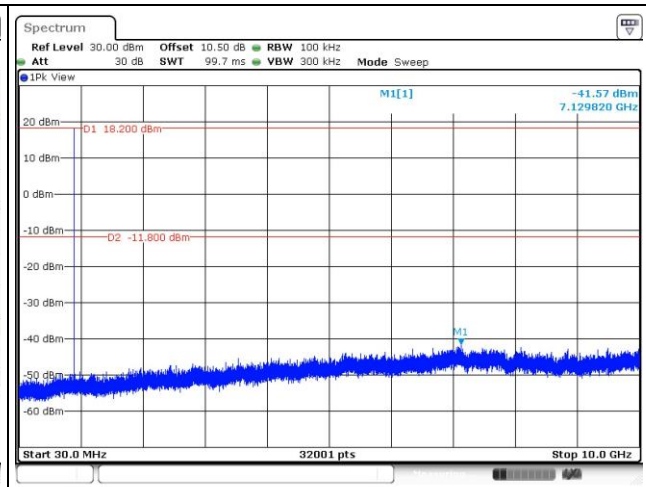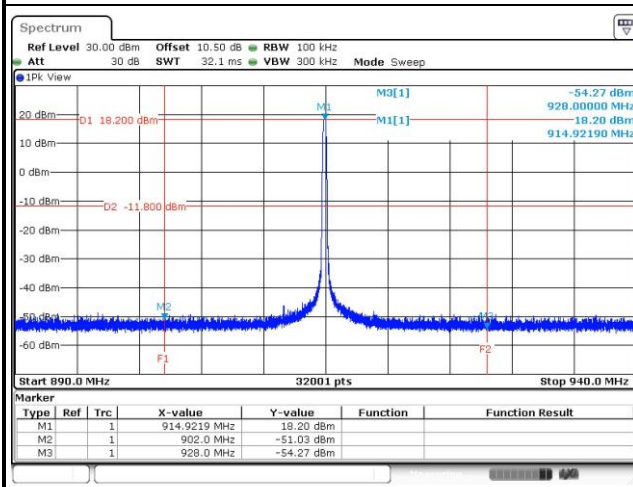

### 3.3 Conducted Output Power


#### 3.3.1 Limit of Conducted Output Power

- 1 Watt, systems employing at least 50 hopping channels;
- 0.25 Watt, for systems employing less than 50 hopping channels, but at least 25 hopping channels,

#### 3.3.2 Test Procedures

1. A wideband power meter is used for power measurement. Bandwidth of power sensor and meter is 50MHz
2. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power

#### 3.3.3 Test Setup



#### 3.3.4 Test Result of Conducted Output Power

Modulation / SF	Freq. (MHz)	Output Power (mW)	Output Power (dBm)	Limit (W)
LORA / 10	902.3	78.34	18.94	1
LORA / 10	908.5	78.16	18.93	1
LORA / 10	914.9	77.80	18.91	1



### 3.4 Number of Hopping Frequency


#### 3.4.1 Limit of Number of Hopping Frequency

Number of Hopping Frequencies Limit for Frequency Hopping Systems	
<input checked="" type="checkbox"/>	902-928 MHz Band:
<input type="checkbox"/>	$N \geq 50$ , 20 dB bandwidth of the hopping channel is less than 250 kHz
<input type="checkbox"/>	$N \geq 25$ , 20 dB bandwidth of the hopping channel is 250 kHz or greater
<input checked="" type="checkbox"/>	Hybrid mode, No minimum number of hopping channels associated with hybrid system.
<b>N:</b> Number of Hopping Frequencies	


#### 3.4.2 Test Procedures

1. Set RBW = 100kHz, VBW = 300kHz, Sweep time = Auto, Detector = Peak Trace max hold.
2. Allow trace to stabilize.

#### 3.4.3 Test Setup



#### 3.4.4 Test Result of Number of Hopping Frequency

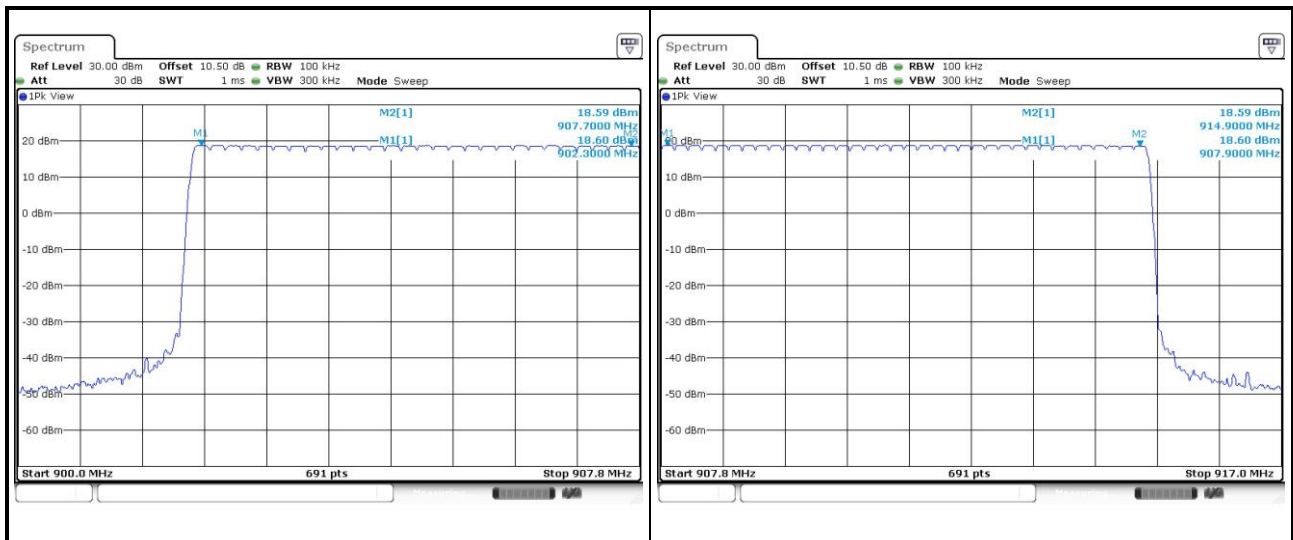

## 3.5 20dB and Occupied Bandwidth

### 3.5.1 Test Procedures


#### 20dB Bandwidth

1. Set RBW=3kHz, VBW=10kHz, Sweep time=Auto, Detector=Peak Trace max hold.
2. Allow trace to stabilize.
3. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

#### Occupied Bandwidth

1. Set RBW=3kHz, VBW=10kHz, Sweep time = Auto, Detector=Sample, Trace max hold
2. Allow trace to stabilize
3. Use Occupied bandwidth function of spectrum analyzer to measuring 99% occupied bandwidth

### 3.5.2 Test Setup



### 3.5.3 Test result of 20dB and Occupied Bandwidth

Modulation / SF	Freq. (MHz)	20dB Bandwidth (kHz)	Occupied Bandwidth (kHz)
LORA / 10	902.3	139.13	125.80
LORA / 10	908.5	138.26	125.80
LORA / 10	914.9	139.13	125.60



## 3.6 Channel Separation


### 3.6.1 Limit of Channel Separation

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

### 3.6.2 Test Procedures


1. Set RBW=10kHz, VBW=30kHz, Sweep time=Auto, Detector=Peak Trace max hold.
2. Allow trace to stabilize.
3. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The EUT shall show compliance with the appropriate regulatory limit

### 3.6.3 Test Setup



### 3.6.4 Test result of Channel Separation

Modulation / SF	Freq. (MHz)	Adjacent Channel Separation (kHz)	20dB Bandwidth (kHz)	Pass/Fail
LORA / 10	902.3	200.80	139.13	Pass
LORA / 10	908.5	200.80	138.26	Pass
LORA / 10	914.9	200.80	139.13	Pass

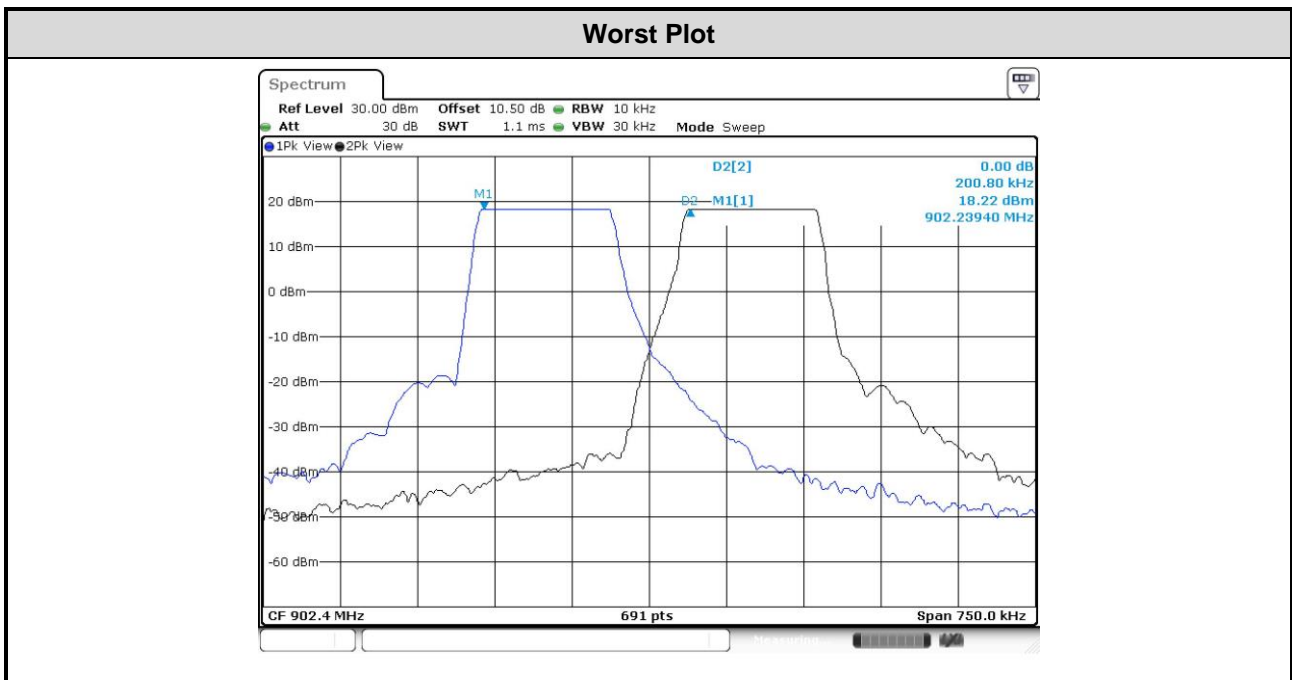

### 3.7 Number of Dwell Time


#### 3.7.1 Limit of Dwell time

Time of Occupancy (Dwell Time) Limit for Frequency Hopping Systems	
<input checked="" type="checkbox"/>	902-928 MHz Band:
<input type="checkbox"/>	$\leq 0.4$ second within a 20 second period, 20 dB bandwidth of the hopping channel is less than 250 kHz
<input type="checkbox"/>	$\leq 0.4$ second within a 10 second period, 20 dB bandwidth of the hopping channel is 250 kHz or greater
<input checked="" type="checkbox"/>	Hybrid mode ,an average time of occupancy on any frequency not to exceed 0.4 seconds within a time period in seconds equal to the number of hopping frequencies employed multiplied by 0.4

#### 3.7.2 Test Procedures


1. Set RBW=100kHz, VBW=300kHz, Sweep time=6.4s / 500ms, Detector=Peak, Span=0Hz, Trace max hold.
2. Measure and record the burst on time.
3. Set RBW=100kHz, VBW=300kHz, Sweep time=25.6s / 500ms, Detector=Peak, Span=0Hz, Trace max hold.
4. Measure and record the burst on time.


#### 3.7.3 Test Setup



### 3.7.4 Test Result of Dwell Time



Measured dwell time result for 16ch					
Modulation / SF	Freq. (MHz)	Length of Transmission Time (sec)	Number of Transmission in a 6.4 s (16 Hopping*0.4s)	Result (s)	Limit (s)
LORA / 7	902.3	0.3997187	1	0.400	0.4
LORA / 8	902.3	0.3999531	1	0.400	0.4
LORA / 9	902.3	0.3902188	1	0.390	0.4
LORA / 10	902.3	0.3707656	1	0.371	0.4

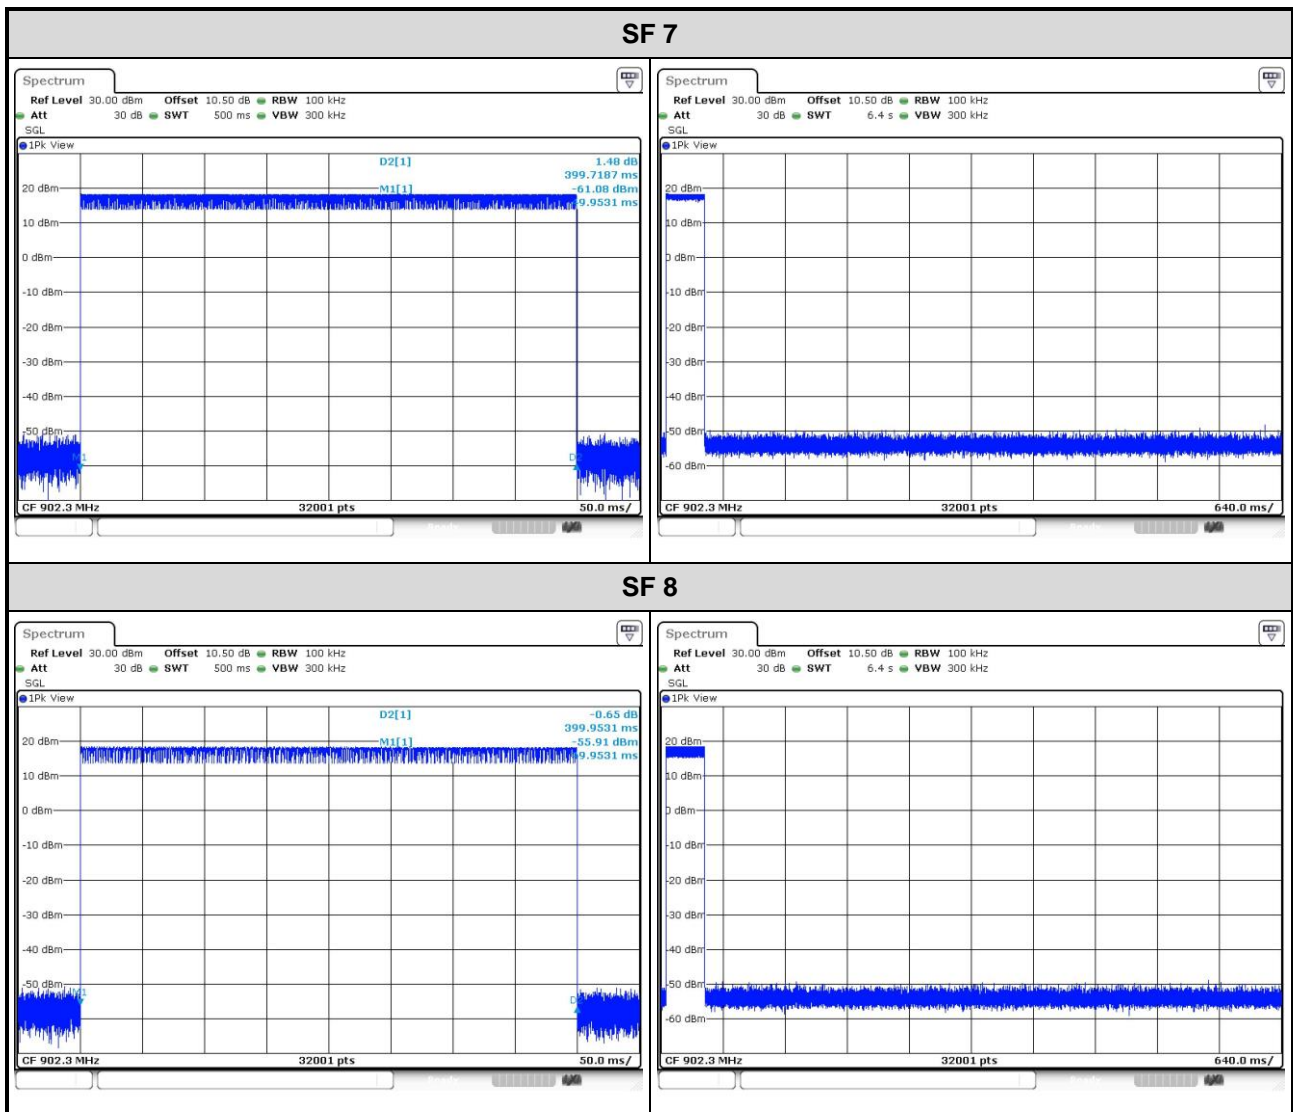


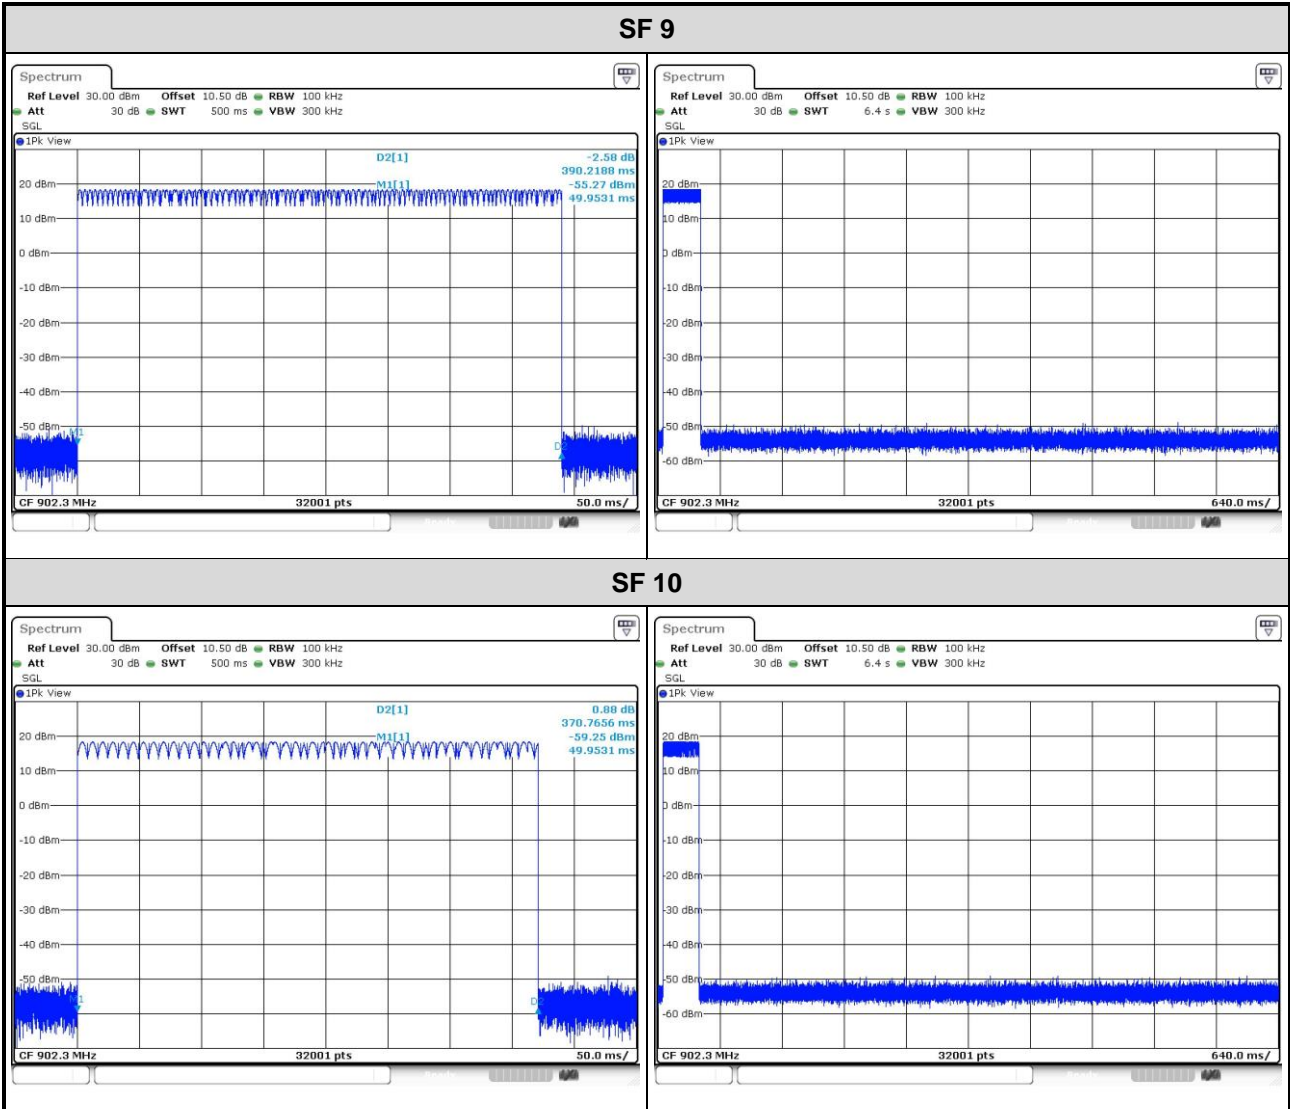



Measured dwell time result for 64ch					
Modulation / SF	Freq. (MHz)	Length of Transmission Time (sec)	Number of Transmission in a 25.6 s (64 Hopping*0.4s)	Result (s)	Limit (s)
LORA / 7	902.3	0.3997187	1	0.400	0.4
LORA / 8	902.3	0.3999531	1	0.400	0.4
LORA / 9	902.3	0.3902188	1	0.390	0.4
LORA / 10	902.3	0.3707656	1	0.371	0.4

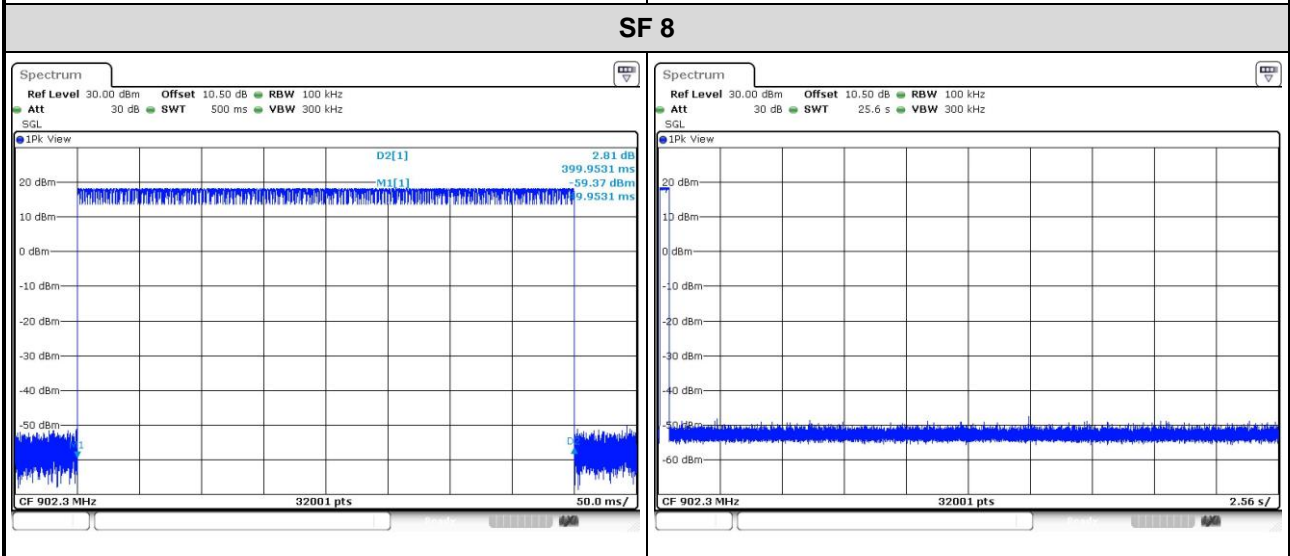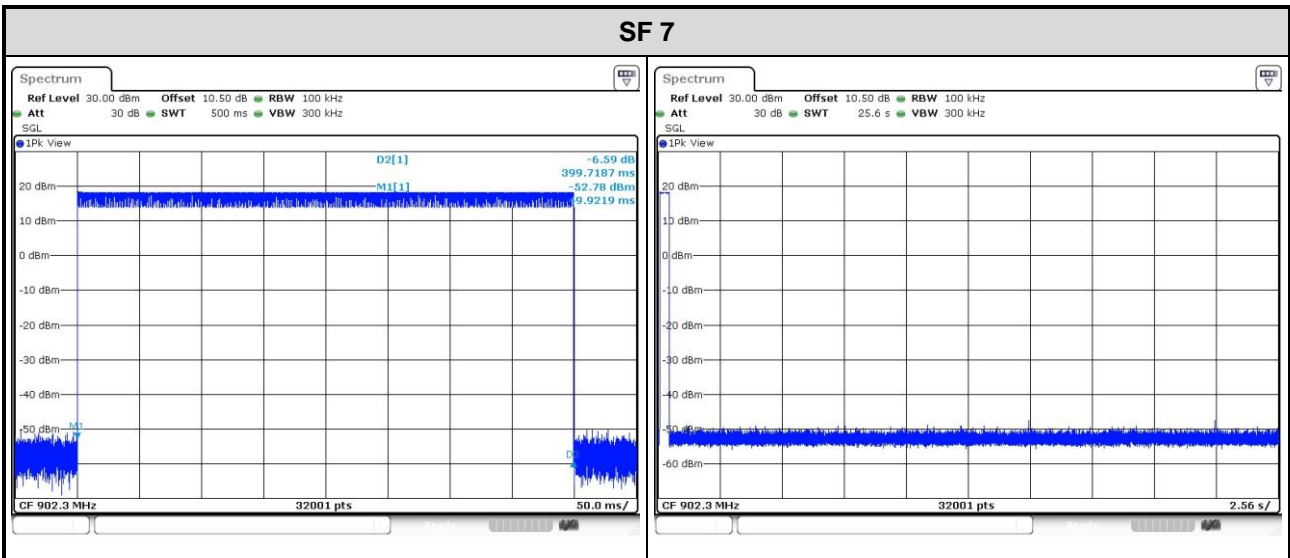

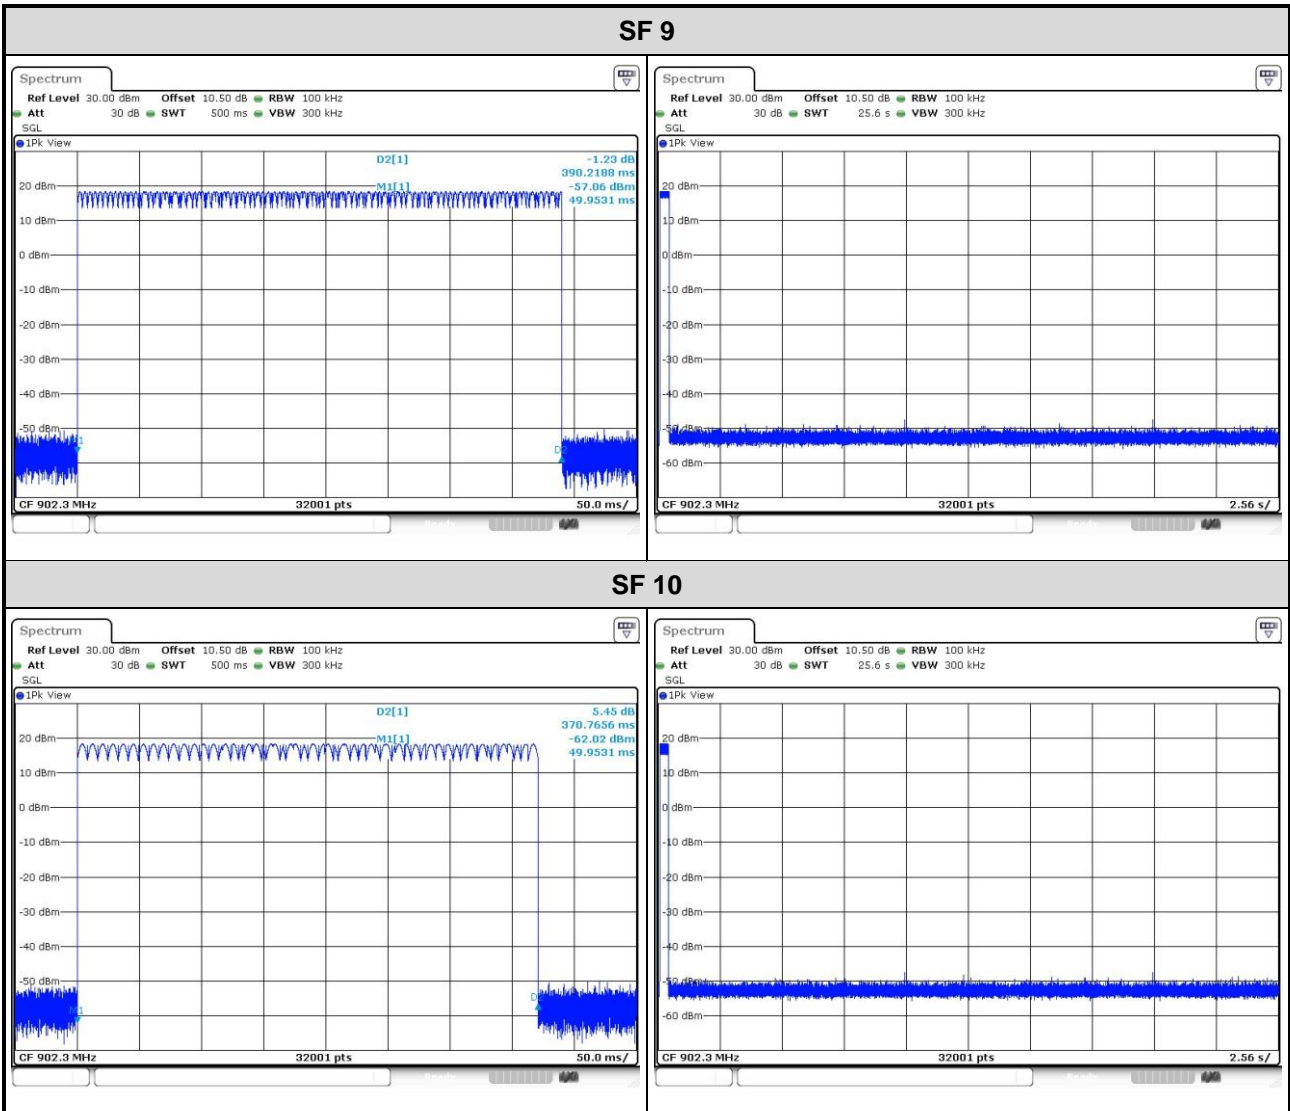

## 3.8 Power Spectral Density


### 3.8.1 Limit of Power Spectral Density

Power spectral density shall not be greater than 8 dBm in any 3 kHz band. This item is for Hybrid mode.

### 3.8.2 Test Procedures


1. Set the RBW = 3kHz, VBW = 10 kHz.
2. Detector = RMS, Sweep time = auto couple.
3. Employ trace averaging (RMS) mode over a minimum of 100 traces
4. Use the peak marker function to determine the maximum amplitude level.

### 3.8.3 Test Setup



### 3.8.4 Test Result of Power Spectral Density

Modulation / SF	Freq. (MHz)	Total Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)
LORA / 10	902.3	3.58	8.00
LORA / 10	908.5	3.87	8.00
LORA / 10	914.9	3.53	8.00

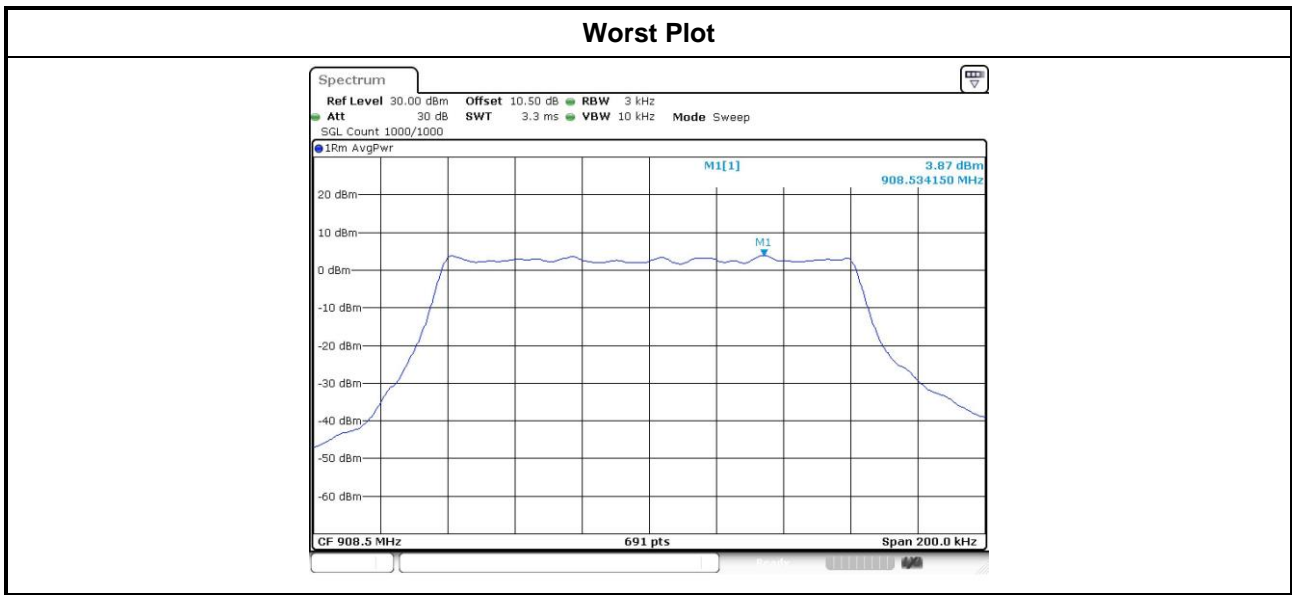

## 4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <http://www.icertifi.com.tw>.

### **Linkou**

Tel: 886-2-2601-1640

No. 30-2, Ding Fwu Tsuen, Lin  
Kou District, New Taipei City,  
Taiwan, R.O.C.

### **Kwei Shan**

Tel: 886-3-271-8666

No. 3-1, Lane 6, Wen San 3rd St.,  
Kwei Shan District, Tao Yuan City  
333, Taiwan, R.O.C.

### **Kwei Shan Site II**

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd  
St., Kwei Shan District, Tao Yuan  
City 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Email: ICC\_Service@icertifi.com.tw

==END==