



## AMENDMENT: PROCESSING GAIN OF DIRECT SEQUENCE SPREAD SPECTRUM MEASUREMENT

### 1. LIMITS OF PROCESSING GAIN OF A DIRECT SEQUENCE SPREAD SPECTRUM MEASUREMENT

The limit of processing gain is 10dB

#### 1.1 TEST INSTRUMENTS & SUPPORT UNIT


Description & Manufacturer	Model No.	Serial No.
Anritsu Spectrum Analyzer, 9kHz to 30GHz	MS2667C	M10281
Anritsu Signal Generator, 10kHz to 20GHz	68247B	984703
Hewlett Packard Power Meter,	HP438A	2743A04416
Hewlett Packard Power Sensor, -30 to 20dBm	8485A	2942A08387
Hewlett Packard Step Attenuator, 10dB steps	HP8496B	3247A18505
Mini-Circuits Power Splitter	ZN2PD-9G	NA
DELL Laptop Computer	Inspiron 5000e	NA
Cmpaq Laptop Computer	PPX	99125



## 1.2 METHOD OF MEASUREMENT

The processing gain may be measured using the CW jamming margin method. Section 4.7.4 shows the test configuration. The test consists of stepping a signal generator in 50 kHz increments across the passband of the system. At each point, the generator level required to produce the recommended Bit Error Rate (BER) is recorded. This level is jammer level. The output power of the transmitting unit is measured at the same point. The jammer to Signal (J/S) ratio is then calculated. Discard the worst 20% of the J/S data points. The lowest remaining J/S ratio is used when calculating the Process Gain.

The reference PER is specified as 8%. The corresponding Es/No (signal to noise ratio per symbol) is 16.4 dB. The curve is attached as below.

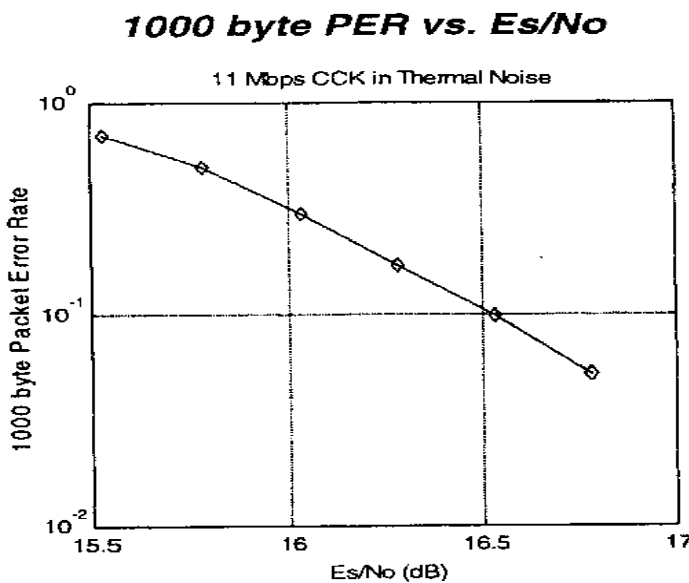

This value and the measured J/S ratio are used in the following equation to calculate the Process Gain (Gp) of the system.

$$G_p = (S/N)_o + M_j + L_{sys}$$

Where:


(S/N)<sub>o</sub>: Signal to noise ratio for the chosen BER.



Mj : Maximum jammer to Signal Ratio recorded at the detected BER.

Lsys : System losses . For the purpose of this processing gain calculation, we assume Lsys at its minimum value of 2 dB.

### TEST SETUP

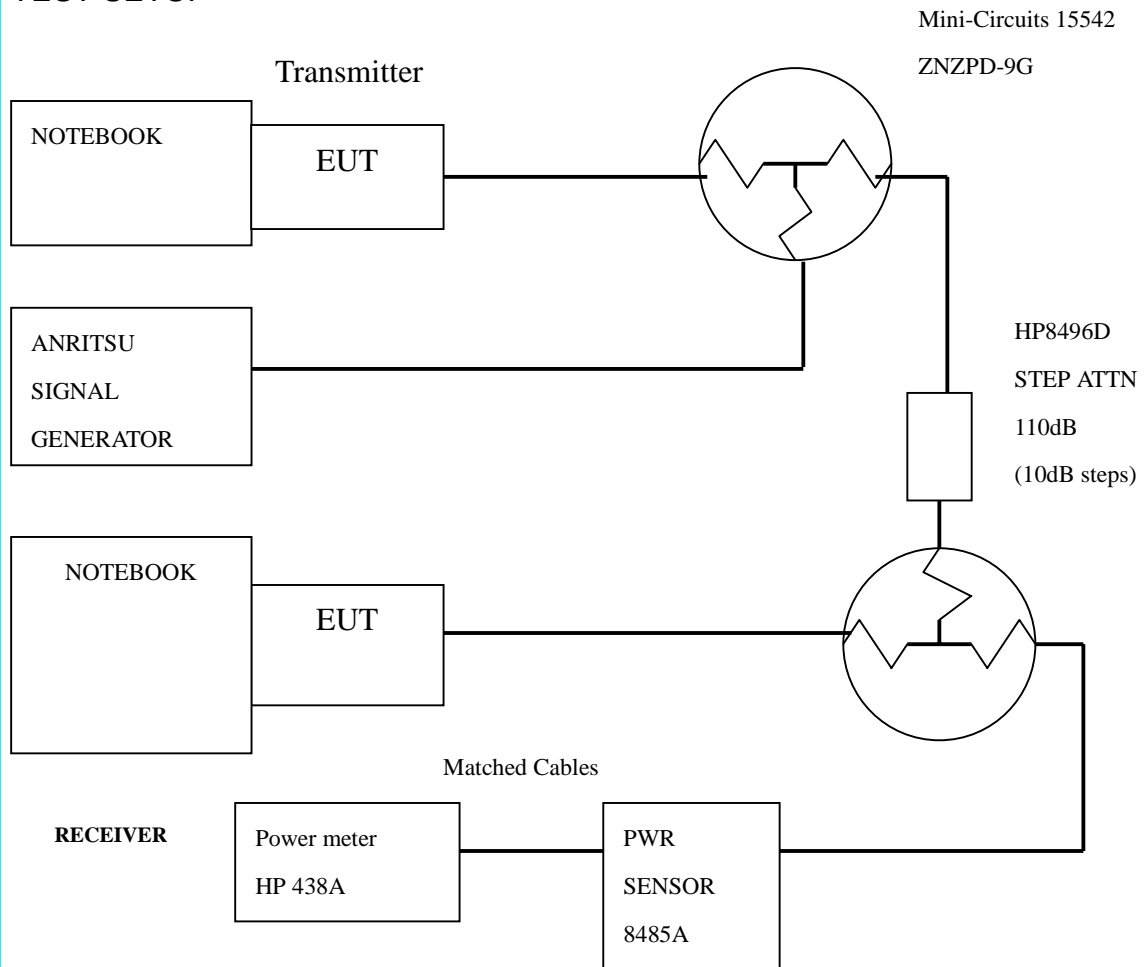



### 1.3 TEST PROCEDURES

Obtain the simplex link shown. Perform all independent instrumentation calibrations prior to this procedure. Set operating power levels using fixed and variable attenuators in system to meet the following objectives:

Signal Power at receiver approximately  $-55\text{dBm}$  (above thermal sensitivity such that thermal noise does not cause bit errors).

Signal Power at power meter between  $-20$  and  $-30\text{dBm}$  for optimal linearity.

Use spectrum analyzer to monitor test.

Ensure that CW Jammer generator RF output is disabled and measure the power at the power meter port using the power meter. This is the relative signal power,  $S_r$ .

Disable Transmitter, and set CW Jammer generator RF output frequency equal to the carrier frequency and enable generator output. Set reference CW Jammer power level at power meter port  $8.4\text{dB}$  below  $S_r$  (minimum J/S, or  $10\text{dB}$  processing gain reference level). Note the power level setting on the generator, this is the reference CW Jammer power setting,  $J_r$ .

Disable CW Jammer, re-establish link. PER test should be operating essentially error -free.

Enable CW Jammer at the reference power level and verify that the PER test indicates a PER of less than 8%.

Alternatively, adjust the CW Jammer level to that which causes 8% PER and verify that the S/J is less than  $8.4\text{dB}$ .

Repeat step 7 for uniform steps in frequency increments of  $50\text{ kHz}$  across the receiver passband with the CW Jammer. In this case the receiver passband is  $\pm 8.5\text{ MHz}$ .

The numerical data associated with the following radio channel is tabulated and presented for Channel 1,6, and 11.

Note: Since the jamming signal will be blocked by the IF filter if the jamming frequency is far from the center of the carrier frequency. So, only those frequencies around carrier frequency are shown here.



## 1.4 EUT OPERATING CONDITION

The software provided by client to set the EUT to transmit at lowest, middle and highest channel.

## 1.5 TEST RESULTS

<b>EUT</b>	2.4GHz Wireless Access Point	<b>Model</b>	WX-1560
<b>Environmental Conditions</b>	20°C, 60%RH	<b>Tested By</b>	Steven Lu

11Mbps CHANNEL 1 Processing Gain				
Frequency (GHz)	Gp (dB)	(S/N) ° (dB)	Mj = J/S (dB)	Lsys (dB)
2.408	13.4	16.4	-5.0	2
2.40805	13.5	16.4	-4.9	2
2.4081	13.2	16.4	-5.2	2
2.40815	13.7	16.4	-4.7	2
2.4082	13.3	16.4	-5.1	2
2.40825	13.4	16.4	-5.0	2
2.4083	13.4	16.4	-5.0	2
2.40835	12.9	16.4	-5.5	2
2.4084	12.6	16.4	-5.8	2
2.40845	13.0	16.4	-5.4	2
2.4085	12.9	16.4	-5.5	2
2.40855	12.6	16.4	-5.8	2
2.4086	13.0	16.4	-5.4	2
2.40865	12.4	16.4	-6.0	2
2.4087	12.6	16.4	-5.8	2
2.40875	12.5	16.4	-5.9	2
2.4088	12.8	16.4	-5.6	2
2.40885	12.5	16.4	-5.8	2
2.4089	12.2	16.4	-6.2	2
2.40895	12.1	16.4	-6.3	2



<b>11Mbps CHANNEL 1 Processing Gain</b>				
Frequency (GHz)	Gp (dB)	(S/N) ° (dB)	Mj = J/S (dB)	Lsys (dB)
2.409	12.2	16.4	-6.2	2
2.4095	11.6	16.4	-6.8	2
2.40955	11.6	16.4	-6.8	2
2.4096	11.5	16.4	-6.3	2
2.40965	12.1	16.4	-6.6	2
2.4097	11.8	16.4	-6.6	2
2.40975	11.5	16.4	-6.9	2
2.4098	11.6	16.4	-6.8	2
2.40985	11.4	16.4	-7.0	2
2.4099	11.6	16.4	-6.8	2
2.40995	11.6	16.4	-6.8	2
2.41	11.3	16.4	-7.1	2
2.41005	11.5	16.4	-6.9	2
2.4101	11.1	16.4	-7.3	2
2.41015	11.5	16.4	-6.9	2
2.4102	11.9	16.4	-6.5	2
2.41025	11.8	16.4	-6.6	2
2.4103	11.6	16.4	-6.8	2
2.41035	11.6	16.4	-6.8	2
2.4104	11.5	16.4	-6.9	2
2.41045	11.8	16.4	-6.6	2
2.4105	11.6	16.4	-6.8	2
2.41055	11.4	16.4	-7.0	2
2.4106	11.3	16.4	-7.1	2
2.41065	11.7	16.4	-6.7	2
2.4107	11.5	16.4	-6.9	2
2.41075	11.8	16.4	-6.6	2
2.4108	11.7	16.4	-6.7	2
2.41085	11.7	16.4	-6.7	2
2.4109	11.8	16.4	-6.6	2
2.41095	12.1	16.4	-6.3	2
2.411	12.2	16.4	-6.2	2
2.41105	11.6	16.4	-6.8	2
2.4111	11.7	16.4	-6.7	2
2.41115	11.8	16.4	-6.6	2



<b>11Mbps CHANNEL 1 Processing Gain</b>				
Frequency (GHz)	Gp (dB)	(S/N) ° (dB)	Mj = J/S (dB)	Lsys (dB)
2.4112	12.0	16.4	-6.4	2
2.41125	11.8	16.4	-6.6	2
2.4113	11.7	16.4	-6.7	2
2.41135	11.8	16.4	-6.6	2
2.4114	11.6	16.4	-6.8	2
2.41145	11.9	16.4	-6.5	2
2.4115	11.7	16.4	-6.7	2
2.41155	11.6	16.4	-6.8	2
2.4116	11.8	16.4	-6.6	2
2.41165	12.1	16.4	-6.3	2
2.4117	11.9	16.4	-6.5	2
2.41175	11.6	16.4	-6.8	2
2.4118	11.9	16.4	-6.5	2
2.41185	11.4	16.4	-7.0	2
2.4119	11.2	16.4	-7.2	2
2.41195	11.0	16.4	-7.4	2
2.412	11.5	16.4	-6.9	2
2.41205	11.3	16.4	-7.1	2
2.4121	11.3	16.4	-7.1	2
2.41215	11.9	16.4	-6.5	2
2.4122	11.8	16.4	-6.6	2
2.41225	11.8	16.4	-6.6	2
2.4123	12.4	16.4	-6.0	2
2.41235	12.2	16.4	-6.2	2
2.4124	12.0	16.4	-6.4	2
2.41245	11.8	16.4	-6.6	2
2.4125	11.8	16.4	-6.6	2
2.41255	11.8	16.4	-6.6	2
2.4126	12.1	16.4	-6.3	2
2.41265	11.9	16.4	-6.5	2
2.4127	11.9	16.4	-6.5	2
2.41275	12.0	16.4	-6.4	2
2.4128	12.0	16.4	-6.4	2
2.41285	12.3	16.4	-6.1	2
2.4129	12.1	16.4	-6.3	2
2.41295	12.1	16.4	-6.3	2



<b>11Mbps CHANNEL 1 Processing Gain</b>				
Frequency	Gp	(S/N) °	Mj = J/S	Lsys
(GHz)	(dB)	(dB)	(dB)	(dB)
2.413	12.0	16.4	-6.4	2
2.41305	12.0	16.4	-6.4	2
2.4131	12.3	16.4	-6.1	2
2.41315	12.0	16.4	-6.4	2
2.4132	11.8	16.4	-6.6	2
2.41325	12.1	16.4	-6.3	2
2.4133	11.8	16.4	-6.6	2
2.41335	12.1	16.4	-6.3	2
2.4134	11.9	16.4	-6.5	2
2.41345	11.8	16.4	-6.6	2
2.4135	11.8	16.4	-6.6	2
2.41355	11.9	16.4	-6.6	2
2.4136	12.1	16.4	-6.2	2
2.41365	12.0	16.4	-6.4	2
2.4137	11.9	16.4	-6.5	2
2.41375	11.9	16.4	-6.5	2
2.4138	11.8	16.4	-6.6	2
2.41385	12.0	16.4	-6.4	2
2.4139	11.9	16.4	-6.5	2
2.41395	12.0	16.4	-6.4	2
2.414	11.4	16.4	-7.0	2
2.41405	11.6	16.4	-6.8	2
2.4141	11.4	16.4	-7.0	2
2.41415	11.7	16.4	-6.7	2
2.4142	11.6	16.4	-6.8	2
2.41425	12.1	16.4	-6.3	2
2.4143	11.8	16.4	-6.6	2
2.41435	11.7	16.4	-6.7	2
2.4144	11.9	16.4	-6.5	2
2.41445	11.7	16.4	-6.7	2
2.4145	11.9	16.4	-6.5	2
2.41455	11.6	16.4	-6.8	2
2.4146	11.8	16.4	-6.6	2
2.41465	11.9	16.4	-6.5	2
2.4147	11.5	16.4	-6.9	2
2.41475	11.6	16.4	-6.8	2





<b>11Mbps CHANNEL 1 Processing Gain</b>				
Frequency (GHz)	Gp (dB)	(S/N) ° (dB)	Mj = J/S (dB)	Lsys (dB)
2.4148	11.7	16.4	-6.7	2
2.41485	12.1	16.4	-6.3	2
2.4149	11.9	16.4	-6.5	2
2.41495	12.0	16.4	-6.4	2
2.415	12.3	16.4	-6.1	2
2.41505	12.2	16.4	-6.2	2
2.4151	12.6	16.4	-5.8	2
2.41515	12.4	16.4	-6.0	2
2.4152	12.3	16.4	-6.1	2
2.41525	12.3	16.4	-6.1	2
2.4153	12.3	16.4	-6.1	2
2.41535	12.6	16.4	-5.8	2
2.4154	12.4	16.4	-6.0	2
2.41545	12.3	16.4	-6.1	2
2.4155	12.6	16.4	-5.8	2
2.41555	12.6	16.4	-5.8	2
2.4156	12.6	16.4	-5.8	2
2.41565	12.7	16.4	-5.7	2
2.4157	12.8	16.4	-5.6	2
2.41575	13.2	16.4	-5.2	2
2.4158	13.1	16.4	-5.3	2
2.41585	13.0	16.4	-5.4	2
2.4159	13.2	16.4	-5.2	2
2.41595	13.0	16.4	-5.4	2
2.416	13.3	16.4	-5.1	2
2.41605	13.1	16.4	-5.3	2
2.4161	13.1	16.4	-5.3	2
2.41615	13.1	16.4	-5.3	2
2.4162	13.2	16.4	-5.2	2
2.41625	13.6	16.4	-4.8	2
2.4163	13.9	16.4	-4.5	2
2.41635	13.6	16.4	-4.8	2
2.4164	13.8	16.4	-4.6	2
2.41645	13.8	16.4	-4.6	2
2.4165	13.8	16.4	-4.6	2
2.41655	14.2	16.4	-4.2	2



<b>11Mbps CHANNEL 1 Processing Gain</b>				
Frequency	Gp	(S/N) °	Mj = J/S	Lsys
(GHz)	(dB)	(dB)	(dB)	(dB)
2.4166	14.0	16.4	-4.4	2
2.41665	13.9	16.4	-4.5	2
2.4167	14.1	16.4	-4.3	2
2.41675	14.0	16.4	-4.4	2
2.4168	14.3	16.4	-4.1	2
2.41685	14.2	16.4	-4.2	2
2.4169	14.2	16.4	-4.2	2
2.41695	14.4	16.4	-4.0	2
2.417	14.4	16.4	-4.0	2
2.41705	14.6	16.4	-3.8	2
2.4171	15.2	16.4	-3.2	2
2.41715	15.3	16.4	-3.1	2
2.4172	15.2	16.4	-3.2	2
2.41725	15.2	16.4	-3.2	2
2.4173	15.4	16.4	-3.0	2
2.41735	15.2	16.4	-3.2	2
2.4174	15.6	16.4	-2.8	2
2.41745	15.5	16.4	-2.9	2
2.4175	15.6	16.4	-2.8	2
2.41755	15.7	16.4	-2.7	2
2.4176	16.2	16.4	-2.2	2
2.41765	16.2	16.4	-2.2	2
2.4177	16.3	16.4	-2.1	2
2.41775	16.9	16.4	-1.6	2
2.4178	16.8	16.4	-1.6	2
2.41785	17.2	16.4	-1.2	2
2.4179	17.1	16.4	-1.3	2
2.41795	17.0	16.4	-1.4	2
2.418	17.6	16.4	-0.8	2



11Mbps CHANNEL 6 Processing Gain				
Freq. (GHz)	Gp (dB)	(S/N) ° (dB)	Mj = J/S (dB)	Lsys (dB)
2.432	14.9	16.4	-3.5	2
2.43205	14.6	16.4	-3.8	2
2.4321	14.3	16.4	-4.1	2
2.43215	14.3	16.4	-4.1	2
2.4322	14.1	16.4	-4.3	2
2.43225	14.6	16.4	-3.8	2
2.4323	14.0	16.4	-4.4	2
2.43235	13.9	16.4	-4.5	2
2.4324	14.2	16.4	-4.2	2
2.43245	14.3	16.4	-4.1	2
2.4325	14.1	16.4	-4.3	2
2.43255	13.8	16.4	-4.6	2
2.4326	13.7	16.4	-4.7	2
2.43265	13.4	16.4	-5.0	2
2.4327	13.5	16.4	-4.9	2
2.43275	13.2	16.4	-5.2	2
2.4328	13.1	16.4	-5.3	2
2.43285	13.3	16.4	-5.1	2
2.4329	13.3	16.4	-5.1	2
2.43295	13.1	16.4	-5.3	2
2.433	13.2	16.4	-5.2	2
2.43305	13.0	16.4	-5.4	2
2.4331	13.2	16.4	-5.2	2
2.43315	13.0	16.4	-5.4	2
2.4332	13.3	16.4	-5.1	2
2.43325	13.0	16.4	-5.4	2
2.4333	13.4	16.4	-5.0	2
2.43335	13.0	16.4	-5.4	2
2.4334	12.9	16.4	-5.5	2
2.43345	12.7	16.4	-5.7	2
2.4335	12.5	16.4	-5.9	2
2.43355	12.2	16.4	-6.2	2
2.4336	12.4	16.4	-6.0	2
2.43365	12.2	16.4	-6.2	2
2.4337	12.5	16.4	-5.9	2
2.43375	12.3	16.4	-6.1	2



11Mbps CHANNEL 6 Processing Gain				
Freq.	Gp	(S/N) °	Mj = J/S	Lsys
(GHz)	(dB)	(dB)	(dB)	(dB)
2.4338	12.5	16.4	-5.9	2
2.43385	12.4	16.4	-6.0	2
2.4339	12.0	16.4	-6.4	2
2.43395	11.9	16.4	-6.5	2
2.434	11.6	16.4	-6.8	2
2.43405	11.8	16.4	-6.6	2
2.4341	11.5	16.4	-6.9	2
2.43415	11.3	16.4	-7.1	2
2.4342	11.4	16.4	-6.8	2
2.43425	11.5	16.4	-6.9	2
2.4343	11.4	16.4	-7.0	2
2.43435	11.2	16.4	-7.2	2
2.4344	11.4	16.4	-7.1	2
2.43445	11.3	16.4	-7.2	2
2.4345	11.6	16.4	-6.8	2
2.43455	11.4	16.4	-7.0	2
2.4346	11.3	16.4	-7.1	2
2.43465	11.7	16.4	-6.7	2
2.4347	11.7	16.4	-6.7	2
2.43475	11.4	16.4	-7.0	2
2.4348	11.4	16.4	-7.0	2
2.43485	11.2	16.4	-7.2	2
2.4349	11.3	16.4	-7.1	2
2.43495	11.6	16.4	-6.8	2
2.435	11.4	16.4	-7.0	2
2.43505	11.3	16.4	-7.1	2
2.4351	11.2	16.4	-7.2	2
2.43515	11.6	16.4	-6.8	2
2.4352	11.8	16.4	-6.6	2
2.43525	11.7	16.4	-6.7	2
2.4353	12.1	16.4	-6.3	2
2.43535	11.5	16.4	-6.9	2
2.4354	11.6	16.4	-6.8	2
2.43545	11.4	16.4	-7.0	2



11Mbps CHANNEL 6 Processing Gain				
Freq.	Gp	(S/N) °	Mj = J/S	Lsys
(GHz)	(dB)	(dB)	(dB)	(dB)
2.4355	11.6	16.4	-6.8	2
2.43555	11.4	16.4	-7.0	2
2.4356	11.4	16.4	-7.0	2
2.43565	11.5	16.4	-6.9	2
2.4357	11.3	16.4	-7.1	2
2.43575	11.7	16.4	-6.7	2
2.4358	11.6	16.4	-6.8	2
2.43585	11.6	16.4	-6.8	2
2.4359	11.9	16.4	-6.5	2
2.43595	12.0	16.4	-6.4	2
2.436	11.9	16.4	-6.5	2
2.43605	11.9	16.4	-6.5	2
2.4361	11.9	16.4	-6.5	2
2.43615	12.1	16.4	-6.3	2
2.4362	11.6	16.4	-6.8	2
2.43625	11.8	16.4	-6.6	2
2.4363	11.6	16.4	-6.8	2
2.43635	11.8	16.4	-6.6	2
2.4364	11.6	16.4	-6.8	2
2.43645	11.6	16.4	-6.8	2
2.4365	11.7	16.4	-6.7	2
2.43655	11.5	16.4	-6.9	2
2.4366	11.8	16.4	-6.6	2
2.43665	11.7	16.4	-6.7	2
2.4367	11.6	16.4	-6.8	2
2.43675	11.5	16.4	-6.9	2
2.4368	11.7	16.4	-6.7	2
2.43685	11.3	16.4	-7.1	2
2.4369	11.1	16.4	-7.3	2
2.43695	11.3	16.4	-7.1	2
2.437	11.4	16.4	-7.0	2
2.43705	11.4	16.4	-7.0	2
2.4371	11.6	16.4	-6.8	2
2.43715	11.6	16.4	-6.8	2



11Mbps CHANNEL 6 Processing Gain				
Freq.	Gp	(S/N) °	Mj = J/S	Lsys
(GHz)	(dB)	(dB)	(dB)	(dB)
2.4372	11.5	16.4	-6.9	2
2.43725	11.6	16.4	-6.8	2
2.4373	11.9	16.4	-6.5	2
2.43735	12.0	16.4	-6.4	2
2.4374	11.7	16.4	-6.7	2
2.43745	11.5	16.4	-6.9	2
2.4375	11.8	16.4	-6.6	2
2.43755	12.0	16.4	-6.4	2
2.4376	11.9	16.4	-6.5	2
2.43765	11.7	16.4	-6.7	2
2.4377	11.6	16.4	-6.8	2
2.43775	11.8	16.4	-6.6	2
2.4378	12.3	16.4	-6.1	2
2.43785	11.9	16.4	-6.5	2
2.4379	11.9	16.4	-6.5	2
2.43795	12.1	16.4	-6.3	2
2.438	12.2	16.4	-6.2	2
2.43805	12.0	16.4	-6.4	2
2.4381	12.1	16.4	-6.3	2
2.43815	11.9	16.4	-6.5	2
2.4382	11.7	16.4	-6.7	2
2.43825	11.5	16.4	-6.9	2
2.4383	11.7	16.4	-6.7	2
2.43835	11.7	16.4	-6.7	2
2.4384	11.5	16.4	-6.9	2
2.43845	11.4	16.4	-7.0	2
2.4385	11.7	16.4	-6.7	2
2.43855	11.9	16.4	-6.5	2
2.4386	11.8	16.4	-6.6	2
2.43865	11.6	16.4	-6.8	2
2.4387	11.5	16.4	-6.9	2
2.43875	11.7	16.4	-6.7	2
2.4388	11.7	16.4	-6.7	2
2.43885	11.5	16.4	-6.9	2



11Mbps CHANNEL 6 Processing Gain				
Freq. (GHz)	Gp (dB)	(S/N) ° (dB)	Mj = J/S (dB)	Lsys (dB)
2.4389	11.3	16.4	-7.1	2
2.4895	11.5	16.4	-6.9	2
2.439	11.5	16.4	-6.9	2
2.43905	11.5	16.4	-6.9	2
2.4391	11.4	16.4	-7.0	2
2.43915	11.2	16.4	-7.2	2
2.4392	11.1	16.4	-7.3	2
2.43925	11.4	16.4	-7.0	2
2.4393	11.6	16.4	-6.8	2
2.43935	11.4	16.4	-7.0	2
2.4394	12.0	16.4	-6.4	2
2.43945	11.8	16.4	-6.6	2
2.4395	11.7	16.4	-6.7	2
2.43955	11.7	16.4	-6.7	2
2.4396	11.8	16.4	-6.6	2
2.43965	11.7	16.4	-6.7	2
2.4397	11.3	16.4	-7.1	2
2.43975	11.2	16.4	-7.2	2
2.4398	11.3	16.4	-7.1	2
2.43985	11.3	16.4	-7.1	2
2.4399	11.7	16.4	-6.7	2
2.43995	12.2	16.4	-6.2	2
2.44	12.2	16.4	-6.2	2
2.44005	12.4	16.4	-6.0	2
2.4401	12.5	16.4	-5.9	2
2.44015	12.3	16.4	-6.1	2
2.4402	12.2	16.4	-6.2	2
2.44025	12.5	16.4	-5.9	2
2.4403	12.5	16.4	-5.9	2
2.44035	12.6	16.4	-5.8	2
2.4404	12.5	16.4	-5.9	2
2.44045	12.2	16.4	-6.2	2
2.4405	12.2	16.4	-6.2	2
2.44055	12.5	16.4	-5.9	2



11Mbps CHANNEL 6 Processing Gain				
Freq.	Gp	(S/N) °	Mj = J/S	Lsys
(GHz)	(dB)	(dB)	(dB)	(dB)
2.4406	12.8	16.4	-5.6	2
2.44065	12.7	16.4	-5.7	2
2.4407	12.8	16.4	-5.6	2
2.44075	13.1	16.4	-5.3	2
2.4408	13.3	16.4	-5.1	2
2.44085	13.2	16.4	-5.2	2
2.4409	13.3	16.4	-5.1	2
2.44095	13.2	16.4	-5.2	2
2.441	13.0	16.4	-5.4	2
2.44105	13.4	16.4	-5.0	2
2.4411	13.0	16.4	-5.4	2
2.44115	13.0	16.4	-5.4	2
2.4412	13.4	16.4	-5.0	2
2.44125	13.5	16.4	-4.9	2
2.4413	13.7	16.4	-4.7	2
2.44135	13.9	16.4	-4.5	2
2.4414	13.9	16.4	-4.5	2
2.44145	13.8	16.4	-4.6	2
2.4415	13.8	16.4	-4.6	2
2.44155	14.0	16.4	-4.4	2
2.4416	14.1	16.4	-4.3	2
2.44165	13.9	16.4	-4.5	2
2.4417	13.9	16.4	-4.5	2
2.44175	14.2	16.4	-4.2	2
2.4418	14.4	16.4	-4.0	2
2.44185	14.5	16.4	-3.9	2
2.4419	14.9	16.4	-3.5	2
2.44195	14.7	16.4	-3.7	2
2.442	14.7	16.4	-3.7	2





11Mbps CHANNEL 11 Processing Gain				
Freq. (GHz)	Gp (dB)	(S/N) ° (dB)	Mj = J/S (dB)	Lsys (dB)
2.457	14.6	16.4	-3.8	2
2.45705	14.6	16.4	-3.8	2
2.4571	14.6	16.4	-3.8	2
2.45715	14.8	16.4	-3.6	2
2.4572	14.5	16.4	-3.9	2
2.45725	14.1	16.4	-4.3	2
2.4573	14.1	16.4	-4.3	2
2.45735	14.2	16.4	-4.2	2
2.4574	14.6	16.4	-3.8	2
2.45745	14.2	16.4	-4.2	2
2.4575	14.2	16.4	-4.2	2
2.45755	14.2	16.4	-4.2	2
2.4576	13.6	16.4	-4.8	2
2.45765	13.9	16.4	-4.5	2
2.4577	13.4	16.4	-5.0	2
2.45775	13.4	16.4	-5.0	2
2.4578	13.4	16.4	-5.0	2
2.45785	13.3	16.4	-5.1	2
2.4579	13.4	16.4	-5.0	2
2.45795	13.5	16.4	-4.9	2
2.458	13.4	16.4	-5.0	2
2.45805	13.2	16.4	-5.2	2
2.4581	13.4	16.4	-5.0	2
2.45815	13.6	16.4	-4.8	2
2.4582	13.1	16.4	-5.3	2
2.45825	13.5	16.4	-4.9	2
2.4583	13.1	16.4	-5.3	2
2.45835	12.9	16.4	-5.5	2
2.4584	12.8	16.4	-5.6	2
2.45845	12.8	16.4	-5.6	2
2.4585	12.9	16.4	-5.5	2
2.45855	12.5	16.4	-5.9	2
2.4586	12.6	16.4	-5.8	2
2.45865	12.9	16.4	-5.5	2



11Mbps CHANNEL 11 Processing Gain				
Freq.	Gp	(S/N) °	Mj = J/S	Lsys
(GHz)	(dB)	(dB)	(dB)	(dB)
2.4587	12.5	16.4	-5.9	2
2.45875	12.6	16.4	-5.8	2
2.4588	12.8	16.4	-5.6	2
2.45885	12.6	16.4	-5.8	2
2.4589	12.6	16.4	-5.8	2
2.45895	12.6	16.4	-5.8	2
2.459	12.6	16.4	-5.8	2
2.45905	12.4	16.4	-6.0	2
2.4591	11.9	16.4	-6.5	2
2.45915	12.0	16.4	-6.4	2
2.4592	12.0	16.4	-6.4	2
2.45925	11.9	16.4	-6.5	2
2.4593	11.8	16.4	-6.6	2
2.45935	12.0	16.4	-6.4	2
2.4594	12.2	16.4	-6.2	2
2.45945	11.8	16.4	-6.6	2
2.4595	11.9	16.4	-6.5	2
2.45955	12.3	16.4	-6.1	2
5.4596	11.9	16.4	-6.5	2
2.45965	11.9	16.4	-6.5	2
2.4597	12.0	16.4	-6.4	2
2.45975	11.8	16.4	-6.6	2
2.4598	11.6	16.4	-6.8	2
2.45985	11.6	16.4	-6.8	2
2.4599	12.0	16.4	-6.4	2
2.45995	11.5	16.4	-6.9	2
2.46	11.6	16.4	-6.8	2
2.46005	11.7	16.4	-6.7	2
2.4601	11.9	16.4	-6.5	2
2.46015	12.0	16.4	-6.4	2
2.4602	11.6	16.4	-6.8	2
2.46025	11.8	16.4	-6.6	2
2.4603	11.9	16.4	-6.5	2
2.46035	11.8	16.4	-6.6	2
2.4604	11.8	16.4	-6.6	2
2.46045	11.8	16.4	-6.6	2



11Mbps CHANNEL 11 Processing Gain				
Freq.	Gp	(S/N) °	Mj = J/S	Lsys
(GHz)	(dB)	(dB)	(dB)	(dB)
2.4605	12.0	16.4	-6.4	2
2.46055	11.5	16.4	-6.9	2
2.4606	11.6	16.4	-6.8	2
2.46065	11.8	16.4	-6.6	2
2.4607	11.9	16.4	-6.5	2
2.46075	12.3	16.4	-6.1	2
2.4608	11.7	16.4	-6.7	2
2.46085	12.0	16.4	-6.4	2
2.4609	12.2	16.4	-6.2	2
2.46095	12.2	16.4	-6.2	2
2.461	12.3	16.4	-6.1	2
2.46105	12.3	16.4	-6.1	2
2.4611	12.5	16.4	-5.9	2
2.46115	12.2	16.4	-6.2	2
2.4612	12.6	16.4	-5.8	2
2.46125	12.2	16.4	-6.2	2
2.4613	12.3	16.4	-6.1	2
2.46135	12.4	16.4	-6.0	2
2.4614	12.3	16.4	-6.1	2
2.46145	12.4	16.4	-6.0	2
2.4615	12.6	16.4	-5.8	2
2.46155	12.5	16.4	-5.9	2
2.4616	12.9	16.4	-5.5	2
2.46165	12.6	16.4	-5.8	2
2.4617	12.9	16.4	-5.5	2
2.46175	12.4	16.4	-6.0	2
2.4618	12.4	16.4	-6.0	2
2.46185	12.4	16.4	-6.0	2
2.4619	12.2	16.4	-6.2	2
2.46195	12.2	16.4	-6.2	2
2.462	12.2	16.4	-6.2	2
2.46205	12.5	16.4	-5.9	2
2.4621	12.2	16.4	-6.2	2
2.46215	12.4	16.4	-6.0	2



11Mbps CHANNEL 11 Processing Gain				
Freq.	Gp	(S/N) °	Mj = J/S	Lsys
(GHz)	(dB)	(dB)	(dB)	(dB)
2.4622	12.8	16.4	-5.6	2
2.46225	12.5	16.4	-5.9	2
2.4623	12.7	16.4	-5.7	2
2.46235	12.7	16.4	-5.7	2
2.4624	12.6	16.4	-5.8	2
2.46245	12.6	16.4	-5.8	2
2.4625	12.7	16.4	-5.7	2
2.46255	12.8	16.4	-5.6	2
2.4626	12.8	16.4	-5.6	2
2.46265	12.4	16.4	-6.0	2
2.4627	12.4	16.4	-6.0	2
2.46275	12.6	16.4	-5.8	2
2.4628	12.5	16.4	-5.9	2
2.46285	12.5	16.4	-5.9	2
2.4629	12.5	16.4	-5.9	2
2.46295	12.7	16.4	-5.7	2
2.463	12.3	16.4	-6.1	2
2.46305	12.3	16.4	-6.1	2
2.4631	12.5	16.4	-5.9	2
2.46315	12.0	16.4	-6.4	2
2.4632	12.1	16.4	-6.3	2
2.46325	12.5	16.4	-5.9	2
2.4633	12.0	16.4	-6.4	2
2.46335	11.8	16.4	-6.6	2
2.4634	12.0	16.4	-6.4	2
2.46345	12.1	16.4	-6.3	2
2.4635	12.1	16.4	-6.3	2
2.46355	12.2	16.4	-6.2	2
2.4636	12.4	16.4	-6.0	2
2.46365	12.5	16.4	-5.9	2
2.4637	12.6	16.4	-5.8	2
2.46375	12.2	16.4	-6.2	2
2.4638	12.2	16.4	-6.2	2
2.46385	12.3	16.4	-6.1	2



11Mbps CHANNEL 11 Processing Gain				
Freq.	Gp	(S/N) °	Mj = J/S	Lsys
(GHz)	(dB)	(dB)	(dB)	(dB)
2.4639	12.1	16.4	-6.3	2
2.46395	12.0	16.4	-6.4	2
2.464	12.1	16.4	-6.3	2
2.46405	12.3	16.4	-6.1	2
2.4641	12.4	16.4	-6.0	2
2.46415	12.2	16.4	-6.2	2
2.4642	12.4	16.4	-6.0	2
2.46425	12.1	16.4	-6.3	2
2.4643	12.3	16.4	-6.1	2
2.46435	12.5	16.4	-5.9	2
4.4644	12.4	16.4	-6.0	2
2.46445	12.5	16.4	-5.9	2
2.4645	12.6	16.4	-5.8	2
2.46455	12.6	16.4	-5.8	2
2.4646	12.1	16.4	-6.3	2
2.46465	12.5	16.4	-5.9	2
2.4647	12.2	16.4	-6.2	2
2.46475	12.6	16.4	-5.8	2
2.4648	12.3	16.4	-6.1	2
2.46485	12.5	16.4	-5.9	2
2.4649	12.6	16.4	-5.8	2
2.46495	13.2	16.4	-5.2	2
2.465	12.8	16.4	-5.6	2
2.46505	13.0	16.4	-5.4	2
2.4651	13.2	16.4	-5.2	2
2.46515	13.1	16.4	-5.3	2
2.4652	13.1	16.4	-5.3	2
2.46525	13.2	16.4	-5.2	2
2.4653	12.8	16.4	-5.6	2
2.46535	12.8	16.4	-5.6	2
2.4654	13.0	16.4	-5.4	2
2.46545	12.9	16.4	-5.5	2
2.4655	13.0	16.4	-5.4	2



11Mbps CHANNEL 11 Processing Gain				
Freq.	Gp	(S/N) °	Mj = J/S	Lsys
(GHz)	(dB)	(dB)	(dB)	(dB)
2.46555	13.4	16.4	-5.0	2
2.4656	13.0	16.4	-5.4	2
2.46565	13.3	16.4	-5.1	2
2.4657	13.5	16.4	-4.9	2
2.46575	13.5	16.4	-4.9	2
2.4658	13.5	16.4	-4.9	2
2.46585	13.7	16.4	-4.7	2
2.4659	13.9	16.4	-4.5	2
2.46595	13.7	16.4	-4.7	2
2.466	13.8	16.4	-4.6	2
2.46605	13.9	16.4	-4.5	2
2.4661	13.5	16.4	-4.9	2
2.46615	13.7	16.4	-4.7	2
2.4662	13.9	16.4	-4.5	2
2.46625	13.9	16.4	-4.5	2
2.4663	14.1	16.4	-4.3	2
2.46635	14.2	16.4	-4.2	2
2.4664	14.4	16.4	-4.0	2
2.46645	14.4	16.4	-4.0	2
2.4665	14.6	16.4	-3.8	2
2.46655	14.8	16.4	-3.6	2
2.4666	15.0	16.4	-3.4	2
2.46665	14.8	16.4	-3.6	2
2.4667	14.9	16.4	-3.5	2
2.46675	14.6	16.4	-3.8	2
2.4668	14.7	16.4	-3.7	2
2.46685	15.1	16.4	-3.3	2
2.4669	14.8	16.4	-3.6	2
2.46695	15.1	16.4	-3.3	2
2.467	15.3	16.4	-3.1	2