



FCC TEST REPORT

REPORT NO.: RF910910R03A

MODEL NO.: WX-1516 (**Brand: Gemtek**)

OEM MODEL NO.: WX-1520 (**Brand: SparkLAN**)

RECEIVED: Mar. 21, 2003

TESTED: Mar. 24, 2003 ~ Mar. 29, 2003

APPLICANT: GEMTEK TECHNOLOGY CO., LTD.

ADDRESS: No.1, Jen Ai Road, Hsinchu Industrial Park
Hukou, Hsinchu, Taiwan, R.O.C.

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: 47 14th Lin, Chiapau Tsun, Linko, Taipei,
Taiwan, R.O.C.

This test report consists of 48 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, NVLAP or any government agencies. The test results in the report only apply to the tested sample.



0528
ILAC MRA



Lab Code: 200102-0



Table of Contents

1	CERTIFICATION.....	4
2	SUMMARY OF TEST RESULTS	5
3	GENERAL INFORMATION.....	6
3.1	GENERAL DESCRIPTION OF EUT	6
3.2	DESCRIPTION OF TEST MODES	7
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	7
3.4	DESCRIPTION OF SUPPORT UNITS	8
4	TEST TYPES AND RESULTS	9
4.1	CONDUCTED EMISSION MEASUREMENT.....	9
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	9
4.1.2	TEST INSTRUMENTS	9
4.1.3	TEST PROCEDURES.....	10
4.1.4	DEVIATION FROM TEST STANDARD	10
4.1.5	TEST SETUP	11
4.1.6	EUT OPERATING CONDITIONS.....	11
4.1.7	TEST RESULTS	12
4.2	RADIATED EMISSION MEASUREMENT	18
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	18
4.2.2	TEST INSTRUMENTS	19
4.2.3	TEST PROCEDURES.....	20
4.2.4	DEVIATION FROM TEST STANDARD	20
4.2.5	TEST SETUP	21
4.2.6	EUT OPERATING CONDITIONS.....	21
4.2.7	TEST RESULTS	22
4.3	6dB BANDWIDTH MEASUREMENT	26
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	26
4.3.2	TEST INSTRUMENTS	26
4.3.3	TEST PROCEDURE	27
4.3.4	DEVIATION FROM TEST STANDARD	27
4.3.5	TEST SETUP	27
4.3.6	EUT OPERATING CONDITIONS.....	27
4.3.7	TEST RESULTS	28
4.4	MAXIMUM PEAK OUTPUT POWER.....	32
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	32
4.4.2	INSTRUMENTS.....	32
4.4.3	TEST PROCEDURES.....	33
4.4.4	DEVIATION FROM TEST STANDARD	33
4.4.5	TEST SETUP	33
4.4.6	EUT OPERATING CONDITIONS.....	33
4.4.7	TEST RESULTS	34
4.5	POWER SPECTRAL DENSITY MEASUREMENT	35
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	35
4.5.2	TEST INSTRUMENTS	35
4.5.3	TEST PROCEDURE	36



4.5.4	DEVIATION FROM TEST STANDARD	36
4.5.5	TEST SETUP	36
4.5.6	EUT OPERATING CONDITION	36
4.5.7	TEST RESULTS	37
4.6	BAND EDGES MEASUREMENT	41
4.6.1	LIMITS OF BAND EDGES MEASUREMENT	41
4.6.2	TEST INSTRUMENTS	41
4.6.3	TEST PROCEDURE	41
4.6.4	DEVIATION FROM TEST STANDARD	41
4.6.5	EUT OPERATING CONDITION	42
4.6.6	TEST RESULTS	42
4.7	ANTENNA REQUIREMENT	45
4.7.1	STANDARD APPLICABLE	45
4.7.2	ANTENNA CONNECTED CONSTRUCTION	45
5	PHOTOGRAPHS OF THE TEST CONFIGURATION	46
6	INFORMATION ON THE TESTING LABORATORIES.....	48



1 CERTIFICATION

PRODUCT NAME : Hot Spot Access Point
MODEL NO. : WX-1516 (**Brand: Gemtek**)
OEM MODEL NO. : WX-1520 (**Brand: SparkLAN**)
APPLICANT : GEMTEK TECHNOLOGY CO., LTD.
STANDARDS : 47 CFR Part 15, Subpart C (Section 15.247),
ANSI C63.4-1992

We, **Advance Data Technology Corporation**, hereby certify that one sample of the designation has been tested in our facility from Mar. 24, 2003 to Mar. 29, 2003. The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions herein specified.

CHECKED BY : Emily Lu , **DATE :** April 15, 2003
Emily Lu

APPROVED BY : Dr. Alan Lane for , **DATE :** April 15, 2003
Dr. Alan Lane, Manager

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: 47 CFR Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit Minimum passing margin is -13.08dBuV at 0.150MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit
15.247(c)	Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit Minimum passing margin is -3.4dBuV at 792.15MHz
15.247(d)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit
15.247(c)	Band Edge Measurement Limit: 20dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit

NOTE: This report is prepared for FCC class II permissive change.



3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Hot Spot Access Point
MODEL NO.	WX-1516
OEM MODEL NO.	WX-1520
POWER SUPPLY	5VDC from AC adapter
MODULATION TYPE	BPSK, QPSK, CCK
RADIO TECHNOLOGY	DSSS
TRANSFER RATE	1/2/5.5/11Mbps
FREQUENCY RANGE	2412MHz ~ 2462MHz
NUMBER OF CHANNEL	11
OUTPUT POWER	14.26dBm
ANTENNA TYPE	Dipole antenna
I/O PORTS	RJ45 port
ASSOCIATED DEVICES	NA

NOTE:

1. This report is prepared for FCC class II permissive change. The differences compared with the original design are the outer appearance and antenna type.
2. The EUT was operated by the following AC adapter:

BRAND:	Delta
MODEL NO.:	ADP-10SB REV.H
INPUT POWER :	100-240Vac 0.4A 50-60Hz
OUTPUT POWER :	5Vdc 2A

3. Model WX-1516 and WX-1520 are identical except for their model number, brand name and model name due to marketing requirement.
4. For more detailed features description, please refer to the manufacturer's specifications or User's Manual.



3.2 DESCRIPTION OF TEST MODES

Eleven channels are provided in this EUT.

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

NOTE:

1. Below 1GHz, the channel 1, 6, and 11 were pre-tested in chamber. The channel 11, worst case one, was chosen for final test.
2. Above 1GHz, the channel 1, 6, and 11 were tested individually.

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a Hot Spot Access Point. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 15, Subpart C. (15.247)

ANSI C63.4 : 1992

All tests have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK	DELL	PP01L	TW-09C748-12800-19O-B220	FCC DoC APPROVED
2	USB 10/100 FAST ETHERNET	D-LINK	DU-E100	UR15001597	FCC DoC APPROVED

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	NA

NOTE: All power cords of the above support units are non shielded (1.8m).



4 TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESHS30	828109/007	July 03, 2003
ROHDE & SCHWARZ Artificial Mains Network (for EUT)	ESH3-Z5	839135/006	July 02, 2003
* ROHDE & SCHWARZ 4-wire ISN	ENY41	838119/028	Nov. 29, 2003
* ROHDE & SCHWARZ 2-wire ISN	ENY22	837497/016	Nov. 29, 2003
EMCO-L.I.S.N. (for peripheral)	3825/2	9204-1964	July 02, 2003
Software	Cond-V2M1	NA	NA
RF cable (JYEBAO)	5D-FB	Cable-C02.01	July 5, 2003
HP Terminator (For EMCO LISN)	11593A	E1-01-298	Feb. 23, 2004
HP Terminator (For EMCO LISN)	11593A	E1-01-299	Feb. 23, 2004

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. "*": These equipment are used for conducted telecom port test only (if tested).
 3. The test was performed in ADT Shielded Room No. 2.
 4. The VCCI Site Registration No. is C-240.




4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels over 10dB under the prescribed limits could not be reported

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

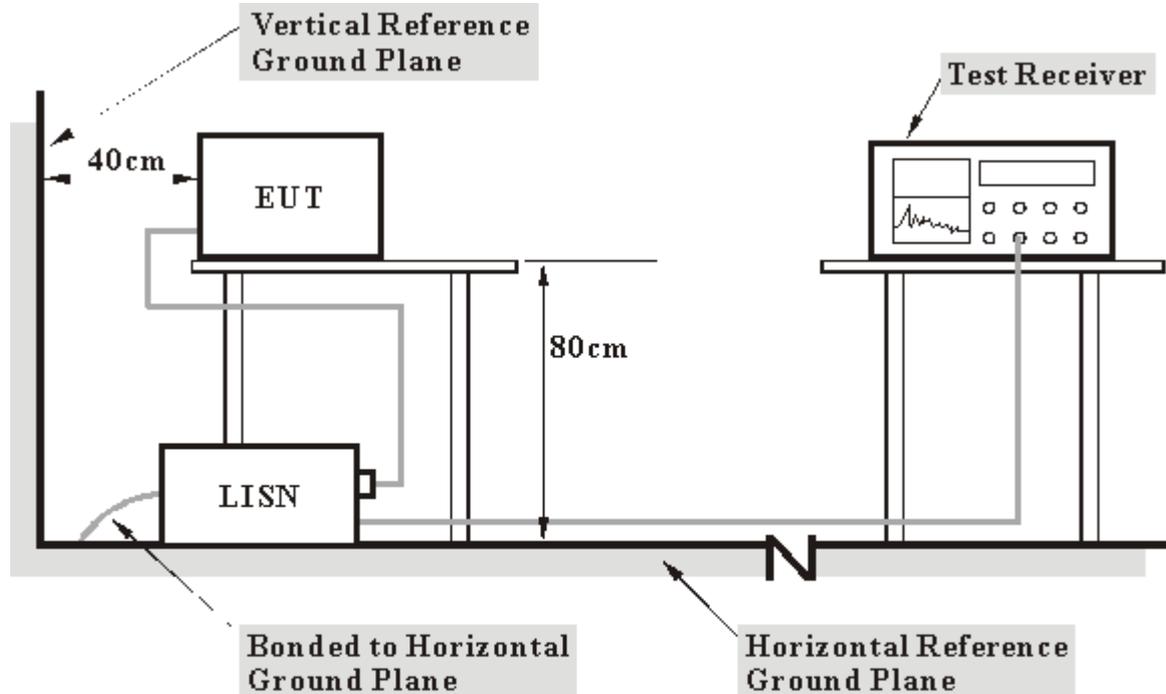

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

- a. Placed the EUT on the testing table.
- b. Prepared another computer system to act as a communication partner and placed it outside of testing area.
- c. The communication partner run a test program to enable EUT under transmission/receiving condition continuously at specific channel frequency via an RJ45 cable.
- d. The communication partner sent data to EUT by command "PIN".




4.1.7 TEST RESULTS

EUT	Hot Spot Access Point	MODEL	WX-1516
MODE	Channel 1	6dB BANDWIDTH	10kHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	25deg.C, 60%RH, 991hPa	TESTED BY: Gary Chang	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.159	0.10	46.72	-	46.82	-	65.52	55.52	-18.70	-
2	0.249	0.10	41.74	-	41.84	-	61.79	51.79	-19.95	-
3	1.749	0.10	34.34	-	34.44	-	56.00	46.00	-21.56	-
4	1.905	0.10	34.38	-	34.48	-	56.00	46.00	-21.52	-
5	16.229	1.05	43.77	-	44.82	-	60.00	50.00	-15.18	-
6	18.245	1.13	44.47	-	45.60	-	60.00	50.00	-14.40	-

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value.
5. Correction factor = Insertion loss + Cable loss.
6. Emission Level = Correction Factor + Reading Value.

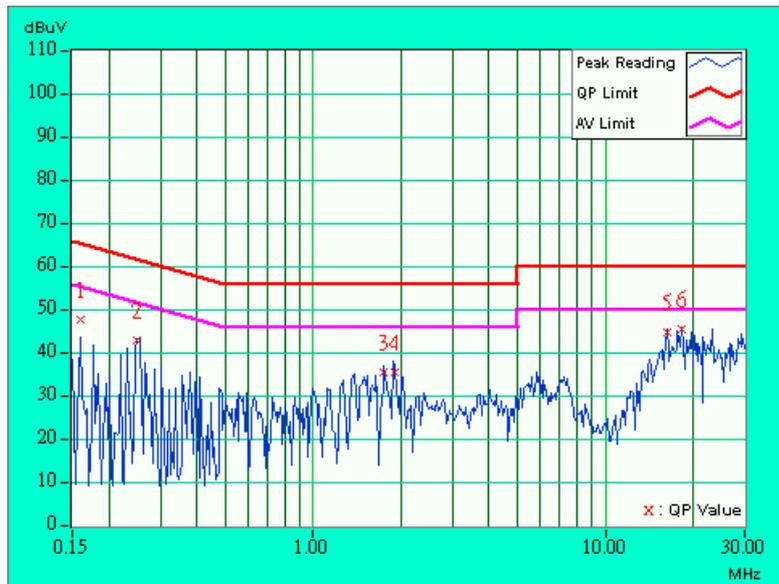




EUT	Hot Spot Access Point	MODEL	WX-1516
MODE	Channel 1	6dB BANDWIDTH	10kHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	25deg.C, 60%RH, 991hPa	TESTED BY: Gary Chang	

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.153	0.10	33.42	-	33.52	-	65.84	55.84	-32.32	-
2	0.171	0.10	25.54	-	25.64	-	64.91	54.91	-39.27	-
3	0.255	0.10	42.62	-	42.72	-	61.59	51.59	-18.87	-
4	0.504	0.10	34.48	-	34.58	-	56.00	46.00	-21.42	-
5	1.872	0.10	38.40	-	38.50	-	56.00	46.00	-17.50	-
6	16.229	0.85	44.13	-	44.98	-	60.00	50.00	-15.02	-

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value.
5. Correction factor = Insertion loss + Cable loss.
6. Emission Level = Correction Factor + Reading Value.

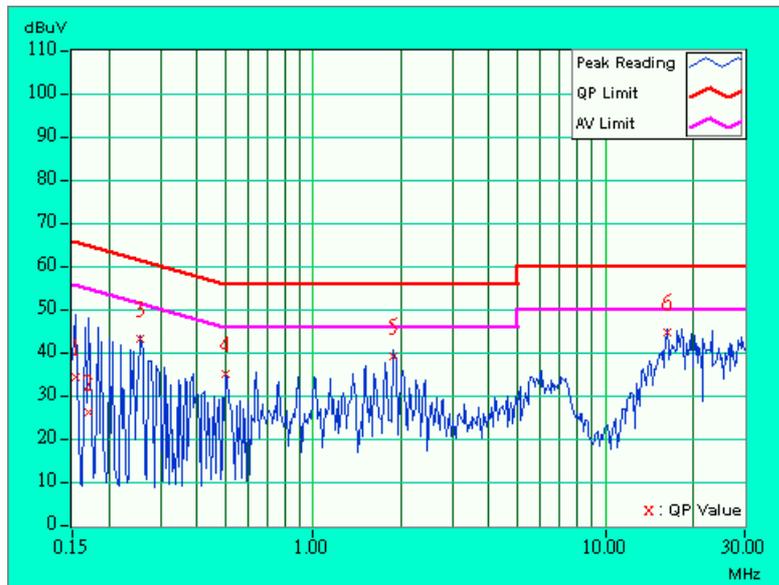




EUT	Hot Spot Access Point	MODEL	WX-1516
MODE	Channel 6	6dB BANDWIDTH	10kHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	25deg.C, 60%RH, 991hPa	TESTED BY: Gary Chang	

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.249	0.10	42.56	-	42.66	-	61.79	51.79	-19.13	-
2	1.503	0.10	33.89	-	33.99	-	56.00	46.00	-22.01	-
3	1.863	0.10	36.42	-	36.52	-	56.00	46.00	-19.48	-
4	5.783	0.39	31.51	-	31.90	-	60.00	50.00	-28.10	-
5	16.229	1.05	43.99	-	45.04	-	60.00	50.00	-14.96	-
6	17.693	1.11	43.88	-	44.99	-	60.00	50.00	-15.01	-

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value.
5. Correction factor = Insertion loss + Cable loss.
6. Emission Level = Correction Factor + Reading Value.

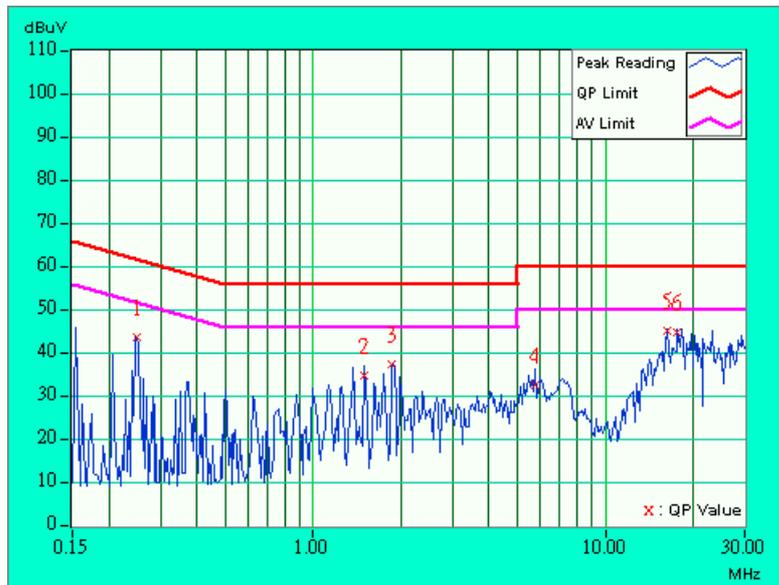




EUT	Hot Spot Access Point	MODEL	WX-1516
MODE	Channel 6	6dB BANDWIDTH	10kHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	25deg.C, 60%RH, 991hPa	TESTED BY: Gary Chang	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.171	0.10	34.78	-	34.88	-	64.91	54.91	-30.03	-
2	0.224	0.10	32.56	-	32.66	-	62.66	52.66	-30.00	-
3	0.376	0.10	31.74	-	31.84	-	58.37	48.37	-26.53	-
4	1.872	0.10	38.08	-	38.18	-	56.00	46.00	-17.82	-
5	16.229	0.85	44.13	-	44.98	-	60.00	50.00	-15.02	-
6	18.245	0.93	44.61	-	45.54	-	60.00	50.00	-14.46	-

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value.
5. Correction factor = Insertion loss + Cable loss.
6. Emission Level = Correction Factor + Reading Value.

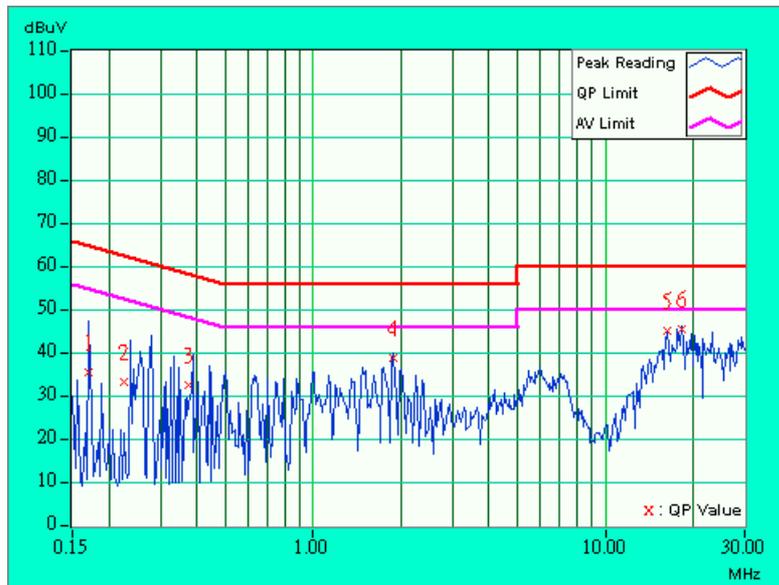




EUT	Hot Spot Access Point	MODEL	WX-1516
MODE	Channel 11	6dB BANDWIDTH	10kHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	25deg.C, 60%RH, 991hPa	TESTED BY: Gary Chang	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.10	52.82	-	52.92	-	66.00	56.00	-13.08	-
2	0.201	0.10	46.28	-	46.38	-	63.57	53.57	-17.19	-
3	0.219	0.10	44.39	-	44.49	-	62.86	52.86	-18.37	-
4	0.237	0.10	43.00	-	43.10	-	62.20	52.20	-19.10	-
5	5.948	0.40	30.04	-	30.44	-	60.00	50.00	-29.56	-
6	18.242	1.13	43.59	-	44.72	-	60.00	50.00	-15.28	-

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value.
5. Correction factor = Insertion loss + Cable loss.
6. Emission Level = Correction Factor + Reading Value.

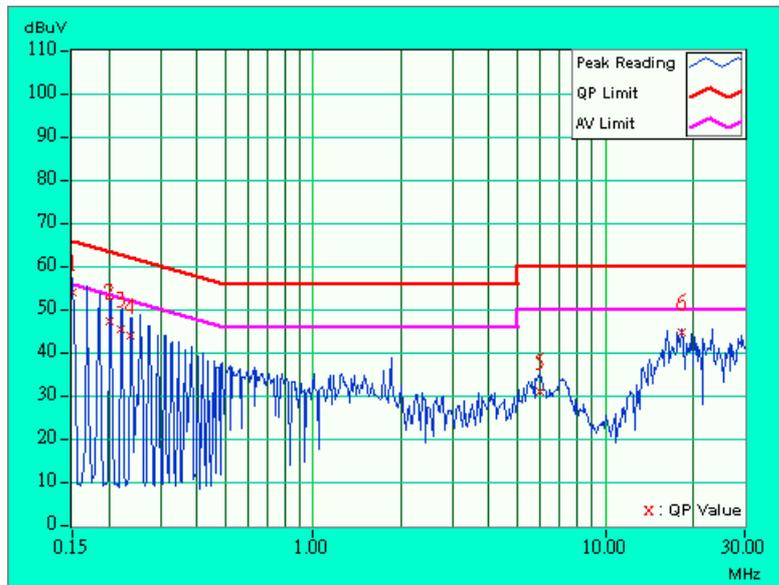




EUT	Hot Spot Access Point	MODEL	WX-1516
MODE	Channel 11	6dB BANDWIDTH	10kHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	25deg.C, 60%RH, 991hPa	TESTED BY: Gary Chang	

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.165	0.10	47.62	-	47.72	-	65.21	55.21	-17.49	-
2	0.186	0.10	44.99	-	45.09	-	64.21	54.21	-19.12	-
3	0.219	0.10	42.14	-	42.24	-	62.86	52.86	-20.62	-
4	0.240	0.10	39.96	-	40.06	-	62.10	52.10	-22.04	-
5	1.863	0.10	39.70	-	39.80	-	56.00	46.00	-16.20	-
6	16.229	0.85	44.11	-	44.96	-	60.00	50.00	-15.04	-

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value.
5. Correction factor = Insertion loss + Cable loss.
6. Emission Level = Correction Factor + Reading Value.

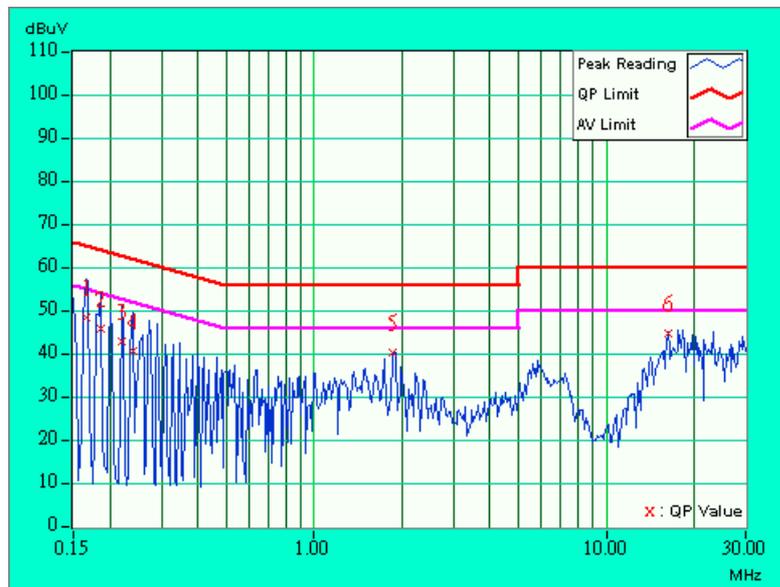



4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
* HP Spectrum Analyzer	8590L	3544A01176	May 13, 2003
* HP Preamplifier	8447D	2944A08485	Apr. 29, 2003
* HP Preamplifier	8449B	3008A01201	Dec. 01, 2003
* HP Preamplifier	8449B	3008A01292	Aug. 07, 2003
*Spectrum Analyzer	8593E	3926A04191	Mar. 24, 2004
*Test Receiver	ESI7	838496/016	Feb. 23, 2004
SCHAFFNER Tunable Dipole Antenna	VHBA 9123	459	Nov. 22, 2003
SCHWARZBECK Tunable Dipole Antenna	UHA 9105	977	
* CHASE BILOG Antenna	CBL6112A	2221	Aug. 02, 2003
* SCHWARZBECK Horn Antenna	BBHA9120-D1	D130	July 03, 2003
* EMCO Horn Antenna	3115	9312-4192	Apr. 09, 2003
* EMCO Turn Table	1060	1115	NA
* SHOSHIN Tower	AP-4701	A6Y005	NA
* Software	ADT_Radiated_V5.09	NA	NA
* ANRITSU RF Switches	MP59B	M35046	Jul. 11. 2003
* TIMES RF cable	LMR-600	CABLE-ST5-01	Jul. 11. 2003

- NOTE:**
1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.
 2. "*" = These equipment are used for the final measurement.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The test was performed in ADT Open Site No. 5.
 5. The VCCI Site Registration No. is R-1039.



4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using the quasi-peak method or average method as specified and then reported in Data sheet peak mode and QP mode.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 300 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

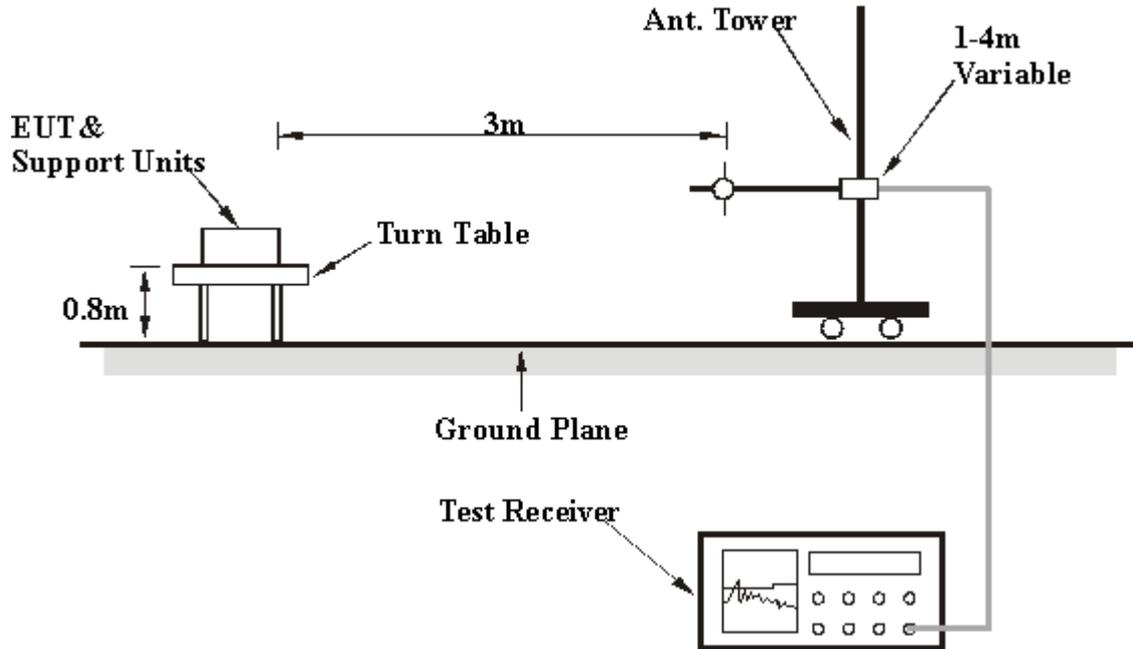

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6



4.2.7 TEST RESULTS

EUT	Hot Spot Access Point	MODEL	WX-1516
MODE	Channel 11	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 991hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	176.02	26.9 QP	43.50	-16.60	1.25 H	250	16.30	10.60
2	250.06	30.9 QP	46.00	-15.10	1.31 H	207	15.30	15.60
3	264.04	34.1 QP	46.00	-11.90	1.63 H	3	17.50	16.70
4	352.07	38.4 QP	46.00	-7.60	1.85 H	85	20.70	17.70
5	440.10	37.9 QP	46.00	-8.10	1.19 H	241	18.30	19.60
6	440.10	37.9 QP	46.00	-8.10	1.19 H	352	18.30	19.60
7	528.12	38.6 QP	46.00	-7.40	1.13 H	28	17.40	21.10
8	616.12	38.6 QP	46.00	-7.40	1.74 H	3	15.80	22.70
9	704.13	39.7 QP	46.00	-6.30	1.65 H	86	16.60	23.10
10	792.15	42.6 QP	46.00	-3.40	1.26 H	306	17.90	24.80
11	880.17	42.5 QP	46.00	-3.50	1.26 H	44	17.40	25.20

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	176.03	33.2 QP	43.50	-10.20	1.00 V	74	22.60	10.60
2	250.02	35.6 QP	46.00	-10.40	1.00 V	135	20.00	15.60
3	264.04	36.7 QP	46.00	-9.30	1.00 V	187	20.00	16.70
4	352.07	38.0 QP	46.00	-8.00	1.99 V	331	20.30	17.70
5	454.95	30.3 QP	46.00	-15.70	2.02 V	266	10.40	19.90
6	528.11	35.2 QP	46.00	-10.80	1.50 V	118	14.10	21.10
7	616.12	34.0 QP	46.00	-12.00	1.58 V	259	11.30	22.70
8	625.06	30.3 QP	46.00	-15.70	1.91 V	132	7.60	22.80
9	704.13	41.9 QP	46.00	-4.10	1.08 V	288	18.90	23.10
10	792.16	41.7 QP	46.00	-4.30	1.00 V	333	16.90	24.80
11	880.17	40.8 QP	46.00	-5.20	1.00 V	321	15.60	25.20
12	968.18	39.3 QP	54.00	-14.70	1.47 V	319	14.30	25.00

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



EUT	Hot Spot Access Point	MODEL	WX-1516
CHANNEL	Channel 1	FREQUENCY RANGE	Above 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 991hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2038.00	42.8 PK	74.00	-31.20	1.30 H	84	14.50	28.30
2	*2412.00	92.1 PK			1.17 H	265	62.50	29.60
2	*2412.00	84.8 AV			1.17 H	265	55.20	28.30
3	4076.00	46.5 PK	74.00	-27.50	1.29 H	55	12.80	33.70
4	4824.00	45.0 PK	74.00	-29.00	1.26 H	28	10.00	35.00
5	6113.00	47.8 PK	74.00	-26.20	1.15 H	121	10.50	37.30
6	7236.00	51.3 PK	74.00	-22.70	1.06 H	35	10.90	40.40
6	7236.00	41.0 AV	54.00	-13.00	1.06 H	35	0.60	29.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2038.00	42.9 PK	74.00	-31.10	1.25 V	62	14.60	28.30
2	*2412.00	102.4 PK			1.11 V	271	72.70	29.60
2	*2412.00	95.1 AV			1.11 V	271	65.40	28.30
3	4076.00	46.8 PK	74.00	-27.20	1.51 V	324	13.10	33.70
4	4824.00	45.3 PK	74.00	-28.70	1.06 V	85	10.30	35.00
5	6113.00	47.5 PK	74.00	-26.50	1.17 V	261	10.20	37.30
6	7236.00	50.5 PK	74.00	-23.50	1.14 V	257	10.10	40.40
6	7236.00	40.1 AV	54.00	-13.90	1.14 V	257	-0.30	29.60

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.



EUT	Hot Spot Access Point	MODEL	WX-1516
CHANNEL	Channel 6	FREQUENCY RANGE	Above 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 991hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2063.00	42.8 PK	74.00	-31.20	1.15 H	32	14.40	28.40
2	*2437.00	95.8 PK			1.54 H	40	66.10	29.70
2	*2437.00	89.3 AV			1.54 H	40	59.50	28.40
3	4126.00	46.8 PK	74.00	-27.20	1.72 H	51	13.10	33.70
4	4874.00	45.9 PK	74.00	-28.10	1.06 H	52	10.70	35.20
5	6188.00	47.7 PK	74.00	-26.30	1.21 H	308	10.20	37.50
6	7311.00	50.9 PK	74.00	-23.10	1.31 H	216	10.40	40.50
6	7311.00	41.4 AV	54.00	-12.60	1.31 H	216	0.90	29.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2063.00	43.9 PK	74.00	-30.10	1.22 V	52	15.50	28.40
2	*2437.00	102.8 PK			2.12 V	352	73.10	29.70
2	*2437.00	94.3 AV			2.12 V	352	64.60	28.40
3	4126.00	46.4 PK	74.00	-27.60	1.43 V	285	12.70	33.70
4	4874.00	45.7 PK	74.00	-28.30	1.07 V	32	10.50	35.20
5	6188.00	47.8 PK	74.00	-26.20	1.11 V	28	10.20	37.50
6	7310.00	51.2 PK	74.00	-22.80	1.17 V	252	10.70	40.50
6	7310.00	43.4 AV	54.00	-10.60	1.17 V	252	2.90	29.70

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “ : Fundamental frequency.



EUT	Hot Spot Access Point	MODEL	WX-1516
CHANNEL	Channel 11	FREQUENCY RANGE	Above 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 991hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2088.00	44.3 PK	74.00	-29.70	1.03 H	18	15.80	28.50
2	*2462.00	93.9 PK			1.35 H	125	64.10	29.80
2	*2462.00	85.7 AV			1.35 H	125	55.90	28.50
3	4176.00	46.5 PK	74.00	-27.50	1.44 H	310	12.80	33.70
4	4924.00	46.1 PK	74.00	-27.90	1.20 H	46	10.70	35.40
5	6263.00	48.7 PK	74.00	-25.30	1.18 H	152	10.90	37.80
6	7386.00	51.0 PK	74.00	-23.00	1.10 H	165	10.30	40.60
6	7386.00	41.5 AV	54.00	-12.50	1.10 H	165	0.80	29.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2088.00	41.3 PK	74.00	-32.70	1.53 V	65	12.80	28.50
2	*2462.00	103.9 PK			1.78 V	115	74.10	29.80
2	*2462.00	96.9 AV			1.78 V	115	67.10	28.50
3	4176.00	46.4 PK	74.00	-27.60	1.73 V	35	12.70	33.70
4	4924.00	45.5 PK	74.00	-28.50	1.56 V	77	10.10	35.40
5	6263.00	48.4 PK	74.00	-25.60	1.31 V	334	10.60	37.80
6	7385.00	51.3 PK	74.00	-22.70	1.56 V	85	10.60	40.60
6	7385.00	40.9 AV	54.00	-13.10	1.56 V	85	0.20	29.80

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “ : Fundamental frequency.



4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	July 24, 2003

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP

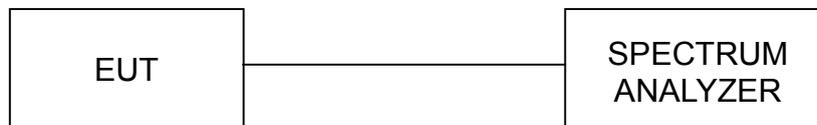

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.




4.3.7 TEST RESULTS

EUT	Hot Spot Access Point	MODEL	WX-1516
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg. C, 62%RH, 991hPa
TESTED BY: Hardaway Lee			

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	10.34	0.5	PASS
6	2437	10.26	0.5	PASS
11	2462	10.34	0.5	PASS




CH1

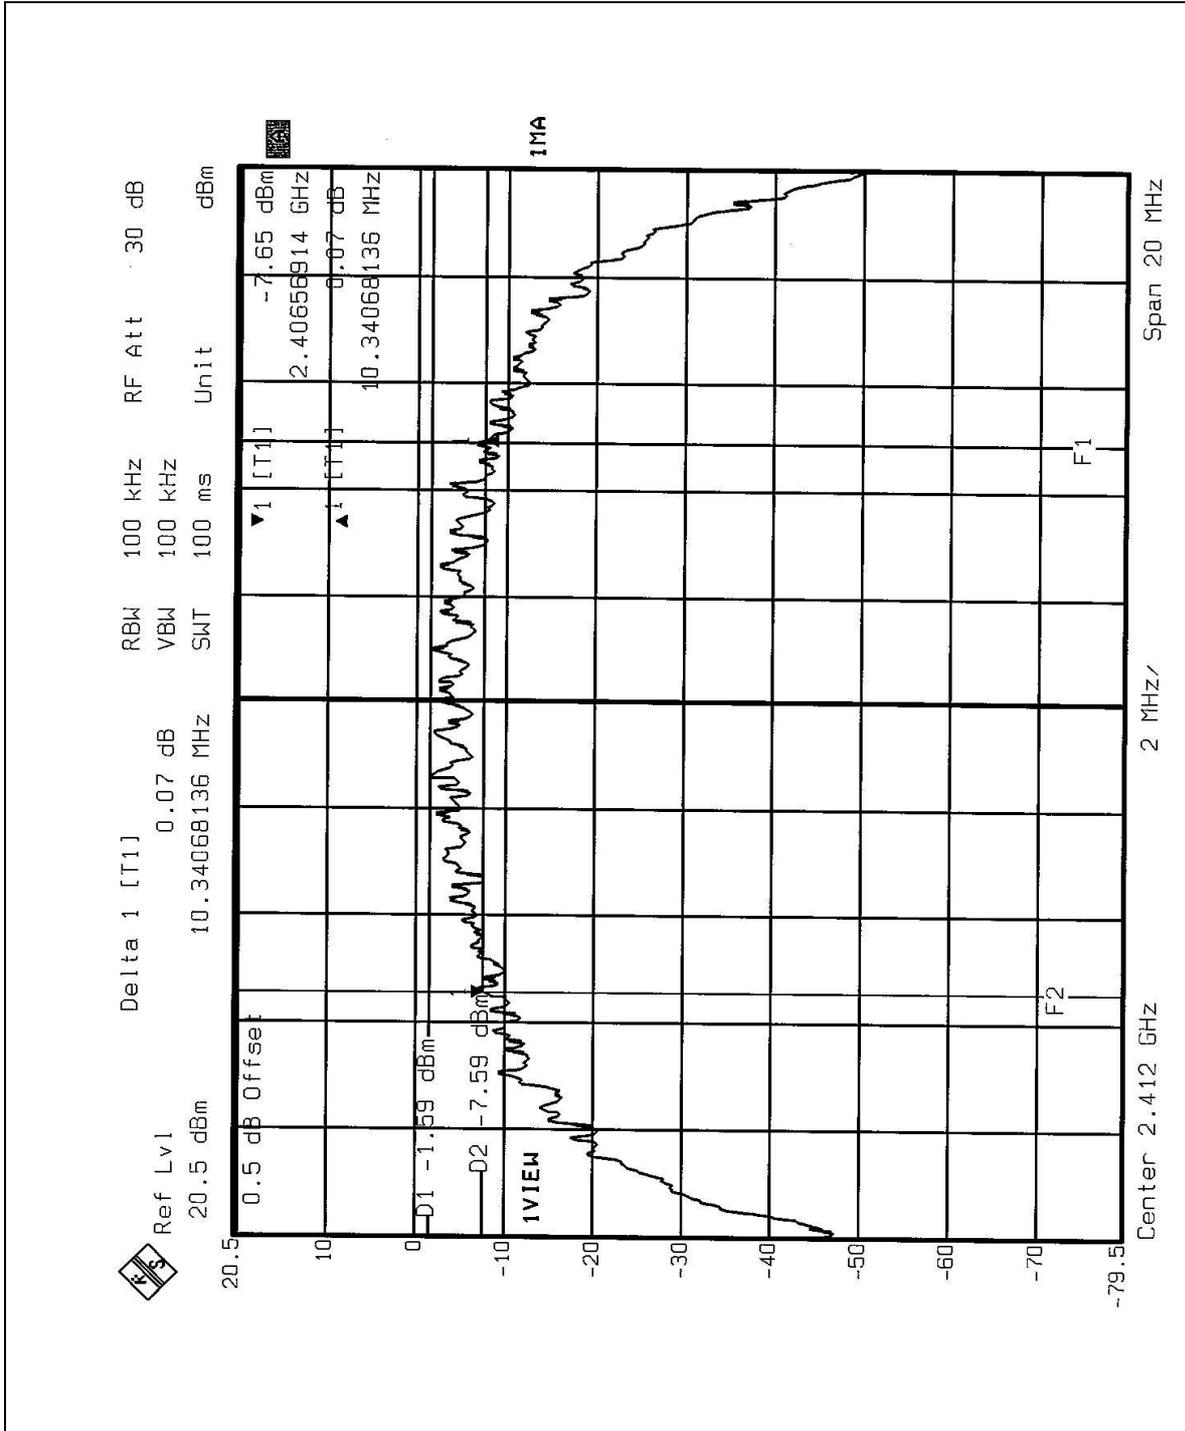




CH6

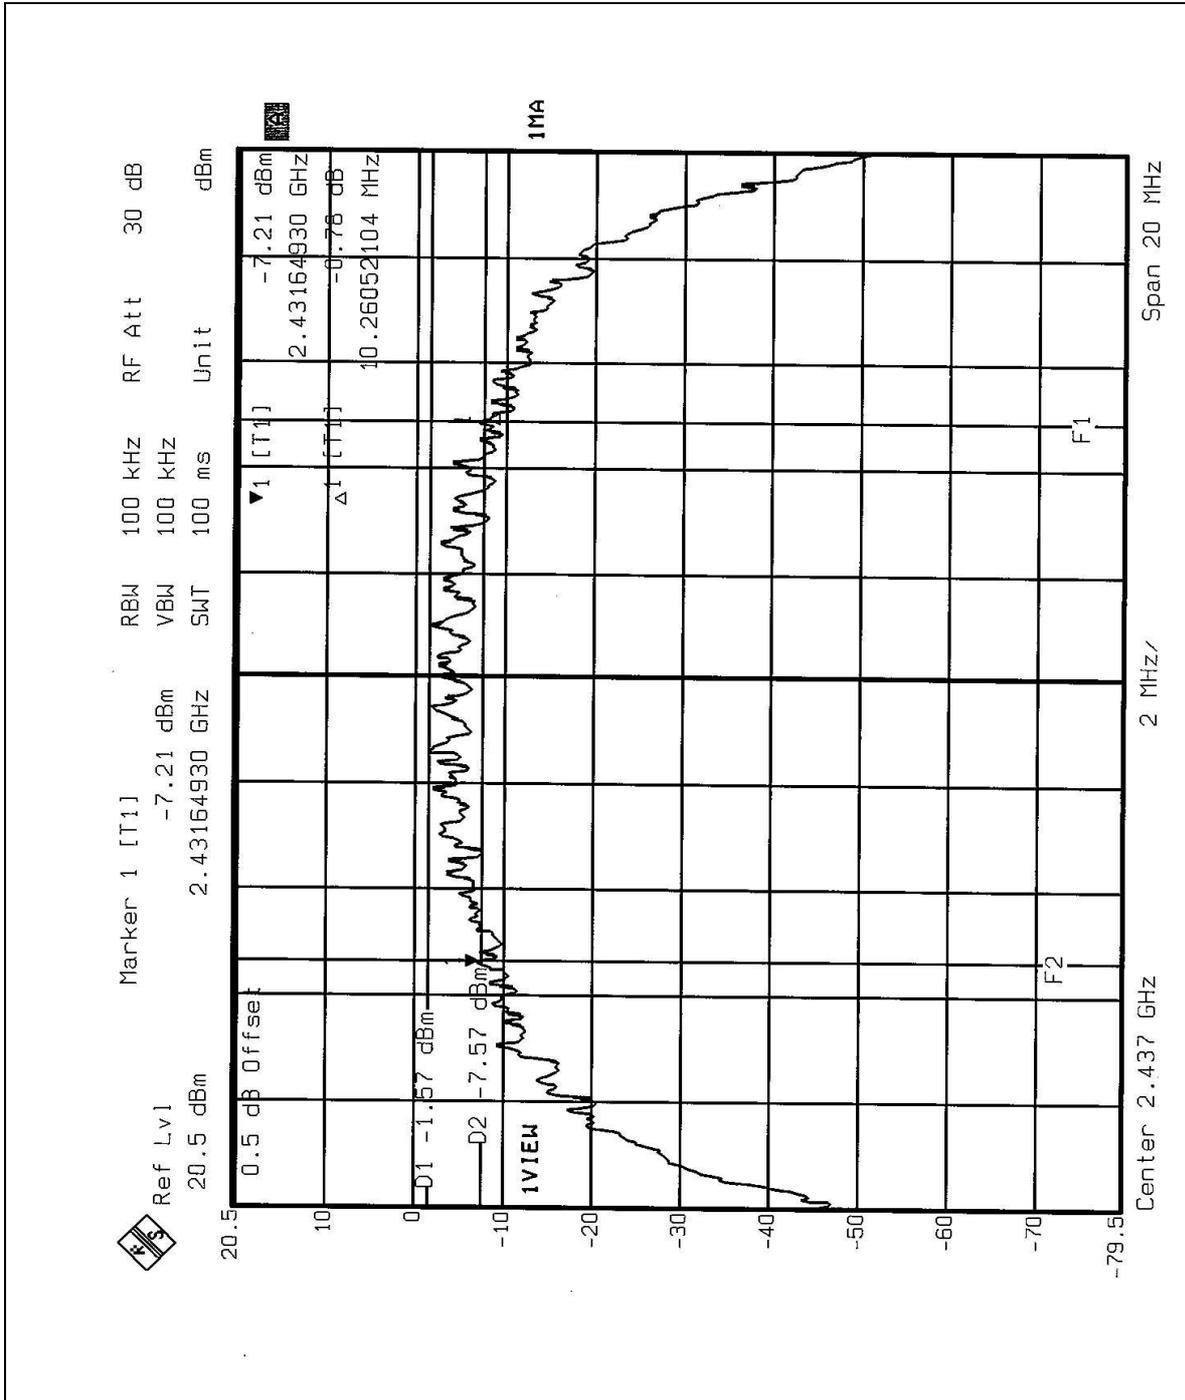



CH11

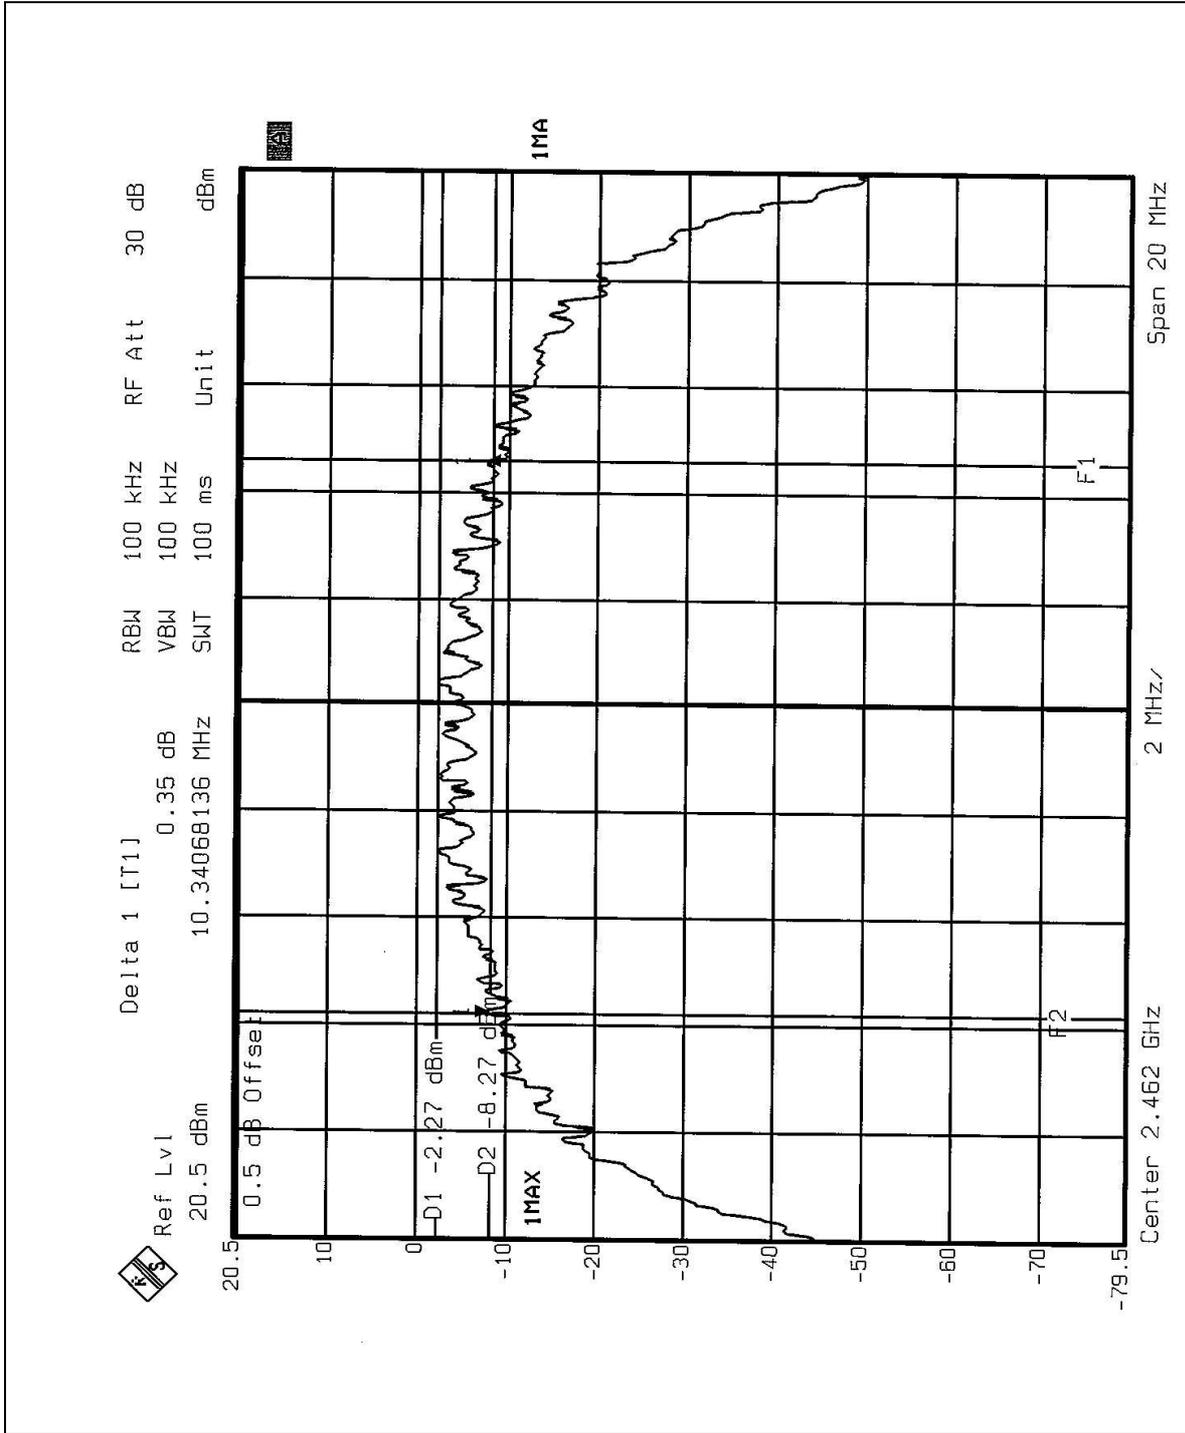



4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SINGLE CHANNEL POWER METER	NRVS	100026	Mar. 07, 2004
PEAK POWER SENSOR	NRV-Z32	100013	Mar. 07, 2004

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.




4.4.3 TEST PROCEDURES

The transmitter output was connected to the peak power meter.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP

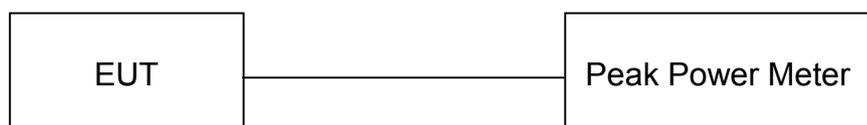

4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6



4.4.7 TEST RESULTS

EUT	Hot Spot Access Point	MODEL	WX-1516
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg. C, 62%RH, 991hPa
TESTED BY: Hardaway Lee			

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	14.20	30	PASS
6	2437	14.26	30	PASS
11	2462	14.00	30	PASS



4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	July 24, 2003

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.




4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time = span/3 kHz. The power spectral density was measured and recorded. The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP

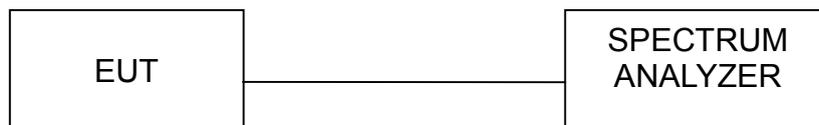

4.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6




4.5.7 TEST RESULTS

EUT	Hot Spot Access Point	MODEL	WX-1516
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	24deg. C, 62%RH, 991hPa
TESTED BY: Hardaway Lee			

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-15.78	8	PASS
6	2437	-15.49	8	PASS
11	2462	-16.95	8	PASS




CH1

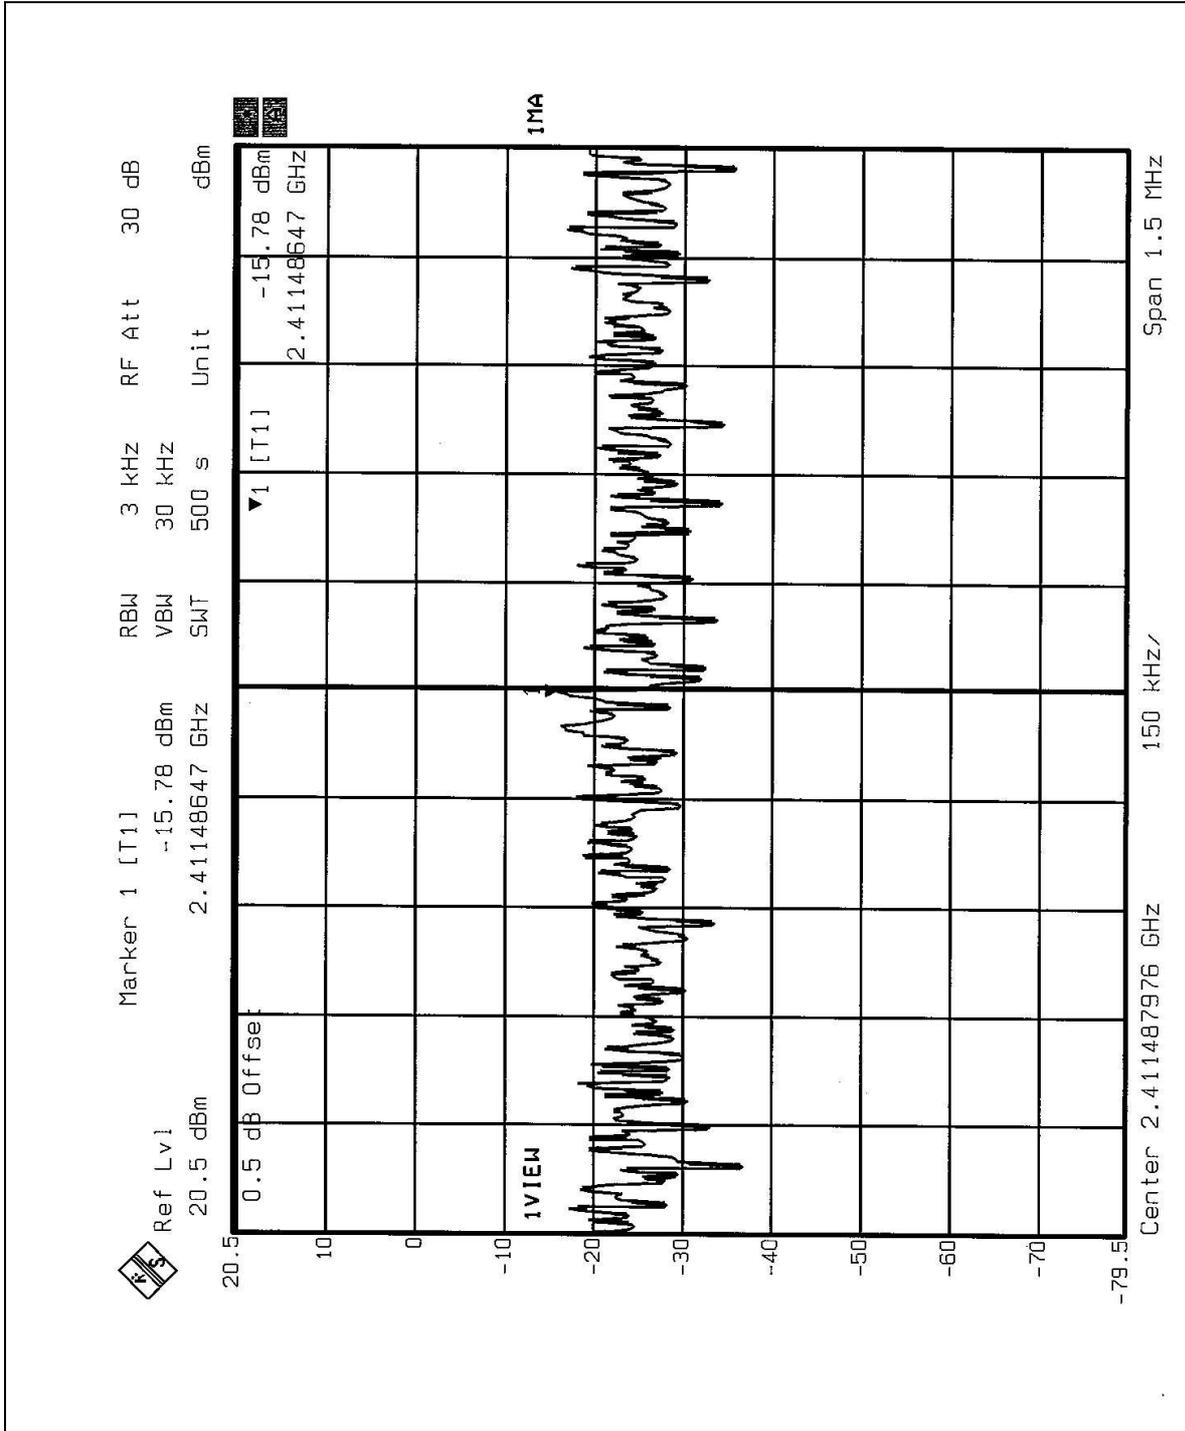




CH6

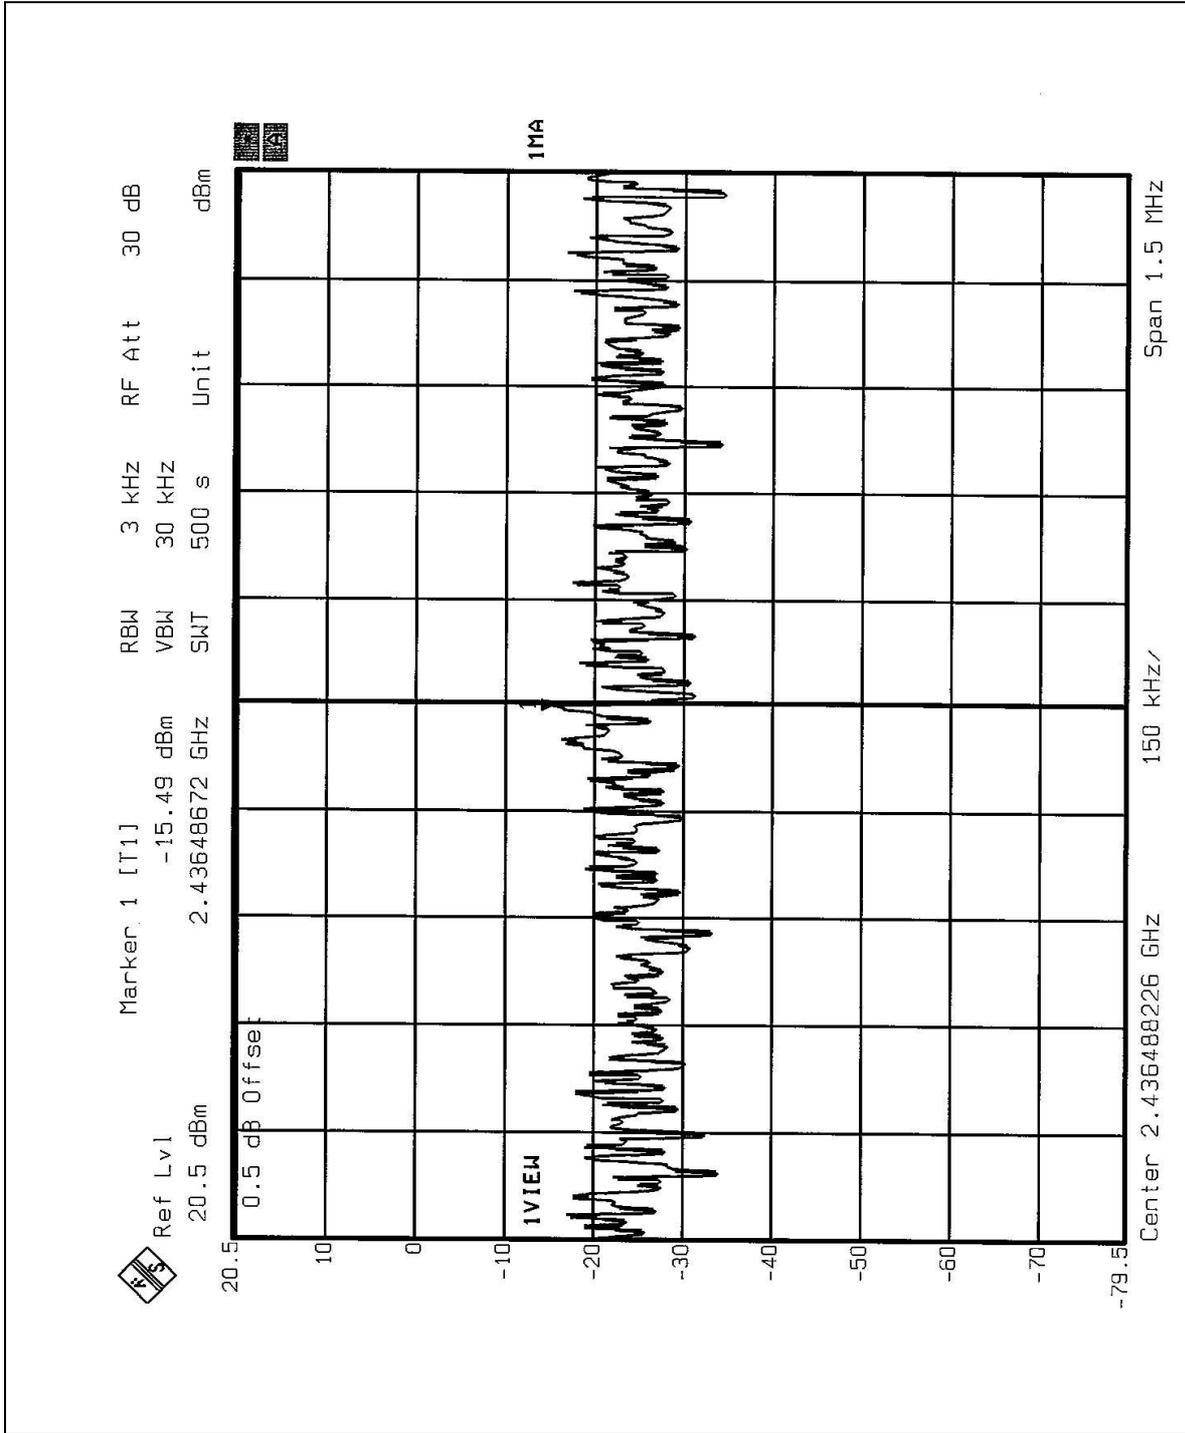



CH11

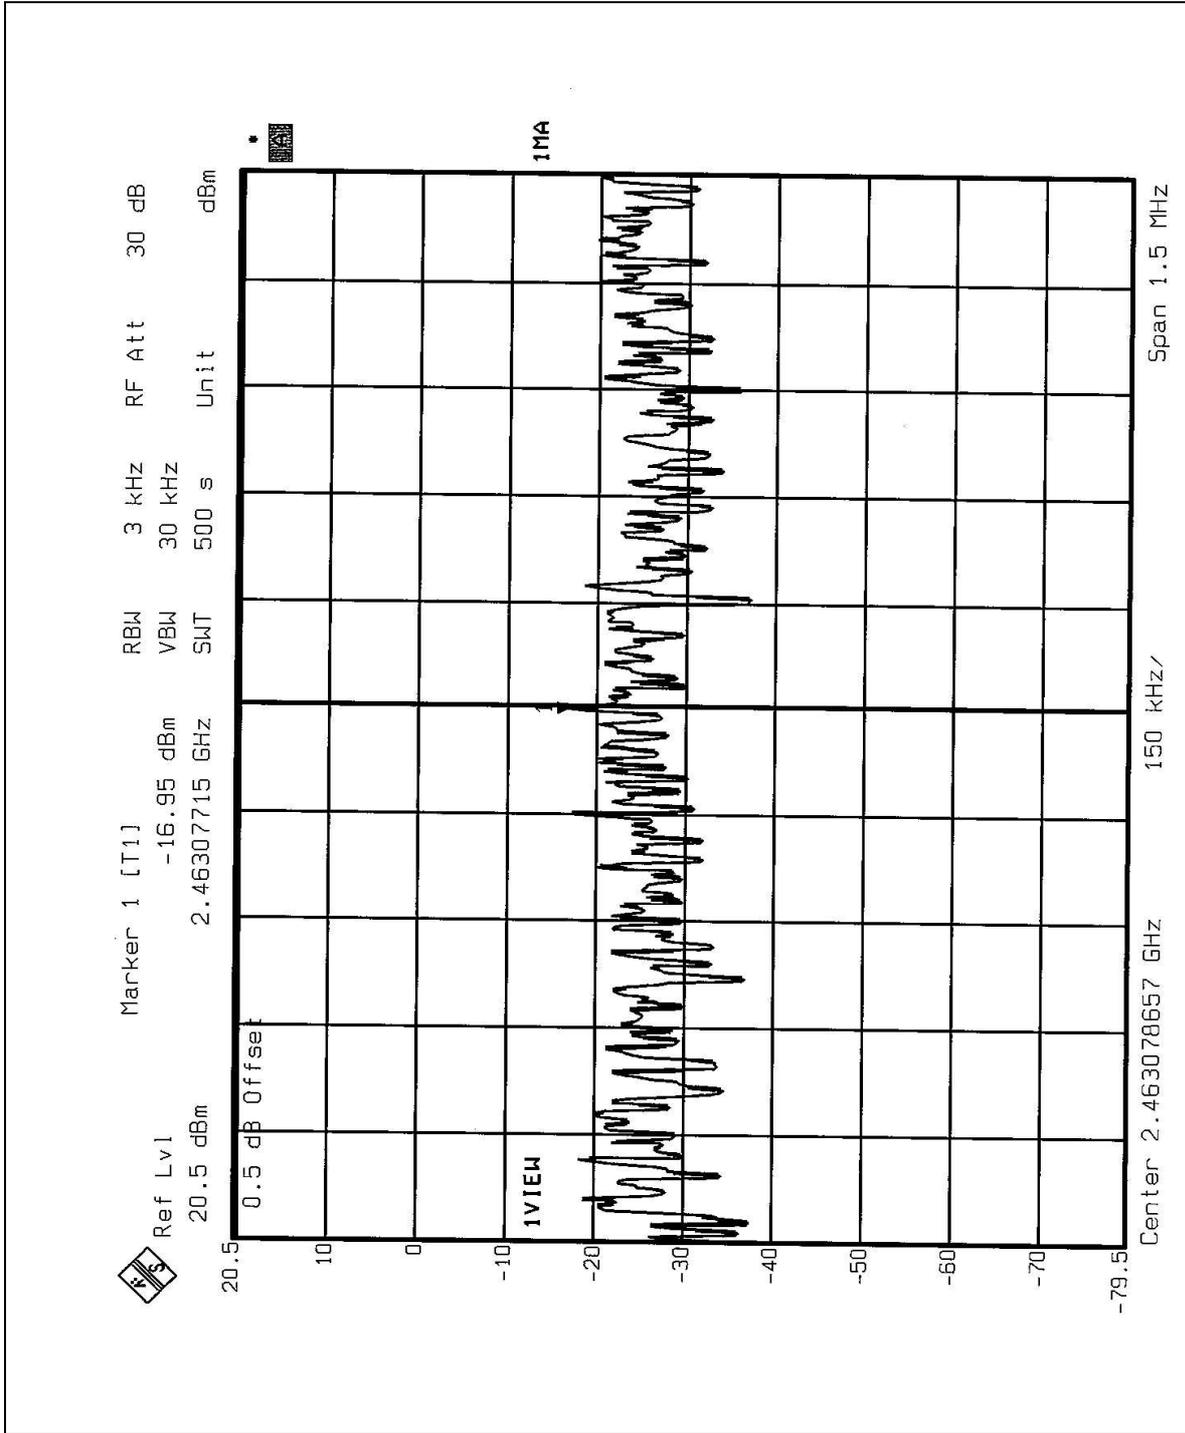



4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100KHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	July 24, 2003

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100kHz with suitable frequency span including 100kHz bandwidth from band edge. The band edges was measured and recorded.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation




4.6.5 EUT OPERATING CONDITION


Same as Item 4.3.6

4.6.6 TEST RESULTS

The spectrum plots are attached on the following 2 pages. D2 line indicates the highest level, D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(C).

NOTE: The band edge emission plot on the following 2 pages shows 41.23dB/ 53.62dB delta between carrier maximum power and local maximum emission in restrict band (2.3897GHz / 2.4969GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 95.1dBuV/m, so the maximum field strength in restrict band is $95.1 - 41.23 = 53.87$ dBuV/m which is under 54dBuV/m limit.

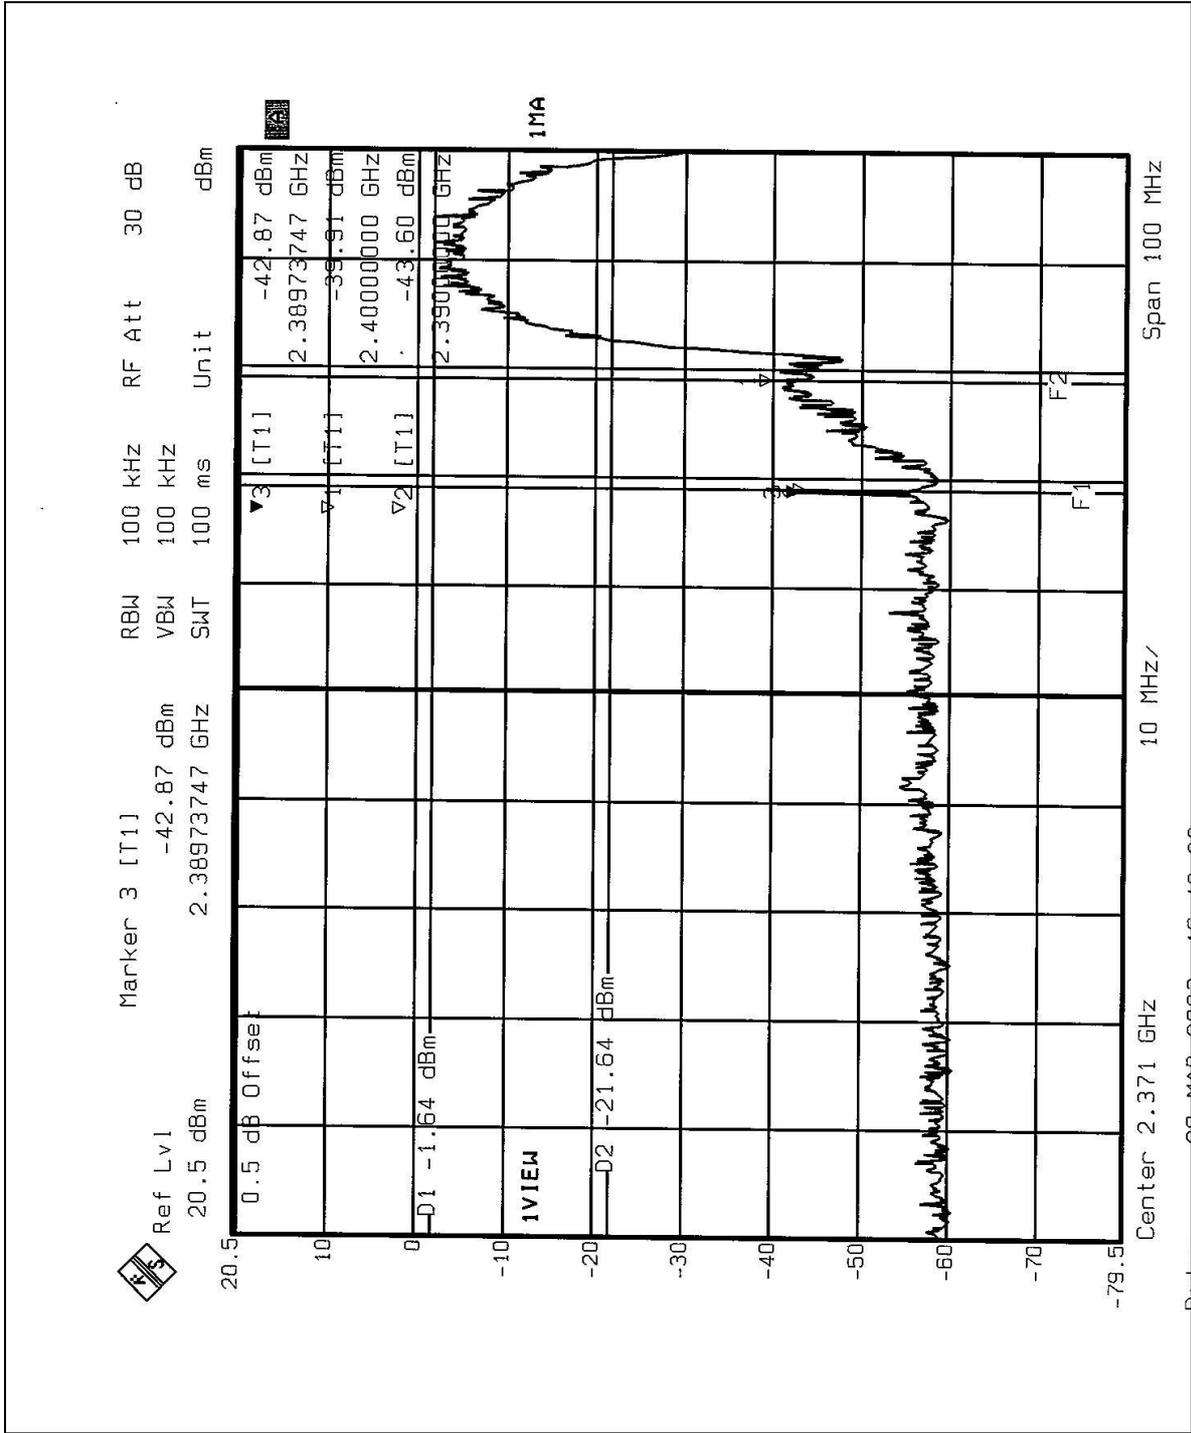

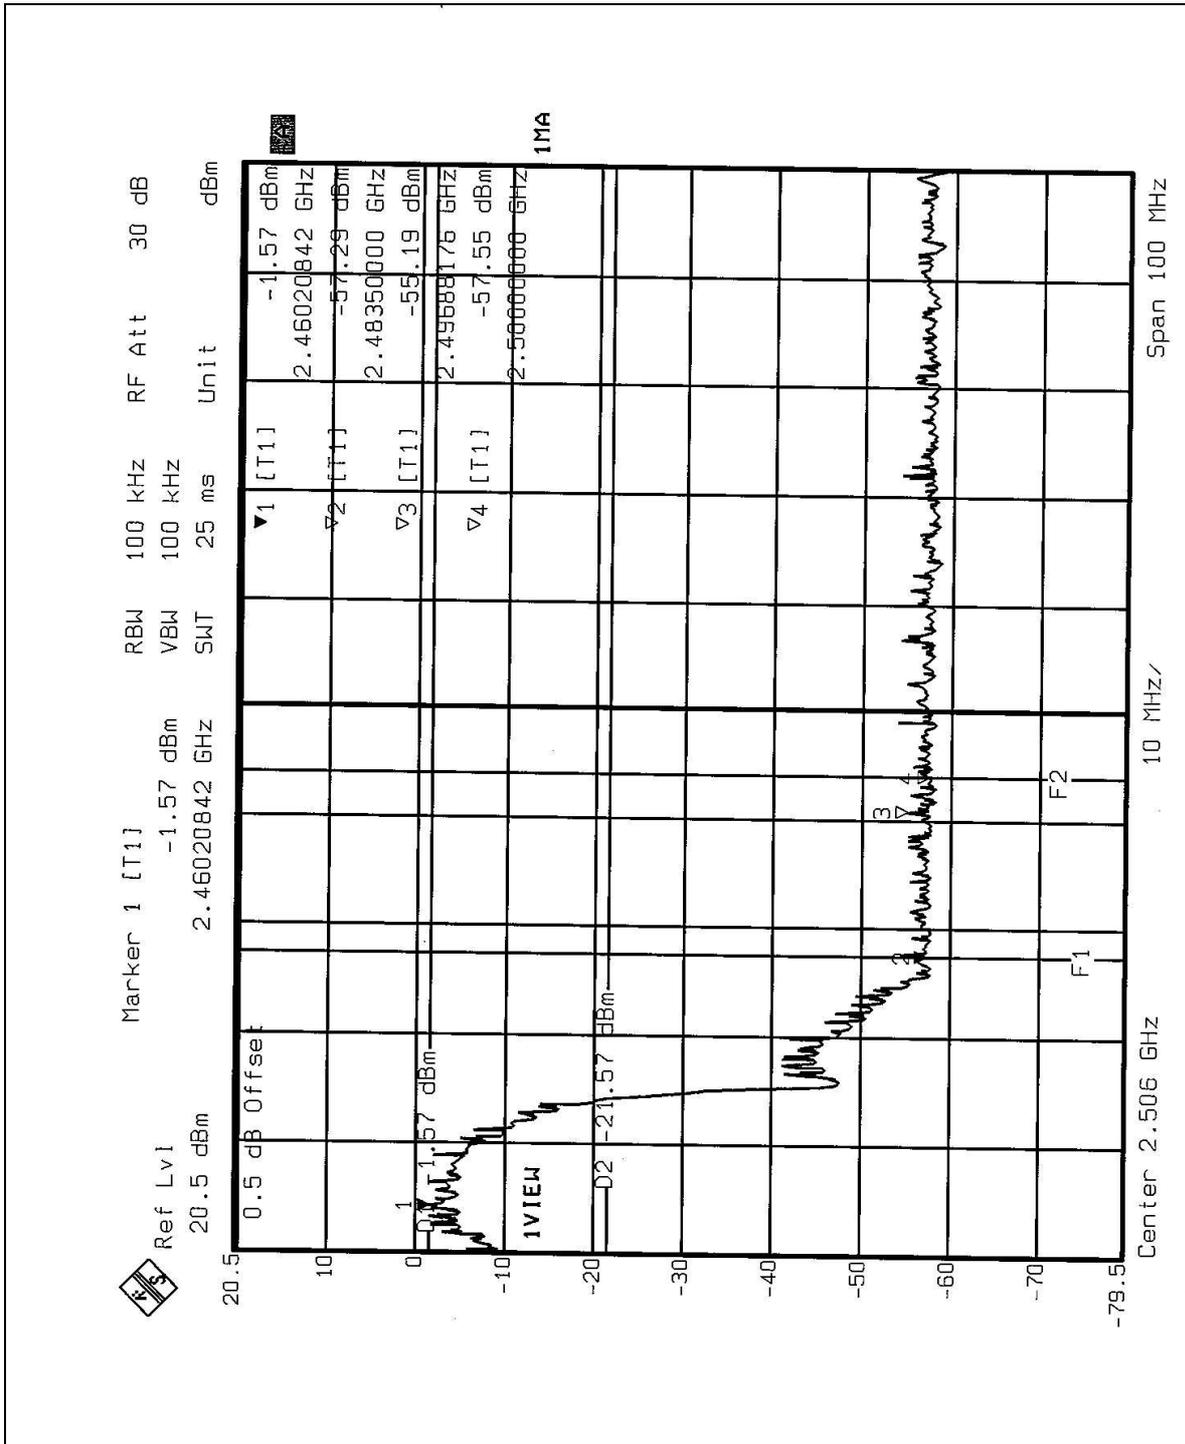



4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


4.7.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is Dipole Antenna with Reversed SMA connector. The maximum Gain of the antenna is 2dBi only.

5 PHOTOGRAPHS OF THE TEST CONFIGURATION CONDUCTED EMISSION TEST



RADIATED EMISSION TEST

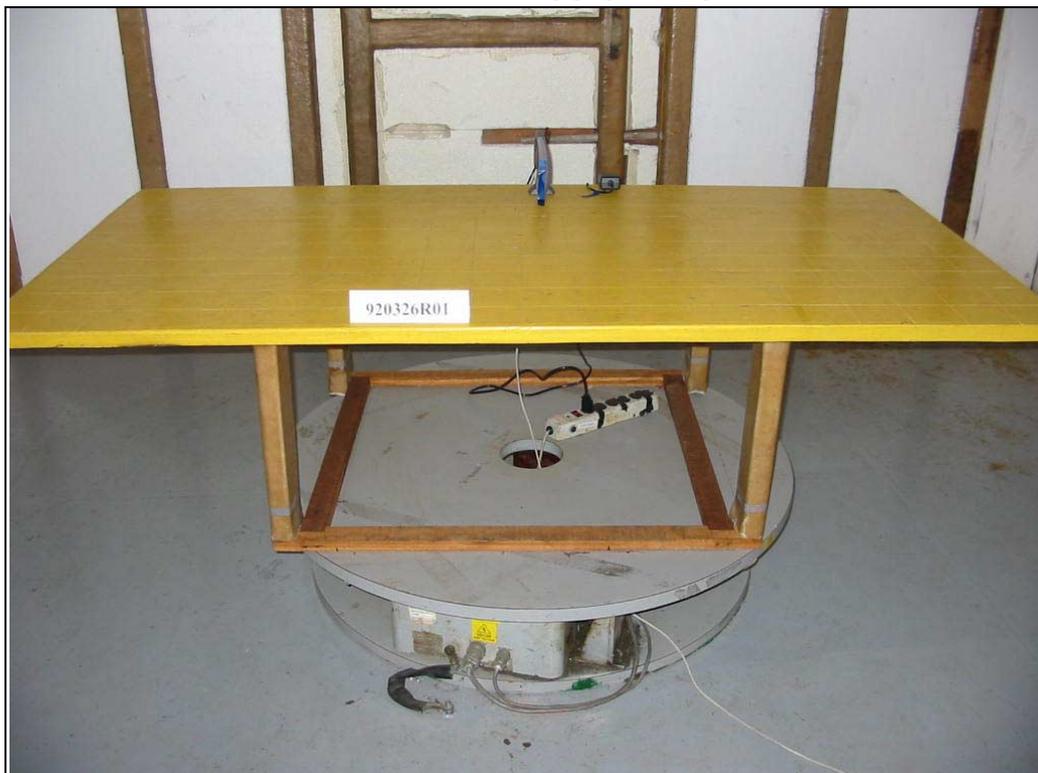



6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025, Guide 25 or EN 45001:

USA	FCC, NVLAP, UL
Germany	TUV Rheinland
Japan	VCCI
New Zealand	MoC
Norway	NEMKO
R.O.C.	BSMI, DGT, CNLA

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC Lab:

Tel: 886-35-935343

Fax: 886-35-935342

Lin Kou Safety Lab:

Tel: 886-2-26093195

Fax: 886-2-26093184

Lin Kou RF&Telecom Lab

Tel: 886-3-3270910

Fax: 886-3-3270892

Email: service@mail.adt.com.tw

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.