



BACK LABEL

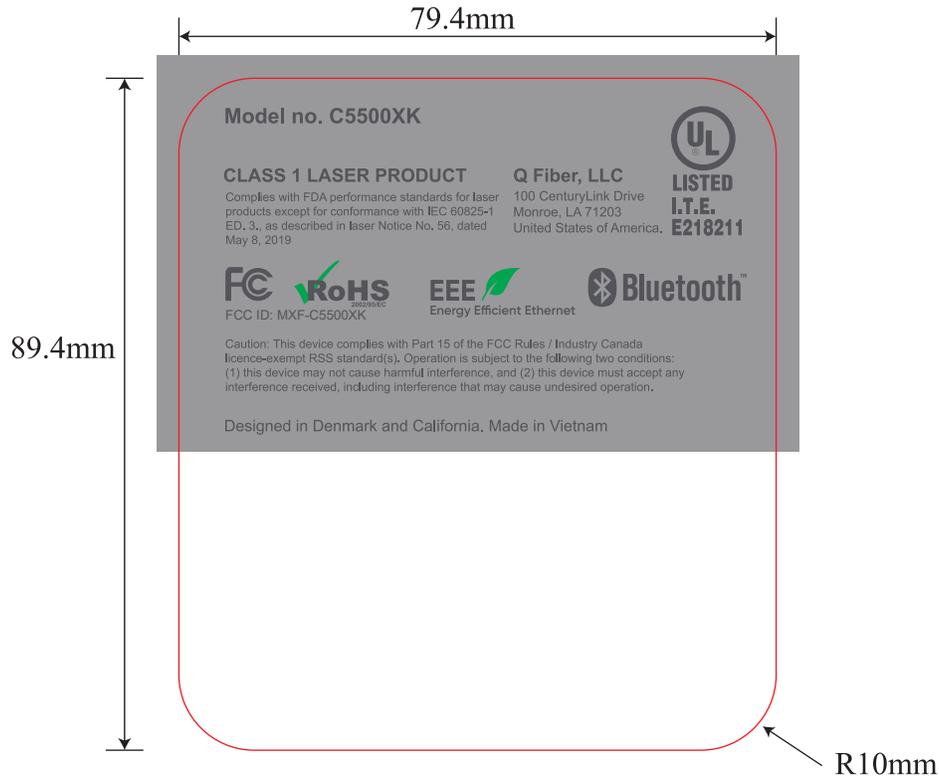

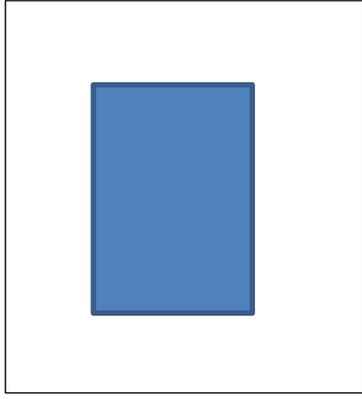

FCC ID: MXF-C5500XK

Facestock

A white polyester facestock with a smooth, absorbent ink-receptive topcoat.

Basis Weight: 70g/m² ± 10% ISO536
Caliper: 0.050 mm ± 10% ISO534

Adhesive

A general purpose permanent, solvent acrylic based adhesive..

Liner

A super-calendared embossing polycoated white glassine paper

Basis Weight: 108 g/m² ± 10% ISO536
Caliper: 0.100mm ± 10% ISO534

Performance data

loop Tack (st,st)-FTM 9: 9.0
20 min 90° Peel (st,st)-FTM 2: 5.5
24 hour 90° Peel (st,st)-FTM 2: 7.0

Minimum Application Temperature: -4°C
After labeling 24Hours, Service Temperature Range: -40°C~+149°C

Adhesive Performance

This is an excellent, general-purpose industrial grade clear adhesive, featuring high initial tack, ultimate adhesion and low adhesive ooze. It is resistant to many solvents.

Applications and use

The special grid on the adhesive layer can drive away air which hides between the label and substrate to ensure the label will not create bubble. Especially on those conditions, such as the big size label, etc.

This product features excellent tear strength, heat resistance, dimensional stability, transparency and chemical resistance.

This product is suitable for use in a wide range of durable labeling applications. The product remains reclosure performance in a short time.

Conversion/printing

The top coated surface is designed and suitable for all normal printing techniques. Special formulated inks are normally not necessary. It can be used for thermal transfer printing.

Ink/ribbon testing is always recommended before production.

This product can be die cut and stripped at high speeds on most web-fed presses.

Hardened treated and sharp dies, preferably in flat-bed, are important to ensure smooth conversion.



Need avoid too much re-winding tension to causing bleeding.

Shelf life

One year when stored at 23 ± 2°C at 50 ± 5% RH.

MZS229

Fasson® 50 micron White PET TC4/S8040E/Embossed Polycoated liner ni

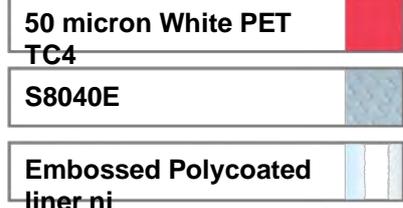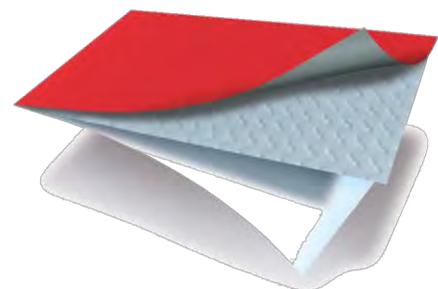

Avery Dennison Label and Packaging Materials

32/F., Skyline Tower
39 Wang Kwong Road
Kowloon Bay, Kowloon,
Hong Kong
Tel: +852 2802-9618 | +856 400 828 3797

Warranty

All statements, technical information and recommendations about AVERY DENNISON products are based upon tests believed to be reliable but do not constitute a guarantee or warranty. All AVERY DENNISON products are sold with the understanding that PURCHASER has independently determined the suitability of such products for its purposes. AVERY DENNISON products are warranted to be free of defects in material or workmanship for a period of one year from the date of shipment. Any product shown to the satisfaction of AVERY DENNISON within the time provided to be so defective shall be replaced without charge of AVERY DENNISON may issue credit in such amount as it seems reasonable however, in no event shall AVERY DENNISON be responsible for claims beyond the replacement value of the defective product or in any way

All statements, technical information and recommendations about AVERY DENNISON products are based upon tests believed to be reliable but do not constitute a guarantee or warranty. All AVERY DENNISON products are sold with the understanding that PURCHASER has independently determined the suitability of such products for its purposes. AVERY DENNISON products are warranted to be free of defects in material or workmanship for a period of one year from the date of shipment. Any product shown to the satisfaction of AVERY DENNISON within the time provided to be so defective shall be replaced without charge of AVERY DENNISON may issue credit in such amount as it seems reasonable however, in no event shall AVERY DENNISON be responsible for claims beyond the replacement value of the defective product or in any way

商 标 纸 规 格 表

SPECIFICATION

DATE:2018/09/01

Article Name	Transparent PET Label	<div style="display: flex; align-items: center;"> <div style="border: 1px solid black; width: 20px; height: 15px; margin-right: 5px;"></div> → PET </div> <div style="border: 1px solid black; width: 20px; height: 15px; margin-right: 5px; margin-top: 2px;"></div> → PPB <div style="border: 1px solid black; width: 20px; height: 15px; margin-right: 5px; margin-top: 2px;"></div> → PET liner			
Code	P027Z				
Surface Material			Liner		
Article Name		PET	Article Name		PET
Thickness	mm	0.025±5%	Thickness	mm	0.025±5%
Base Weight	g/m ²	~	Base Weight	g/m ²	~
Tensile Strength	kg/25mm	9↑	Tensile Strength	kg/25mm	~
Elongation	%	70↑	Elongation	%	~
Color		Transparent	Color		Transparent
Smoothness		Excellent	Smoothness		Good
Printability		Good			
Physical Properties					
Adhesive Base		Acrylic Adhesive	Release Force	g/25mm	3~15
Coating Thickness	mm	0.015±0.002	Weathering Resistance		Good
Dry Coating Weight	g/m ²	17±3	Temperature Range	℃	-5~125
Initial Tack	#7/cm	1~20	Solvent Resistance		Excellent
180° Peel Adhesion	kg/25mm	0.6~1.5			
Remark:1.Test condition : 23℃±2℃, 65%±5% R.H. 2.Storage condition:23℃,65% R.H. Shelf Life:one year; 3.Above information is for reference only and should not be as inspection standard.					



Valid Period of the Document:2 Years

Form Number: R-04-031-01