





Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6945																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13890.00</td><td>43.92</td><td>68.20</td><td>-24.28</td><td>37.58</td><td>6.34</td><td>Average</td><td>100</td><td>85</td></tr><tr><td>2</td><td>13890.00</td><td>57.36</td><td>88.20</td><td>-30.84</td><td>51.02</td><td>6.34</td><td>Peak</td><td>100</td><td>85</td></tr><tr><td>3</td><td>20835.00</td><td>41.25</td><td>54.00</td><td>-12.75</td><td>37.74</td><td>3.51</td><td>Average</td><td>100</td><td>74</td></tr><tr><td>4</td><td>20835.00</td><td>54.59</td><td>74.00</td><td>-19.41</td><td>51.08</td><td>3.51</td><td>Peak</td><td>100</td><td>74</td></tr><tr><td>5</td><td>27780.00</td><td>43.58</td><td>68.20</td><td>-24.62</td><td>34.89</td><td>8.69</td><td>Average</td><td>100</td><td>43</td></tr><tr><td>6</td><td>27780.00</td><td>55.71</td><td>88.20</td><td>-32.49</td><td>47.02</td><td>8.69</td><td>Peak</td><td>100</td><td>43</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13890.00	43.92	68.20	-24.28	37.58	6.34	Average	100	85	2	13890.00	57.36	88.20	-30.84	51.02	6.34	Peak	100	85	3	20835.00	41.25	54.00	-12.75	37.74	3.51	Average	100	74	4	20835.00	54.59	74.00	-19.41	51.08	3.51	Peak	100	74	5	27780.00	43.58	68.20	-24.62	34.89	8.69	Average	100	43	6	27780.00	55.71	88.20	-32.49	47.02	8.69	Peak	100	43
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13890.00	43.92	68.20	-24.28	37.58	6.34	Average	100	85																																																																
2	13890.00	57.36	88.20	-30.84	51.02	6.34	Peak	100	85																																																																
3	20835.00	41.25	54.00	-12.75	37.74	3.51	Average	100	74																																																																
4	20835.00	54.59	74.00	-19.41	51.08	3.51	Peak	100	74																																																																
5	27780.00	43.58	68.20	-24.62	34.89	8.69	Average	100	43																																																																
6	27780.00	55.71	88.20	-32.49	47.02	8.69	Peak	100	43																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									




Modulation	be EHT80-OFDMA	Test Freq. (MHz)	7025																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>7125.00</td><td>48.12</td><td>68.20</td><td>-20.08</td><td>43.26</td><td>4.86</td><td>Average</td><td>168</td><td>271</td></tr><tr><td>2</td><td>7125.00</td><td>59.32</td><td>88.20</td><td>-28.88</td><td>54.46</td><td>4.86</td><td>Peak</td><td>168</td><td>271</td></tr><tr><td>3</td><td>14050.00</td><td>43.96</td><td>68.20</td><td>-24.24</td><td>37.22</td><td>6.74</td><td>Average</td><td>100</td><td>164</td></tr><tr><td>4</td><td>14050.00</td><td>57.34</td><td>88.20</td><td>-30.86</td><td>50.60</td><td>6.74</td><td>Peak</td><td>100</td><td>164</td></tr><tr><td>5</td><td>21075.00</td><td>41.37</td><td>54.00</td><td>-12.63</td><td>37.43</td><td>3.94</td><td>Average</td><td>100</td><td>143</td></tr><tr><td>6</td><td>21075.00</td><td>54.52</td><td>74.00</td><td>-19.48</td><td>50.58</td><td>3.94</td><td>Peak</td><td>100</td><td>143</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7125.00	48.12	68.20	-20.08	43.26	4.86	Average	168	271	2	7125.00	59.32	88.20	-28.88	54.46	4.86	Peak	168	271	3	14050.00	43.96	68.20	-24.24	37.22	6.74	Average	100	164	4	14050.00	57.34	88.20	-30.86	50.60	6.74	Peak	100	164	5	21075.00	41.37	54.00	-12.63	37.43	3.94	Average	100	143	6	21075.00	54.52	74.00	-19.48	50.58	3.94	Peak	100	143
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	7125.00	48.12	68.20	-20.08	43.26	4.86	Average	168	271																																																																
2	7125.00	59.32	88.20	-28.88	54.46	4.86	Peak	168	271																																																																
3	14050.00	43.96	68.20	-24.24	37.22	6.74	Average	100	164																																																																
4	14050.00	57.34	88.20	-30.86	50.60	6.74	Peak	100	164																																																																
5	21075.00	41.37	54.00	-12.63	37.43	3.94	Average	100	143																																																																
6	21075.00	54.52	74.00	-19.48	50.58	3.94	Peak	100	143																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

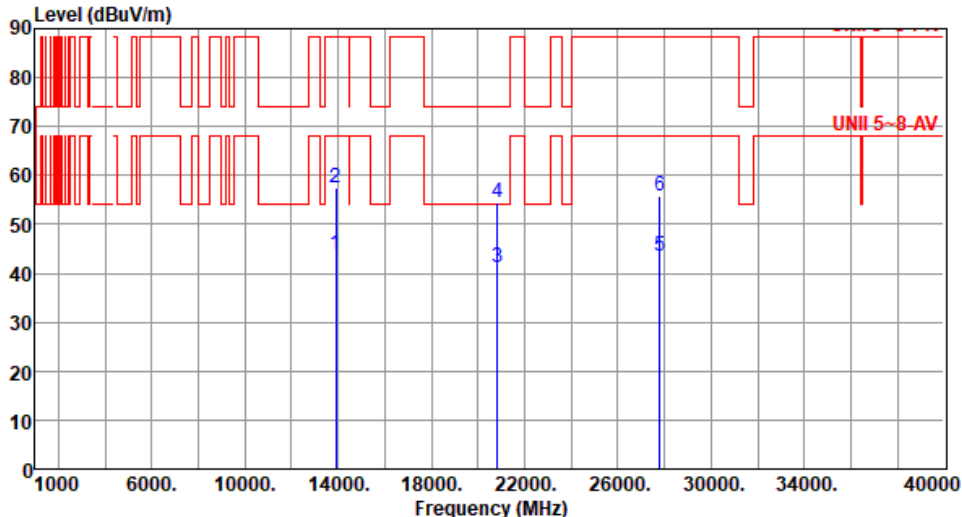


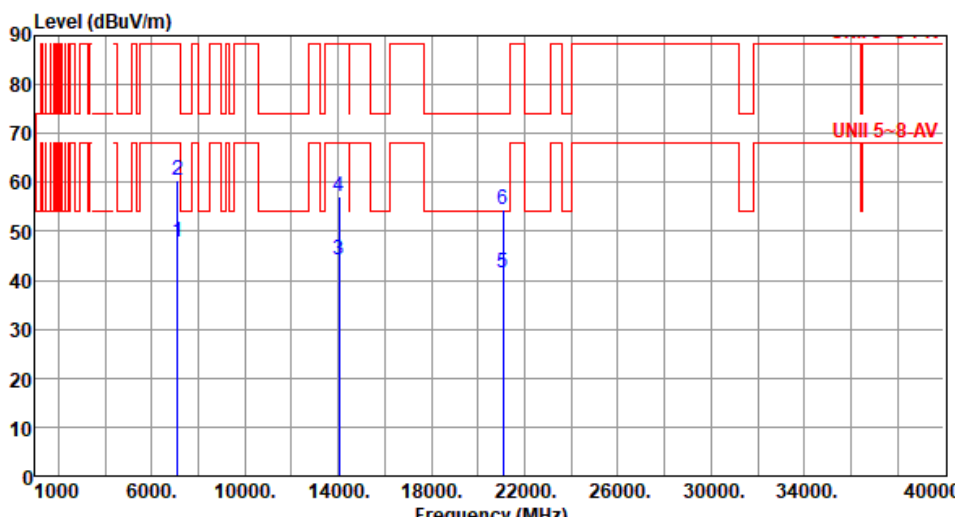Modulation	be EHT80-OFDMA	Test Freq. (MHz)	7025																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>7125.00</td><td>47.80</td><td>68.20</td><td>-20.40</td><td>42.94</td><td>4.86</td><td>Average</td><td>365</td><td>344</td></tr><tr><td>2</td><td>7125.00</td><td>60.56</td><td>88.20</td><td>-27.64</td><td>55.70</td><td>4.86</td><td>Peak</td><td>365</td><td>344</td></tr><tr><td>3</td><td>14050.00</td><td>44.07</td><td>68.20</td><td>-24.13</td><td>37.33</td><td>6.74</td><td>Average</td><td>100</td><td>211</td></tr><tr><td>4</td><td>14050.00</td><td>57.26</td><td>88.20</td><td>-30.94</td><td>50.52</td><td>6.74</td><td>Peak</td><td>100</td><td>211</td></tr><tr><td>5</td><td>21075.00</td><td>41.49</td><td>54.00</td><td>-12.51</td><td>37.55</td><td>3.94</td><td>Average</td><td>100</td><td>225</td></tr><tr><td>6</td><td>21075.00</td><td>54.56</td><td>74.00</td><td>-19.44</td><td>50.62</td><td>3.94</td><td>Peak</td><td>100</td><td>225</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7125.00	47.80	68.20	-20.40	42.94	4.86	Average	365	344	2	7125.00	60.56	88.20	-27.64	55.70	4.86	Peak	365	344	3	14050.00	44.07	68.20	-24.13	37.33	6.74	Average	100	211	4	14050.00	57.26	88.20	-30.94	50.52	6.74	Peak	100	211	5	21075.00	41.49	54.00	-12.51	37.55	3.94	Average	100	225	6	21075.00	54.56	74.00	-19.44	50.62	3.94	Peak	100	225
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	7125.00	47.80	68.20	-20.40	42.94	4.86	Average	365	344																																																																
2	7125.00	60.56	88.20	-27.64	55.70	4.86	Peak	365	344																																																																
3	14050.00	44.07	68.20	-24.13	37.33	6.74	Average	100	211																																																																
4	14050.00	57.26	88.20	-30.94	50.52	6.74	Peak	100	211																																																																
5	21075.00	41.49	54.00	-12.51	37.55	3.94	Average	100	225																																																																
6	21075.00	54.56	74.00	-19.44	50.62	3.94	Peak	100	225																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

Unwanted Emissions (Above 1GHz) for be EHT160-OFDMA

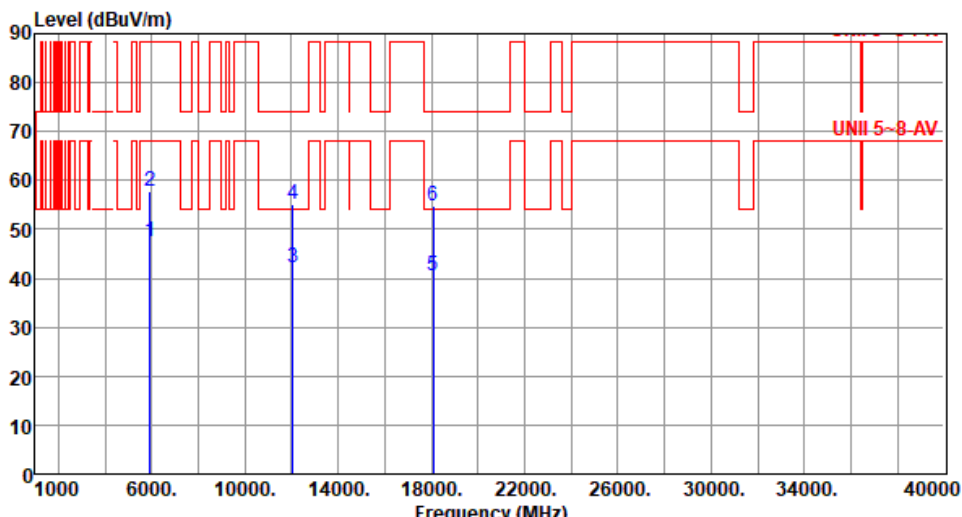Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6025																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBUV/m)  <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5925.00</td><td>47.46</td><td>68.20</td><td>-20.74</td><td>46.33</td><td>1.13</td><td>Average</td><td>352</td><td>287</td></tr><tr><td>2</td><td>5925.00</td><td>57.68</td><td>88.20</td><td>-30.52</td><td>56.55</td><td>1.13</td><td>Peak</td><td>352</td><td>287</td></tr><tr><td>3</td><td>12050.00</td><td>42.14</td><td>54.00</td><td>-11.86</td><td>35.89</td><td>6.25</td><td>Average</td><td>100</td><td>71</td></tr><tr><td>4</td><td>12050.00</td><td>55.28</td><td>74.00</td><td>-18.72</td><td>49.03</td><td>6.25</td><td>Peak</td><td>100</td><td>71</td></tr><tr><td>5</td><td>18075.00</td><td>40.49</td><td>54.00</td><td>-13.51</td><td>38.92</td><td>1.57</td><td>Average</td><td>100</td><td>67</td></tr><tr><td>6</td><td>18075.00</td><td>54.82</td><td>74.00</td><td>-19.18</td><td>53.25</td><td>1.57</td><td>Peak</td><td>100</td><td>67</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5925.00	47.46	68.20	-20.74	46.33	1.13	Average	352	287	2	5925.00	57.68	88.20	-30.52	56.55	1.13	Peak	352	287	3	12050.00	42.14	54.00	-11.86	35.89	6.25	Average	100	71	4	12050.00	55.28	74.00	-18.72	49.03	6.25	Peak	100	71	5	18075.00	40.49	54.00	-13.51	38.92	1.57	Average	100	67	6	18075.00	54.82	74.00	-19.18	53.25	1.57	Peak	100	67
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	5925.00	47.46	68.20	-20.74	46.33	1.13	Average	352	287																																																																
2	5925.00	57.68	88.20	-30.52	56.55	1.13	Peak	352	287																																																																
3	12050.00	42.14	54.00	-11.86	35.89	6.25	Average	100	71																																																																
4	12050.00	55.28	74.00	-18.72	49.03	6.25	Peak	100	71																																																																
5	18075.00	40.49	54.00	-13.51	38.92	1.57	Average	100	67																																																																
6	18075.00	54.82	74.00	-19.18	53.25	1.57	Peak	100	67																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

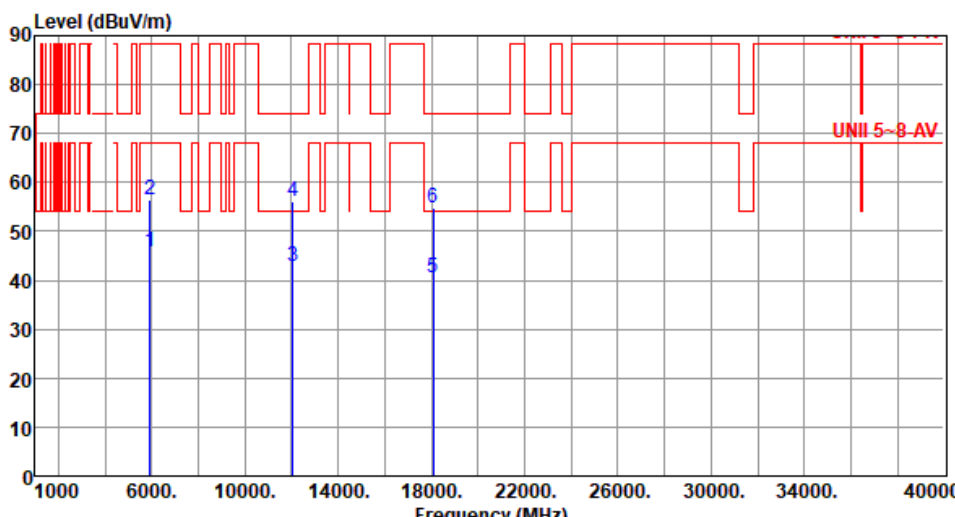


Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6025																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5925.00</td><td>45.75</td><td>68.20</td><td>-22.45</td><td>44.62</td><td>1.13</td><td>Average</td><td>373</td><td>334</td></tr><tr><td>2</td><td>5925.00</td><td>56.41</td><td>88.20</td><td>-31.79</td><td>55.28</td><td>1.13</td><td>Peak</td><td>373</td><td>334</td></tr><tr><td>3</td><td>12050.00</td><td>42.73</td><td>54.00</td><td>-11.27</td><td>36.48</td><td>6.25</td><td>Average</td><td>100</td><td>234</td></tr><tr><td>4</td><td>12050.00</td><td>55.98</td><td>74.00</td><td>-18.02</td><td>49.73</td><td>6.25</td><td>Peak</td><td>100</td><td>234</td></tr><tr><td>5</td><td>18075.00</td><td>40.55</td><td>54.00</td><td>-13.45</td><td>38.98</td><td>1.57</td><td>Average</td><td>100</td><td>51</td></tr><tr><td>6</td><td>18075.00</td><td>54.95</td><td>74.00</td><td>-19.05</td><td>53.38</td><td>1.57</td><td>Peak</td><td>100</td><td>51</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5925.00	45.75	68.20	-22.45	44.62	1.13	Average	373	334	2	5925.00	56.41	88.20	-31.79	55.28	1.13	Peak	373	334	3	12050.00	42.73	54.00	-11.27	36.48	6.25	Average	100	234	4	12050.00	55.98	74.00	-18.02	49.73	6.25	Peak	100	234	5	18075.00	40.55	54.00	-13.45	38.98	1.57	Average	100	51	6	18075.00	54.95	74.00	-19.05	53.38	1.57	Peak	100	51
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	5925.00	45.75	68.20	-22.45	44.62	1.13	Average	373	334																																																																
2	5925.00	56.41	88.20	-31.79	55.28	1.13	Peak	373	334																																																																
3	12050.00	42.73	54.00	-11.27	36.48	6.25	Average	100	234																																																																
4	12050.00	55.98	74.00	-18.02	49.73	6.25	Peak	100	234																																																																
5	18075.00	40.55	54.00	-13.45	38.98	1.57	Average	100	51																																																																
6	18075.00	54.95	74.00	-19.05	53.38	1.57	Peak	100	51																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									




Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6185																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBuV/m) UNII 5-8-AV Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>12370.00</td><td>42.31</td><td>54.00</td><td>-11.69</td><td>36.61</td><td>5.70</td><td>Average</td><td>100</td><td>188</td></tr><tr><td>2</td><td>12370.00</td><td>55.53</td><td>74.00</td><td>-18.47</td><td>49.83</td><td>5.70</td><td>Peak</td><td>100</td><td>188</td></tr><tr><td>3</td><td>18555.00</td><td>40.69</td><td>54.00</td><td>-13.31</td><td>38.89</td><td>1.80</td><td>Average</td><td>100</td><td>84</td></tr><tr><td>4</td><td>18555.00</td><td>54.82</td><td>74.00</td><td>-19.18</td><td>53.02</td><td>1.80</td><td>Peak</td><td>100</td><td>84</td></tr><tr><td>5</td><td>24740.00</td><td>43.36</td><td>68.20</td><td>-24.84</td><td>35.03</td><td>8.33</td><td>Average</td><td>100</td><td>261</td></tr><tr><td>6</td><td>24740.00</td><td>56.76</td><td>88.20</td><td>-31.44</td><td>48.43</td><td>8.33</td><td>Peak</td><td>100</td><td>261</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12370.00	42.31	54.00	-11.69	36.61	5.70	Average	100	188	2	12370.00	55.53	74.00	-18.47	49.83	5.70	Peak	100	188	3	18555.00	40.69	54.00	-13.31	38.89	1.80	Average	100	84	4	18555.00	54.82	74.00	-19.18	53.02	1.80	Peak	100	84	5	24740.00	43.36	68.20	-24.84	35.03	8.33	Average	100	261	6	24740.00	56.76	88.20	-31.44	48.43	8.33	Peak	100	261
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12370.00	42.31	54.00	-11.69	36.61	5.70	Average	100	188																																																																
2	12370.00	55.53	74.00	-18.47	49.83	5.70	Peak	100	188																																																																
3	18555.00	40.69	54.00	-13.31	38.89	1.80	Average	100	84																																																																
4	18555.00	54.82	74.00	-19.18	53.02	1.80	Peak	100	84																																																																
5	24740.00	43.36	68.20	-24.84	35.03	8.33	Average	100	261																																																																
6	24740.00	56.76	88.20	-31.44	48.43	8.33	Peak	100	261																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

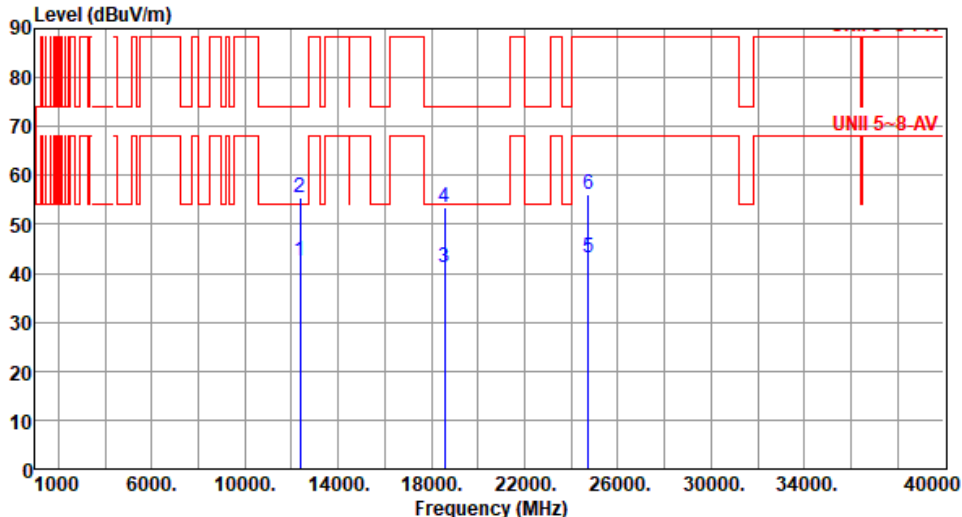

Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6185																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>12370.00</td><td>42.38</td><td>54.00</td><td>-11.62</td><td>36.68</td><td>5.70</td><td>Average</td><td>100</td><td>143</td></tr><tr><td>2</td><td>12370.00</td><td>55.42</td><td>74.00</td><td>-18.58</td><td>49.72</td><td>5.70</td><td>Peak</td><td>100</td><td>143</td></tr><tr><td>3</td><td>18555.00</td><td>41.17</td><td>54.00</td><td>-12.83</td><td>39.37</td><td>1.80</td><td>Average</td><td>100</td><td>304</td></tr><tr><td>4</td><td>18555.00</td><td>53.47</td><td>74.00</td><td>-20.53</td><td>51.67</td><td>1.80</td><td>Peak</td><td>100</td><td>304</td></tr><tr><td>5</td><td>24740.00</td><td>43.15</td><td>68.20</td><td>-25.05</td><td>34.82</td><td>8.33</td><td>Average</td><td>100</td><td>332</td></tr><tr><td>6</td><td>24740.00</td><td>56.27</td><td>88.20</td><td>-31.93</td><td>47.94</td><td>8.33</td><td>Peak</td><td>100</td><td>332</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12370.00	42.38	54.00	-11.62	36.68	5.70	Average	100	143	2	12370.00	55.42	74.00	-18.58	49.72	5.70	Peak	100	143	3	18555.00	41.17	54.00	-12.83	39.37	1.80	Average	100	304	4	18555.00	53.47	74.00	-20.53	51.67	1.80	Peak	100	304	5	24740.00	43.15	68.20	-25.05	34.82	8.33	Average	100	332	6	24740.00	56.27	88.20	-31.93	47.94	8.33	Peak	100	332
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12370.00	42.38	54.00	-11.62	36.68	5.70	Average	100	143																																																																
2	12370.00	55.42	74.00	-18.58	49.72	5.70	Peak	100	143																																																																
3	18555.00	41.17	54.00	-12.83	39.37	1.80	Average	100	304																																																																
4	18555.00	53.47	74.00	-20.53	51.67	1.80	Peak	100	304																																																																
5	24740.00	43.15	68.20	-25.05	34.82	8.33	Average	100	332																																																																
6	24740.00	56.27	88.20	-31.93	47.94	8.33	Peak	100	332																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

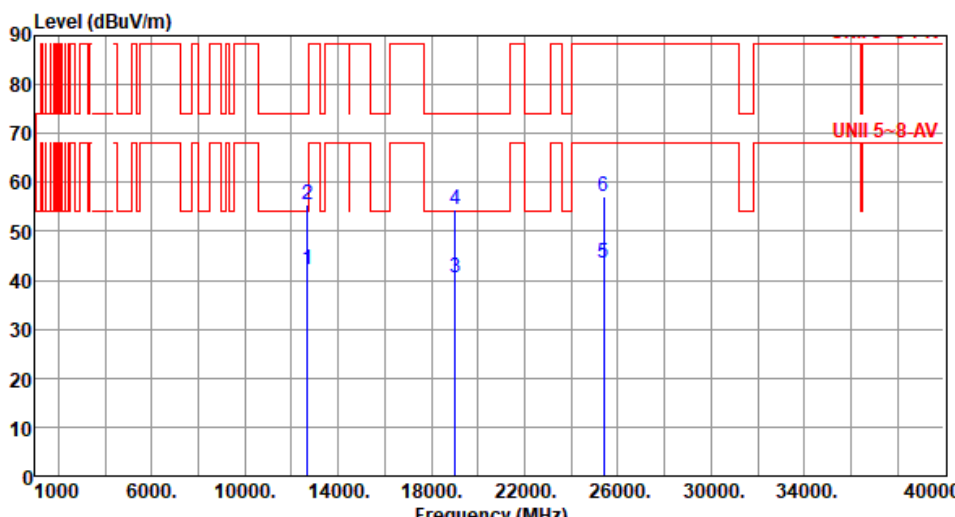

Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6345																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>12690.00</td><td>42.29</td><td>54.00</td><td>-11.71</td><td>36.50</td><td>5.79</td><td>Average</td><td>100</td><td>72</td></tr><tr><td>2</td><td>12690.00</td><td>55.61</td><td>74.00</td><td>-18.39</td><td>49.82</td><td>5.79</td><td>Peak</td><td>100</td><td>72</td></tr><tr><td>3</td><td>19035.00</td><td>40.51</td><td>54.00</td><td>-13.49</td><td>38.58</td><td>1.93</td><td>Average</td><td>100</td><td>69</td></tr><tr><td>4</td><td>19035.00</td><td>54.48</td><td>74.00</td><td>-19.52</td><td>52.55</td><td>1.93</td><td>Peak</td><td>100</td><td>69</td></tr><tr><td>5</td><td>25380.00</td><td>43.64</td><td>68.20</td><td>-24.56</td><td>35.45</td><td>8.19</td><td>Average</td><td>100</td><td>116</td></tr><tr><td>6</td><td>25380.00</td><td>57.05</td><td>88.20</td><td>-31.15</td><td>48.86</td><td>8.19</td><td>Peak</td><td>100</td><td>116</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12690.00	42.29	54.00	-11.71	36.50	5.79	Average	100	72	2	12690.00	55.61	74.00	-18.39	49.82	5.79	Peak	100	72	3	19035.00	40.51	54.00	-13.49	38.58	1.93	Average	100	69	4	19035.00	54.48	74.00	-19.52	52.55	1.93	Peak	100	69	5	25380.00	43.64	68.20	-24.56	35.45	8.19	Average	100	116	6	25380.00	57.05	88.20	-31.15	48.86	8.19	Peak	100	116
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12690.00	42.29	54.00	-11.71	36.50	5.79	Average	100	72																																																																
2	12690.00	55.61	74.00	-18.39	49.82	5.79	Peak	100	72																																																																
3	19035.00	40.51	54.00	-13.49	38.58	1.93	Average	100	69																																																																
4	19035.00	54.48	74.00	-19.52	52.55	1.93	Peak	100	69																																																																
5	25380.00	43.64	68.20	-24.56	35.45	8.19	Average	100	116																																																																
6	25380.00	57.05	88.20	-31.15	48.86	8.19	Peak	100	116																																																																




Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6345																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBUV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>12690.00</td><td>42.66</td><td>54.00</td><td>-11.34</td><td>36.87</td><td>5.79</td><td>Average</td><td>100</td><td>103</td></tr><tr><td>2</td><td>12690.00</td><td>55.86</td><td>74.00</td><td>-18.14</td><td>50.07</td><td>5.79</td><td>Peak</td><td>100</td><td>103</td></tr><tr><td>3</td><td>19035.00</td><td>40.67</td><td>54.00</td><td>-13.33</td><td>38.74</td><td>1.93</td><td>Average</td><td>100</td><td>87</td></tr><tr><td>4</td><td>19035.00</td><td>54.61</td><td>74.00</td><td>-19.39</td><td>52.68</td><td>1.93</td><td>Peak</td><td>100</td><td>87</td></tr><tr><td>5</td><td>25380.00</td><td>43.78</td><td>68.20</td><td>-24.42</td><td>35.59</td><td>8.19</td><td>Average</td><td>100</td><td>126</td></tr><tr><td>6</td><td>25380.00</td><td>57.18</td><td>88.20</td><td>-31.02</td><td>48.99</td><td>8.19</td><td>Peak</td><td>100</td><td>126</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12690.00	42.66	54.00	-11.34	36.87	5.79	Average	100	103	2	12690.00	55.86	74.00	-18.14	50.07	5.79	Peak	100	103	3	19035.00	40.67	54.00	-13.33	38.74	1.93	Average	100	87	4	19035.00	54.61	74.00	-19.39	52.68	1.93	Peak	100	87	5	25380.00	43.78	68.20	-24.42	35.59	8.19	Average	100	126	6	25380.00	57.18	88.20	-31.02	48.99	8.19	Peak	100	126
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12690.00	42.66	54.00	-11.34	36.87	5.79	Average	100	103																																																																
2	12690.00	55.86	74.00	-18.14	50.07	5.79	Peak	100	103																																																																
3	19035.00	40.67	54.00	-13.33	38.74	1.93	Average	100	87																																																																
4	19035.00	54.61	74.00	-19.39	52.68	1.93	Peak	100	87																																																																
5	25380.00	43.78	68.20	-24.42	35.59	8.19	Average	100	126																																																																
6	25380.00	57.18	88.20	-31.02	48.99	8.19	Peak	100	126																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									



Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6505																																																																																										
Polarization	Horizontal																																																																																												
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																																													
Level (dBUV/m) Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>13010.00</td><td>42.26</td><td>68.20</td><td>-25.94</td><td>36.15</td><td>6.11</td><td>Average</td><td>100</td><td>204</td></tr><tr><td>2</td><td>13010.00</td><td>55.73</td><td>88.20</td><td>-32.47</td><td>49.62</td><td>6.11</td><td>Peak</td><td>100</td><td>204</td></tr><tr><td>3</td><td>19515.00</td><td>40.98</td><td>54.00</td><td>-13.02</td><td>39.18</td><td>1.80</td><td>Average</td><td>100</td><td>17</td></tr><tr><td>4</td><td>19515.00</td><td>55.14</td><td>74.00</td><td>-18.86</td><td>53.34</td><td>1.80</td><td>Peak</td><td>100</td><td>17</td></tr><tr><td>5</td><td>26020.00</td><td>43.26</td><td>68.20</td><td>-24.94</td><td>35.19</td><td>8.07</td><td>Average</td><td>100</td><td>106</td></tr><tr><td>6</td><td>26020.00</td><td>56.87</td><td>88.20</td><td>-31.33</td><td>48.80</td><td>8.07</td><td>Peak</td><td>100</td><td>106</td></tr></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	13010.00	42.26	68.20	-25.94	36.15	6.11	Average	100	204	2	13010.00	55.73	88.20	-32.47	49.62	6.11	Peak	100	204	3	19515.00	40.98	54.00	-13.02	39.18	1.80	Average	100	17	4	19515.00	55.14	74.00	-18.86	53.34	1.80	Peak	100	17	5	26020.00	43.26	68.20	-24.94	35.19	8.07	Average	100	106	6	26020.00	56.87	88.20	-31.33	48.80	8.07	Peak	100	106
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																				
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																				
		dBuV/m			dBuV			cm	deg																																																																																				
1	13010.00	42.26	68.20	-25.94	36.15	6.11	Average	100	204																																																																																				
2	13010.00	55.73	88.20	-32.47	49.62	6.11	Peak	100	204																																																																																				
3	19515.00	40.98	54.00	-13.02	39.18	1.80	Average	100	17																																																																																				
4	19515.00	55.14	74.00	-18.86	53.34	1.80	Peak	100	17																																																																																				
5	26020.00	43.26	68.20	-24.94	35.19	8.07	Average	100	106																																																																																				
6	26020.00	56.87	88.20	-31.33	48.80	8.07	Peak	100	106																																																																																				

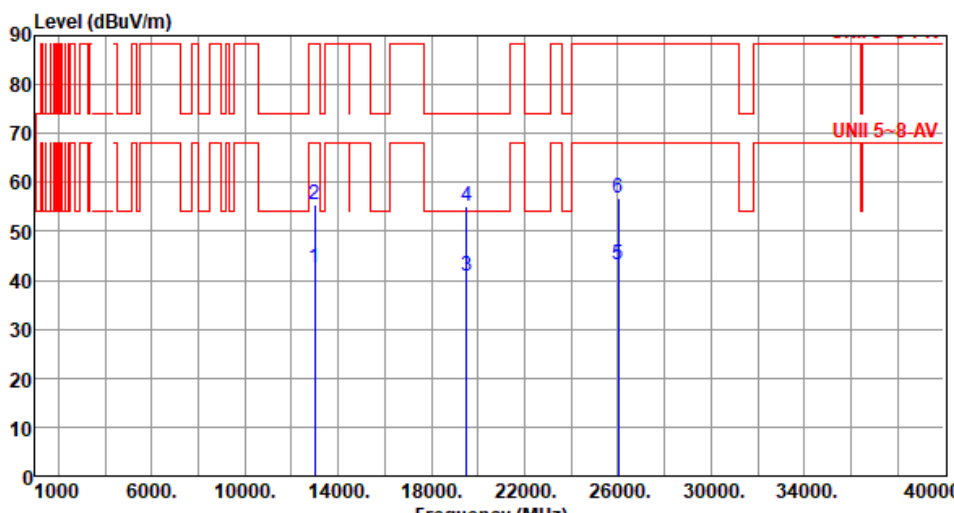

Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6505						
Polarization	Vertical								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64									
Level (dBUV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13010.00	42.55	68.20	-25.65	36.44	6.11	Average	100	72
2	13010.00	55.39	88.20	-32.81	49.28	6.11	Peak	100	72
3	19515.00	40.98	54.00	-13.02	39.18	1.80	Average	100	11
4	19515.00	55.03	74.00	-18.97	53.23	1.80	Peak	100	11
5	26020.00	43.27	68.20	-24.93	35.20	8.07	Average	100	56
6	26020.00	56.94	88.20	-31.26	48.87	8.07	Peak	100	56

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).




Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6665																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13330.00</td><td>42.07</td><td>54.00</td><td>-11.93</td><td>36.43</td><td>5.64</td><td>Average</td><td>100</td><td>38</td></tr><tr><td>2</td><td>13330.00</td><td>55.93</td><td>74.00</td><td>-18.07</td><td>50.29</td><td>5.64</td><td>Peak</td><td>100</td><td>38</td></tr><tr><td>3</td><td>19995.00</td><td>40.93</td><td>54.00</td><td>-13.07</td><td>38.43</td><td>2.50</td><td>Average</td><td>100</td><td>105</td></tr><tr><td>4</td><td>19995.00</td><td>54.57</td><td>74.00</td><td>-19.43</td><td>52.07</td><td>2.50</td><td>Peak</td><td>100</td><td>105</td></tr><tr><td>5</td><td>26660.00</td><td>43.28</td><td>68.20</td><td>-24.92</td><td>34.49</td><td>8.79</td><td>Average</td><td>100</td><td>197</td></tr><tr><td>6</td><td>26660.00</td><td>56.29</td><td>88.20</td><td>-31.91</td><td>47.50</td><td>8.79</td><td>Peak</td><td>100</td><td>197</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13330.00	42.07	54.00	-11.93	36.43	5.64	Average	100	38	2	13330.00	55.93	74.00	-18.07	50.29	5.64	Peak	100	38	3	19995.00	40.93	54.00	-13.07	38.43	2.50	Average	100	105	4	19995.00	54.57	74.00	-19.43	52.07	2.50	Peak	100	105	5	26660.00	43.28	68.20	-24.92	34.49	8.79	Average	100	197	6	26660.00	56.29	88.20	-31.91	47.50	8.79	Peak	100	197
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13330.00	42.07	54.00	-11.93	36.43	5.64	Average	100	38																																																																
2	13330.00	55.93	74.00	-18.07	50.29	5.64	Peak	100	38																																																																
3	19995.00	40.93	54.00	-13.07	38.43	2.50	Average	100	105																																																																
4	19995.00	54.57	74.00	-19.43	52.07	2.50	Peak	100	105																																																																
5	26660.00	43.28	68.20	-24.92	34.49	8.79	Average	100	197																																																																
6	26660.00	56.29	88.20	-31.91	47.50	8.79	Peak	100	197																																																																



Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6665																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBUV/m) UNII 5-8-AV Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13330.00</td><td>41.89</td><td>54.00</td><td>-12.11</td><td>36.25</td><td>5.64</td><td>Average</td><td>100</td><td>278</td></tr><tr><td>2</td><td>13330.00</td><td>56.21</td><td>74.00</td><td>-17.79</td><td>50.57</td><td>5.64</td><td>Peak</td><td>100</td><td>278</td></tr><tr><td>3</td><td>19995.00</td><td>41.12</td><td>54.00</td><td>-12.88</td><td>38.62</td><td>2.50</td><td>Average</td><td>100</td><td>76</td></tr><tr><td>4</td><td>19995.00</td><td>54.68</td><td>74.00</td><td>-19.32</td><td>52.18</td><td>2.50</td><td>Peak</td><td>100</td><td>76</td></tr><tr><td>5</td><td>26660.00</td><td>43.35</td><td>68.20</td><td>-24.85</td><td>34.56</td><td>8.79</td><td>Average</td><td>100</td><td>118</td></tr><tr><td>6</td><td>26660.00</td><td>56.37</td><td>88.20</td><td>-31.83</td><td>47.58</td><td>8.79</td><td>Peak</td><td>100</td><td>118</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13330.00	41.89	54.00	-12.11	36.25	5.64	Average	100	278	2	13330.00	56.21	74.00	-17.79	50.57	5.64	Peak	100	278	3	19995.00	41.12	54.00	-12.88	38.62	2.50	Average	100	76	4	19995.00	54.68	74.00	-19.32	52.18	2.50	Peak	100	76	5	26660.00	43.35	68.20	-24.85	34.56	8.79	Average	100	118	6	26660.00	56.37	88.20	-31.83	47.58	8.79	Peak	100	118
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13330.00	41.89	54.00	-12.11	36.25	5.64	Average	100	278																																																																
2	13330.00	56.21	74.00	-17.79	50.57	5.64	Peak	100	278																																																																
3	19995.00	41.12	54.00	-12.88	38.62	2.50	Average	100	76																																																																
4	19995.00	54.68	74.00	-19.32	52.18	2.50	Peak	100	76																																																																
5	26660.00	43.35	68.20	-24.85	34.56	8.79	Average	100	118																																																																
6	26660.00	56.37	88.20	-31.83	47.58	8.79	Peak	100	118																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

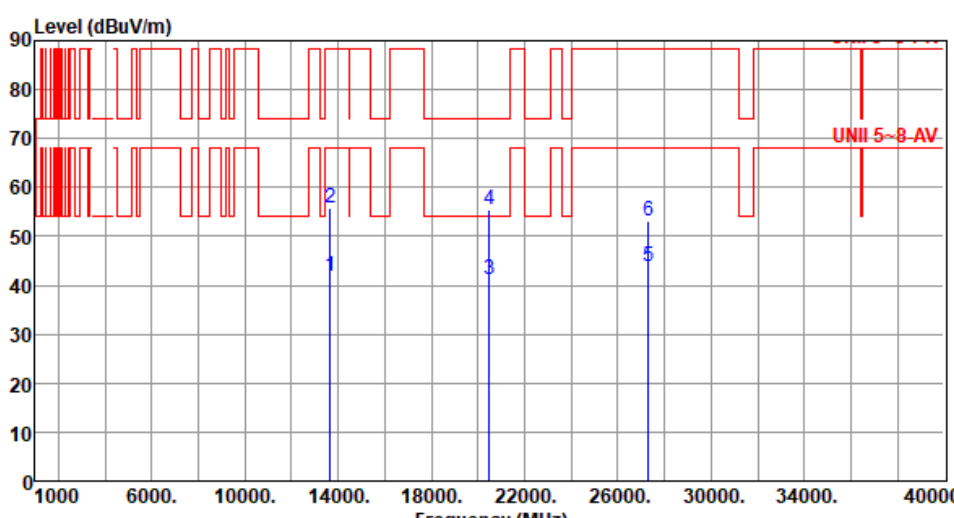

Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6825																																																												
Polarization	Horizontal																																																														
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																															
Level (dBuV/m)  Freq. Emission Limit Margin SA Factor Remark ANT Turn MHz level dBuV/m dBuV/m dB reading dBuV dB/m cm Table deg <table><tr><td>1</td><td>13650.00</td><td>41.92</td><td>68.20</td><td>-26.28</td><td>36.06</td><td>5.86</td><td>Average</td><td>100</td><td>14</td></tr><tr><td>2</td><td>13650.00</td><td>55.86</td><td>88.20</td><td>-32.34</td><td>50.00</td><td>5.86</td><td>Peak</td><td>100</td><td>14</td></tr><tr><td>3</td><td>20475.00</td><td>41.11</td><td>54.00</td><td>-12.89</td><td>38.06</td><td>3.05</td><td>Average</td><td>100</td><td>142</td></tr><tr><td>4</td><td>20475.00</td><td>55.48</td><td>74.00</td><td>-18.52</td><td>52.43</td><td>3.05</td><td>Peak</td><td>100</td><td>142</td></tr><tr><td>5</td><td>27300.00</td><td>43.75</td><td>68.20</td><td>-24.45</td><td>35.29</td><td>8.46</td><td>Average</td><td>100</td><td>124</td></tr><tr><td>6</td><td>27300.00</td><td>53.23</td><td>88.20</td><td>-34.97</td><td>44.77</td><td>8.46</td><td>Peak</td><td>100</td><td>124</td></tr></table>				1	13650.00	41.92	68.20	-26.28	36.06	5.86	Average	100	14	2	13650.00	55.86	88.20	-32.34	50.00	5.86	Peak	100	14	3	20475.00	41.11	54.00	-12.89	38.06	3.05	Average	100	142	4	20475.00	55.48	74.00	-18.52	52.43	3.05	Peak	100	142	5	27300.00	43.75	68.20	-24.45	35.29	8.46	Average	100	124	6	27300.00	53.23	88.20	-34.97	44.77	8.46	Peak	100	124
1	13650.00	41.92	68.20	-26.28	36.06	5.86	Average	100	14																																																						
2	13650.00	55.86	88.20	-32.34	50.00	5.86	Peak	100	14																																																						
3	20475.00	41.11	54.00	-12.89	38.06	3.05	Average	100	142																																																						
4	20475.00	55.48	74.00	-18.52	52.43	3.05	Peak	100	142																																																						
5	27300.00	43.75	68.20	-24.45	35.29	8.46	Average	100	124																																																						
6	27300.00	53.23	88.20	-34.97	44.77	8.46	Peak	100	124																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																															




Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6825																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBuV/m) UNII 5-8-AV Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13650.00</td><td>41.79</td><td>68.20</td><td>-26.41</td><td>35.93</td><td>5.86</td><td>Average</td><td>100</td><td>152</td></tr><tr><td>2</td><td>13650.00</td><td>55.37</td><td>88.20</td><td>-32.83</td><td>49.51</td><td>5.86</td><td>Peak</td><td>100</td><td>152</td></tr><tr><td>3</td><td>20475.00</td><td>41.23</td><td>54.00</td><td>-12.77</td><td>38.18</td><td>3.05</td><td>Average</td><td>100</td><td>105</td></tr><tr><td>4</td><td>20475.00</td><td>55.59</td><td>74.00</td><td>-18.41</td><td>52.54</td><td>3.05</td><td>Peak</td><td>100</td><td>105</td></tr><tr><td>5</td><td>27300.00</td><td>43.86</td><td>68.20</td><td>-24.34</td><td>35.40</td><td>8.46</td><td>Average</td><td>100</td><td>137</td></tr><tr><td>6</td><td>27300.00</td><td>53.49</td><td>88.20</td><td>-34.71</td><td>45.03</td><td>8.46</td><td>Peak</td><td>100</td><td>137</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13650.00	41.79	68.20	-26.41	35.93	5.86	Average	100	152	2	13650.00	55.37	88.20	-32.83	49.51	5.86	Peak	100	152	3	20475.00	41.23	54.00	-12.77	38.18	3.05	Average	100	105	4	20475.00	55.59	74.00	-18.41	52.54	3.05	Peak	100	105	5	27300.00	43.86	68.20	-24.34	35.40	8.46	Average	100	137	6	27300.00	53.49	88.20	-34.71	45.03	8.46	Peak	100	137
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13650.00	41.79	68.20	-26.41	35.93	5.86	Average	100	152																																																																
2	13650.00	55.37	88.20	-32.83	49.51	5.86	Peak	100	152																																																																
3	20475.00	41.23	54.00	-12.77	38.18	3.05	Average	100	105																																																																
4	20475.00	55.59	74.00	-18.41	52.54	3.05	Peak	100	105																																																																
5	27300.00	43.86	68.20	-24.34	35.40	8.46	Average	100	137																																																																
6	27300.00	53.49	88.20	-34.71	45.03	8.46	Peak	100	137																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									




Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6985																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>7125.00</td><td>48.60</td><td>68.20</td><td>-19.60</td><td>43.74</td><td>4.86</td><td>Average</td><td>177</td><td>263</td></tr><tr><td>2</td><td>7125.00</td><td>59.17</td><td>88.20</td><td>-29.03</td><td>54.31</td><td>4.86</td><td>Peak</td><td>177</td><td>263</td></tr><tr><td>3</td><td>13970.00</td><td>44.15</td><td>68.20</td><td>-24.05</td><td>37.49</td><td>6.66</td><td>Average</td><td>100</td><td>65</td></tr><tr><td>4</td><td>13970.00</td><td>57.17</td><td>88.20</td><td>-31.03</td><td>50.51</td><td>6.66</td><td>Peak</td><td>100</td><td>65</td></tr><tr><td>5</td><td>20955.00</td><td>41.18</td><td>54.00</td><td>-12.82</td><td>37.49</td><td>3.69</td><td>Average</td><td>100</td><td>75</td></tr><tr><td>6</td><td>20955.00</td><td>54.41</td><td>74.00</td><td>-19.59</td><td>50.72</td><td>3.69</td><td>Peak</td><td>100</td><td>75</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7125.00	48.60	68.20	-19.60	43.74	4.86	Average	177	263	2	7125.00	59.17	88.20	-29.03	54.31	4.86	Peak	177	263	3	13970.00	44.15	68.20	-24.05	37.49	6.66	Average	100	65	4	13970.00	57.17	88.20	-31.03	50.51	6.66	Peak	100	65	5	20955.00	41.18	54.00	-12.82	37.49	3.69	Average	100	75	6	20955.00	54.41	74.00	-19.59	50.72	3.69	Peak	100	75
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	7125.00	48.60	68.20	-19.60	43.74	4.86	Average	177	263																																																																
2	7125.00	59.17	88.20	-29.03	54.31	4.86	Peak	177	263																																																																
3	13970.00	44.15	68.20	-24.05	37.49	6.66	Average	100	65																																																																
4	13970.00	57.17	88.20	-31.03	50.51	6.66	Peak	100	65																																																																
5	20955.00	41.18	54.00	-12.82	37.49	3.69	Average	100	75																																																																
6	20955.00	54.41	74.00	-19.59	50.72	3.69	Peak	100	75																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

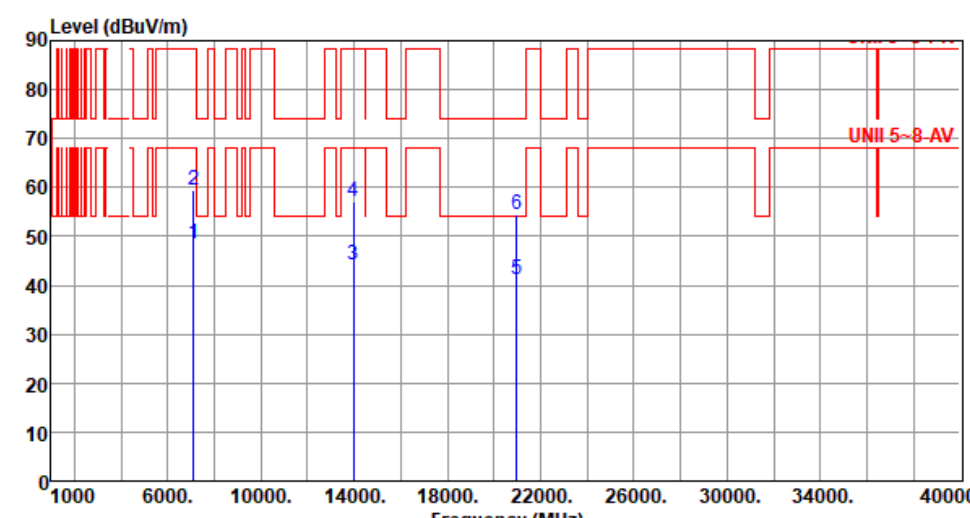


Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6985																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBuV/m)  <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>7125.00</td><td>48.65</td><td>68.20</td><td>-19.55</td><td>43.79</td><td>4.86</td><td>Average</td><td>364</td><td>339</td></tr><tr><td>2</td><td>7125.00</td><td>59.46</td><td>88.20</td><td>-28.74</td><td>54.60</td><td>4.86</td><td>Peak</td><td>364</td><td>339</td></tr><tr><td>3</td><td>13970.00</td><td>44.03</td><td>68.20</td><td>-24.17</td><td>37.37</td><td>6.66</td><td>Average</td><td>100</td><td>54</td></tr><tr><td>4</td><td>13970.00</td><td>57.28</td><td>88.20</td><td>-30.92</td><td>50.62</td><td>6.66</td><td>Peak</td><td>100</td><td>54</td></tr><tr><td>5</td><td>20955.00</td><td>41.25</td><td>54.00</td><td>-12.75</td><td>37.56</td><td>3.69</td><td>Average</td><td>100</td><td>83</td></tr><tr><td>6</td><td>20955.00</td><td>54.59</td><td>74.00</td><td>-19.41</td><td>50.90</td><td>3.69</td><td>Peak</td><td>100</td><td>83</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7125.00	48.65	68.20	-19.55	43.79	4.86	Average	364	339	2	7125.00	59.46	88.20	-28.74	54.60	4.86	Peak	364	339	3	13970.00	44.03	68.20	-24.17	37.37	6.66	Average	100	54	4	13970.00	57.28	88.20	-30.92	50.62	6.66	Peak	100	54	5	20955.00	41.25	54.00	-12.75	37.56	3.69	Average	100	83	6	20955.00	54.59	74.00	-19.41	50.90	3.69	Peak	100	83
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	7125.00	48.65	68.20	-19.55	43.79	4.86	Average	364	339																																																																
2	7125.00	59.46	88.20	-28.74	54.60	4.86	Peak	364	339																																																																
3	13970.00	44.03	68.20	-24.17	37.37	6.66	Average	100	54																																																																
4	13970.00	57.28	88.20	-30.92	50.62	6.66	Peak	100	54																																																																
5	20955.00	41.25	54.00	-12.75	37.56	3.69	Average	100	83																																																																
6	20955.00	54.59	74.00	-19.41	50.90	3.69	Peak	100	83																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

Unwanted Emissions (Above 1GHz) for be EHT320-OFDMA

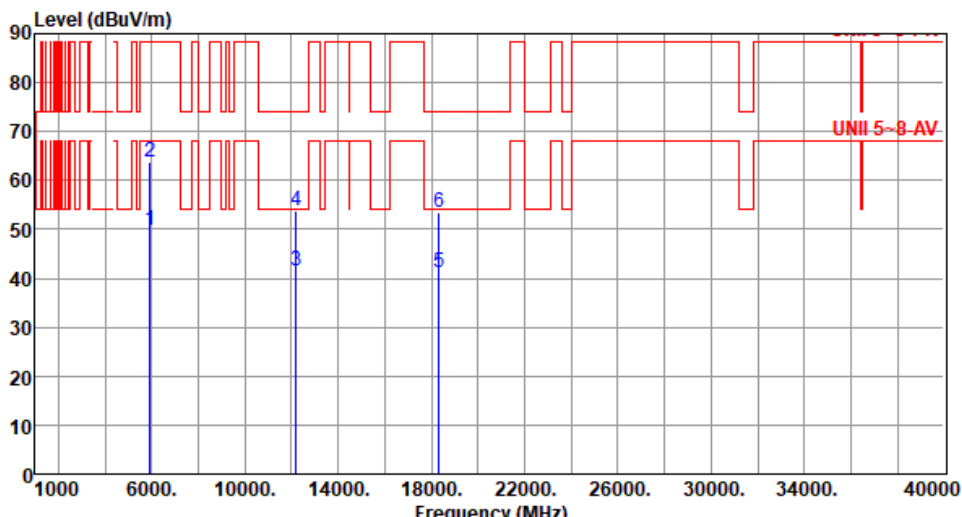
Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6105																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5925.00</td><td>49.69</td><td>68.20</td><td>-18.51</td><td>48.56</td><td>1.13</td><td>Average</td><td>352</td><td>287</td></tr><tr><td>2</td><td>5925.00</td><td>63.65</td><td>88.20</td><td>-24.55</td><td>62.52</td><td>1.13</td><td>Peak</td><td>352</td><td>287</td></tr><tr><td>3</td><td>12210.00</td><td>41.36</td><td>54.00</td><td>-12.64</td><td>34.94</td><td>6.42</td><td>Average</td><td>100</td><td>186</td></tr><tr><td>4</td><td>12210.00</td><td>53.87</td><td>74.00</td><td>-20.13</td><td>47.45</td><td>6.42</td><td>Peak</td><td>100</td><td>186</td></tr><tr><td>5</td><td>18315.00</td><td>41.18</td><td>54.00</td><td>-12.82</td><td>39.38</td><td>1.80</td><td>Average</td><td>100</td><td>327</td></tr><tr><td>6</td><td>18315.00</td><td>53.51</td><td>74.00</td><td>-20.49</td><td>51.71</td><td>1.80</td><td>Peak</td><td>100</td><td>327</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5925.00	49.69	68.20	-18.51	48.56	1.13	Average	352	287	2	5925.00	63.65	88.20	-24.55	62.52	1.13	Peak	352	287	3	12210.00	41.36	54.00	-12.64	34.94	6.42	Average	100	186	4	12210.00	53.87	74.00	-20.13	47.45	6.42	Peak	100	186	5	18315.00	41.18	54.00	-12.82	39.38	1.80	Average	100	327	6	18315.00	53.51	74.00	-20.49	51.71	1.80	Peak	100	327
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	5925.00	49.69	68.20	-18.51	48.56	1.13	Average	352	287																																																																
2	5925.00	63.65	88.20	-24.55	62.52	1.13	Peak	352	287																																																																
3	12210.00	41.36	54.00	-12.64	34.94	6.42	Average	100	186																																																																
4	12210.00	53.87	74.00	-20.13	47.45	6.42	Peak	100	186																																																																
5	18315.00	41.18	54.00	-12.82	39.38	1.80	Average	100	327																																																																
6	18315.00	53.51	74.00	-20.49	51.71	1.80	Peak	100	327																																																																

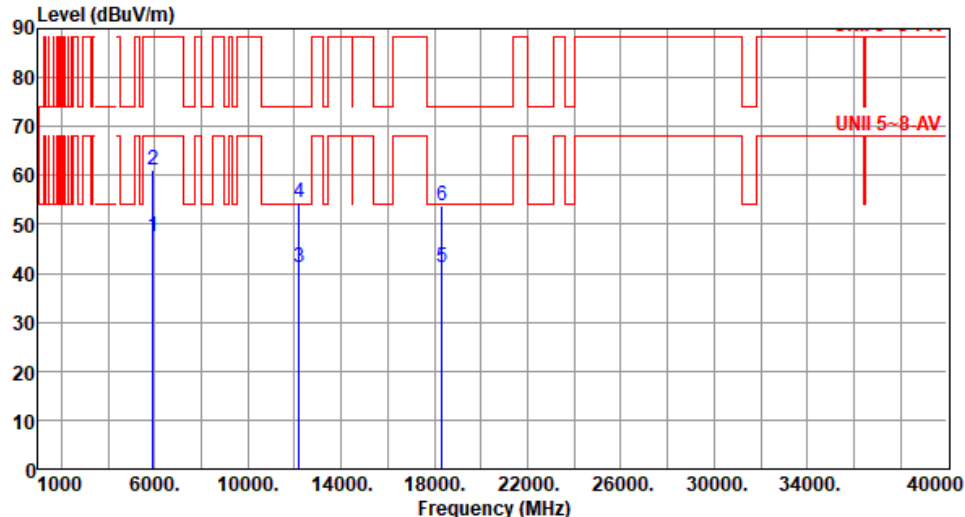

Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6105						
Polarization	Vertical								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5925.00	47.36	68.20	-20.84	46.23	1.13	Average	369	344
2	5925.00	61.24	88.20	-26.96	60.11	1.13	Peak	369	344
3	12210.00	41.29	54.00	-12.71	34.87	6.42	Average	100	201
4	12210.00	54.62	74.00	-19.38	48.20	6.42	Peak	100	201
5	18315.00	41.26	54.00	-12.74	39.46	1.80	Average	100	76
6	18315.00	53.68	74.00	-20.32	51.88	1.80	Peak	100	76

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

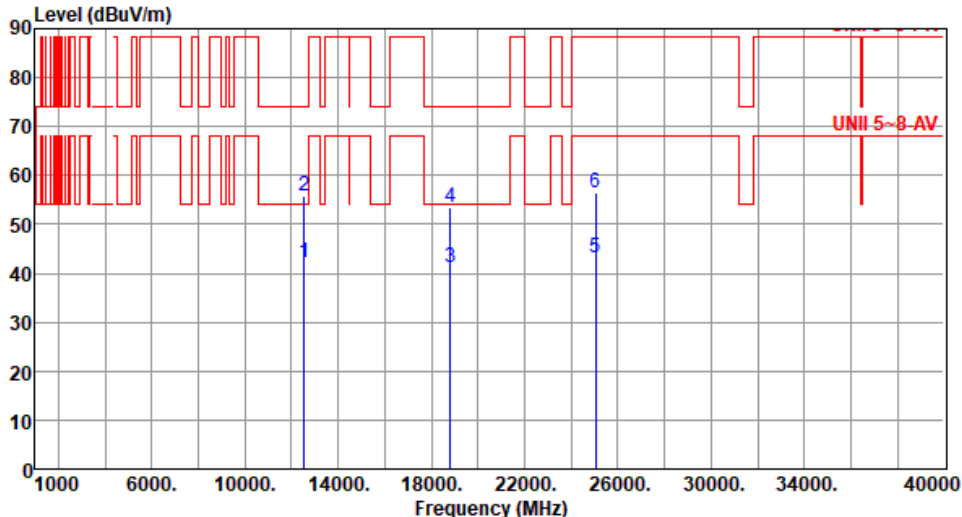

Modulation	be EHT320-OFDMA		Test Freq. (MHz)		6265																																																																										
Polarization	Horizontal																																																																														
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																															
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>12530.00</td><td>42.34</td><td>54.00</td><td>-11.66</td><td>36.63</td><td>5.71</td><td>Average</td><td>100</td><td>172</td></tr><tr><td>2</td><td>12530.00</td><td>55.63</td><td>74.00</td><td>-18.37</td><td>49.92</td><td>5.71</td><td>Peak</td><td>100</td><td>172</td></tr><tr><td>3</td><td>18795.00</td><td>41.14</td><td>54.00</td><td>-12.86</td><td>39.23</td><td>1.91</td><td>Average</td><td>100</td><td>84</td></tr><tr><td>4</td><td>18795.00</td><td>53.56</td><td>74.00</td><td>-20.44</td><td>51.65</td><td>1.91</td><td>Peak</td><td>100</td><td>84</td></tr><tr><td>5</td><td>25060.00</td><td>43.24</td><td>68.20</td><td>-24.96</td><td>34.96</td><td>8.28</td><td>Average</td><td>100</td><td>266</td></tr><tr><td>6</td><td>25060.00</td><td>56.37</td><td>88.20</td><td>-31.83</td><td>48.09</td><td>8.28</td><td>Peak</td><td>100</td><td>266</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12530.00	42.34	54.00	-11.66	36.63	5.71	Average	100	172	2	12530.00	55.63	74.00	-18.37	49.92	5.71	Peak	100	172	3	18795.00	41.14	54.00	-12.86	39.23	1.91	Average	100	84	4	18795.00	53.56	74.00	-20.44	51.65	1.91	Peak	100	84	5	25060.00	43.24	68.20	-24.96	34.96	8.28	Average	100	266	6	25060.00	56.37	88.20	-31.83	48.09	8.28	Peak	100	266
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	12530.00	42.34	54.00	-11.66	36.63	5.71	Average	100	172																																																																						
2	12530.00	55.63	74.00	-18.37	49.92	5.71	Peak	100	172																																																																						
3	18795.00	41.14	54.00	-12.86	39.23	1.91	Average	100	84																																																																						
4	18795.00	53.56	74.00	-20.44	51.65	1.91	Peak	100	84																																																																						
5	25060.00	43.24	68.20	-24.96	34.96	8.28	Average	100	266																																																																						
6	25060.00	56.37	88.20	-31.83	48.09	8.28	Peak	100	266																																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																															



Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6265																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBUV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>12530.00</td><td>42.67</td><td>54.00</td><td>-11.33</td><td>36.96</td><td>5.71</td><td>Average</td><td>100</td><td>78</td></tr><tr><td>2</td><td>12530.00</td><td>55.94</td><td>74.00</td><td>-18.06</td><td>50.23</td><td>5.71</td><td>Peak</td><td>100</td><td>78</td></tr><tr><td>3</td><td>18795.00</td><td>41.27</td><td>54.00</td><td>-12.73</td><td>39.36</td><td>1.91</td><td>Average</td><td>100</td><td>67</td></tr><tr><td>4</td><td>18795.00</td><td>53.81</td><td>74.00</td><td>-20.19</td><td>51.90</td><td>1.91</td><td>Peak</td><td>100</td><td>67</td></tr><tr><td>5</td><td>25060.00</td><td>43.41</td><td>68.20</td><td>-24.79</td><td>35.13</td><td>8.28</td><td>Average</td><td>100</td><td>244</td></tr><tr><td>6</td><td>25060.00</td><td>56.54</td><td>88.20</td><td>-31.66</td><td>48.26</td><td>8.28</td><td>Peak</td><td>100</td><td>244</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12530.00	42.67	54.00	-11.33	36.96	5.71	Average	100	78	2	12530.00	55.94	74.00	-18.06	50.23	5.71	Peak	100	78	3	18795.00	41.27	54.00	-12.73	39.36	1.91	Average	100	67	4	18795.00	53.81	74.00	-20.19	51.90	1.91	Peak	100	67	5	25060.00	43.41	68.20	-24.79	35.13	8.28	Average	100	244	6	25060.00	56.54	88.20	-31.66	48.26	8.28	Peak	100	244
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12530.00	42.67	54.00	-11.33	36.96	5.71	Average	100	78																																																																
2	12530.00	55.94	74.00	-18.06	50.23	5.71	Peak	100	78																																																																
3	18795.00	41.27	54.00	-12.73	39.36	1.91	Average	100	67																																																																
4	18795.00	53.81	74.00	-20.19	51.90	1.91	Peak	100	67																																																																
5	25060.00	43.41	68.20	-24.79	35.13	8.28	Average	100	244																																																																
6	25060.00	56.54	88.20	-31.66	48.26	8.28	Peak	100	244																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									



Modulation	be EHT320-OFDMA		Test Freq. (MHz)		6425																																																																																														
Polarization	Horizontal																																																																																																		
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																																																			
Level (dBUV/m) Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBUV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBUV/m</th><th></th><th></th><th>dBUV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>12850.00</td><td>42.26</td><td>68.20</td><td>-25.94</td><td>36.09</td><td>6.17</td><td>Average</td><td>100</td><td>125</td></tr><tr><td>2</td><td>12850.00</td><td>55.27</td><td>88.20</td><td>-32.93</td><td>49.10</td><td>6.17</td><td>Peak</td><td>100</td><td>125</td></tr><tr><td>3</td><td>19275.00</td><td>40.49</td><td>54.00</td><td>-13.51</td><td>38.64</td><td>1.85</td><td>Average</td><td>100</td><td>47</td></tr><tr><td>4</td><td>19275.00</td><td>54.56</td><td>74.00</td><td>-19.44</td><td>52.71</td><td>1.85</td><td>Peak</td><td>100</td><td>47</td></tr><tr><td>5</td><td>25700.00</td><td>43.64</td><td>68.20</td><td>-24.56</td><td>35.59</td><td>8.05</td><td>Average</td><td>100</td><td>105</td></tr><tr><td>6</td><td>25700.00</td><td>56.95</td><td>88.20</td><td>-31.25</td><td>48.90</td><td>8.05</td><td>Peak</td><td>100</td><td>105</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBUV/m	dB	reading	dB/m		High	Table			dBUV/m			dBUV			cm	deg	1	12850.00	42.26	68.20	-25.94	36.09	6.17	Average	100	125	2	12850.00	55.27	88.20	-32.93	49.10	6.17	Peak	100	125	3	19275.00	40.49	54.00	-13.51	38.64	1.85	Average	100	47	4	19275.00	54.56	74.00	-19.44	52.71	1.85	Peak	100	47	5	25700.00	43.64	68.20	-24.56	35.59	8.05	Average	100	105	6	25700.00	56.95	88.20	-31.25	48.90	8.05	Peak	100	105
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBUV/m	dB	reading	dB/m		High	Table																																																																																										
		dBUV/m			dBUV			cm	deg																																																																																										
1	12850.00	42.26	68.20	-25.94	36.09	6.17	Average	100	125																																																																																										
2	12850.00	55.27	88.20	-32.93	49.10	6.17	Peak	100	125																																																																																										
3	19275.00	40.49	54.00	-13.51	38.64	1.85	Average	100	47																																																																																										
4	19275.00	54.56	74.00	-19.44	52.71	1.85	Peak	100	47																																																																																										
5	25700.00	43.64	68.20	-24.56	35.59	8.05	Average	100	105																																																																																										
6	25700.00	56.95	88.20	-31.25	48.90	8.05	Peak	100	105																																																																																										
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																																			

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6425						
Polarization	Vertical								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64									
Level (dBUV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12850.00	42.15	68.20	-26.05	35.98	6.17	Average	100	177
2	12850.00	55.70	88.20	-32.50	49.53	6.17	Peak	100	177
3	19275.00	40.58	54.00	-13.42	38.73	1.85	Average	100	68
4	19275.00	54.77	74.00	-19.23	52.92	1.85	Peak	100	68
5	25700.00	43.82	68.20	-24.38	35.77	8.05	Average	100	116
6	25700.00	57.07	88.20	-31.13	49.02	8.05	Peak	100	116

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).



Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6585																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																									
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13170.00</td><td>42.16</td><td>68.20</td><td>-26.04</td><td>36.35</td><td>5.81</td><td>Average</td><td>100</td><td>127</td></tr><tr><td>2</td><td>13170.00</td><td>55.98</td><td>88.20</td><td>-32.22</td><td>50.17</td><td>5.81</td><td>Peak</td><td>100</td><td>127</td></tr><tr><td>3</td><td>19755.00</td><td>41.06</td><td>54.00</td><td>-12.94</td><td>38.97</td><td>2.09</td><td>Average</td><td>100</td><td>125</td></tr><tr><td>4</td><td>19755.00</td><td>53.94</td><td>74.00</td><td>-20.06</td><td>51.85</td><td>2.09</td><td>Peak</td><td>100</td><td>125</td></tr><tr><td>5</td><td>26340.00</td><td>43.41</td><td>68.20</td><td>-24.79</td><td>35.04</td><td>8.37</td><td>Average</td><td>100</td><td>68</td></tr><tr><td>6</td><td>26340.00</td><td>55.84</td><td>88.20</td><td>-32.36</td><td>47.47</td><td>8.37</td><td>Peak</td><td>100</td><td>68</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13170.00	42.16	68.20	-26.04	36.35	5.81	Average	100	127	2	13170.00	55.98	88.20	-32.22	50.17	5.81	Peak	100	127	3	19755.00	41.06	54.00	-12.94	38.97	2.09	Average	100	125	4	19755.00	53.94	74.00	-20.06	51.85	2.09	Peak	100	125	5	26340.00	43.41	68.20	-24.79	35.04	8.37	Average	100	68	6	26340.00	55.84	88.20	-32.36	47.47	8.37	Peak	100	68
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13170.00	42.16	68.20	-26.04	36.35	5.81	Average	100	127																																																																
2	13170.00	55.98	88.20	-32.22	50.17	5.81	Peak	100	127																																																																
3	19755.00	41.06	54.00	-12.94	38.97	2.09	Average	100	125																																																																
4	19755.00	53.94	74.00	-20.06	51.85	2.09	Peak	100	125																																																																
5	26340.00	43.41	68.20	-24.79	35.04	8.37	Average	100	68																																																																
6	26340.00	55.84	88.20	-32.36	47.47	8.37	Peak	100	68																																																																




Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6585																																																																																										
Polarization	Vertical																																																																																												
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																																													
Level (dBuV/m) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>13170.00</td><td>41.95</td><td>68.20</td><td>-26.25</td><td>36.14</td><td>5.81</td><td>Average</td><td>100</td><td>49</td></tr><tr><td>2</td><td>13170.00</td><td>55.36</td><td>88.20</td><td>-32.84</td><td>49.55</td><td>5.81</td><td>Peak</td><td>100</td><td>49</td></tr><tr><td>3</td><td>19755.00</td><td>41.22</td><td>54.00</td><td>-12.78</td><td>39.13</td><td>2.09</td><td>Average</td><td>100</td><td>107</td></tr><tr><td>4</td><td>19755.00</td><td>54.06</td><td>74.00</td><td>-19.94</td><td>51.97</td><td>2.09</td><td>Peak</td><td>100</td><td>107</td></tr><tr><td>5</td><td>26340.00</td><td>43.55</td><td>68.20</td><td>-24.65</td><td>35.18</td><td>8.37</td><td>Average</td><td>100</td><td>56</td></tr><tr><td>6</td><td>26340.00</td><td>55.98</td><td>88.20</td><td>-32.22</td><td>47.61</td><td>8.37</td><td>Peak</td><td>100</td><td>56</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	13170.00	41.95	68.20	-26.25	36.14	5.81	Average	100	49	2	13170.00	55.36	88.20	-32.84	49.55	5.81	Peak	100	49	3	19755.00	41.22	54.00	-12.78	39.13	2.09	Average	100	107	4	19755.00	54.06	74.00	-19.94	51.97	2.09	Peak	100	107	5	26340.00	43.55	68.20	-24.65	35.18	8.37	Average	100	56	6	26340.00	55.98	88.20	-32.22	47.61	8.37	Peak	100	56
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																				
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																				
		dBuV/m			dBuV			cm	deg																																																																																				
1	13170.00	41.95	68.20	-26.25	36.14	5.81	Average	100	49																																																																																				
2	13170.00	55.36	88.20	-32.84	49.55	5.81	Peak	100	49																																																																																				
3	19755.00	41.22	54.00	-12.78	39.13	2.09	Average	100	107																																																																																				
4	19755.00	54.06	74.00	-19.94	51.97	2.09	Peak	100	107																																																																																				
5	26340.00	43.55	68.20	-24.65	35.18	8.37	Average	100	56																																																																																				
6	26340.00	55.98	88.20	-32.22	47.61	8.37	Peak	100	56																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																													




Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6745
Polarization	Horizontal		
Test By :Paul Lin Temperature(°C):24 Humidity(%):64			
Level (dBUV/m)			

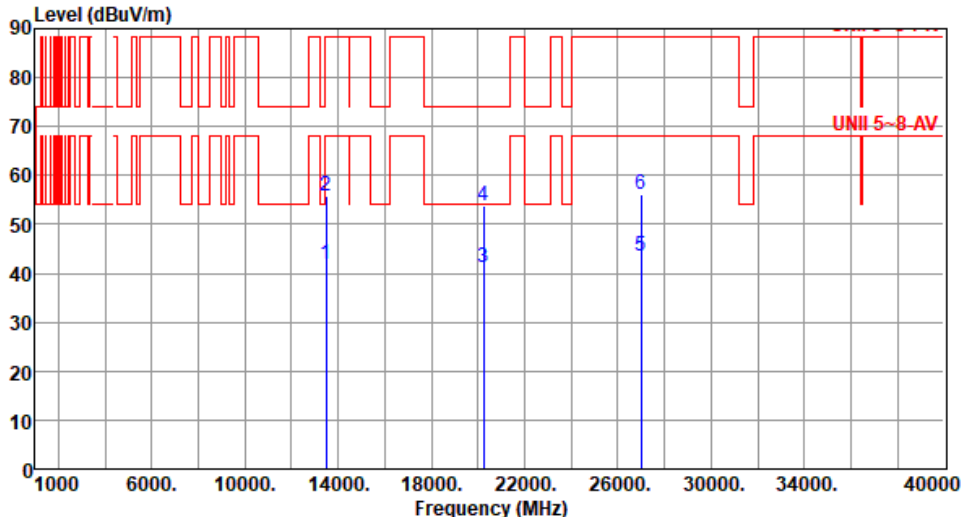


Modulation	be EHT320-OFDMA		Test Freq. (MHz)		6745																																																																										
Polarization	Vertical																																																																														
Test By :Paul Lin Temperature(°C):24 Humidity(%):64																																																																															
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>13490.00</td><td>41.81</td><td>68.20</td><td>-26.39</td><td>35.77</td><td>6.04</td><td>Average</td><td>100</td><td>224</td></tr><tr><td>2</td><td>13490.00</td><td>55.72</td><td>88.20</td><td>-32.48</td><td>49.68</td><td>6.04</td><td>Peak</td><td>100</td><td>224</td></tr><tr><td>3</td><td>20235.00</td><td>41.29</td><td>54.00</td><td>-12.71</td><td>38.61</td><td>2.68</td><td>Average</td><td>100</td><td>65</td></tr><tr><td>4</td><td>20235.00</td><td>53.73</td><td>74.00</td><td>-20.27</td><td>51.05</td><td>2.68</td><td>Peak</td><td>100</td><td>65</td></tr><tr><td>5</td><td>26980.00</td><td>43.55</td><td>68.20</td><td>-24.65</td><td>35.12</td><td>8.43</td><td>Average</td><td>100</td><td>133</td></tr><tr><td>6</td><td>26980.00</td><td>55.98</td><td>88.20</td><td>-32.22</td><td>47.55</td><td>8.43</td><td>Peak</td><td>100</td><td>133</td></tr></table>											Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13490.00	41.81	68.20	-26.39	35.77	6.04	Average	100	224	2	13490.00	55.72	88.20	-32.48	49.68	6.04	Peak	100	224	3	20235.00	41.29	54.00	-12.71	38.61	2.68	Average	100	65	4	20235.00	53.73	74.00	-20.27	51.05	2.68	Peak	100	65	5	26980.00	43.55	68.20	-24.65	35.12	8.43	Average	100	133	6	26980.00	55.98	88.20	-32.22	47.55	8.43	Peak	100	133
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	13490.00	41.81	68.20	-26.39	35.77	6.04	Average	100	224																																																																						
2	13490.00	55.72	88.20	-32.48	49.68	6.04	Peak	100	224																																																																						
3	20235.00	41.29	54.00	-12.71	38.61	2.68	Average	100	65																																																																						
4	20235.00	53.73	74.00	-20.27	51.05	2.68	Peak	100	65																																																																						
5	26980.00	43.55	68.20	-24.65	35.12	8.43	Average	100	133																																																																						
6	26980.00	55.98	88.20	-32.22	47.55	8.43	Peak	100	133																																																																						
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																															

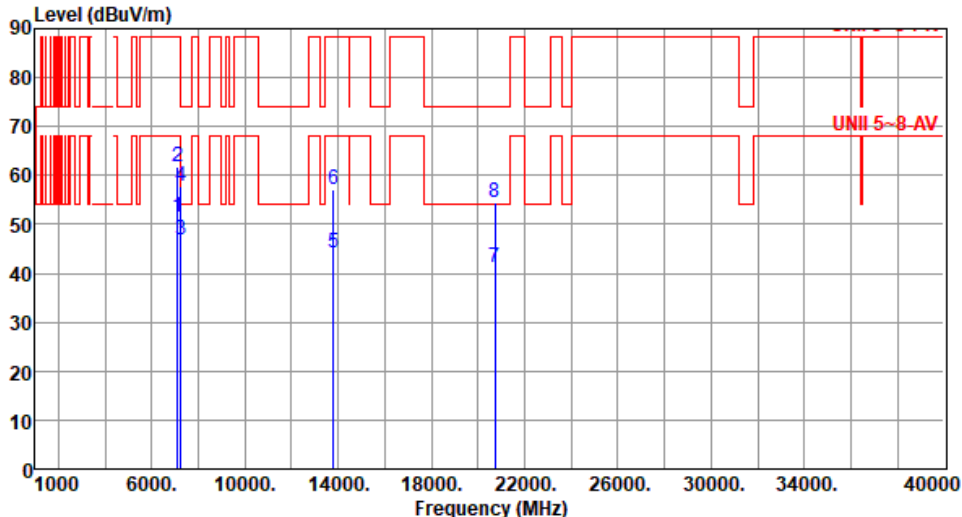

Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6905						
Polarization	Horizontal								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64									
Level (dBuV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	7125.00	51.35	68.20	-16.85	46.49	4.86	Average	175	276
2	7125.00	61.62	88.20	-26.58	56.76	4.86	Peak	175	276
3	7250.00	46.78	54.00	-7.22	41.57	5.21	Average	175	276
4	7250.00	57.74	74.00	-16.26	52.53	5.21	Peak	175	276
5	13810.00	44.06	68.20	-24.14	37.83	6.23	Average	100	83
6	13810.00	57.11	88.20	-31.09	50.88	6.23	Peak	100	83
7	20715.00	41.12	54.00	-12.88	37.83	3.29	Average	100	155
8	20715.00	54.34	74.00	-19.66	51.05	3.29	Peak	100	155

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

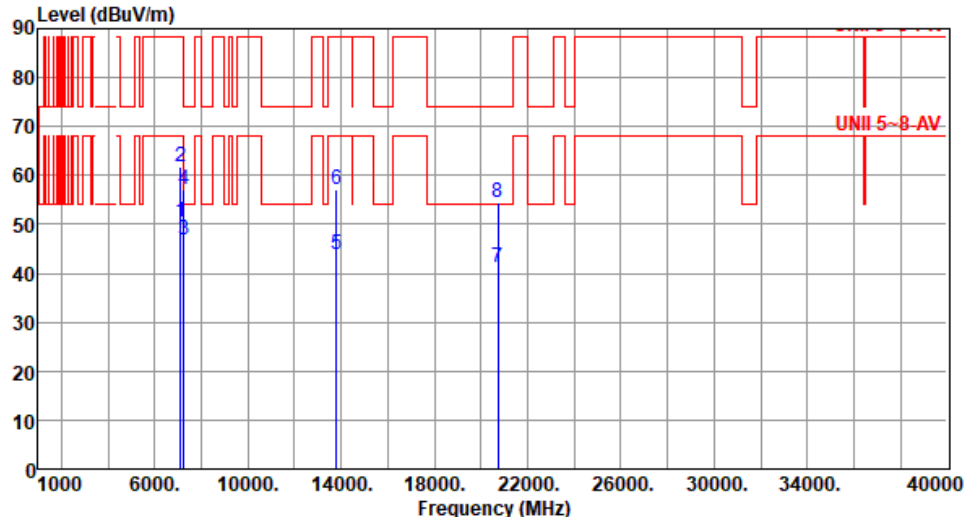

Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6905						
Polarization	Vertical								
Test By :Paul Lin Temperature(°C):24 Humidity(%):64									
Level (dBUV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	7125.00	50.51	68.20	-17.69	45.65	4.86	Average	359	340
2	7125.00	61.90	88.20	-26.30	57.04	4.86	Peak	359	340
3	7250.00	46.83	54.00	-7.17	41.62	5.21	Average	352	340
4	7250.00	57.22	74.00	-16.78	52.01	5.21	Peak	352	340
5	13810.00	43.94	68.20	-24.26	37.71	6.23	Average	100	52
6	13810.00	57.28	88.20	-30.92	51.05	6.23	Peak	100	52
7	20715.00	41.29	54.00	-12.71	38.00	3.29	Average	100	59
8	20715.00	54.48	74.00	-19.52	51.19	3.29	Peak	100	59
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									

Summary

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
5.925-6.425GHz	-	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	Pass	6.41G	-15.06	6.4621G	-58.43	-55.06	-3.37	1
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	Pass	5.96329G	-14.81	5.9106G	-57.76	-54.81	-2.95	1
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	Pass	5.98298G	-13.28	6.0436G	-55.86	-53.28	-2.58	1
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	Pass	6.00738G	-8.29	5.8622G	-50.99	-48.29	-2.70	4
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	Pass	6.03859G	-4.85	6.2906G	-51.55	-44.85	-6.70	1
802.11be EHT320_Nss1,(MCS0)_4TX-OFDMA	Pass	6.2906G	-0.80	6.9978G	-46.01	-40.80	-5.21	4
6.425-6.525GHz	-	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	Pass	6.46721G	-13.14	6.5243G	-58.33	-53.14	-5.19	1
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	Pass	6.48379G	-13.56	6.524G	-58.43	-53.56	-4.87	1
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	Pass	6.45879G	-11.93	6.5058G	-56.59	-51.93	-4.66	1
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	Pass	6.4614G	-5.69	6.3342G	-54.48	-45.69	-8.79	1
6.525-6.875GHz	-	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	Pass	6.84781G	-14.08	6.9022G	-57.40	-54.08	-3.32	1
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	Pass	6.86129G	-14.37	6.9019G	-57.28	-54.37	-2.91	1
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	Pass	6.85359G	-12.50	6.9398G	-55.27	-52.50	-2.77	1
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	Pass	6.77381G	-6.92	6.9454G	-49.97	-46.92	-3.05	1
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	Pass	6.70096G	-3.30	7.0082G	-49.72	-43.30	-6.42	3
802.11be EHT320_Nss1,(MCS0)_4TX-OFDMA	Pass	6.8778G	0.83	6.7402G	-22.96	-19.18	-3.78	1
6.875-7.125GHz	-	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	Pass	7.0184G	-14.03	6.9768G	-57.36	-54.03	-3.33	1
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	Pass	7.0115G	-14.89	6.9712G	-57.35	-54.89	-2.46	1
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	Pass	6.90962G	-11.07	6.9874G	-55.60	-51.07	-4.53	1
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	Pass	6.91943G	-6.13	6.7794G	-50.51	-46.13	-4.38	1
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	Pass	6.90988G	-2.04	7.3842G	-50.20	-42.04	-8.16	1

Result

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
802.11a_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-
5955MHz	Pass	5.96219G	-14.24	5.9188G	-57.79	-54.24	-3.55	1
5955MHz	Pass	5.96249G	-14.07	5.9058G	-57.99	-54.07	-3.92	2
5955MHz	Pass	5.9525G	-14.32	5.9122G	-57.87	-54.32	-3.55	3
5955MHz	Pass	5.96G	-14.14	5.9052G	-57.84	-54.14	-3.70	4
6175MHz	Pass	6.1725G	-13.79	6.1331G	-58.54	-53.79	-4.75	1
6175MHz	Pass	6.1775G	-13.74	6.1304G	-58.50	-53.74	-4.76	2
6175MHz	Pass	6.1737G	-13.87	6.1321G	-58.61	-53.87	-4.74	3
6175MHz	Pass	6.1797G	-13.62	6.1255G	-58.52	-53.62	-4.90	4
6415MHz	Pass	6.41G	-15.06	6.4621G	-58.43	-55.06	-3.37	1
6415MHz	Pass	6.42249G	-13.32	6.4455G	-58.59	-53.32	-5.27	2
6415MHz	Pass	6.42279G	-13.82	6.3676G	-58.50	-53.82	-4.68	3
6415MHz	Pass	6.41G	-13.42	6.4603G	-58.68	-53.42	-5.26	4
6435MHz	Pass	6.4375G	-13.21	6.4743G	-58.44	-53.21	-5.23	1
6435MHz	Pass	6.42841G	-12.90	6.4692G	-58.43	-52.90	-5.53	2
6435MHz	Pass	6.44279G	-12.21	6.4728G	-58.45	-52.21	-6.24	3
6435MHz	Pass	6.4362G	-12.04	6.472G	-58.49	-52.04	-6.45	4
6475MHz	Pass	6.46721G	-13.14	6.5243G	-58.33	-53.14	-5.19	1
6475MHz	Pass	6.4728G	-13.01	6.5123G	-58.39	-53.01	-5.38	2
6475MHz	Pass	6.4728G	-12.08	6.5061G	-58.50	-52.08	-6.42	3
6475MHz	Pass	6.4778G	-12.21	6.5197G	-58.40	-52.21	-6.19	4
6515MHz	Pass	6.5181G	-12.51	6.4769G	-58.40	-52.51	-5.89	1
6515MHz	Pass	6.50781G	-11.60	6.4801G	-58.29	-51.60	-6.69	2
6515MHz	Pass	6.52G	-12.34	6.5483G	-58.50	-52.34	-6.16	3
6515MHz	Pass	6.52249G	-12.17	6.4736G	-58.44	-52.17	-6.27	4
6535MHz	Pass	6.52751G	-12.44	6.4999G	-58.23	-52.44	-5.79	1
6535MHz	Pass	6.5375G	-11.77	6.4951G	-58.24	-51.77	-6.47	2
6535MHz	Pass	6.5309G	-12.69	6.501G	-58.25	-52.69	-5.56	3
6535MHz	Pass	6.5331G	-12.13	6.5007G	-58.28	-52.13	-6.15	4
6715MHz	Pass	6.7125G	-13.22	6.7558G	-57.63	-53.22	-4.41	1
6715MHz	Pass	6.70751G	-11.46	6.7507G	-57.63	-51.46	-6.17	2
6715MHz	Pass	6.70751G	-12.70	6.7538G	-57.69	-52.70	-4.99	3
6715MHz	Pass	6.70811G	-12.51	6.7634G	-57.62	-52.51	-5.11	4
6855MHz	Pass	6.84781G	-14.08	6.9022G	-57.40	-54.08	-3.32	1
6855MHz	Pass	6.86029G	-11.92	6.8915G	-57.45	-51.92	-5.53	2
6855MHz	Pass	6.8578G	-11.90	6.8966G	-57.37	-51.90	-5.47	3
6855MHz	Pass	6.8537G	-12.54	6.888G	-57.31	-52.54	-4.77	4
6875MHz Straddle 6.525-6.875GHz	Pass	6.88G	-13.35	6.911G	-57.11	-53.35	-3.76	1
6875MHz Straddle 6.525-6.875GHz	Pass	6.88249G	-11.39	6.9233G	-57.19	-51.39	-5.80	2
6875MHz Straddle 6.525-6.875GHz	Pass	6.8778G	-11.63	6.9192G	-57.13	-51.63	-5.50	3
6875MHz Straddle 6.525-6.875GHz	Pass	6.8737G	-11.87	6.9162G	-57.25	-51.87	-5.38	4
6895MHz	Pass	6.8937G	-13.45	6.9411G	-57.24	-53.45	-3.79	1

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
6895MHz	Pass	6.8981G	-11.82	6.9315G	-57.21	-51.82	-5.39	2
6895MHz	Pass	6.88871G	-12.55	6.9361G	-57.13	-52.55	-4.58	3
6895MHz	Pass	6.9G	-12.28	6.9288G	-57.22	-52.28	-4.94	4
7015MHz	Pass	7.0184G	-14.03	6.9768G	-57.36	-54.03	-3.33	1
7015MHz	Pass	7.00841G	-12.82	6.9697G	-57.34	-52.82	-4.52	2
7015MHz	Pass	7.00871G	-13.85	6.971G	-57.45	-53.85	-3.60	3
7015MHz	Pass	7.0156G	-13.74	6.9678G	-57.35	-53.74	-3.61	4
7095MHz	Pass	7.10089G	-15.58	7.0581G	-60.08	-55.58	-4.50	1
7095MHz	Pass	7.0906G	-15.06	7.0534G	-60.01	-55.06	-4.95	2
7095MHz	Pass	7.0981G	-15.43	7.0557G	-59.92	-55.43	-4.49	3
7095MHz	Pass	7.0978G	-15.27	7.0518G	-59.95	-55.27	-4.68	4
7115MHz	Pass	7.12059G	-14.84	7.0659G	-60.13	-54.84	-5.29	1
7115MHz	Pass	7.1137G	-14.88	7.0675G	-60.17	-54.88	-5.29	2
7115MHz	Pass	7.10841G	-14.38	7.0697G	-60.17	-54.38	-5.79	3
7115MHz	Pass	7.1175G	-14.69	7.0768G	-60.07	-54.69	-5.38	4
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-
5955MHz	Pass	5.96329G	-14.81	5.9106G	-57.76	-54.81	-2.95	1
5955MHz	Pass	5.96209G	-13.91	5.9067G	-57.67	-53.91	-3.76	2
5955MHz	Pass	5.96089G	-14.27	5.9194G	-57.85	-54.27	-3.58	3
5955MHz	Pass	5.96349G	-14.43	5.9065G	-57.89	-54.43	-3.46	4
6175MHz	Pass	6.177G	-14.32	6.1277G	-58.58	-54.32	-4.26	1
6175MHz	Pass	6.18289G	-13.94	6.1388G	-58.58	-53.94	-4.64	2
6175MHz	Pass	6.1714G	-13.58	6.2096G	-58.62	-53.58	-5.04	3
6175MHz	Pass	6.18369G	-13.86	6.1303G	-58.61	-53.86	-4.75	4
6415MHz	Pass	6.40621G	-15.43	6.4632G	-58.59	-55.43	-3.16	1
6415MHz	Pass	6.42319G	-13.97	6.4617G	-58.43	-53.97	-4.46	2
6415MHz	Pass	6.40751G	-13.94	6.3813G	-58.54	-53.94	-4.60	3
6415MHz	Pass	6.40711G	-13.92	6.4506G	-58.59	-53.92	-4.67	4
6435MHz	Pass	6.4388G	-13.52	6.4748G	-58.57	-53.52	-5.05	1
6435MHz	Pass	6.4381G	-13.06	6.481G	-58.51	-53.06	-5.45	2
6435MHz	Pass	6.44269G	-12.38	6.4773G	-58.54	-52.38	-6.16	3
6435MHz	Pass	6.42701G	-13.01	6.4815G	-58.57	-53.01	-5.56	4
6475MHz	Pass	6.48379G	-13.56	6.524G	-58.43	-53.56	-4.87	1
6475MHz	Pass	6.48249G	-12.95	6.5241G	-58.45	-52.95	-5.50	2
6475MHz	Pass	6.46851G	-12.62	6.5102G	-58.38	-52.62	-5.76	3
6475MHz	Pass	6.472G	-12.59	6.5165G	-58.44	-52.59	-5.85	4
6515MHz	Pass	6.52279G	-13.31	6.4834G	-58.49	-53.31	-5.18	1
6515MHz	Pass	6.51G	-12.37	6.4832G	-58.47	-52.37	-6.10	2
6515MHz	Pass	6.52109G	-12.81	6.4774G	-58.47	-52.81	-5.66	3
6515MHz	Pass	6.5188G	-12.48	6.4683G	-58.35	-52.48	-5.87	4
6535MHz	Pass	6.52991G	-13.17	6.5044G	-58.24	-53.17	-5.07	1
6535MHz	Pass	6.54239G	-11.87	6.4884G	-58.27	-51.87	-6.40	2

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
6535MHz	Pass	6.54279G	-12.90	6.5006G	-58.31	-52.90	-5.41	3
6535MHz	Pass	6.5302G	-12.65	6.4892G	-58.18	-52.65	-5.53	4
6715MHz	Pass	6.70981G	-13.49	6.7584G	-57.50	-53.49	-4.01	1
6715MHz	Pass	6.72249G	-12.02	6.7646G	-57.54	-52.02	-5.52	2
6715MHz	Pass	6.7112G	-12.89	6.765G	-57.60	-52.89	-4.71	3
6715MHz	Pass	6.72129G	-12.94	6.7586G	-57.54	-52.94	-4.60	4
6855MHz	Pass	6.86129G	-14.37	6.9019G	-57.28	-54.37	-2.91	1
6855MHz	Pass	6.86179G	-12.44	6.8902G	-57.35	-52.44	-4.91	2
6855MHz	Pass	6.8525G	-12.54	6.8876G	-57.36	-52.54	-4.82	3
6855MHz	Pass	6.8517G	-13.07	6.8936G	-57.37	-53.07	-4.30	4
6875MHz Straddle 6.525-6.875GHz	Pass	6.88249G	-13.87	6.9178G	-57.17	-53.87	-3.30	1
6875MHz Straddle 6.525-6.875GHz	Pass	6.88249G	-12.09	6.906G	-57.16	-52.09	-5.07	2
6875MHz Straddle 6.525-6.875GHz	Pass	6.88159G	-12.10	6.9212G	-57.08	-52.10	-4.98	3
6875MHz Straddle 6.525-6.875GHz	Pass	6.88379G	-12.66	6.9127G	-57.12	-52.66	-4.46	4
6895MHz	Pass	6.8939G	-14.04	6.9414G	-57.22	-54.04	-3.18	1
6895MHz	Pass	6.88901G	-12.37	6.9317G	-57.20	-52.37	-4.83	2
6895MHz	Pass	6.8901G	-12.68	6.9449G	-57.29	-52.68	-4.61	3
6895MHz	Pass	6.8987G	-12.80	6.9371G	-57.27	-52.80	-4.47	4
7015MHz	Pass	7.0115G	-14.89	6.9712G	-57.35	-54.89	-2.46	1
7015MHz	Pass	7.0114G	-13.90	6.9726G	-57.33	-53.90	-3.43	2
7015MHz	Pass	7.00811G	-14.20	6.9828G	-57.28	-54.20	-3.08	3
7015MHz	Pass	7.02259G	-14.51	6.9652G	-57.40	-54.51	-2.89	4
7095MHz	Pass	7.08671G	-15.12	7.0598G	-59.94	-55.12	-4.82	1
7095MHz	Pass	7.08761G	-15.41	7.0471G	-60.02	-55.41	-4.61	2
7095MHz	Pass	7.08801G	-14.61	7.0507G	-59.94	-54.61	-5.33	3
7095MHz	Pass	7.08751G	-15.16	7.0549G	-59.91	-55.16	-4.75	4
7115MHz	Pass	7.1174G	-15.01	7.0683G	-60.18	-55.01	-5.17	1
7115MHz	Pass	7.12069G	-15.07	7.0743G	-60.07	-55.07	-5.00	2
7115MHz	Pass	7.12049G	-14.69	7.075G	-59.99	-54.69	-5.30	3
7115MHz	Pass	7.10781G	-14.93	7.0743G	-60.22	-54.93	-5.29	4
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-
5965MHz	Pass	5.98298G	-13.28	6.0436G	-55.86	-53.28	-2.58	1
5965MHz	Pass	5.97939G	-12.42	5.8774G	-55.82	-52.42	-3.40	2
5965MHz	Pass	5.98358G	-12.87	5.8656G	-55.80	-52.87	-2.93	3
5965MHz	Pass	5.98098G	-12.61	5.8794G	-55.91	-52.61	-3.30	4
6165MHz	Pass	6.17219G	-12.20	6.0712G	-56.42	-52.20	-4.22	1
6165MHz	Pass	6.17819G	-12.32	6.078G	-56.38	-52.32	-4.06	2
6165MHz	Pass	6.15641G	-12.05	6.0666G	-56.31	-52.05	-4.26	3
6165MHz	Pass	6.17379G	-12.03	6.0842G	-56.44	-52.03	-4.41	4
6405MHz	Pass	6.41999G	-12.93	6.501G	-56.68	-52.93	-3.75	1
6405MHz	Pass	6.4026G	-12.20	6.4852G	-56.67	-52.20	-4.47	2
6405MHz	Pass	6.4026G	-12.46	6.4776G	-56.57	-52.46	-4.11	3

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
6405MHz	Pass	6.4G	-11.72	6.5002G	-56.57	-51.72	-4.85	4
6445MHz	Pass	6.45879G	-11.93	6.5058G	-56.59	-51.93	-4.66	1
6445MHz	Pass	6.4476G	-11.67	6.5058G	-56.64	-51.67	-4.97	2
6445MHz	Pass	6.45319G	-11.15	6.5098G	-56.60	-51.15	-5.45	3
6445MHz	Pass	6.43701G	-11.18	6.5234G	-56.65	-51.18	-5.47	4
6485MHz	Pass	6.47861G	-10.67	6.4164G	-59.63	-50.67	-8.96	1
6485MHz	Pass	6.4866G	-10.25	6.4008G	-59.74	-50.25	-9.49	2
6485MHz	Pass	6.47241G	-9.82	6.424G	-59.67	-49.82	-9.85	3
6485MHz	Pass	6.49959G	-9.59	6.42G	-59.84	-49.59	-10.25	4
6525MHz Straddle 6.525-6.875GHz	Pass	6.52G	-10.97	6.62G	-56.13	-50.97	-5.16	1
6525MHz Straddle 6.525-6.875GHz	Pass	6.54258G	-10.20	6.6218G	-56.12	-50.20	-5.92	2
6525MHz Straddle 6.525-6.875GHz	Pass	6.5236G	-10.61	6.6186G	-56.23	-50.61	-5.62	3
6525MHz Straddle 6.525-6.875GHz	Pass	6.53119G	-10.60	6.6228G	-56.10	-50.60	-5.50	4
6565MHz	Pass	6.58178G	-11.19	6.6472G	-56.04	-51.19	-4.85	1
6565MHz	Pass	6.55541G	-10.52	6.6322G	-55.98	-50.52	-5.46	2
6565MHz	Pass	6.58138G	-10.91	6.627G	-56.10	-50.91	-5.19	3
6565MHz	Pass	6.58298G	-10.81	6.6498G	-56.13	-50.81	-5.32	4
6725MHz	Pass	6.728G	-10.72	6.822G	-59.75	-50.72	-9.03	1
6725MHz	Pass	6.73939G	-9.41	6.8244G	-59.72	-49.41	-10.31	2
6725MHz	Pass	6.73379G	-10.73	6.8244G	-59.76	-50.73	-9.03	3
6725MHz	Pass	6.74158G	-10.61	6.8224G	-59.90	-50.61	-9.29	4
6845MHz	Pass	6.85359G	-12.50	6.9398G	-55.27	-52.50	-2.77	1
6845MHz	Pass	6.86138G	-10.67	6.9422G	-55.20	-50.67	-4.53	2
6845MHz	Pass	6.85259G	-11.00	6.941G	-55.20	-51.00	-4.20	3
6845MHz	Pass	6.8424G	-11.24	6.9436G	-55.17	-51.24	-3.93	4
6885MHz Straddle 6.525-6.875GHz	Pass	6.87061G	-12.29	6.9482G	-55.17	-52.29	-2.88	1
6885MHz Straddle 6.525-6.875GHz	Pass	6.87741G	-10.74	6.9524G	-55.13	-50.74	-4.39	2
6885MHz Straddle 6.525-6.875GHz	Pass	6.87121G	-11.03	6.9488G	-55.16	-51.03	-4.13	3
6885MHz Straddle 6.525-6.875GHz	Pass	6.87381G	-11.23	6.9676G	-55.09	-51.23	-3.86	4
6925MHz	Pass	6.90962G	-11.07	6.9874G	-55.60	-51.07	-4.53	1
6925MHz	Pass	6.94238G	-10.87	6.9854G	-55.64	-50.87	-4.77	2
6925MHz	Pass	6.91901G	-10.35	6.9894G	-55.67	-50.35	-5.32	3
6925MHz	Pass	6.94118G	-10.87	6.9958G	-55.48	-50.87	-4.61	4
7005MHz	Pass	7.0024G	-10.63	6.9384G	-58.56	-50.63	-7.93	1
7005MHz	Pass	6.99001G	-9.22	6.9384G	-58.52	-49.22	-9.30	2
7005MHz	Pass	6.99681G	-10.42	6.9416G	-58.73	-50.42	-8.31	3
7005MHz	Pass	6.98822G	-10.04	6.933G	-58.78	-50.04	-8.74	4
7085MHz	Pass	7.0816G	-13.19	7.0254G	-58.41	-53.19	-5.22	1
7085MHz	Pass	7.06742G	-12.82	7.0258G	-58.45	-52.82	-5.63	2
7085MHz	Pass	7.0816G	-12.95	7.0244G	-58.48	-52.95	-5.53	3
7085MHz	Pass	7.07421G	-13.00	7.0254G	-58.43	-53.00	-5.43	4
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
5985MHz	Pass	6.01697G	-7.77	5.857G	-51.04	-47.77	-3.27	1
5985MHz	Pass	6.02016G	-6.49	5.8622G	-50.99	-46.49	-4.50	2
5985MHz	Pass	6.02216G	-7.85	5.863G	-50.98	-47.85	-3.13	3
5985MHz	Pass	6.00738G	-8.29	5.8622G	-50.99	-48.29	-2.70	4
6145MHz	Pass	6.11743G	-7.06	6.3054G	-54.73	-47.06	-7.67	1
6145MHz	Pass	6.11783G	-7.18	6.2886G	-54.82	-47.18	-7.64	2
6145MHz	Pass	6.11103G	-6.91	6.3174G	-54.82	-46.91	-7.91	3
6145MHz	Pass	6.13381G	-6.76	6.3146G	-54.68	-46.76	-7.92	4
6385MHz	Pass	6.41017G	-8.81	6.509G	-51.51	-48.81	-2.70	1
6385MHz	Pass	6.39739G	-7.69	6.5074G	-51.54	-47.69	-3.85	2
6385MHz	Pass	6.41297G	-7.81	6.5066G	-51.53	-47.81	-3.72	3
6385MHz	Pass	6.37501G	-7.31	6.5066G	-51.49	-47.31	-4.18	4
6465MHz	Pass	6.4614G	-5.69	6.3342G	-54.48	-45.69	-8.79	1
6465MHz	Pass	6.45101G	-4.57	6.3414G	-54.42	-44.57	-9.85	2
6465MHz	Pass	6.44062G	-5.13	6.3442G	-54.44	-45.13	-9.31	3
6465MHz	Pass	6.49857G	-4.86	6.3382G	-54.40	-44.86	-9.54	4
6545MHz Straddle 6.525-6.875GHz	Pass	6.55619G	-6.83	6.7442G	-50.90	-46.83	-4.07	1
6545MHz Straddle 6.525-6.875GHz	Pass	6.53741G	-5.68	6.7422G	-50.93	-45.68	-5.25	2
6545MHz Straddle 6.525-6.875GHz	Pass	6.57897G	-6.33	6.7434G	-50.85	-46.33	-4.52	3
6545MHz Straddle 6.525-6.875GHz	Pass	6.56018G	-6.36	6.745G	-50.89	-46.36	-4.53	4
6625MHz	Pass	6.63819G	-6.24	6.7762G	-50.47	-46.24	-4.23	1
6625MHz	Pass	6.65977G	-4.23	6.7754G	-50.39	-44.23	-6.16	2
6625MHz	Pass	6.65617G	-6.23	6.7914G	-50.48	-46.23	-4.25	3
6625MHz	Pass	6.64858G	-5.74	6.7706G	-50.51	-45.74	-4.77	4
6705MHz	Pass	6.66864G	-5.70	6.9034G	-53.78	-45.70	-8.08	1
6705MHz	Pass	6.67943G	-4.30	6.905G	-53.73	-44.30	-9.43	2
6705MHz	Pass	6.73977G	-5.61	6.905G	-53.80	-45.61	-8.19	3
6705MHz	Pass	6.73057G	-5.27	6.9034G	-53.87	-45.27	-8.60	4
6785MHz	Pass	6.77381G	-6.92	6.9454G	-49.97	-46.92	-3.05	1
6785MHz	Pass	6.77661G	-4.83	6.9466G	-50.02	-44.83	-5.19	2
6785MHz	Pass	6.7826G	-5.87	6.9506G	-49.98	-45.87	-4.11	3
6785MHz	Pass	6.81737G	-5.86	6.9586G	-50.03	-45.86	-4.17	4
6865MHz Straddle 6.525-6.875GHz	Pass	6.88738G	-6.82	6.9882G	-50.25	-46.82	-3.43	1
6865MHz Straddle 6.525-6.875GHz	Pass	6.87739G	-5.12	6.9862G	-50.24	-45.12	-5.12	2
6865MHz Straddle 6.525-6.875GHz	Pass	6.87659G	-5.33	6.9942G	-50.14	-45.33	-4.81	3
6865MHz Straddle 6.525-6.875GHz	Pass	6.87379G	-5.64	6.9882G	-50.28	-45.64	-4.64	4
6945MHz	Pass	6.91943G	-6.13	6.7794G	-50.51	-46.13	-4.38	1
6945MHz	Pass	6.95419G	-5.67	6.7778G	-50.53	-45.67	-4.86	2
6945MHz	Pass	6.91183G	-5.72	6.7718G	-50.58	-45.72	-4.86	3
6945MHz	Pass	6.96818G	-5.79	6.7718G	-50.59	-45.79	-4.80	4
7025MHz	Pass	6.99463G	-5.29	7.2226G	-53.43	-45.29	-8.14	1
7025MHz	Pass	7.01741G	-4.10	6.9046G	-53.33	-44.10	-9.23	2


Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
7025MHz	Pass	6.99423G	-5.07	7.2102G	-53.45	-45.07	-8.38	3
7025MHz	Pass	7.04978G	-4.81	7.2182G	-53.32	-44.81	-8.51	4
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-
6025MHz	Pass	6.03859G	-4.85	6.2906G	-51.55	-44.85	-6.70	1
6025MHz	Pass	6.07935G	-3.10	6.2738G	-51.54	-43.10	-8.44	2
6025MHz	Pass	6.08734G	-3.77	6.269G	-51.52	-43.77	-7.75	3
6025MHz	Pass	6.10172G	-3.45	6.4146G	-51.41	-43.45	-7.96	4
6185MHz	Pass	6.26012G	-3.86	6.509G	-51.15	-43.86	-7.29	1
6185MHz	Pass	6.25293G	-3.67	6.5058G	-51.21	-43.67	-7.54	2
6185MHz	Pass	6.20178G	-4.32	6.5058G	-51.19	-44.32	-6.87	3
6185MHz	Pass	6.17461G	-4.06	6.5066G	-51.12	-44.06	-7.06	4
6345MHz	Pass	6.41293G	-4.42	6.097G	-51.62	-44.42	-7.20	1
6345MHz	Pass	6.36018G	-3.04	6.097G	-51.28	-43.04	-8.24	2
6345MHz	Pass	6.39055G	-4.11	6.1018G	-51.33	-44.11	-7.22	3
6345MHz	Pass	6.37777G	-4.43	6.1026G	-51.78	-44.43	-7.35	4
6505MHz Straddle 6.525-6.875GHz	Pass	6.57293G	-2.48	6.2466G	-50.34	-42.48	-7.86	1
6505MHz Straddle 6.525-6.875GHz	Pass	6.49701G	-2.04	6.2306G	-50.08	-42.04	-8.04	2
6505MHz Straddle 6.525-6.875GHz	Pass	6.49861G	-1.79	6.2474G	-50.09	-41.79	-8.30	3
6505MHz Straddle 6.525-6.875GHz	Pass	6.48662G	-1.94	6.2602G	-50.41	-41.94	-8.47	4
6665MHz	Pass	6.69137G	-3.29	7.009G	-49.86	-43.29	-6.57	1
6665MHz	Pass	6.74172G	-0.99	6.9986G	-49.89	-40.99	-8.90	2
6665MHz	Pass	6.70096G	-3.30	7.0082G	-49.72	-43.30	-6.42	3
6665MHz	Pass	6.74092G	-2.30	7.0034G	-50.01	-42.30	-7.71	4
6825MHz Straddle 6.525-6.875GHz	Pass	6.79623G	-3.32	7.2162G	-50.25	-43.32	-6.93	1
6825MHz Straddle 6.525-6.875GHz	Pass	6.86096G	-1.04	6.509G	-50.09	-41.04	-9.05	2
6825MHz Straddle 6.525-6.875GHz	Pass	6.821G	-2.90	7.1994G	-50.18	-42.90	-7.28	3
6825MHz Straddle 6.525-6.875GHz	Pass	6.86176G	-2.46	6.509G	-49.69	-42.46	-7.23	4
6985MHz	Pass	6.90988G	-2.04	7.3842G	-50.20	-42.04	-8.16	1
6985MHz	Pass	6.97941G	-1.23	7.3842G	-50.10	-41.23	-8.87	2
6985MHz	Pass	6.91147G	-1.79	7.381G	-50.21	-41.79	-8.42	3
6985MHz	Pass	7.03935G	-1.80	7.2506G	-50.13	-41.80	-8.33	4
802.11be EHT320_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-
6105MHz	Pass	6.097G	-0.92	6.9034G	-46.80	-40.92	-5.88	1
6105MHz	Pass	6.113G	1.16	6.9002G	-46.79	-38.84	-7.95	2
6105MHz	Pass	6.1178G	-0.72	6.9034G	-46.96	-40.72	-6.24	3
6105MHz	Pass	6.1178G	-0.48	6.8922G	-46.90	-40.48	-6.42	4
6265MHz	Pass	6.3353G	1.46	6.9802G	-45.55	-38.54	-7.01	1
6265MHz	Pass	6.2938G	0.44	6.9978G	-45.95	-39.56	-6.39	2
6265MHz	Pass	6.2762G	-0.78	7.009G	-46.01	-40.78	-5.23	3
6265MHz	Pass	6.2906G	-0.80	6.9978G	-46.01	-40.80	-5.21	4
6425MHz	Pass	6.4378G	-0.50	7.0026G	-45.79	-40.50	-5.29	1
6425MHz	Pass	6.4362G	0.32	7.009G	-45.79	-39.68	-6.11	2

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
6425MHz	Pass	6.433G	0.13	7.009G	-45.56	-39.87	-5.69	3
6425MHz	Pass	6.4346G	0.32	7.001G	-45.67	-39.68	-5.99	4
6585MHz Straddle 6.525-6.875GHz	Pass	6.6314G	1.46	6.0314G	-44.92	-38.54	-6.38	1
6585MHz Straddle 6.525-6.875GHz	Pass	6.6314G	2.46	6.0298G	-43.60	-37.54	-6.06	2
6585MHz Straddle 6.525-6.875GHz	Pass	6.6138G	1.63	6.081G	-44.46	-38.37	-6.09	3
6585MHz Straddle 6.525-6.875GHz	Pass	6.6905G	1.49	6.0298G	-45.15	-38.51	-6.64	4
6745MHz Straddle 6.525-6.875GHz	Pass	6.7706G	1.07	6.1898G	-44.98	-38.93	-6.05	1
6745MHz Straddle 6.525-6.875GHz	Pass	6.7914G	2.55	6.1802G	-43.51	-37.45	-6.06	2
6745MHz Straddle 6.525-6.875GHz	Pass	6.7738G	1.28	6.185G	-44.32	-38.72	-5.60	3
6745MHz Straddle 6.525-6.875GHz	Pass	6.8169G	1.77	6.1706G	-45.00	-38.23	-6.77	4
6905MHz Straddle 6.525-6.875GHz	Pass	6.8778G	0.83	6.7402G	-22.96	-19.18	-3.78	1
6905MHz Straddle 6.525-6.875GHz	Pass	6.9098G	2.22	6.393G	-44.00	-37.78	-6.22	2
6905MHz Straddle 6.525-6.875GHz	Pass	6.8922G	1.71	6.3898G	-43.49	-38.29	-5.20	3
6905MHz Straddle 6.525-6.875GHz	Pass	6.8954G	1.80	6.3914G	-43.50	-38.20	-5.30	4

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_4TX

MASK


5955MHz_TX

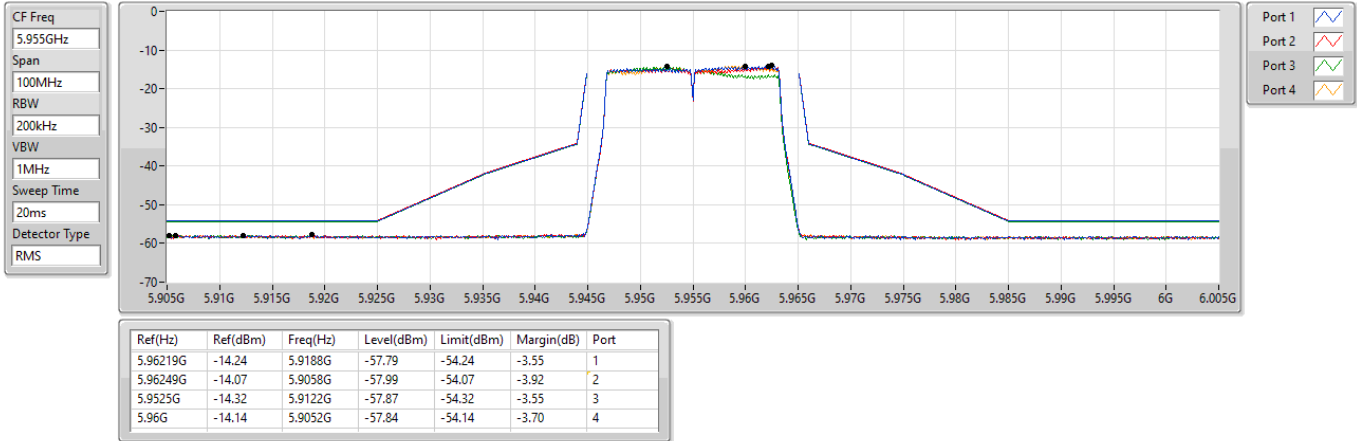

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_4TX

MASK


6175MHz_TX

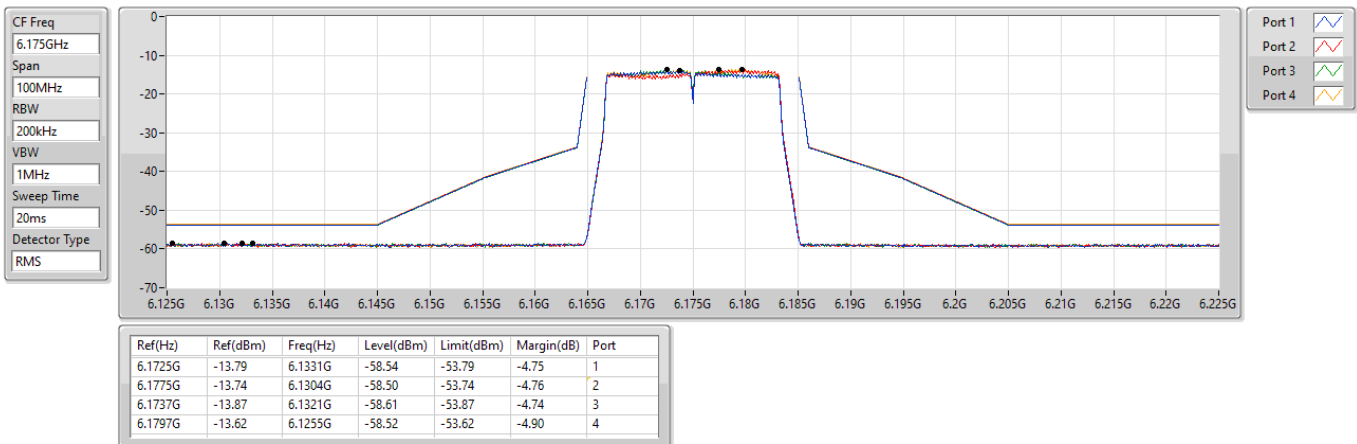

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_4TX

MASK


6415MHz_TX

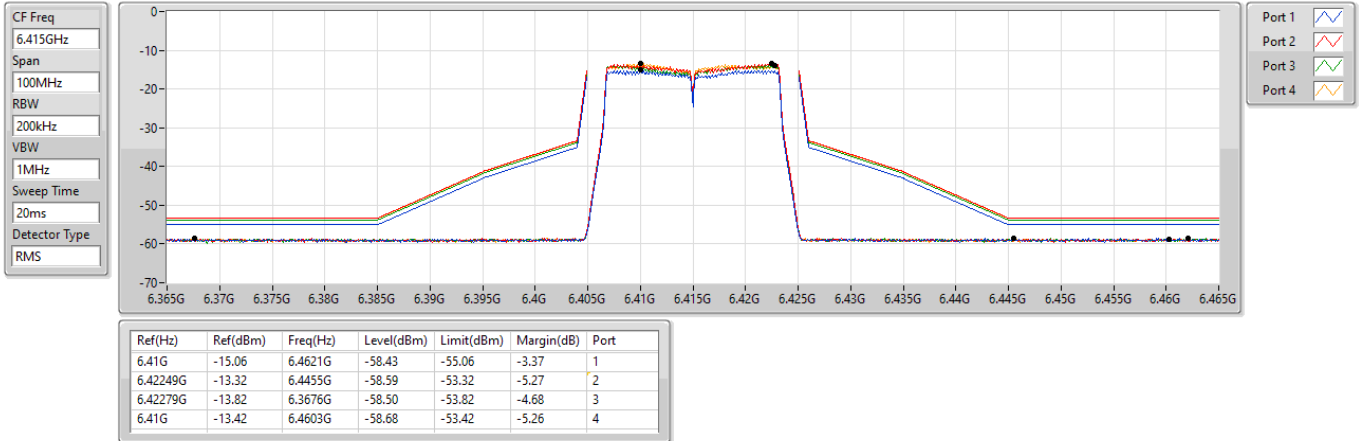

6.425-6.525GHz_802.11a_Nss1,(6Mbps)_4TX

MASK


6435MHz_TX

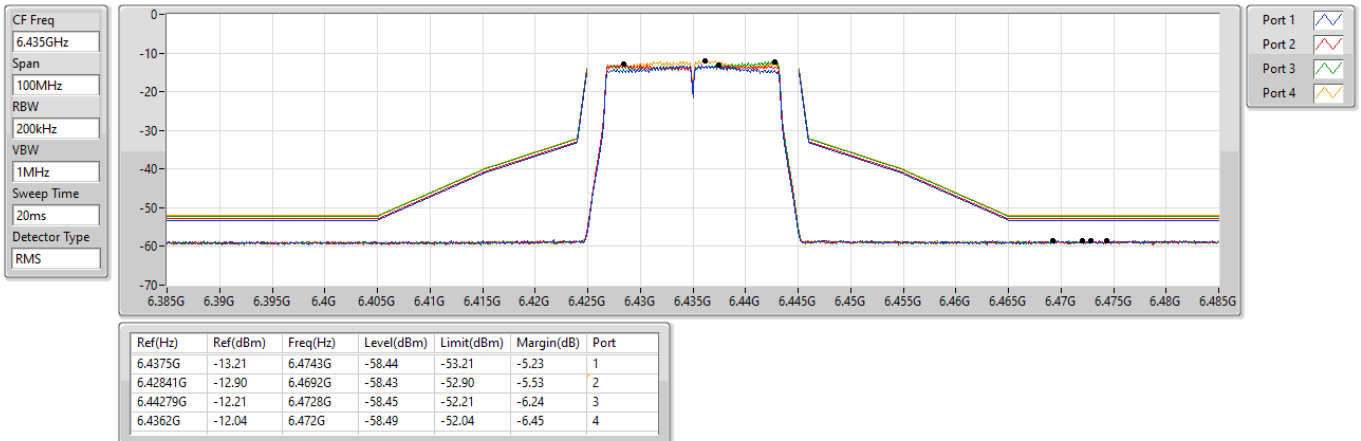

6.425-6.525GHz_802.11a_Nss1,(6Mbps)_4TX

MASK


6475MHz_TX

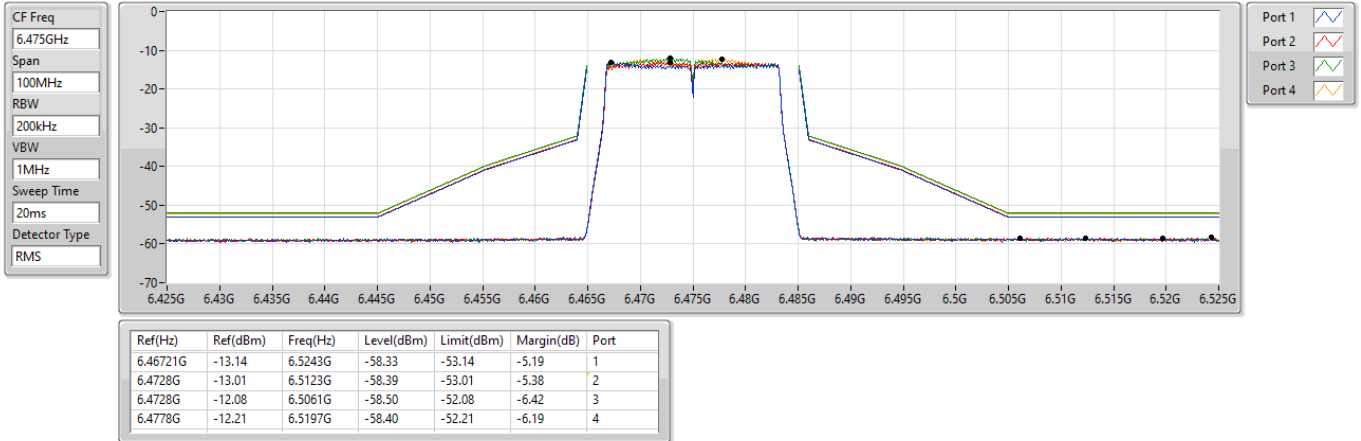

6.425-6.525GHz_802.11a_Nss1,(6Mbps)_4TX

MASK


6515MHz_TX

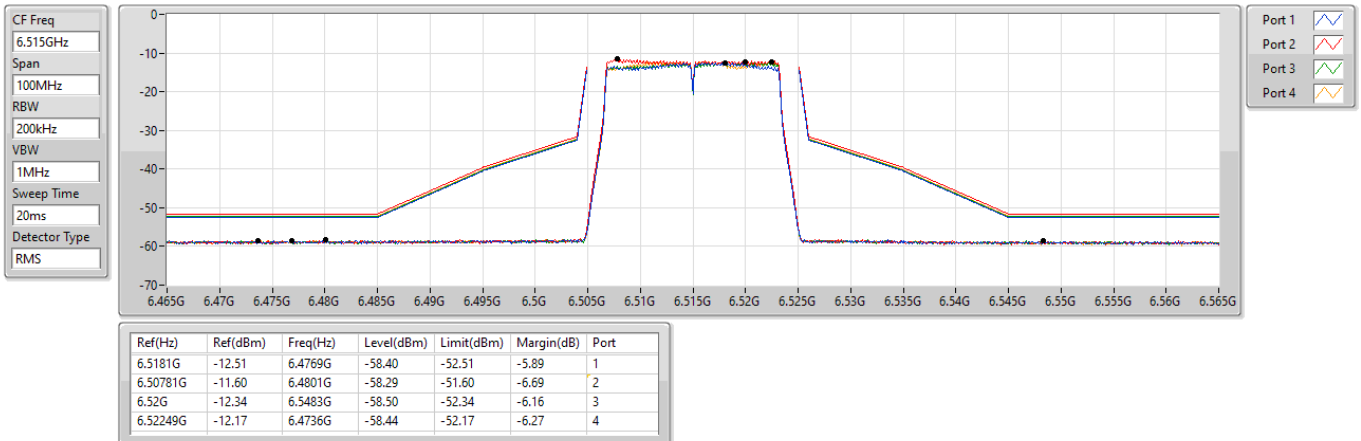

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_4TX

MASK


6535MHz_TX

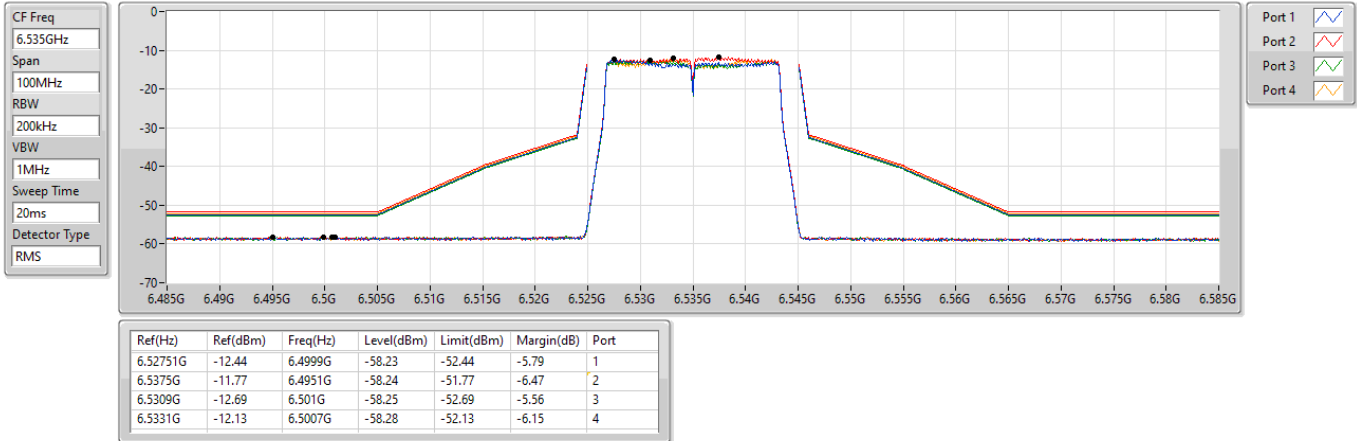

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_4TX

MASK


6715MHz_TX

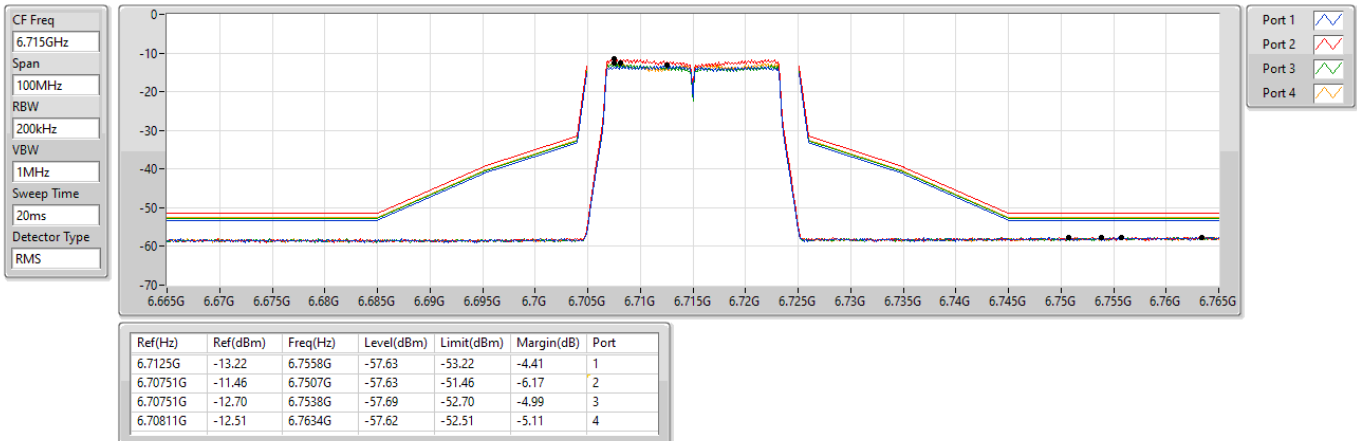

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_4TX

MASK


6855MHz_TX

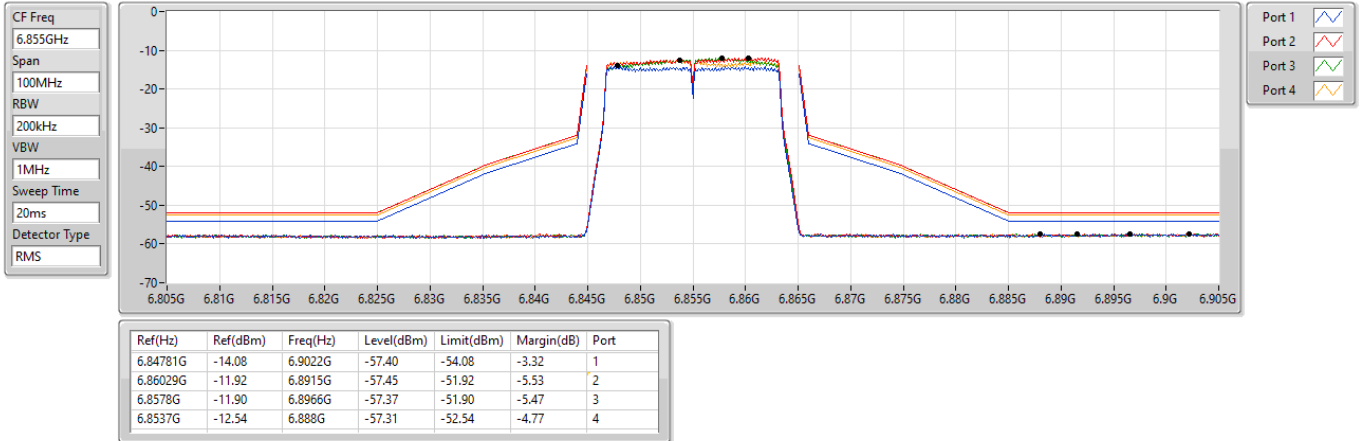

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_4TX

MASK


6875MHz Straddle 6.525-6.875GHz_TX

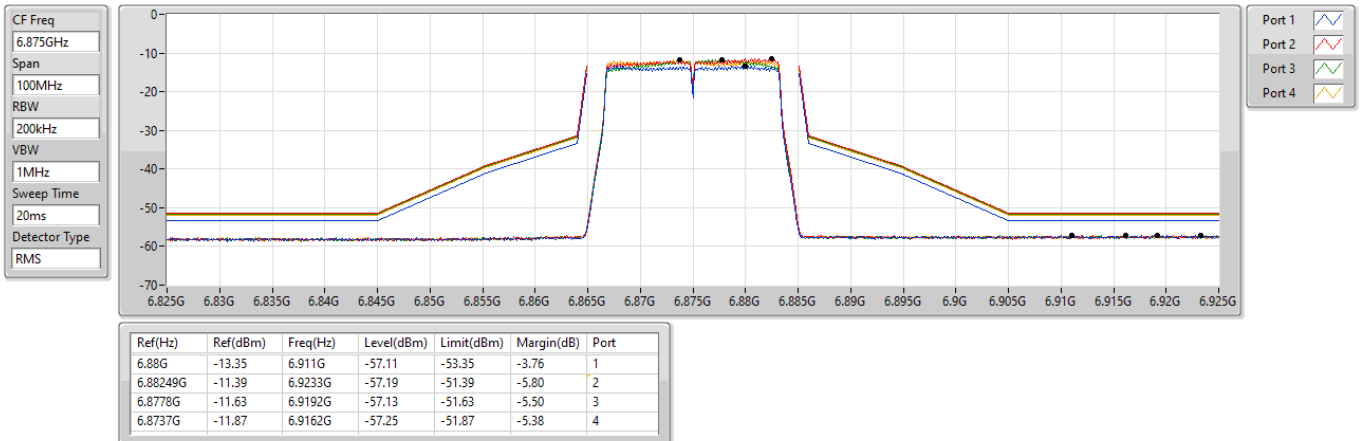

6.875-7.125GHz_802.11a_Nss1,(6Mbps)_4TX

MASK


6895MHz_TX

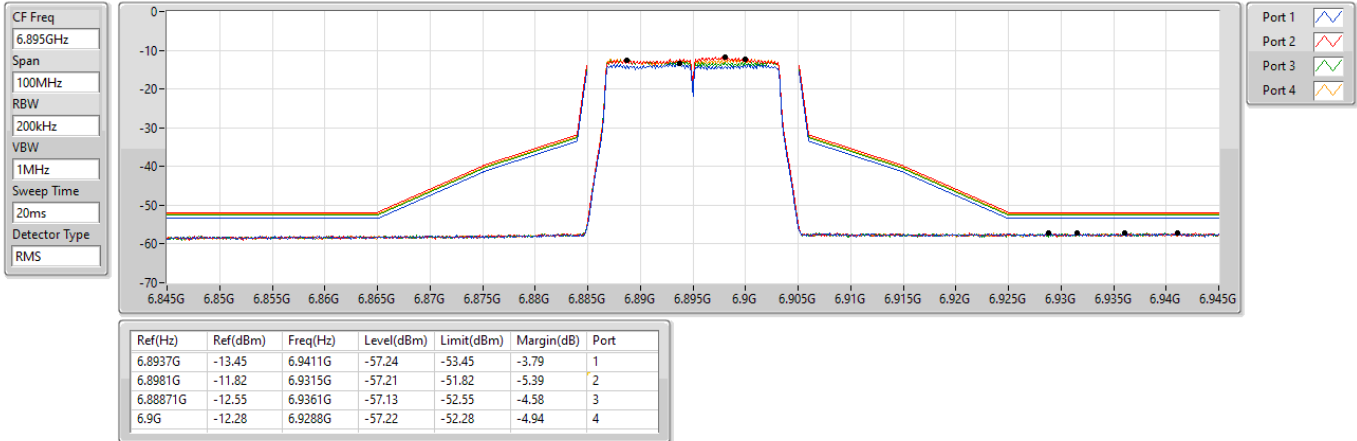

6.875-7.125GHz_802.11a_Nss1,(6Mbps)_4TX

MASK


7015MHz_TX

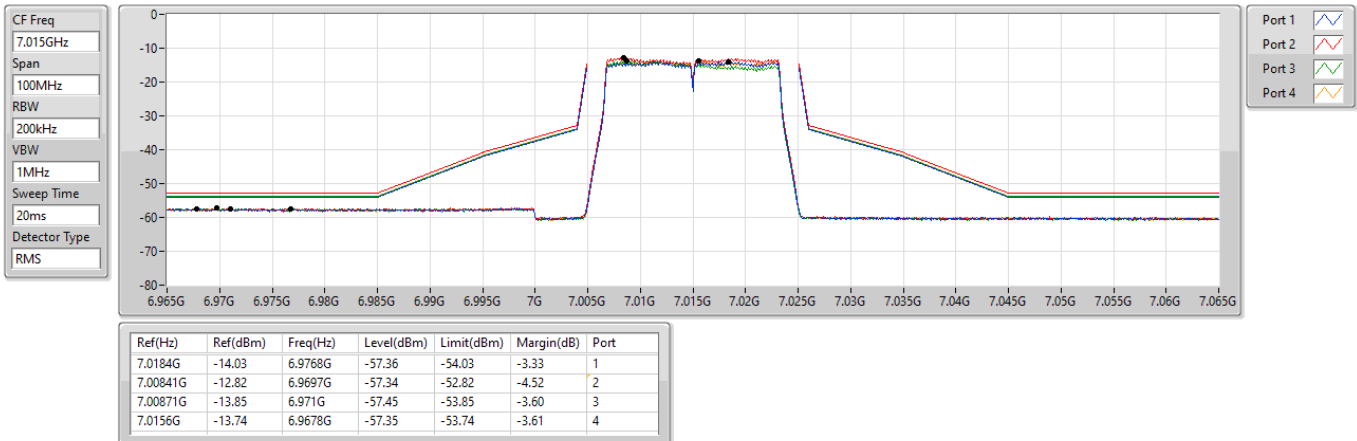

6.875-7.125GHz_802.11a_Nss1,(6Mbps)_4TX

MASK


7095MHz_TX

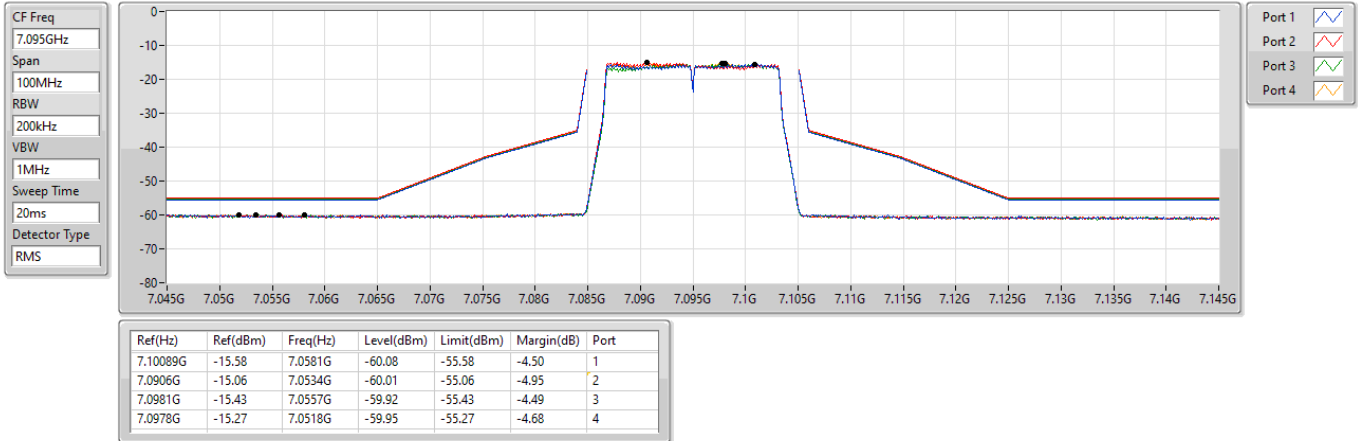

6.875-7.125GHz_802.11a_Nss1,(6Mbps)_4TX

MASK


7115MHz_TX

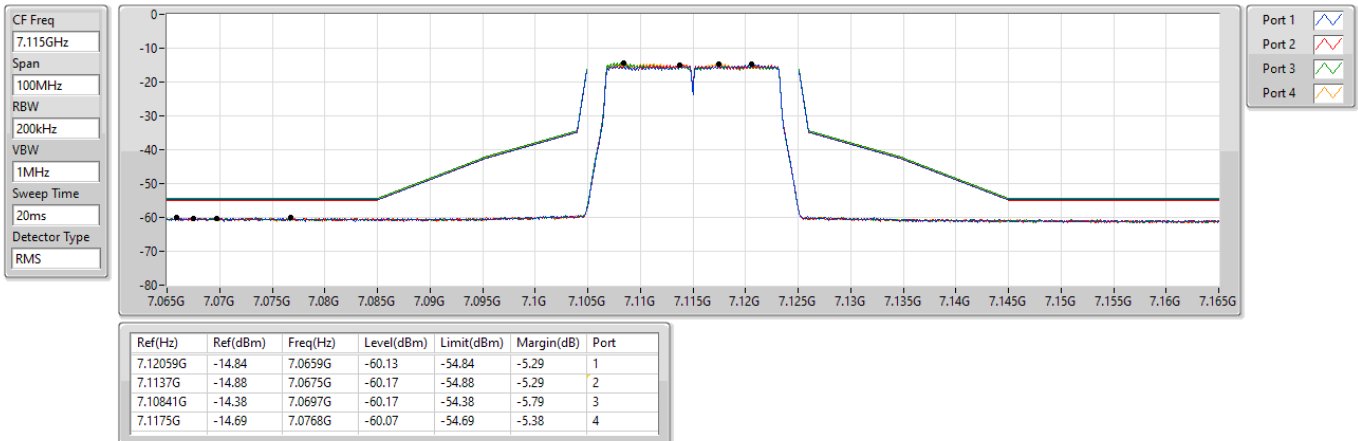

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


5955MHz_TX

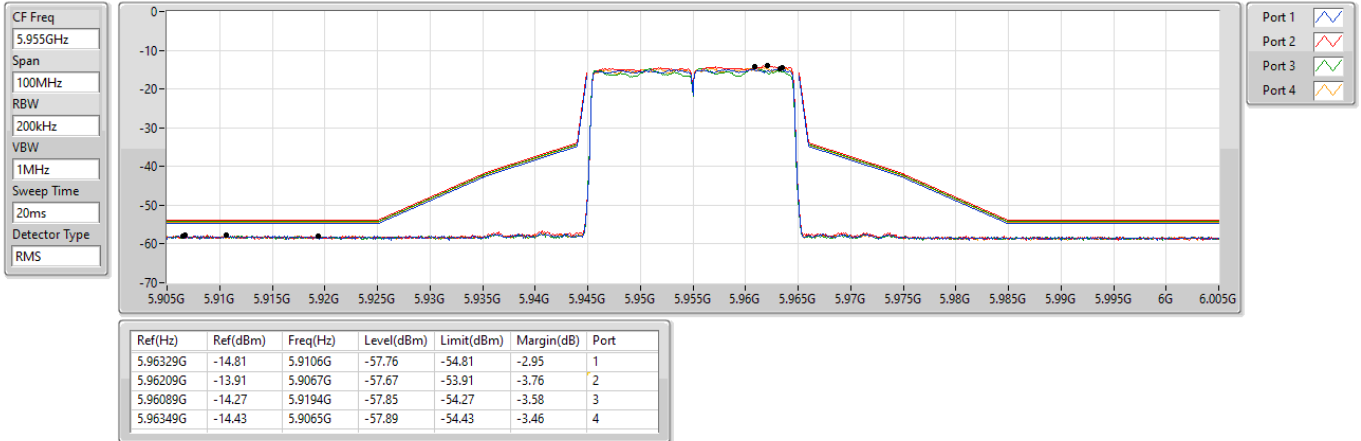

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


6175MHz_TX

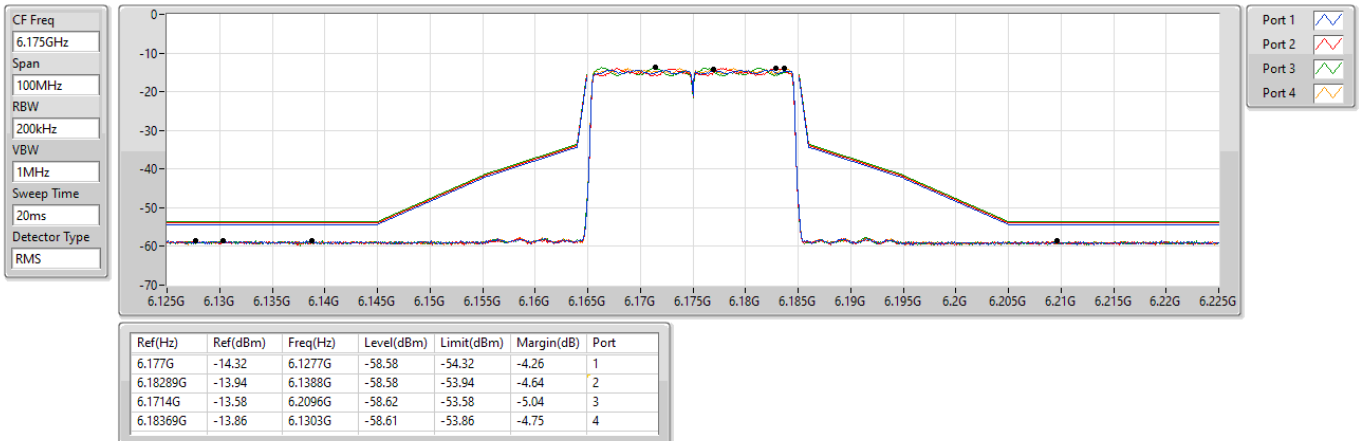

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


6415MHz_TX

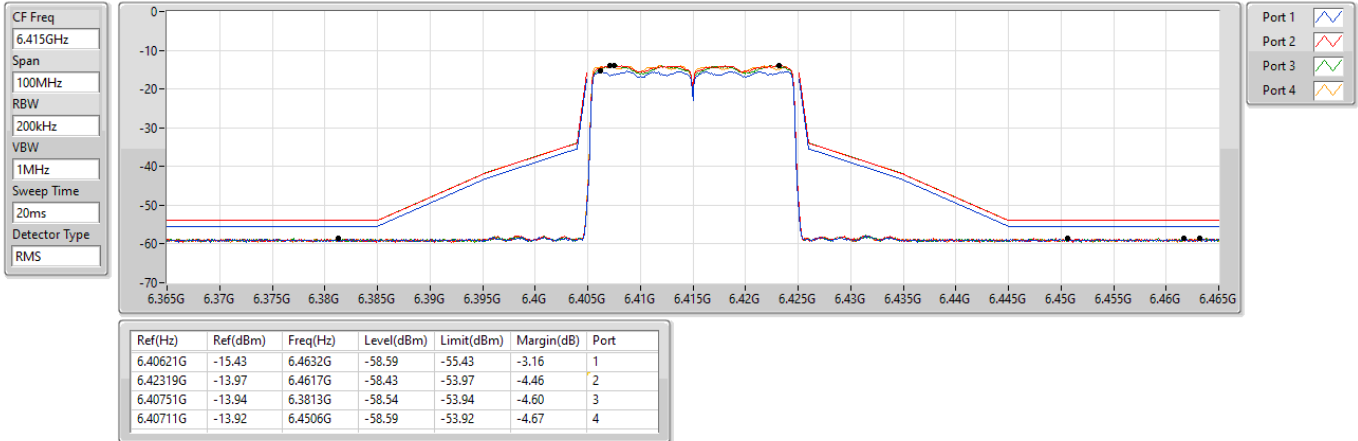

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


6435MHz_TX

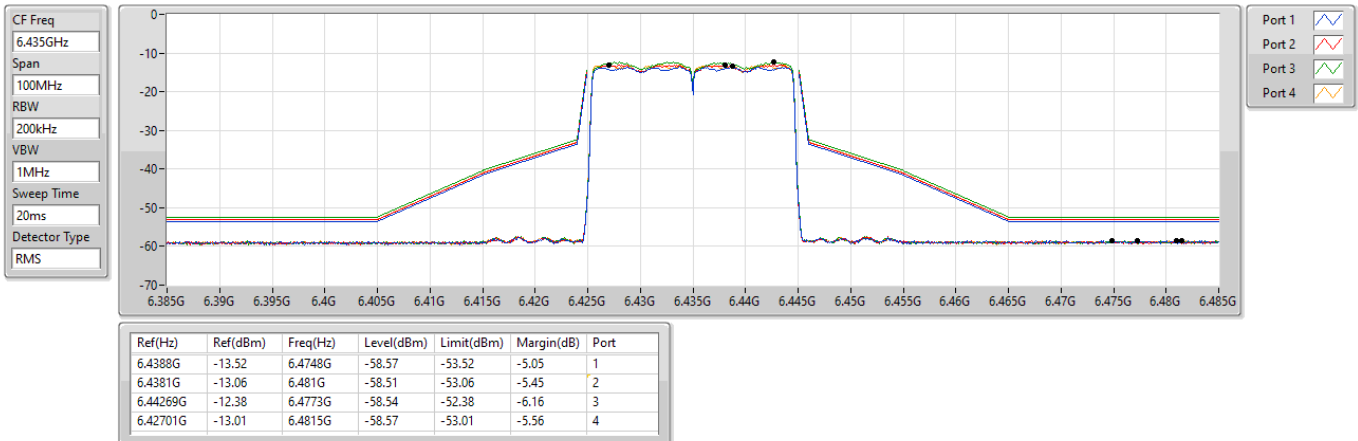

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


6475MHz_TX

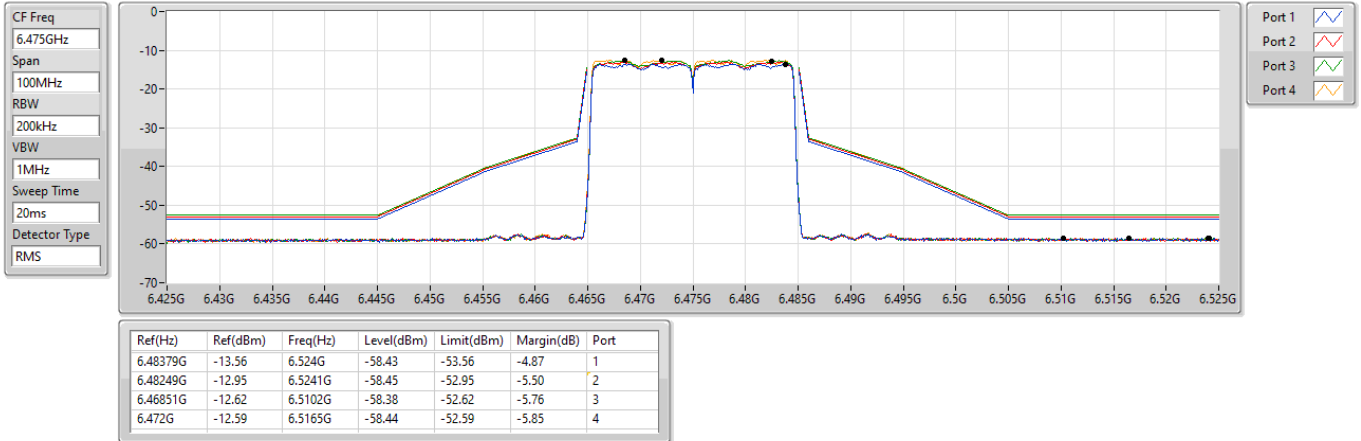

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


6515MHz_TX

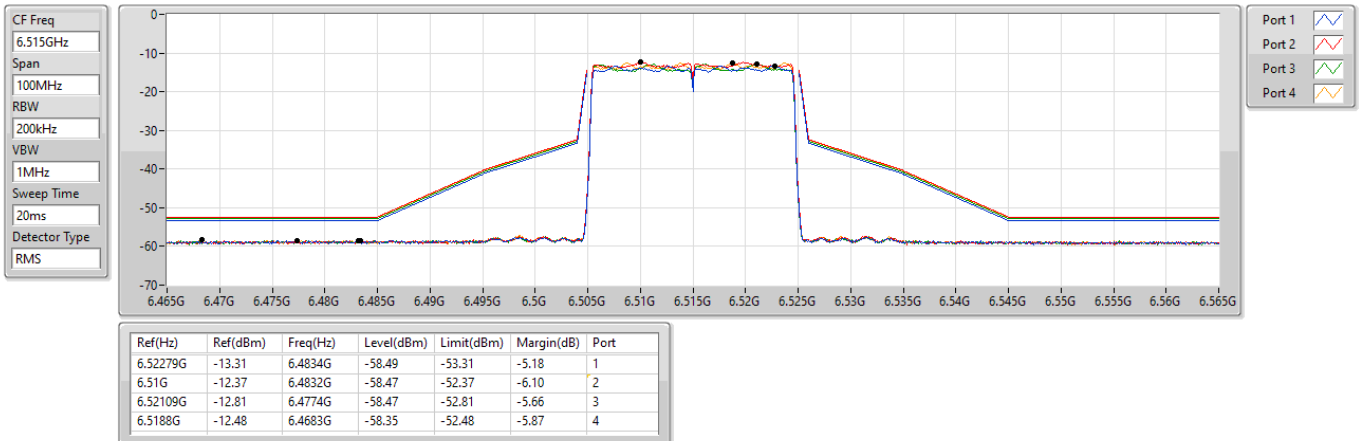

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


6535MHz_TX

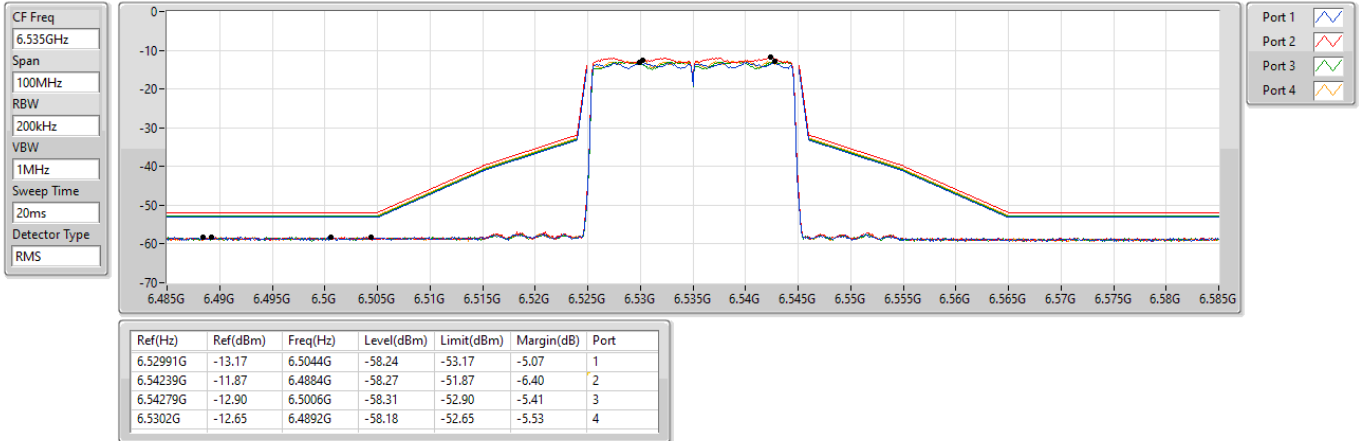

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


6715MHz_TX

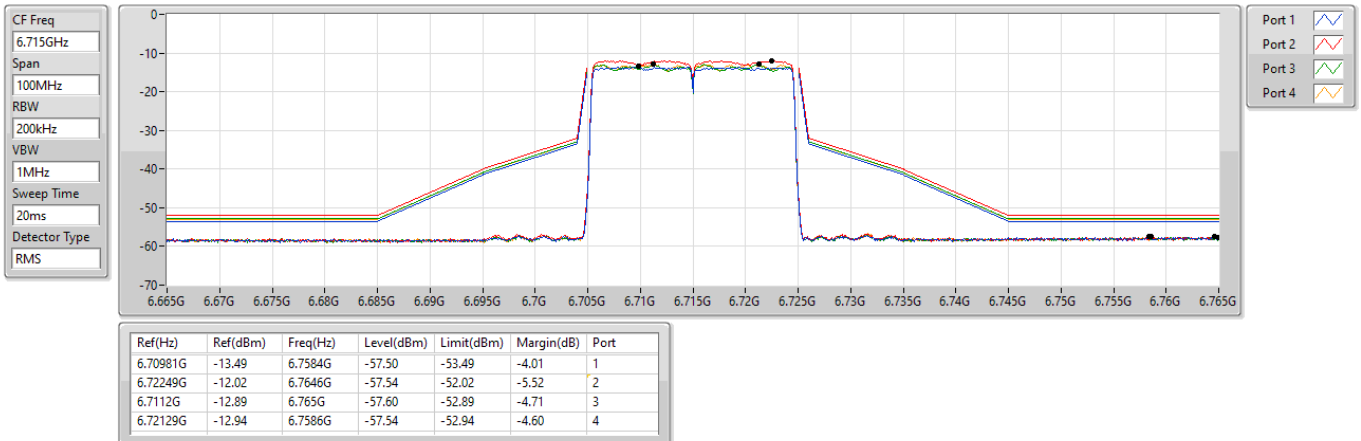

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


6855MHz_TX

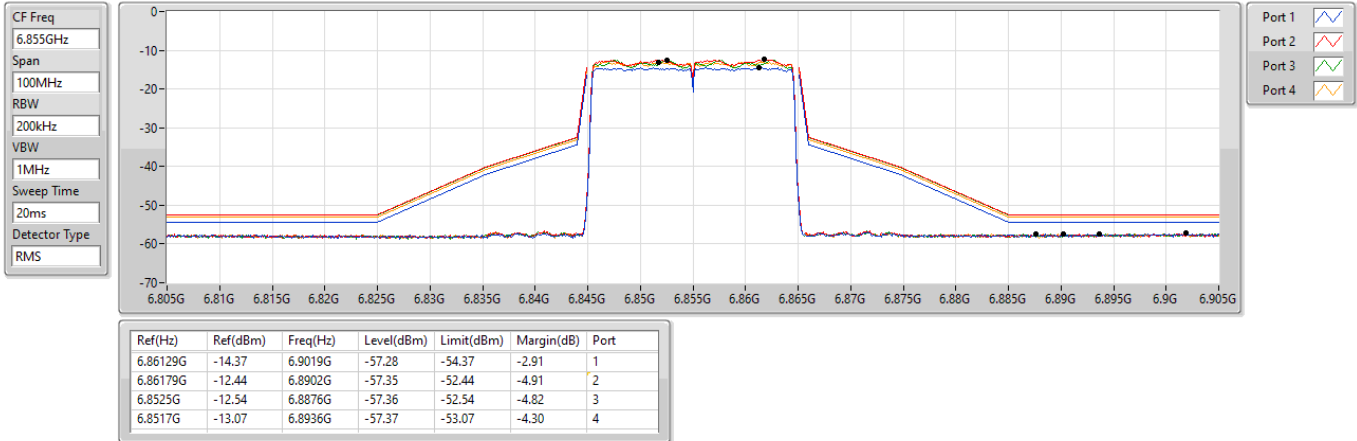

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


6875MHz Straddle 6.525-6.875GHz_TX

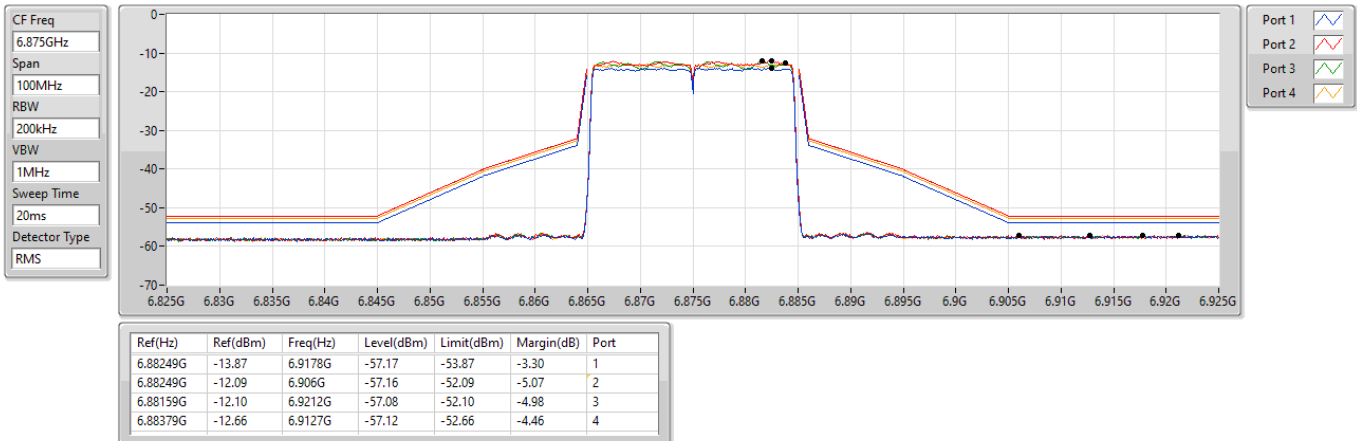

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


6895MHz_TX

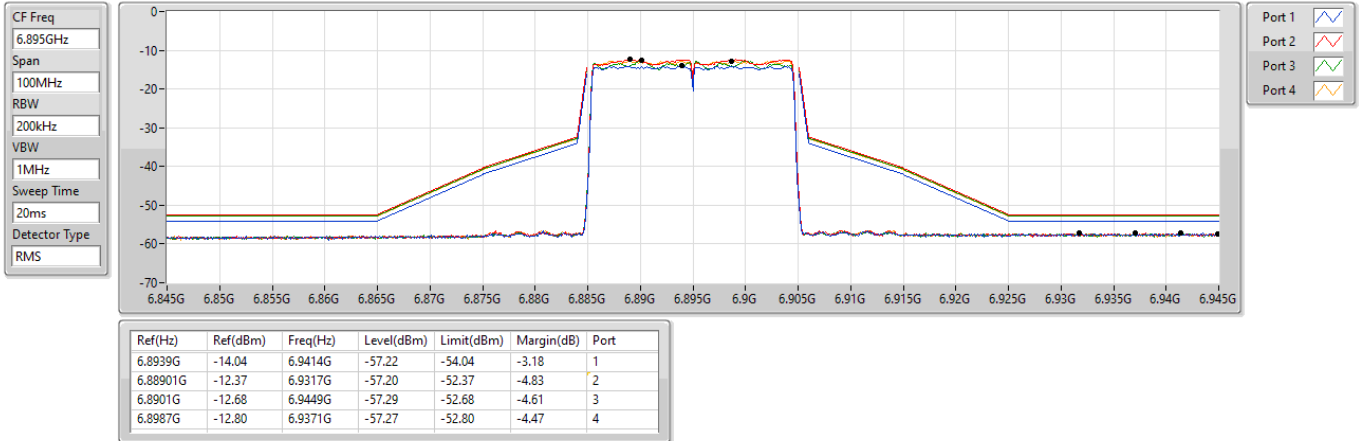

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


7015MHz_TX

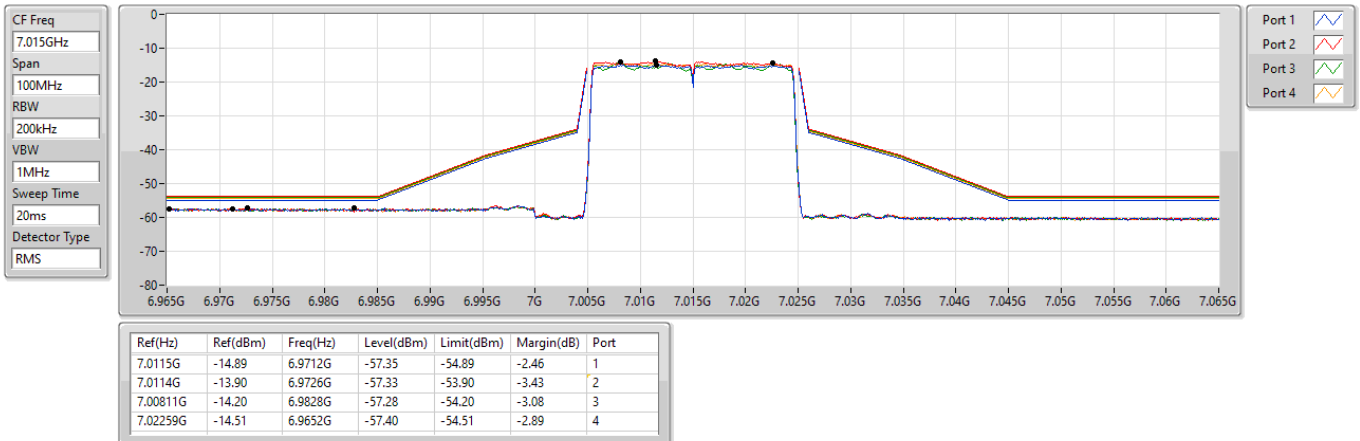

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


7095MHz_TX

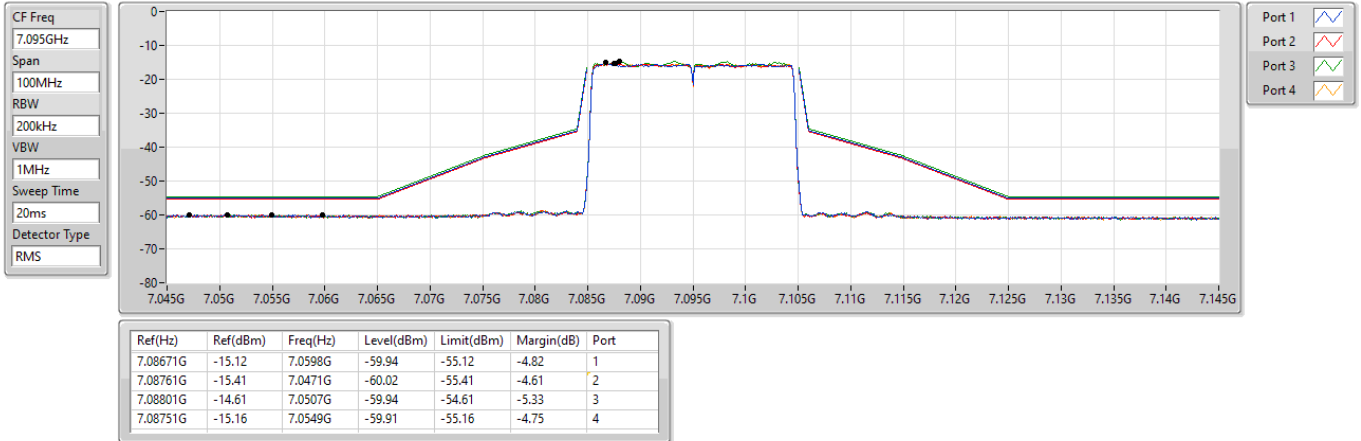

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


7115MHz_TX

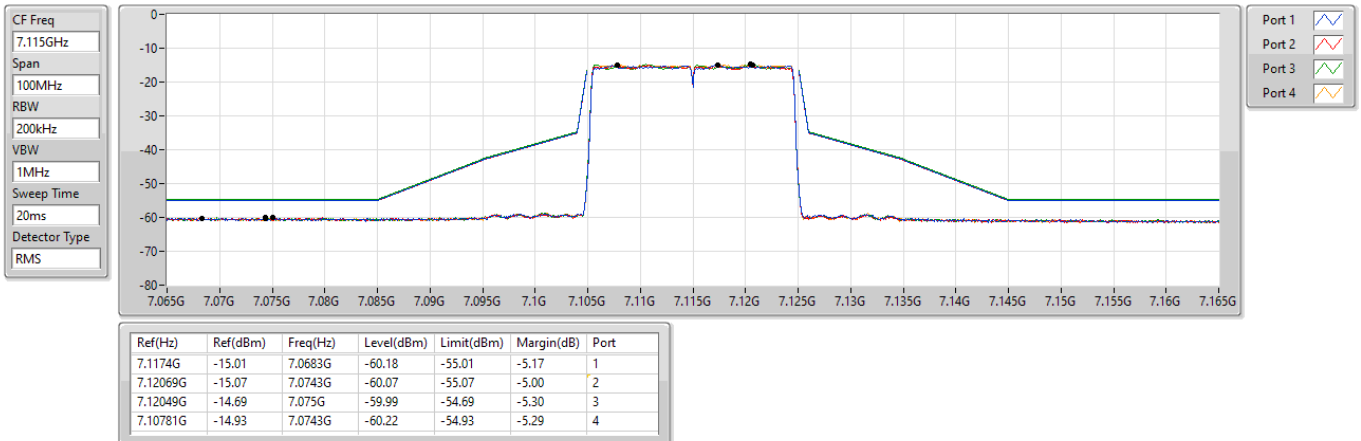

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

MASK


5965MHz_TX

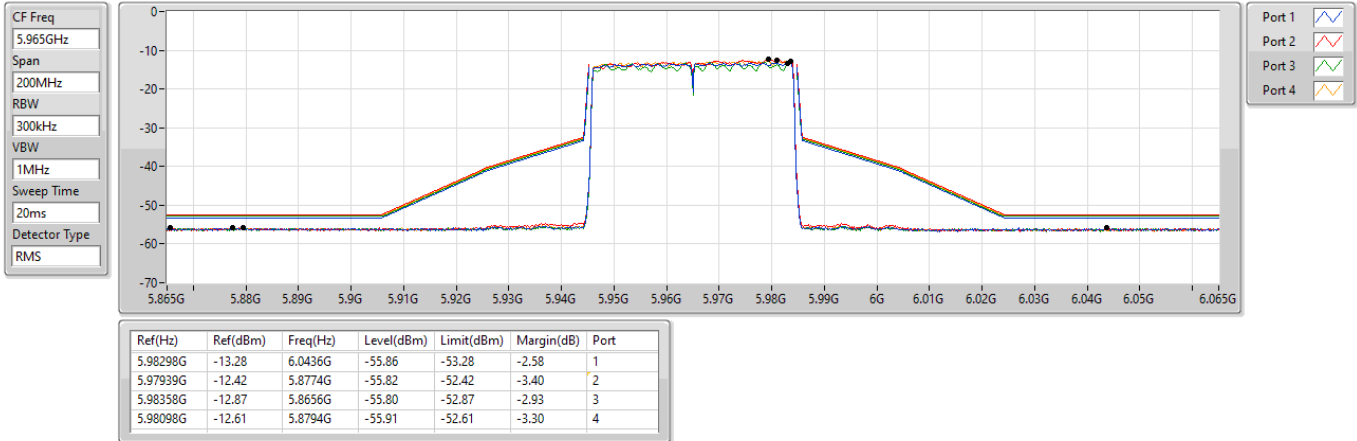

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

MASK


6165MHz_TX

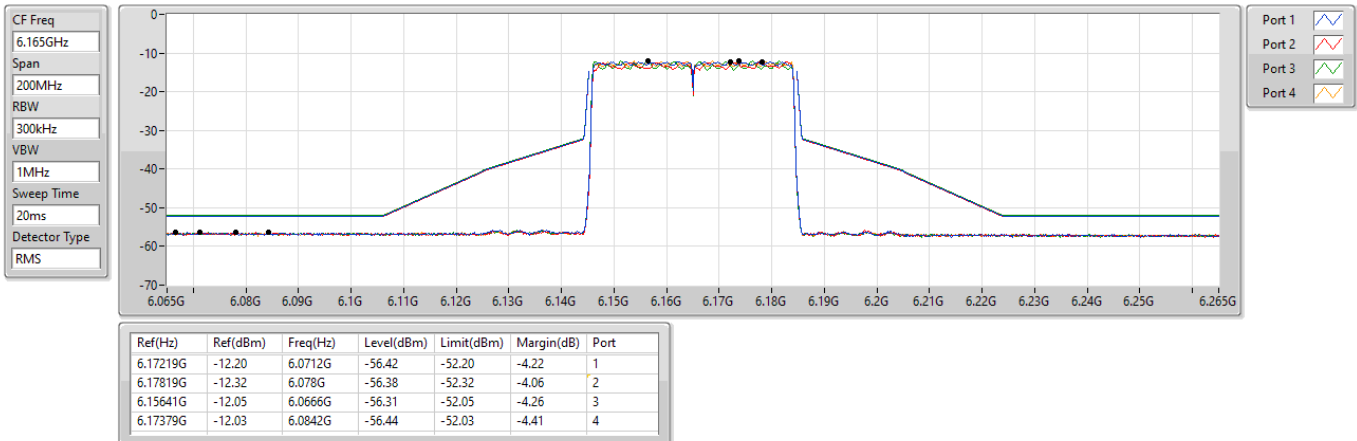

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

MASK


6405MHz_TX

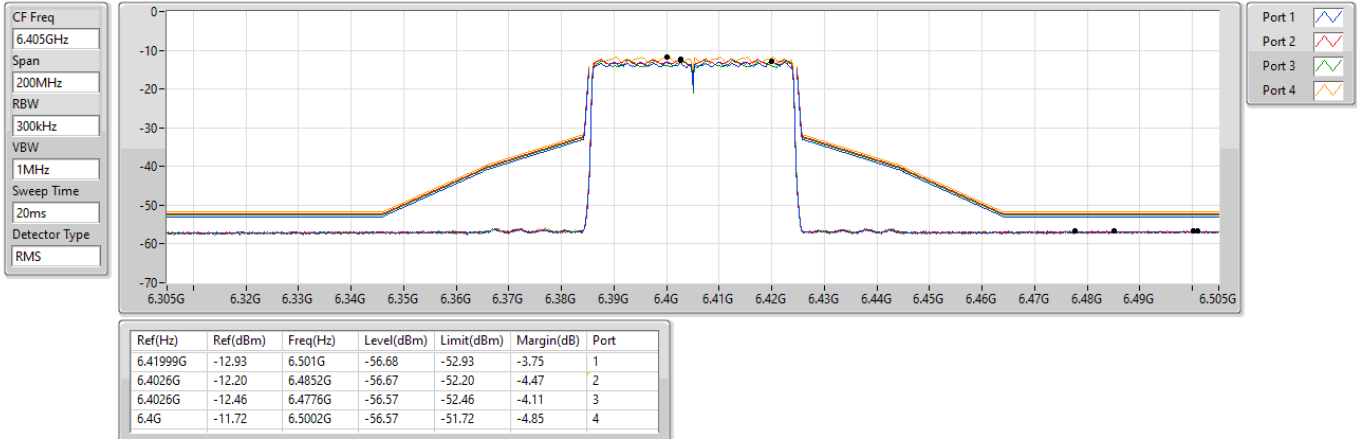

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_4TX

MASK


6445MHz_TX

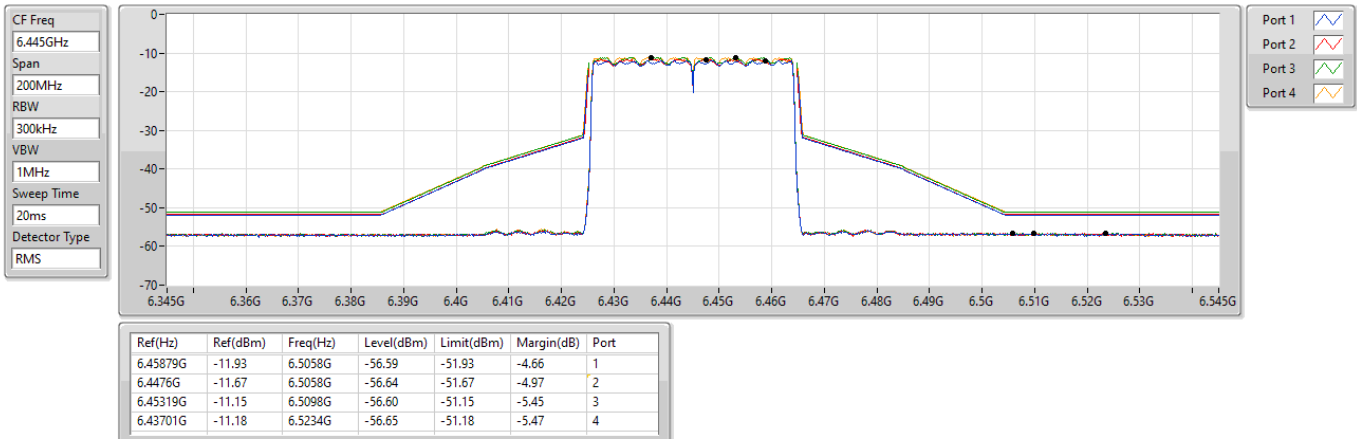

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_4TX

MASK


6485MHz_TX

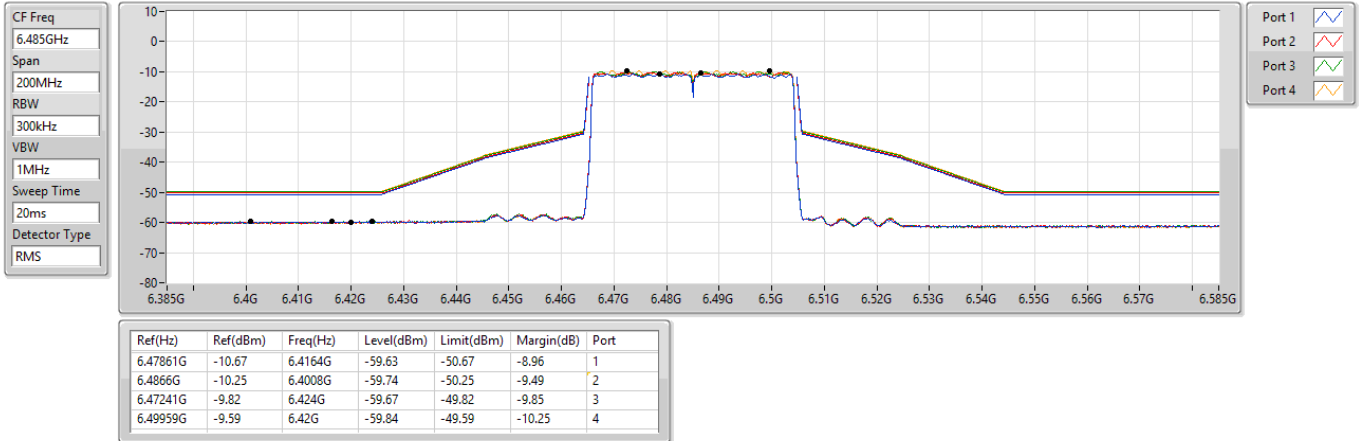

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

MASK


6525MHz Straddle 6.525-6.875GHz_TX

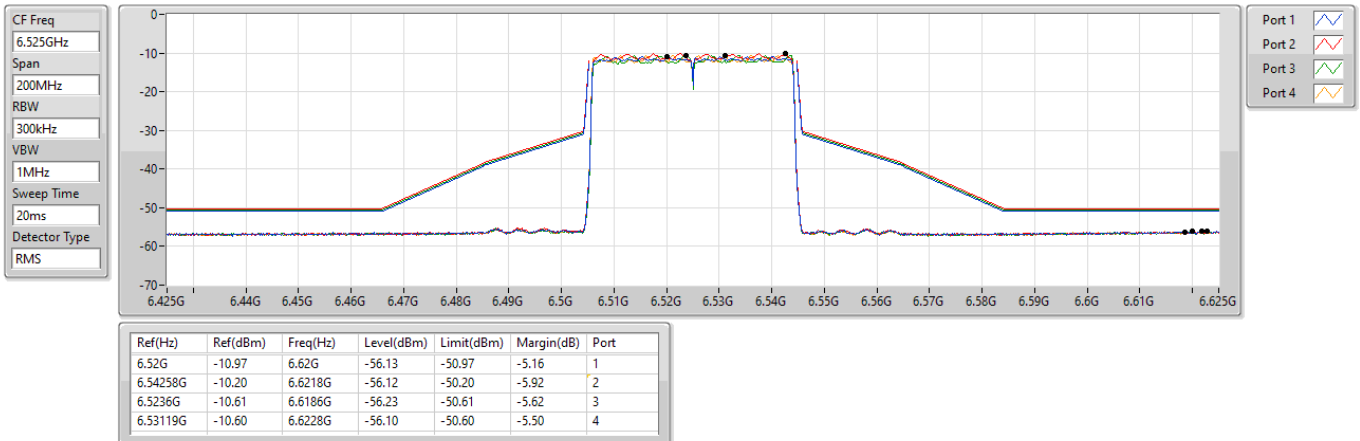

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

MASK


6565MHz_TX

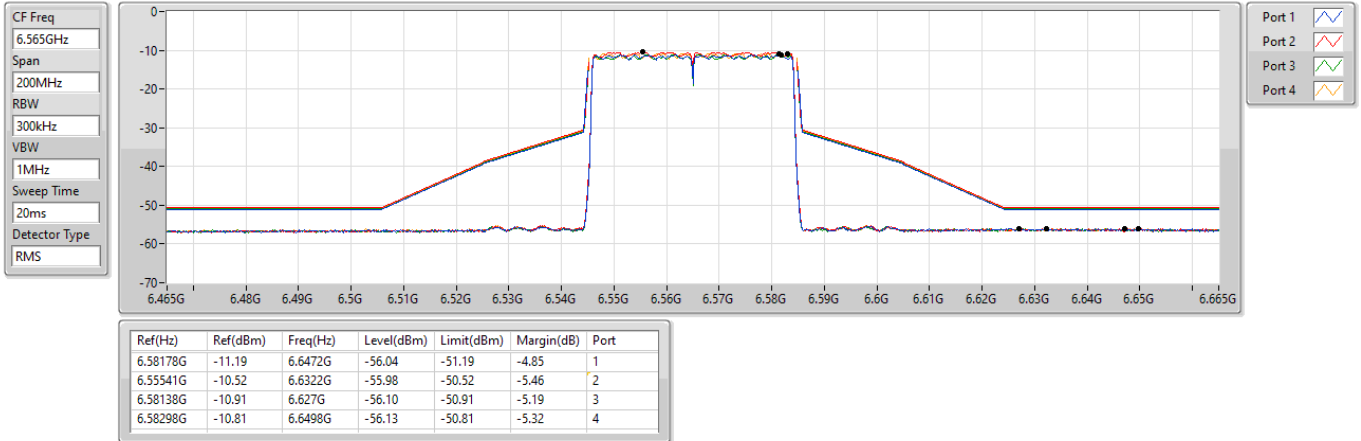

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

MASK


6725MHz_TX

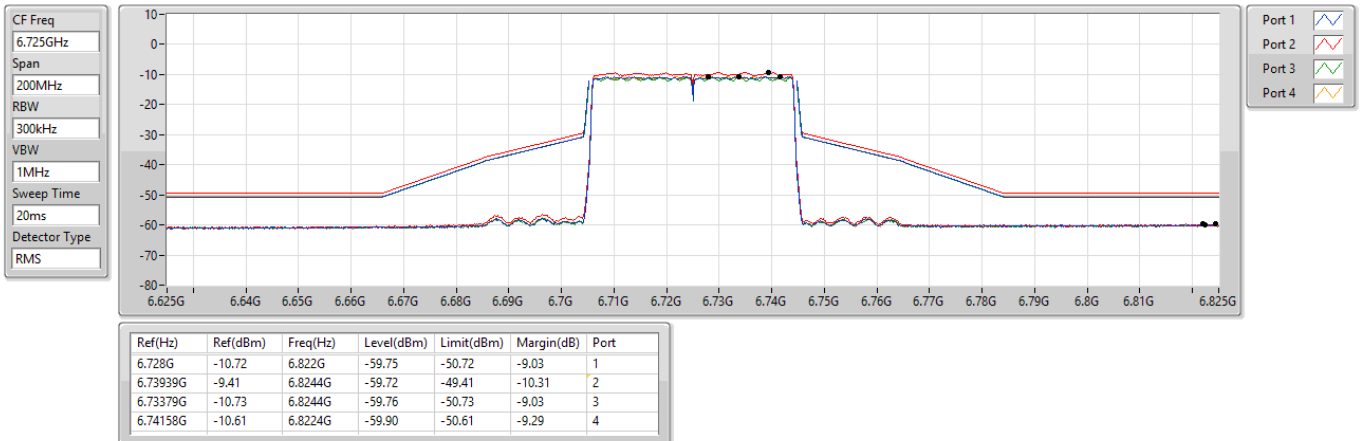

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

MASK


6845MHz_TX

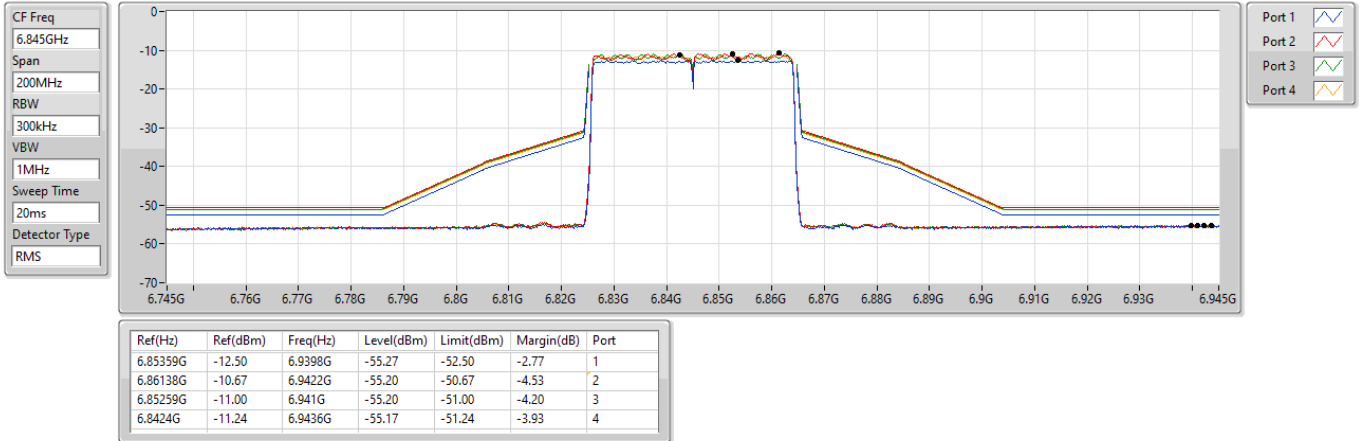

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

MASK


6885MHz Straddle 6.525-6.875GHz_TX

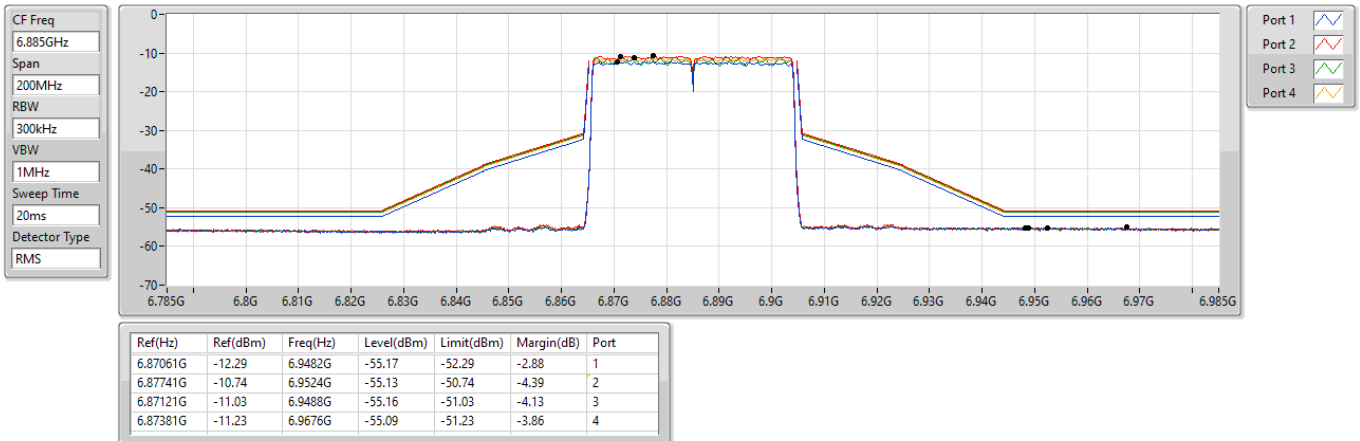

6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_4TX

MASK


6925MHz_TX

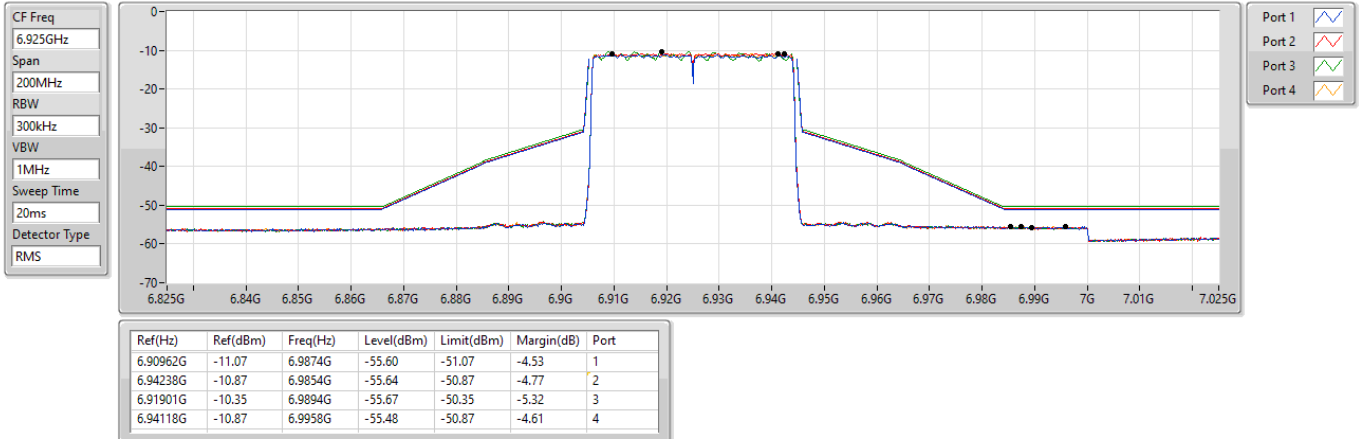

6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_4TX

MASK


7005MHz_TX

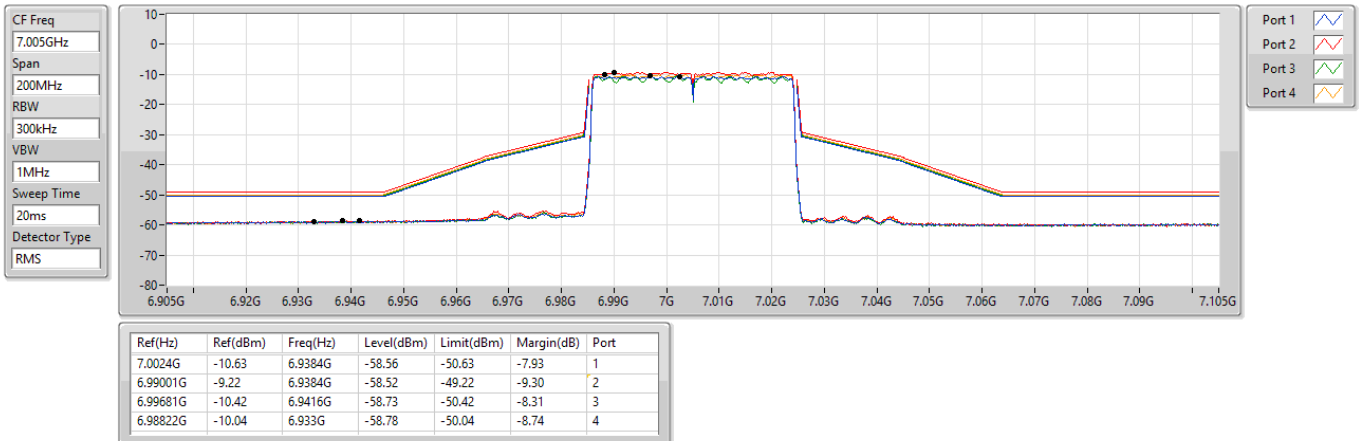

6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_4TX

MASK


7085MHz_TX

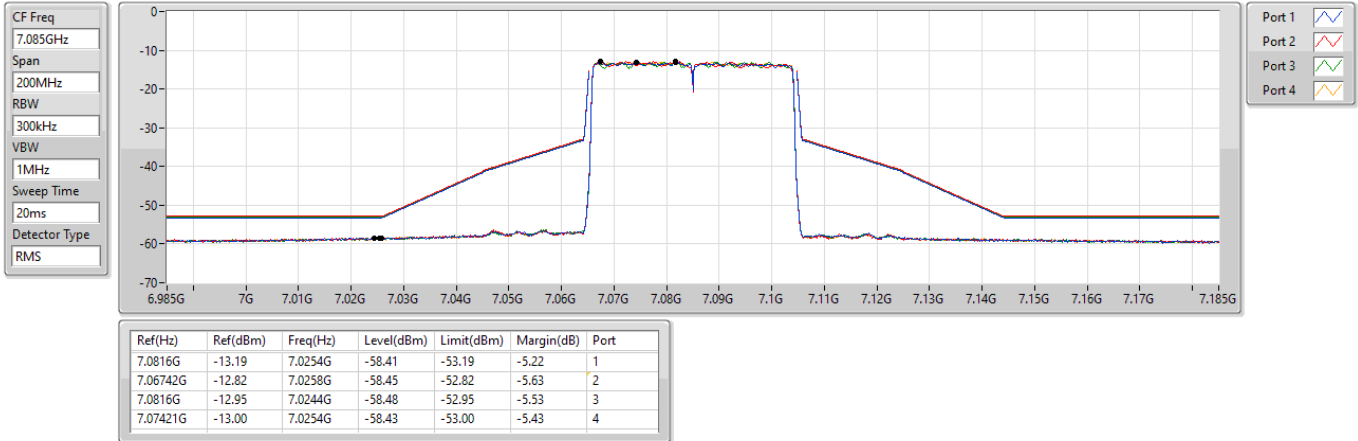

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

MASK


5985MHz_TX

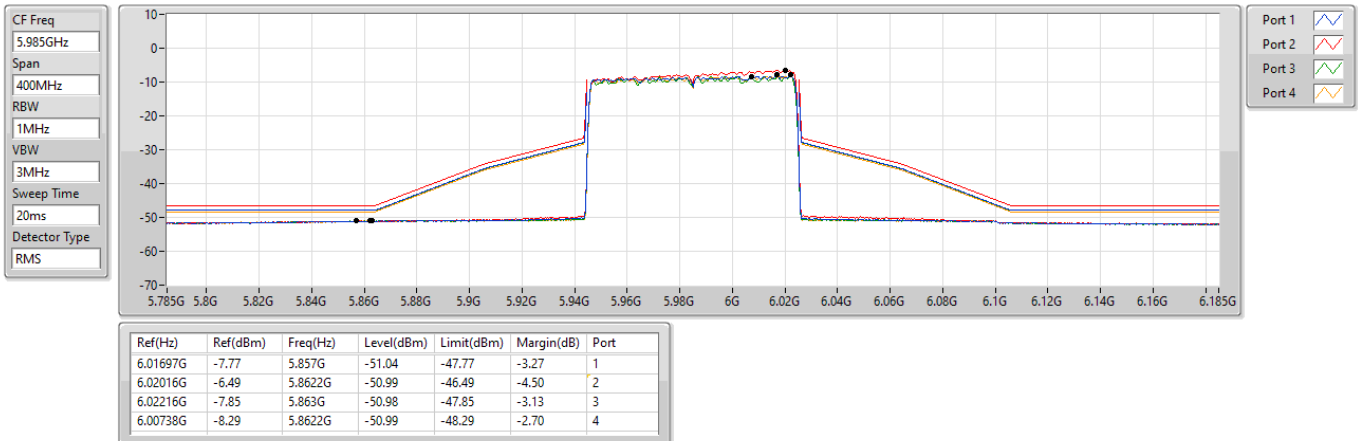

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

MASK


6145MHz_TX

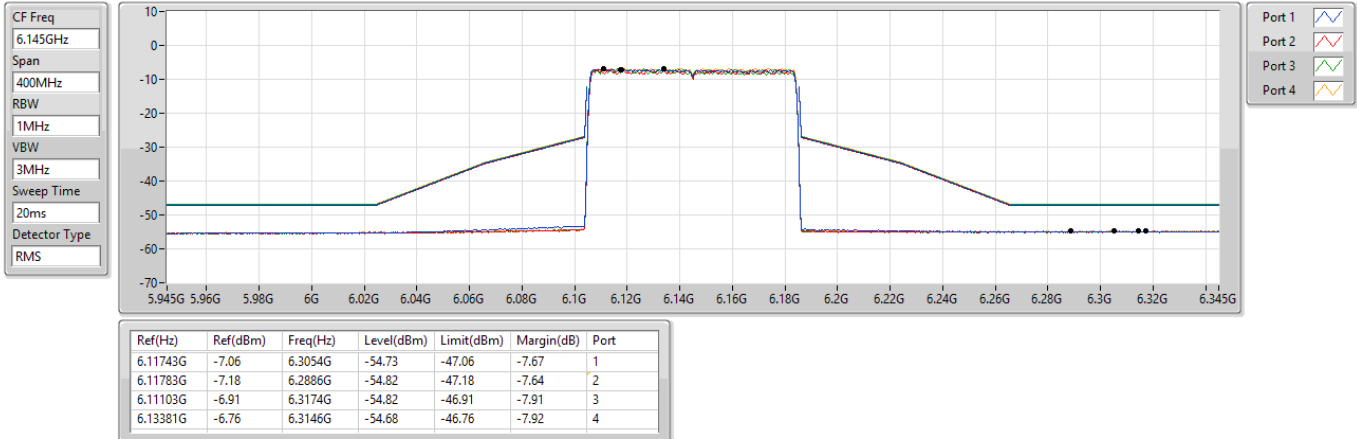

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

MASK


6385MHz_TX

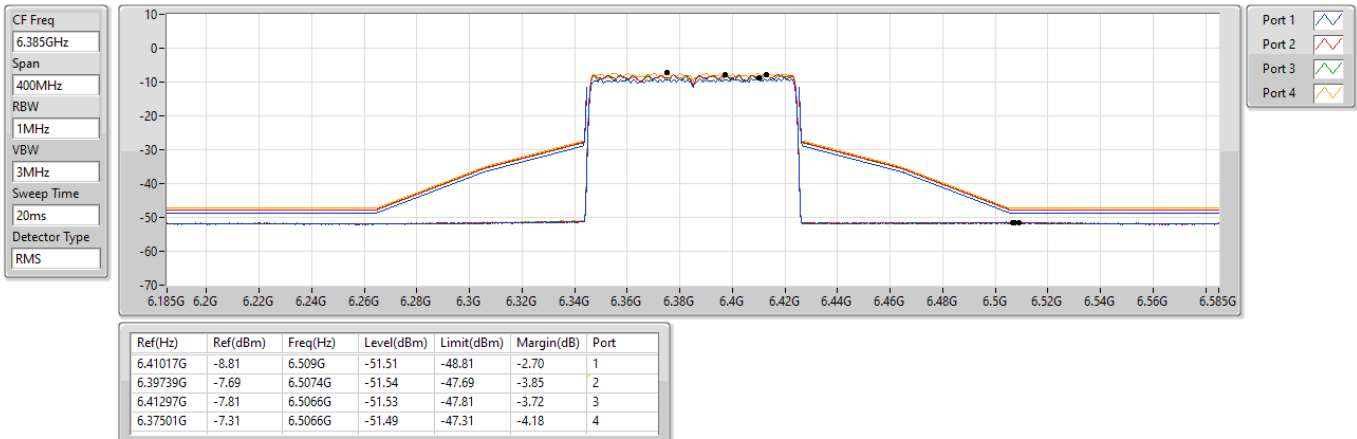

6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_4TX

MASK


6465MHz_TX

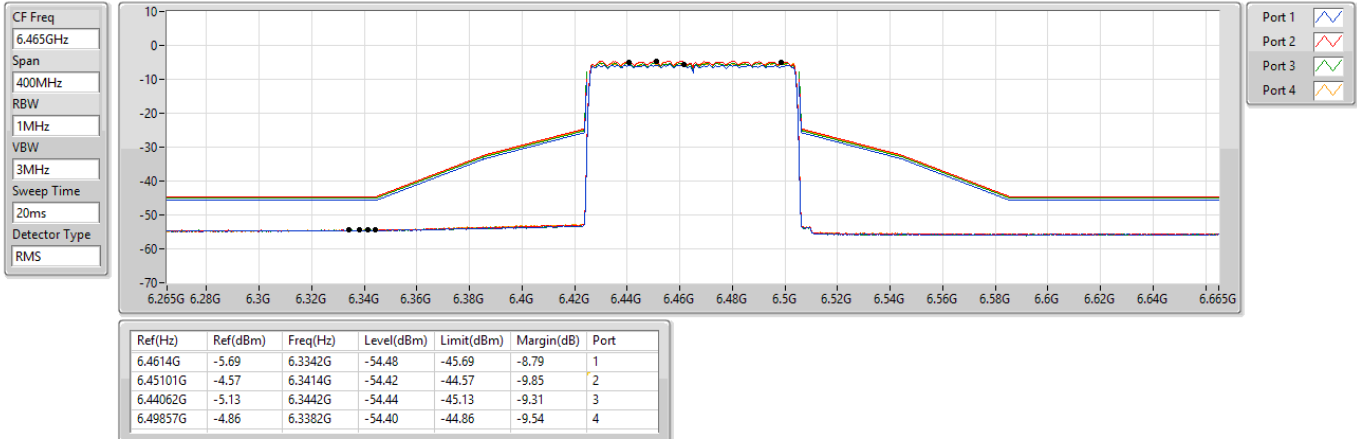

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

MASK


6545MHz Straddle 6.525-6.875GHz_TX

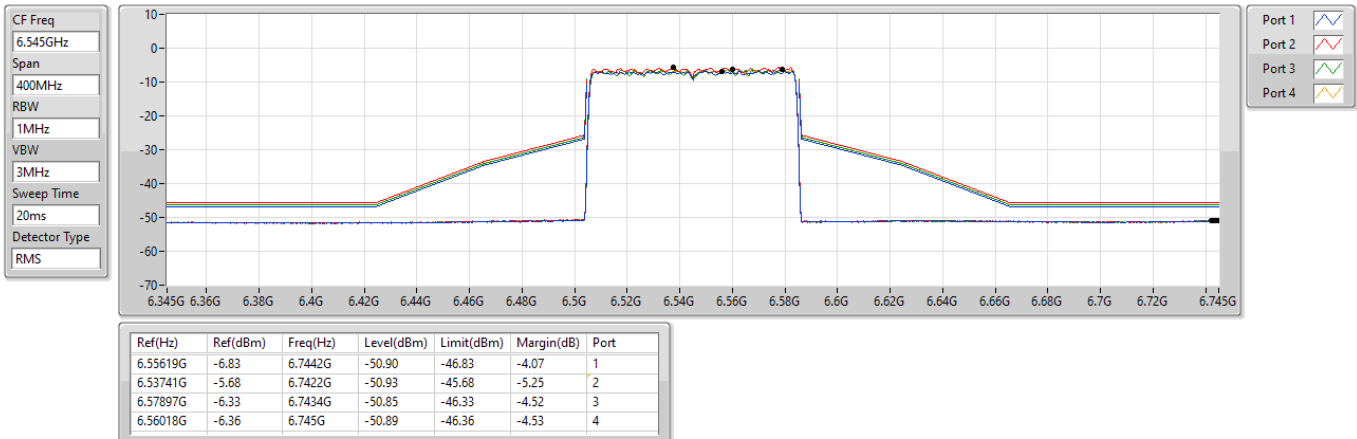

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

MASK


6625MHz_TX

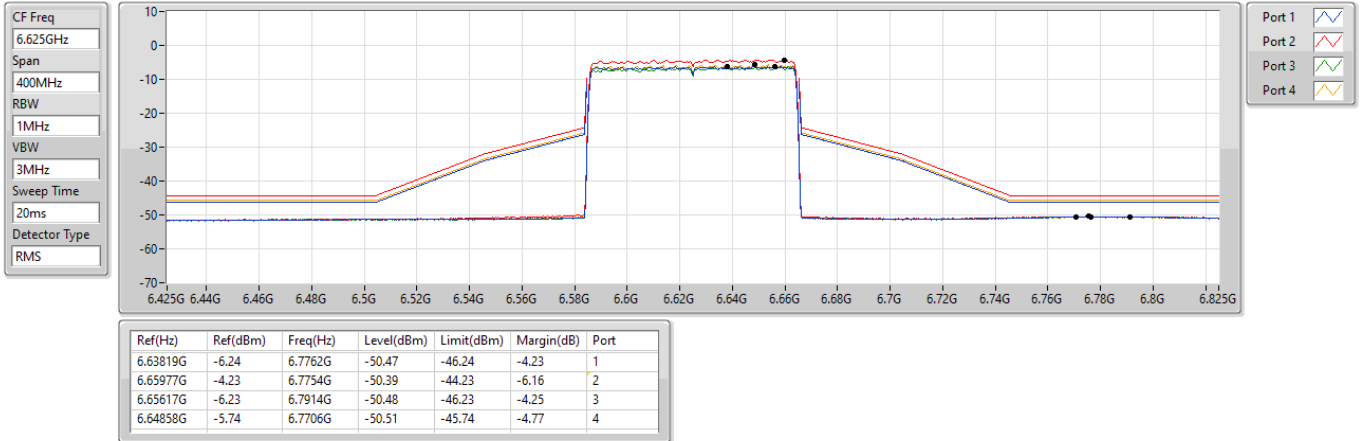

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

MASK


6705MHz_TX

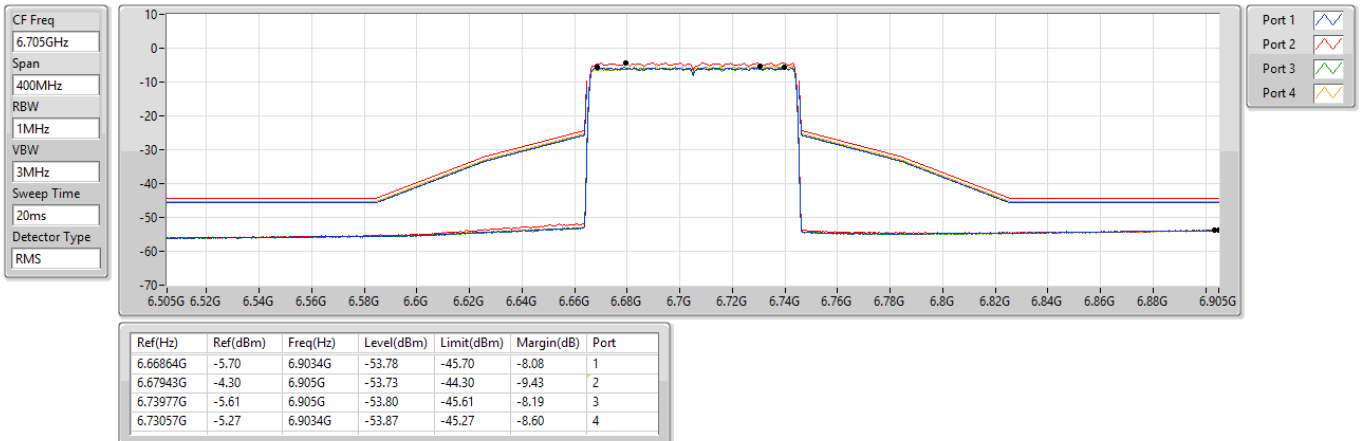

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

MASK


6785MHz_TX

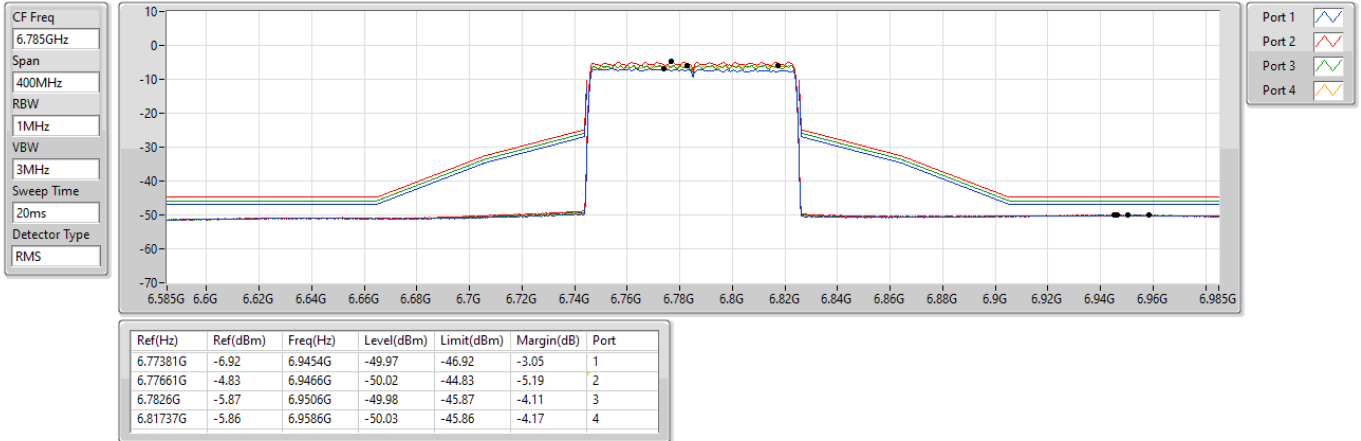

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

MASK


6865MHz Straddle 6.525-6.875GHz_TX

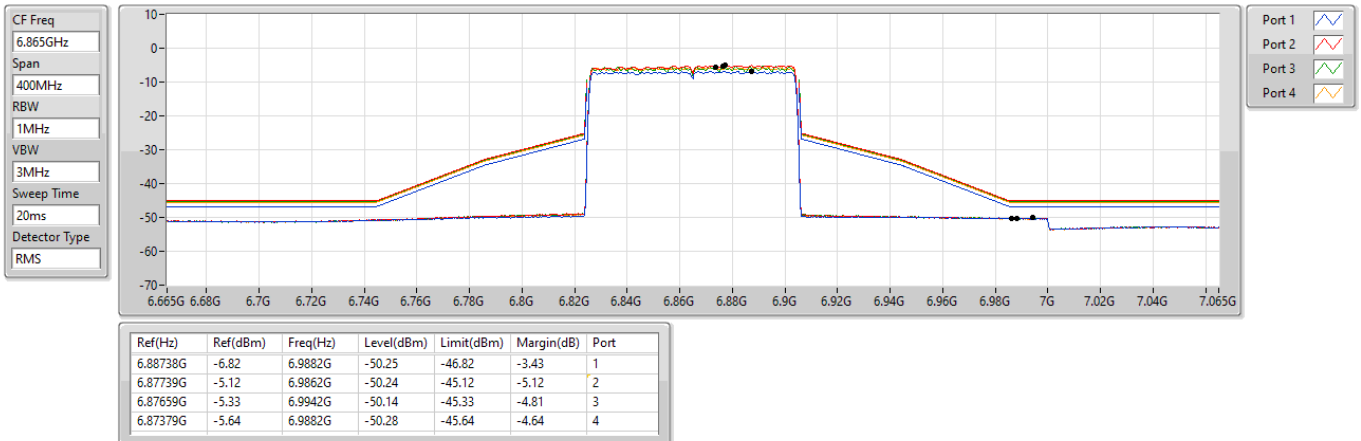

6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0)_4TX

MASK


6945MHz_TX

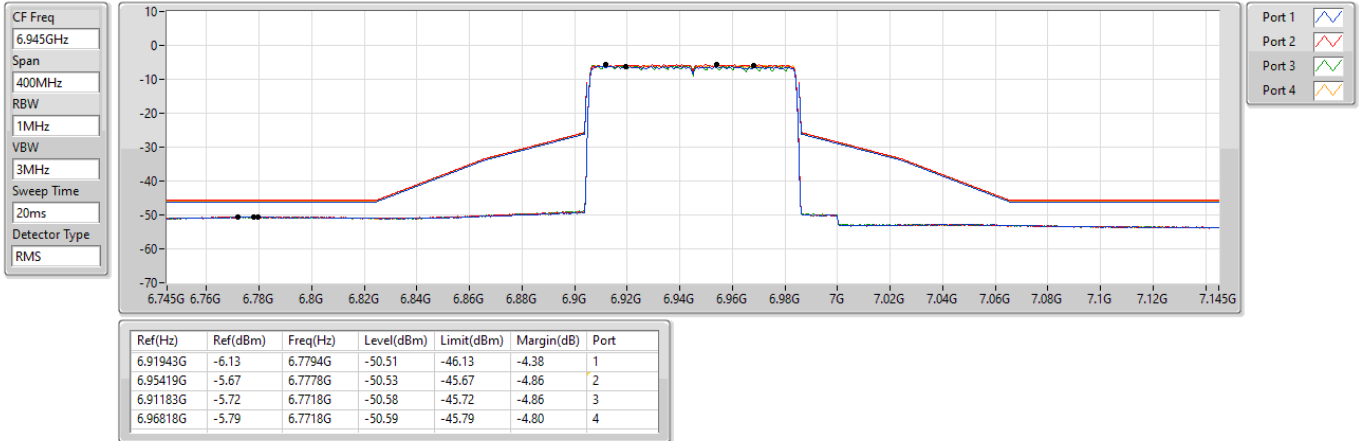

6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0)_4TX

MASK


7025MHz_TX

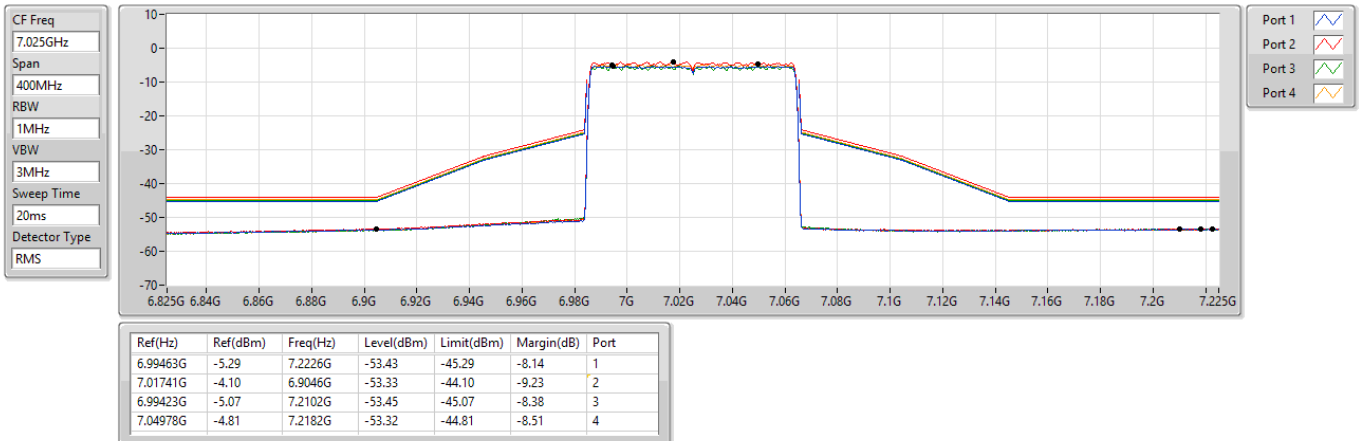

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

MASK


6025MHz_TX

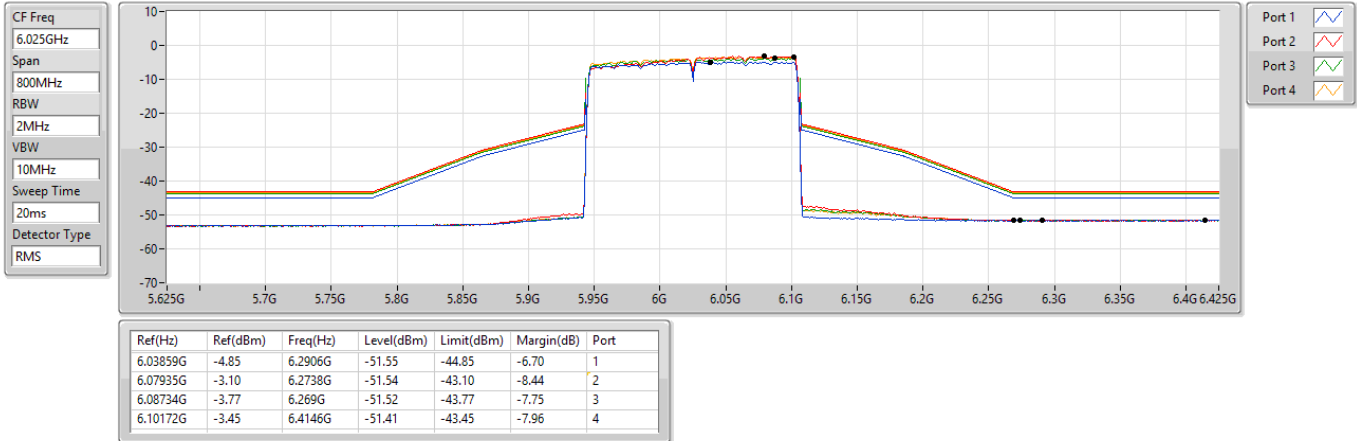

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

MASK


6185MHz_TX

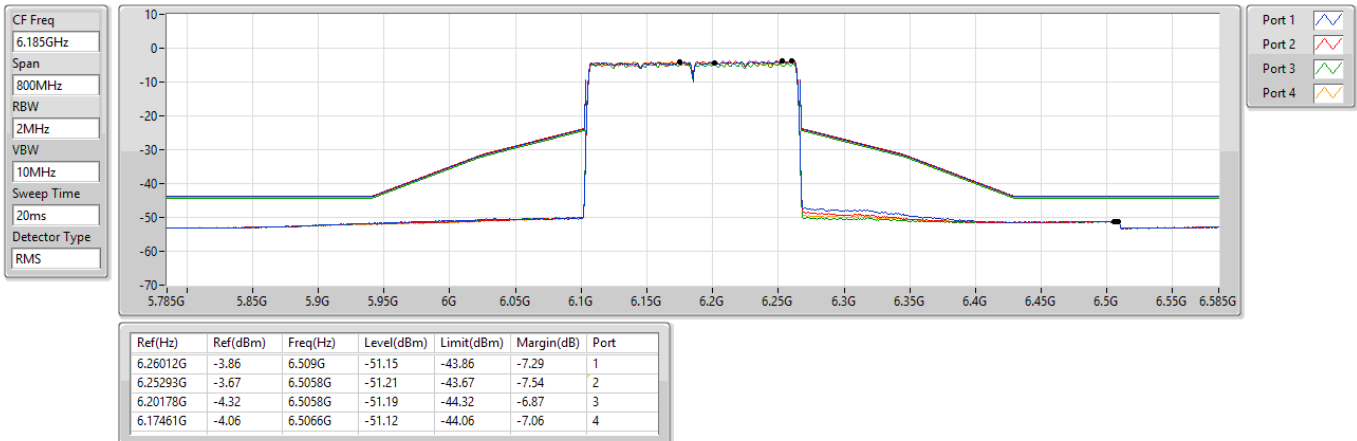

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

MASK


6345MHz_TX

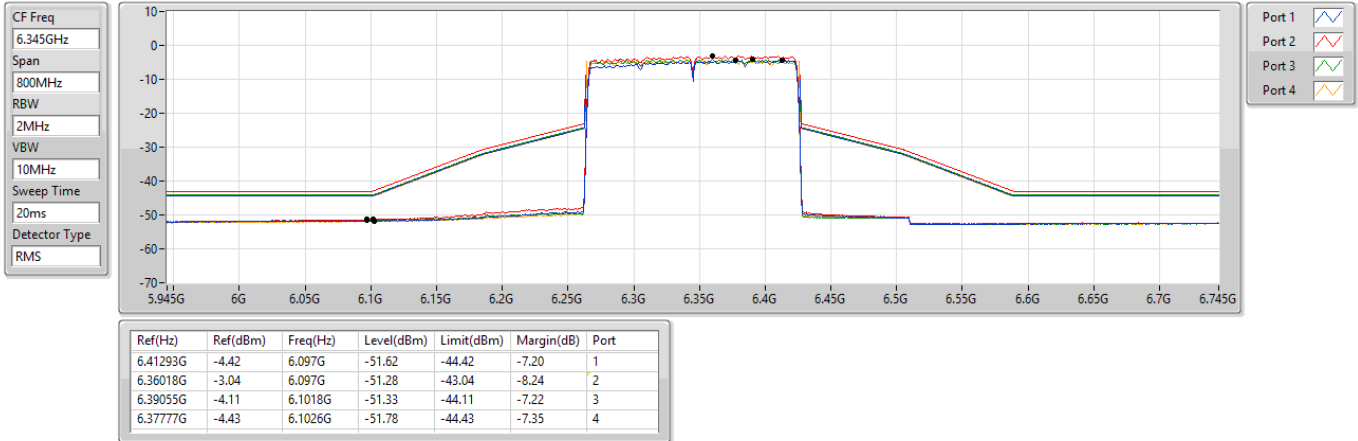

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_4TX

MASK


6505MHz Straddle 6.525-6.875GHz_TX

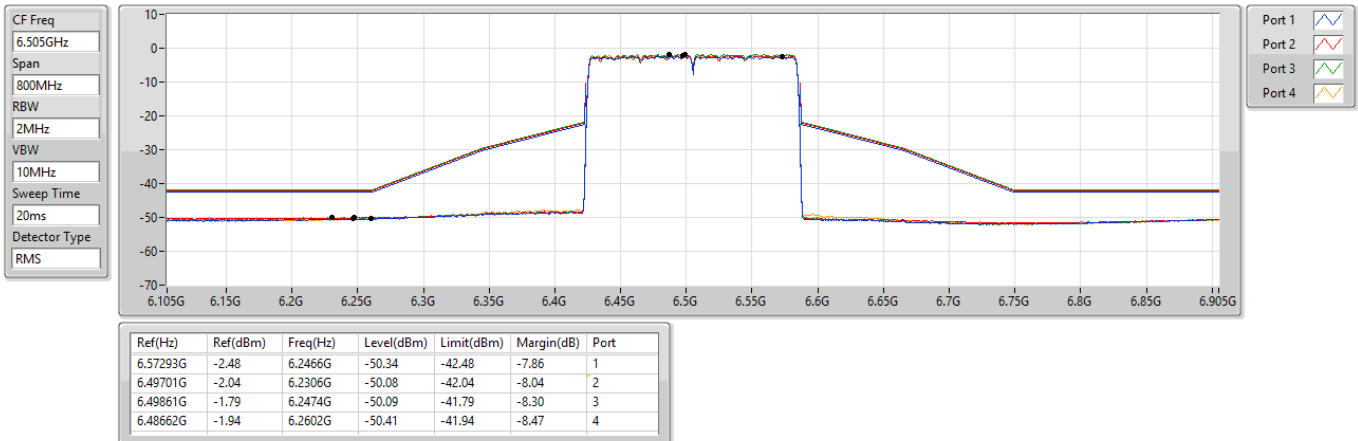

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_4TX

MASK


6665MHz_TX

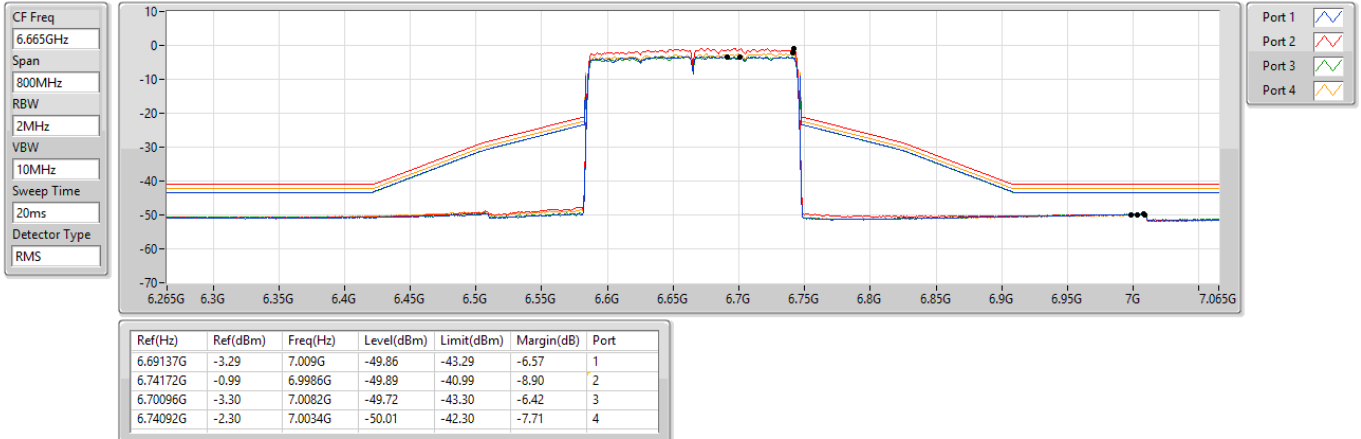

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_4TX

MASK


6825MHz Straddle 6.525-6.875GHz_TX

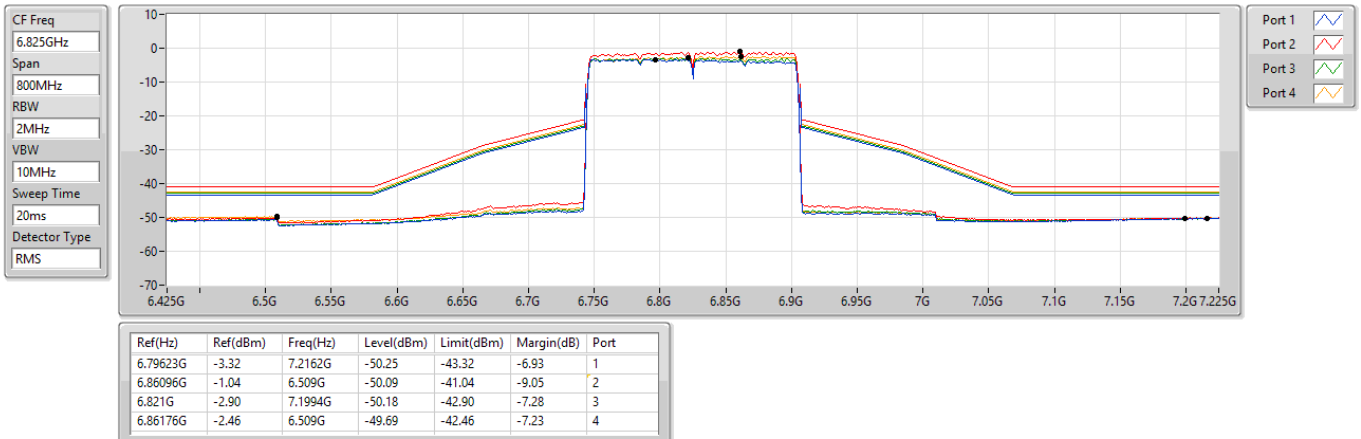

6.875-7.125GHz_802.11be EHT160_Nss1,(MCS0)_4TX

MASK


6985MHz_TX

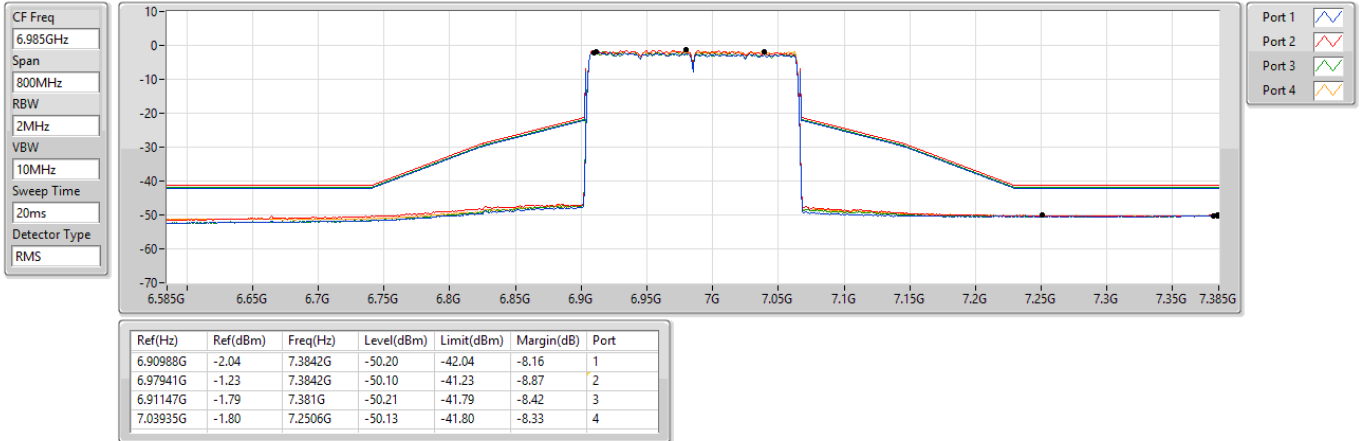

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX

MASK


6105MHz_TX

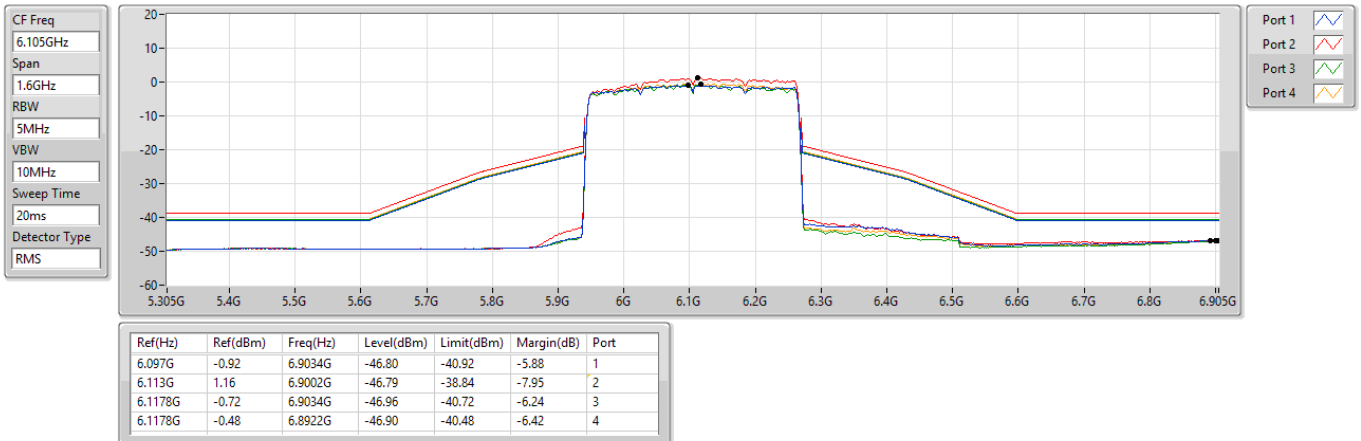

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX

MASK


6265MHz_TX

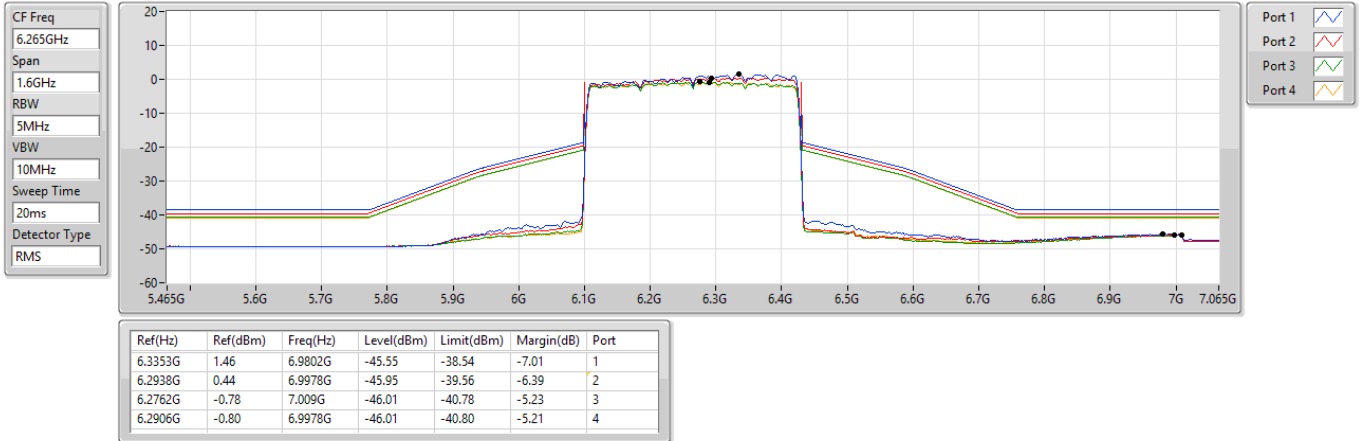

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX

MASK


6425MHz_TX

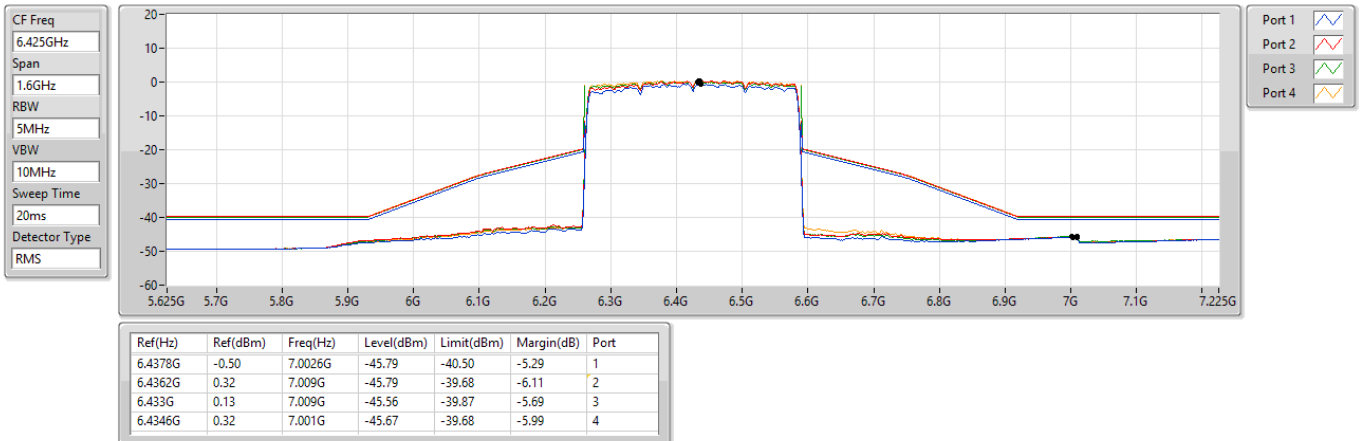

6.525-6.875GHz 802.11be EHT320_Nss1,(MCS0)_4TX

MASK


6585MHz Straddle 6.525-6.875GHz_TX

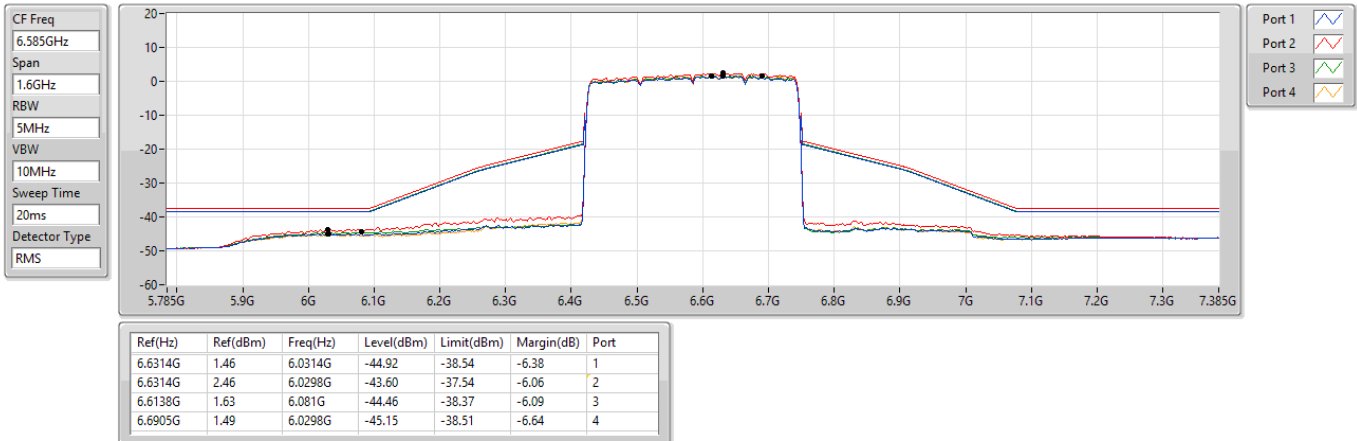

6.525-6.875GHz 802.11be EHT320_Nss1,(MCS0)_4TX

MASK


6745MHz Straddle 6.525-6.875GHz_TX

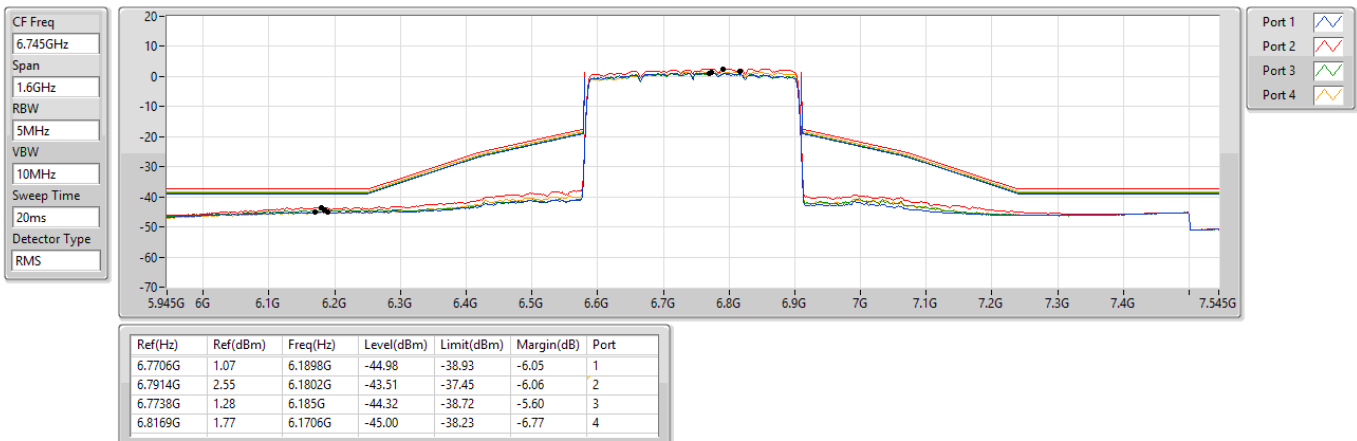

6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0)_4TX

MASK

6905MHz Straddle 6.525-6.875GHz_TX

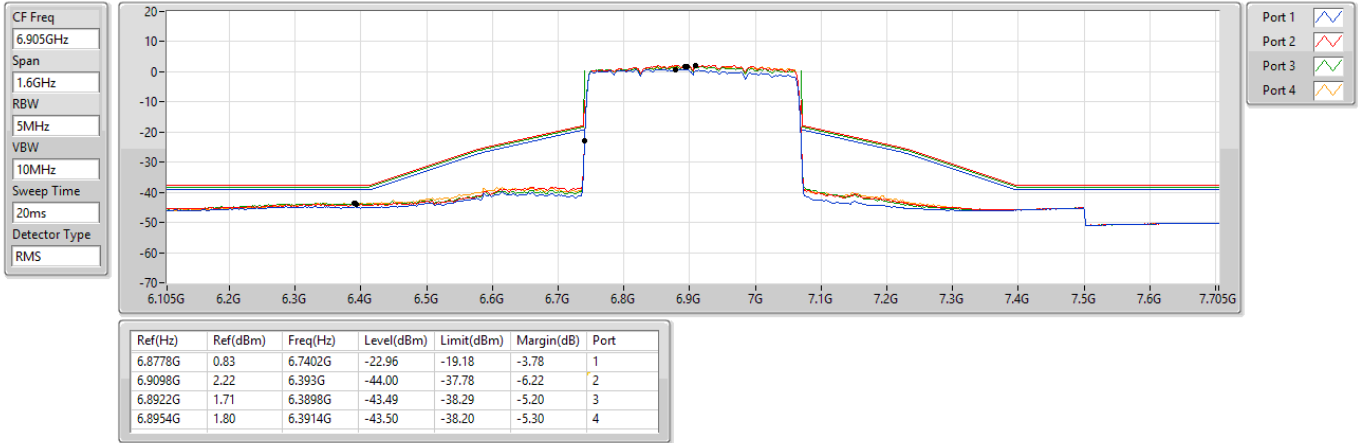

Frequency: 6475 MHz	Frequency Drift (ppm)			
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°C Vmax	3.71	3.70	3.83	3.54
T20°C Vmin	4.20	4.14	4.35	4.19
T40°C Vnom	6.78	7.27	7.30	6.65
T30°C Vnom	3.52	3.61	4.16	4.02
T20°C Vnom	3.78	3.53	3.70	4.20
T10°C Vnom	2.48	2.46	2.55	2.90
T0°C Vnom	2.32	2.63	2.59	2.22
Vnom [V]: 120	Vmax [V]: 138		Vmin [V]: 102	
Tnom [°C]: 20	Tmax [°C]: 40		Tmin [°C]: 0	

Frequency: 7015 MHz	Frequency Drift (ppm)			
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°C Vmax	3.26	3.67	3.70	3.57
T20°C Vmin	4.25	4.44	4.51	4.76
T40°C Vnom	6.15	6.59	6.42	6.30
T30°C Vnom	3.91	4.37	4.38	4.04
T20°C Vnom	3.30	3.57	3.50	3.83
T10°C Vnom	2.27	2.55	2.10	2.03
T0°C Vnom	1.81	2.00	2.34	1.79
Vnom [V]: 120	Vmax [V]: 138		Vmin [V]: 102	
Tnom [°C]: 20	Tmax [°C]: 40		Tmin [°C]: 0	

Mode	UNII Band	Center Frequency (MHz)	Incumbent Frequency (MHz)	Injected (AWGN) Power (dBm)	Antenna gain with path Loss (dBi)	Adjusted Power (dBm)	Detection limit (dBm)	EUT Tx Status
be EHT20-OFDMA	5	6195	6194	-68.57	2.07	-70.64	-62	Ceased
				-70.57	2.07	-72.64	-62	Minimal
				-88.57	2.07	-90.64	-62	Normal
	6	6475	6474	-68.86	1.81	-70.67	-62	Ceased
				-70.86	1.81	-72.67	-62	Minimal
				-88.86	1.81	-90.67	-62	Normal
	7	6695	6694	-66.55	1.86	-68.41	-62	Ceased
				-68.55	1.86	-70.41	-62	Minimal
				-86.55	1.86	-88.41	-62	Normal
	8	6995	6994	-69	1.47	-70.47	-62	Ceased
				-71	1.47	-72.47	-62	Minimal
				-89	1.47	-90.47	-62	Normal

Note: Adjusted Power = Injected AWGN Power (dBm) – Antenna Gain (dBi) + Path Loss (dB)

Mode	UNII Band	Center Frequency (MHz)	Incumbent Frequency (MHz)	Injected (AWGN) Power (dBm)	Antenna gain With path Loss (dBi)	Adjusted Power (dBm)	Detection limit (dBm)	EUT Tx Status
be EHT320-OFDMA	5	6105	6100	-69.23	2.07	-71.3	-62	Ceased
				-70.73	2.07	-72.8	-62	Minimal
				-89.23	2.07	-91.3	-62	Normal
	6 / 7	6585	6580	-67.88	1.81	-69.69	-62	Ceased
				-69.38	1.81	-71.19	-62	Minimal
				-87.88	1.81	-89.69	-62	Normal
	7 / 8	6905	6900	-68.81	1.47	-70.28	-62	Ceased
				-70.31	1.47	-71.78	-62	Minimal
				-88.81	1.47	-90.28	-62	Normal

Note: Adjusted Power = Injected AWGN Power (dBm) – Antenna Gain (dBi) + Path Loss (dB)