


| Mode           | UNII Band | Center Frequency (MHz) | Incumbent Frequency (MHz) | Injected (AWGN) Power (dBm) | Adjusted Power (dBm) | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | Detection Probability (%) | Limit (%) |
|----------------|-----------|------------------------|---------------------------|-----------------------------|----------------------|---|---|---|---|---|---|---|---|---|----|---------------------------|-----------|
| be EHT20-OFDMA | 5         | 6195                   | 6194                      | -68.57                      | -70.64               | V | V | V | V | V | V | V | V | X | V  | 90                        | 90        |
|                | 6         | 6475                   | 6474                      | -68.86                      | -70.67               | V | V | V | V | V | V | V | V | V | V  | 100                       | 90        |
|                | 7         | 6695                   | 6694                      | -66.55                      | -68.41               | V | V | V | V | V | V | V | V | V | V  | 100                       | 90        |
|                | 8         | 6995                   | 6994                      | -69                         | -70.47               | V | V | V | V | V | V | V | V | V | V  | 100                       | 90        |


| Mode            | UNII Band | Center Frequency (MHz) | Incumbent Frequency (MHz) | Injected (AWGN) Power (dBm) | Adjusted Power (dBm) | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | Detection Probability (%) | Limit (%) |
|-----------------|-----------|------------------------|---------------------------|-----------------------------|----------------------|---|---|---|---|---|---|---|---|---|----|---------------------------|-----------|
| be EHT320-OFDMA | 5         | 6105                   | 5950                      | -70.29                      | -72.36               | V | V | V | V | V | V | V | V | V | V  | 100                       | 90        |
|                 |           |                        | 6100                      | -69.23                      | -71.3                | V | V | V | V | V | V | V | V | V | V  | 100                       | 90        |
|                 |           |                        | 6260                      | -69.79                      | -71.86               | V | V | V | V | V | V | V | V | V | V  | 100                       | 90        |
|                 | 6 / 7     | 6585                   | 6430                      | -71.64                      | -73.45               | V | V | V | V | V | V | V | V | V | V  | 100                       | 90        |
|                 |           |                        | 6580                      | -67.88                      | -69.69               | V | V | V | V | V | V | V | V | V | V  | 100                       | 90        |
|                 |           |                        | 6740                      | -69.95                      | -71.76               | V | V | V | V | V | V | V | V | V | V  | 100                       | 90        |
|                 | 7 / 8     | 6905                   | 6750                      | -70.76                      | -72.23               | V | V | V | V | V | V | V | V | V | V  | 100                       | 90        |
|                 |           |                        | 6900                      | -68.81                      | -70.28               | V | V | V | V | V | V | V | V | V | V  | 100                       | 90        |
|                 |           |                        | 7060                      | -72.64                      | -74.11               | V | V | V | V | V | V | V | V | V | V  | 100                       | 90        |

### Test plot of Incumbent signal


BW: 20 MHz / Frequency : 6194 MHz

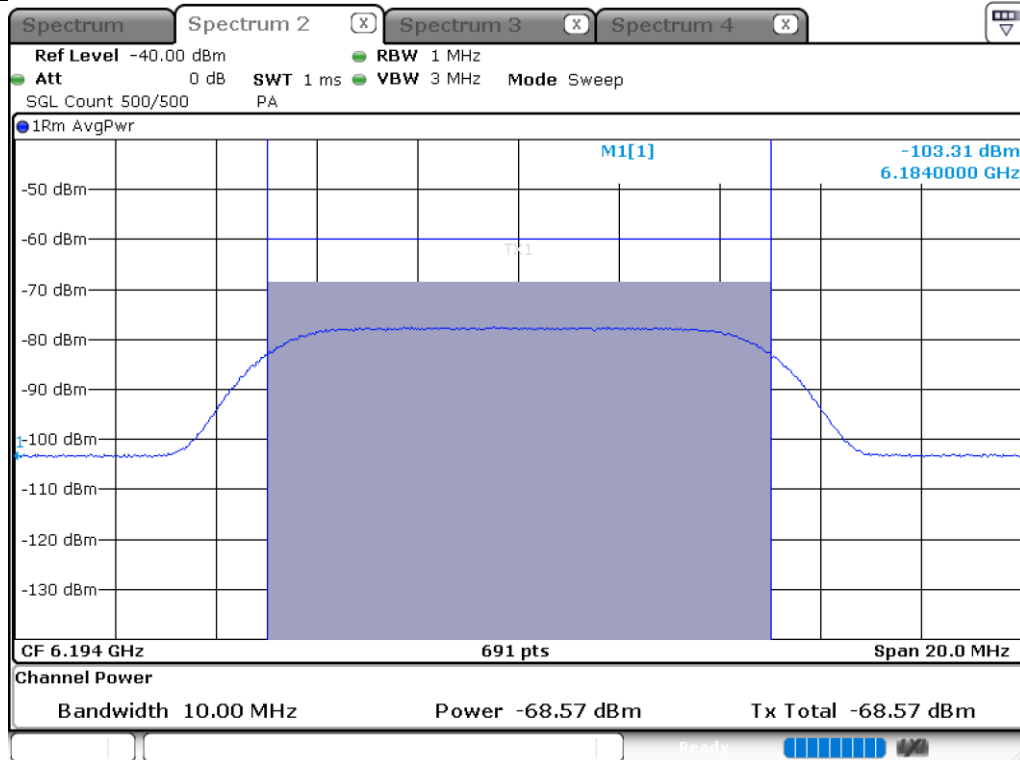


BW: 20 MHz / Frequency : 6474 MHz

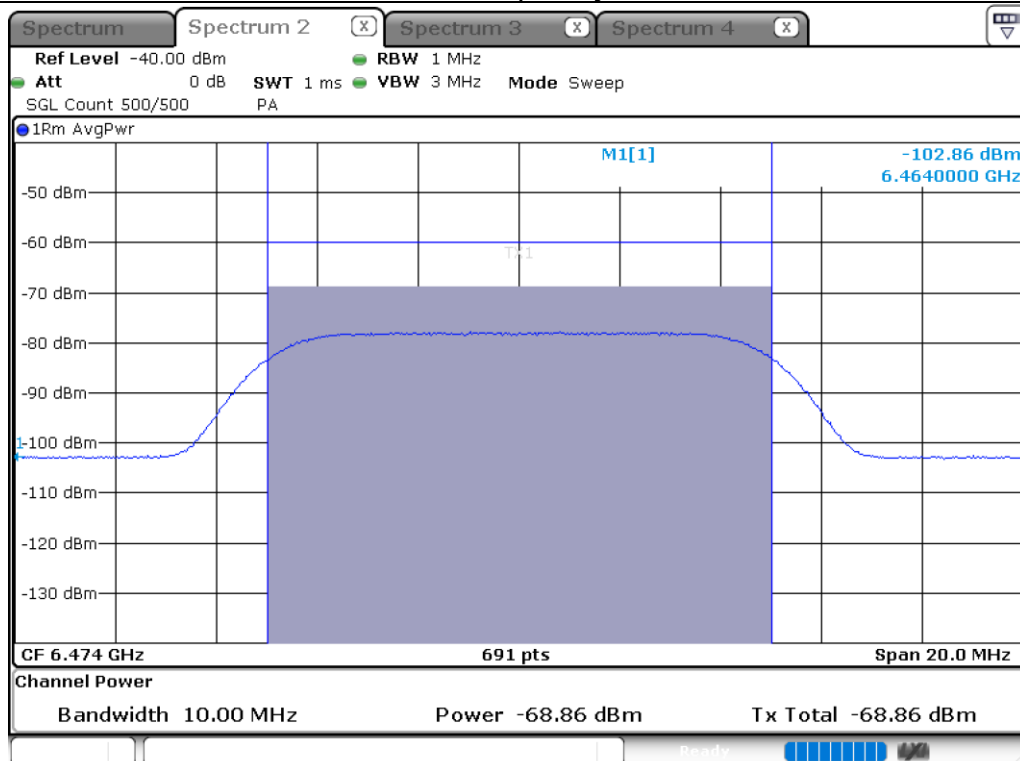


BW: 20 MHz / Frequency : 6694 MHz

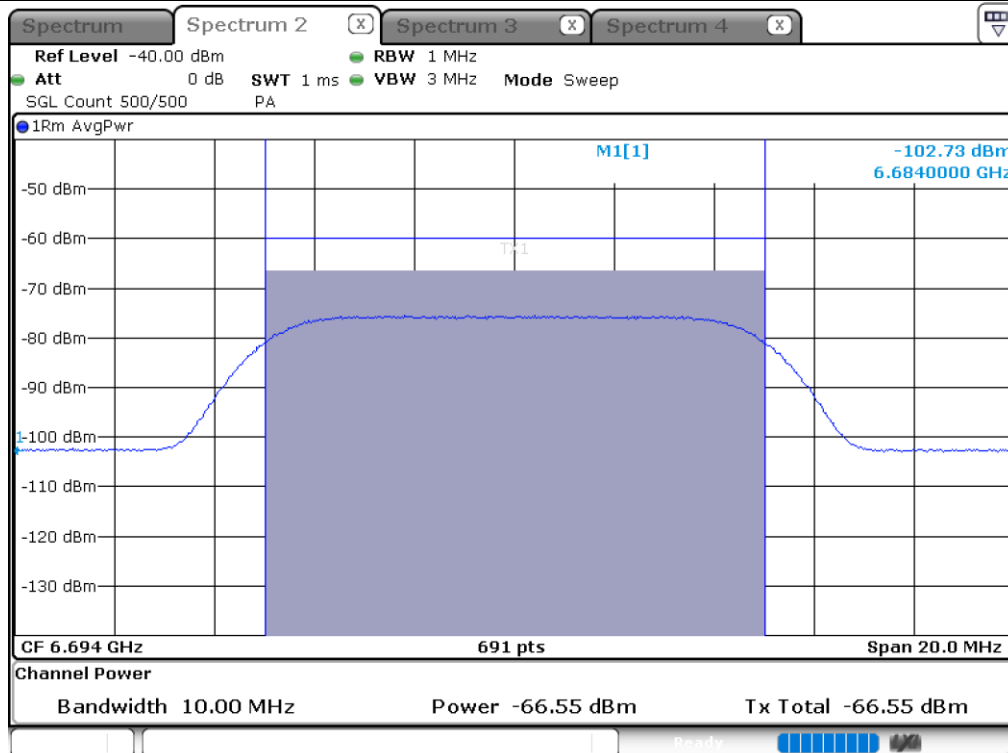


BW: 20 MHz / Frequency : 6994MHz

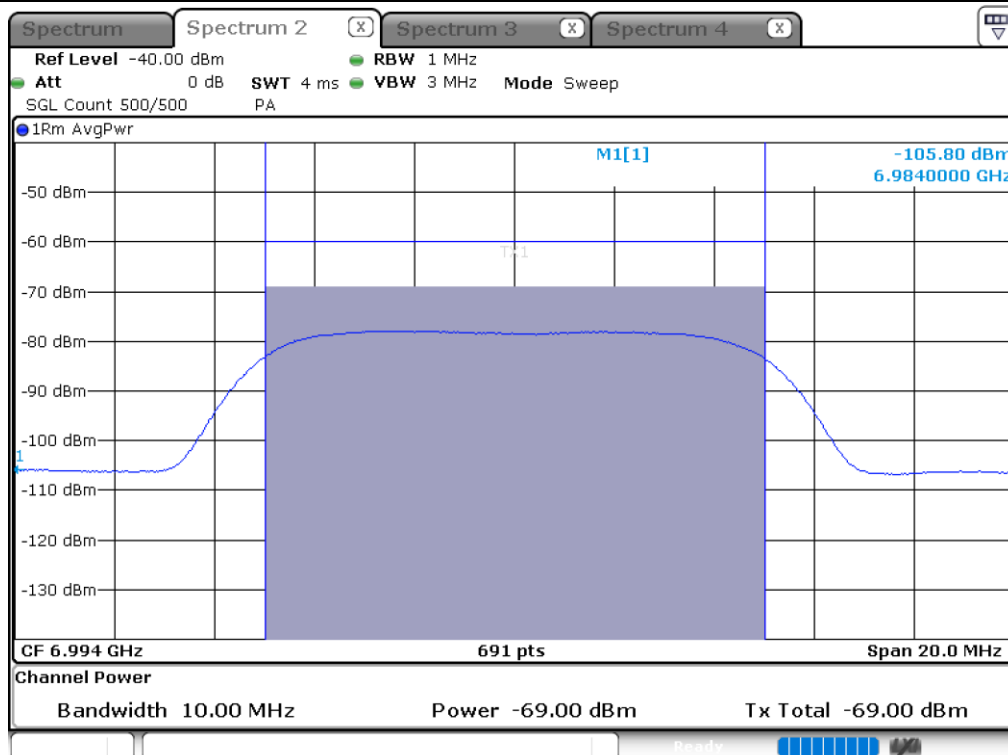


BW: 320 MHz / Frequency : 5950 MHz

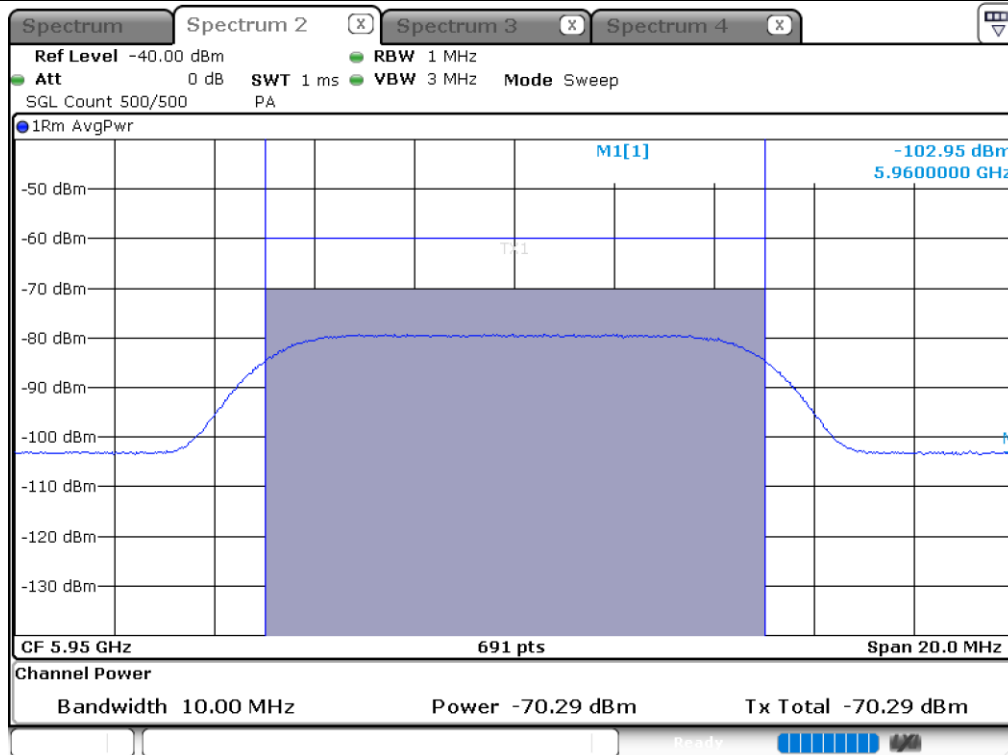


BW: 320 MHz / Frequency : 6100 MHz

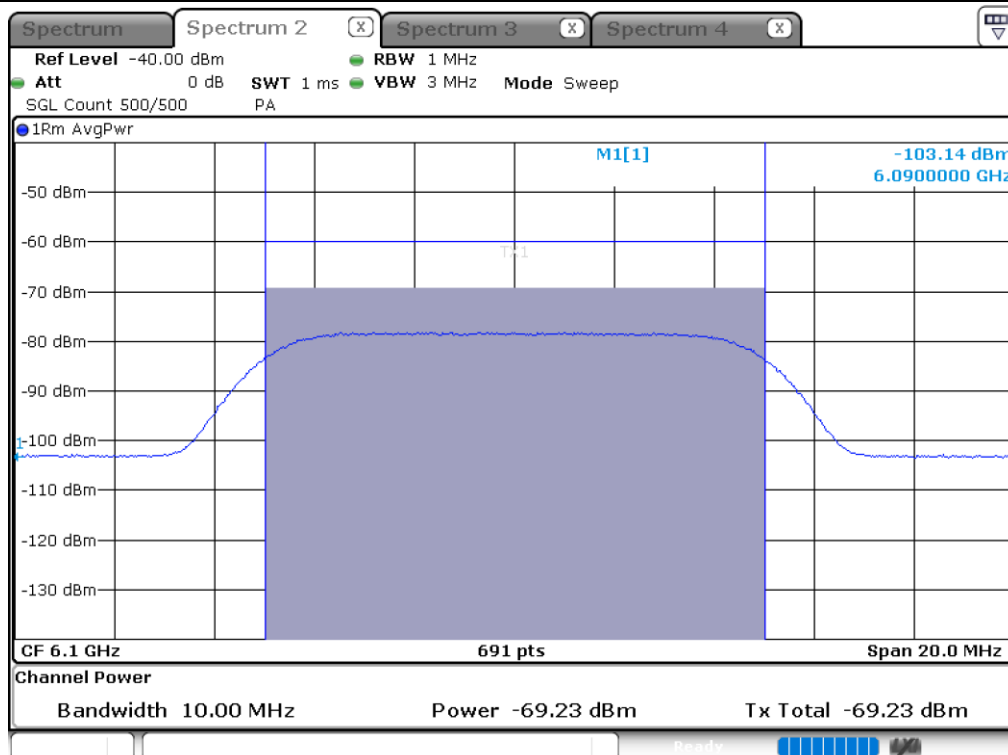


BW: 320 MHz / Frequency : 6260 MHz

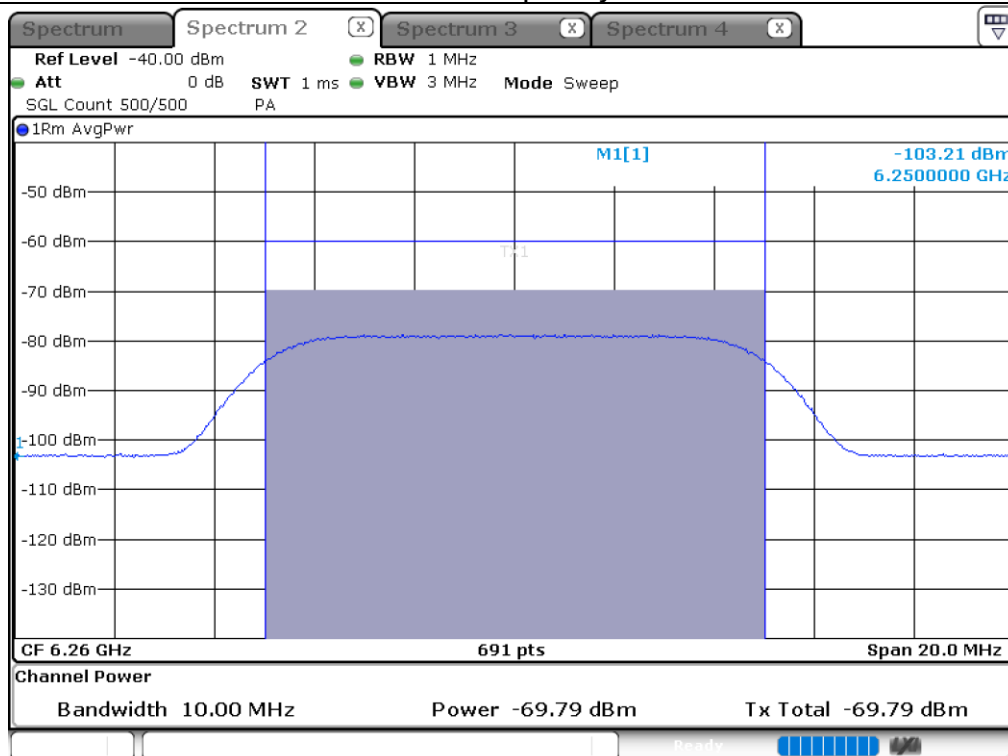


BW: 320 MHz / Frequency : 6430 MHz

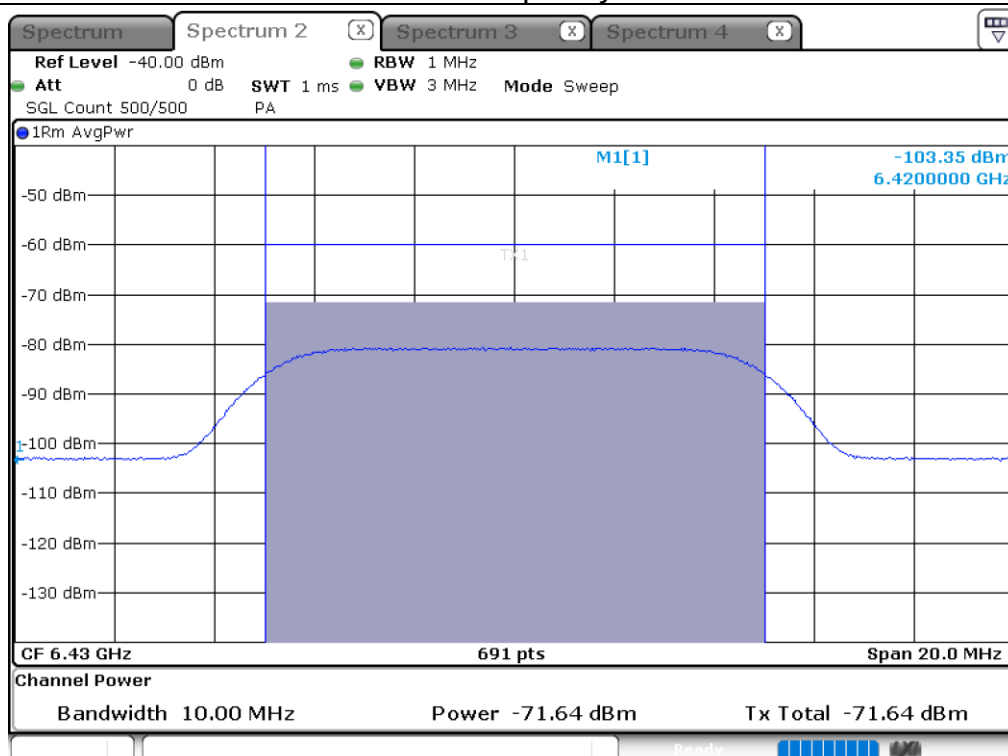


BW: 320 MHz / Frequency : 6580 MHz

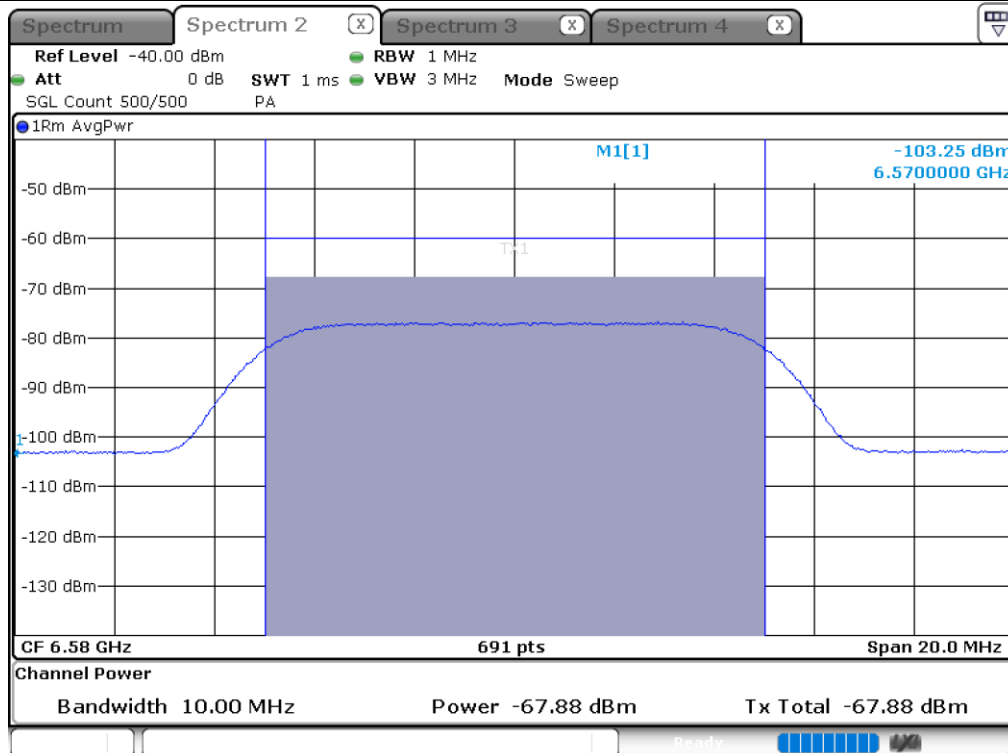


BW: 320 MHz / Frequency : 6740 MHz

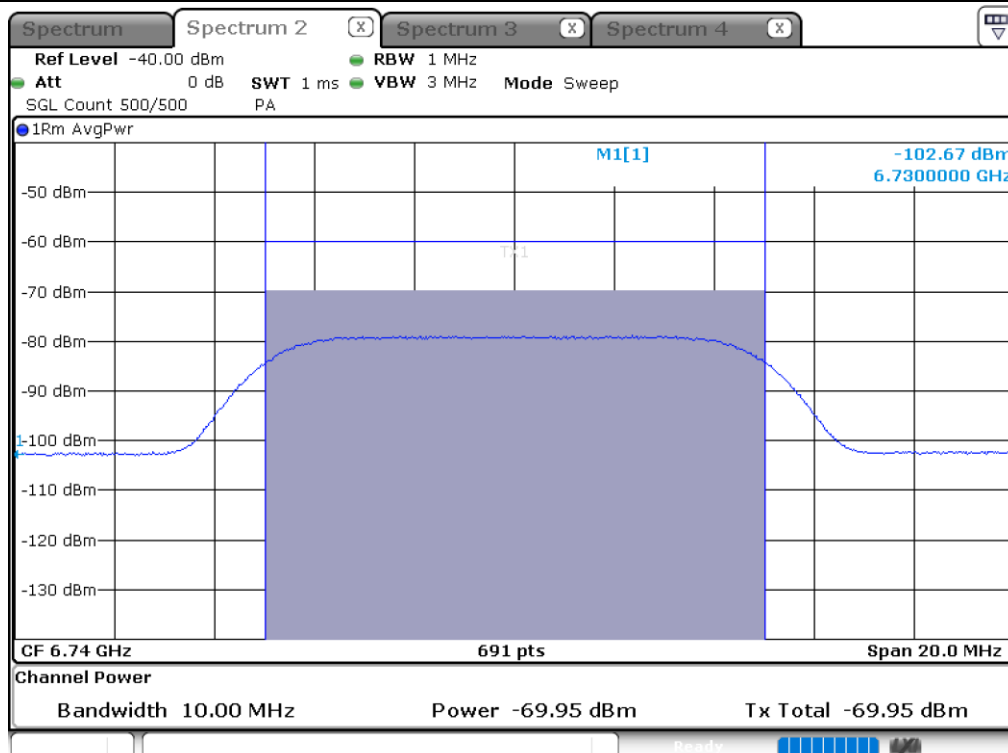


BW: 320 MHz / Frequency : 6750 MHz

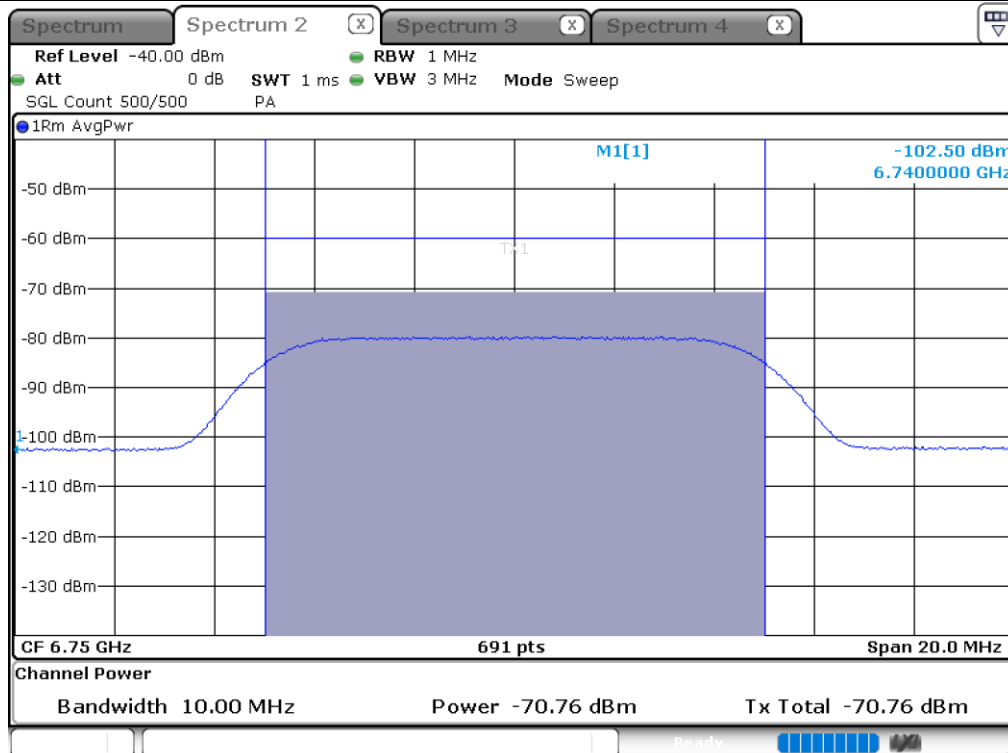


BW: 320 MHz / Frequency : 6900 MHz

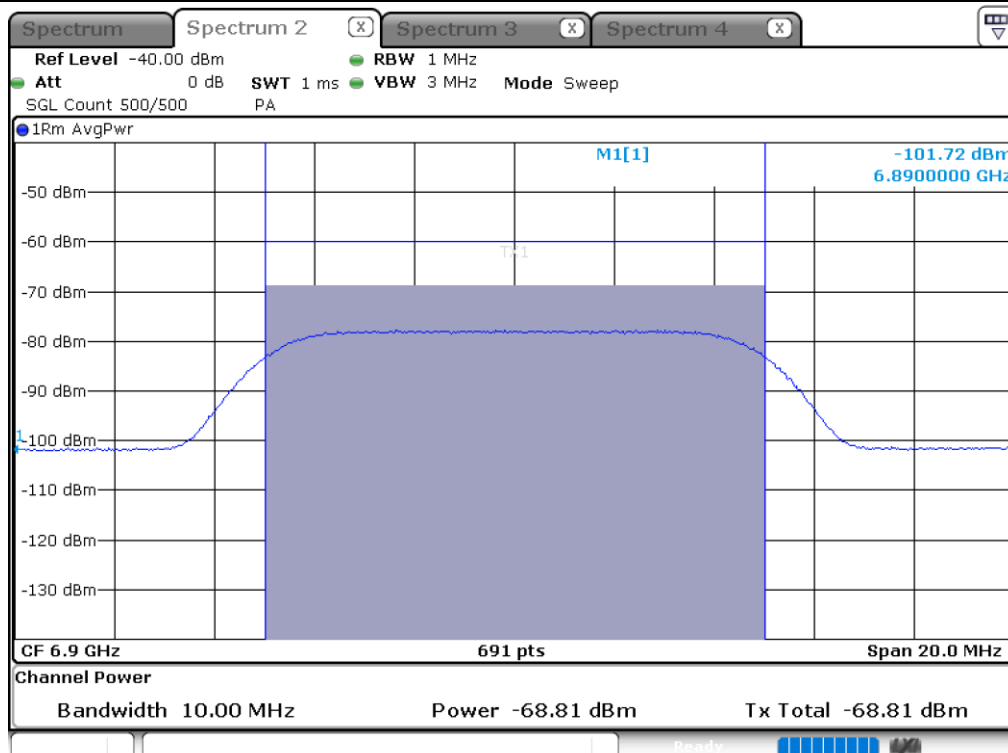

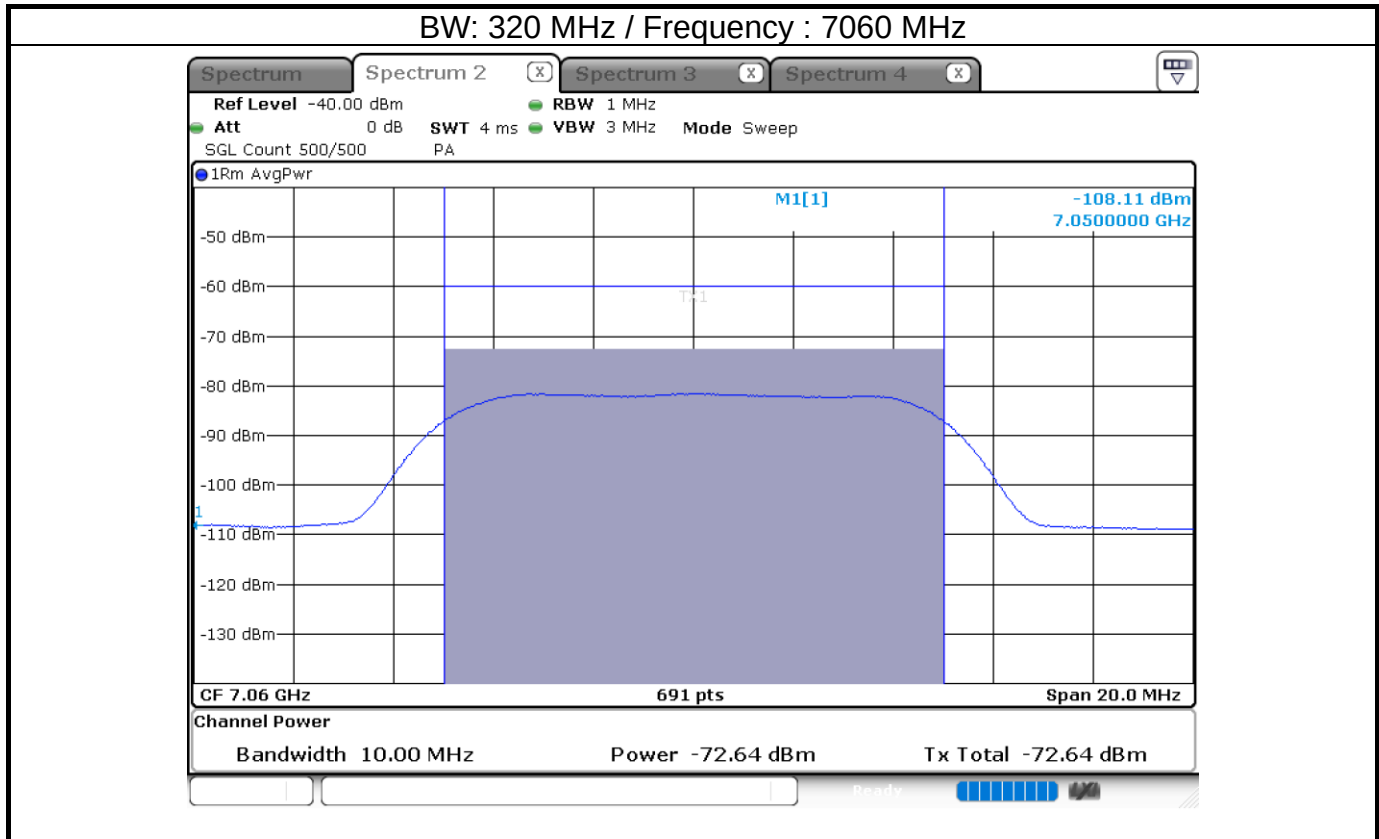





## Test plot of Contention Based Protocol EUT Normal transmission

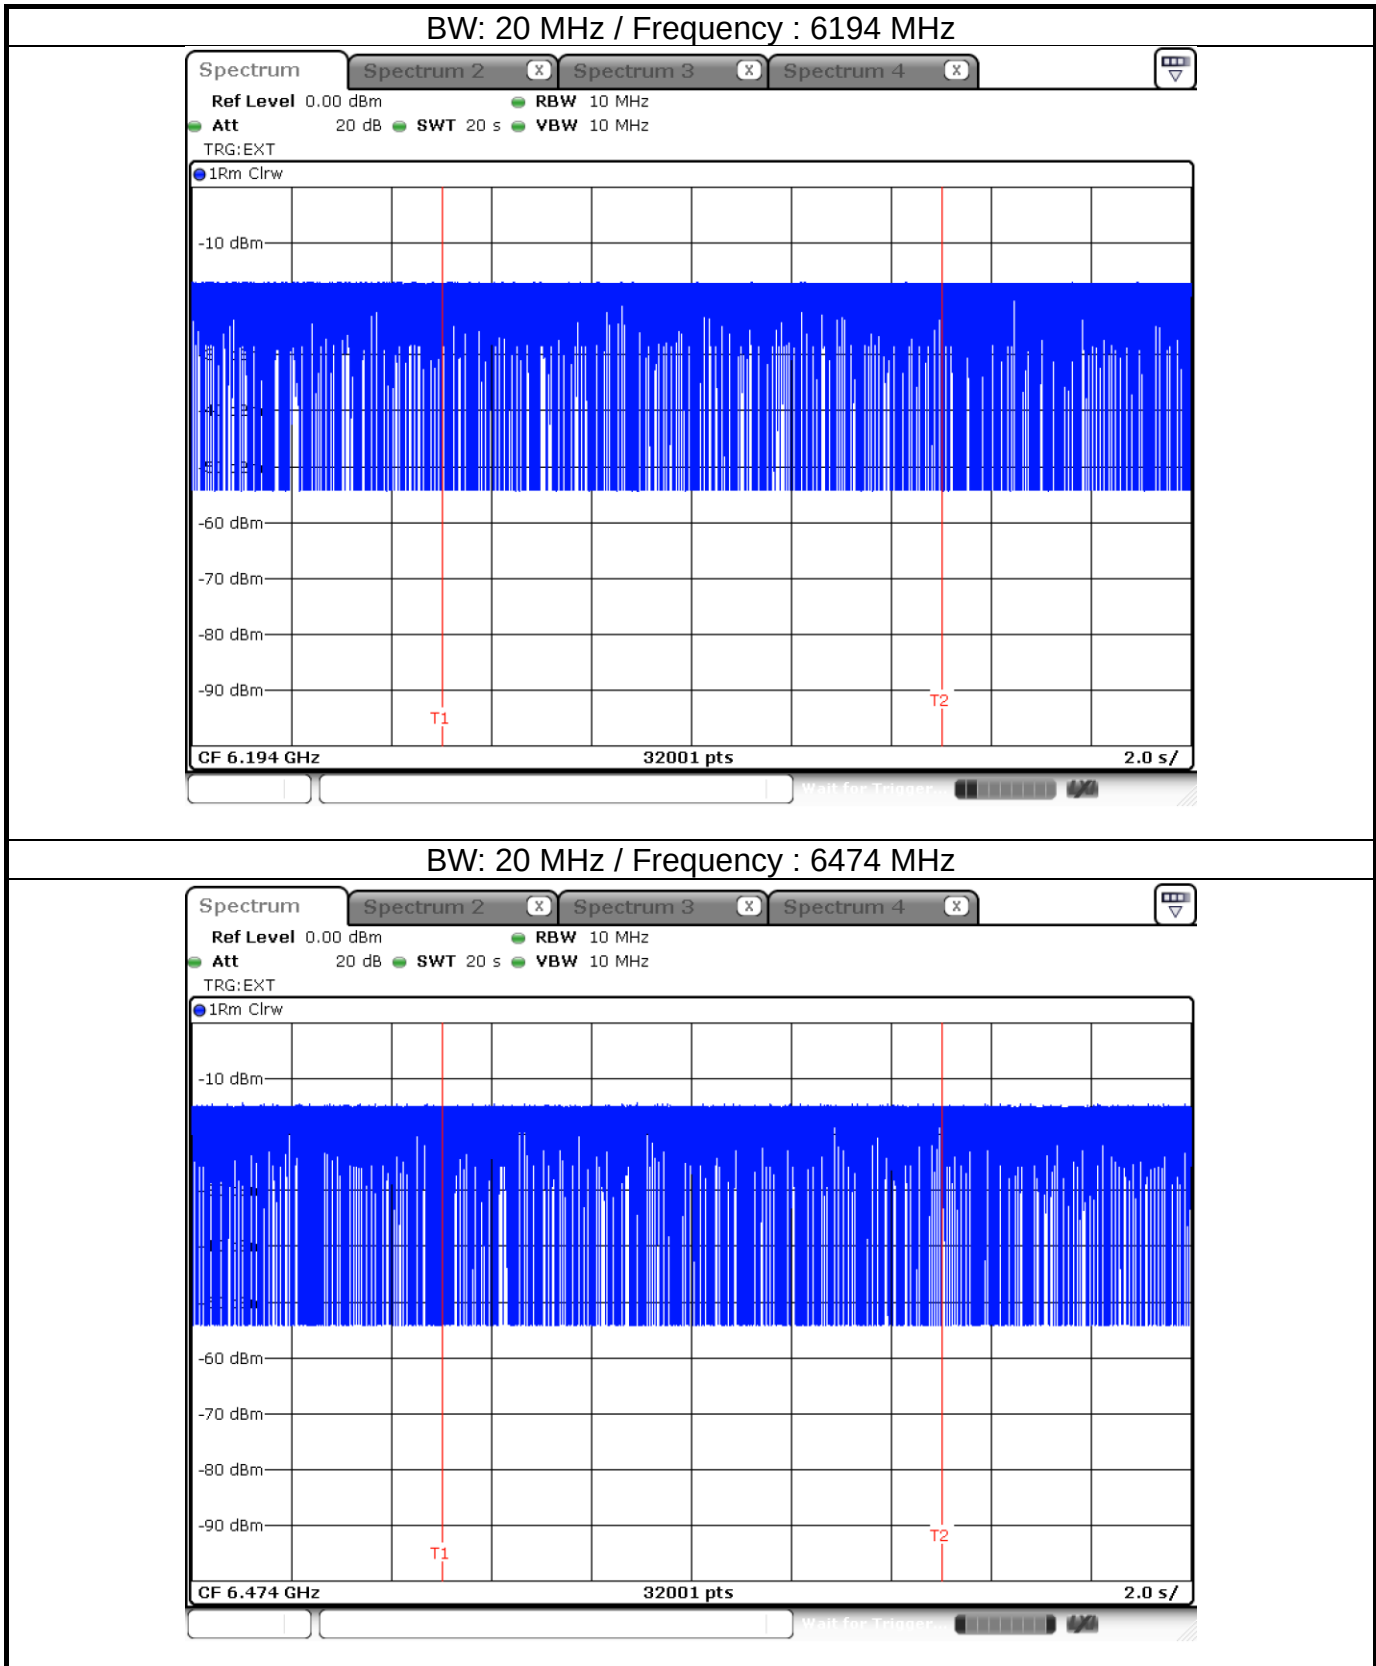


BW: 20 MHz / Frequency : 6694 MHz

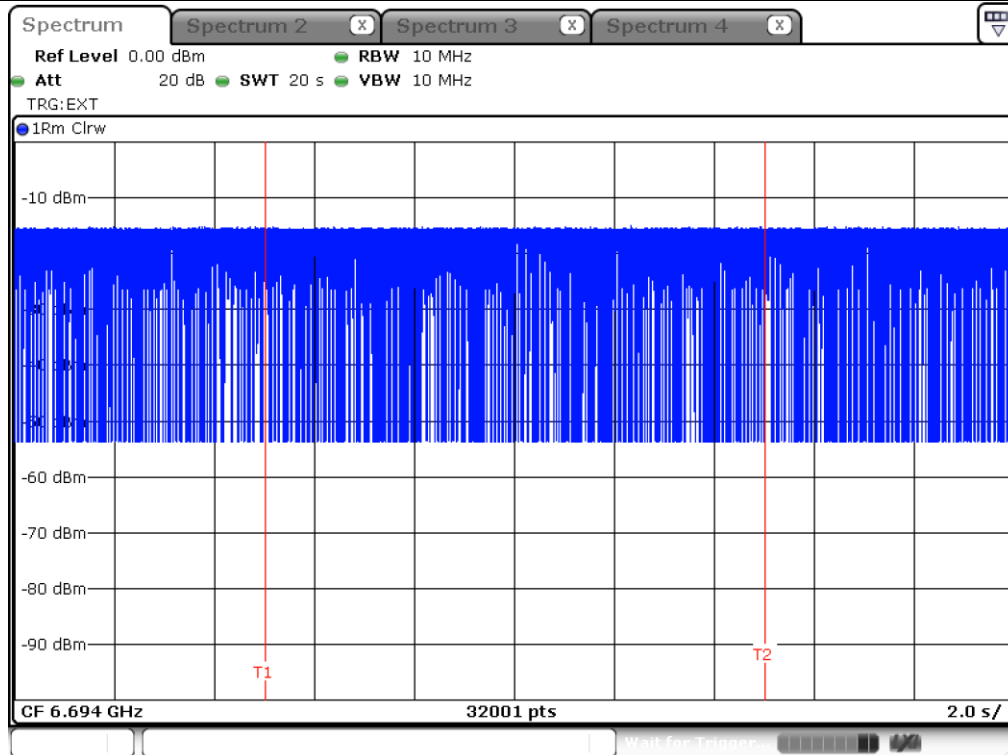


BW: 20 MHz / Frequency : 6994 MHz

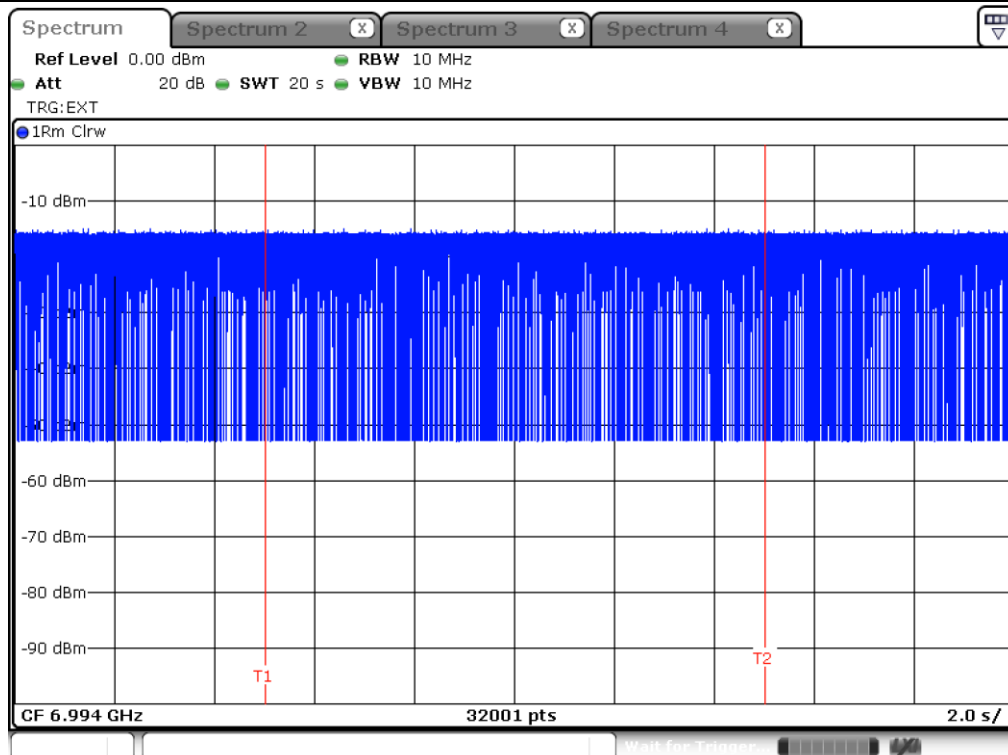


BW: 320 MHz / Frequency : 6100 MHz

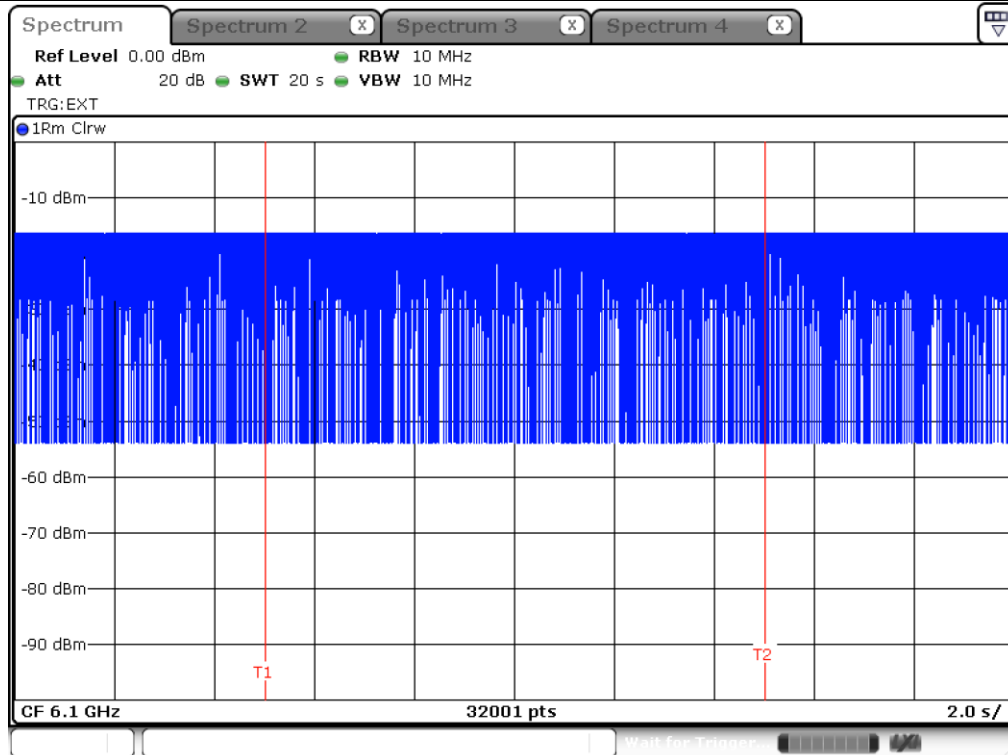


BW: 320 MHz / Frequency : 6580 MHz

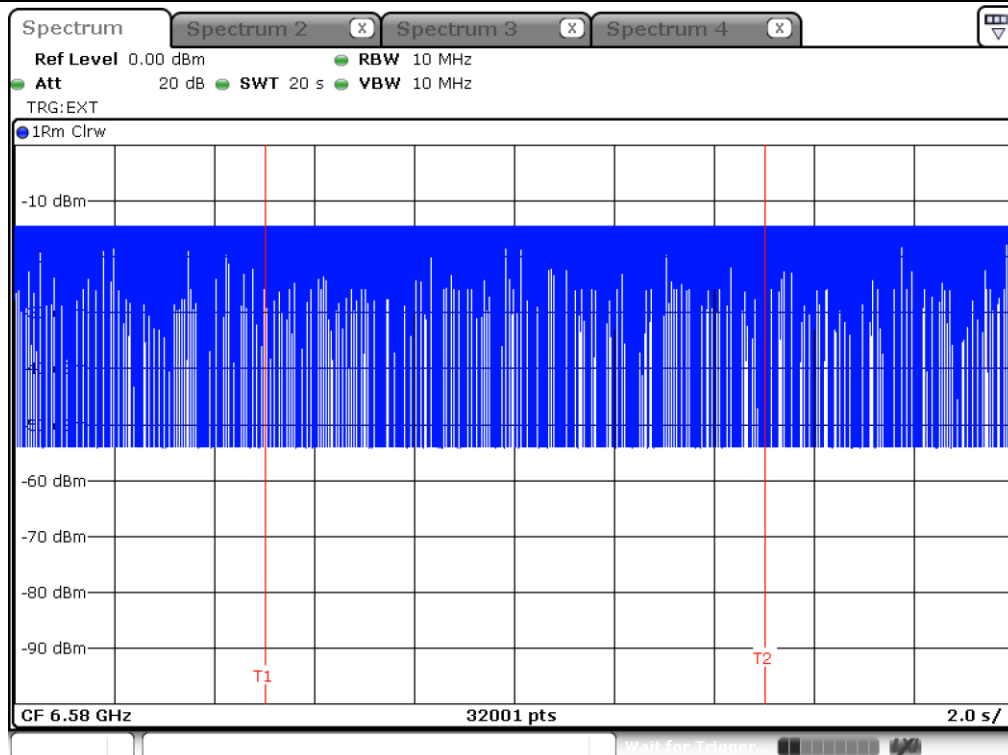


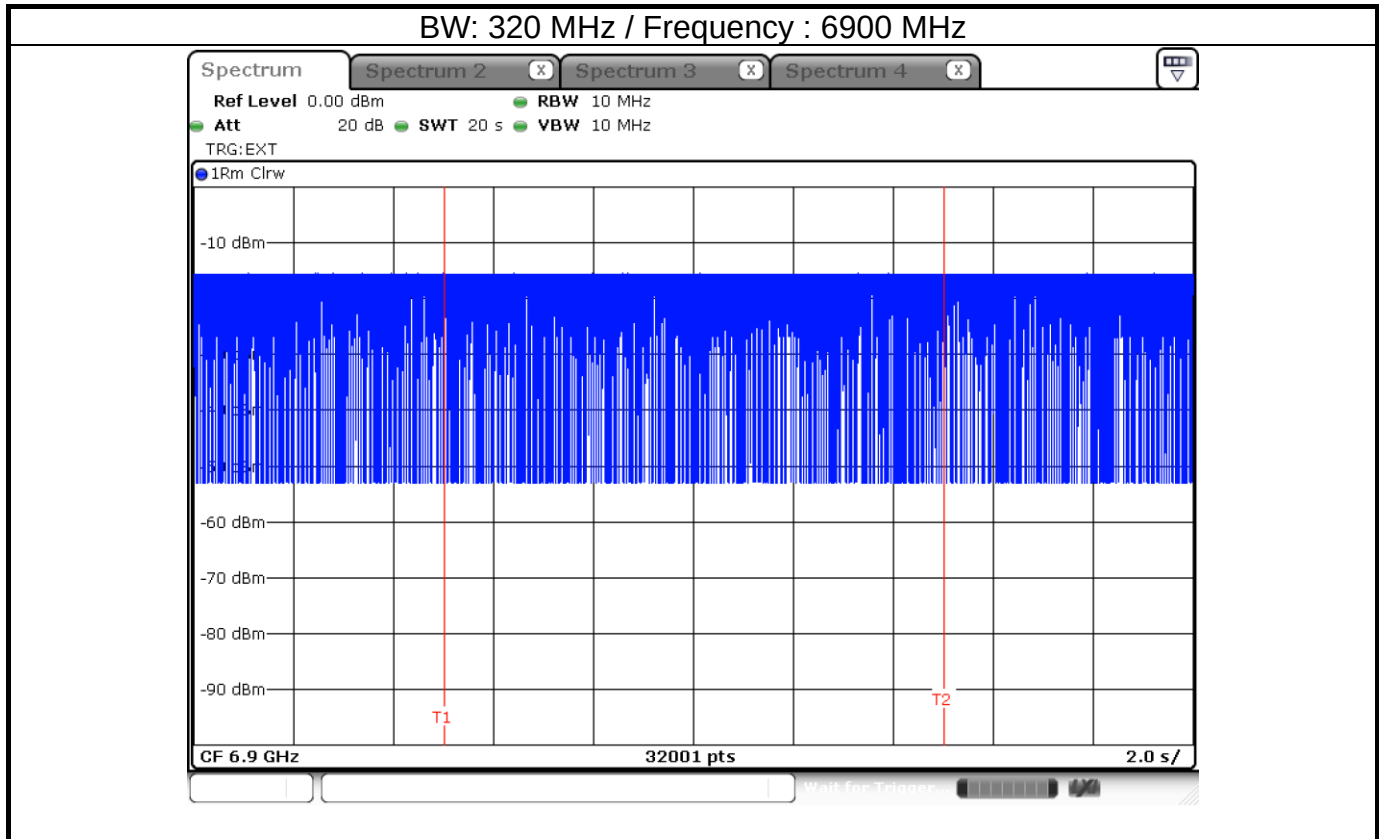


## EUT Minimal transmission

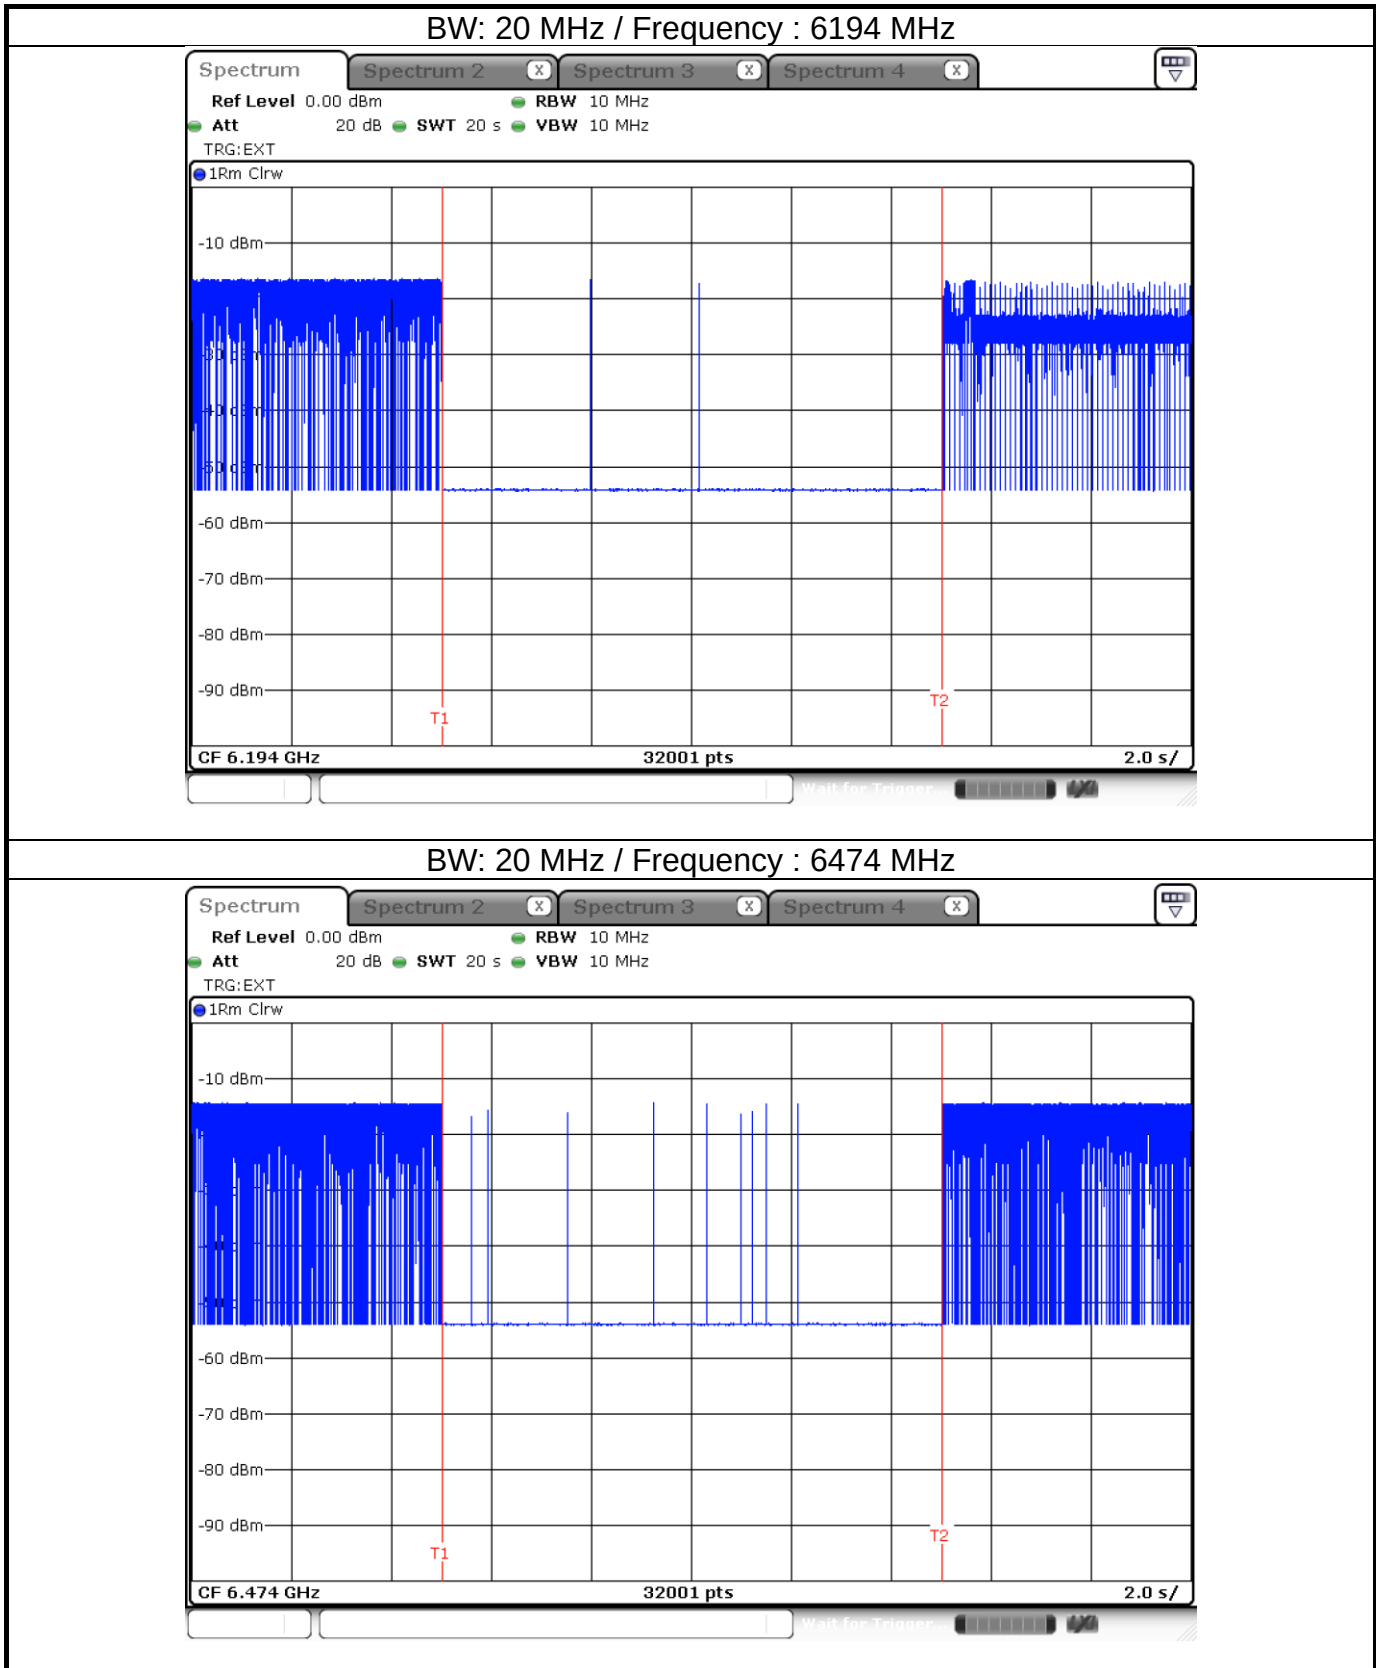


BW: 20 MHz / Frequency : 6694 MHz

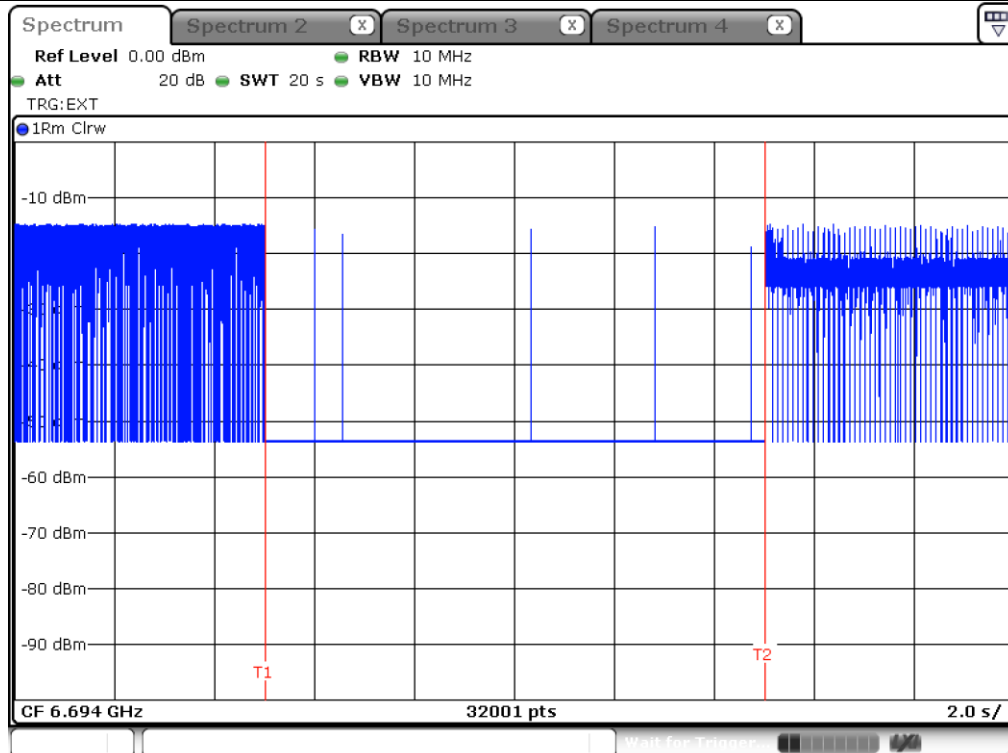


BW: 20 MHz / Frequency : 6994 MHz

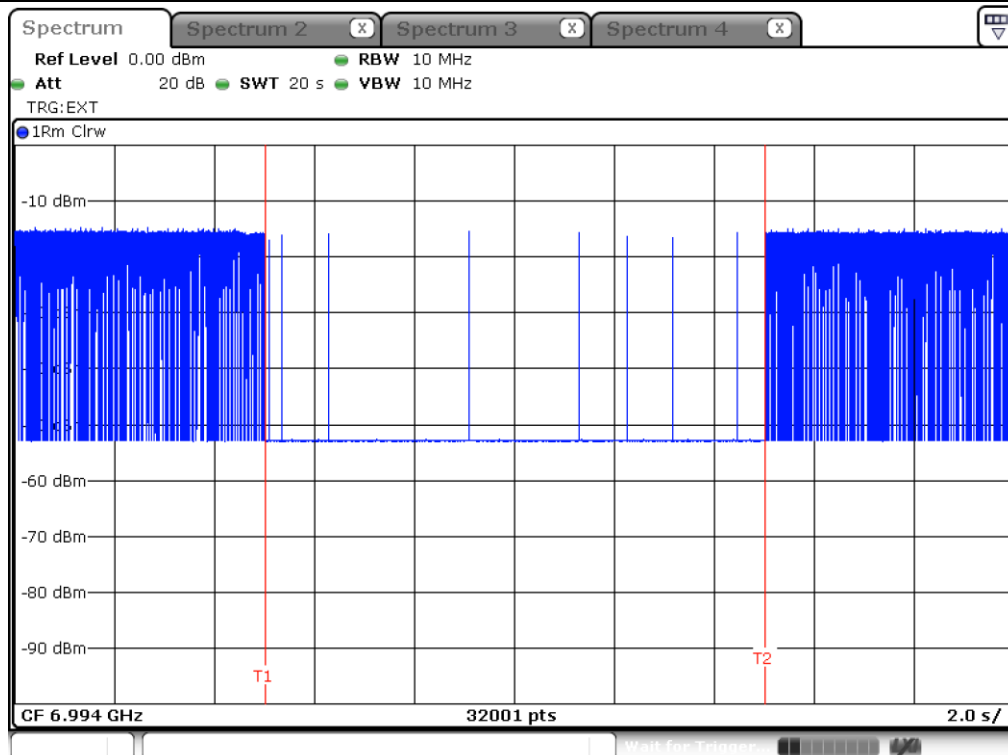


BW: 320 MHz / Frequency : 6100 MHz

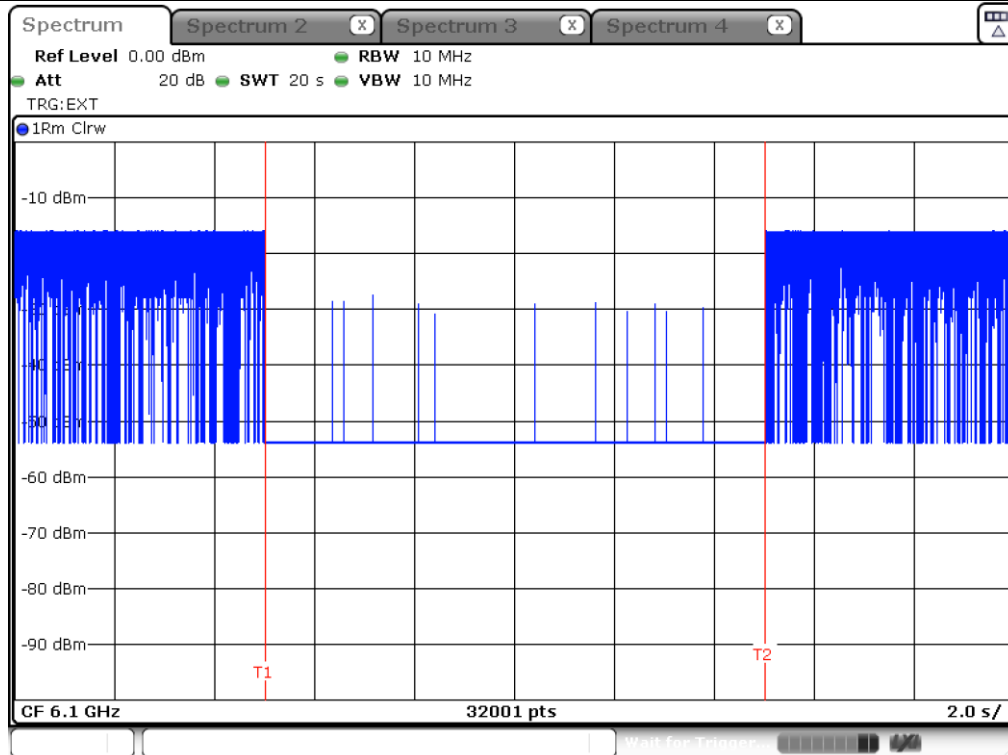



BW: 320 MHz / Frequency : 6580 MHz

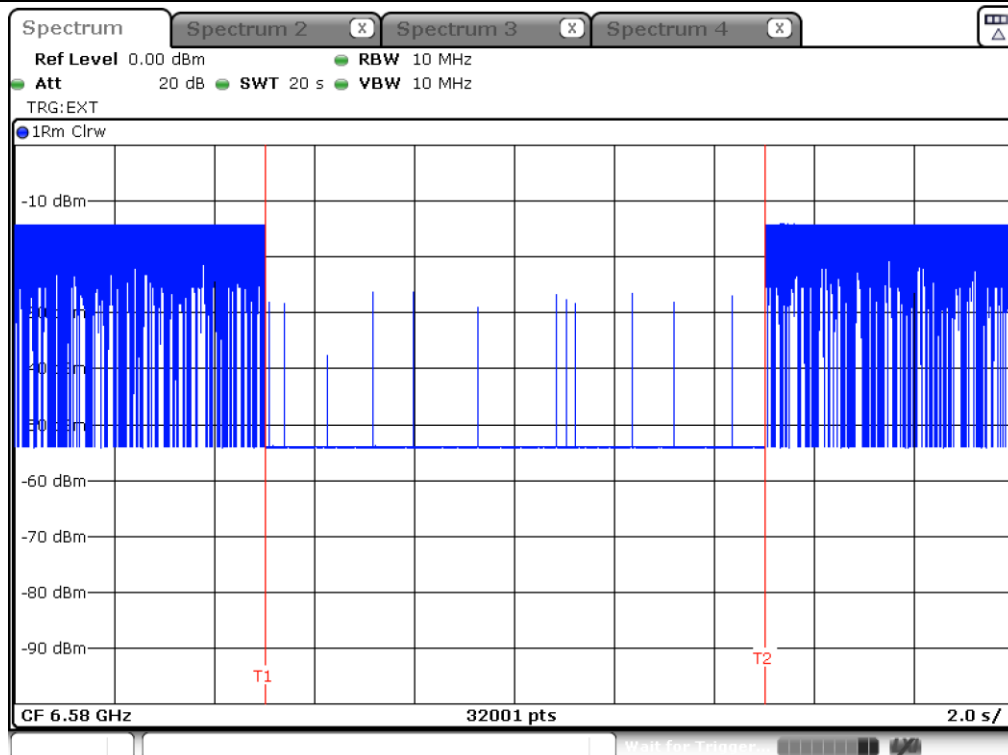

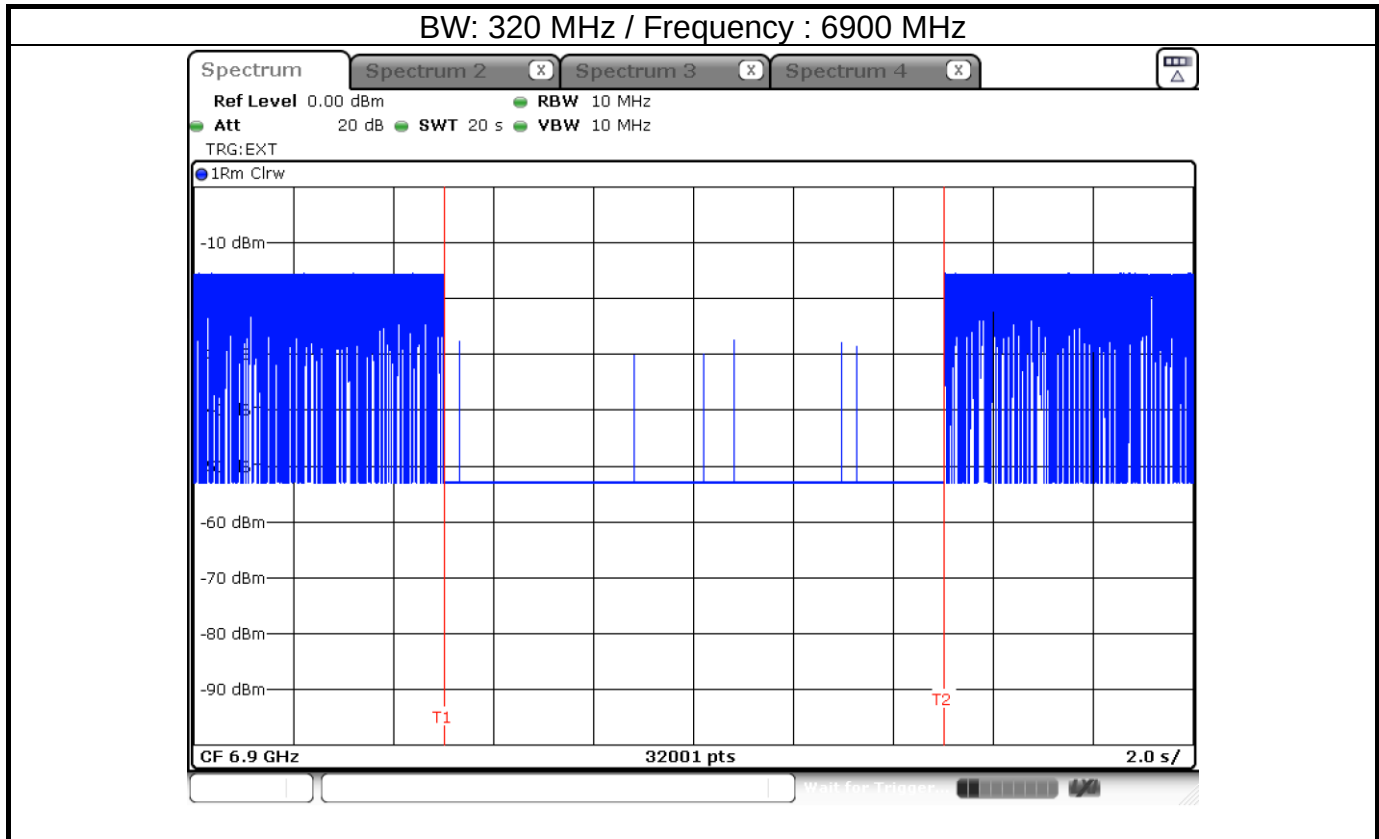





## EUT ceased transmission

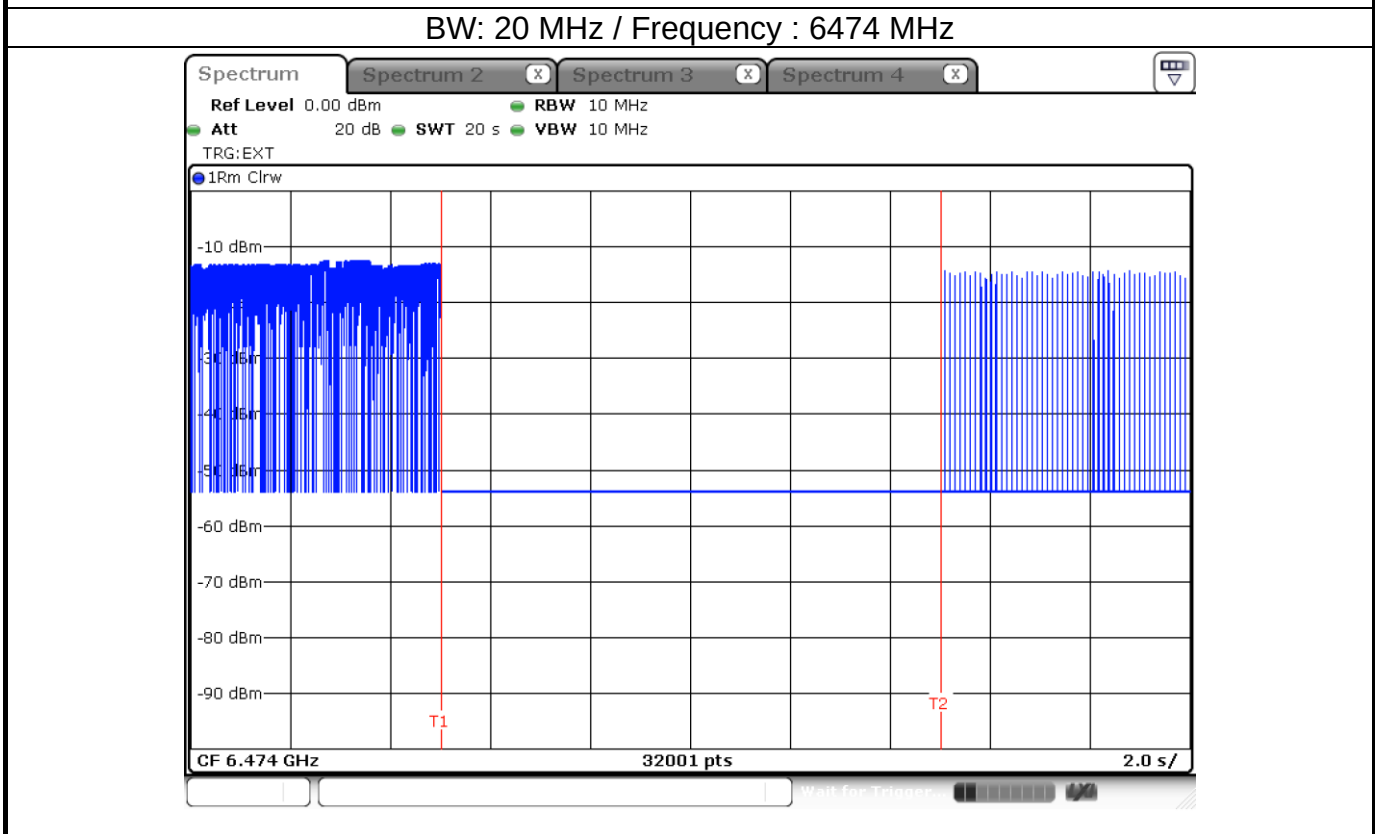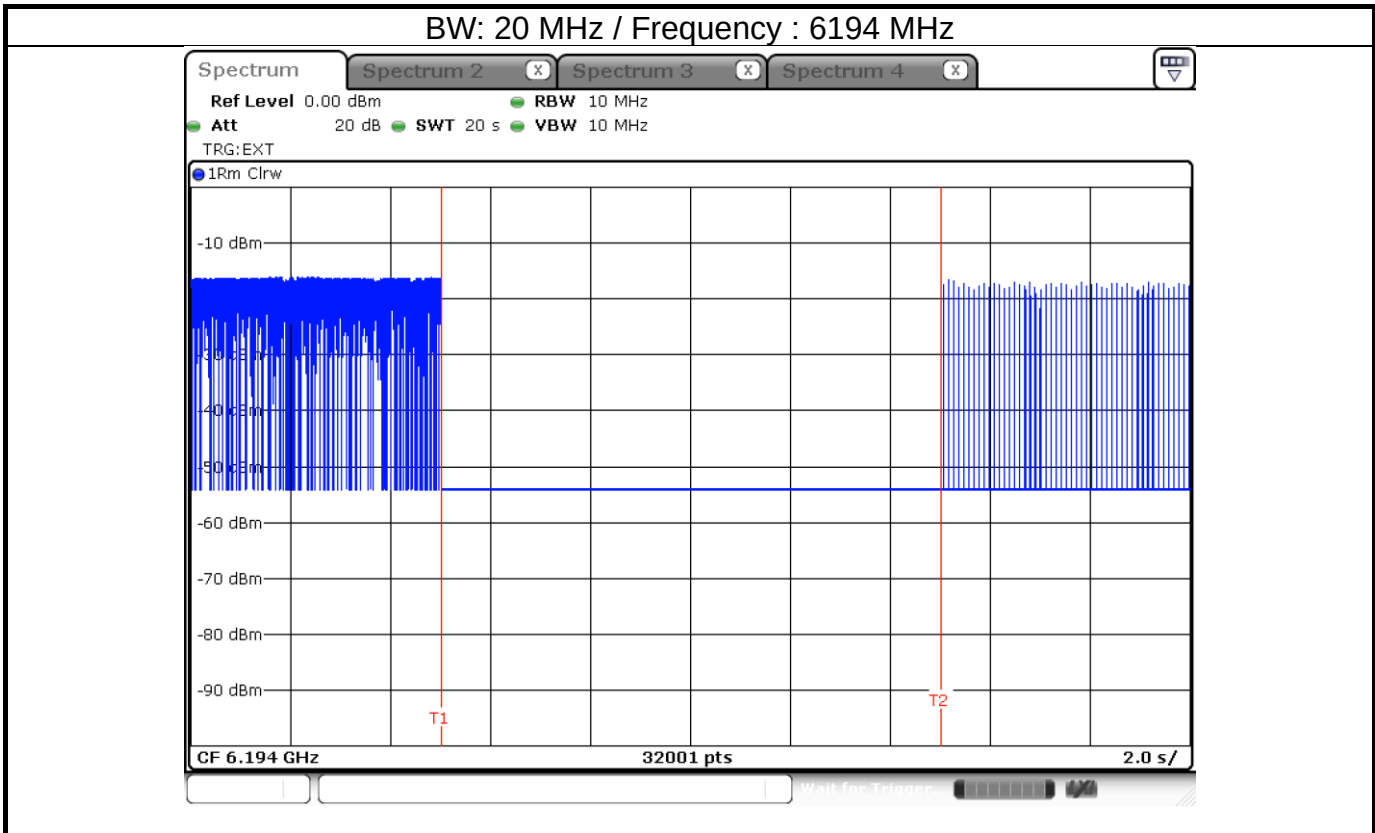


Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

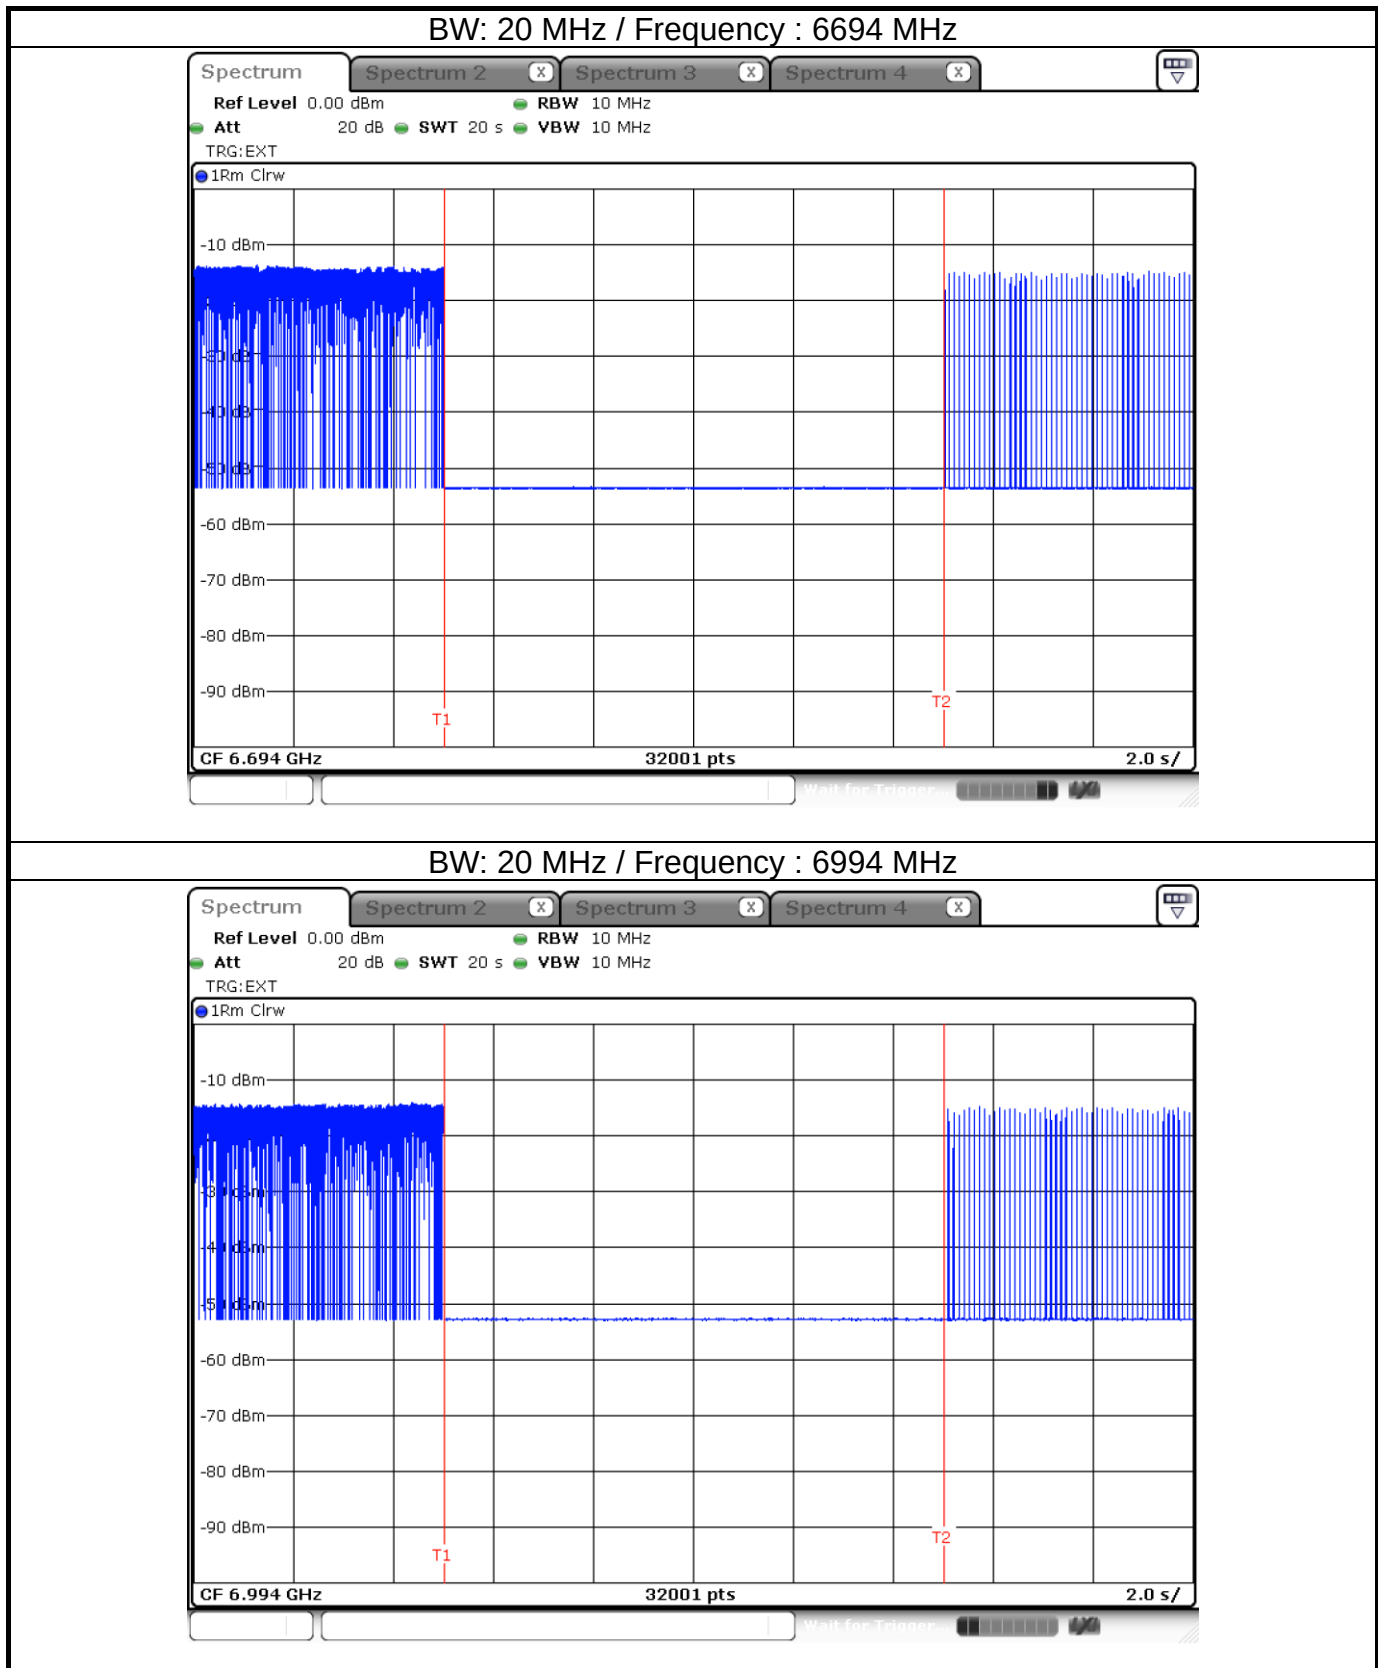


Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

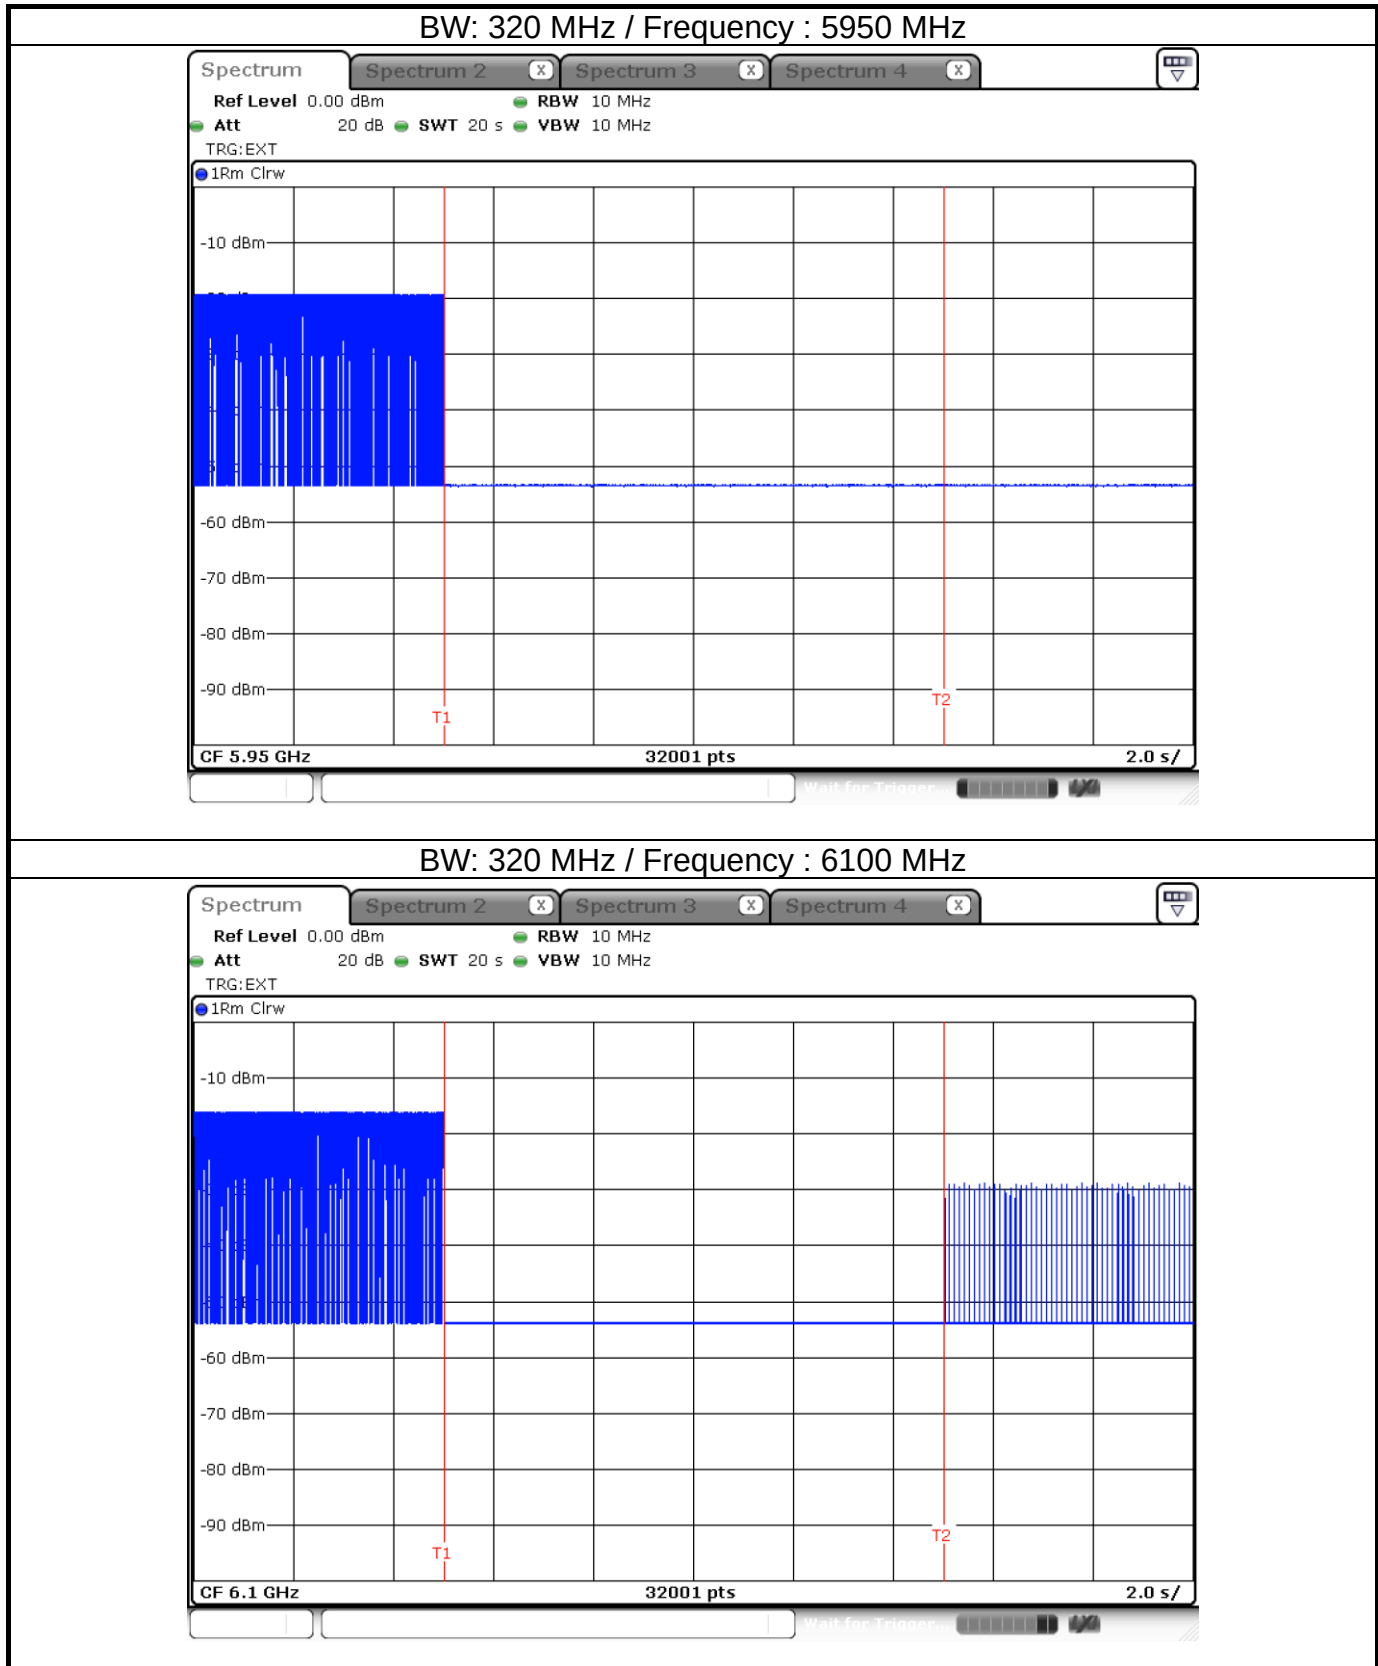


Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

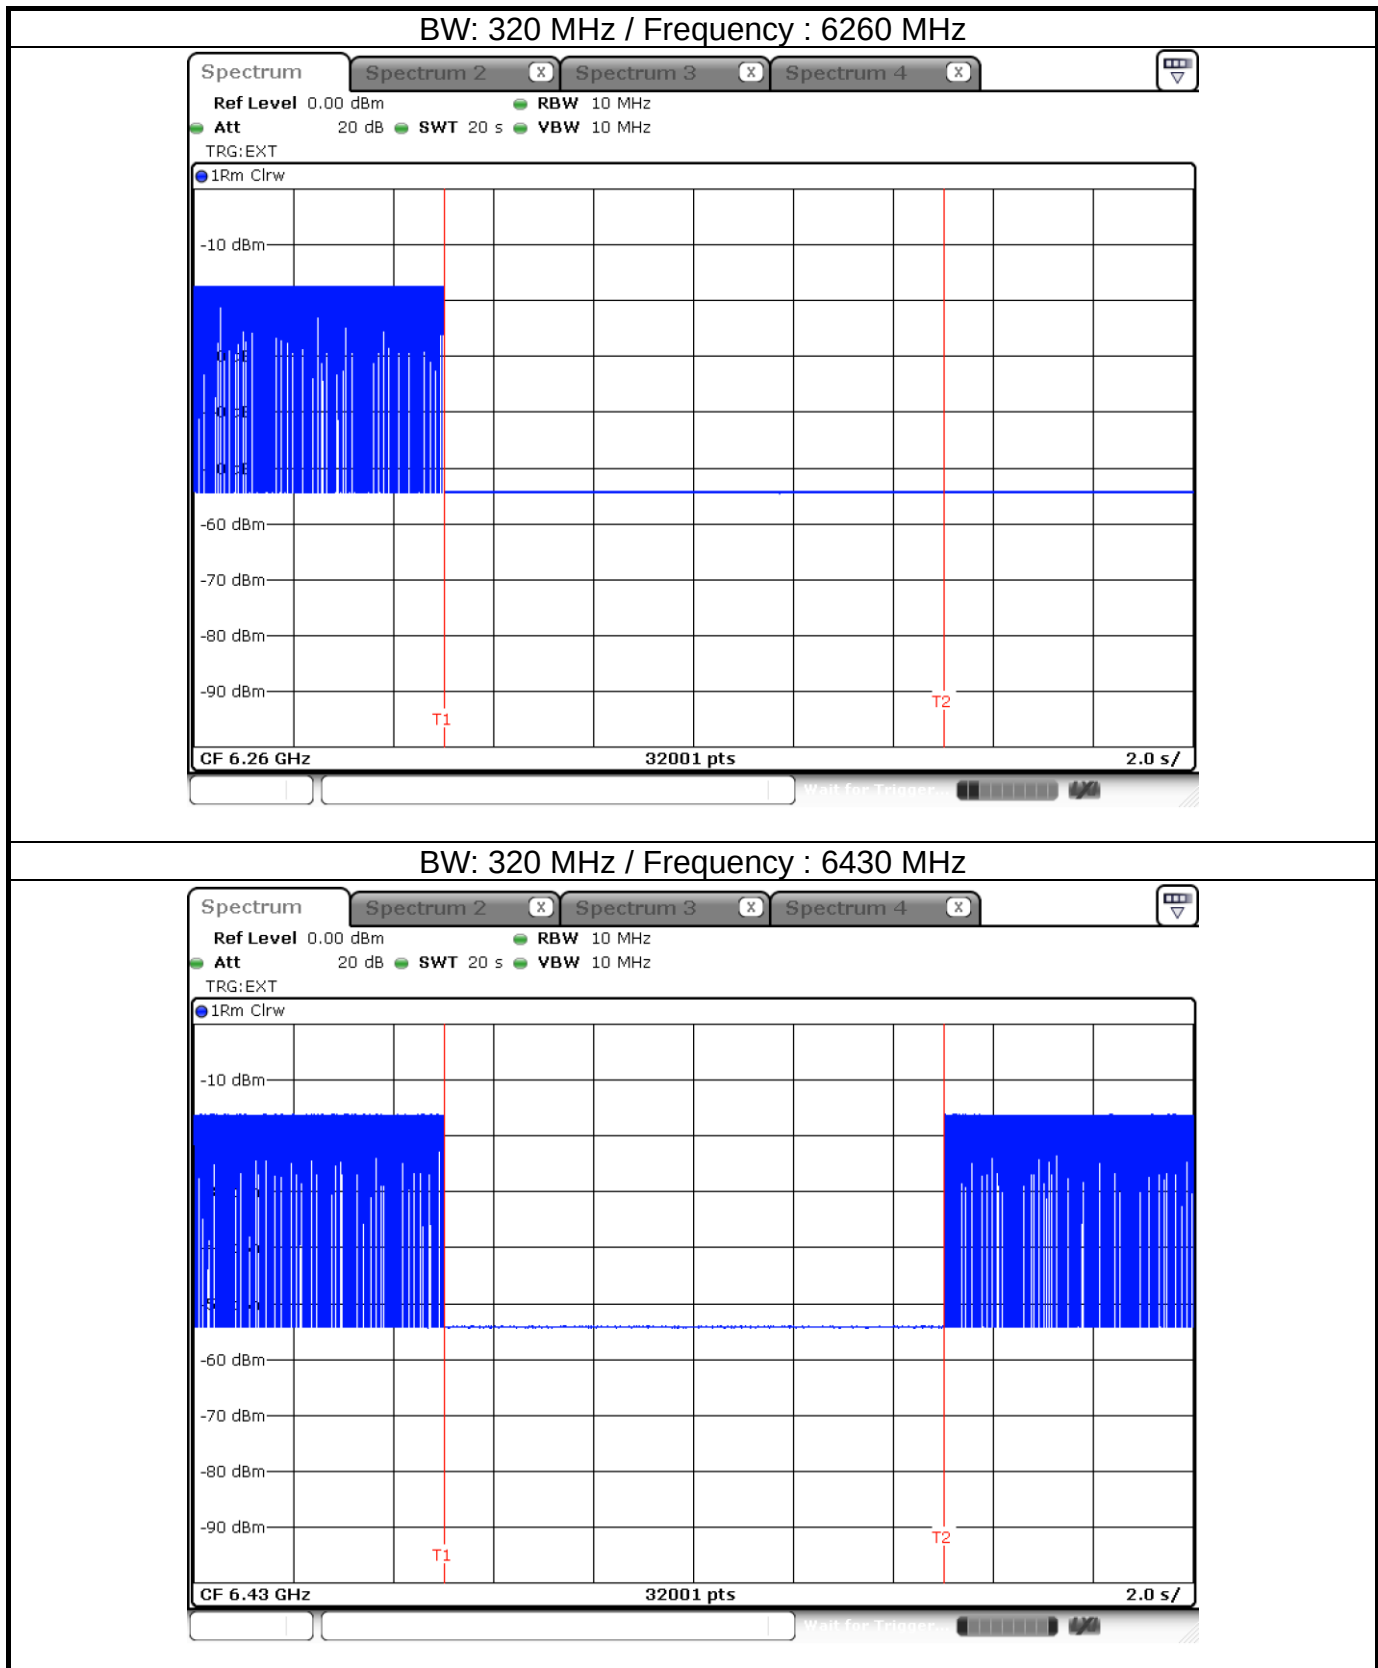


Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

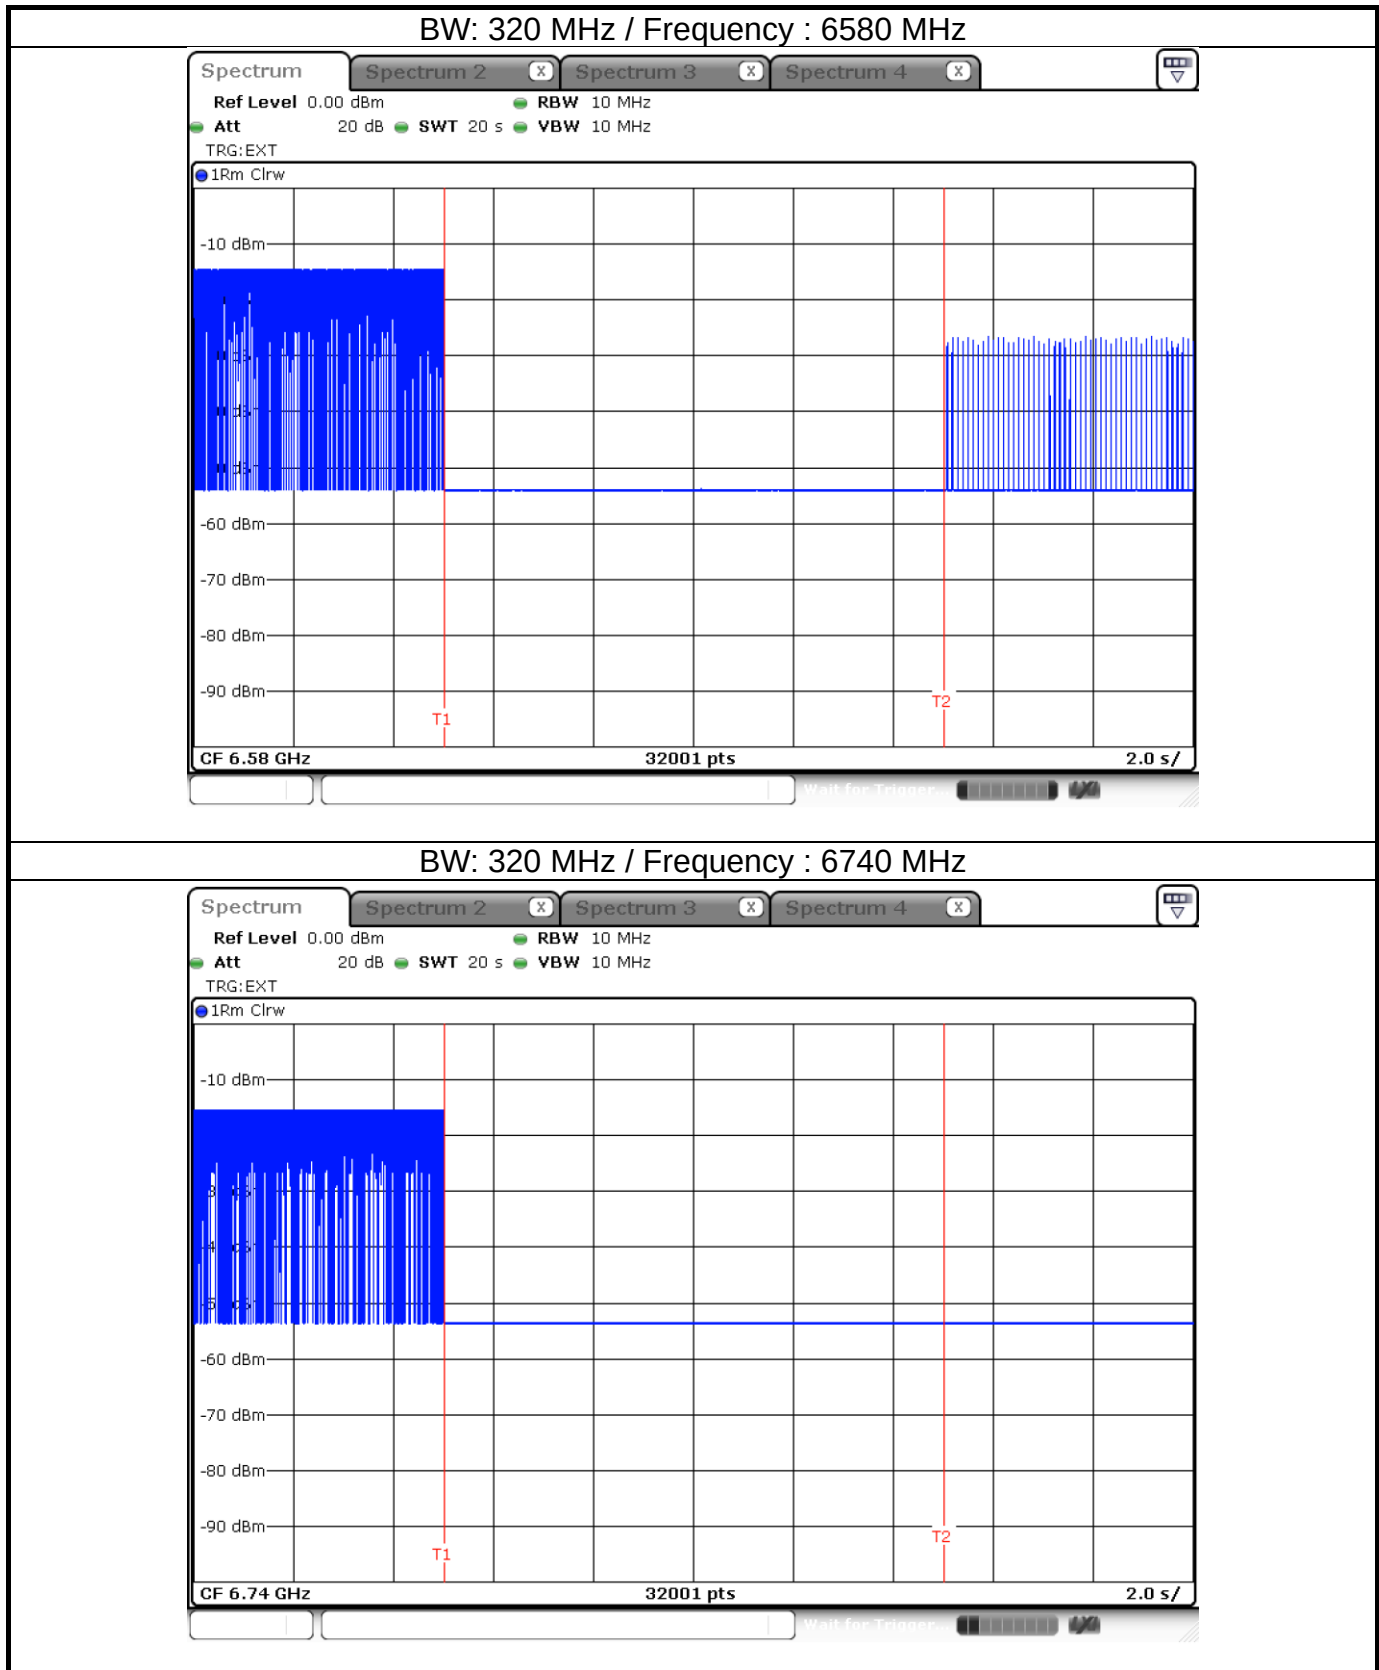

Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

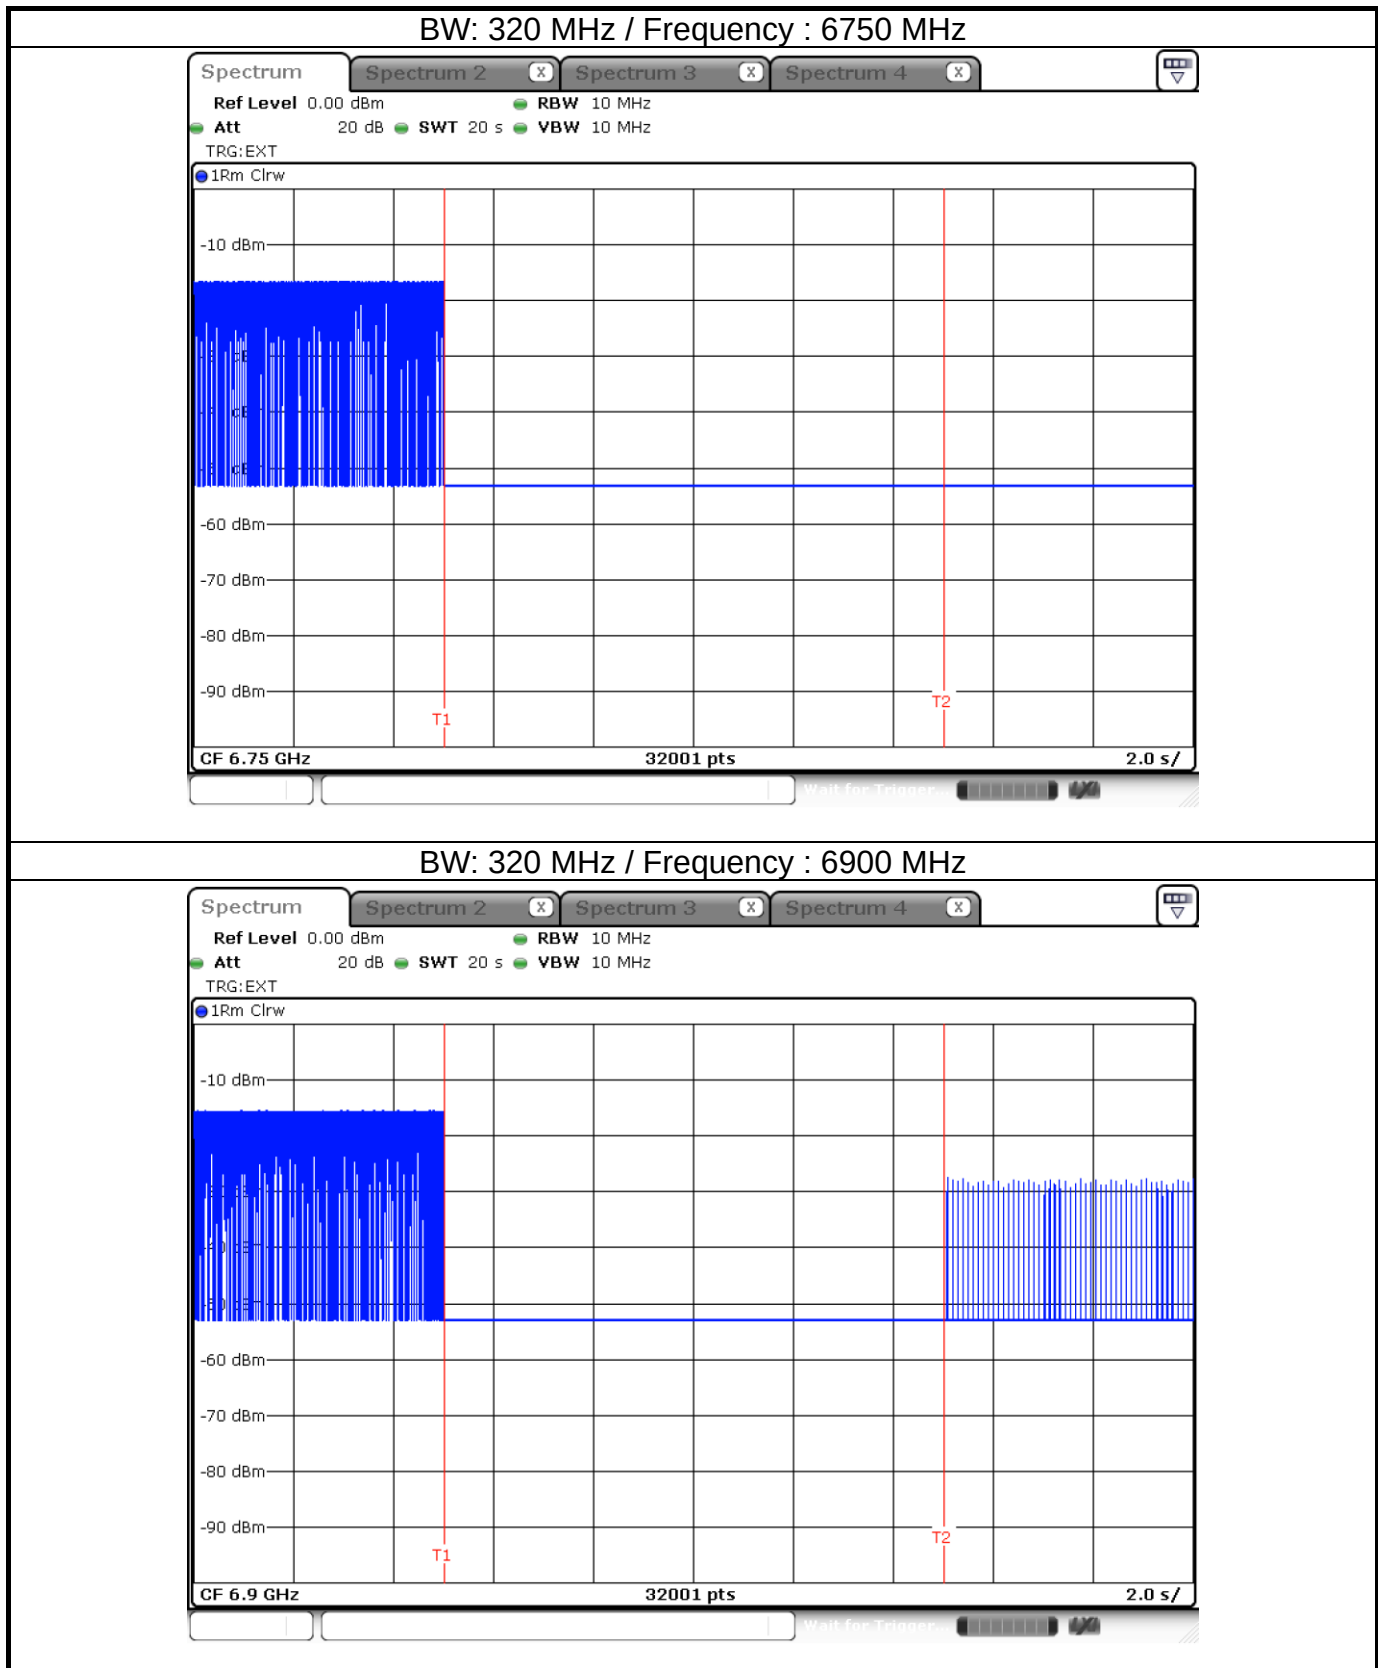

Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

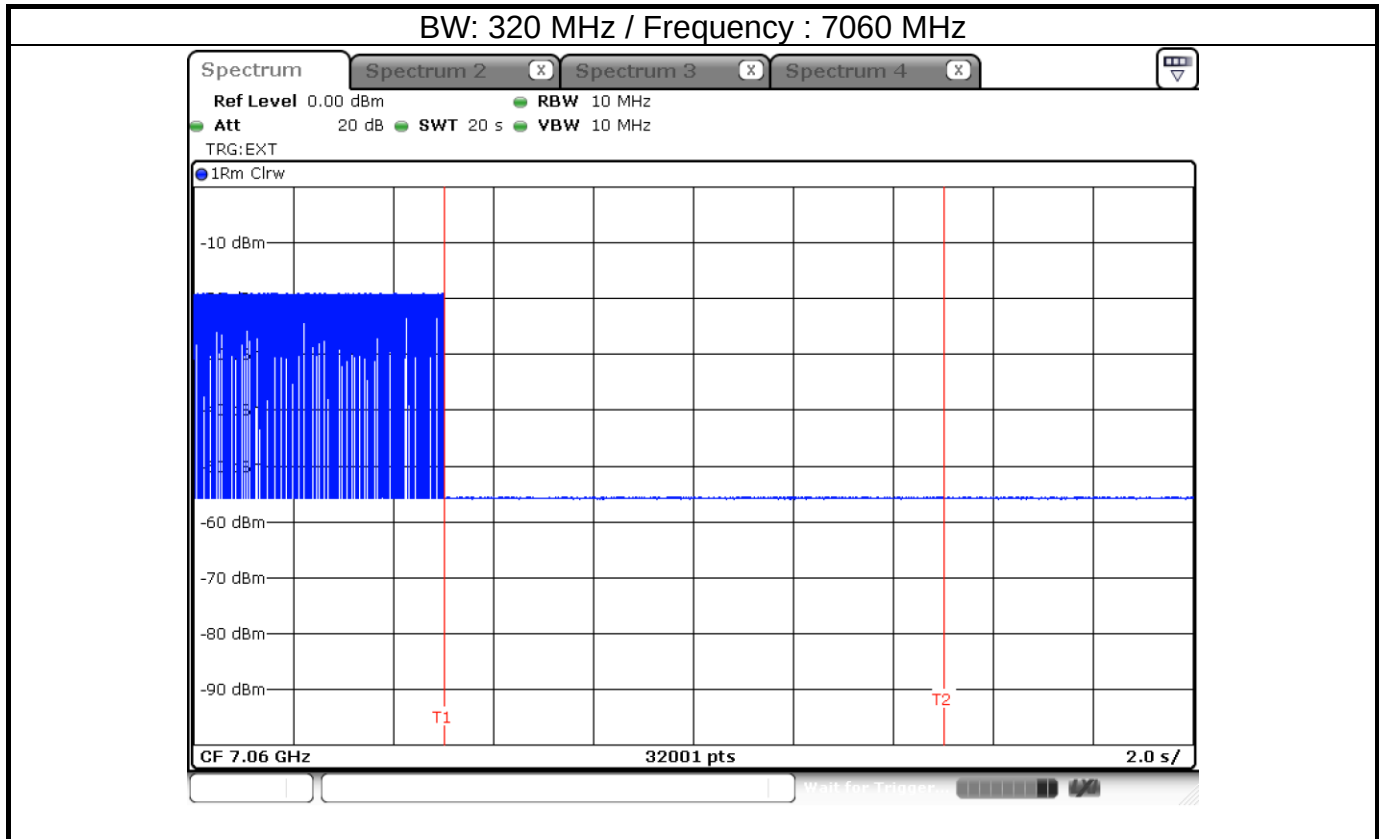

Note: T1: AWGN signal is injected, T2: AWGN signal is removed.




|                 |                 |                  |      |
|-----------------|-----------------|------------------|------|
| Modulation Mode | be EHT320-OFDMA | Test Freq. (MHz) | 6585 |
| Power Phase     | Line            |                  |      |

Test by : Brad Wu

Temperature: 22°C

Humidity: 64%

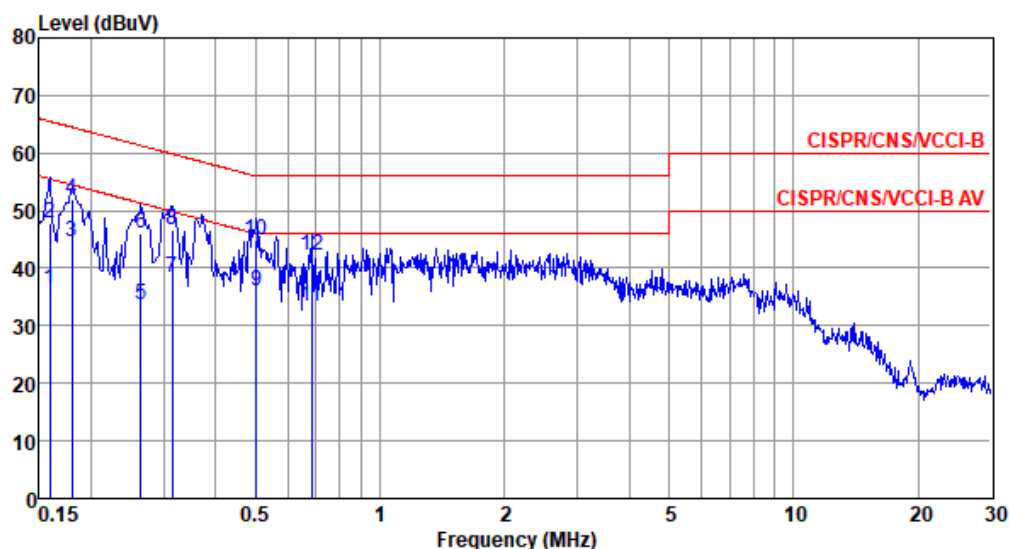

|    | Freq<br>MHz | Level<br>dBUV | Limit<br>Line<br>dBUV | Over<br>Limit<br>dB | Read<br>Level<br>dBUV | Factor<br>dB | Cable<br>loss<br>dB | Aux<br>dB | Remark  |
|----|-------------|---------------|-----------------------|---------------------|-----------------------|--------------|---------------------|-----------|---------|
| 1  | 0.159       | 36.38         | 55.52                 | -19.14              | 26.46                 | 9.63         | 0.08                | 0.21      | Average |
| 2  | 0.159       | 47.96         | 65.52                 | -17.56              | 38.04                 | 9.63         | 0.08                | 0.21      | QP      |
| 3* | 0.180       | 44.60         | 54.50                 | -9.90               | 34.68                 | 9.62         | 0.07                | 0.23      | Average |
| 4  | 0.180       | 51.82         | 64.50                 | -12.68              | 41.90                 | 9.62         | 0.07                | 0.23      | QP      |
| 5  | 0.264       | 33.61         | 51.29                 | -17.68              | 23.64                 | 9.62         | 0.07                | 0.28      | Average |
| 6  | 0.264       | 46.08         | 61.29                 | -15.21              | 36.11                 | 9.62         | 0.07                | 0.28      | QP      |
| 7  | 0.315       | 38.46         | 49.84                 | -11.38              | 28.47                 | 9.62         | 0.07                | 0.30      | Average |
| 8  | 0.315       | 46.65         | 59.84                 | -13.19              | 36.66                 | 9.62         | 0.07                | 0.30      | QP      |
| 9  | 0.502       | 35.96         | 46.00                 | -10.04              | 25.92                 | 9.62         | 0.08                | 0.34      | Average |
| 10 | 0.502       | 44.98         | 56.00                 | -11.02              | 34.94                 | 9.62         | 0.08                | 0.34      | QP      |
| 11 | 0.683       | 33.45         | 46.00                 | -12.55              | 23.38                 | 9.63         | 0.09                | 0.35      | Average |
| 12 | 0.683       | 42.14         | 56.00                 | -13.86              | 32.07                 | 9.63         | 0.09                | 0.35      | QP      |

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBUV) - Limit Line (dBUV).






|                 |                 |                  |      |
|-----------------|-----------------|------------------|------|
| Modulation Mode | be EHT320-OFDMA | Test Freq. (MHz) | 6585 |
| Power Phase     | Neutral         |                  |      |

Test by : Brad Wu

Temperature: 22°C

Humidity: 64%

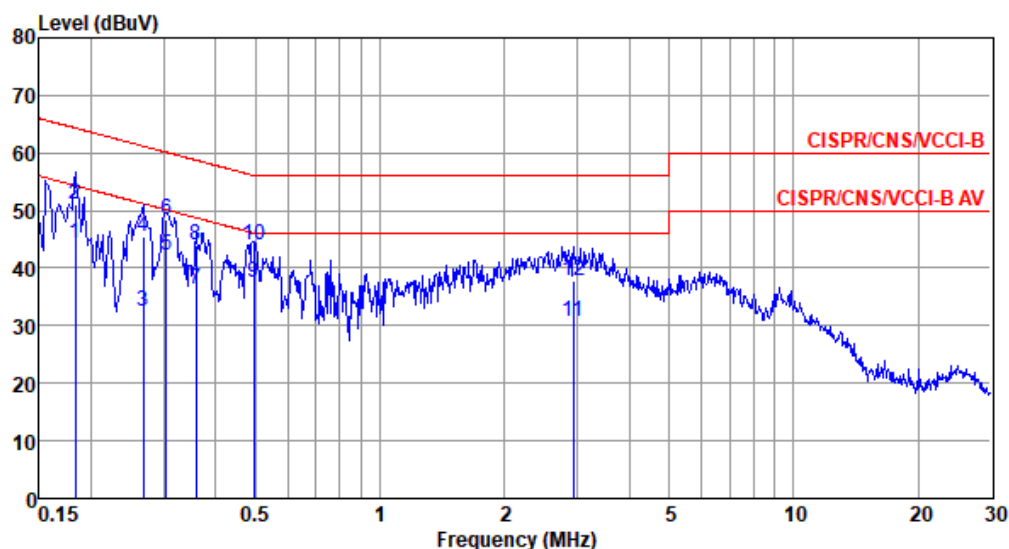

|    | Freq<br>MHz | Level<br>dBUV | Limit<br>Line<br>dBUV | Over<br>Limit<br>dB | Read<br>Level<br>dBUV | Factor<br>dB | Cable<br>loss<br>dB | Aux<br>dB | Remark  |
|----|-------------|---------------|-----------------------|---------------------|-----------------------|--------------|---------------------|-----------|---------|
| 1  | 0.183       | 44.27         | 54.33                 | -10.06              | 34.41                 | 9.63         | 0.07                | 0.16      | Average |
| 2  | 0.183       | 50.96         | 64.33                 | -13.37              | 41.10                 | 9.63         | 0.07                | 0.16      | QP      |
| 3  | 0.267       | 32.51         | 51.20                 | -18.69              | 22.61                 | 9.63         | 0.07                | 0.20      | Average |
| 4  | 0.267       | 45.47         | 61.20                 | -15.73              | 35.57                 | 9.63         | 0.07                | 0.20      | QP      |
| 5* | 0.303       | 42.28         | 50.15                 | -7.87               | 32.37                 | 9.62         | 0.07                | 0.22      | Average |
| 6  | 0.303       | 48.42         | 60.15                 | -11.73              | 38.51                 | 9.62         | 0.07                | 0.22      | QP      |
| 7  | 0.360       | 36.24         | 48.74                 | -12.50              | 26.30                 | 9.62         | 0.08                | 0.24      | Average |
| 8  | 0.360       | 44.13         | 58.74                 | -14.61              | 34.19                 | 9.62         | 0.08                | 0.24      | QP      |
| 9  | 0.494       | 37.46         | 46.10                 | -8.64               | 27.50                 | 9.62         | 0.08                | 0.26      | Average |
| 10 | 0.494       | 44.12         | 56.10                 | -11.98              | 34.16                 | 9.62         | 0.08                | 0.26      | QP      |
| 11 | 2.931       | 30.72         | 46.00                 | -15.28              | 20.55                 | 9.65         | 0.15                | 0.37      | Average |
| 12 | 2.931       | 37.67         | 56.00                 | -18.33              | 27.50                 | 9.65         | 0.15                | 0.37      | QP      |

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).