

FCC Part 15C

Measurement and Test Report

For

Netatmo

892, rue yves kermen - 92100 Boulogne Billancourt - FRANCE

FCC ID: N3A-NSC01

FCC Rule(s):	<u>FCC Part 15C</u>
Product Description:	<u>Netatmo Security Camera</u>
Tested Model:	<u>NSC01</u>
Report No.:	<u>STR15038146I-5</u>
Tested Date:	<u>2015-03-16 to 2015-05-11</u>
Issued Date:	<u>2015-05-12</u>
Tested By:	<u>Seven Song / Engineer</u> <i>Seven Song</i>
Reviewed By:	<u>Lahm Peng / EMC Manager</u> <i>Lahm peng</i>
Approved & Authorized By:	<u>Jandy So / PSQ Manager</u> <i>Jandyso</i>
Prepared By:	

Shenzhen SEM.Test Technology Co., Ltd.

1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,
Bao'an District, Shenzhen, P.R.C. (518101)

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM.Test Technology Co., Ltd.

TABLE OF CONTENTS

1. GENERAL INFORMATION.....3

 1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....3

 1.2 TEST STANDARDS.....4

 1.3 TEST METHODOLOGY.....4

 1.4 TEST FACILITY.....4

 1.5 EUT SETUP AND TEST MODE.....5

2. SUMMARY OF TEST RESULTS6

3. RF EXPOSURE7

 3.1 STANDARD APPLICABLE.....7

 3.2 TEST RESULT.....7

4. ANTENNA REQUIREMENT8

 4.1 STANDARD APPLICABLE.....8

 4.2 EVALUATION INFORMATION8

5. POWER SPECTRAL DENSITY9

 5.1 STANDARD APPLICABLE.....9

 5.2 TEST EQUIPMENT LIST AND DETAILS9

 5.3 TEST PROCEDURE.....9

 5.4 ENVIRONMENTAL CONDITIONS9

 5.5 SUMMARY OF TEST RESULTS/PLOTS10

6. 6DB BANDWIDTH16

 6.1 STANDARD APPLICABLE.....16

 6.2 TEST EQUIPMENT LIST AND DETAILS16

 6.3 TEST PROCEDURE.....16

 6.4 ENVIRONMENTAL CONDITIONS16

 6.5 SUMMARY OF TEST RESULTS/PLOTS17

7. RF OUTPUT POWER23

 7.1 STANDARD APPLICABLE.....23

 7.2 TEST EQUIPMENT LIST AND DETAILS23

 7.3 TEST PROCEDURE.....23

 7.4 ENVIRONMENTAL CONDITIONS23

 7.5 SUMMARY OF TEST RESULTS/PLOTS24

8. FIELD STRENGTH OF SPURIOUS EMISSIONS30

 8.1 MEASUREMENT UNCERTAINTY30

 8.2 STANDARD APPLICABLE.....30

 8.3 TEST EQUIPMENT LIST AND DETAILS30

 8.4 TEST PROCEDURE.....31

 8.5 CORRECTED AMPLITUDE & MARGIN CALCULATION.....31

 8.6 ENVIRONMENTAL CONDITIONS32

 8.7 SUMMARY OF TEST RESULTS/PLOTS32

9. OUT OF BAND EMISSIONS.....54

 9.1 STANDARD APPLICABLE.....54

 9.2 TEST EQUIPMENT LIST AND DETAILS54

 9.3 TEST PROCEDURE.....54

 9.4 ENVIRONMENTAL CONDITIONS55

 9.5 SUMMARY OF TEST RESULTS/PLOTS55

10. CONDUCTED EMISSIONS62

 10.1 MEASUREMENT UNCERTAINTY62

 10.2 TEST EQUIPMENT LIST AND DETAILS62

 10.3 TEST PROCEDURE.....62

 10.4 BASIC TEST SETUP BLOCK DIAGRAM.....62

 10.5 ENVIRONMENTAL CONDITIONS63

 10.6 TEST RECEIVER SETUP.....63

 10.7 SUMMARY OF TEST RESULTS/PLOTS63

 10.8 CONDUCTED EMISSIONS TEST DATA.....63

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: Netatmo
 Address of applicant: 892, rue yves kermen– 92100 Boulogne Billancourt - FRANCE
 Manufacturer: Netatmo
 Address of manufacturer: 892, rue yves kermen– 92100 Boulogne Billancourt - FRANCE

General Description of EUT	
Product Name:	Netatmo Security Camera
Trade Name:	Netatmo
Model No.:	NSC01
Rated Voltage:	Adapter DC 5V
Power Adapter Model:	SED0502000P
	INPUT:AC100-240V~50-60Hz; OUTPUT:DC5V/2A
Device Category:	Fixed Device
<i>Note: The test data is gathered from a production sample provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Support Standards:	802.11b, 802.11g, 802.11n(HT20)
Frequency Range:	2412-2462MHz for 11b/g/n(HT20)
RF Output Power:	16.88dBm (Conducted)
Type of Modulation:	CCK, OFDM, QPSK, BPSK, 16QAM, 64QAM
Data Rate:	1-11Mbps, 6-54Mbps, up to 150Mbps
Quantity of Channels:	11
Channel Separation:	5MHz
Type of Antenna:	Integral Antenna
Antenna Gain:	-3dBi
Lowest Internal Frequency	32.768KHz

1.2 Test Standards

The following report is prepared on behalf of then Netatmo in accordance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 of the Federal Communication Commissions rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. The measurement guide KDB 558074 D01 V03r02 for digital transmission systems shall be performed also.

1.4 Test Facility

FCC – Registration No.: 934118

Shenzhen SEM.Test Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 934118.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

CNAS Registration No.: L4062

Shenzhen SEM.Test Technology Co., Ltd. is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L4062. All measurement facilities used to collect the measurement data are located at 1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C (518101).

1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11b	2412MHz, 2437MHz, 2462MHz
TM2	802.11g	2412MHz, 2437MHz, 2462MHz
TM3	802.11n-HT20	2412MHz, 2437MHz, 2462MHz

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
DC Power Cable	1.0	Unshielded	Without Ferrite
RJ45	3.0	Unshielded	Without Ferrite

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Notebook	Dell	Certification	/

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 2.1093	RF Exposure	Compliant
§ 15.203; § 15.247(b)(4)(i)	Antenna Requirement	Compliant
§ 15.207(a)	Conducted Emission	Compliant
§ 15.247(e)	Power Spectral Density	Compliant
§ 15.247(a)(2)	6 dB Bandwidth	Compliant
§ 15.247(b)(3)	RF Output Power	Compliant
§ 15.209(a)	Radiated Emission	Compliant
§ 15.247(d)	Band Edge (Out of Band Emissions)	Compliant

N/A: not applicable

3. RF Exposure

3.1 Standard Applicable

According to § 1.1307 and § 2.1093, the portable transmitter must comply the RF exposure requirements.

3.2 Test Result

This product complied with the requirement of the RF exposure, please see the RF exposure Report.

4. Antenna Requirement

4.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

4.2 Evaluation Information

This product has an integral antenna, fulfill the requirement of this section.

5. Power Spectral Density

5.1 Standard Applicable

According to 15.247(a)(1)(iii), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

5.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	Agilent	E4402B	US41192821	2014-05-28	2015-05-27
Attenuator	ATTEN	ATS100-4-20	/	2014-05-28	2015-05-27

5.3 Test Procedure

According to the KDB 558074 D01 V03r02, such specifications require that the same method as used to determine the conducted output power shall also be used to determine the power spectral density. The test method of power spectral density as below:

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set span to at least 1.5 times the OBW.
- c) Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set VBW $\geq 3 \times \text{RBW}$.
- e) Detector = power averaging (RMS) or sample detector (when RMS not available).
- f) Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span}/\text{RBW}$.
- g) Sweep time = auto couple.
- h) Employ trace averaging (RMS) mode over a minimum of 100 traces.
- i) Use the peak marker function to determine the maximum amplitude level.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span in order to meet the minimum measurement point requirement as the RBW is reduced).

5.4 Environmental Conditions


Temperature:	26° C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

5.5 Summary of Test Results/Plots


Test Mode	Test Channel MHz	Power Spectral Density dBm/3kHz	Limit dBm/3kHz
802.11b	2412	-3.131	8
	2437	-4.295	8
	2462	-4.062	8
802.11g	2412	-6.571	8
	2437	-7.378	8
	2462	-7.161	8
802.11n HT20	2412	-6.365	8
	2437	-6.747	8
	2462	-7.798	8

Please refer to the following test plots:


802.11b-Low Channel

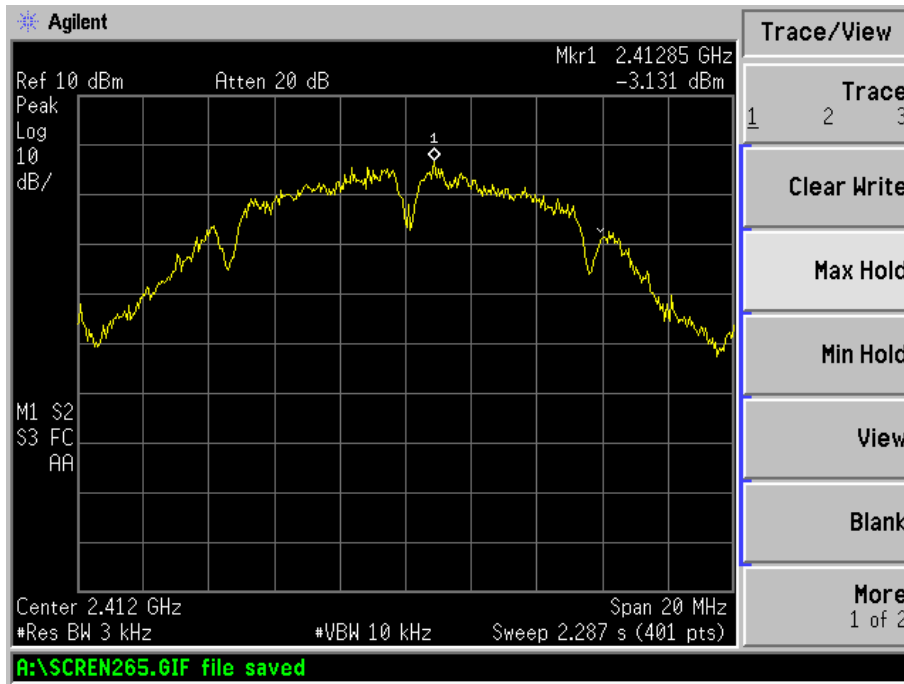


802.11b-Middle Channel

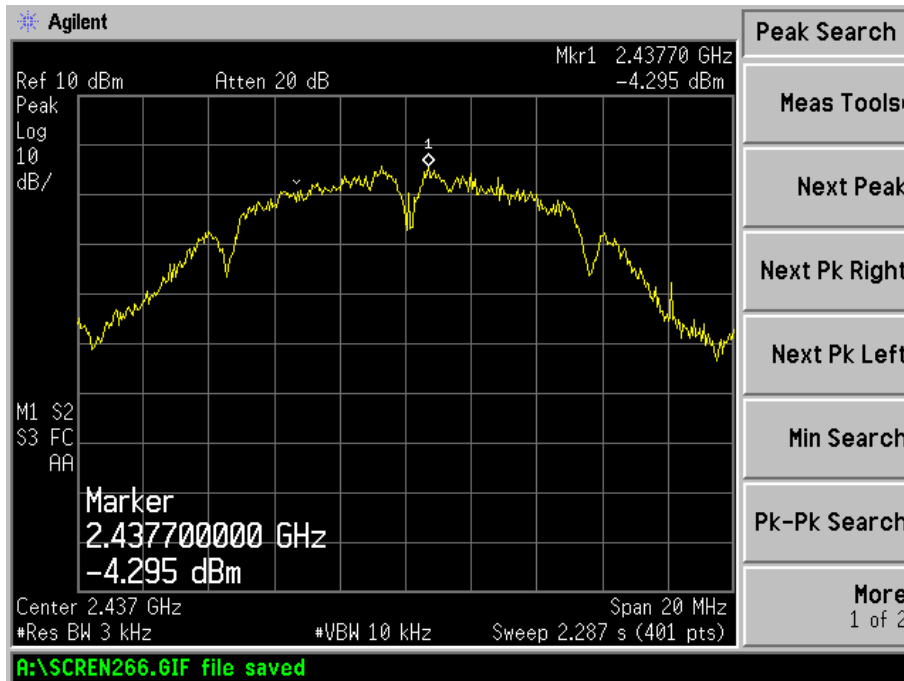


802.11b-High Channel

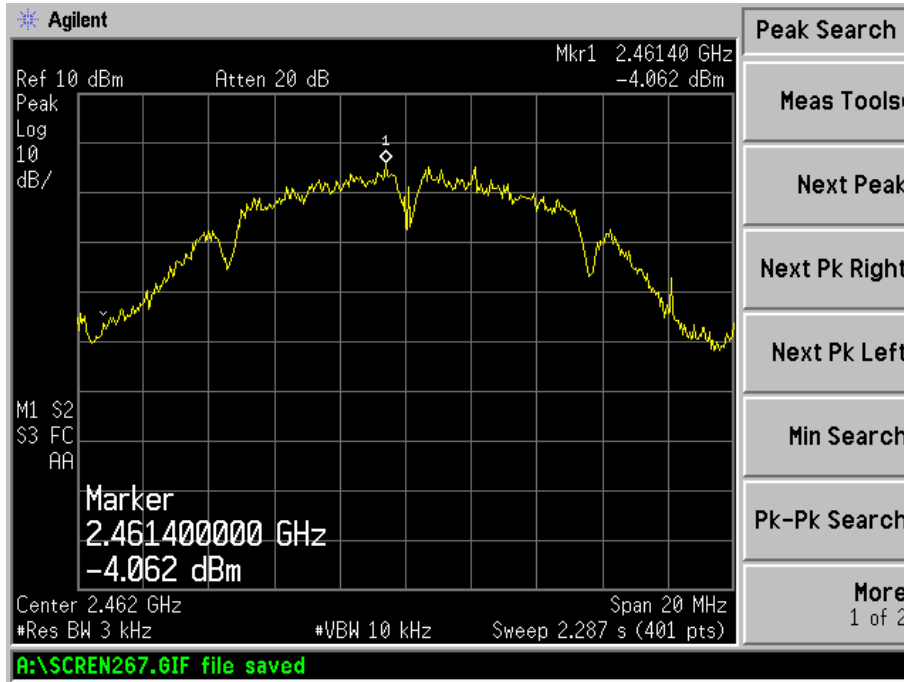


802.11g-Low Channel

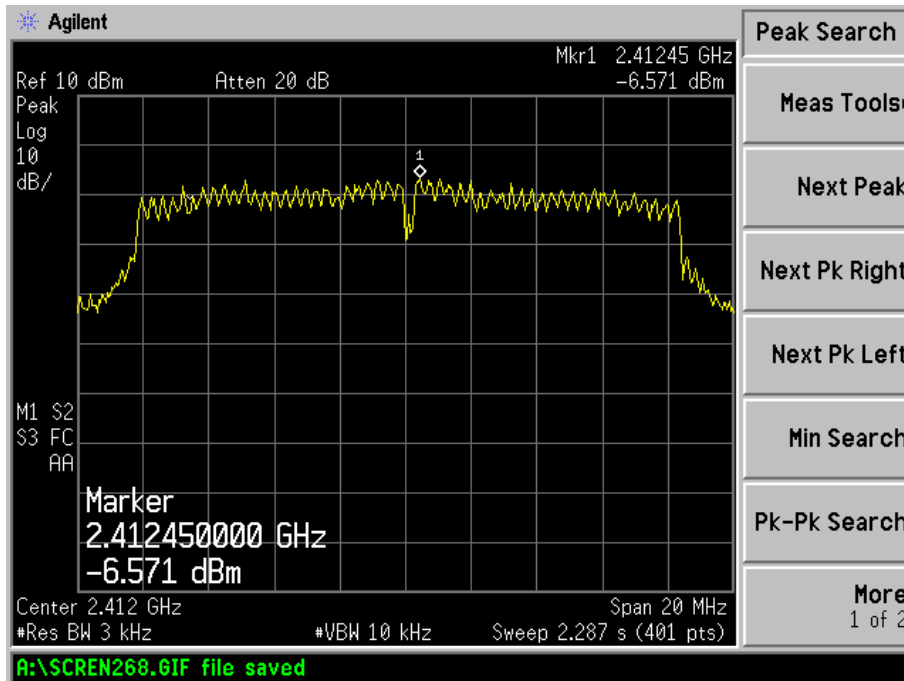


802.11g-Middle Channel

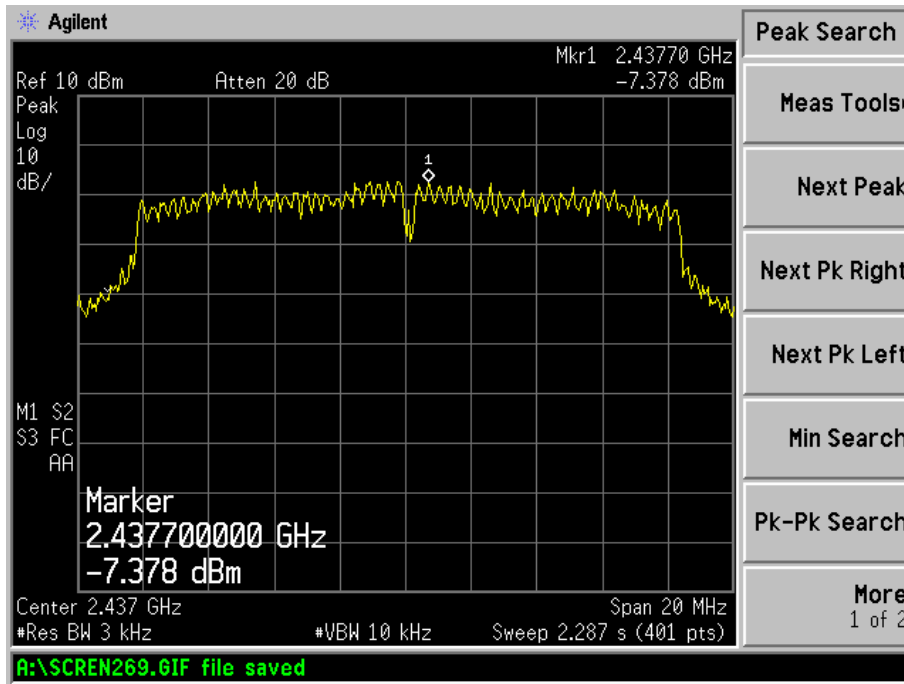


802.11g-High Channel

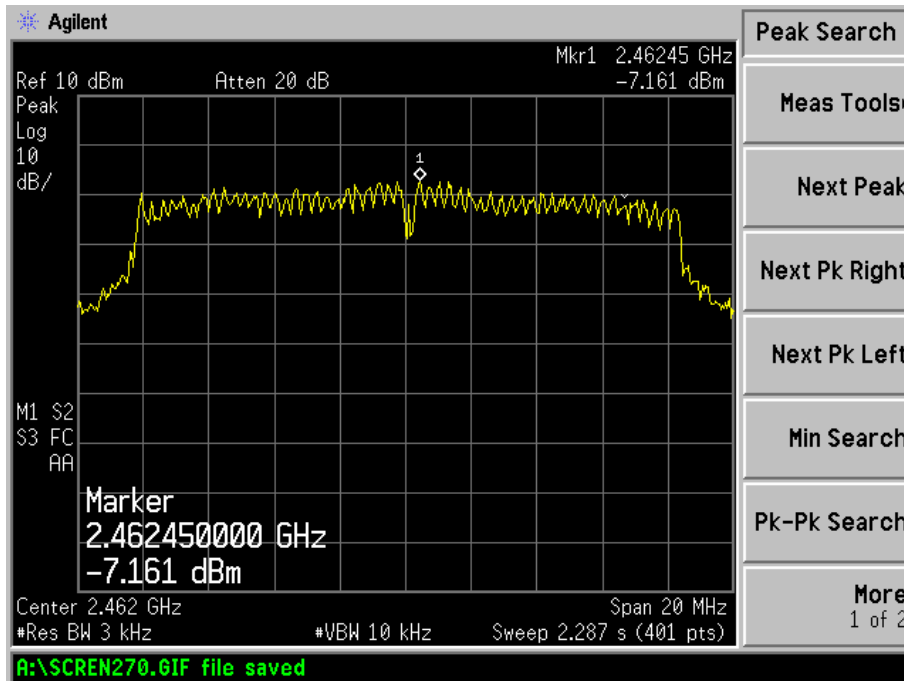


802.11n-HT20-Low Channel

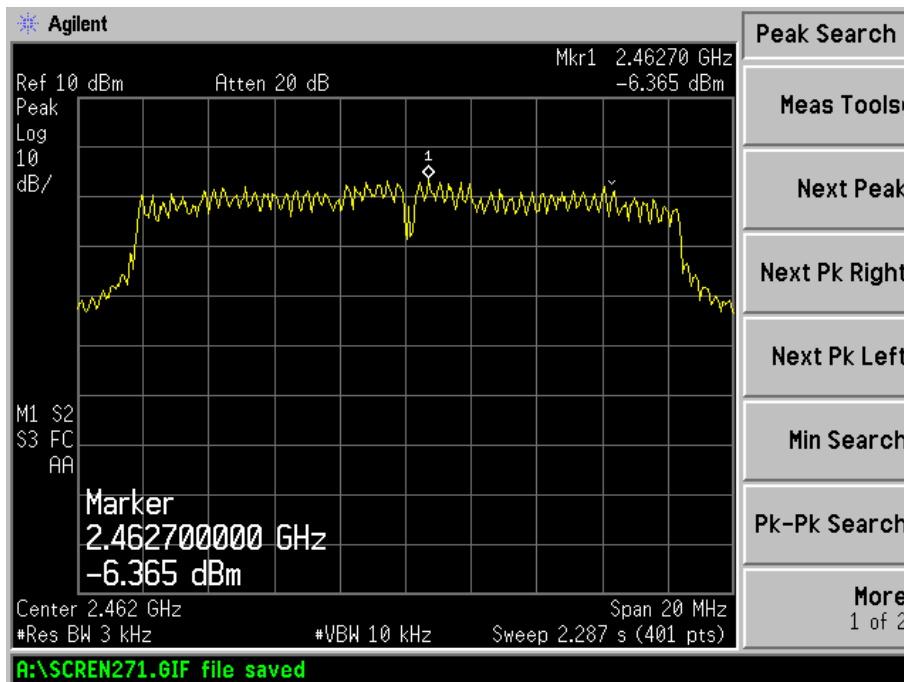

802.11n-HT20-Middle Channel

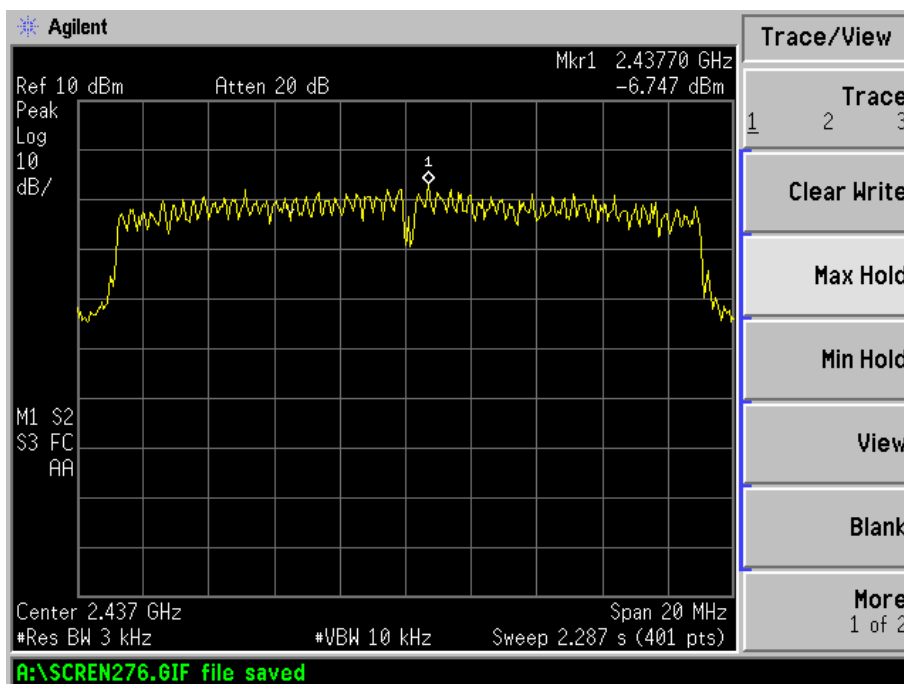

802.11n-HT20-High Channel

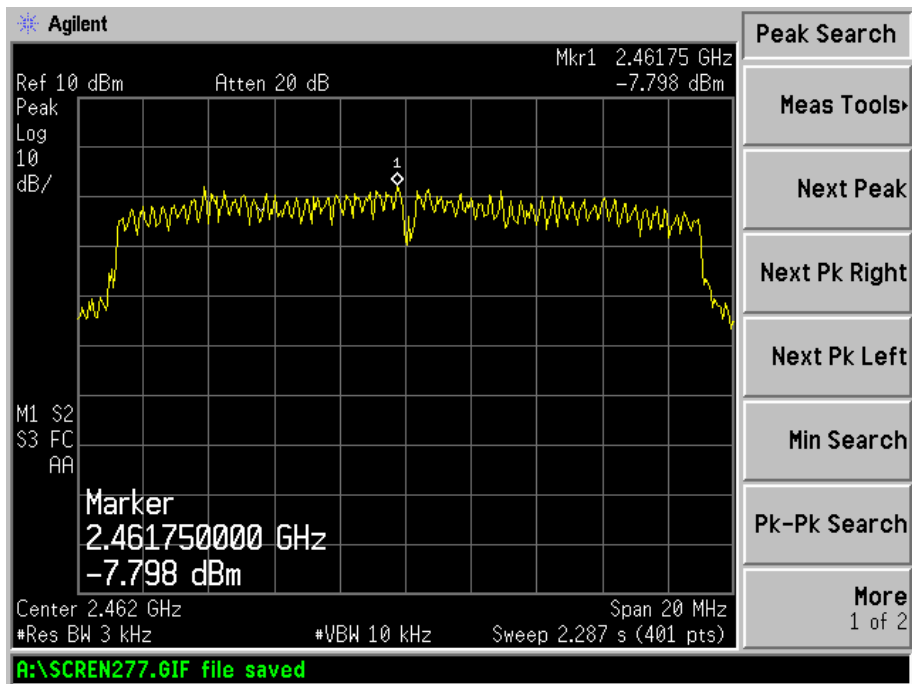

6. 6dB Bandwidth

6.1 Standard Applicable

According to 15.247(a)(2). Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

6.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	Agilent	E4402B	US41192821	2014-05-28	2015-05-27
Attenuator	ATTEN	ATS100-4-20	/	2014-05-28	2015-05-27

6.3 Test Procedure

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.4 Environmental Conditions


Temperature:	25° C
Relative Humidity:	53%
ATM Pressure:	1018 mbar

6.5 Summary of Test Results/Plots


Test Mode	Test Channel MHz	6 dB Bandwidth kHz	99% Bandwidth kHz	Limit kHz
802.11b	2412	8238	12245.2	>500
	2437	7683	12230.9	>500
	2462	8131	12253.7	>500
802.11g	2412	14141	16512.1	>500
	2437	16360	16515.0	>500
	2462	16040	16513.3	>500
802.11n-HT20	2412	16052	17587.9	>500
	2437	15999	17597.1	>500
	2462	17619	17601.3	>500

Please refer to the following test plots:


802.11b-Low Channel

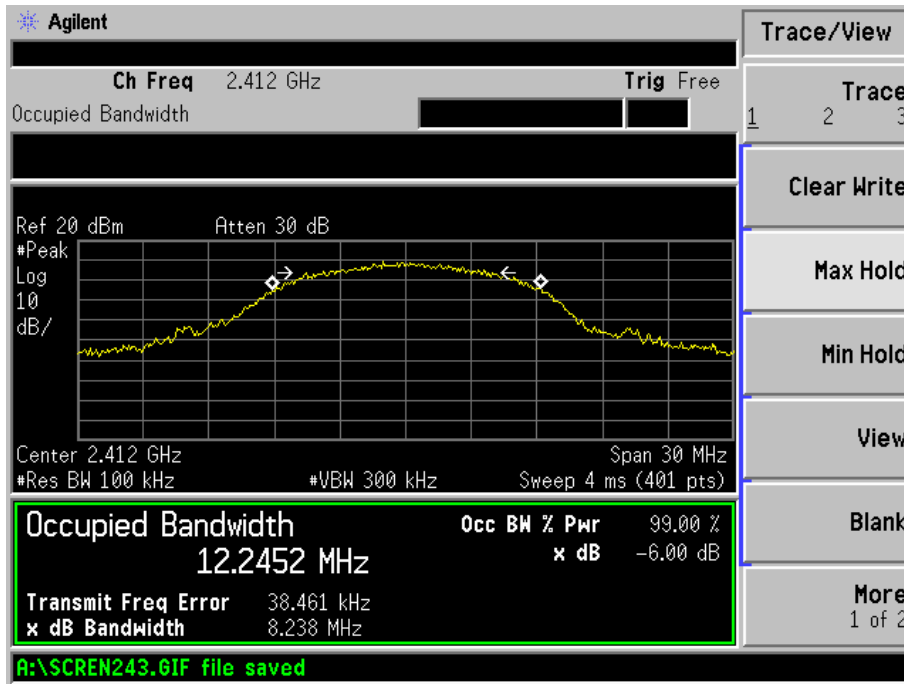


802.11b-Middle Channel

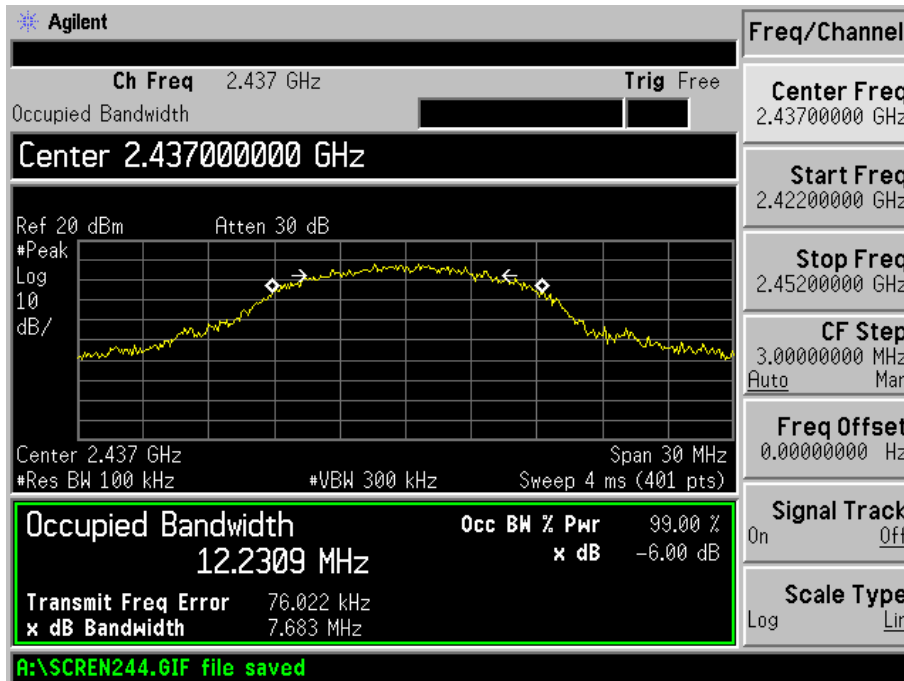


802.11b-High Channel

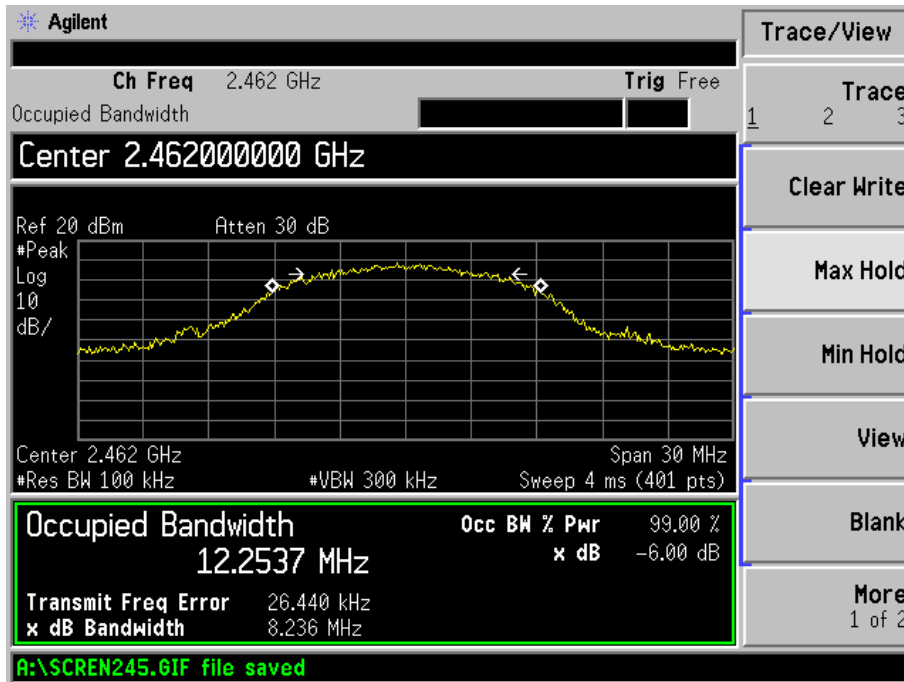


802.11g-Low Channel

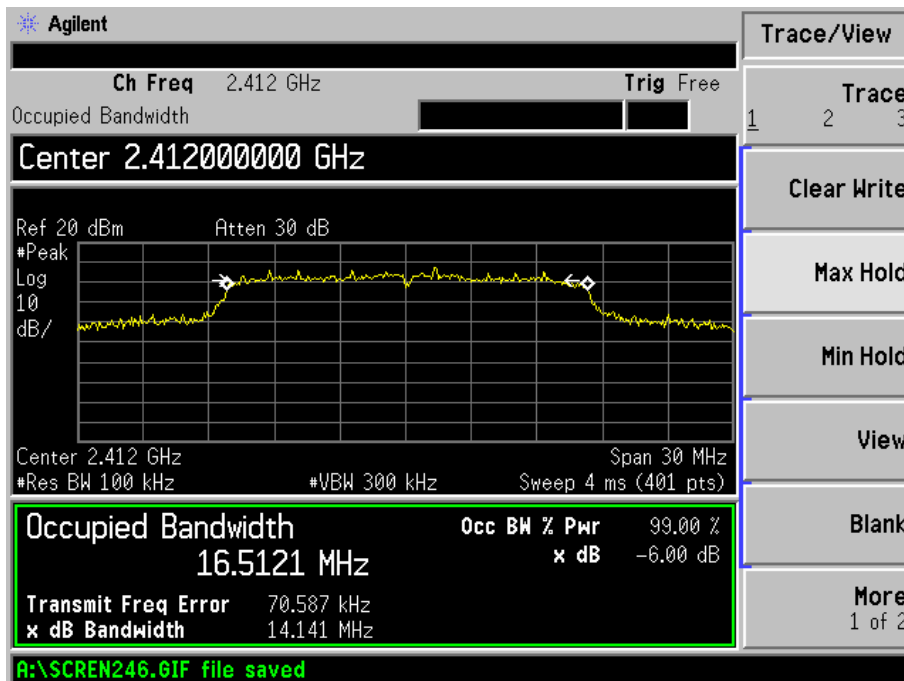


802.11g-Middle Channel

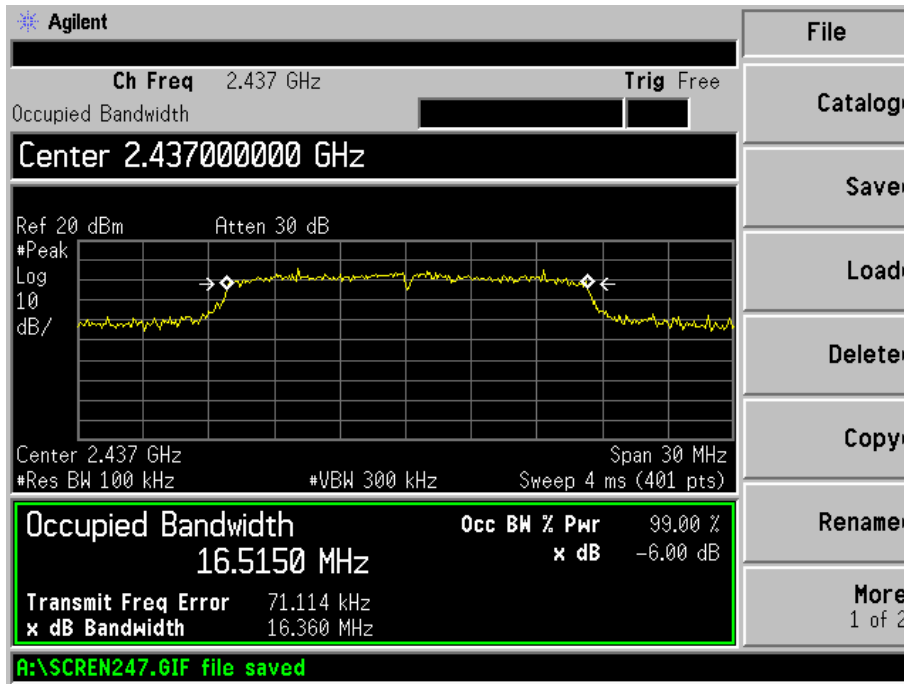


802.11g-High Channel

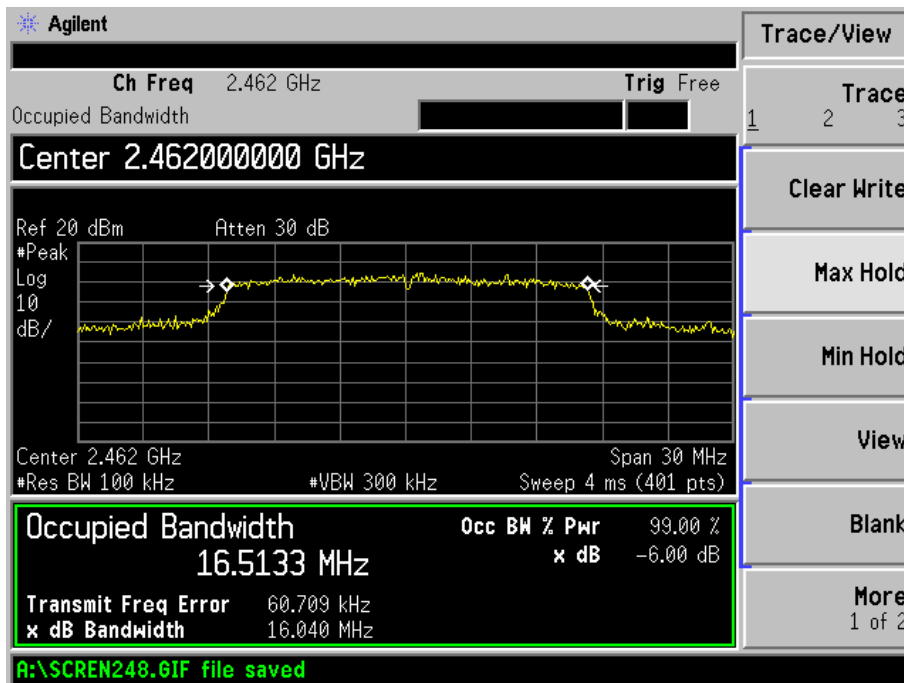


802.11n-HT20-Low Channel

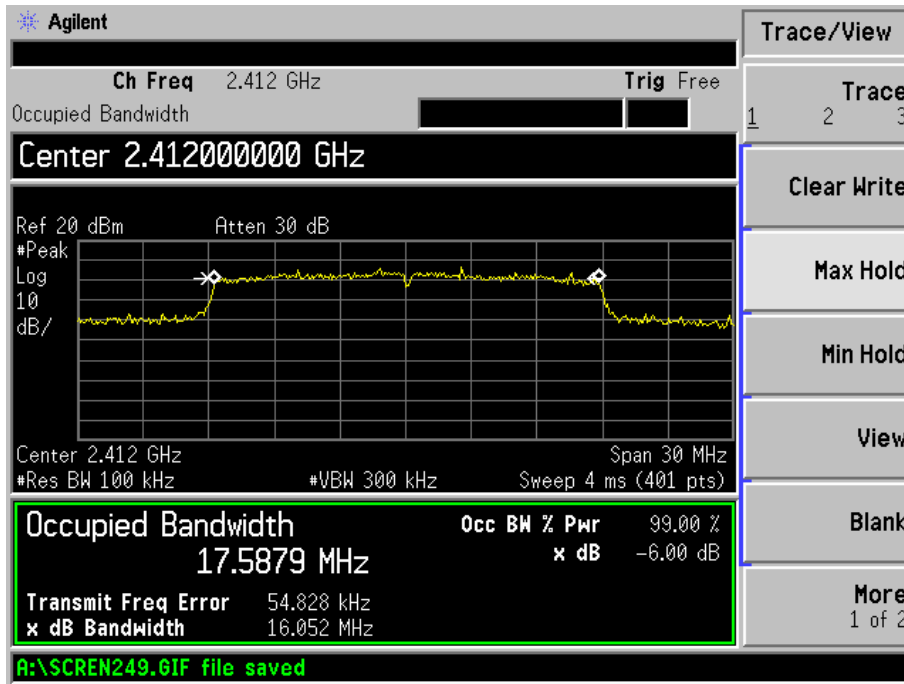

802.11n-HT20-Middle Channel

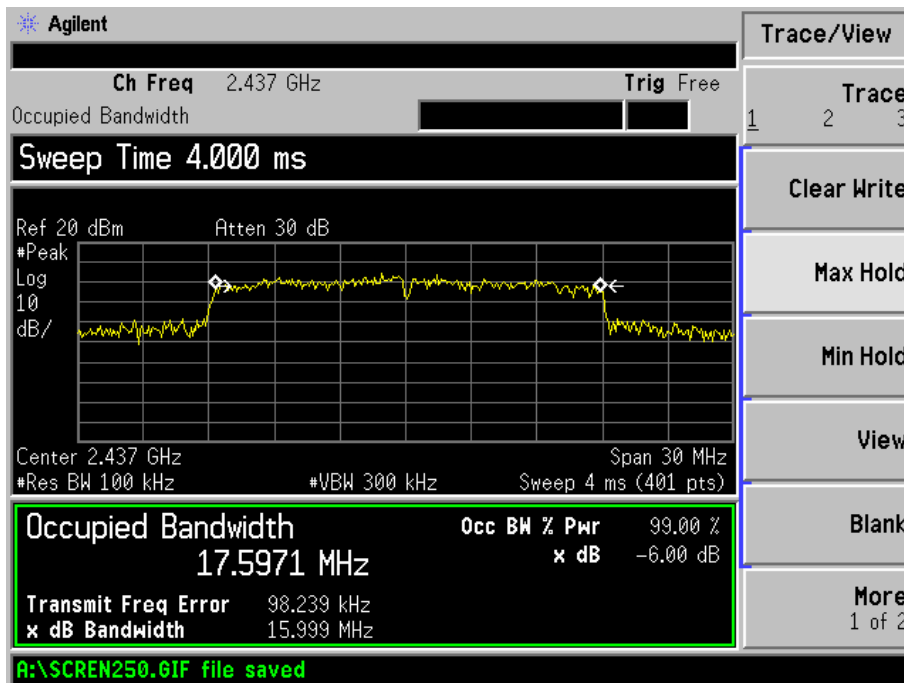

802.11n-HT20-High Channel

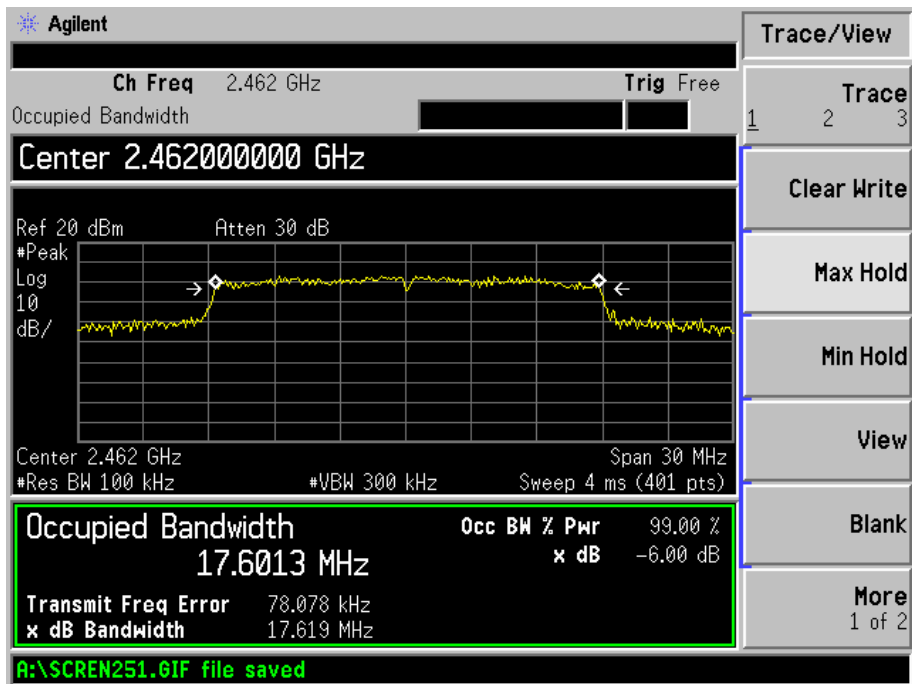

7. RF Output Power

7.1 Standard Applicable

According to 15.247(b)(3). For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.

7.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	Agilent	E4402B	US41192821	2014-05-28	2015-05-27
Attenuator	ATTEN	ATS100-4-20	/	2014-05-28	2015-05-27

7.3 Test Procedure

According to section 15.247(b)-power output of the KDB-558074 D01 V03r02, 9.2.2.2 (channel integration method) When this option is exercised, the measured power is to be referenced to the OBW rather than the DTS bandwidth

- a) Set span to at least 1.5 times the OBW.
- b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
- c) Set VBW $\geq 3 \times$ RBW.
- d) Number of points in sweep $\geq 2 \times$ span / RBW. (This gives bin-to-bin spacing \leq RBW/2, so that narrowband signals are not lost between frequency bins.)
- e) Sweep time = auto.
- f) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- g) If transmit duty cycle < 98 %, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle ≥ 98 %, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run” .
- h) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument’s band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

7.4 Environmental Conditions


Temperature:	26° C
Relative Humidity:	57%
ATM Pressure:	1011 mbar

7.5 Summary of Test Results/Plots


Test Mode	Frequency MHz	Reading dBm	Output Power mW	Limit mW
802.11b_1Mbps	2412	16.31	42.76	1000
	2437	16.28	42.46	1000
	2462	15.94	39.26	1000
802.11g_6Mbps	2412	16.29	42.56	1000
	2437	16.04	40.18	1000
	2462	15.98	39.63	1000
802.11n HT20_MCS0	2412	16.88	48.75	1000
	2437	16.79	47.75	1000
	2462	16.50	44.67	1000

Please refer to the following test plots:


802.11b-1Mbps-Low Channel

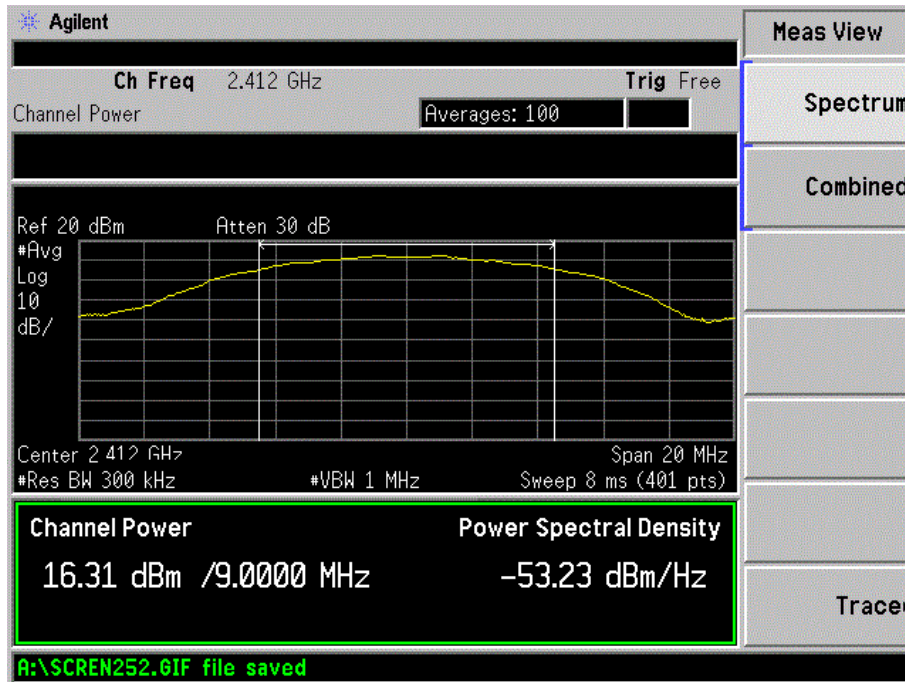


802.11b -1Mbps-Middle Channel

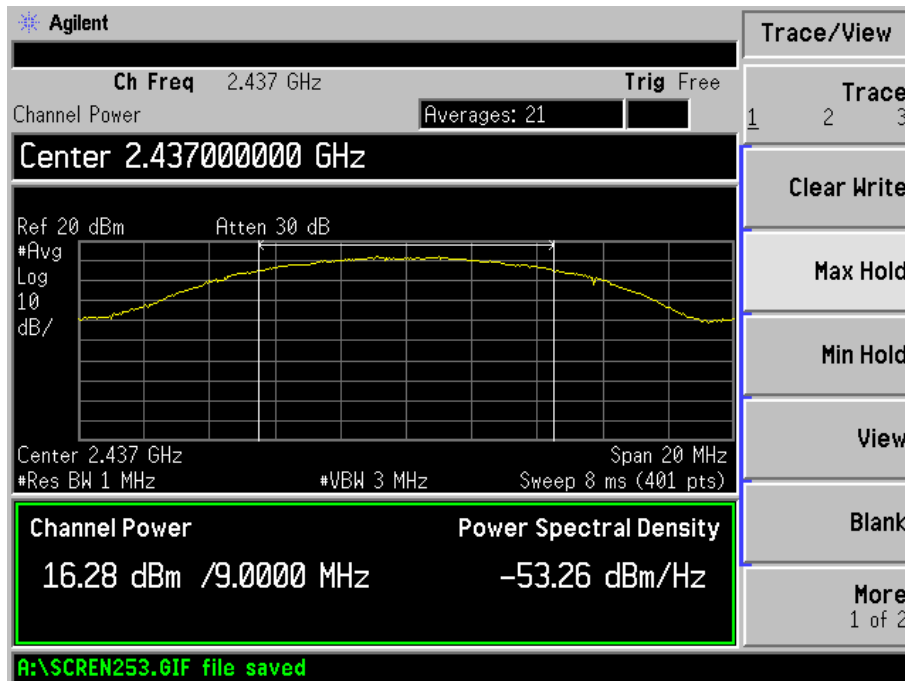


802.11b -1Mbps-High Channel

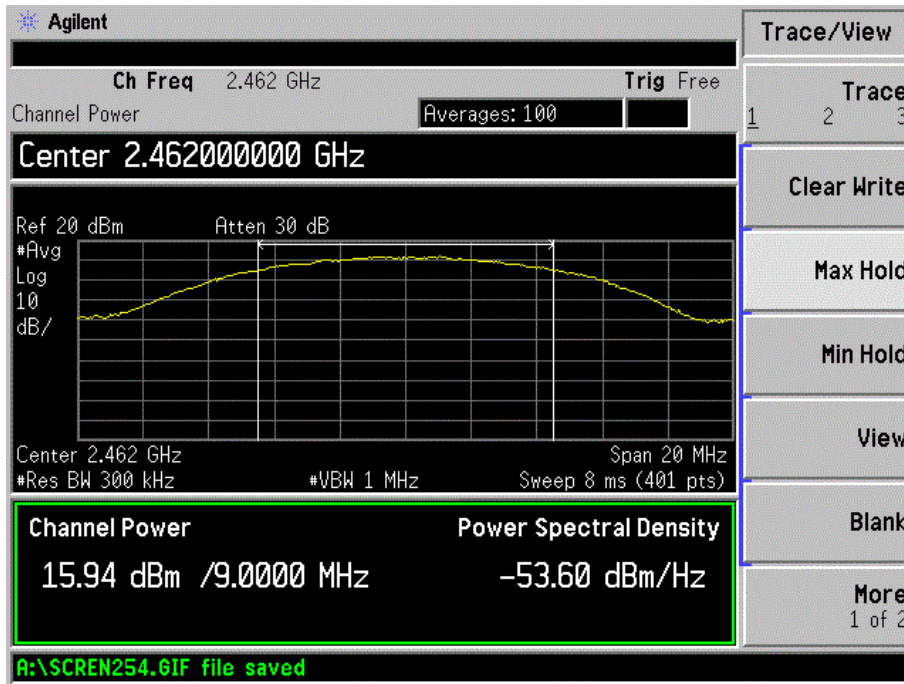


802.11g-6Mbps-Low Channel

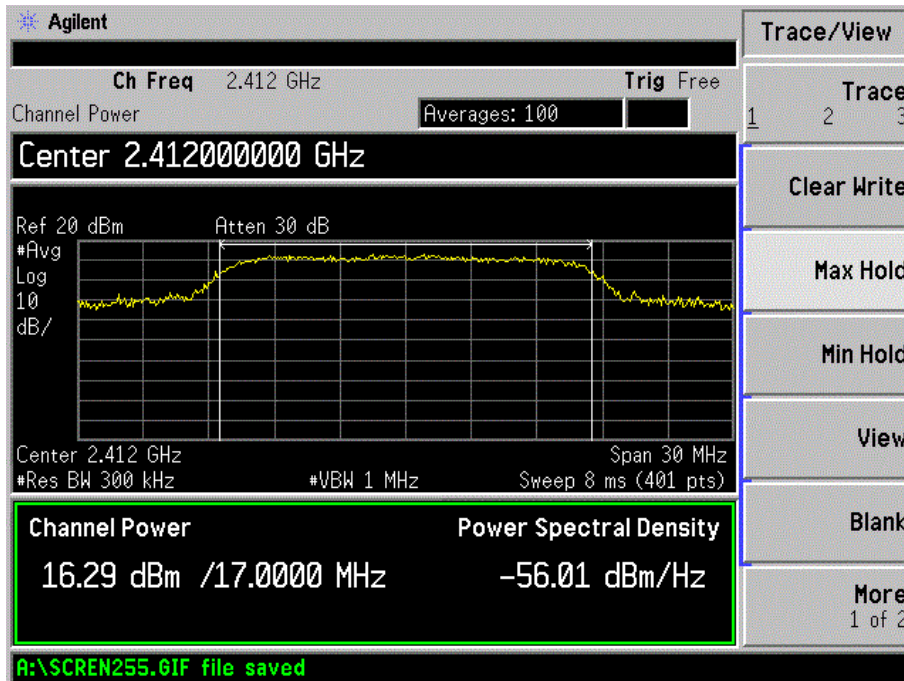


802.11g-6Mbps-Middle Channel

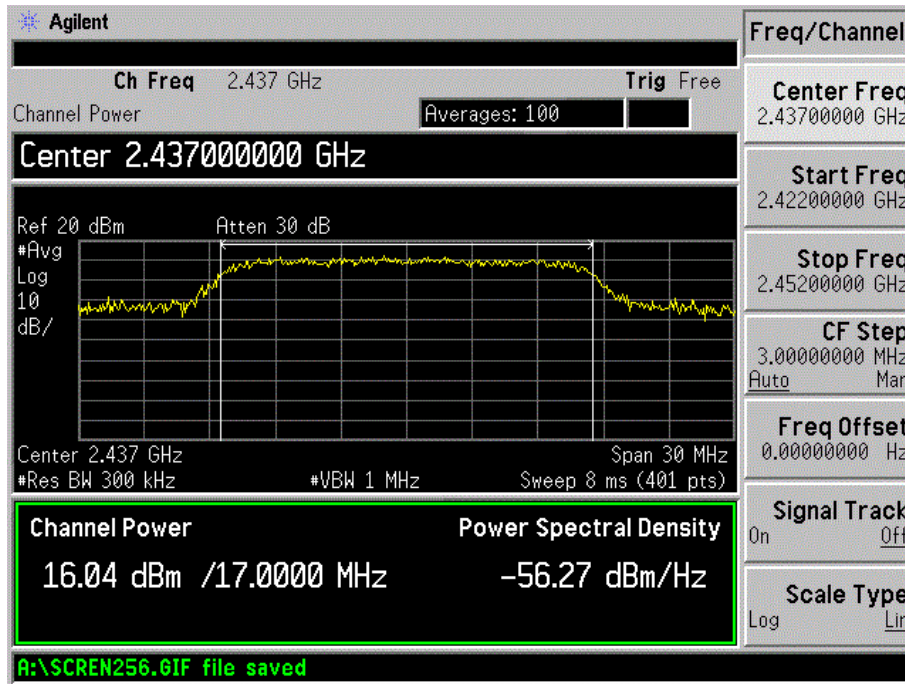


802.11g-6Mbps-High Channel

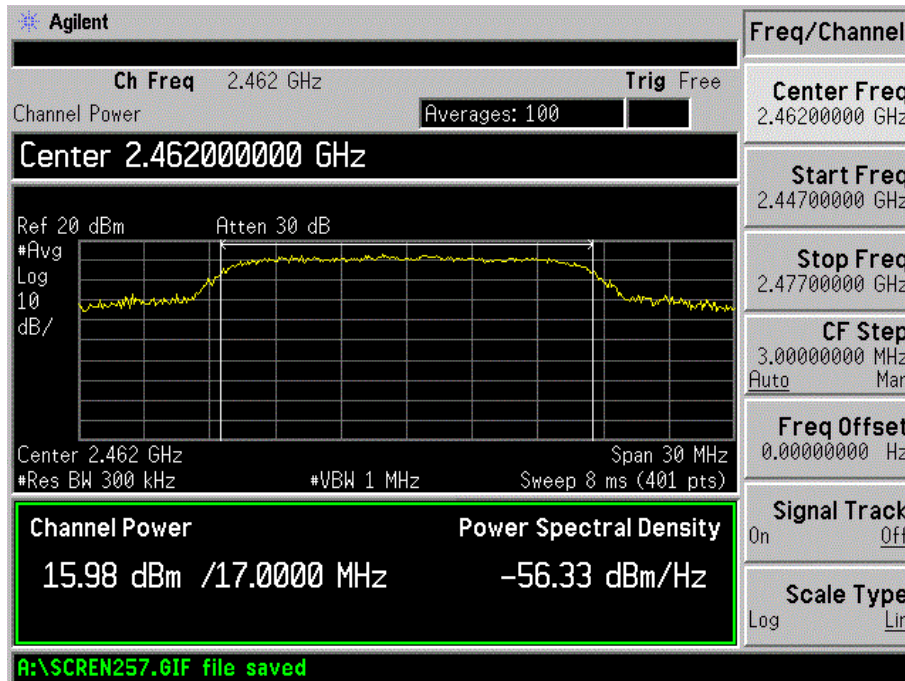


802.11n-HT20-MCS0-Low Channel

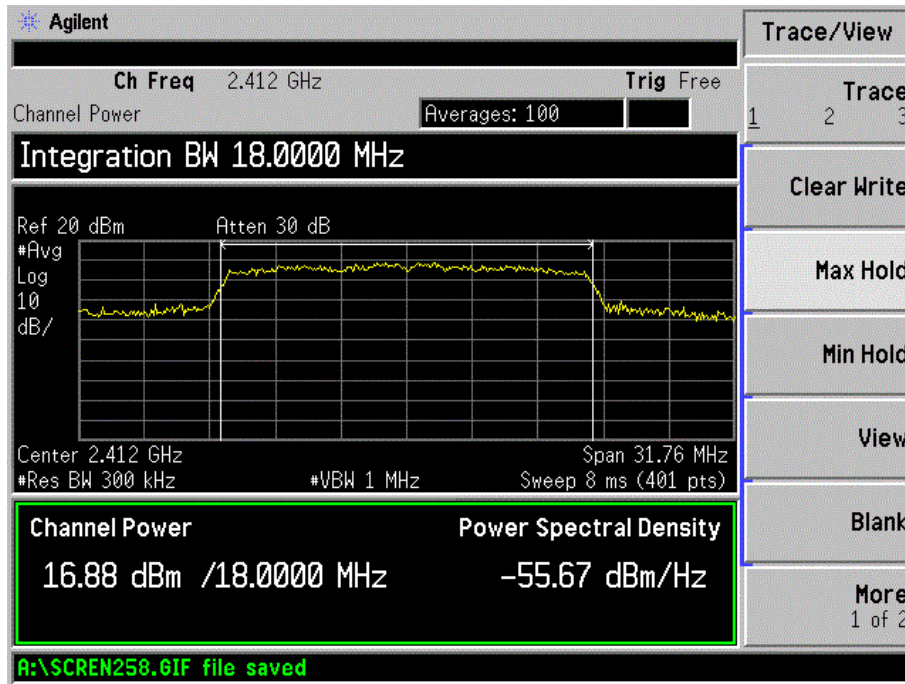

802.11n-HT20-MCS0-Middle Channel

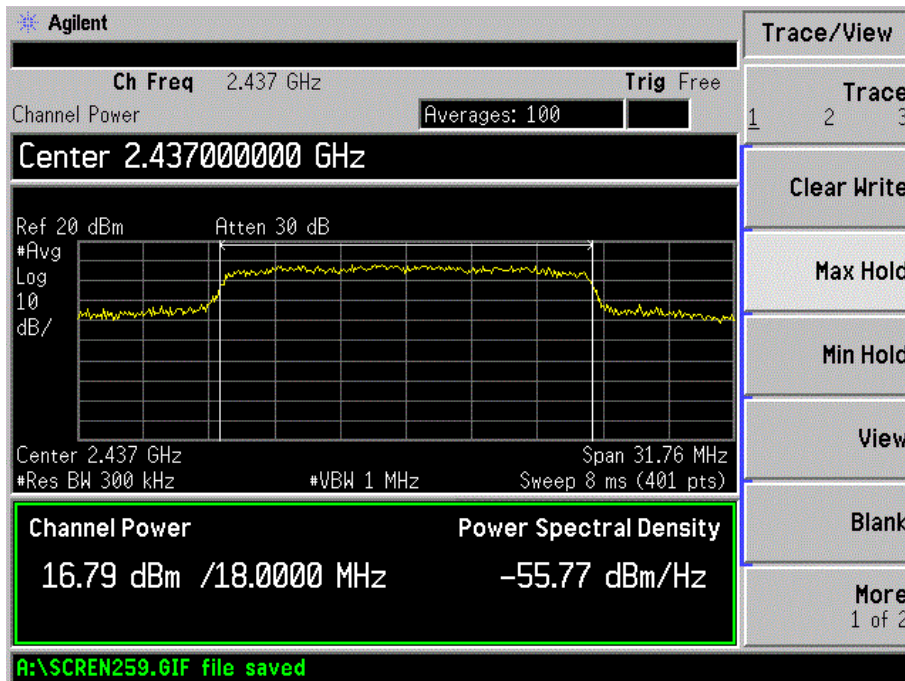

802.11n-HT20-MCS0-High Channel

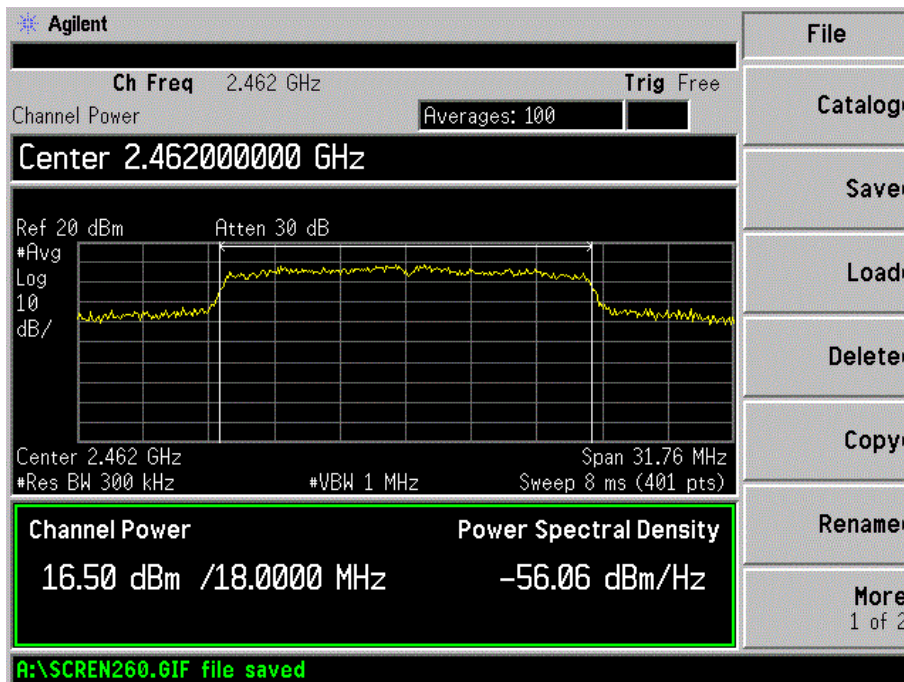

8. Field Strength of Spurious Emissions

8.1 Measurement Uncertainty

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement is ± 5.10 dB.

8.2 Standard Applicable

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

8.3 Test Equipment List and Details


Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	R&S	FSP	836079/035	2014-05-28	2015-05-27
EMI Test Receiver	R&S	ESVB	825471/005	2014-05-28	2015-05-27
Pre-amplifier	Agilent	8447F	3113A06717	2014-05-28	2015-05-27
Pre-amplifier	Compliance Direction	PAP-0118	24002	2014-05-28	2015-05-27
Trilog Broadband Antenna	SCHWARZBECK	VULB9163	9163-333	2014-05-24	2015-05-23
Horn Antenna	ETS	3117	00086197	2014-05-24	2015-05-23
Horn Antenna	ETS	3116B	00088203	2014-05-24	2015-05-23
Loop Antenna	SCHWARZECK	HFRA 5165	9365	2014-05-24	2015-05-23

8.4 Test Procedure

The setup of EUT is according with per ANSI C63.4-2009 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

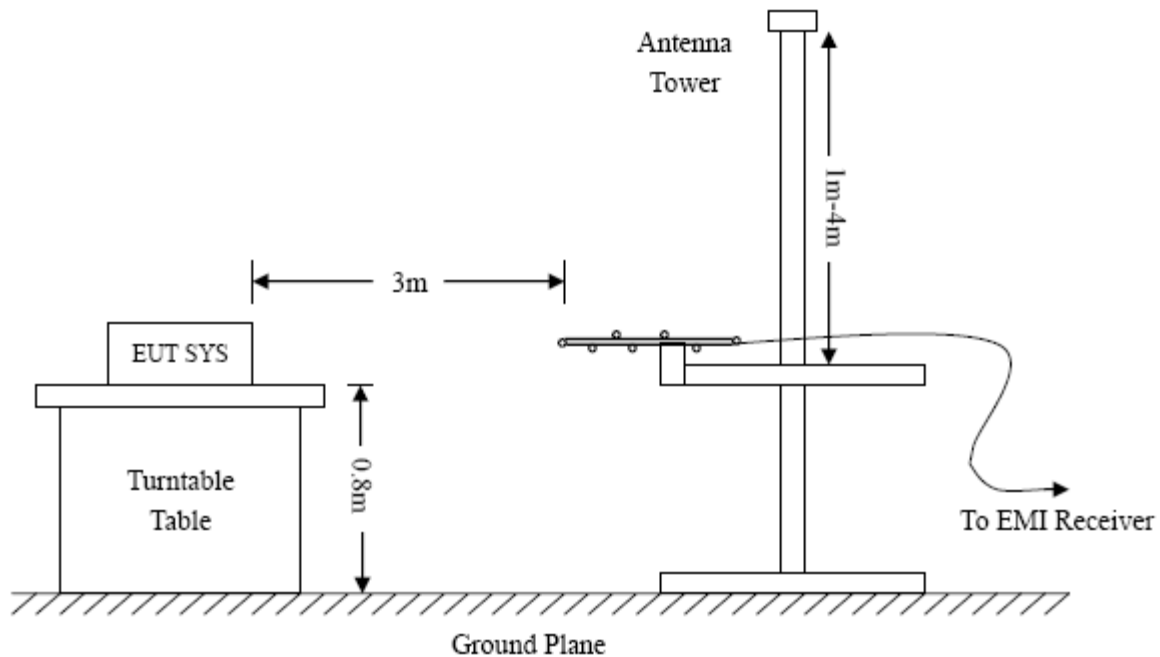

Frequency :9kHz-30MHz
 RBW=10KHz,
 VBW =30KHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak

Frequency :30MHz-1GHz
 RBW=120KHz,
 VBW=300KHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak, QP

Frequency :Above 1GHz
 RBW=1MHz,
 VBW=3MHz(Peak), 10Hz(AV)
 Sweep time= Auto
 Trace = max hold
 Detector function = peak, AV

8.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dBμV means the emission is 6dBμV below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

8.6 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1012 mbar


8.7 Summary of Test Results/Plots

According to the data below, the FCC Part 15.205, 15.209 and 15.247 standards, and had the worst cases:

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.


Plot of Radiated Emissions Test Data (30MHz to 1GHz)

EUT: Netatmo Security Camera
 Tested Model: NSC01
 Operating Condition: 802.11b Transmitting Low Channel-2412MHz
 Comment: 120V/60Hz Adapter DC5V
 Test Specification: Horizontal

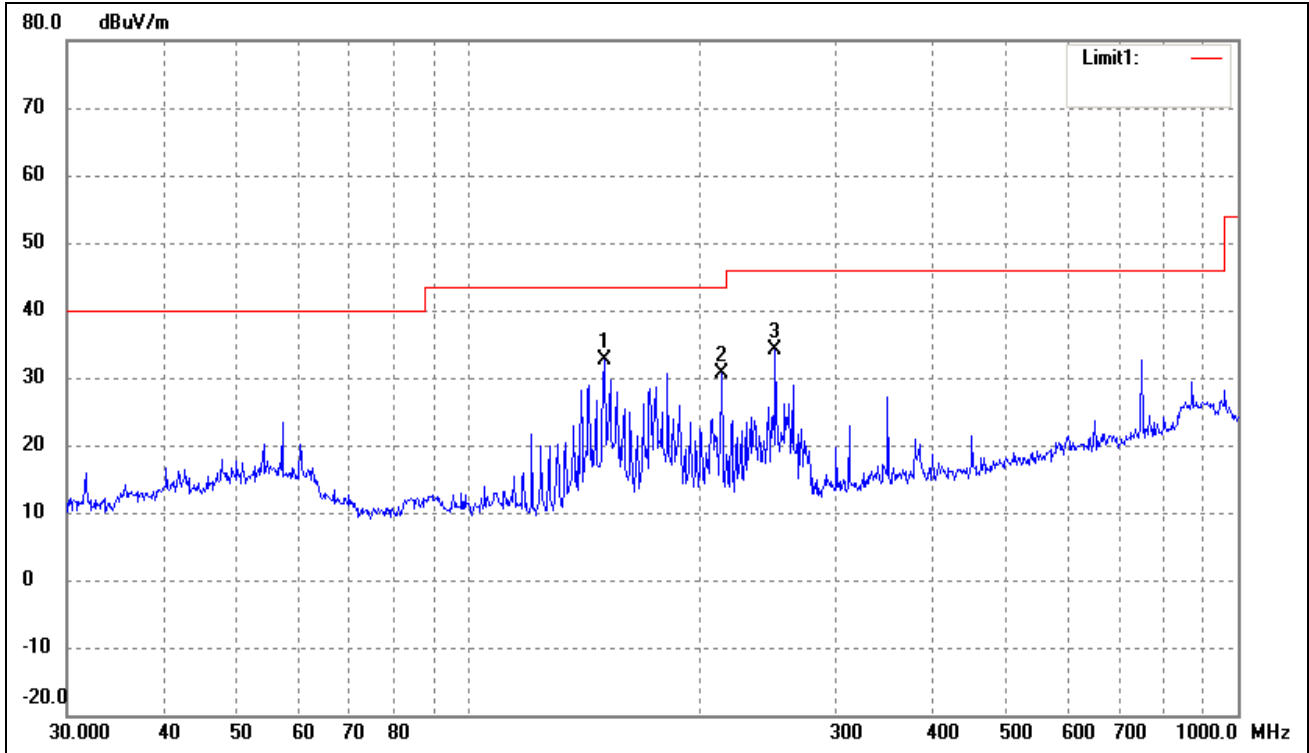

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	150.0108	46.17	-13.45	32.72	43.50	-10.78	121	100	peak
2	213.0151	40.71	-9.97	30.74	43.50	-12.76	169	100	peak
3	250.3012	42.66	-8.43	34.23	46.00	-11.77	223	100	peak

Test Specification: Vertical

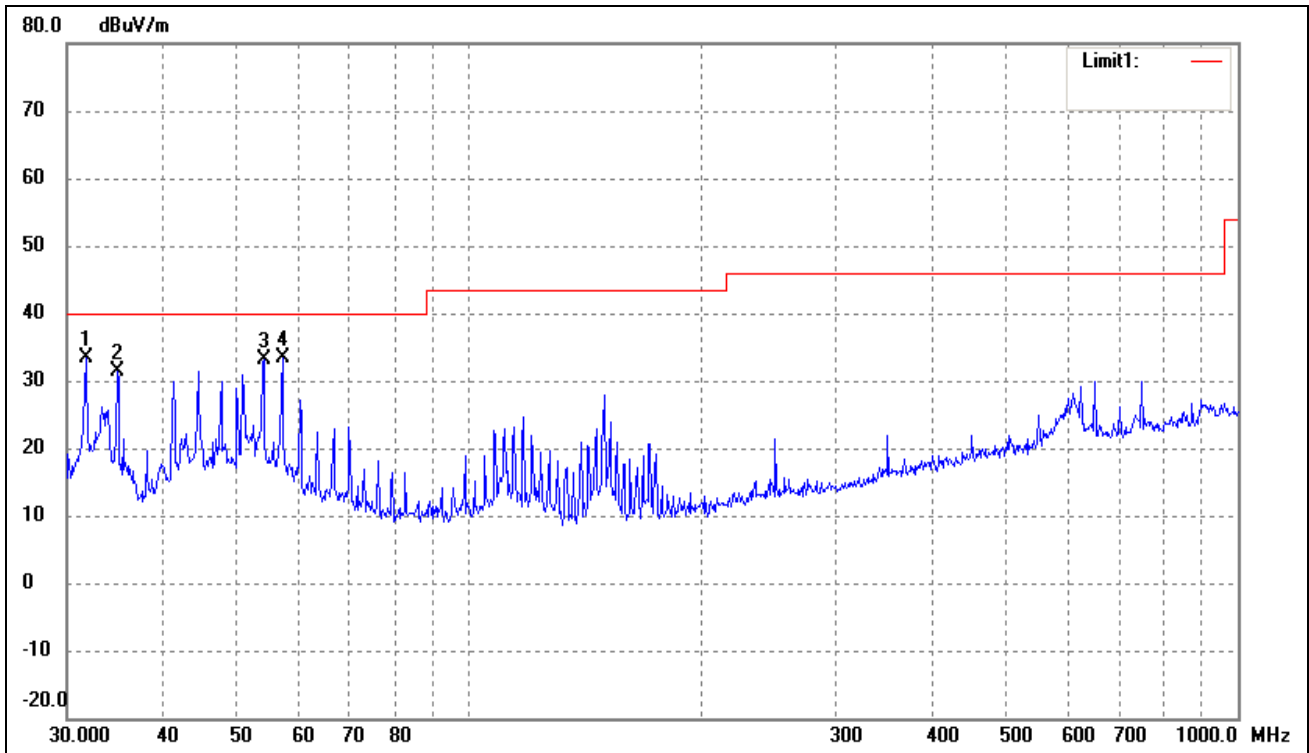


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	31.7313	43.75	-10.42	33.33	40.00	-6.67	140	100	peak
2	34.8823	41.33	-9.99	31.34	40.00	-8.66	267	100	peak
3	54.0711	41.73	-8.71	33.02	40.00	-6.98	360	100	peak
4	57.1914	42.78	-9.35	33.43	40.00	-6.57	182	100	peak

Operating Condition: 802.11b Transmitting Middle Channel-2437MHz


Comment: 120V/60Hz Adapter DC5V

Test Specification: Horizontal

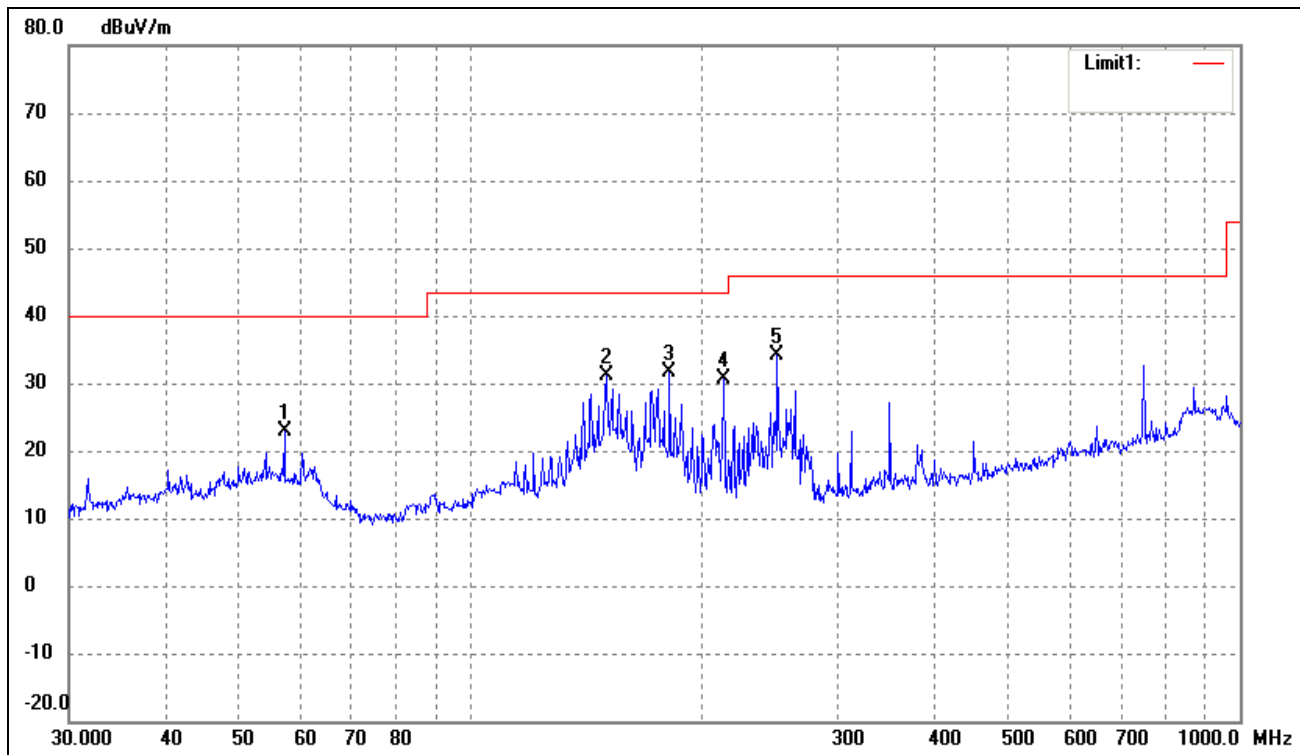

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	57.1914	32.35	-9.35	23.00	40.00	-17.00	360	100	peak
2	150.0108	44.67	-13.45	31.22	43.50	-12.28	116	100	peak
3	181.2834	43.08	-11.49	31.59	43.50	-11.91	178	100	peak
4	213.0151	40.71	-9.97	30.74	43.50	-12.76	280	100	peak
5	250.3012	42.66	-8.43	34.23	46.00	-11.77	224	100	peak


Test Specification: Vertical

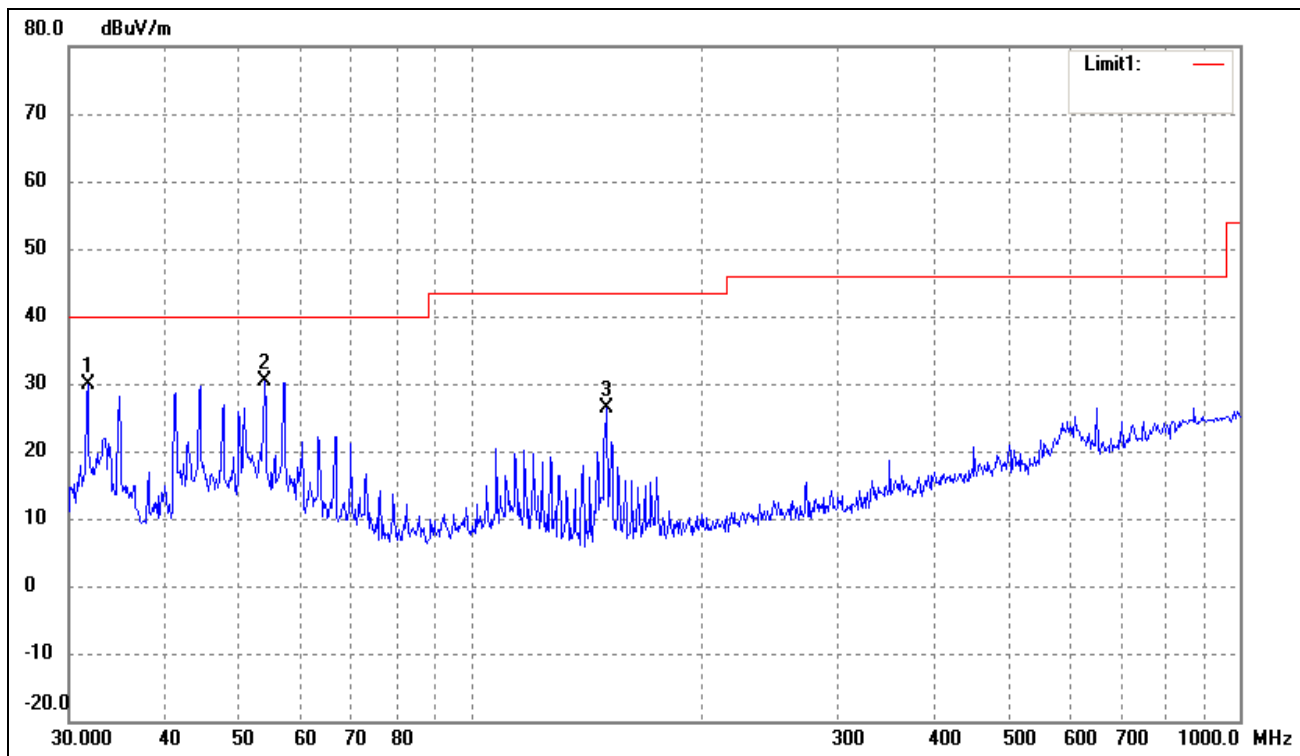

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	31.7313	40.20	-10.42	29.78	40.00	-10.22	120	100	peak
2	53.8818	38.99	-8.67	30.32	40.00	-9.68	113	100	peak
3	150.0108	39.89	-13.45	26.44	43.50	-17.06	157	100	peak


Operating Condition: 802.11b Transmitting High Channel-2462MHz
 Comment: 120V/60Hz Adapter DC5V

Test Specification: Horizontal

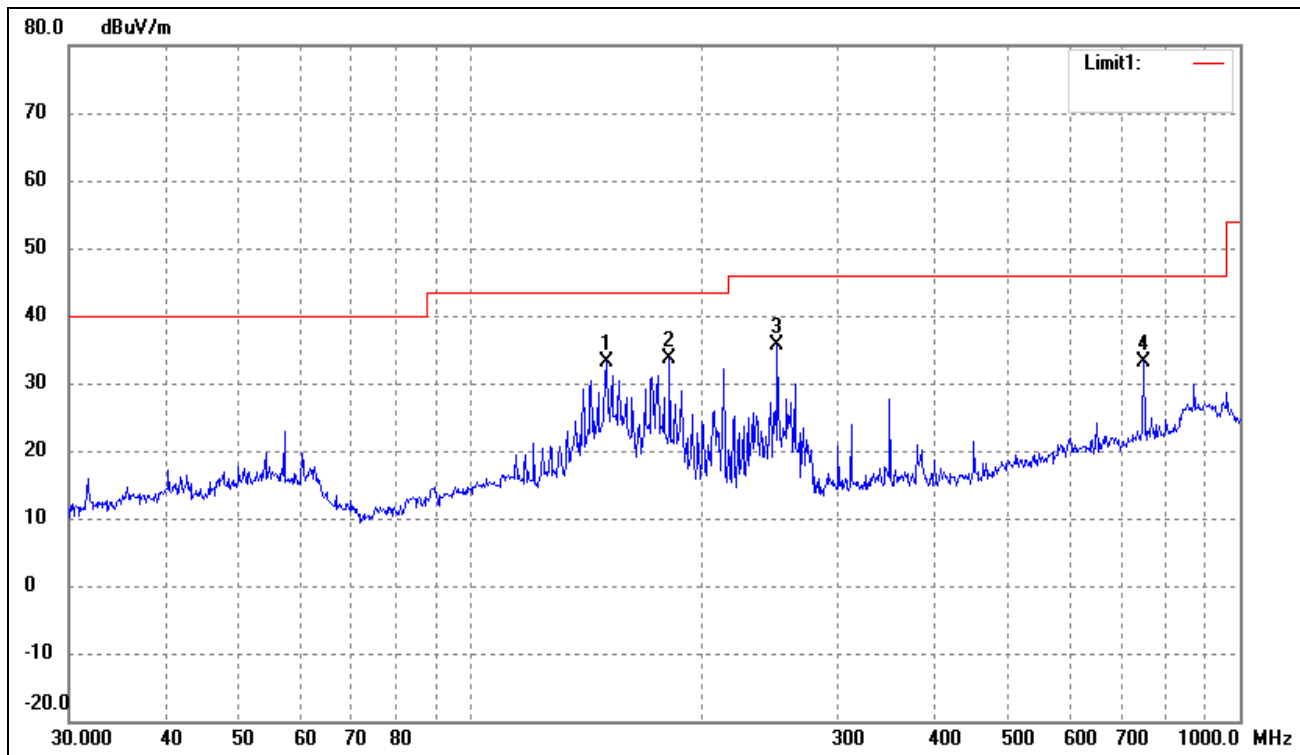

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	150.0108	46.67	-13.45	33.22	43.50	-10.28	120	100	peak
2	181.2834	45.08	-11.49	33.59	43.50	-9.91	250	100	peak
3	250.3012	44.16	-8.43	35.73	46.00	-10.27	360	100	peak
4	750.1083	31.81	1.35	33.16	46.00	-12.84	176	100	


Test Specification: Vertical

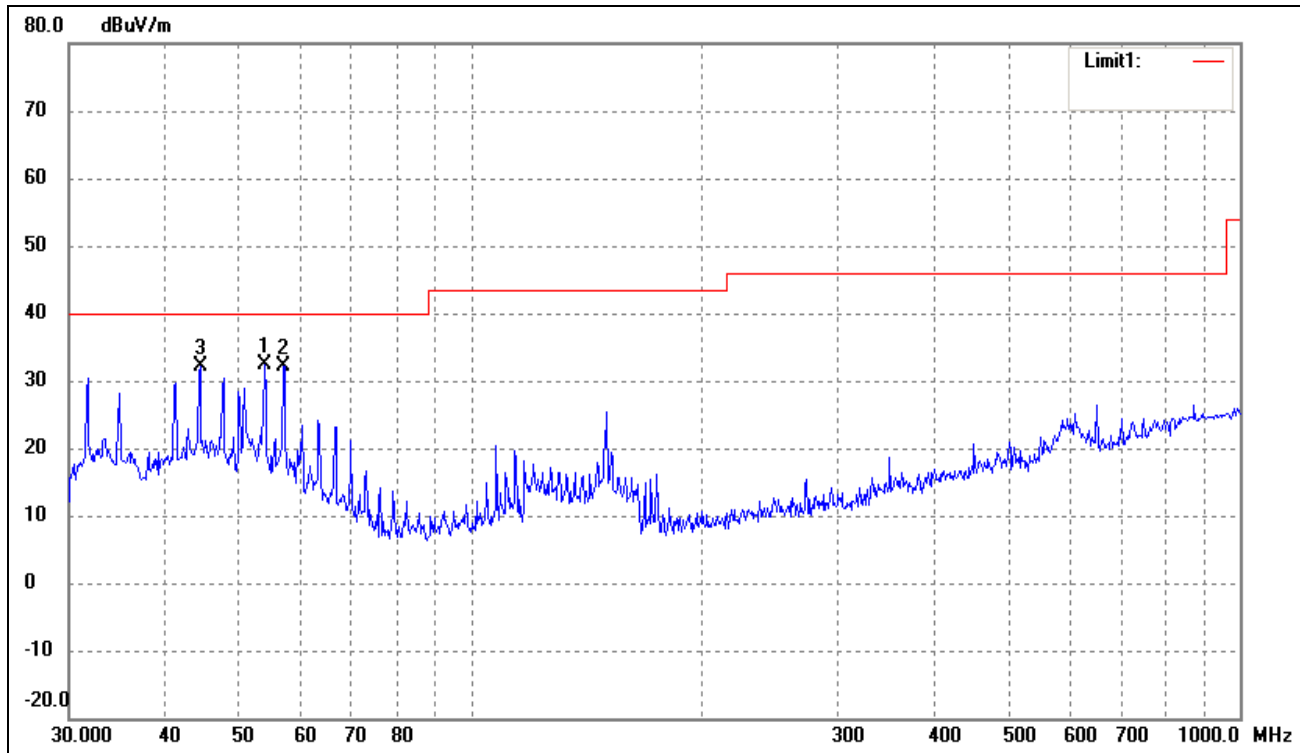

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	53.8818	40.99	-8.67	32.32	40.00	-7.68	360	100	peak
2	56.9912	41.56	-9.31	32.25	40.00	-7.75	200	100	peak
3	44.4308	40.76	-8.64	32.12	40.00	-7.88	120	100	peak


Plot of Radiated Emissions Test Data (30MHz to 1GHz)

EUT: Netatmo Security Camera
 Tested Model: NSC01
 Operating Condition: 802.11g Transmitting Low Channel-2412MHz
 Comment: 120V/60Hz Adapter DC5V
 Test Specification: Horizontal

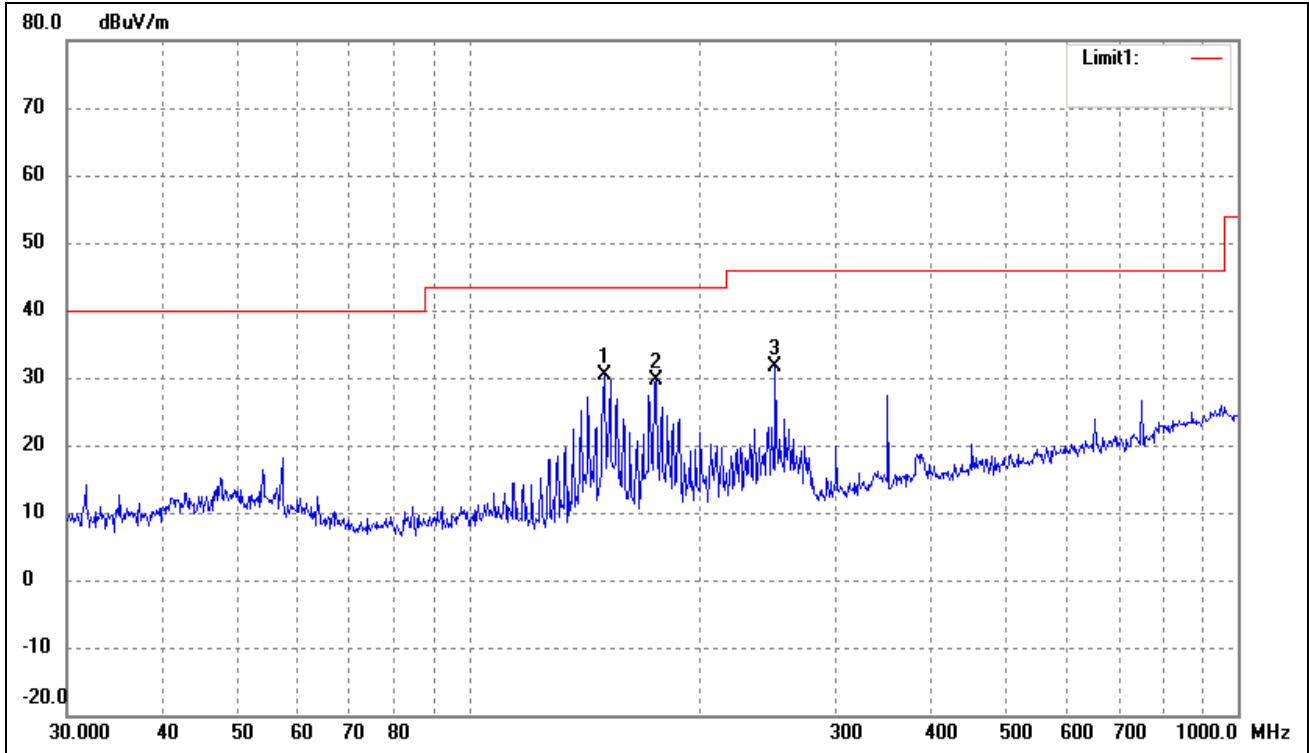

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	150.0108	43.72	-13.45	30.27	43.50	-13.23	170	100	peak
2	175.0368	41.60	-12.01	29.59	43.50	-13.91	20	100	peak
3	250.3012	40.03	-8.43	31.60	46.00	-14.40	320	100	peak


Test Specification: Vertical

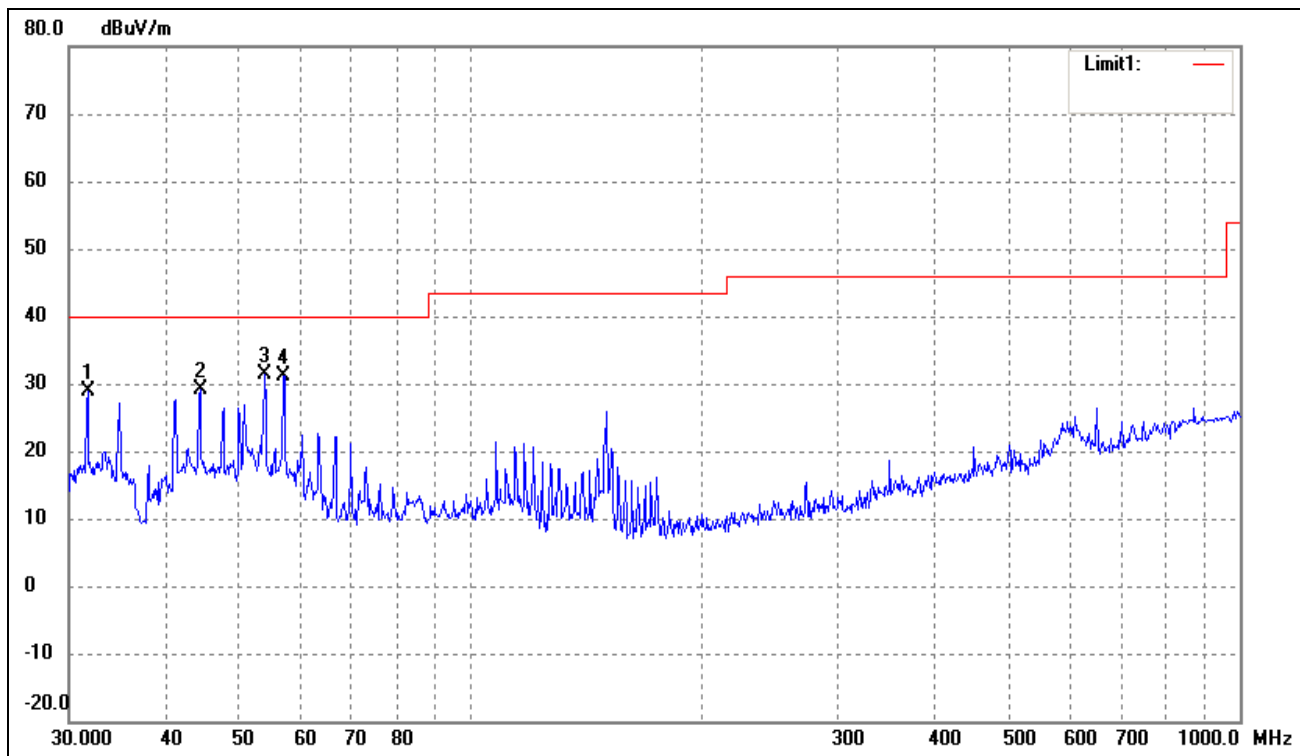

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	31.7313	39.20	-10.42	28.78	40.00	-11.22	270	100	peak
2	44.4307	37.76	-8.64	29.12	40.00	-10.88	190	100	peak
3	53.8817	39.99	-8.67	31.32	40.00	-8.68	360	100	peak
4	56.9911	40.56	-9.31	31.25	40.00	-8.75	134	100	peak


Operating Condition: 802.11g Transmitting Middle Channel-2437MHz
 Comment: 120V/60Hz Adapter DC5V

Test Specification: Horizontal

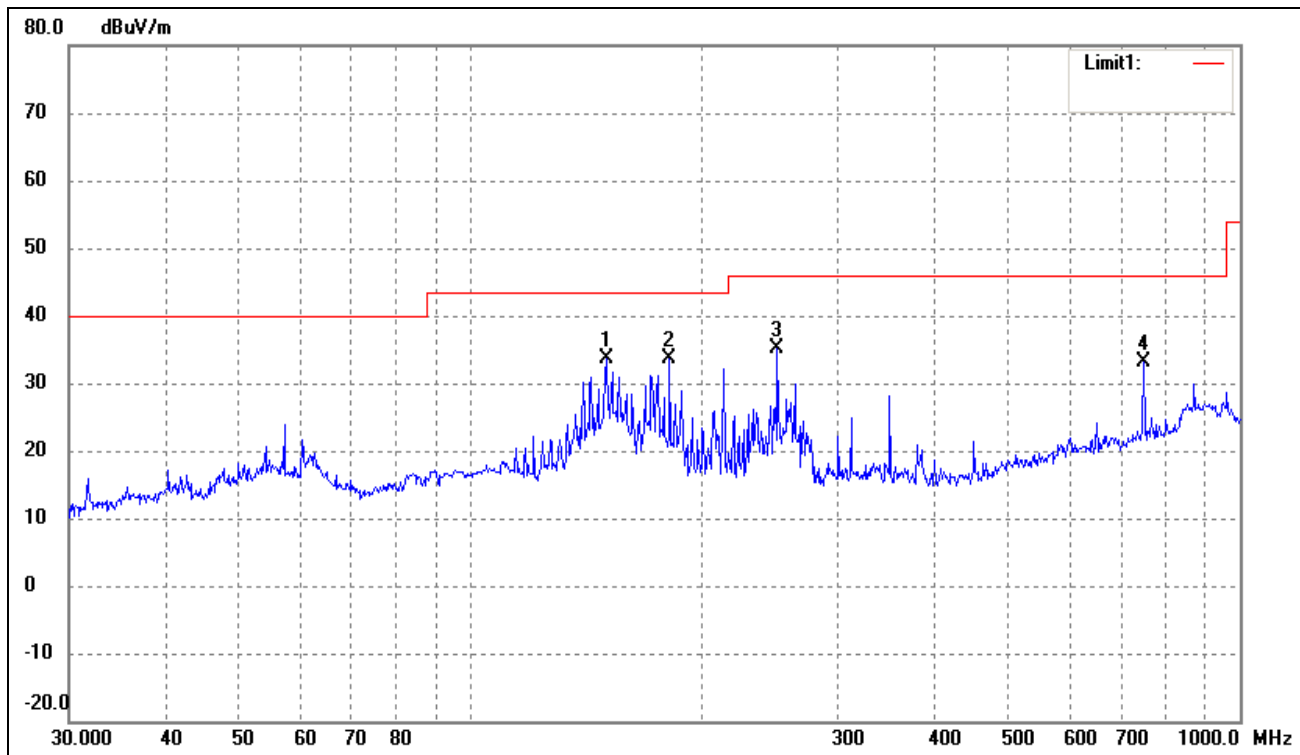

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	150.0108	47.17	-13.45	33.72	43.50	-9.78	270	100	peak
2	181.2834	45.08	-11.49	33.59	43.50	-9.91	160	100	peak
3	250.3012	43.66	-8.43	35.23	46.00	-10.77	228	200	peak
4	750.1083	31.81	1.35	33.16	46.00	-12.84	360	100	peak

Test Specification: Vertical

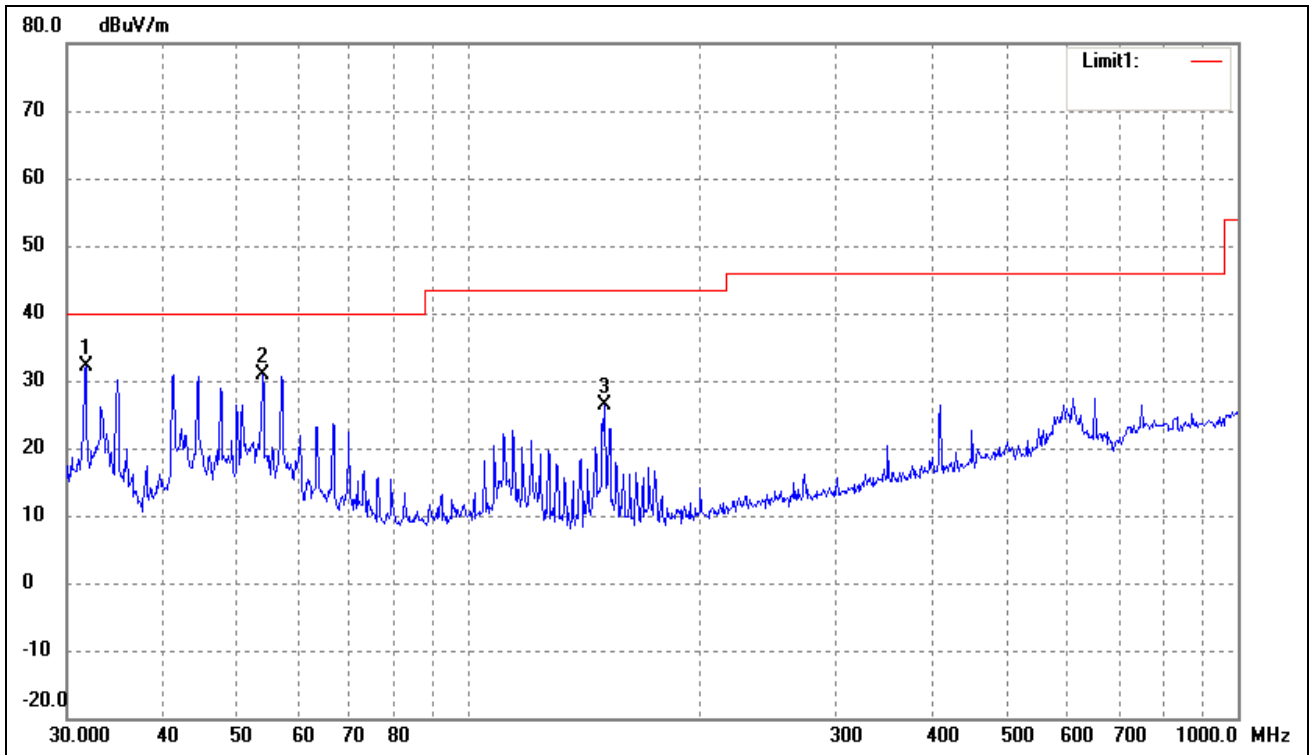


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	31.7313	42.54	-10.42	32.12	40.00	-7.88	360	100	peak
2	53.8818	39.48	-8.67	30.81	40.00	-9.19	120	100	peak
3	150.0108	39.89	-13.45	26.44	43.50	-17.06	270	100	peak

Operating Condition: 802.11g Transmitting High Channel-2462MHz


Comment: 120V/60Hz Adapter DC5V

Test Specification: Horizontal

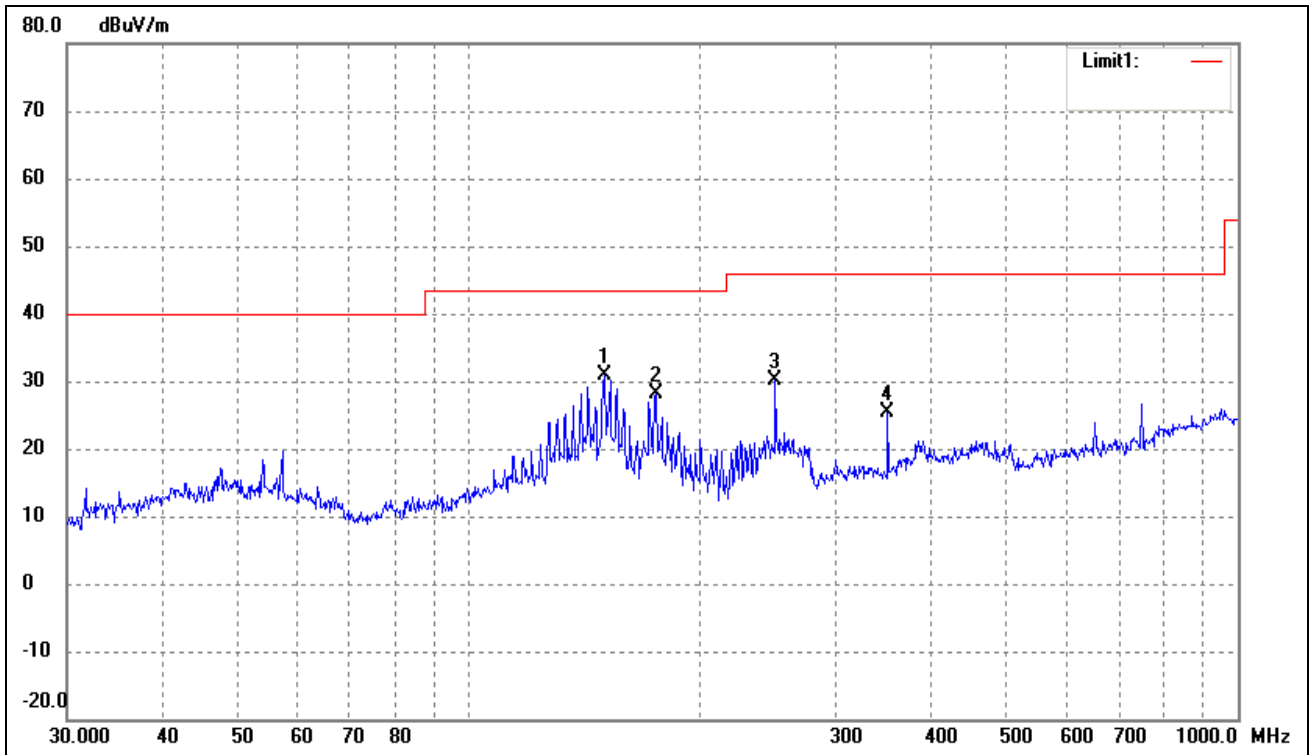

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	150.0108	44.22	-13.45	30.77	43.50	-12.73	270	100	peak
2	175.0368	40.10	-12.01	28.09	43.50	-15.41	150	100	peak
3	250.3012	38.53	-8.43	30.10	46.00	-15.90	360	100	peak
4	350.4768	30.77	-5.51	25.26	46.00	-20.74	154	100	peak


Test Specification: Vertical

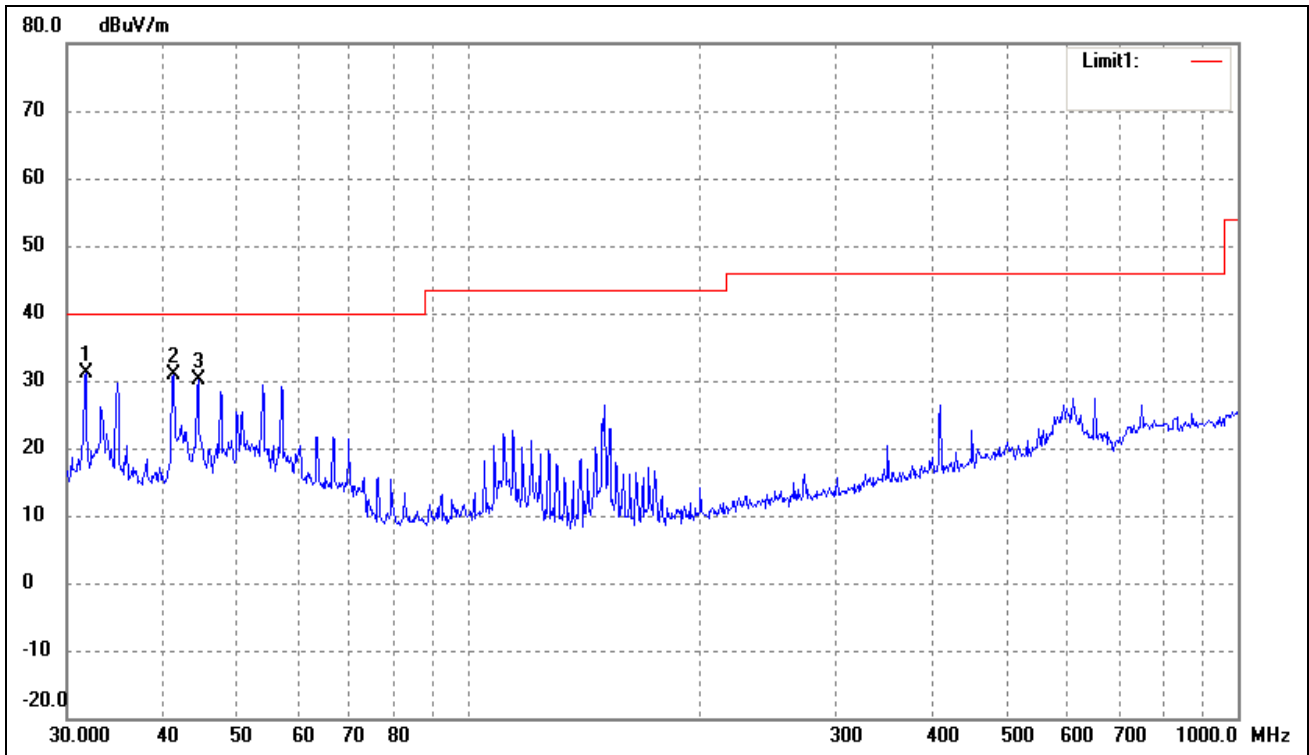

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	31.7313	41.54	-10.42	31.12	40.00	-8.88	360	100	peak
2	41.2765	39.84	-9.07	30.77	40.00	-9.23	180	100	peak
3	44.4308	38.81	-8.64	30.17	40.00	-9.83	120	100	peak


Plot of Radiated Emissions Test Data (30MHz to 1GHz)

EUT: Netatmo Security Camera
 Tested Model: NSC01
 Operating Condition: 802.11n-HT20 Transmitting Low Channel-2412MHz
 Comment: 120V/60Hz Adapter DC5V
 Test Specification: Horizontal

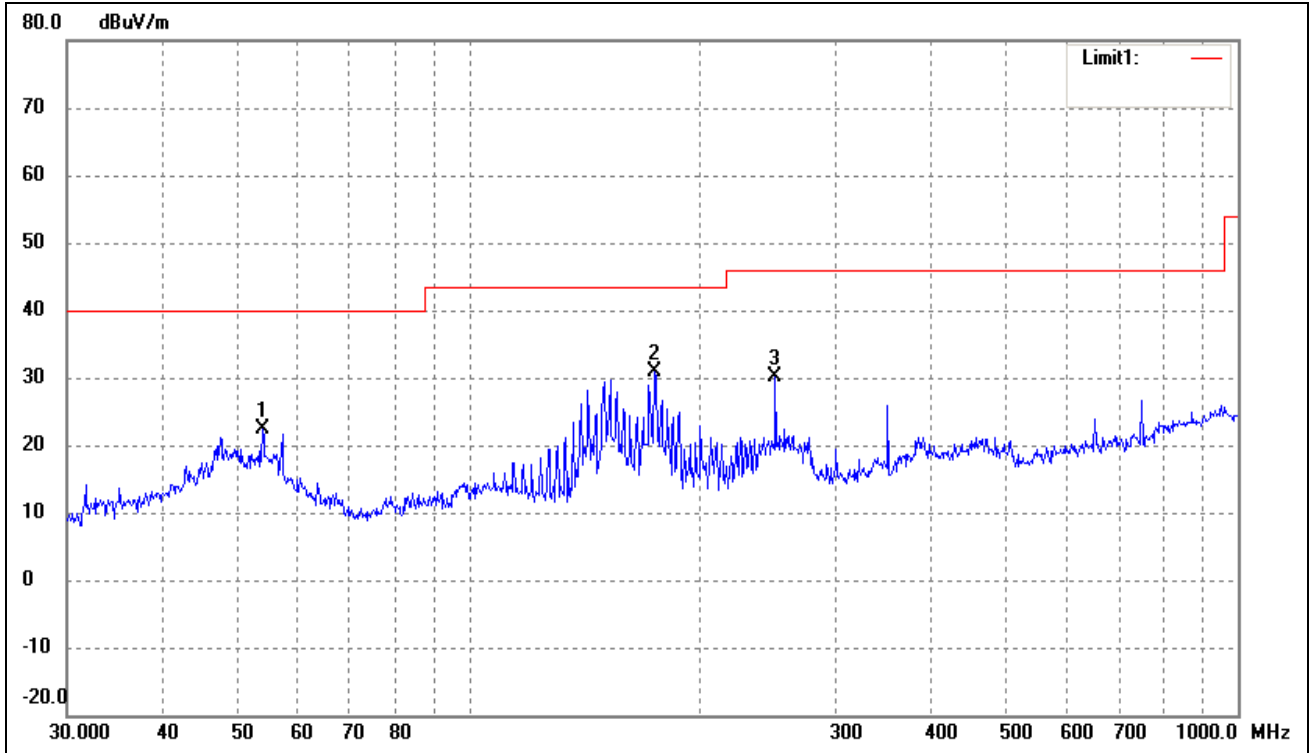

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	53.8817	30.99	-8.67	22.32	40.00	-17.68	260	100	peak
2	174.4241	42.91	-12.07	30.84	43.50	-12.66	120	200	peak
3	250.3011	38.53	-8.43	30.10	46.00	-15.90	289	200	peak

Test Specification: Vertical

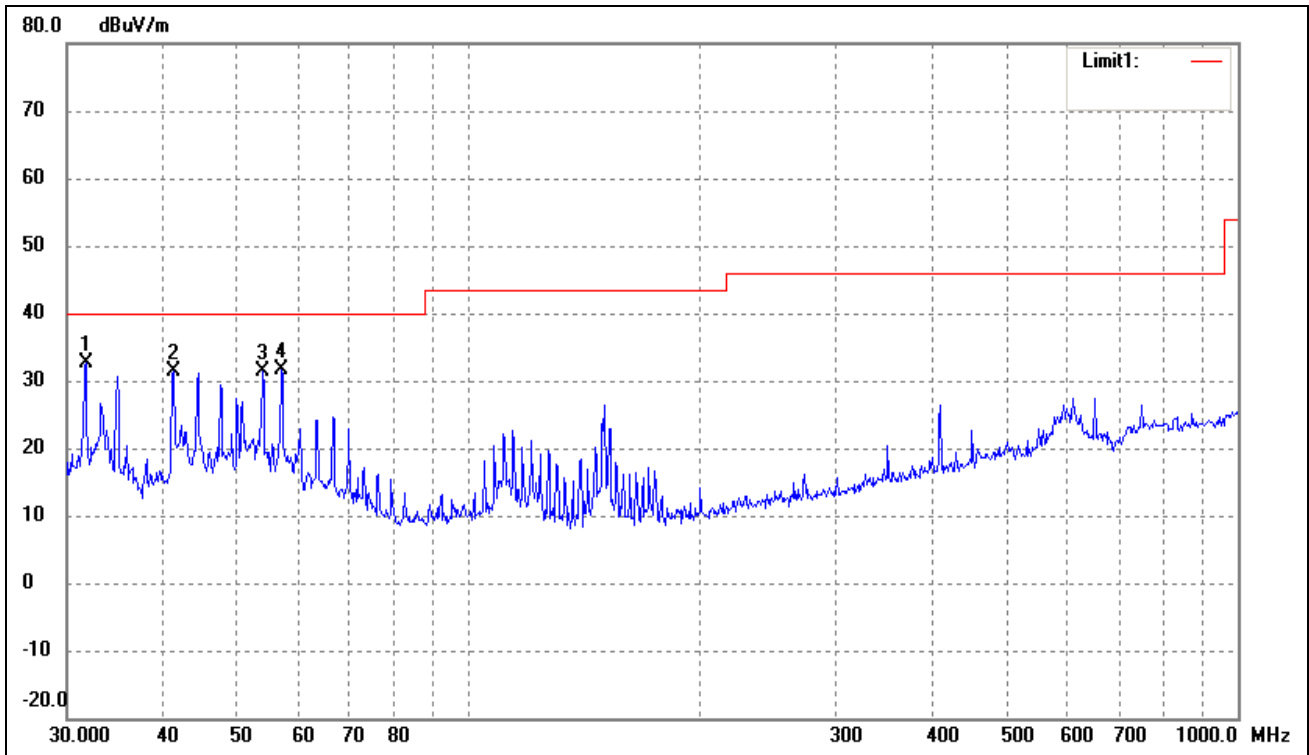


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	31.7313	43.04	-10.42	32.62	40.00	-7.38	130	100	peak
2	41.2764	40.34	-9.07	31.27	40.00	-8.73	120	100	peak
3	53.8817	39.98	-8.67	31.31	40.00	-8.69	360	100	peak
4	56.9911	40.90	-9.31	31.59	40.00	-8.41	342	100	

Operating Condition: 802.11n-HT20 Transmitting Middle Channel-2437MHz


Comment: 120V/60Hz Adapter DC5V

Test Specification: Horizontal

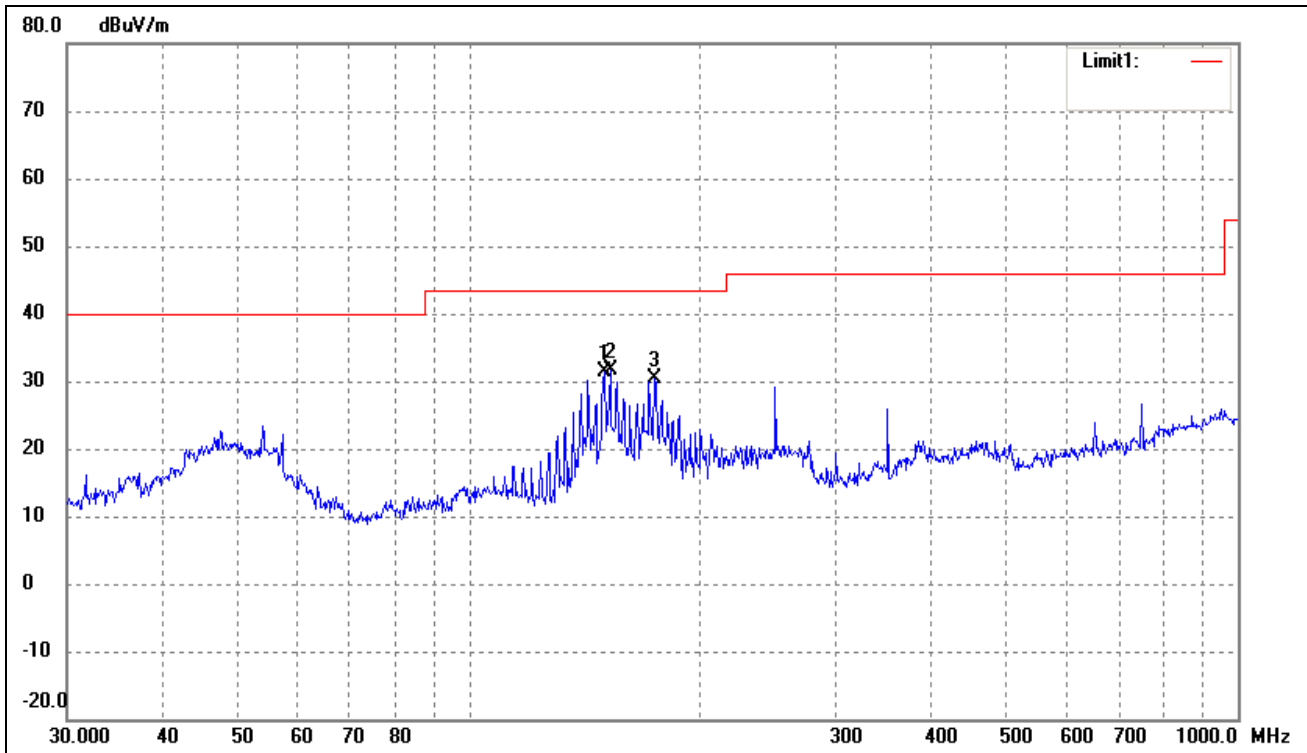

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	150.0107	44.71	-13.44	31.27	43.50	-12.23	274	100	peak
2	152.6640	44.86	-13.31	31.55	43.50	-11.95	130	100	peak
3	174.4241	42.41	-12.07	30.34	43.50	-13.16	120	100	peak

Test Specification: Vertical

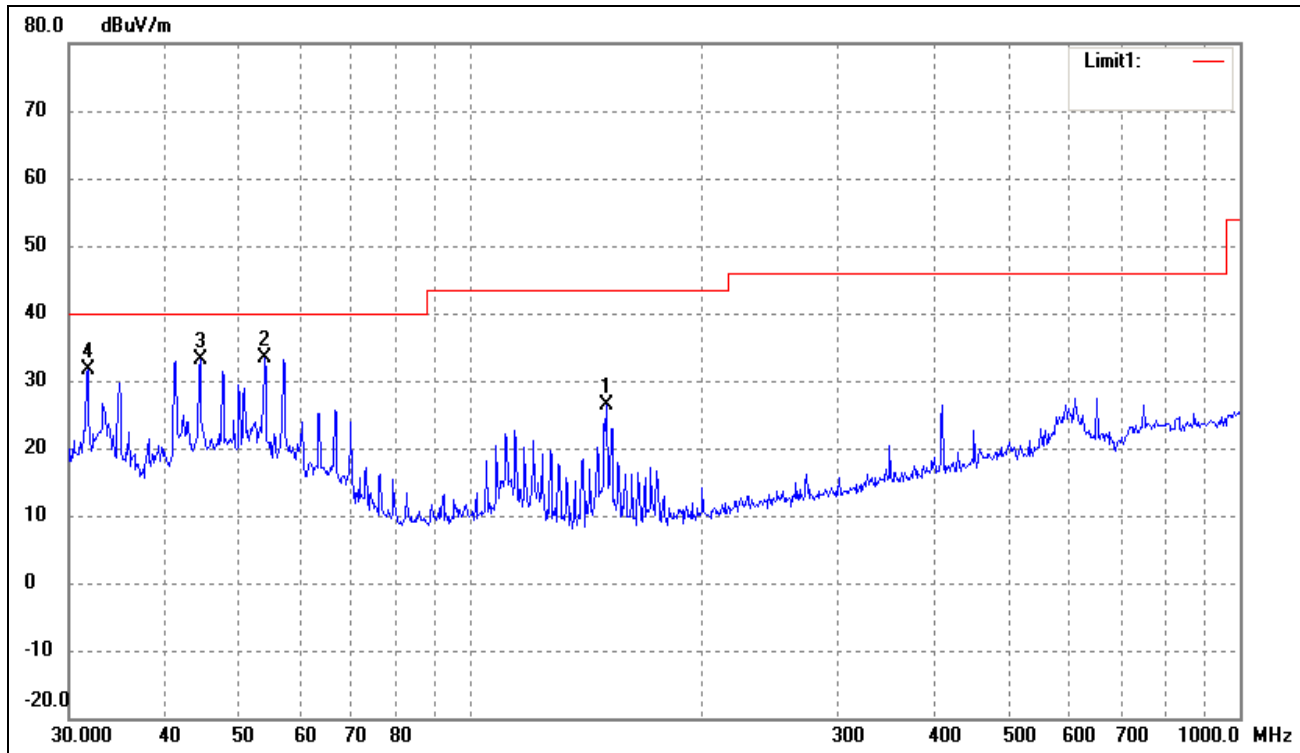


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	150.0107	39.88	-13.44	26.44	43.50	-17.06	360	100	peak
2	53.8817	41.98	-8.67	33.31	40.00	-6.69	110	100	peak
3	44.4307	41.81	-8.64	33.17	40.00	-6.83	120	100	peak
4	31.7313	42.04	-10.42	31.62	40.00	-8.38	154	100	

Operating Condition: 802.11n-HT20 Transmitting High Channel-2462MHz


Comment: 120V/60Hz Adapter DC5V

Test Specification: Horizontal

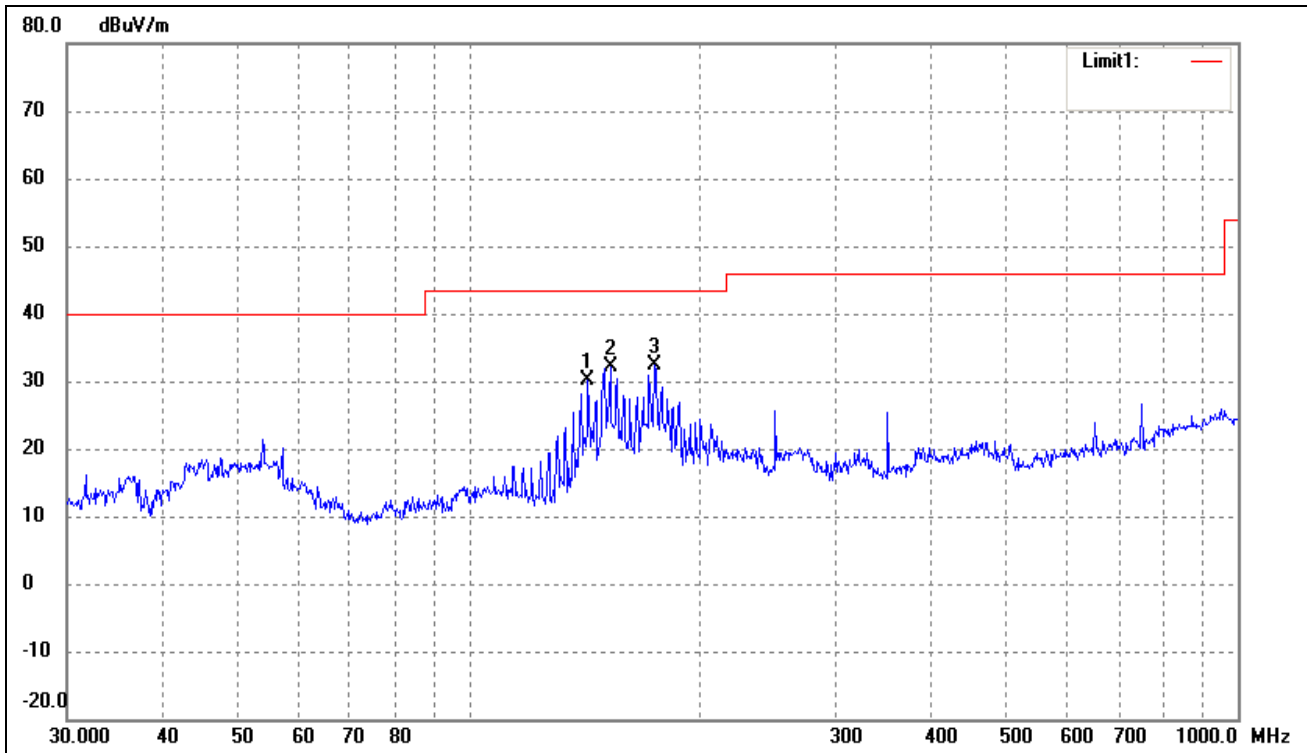

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	142.8243	43.36	-13.34	30.02	43.50	-13.48	360	100	peak
2	152.6640	45.36	-13.31	32.05	43.50	-11.45	138	100	peak
3	174.4241	44.41	-12.07	32.34	43.50	-11.16	180	200	peak

Test Specification: Vertical

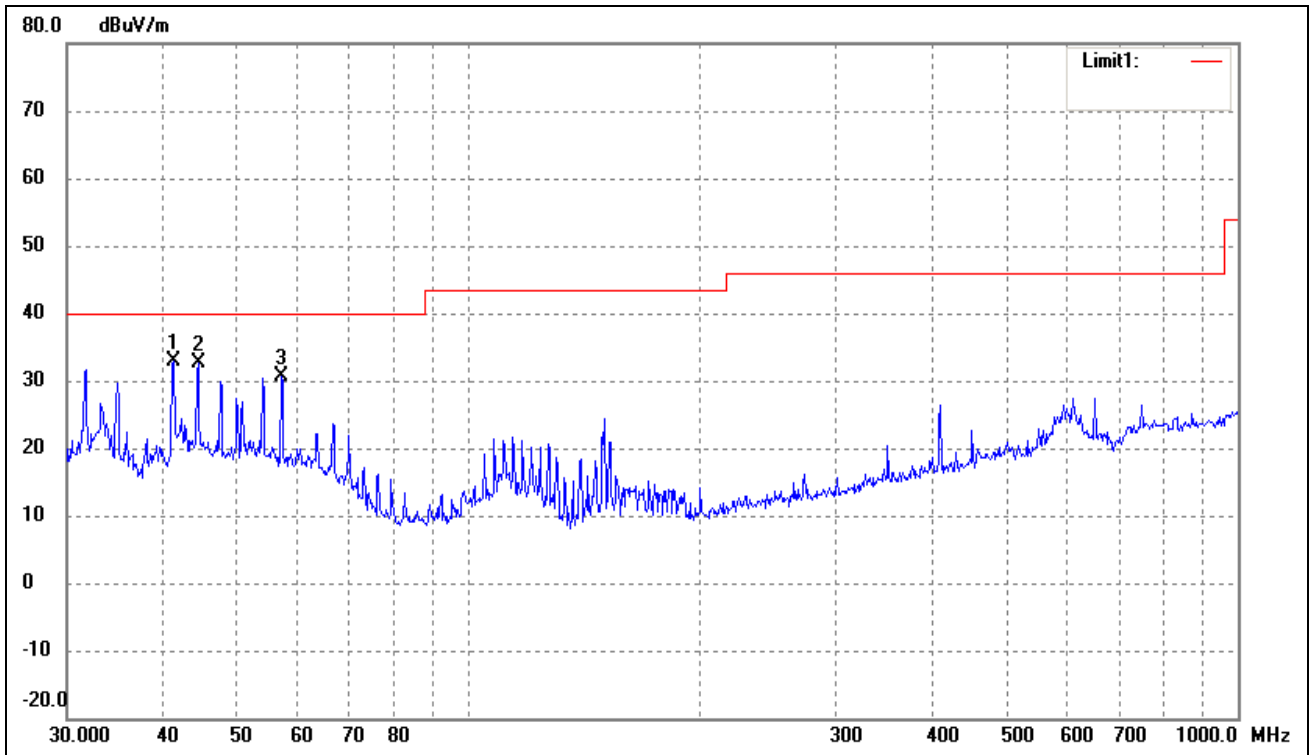

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	41.2764	41.84	-9.07	32.77	40.00	-7.23	270	100	peak
2	44.4307	41.31	-8.64	32.67	40.00	-7.33	120	100	peak
3	56.9911	39.90	-9.31	30.59	40.00	-9.41	360	100	peak

Spurious Emissions Above 1GHz

Test Mode: 802.11b

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2412MHz							
4824.000	52.17	0.57	52.74	74.00	-21.26	H	PK
4824.000	41.52	0.57	42.09	54.00	-11.91	H	AV
7236.000	41.69	3.69	45.38	74.00	-28.62	H	PK
7236.000	34.96	3.69	38.65	54.00	-15.35	H	AV
4824.000	49.92	0.57	50.49	74.00	-23.51	V	PK
4824.000	43.40	0.57	43.97	54.00	-10.03	V	AV
7236.000	39.41	3.69	43.10	74.00	-30.90	V	PK
7236.000	33.58	3.69	37.27	54.00	-16.73	V	AV
Middle Channel-2437MHz							
4874.000	51.32	0.66	51.98	74.00	-22.02	H	PK
4874.000	42.34	0.66	43.00	54.00	-11.00	H	AV
7311.000	41.46	3.76	45.22	74.00	-28.78	H	PK
7311.000	34.05	3.76	37.81	54.00	-16.19	H	AV
4874.000	52.25	0.66	52.91	74.00	-21.09	V	PK
4874.000	39.43	0.66	40.09	54.00	-13.91	V	AV
7311.000	39.39	3.76	43.15	74.00	-30.85	V	PK
7311.000	35.10	3.76	38.86	54.00	-15.14	V	AV
High Channel-2462MHz							
4924.000	50.84	0.74	51.58	74.00	-22.42	H	PK
4924.000	41.96	0.74	42.70	54.00	-11.30	H	AV
7386.000	43.69	3.83	47.52	74.00	-26.48	H	PK
7386.000	33.14	3.83	36.97	54.00	-17.03	H	AV
4924.000	52.97	0.74	53.71	74.00	-20.29	V	PK
4924.000	42.54	0.74	43.28	54.00	-10.72	V	AV
7386.000	42.71	3.83	46.54	74.00	-27.46	V	PK
7386.000	35.83	3.83	39.66	54.00	-14.34	V	AV

Test Mode: 802.11g

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2412MHz							
4824.000	54.39	0.57	54.96	74.00	-19.04	H	PK
4824.000	41.81	0.57	42.38	54.00	-11.62	H	AV
7236.000	43.18	3.69	46.87	74.00	-27.13	H	PK
7236.000	36.10	3.69	39.79	54.00	-14.21	H	AV
4824.000	51.32	0.57	51.89	74.00	-22.11	V	PK
4824.000	44.30	0.57	44.87	54.00	-9.13	V	AV
7236.000	43.06	3.69	46.75	74.00	-27.25	V	PK
7236.000	34.31	3.69	38.00	54.00	-16.00	V	AV
Middle Channel-2437MHz							
4874.000	52.10	0.66	52.76	74.00	-21.24	H	PK
4874.000	41.50	0.66	42.16	54.00	-11.84	H	AV
7311.000	39.47	3.76	43.23	74.00	-30.77	H	PK
7311.000	34.87	3.76	38.63	54.00	-15.37	H	AV
4874.000	49.76	0.66	50.42	74.00	-23.58	V	PK
4874.000	43.78	0.66	44.44	54.00	-9.56	V	AV
7311.000	40.87	3.76	44.63	74.00	-29.37	V	PK
7311.000	34.54	3.76	38.30	54.00	-15.70	V	AV
High Channel-2462MHz							
4924.000	49.27	0.74	50.01	74.00	-23.99	H	PK
4924.000	41.10	0.74	41.84	54.00	-12.16	H	AV
7386.000	43.83	3.83	47.66	74.00	-26.34	H	PK
7386.000	32.39	3.83	36.22	54.00	-17.78	H	AV
4924.000	50.89	0.74	51.63	74.00	-22.37	V	PK
4924.000	44.17	0.74	44.91	54.00	-9.09	V	AV
7386.000	40.93	3.83	44.76	74.00	-29.24	V	PK
7386.000	32.40	3.83	36.23	54.00	-17.77	V	AV

Test Mode: 802.11n-HT20

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2412MHz							
4824.000	51.29	0.57	51.86	74.00	-22.14	H	PK
4824.000	42.67	0.57	43.24	54.00	-10.76	H	AV
7236.000	39.63	3.69	43.32	74.00	-30.68	H	PK
7236.000	34.71	3.69	38.40	54.00	-15.60	H	AV
4824.000	50.08	0.57	50.65	74.00	-23.35	V	PK
4824.000	40.31	0.57	40.88	54.00	-13.12	V	AV
7236.000	43.65	3.69	47.34	74.00	-26.66	V	PK
7236.000	33.64	3.69	37.33	54.00	-16.67	V	AV
Middle Channel-2437MHz							
4874.000	51.07	0.66	51.73	74.00	-22.27	H	PK
4874.000	40.00	0.66	40.66	54.00	-13.34	H	AV
7311.000	40.28	3.76	44.04	74.00	-29.96	H	PK
7311.000	35.07	3.76	38.83	54.00	-15.17	H	AV
4874.000	52.56	0.66	53.22	74.00	-20.78	V	PK
4874.000	43.85	0.66	44.51	54.00	-9.49	V	AV
7311.000	40.37	3.76	44.13	74.00	-29.87	V	PK
7311.000	34.67	3.76	38.43	54.00	-15.57	V	AV
High Channel-2462MHz							
4924.000	53.07	0.74	53.81	74.00	-20.19	H	PK
4924.000	42.70	0.74	43.44	54.00	-10.56	H	AV
7386.000	39.75	3.83	43.58	74.00	-30.42	H	PK
7386.000	32.81	3.83	36.64	54.00	-17.36	H	AV
4924.000	50.02	0.74	50.76	74.00	-23.24	V	PK
4924.000	39.86	0.74	40.60	54.00	-13.40	V	AV
7386.000	41.85	3.83	45.68	74.00	-28.32	V	PK
7386.000	33.93	3.83	37.76	54.00	-16.24	V	AV

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, which above 3th Harmonics are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured. The measurements greater than 20dB below the limit from 9kHz to 30MHz.

9. Out of Band Emissions

9.1 Standard Applicable

According to §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

9.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	R&S	FSP	836079/035	2014-05-28	2015-05-27
EMI Test Receiver	R&S	ESVB	825471/005	2014-05-28	2015-05-27
Pre-amplifier	Agilent	8447F	3113A06717	2014-05-28	2015-05-27
Pre-amplifier	Compliance Direction	PAP-0118	24002	2014-05-28	2015-05-27
Trilog Broadband Antenna	SCHWARZBECK	VULB9163	9163-333	2014-05-24	2015-05-23
Horn Antenna	ETS	3117	00086197	2014-05-24	2015-05-23

9.3 Test Procedure

According to the KDB 558074D01 v03r02, the band-edge radiated test method as follows:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz for low bandedge, 2460MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak/average; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement KDB publication number: 913591 may be used for the radiated bandedge measurements.

According to the KDB 558074 D01 V03r02, the conducted spurious emissions test method as follows:

1. Set start frequency to DTS channel edge frequency.
2. Set stop frequency so as to encompass the spectrum to be examined.
3. Set RBW = 100 kHz.
4. Set VBW ≥ 300 kHz.
5. Detector = peak.
6. Trace Mode = max hold.
7. Sweep = auto couple.
8. Allow the trace to stabilize (this may take some time, depending on the extent of the span).
9. Use peak marker function to determine maximum amplitude of all unwanted emissions within any 100 kHz bandwidth.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in section 8.1. Report the three highest emissions relative to the limit.

9.4 Environmental Conditions


Temperature:	23°C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

9.5 Summary of Test Results/Plots

Please refer to the test plots as below.

802.11b-Lowest Bandedge


Vertical (Worst case)

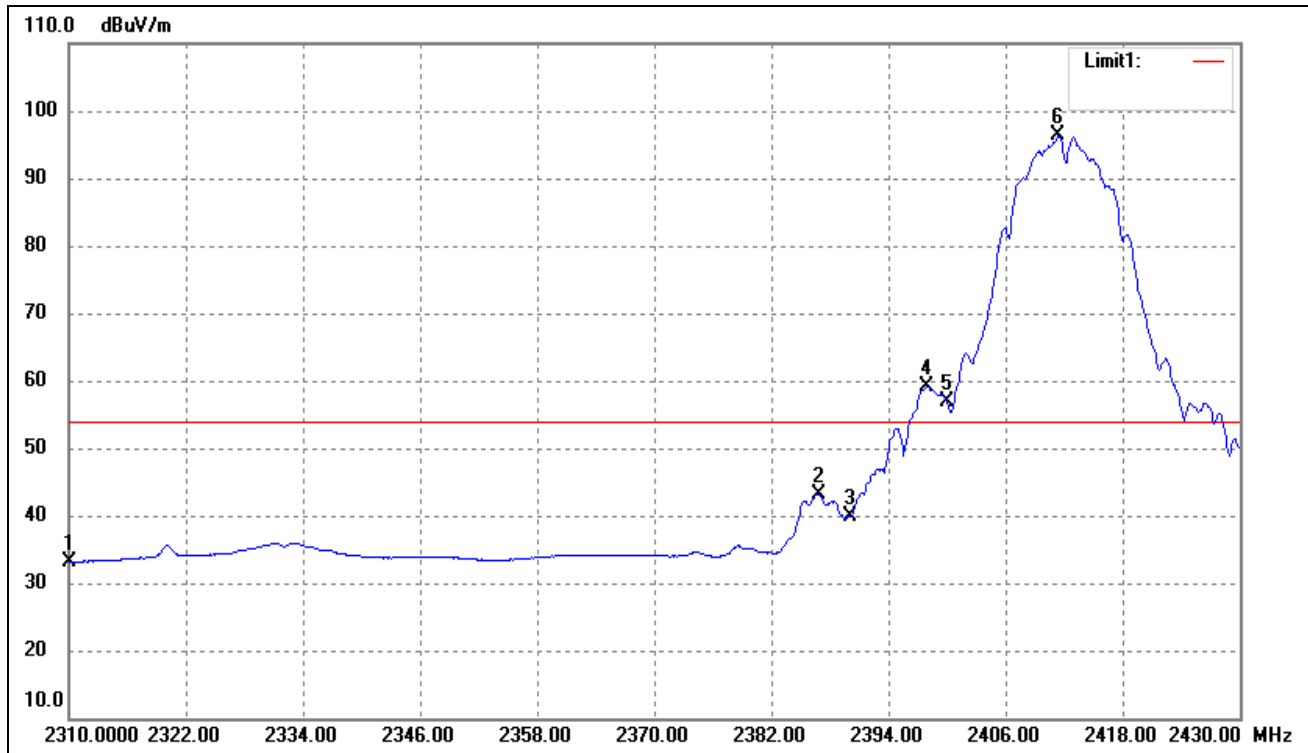

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	36.83	-3.71	33.12	54.00	-20.88	Average Detector
		58.25	-3.71	54.54	74.00	-19.46	Peak Detector
2	2390.000	30.17	-3.54	26.63	54.00	-27.37	Average Detector
		61.36	-3.54	57.82	74.00	-16.18	Peak Detector
3	2390.000	43.46	-3.54	39.92	54.00	-14.08	Average Detector
		66.67	-3.54	63.13	74.00	-10.87	Peak Detector
5	2400.000	60.28	-3.51	56.77	Delta=39.54dBc	Average Detector	
6	2411.400	99.79	-3.48	96.31		Average Detector	
4	2397.960	62.72	-3.51	59.21	Delta=37.10dBc	Average Detector	
6	2411.400	99.79	-3.48	96.31		Average Detector	

802.11b-Highest Bandedge


Vertical (Worst case)

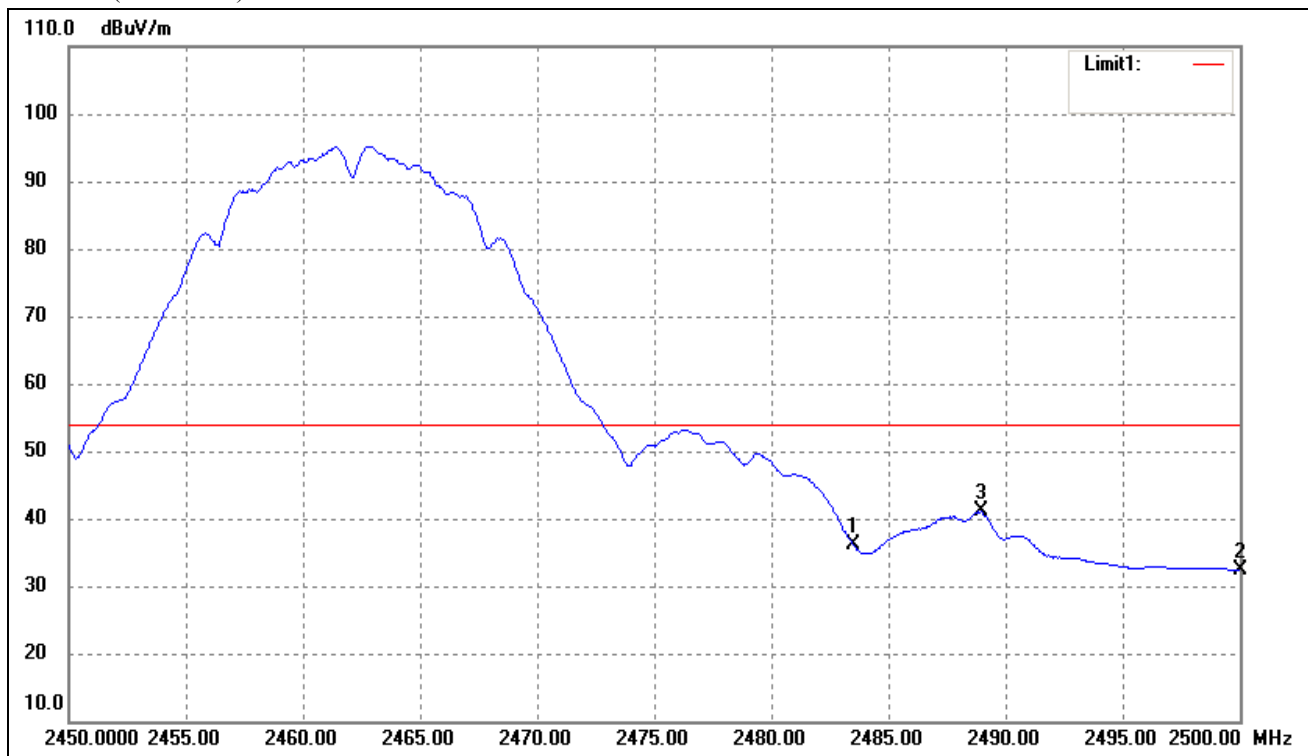

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	39.40	-3.33	36.07	54.00	-17.93	Average Detector
	2483.500	57.64	-3.33	54.31	74.00	-19.69	Peak Detector
2	2500.000	35.57	-3.28	32.29	54.00	-21.71	Average Detector
	2500.000	57.26	-3.28	53.98	74.00	-20.02	Peak Detector
3	2488.950	44.32	-3.31	41.01	54.00	-12.99	Average Detector
	2488.950	65.62	-3.31	62.31	74.00	-11.69	Peak Detector

802.11g-Lowest Bandedge


Vertical (Worst case)

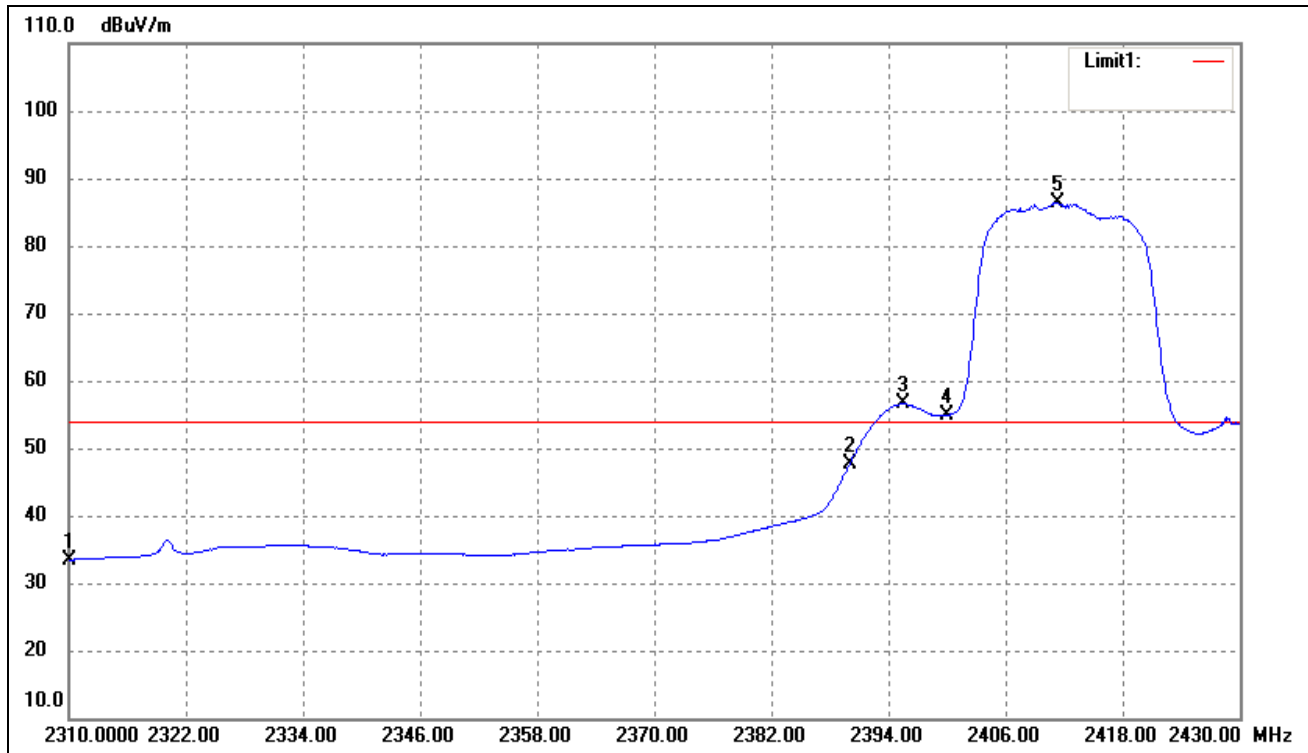

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	37.19	-3.71	33.48	54.00	-20.52	Average Detector
		62.47	-3.71	58.76	74.00	-15.24	Peak Detector
2	2390.000	51.28	-3.54	47.74	54.00	-6.26	Average Detector
		70.98	-3.54	67.44	74.00	-6.56	Peak Detector
3	2395.440	60.07	-3.52	56.55	Delta =29.88dBc		Average Detector
5	2411.400	89.91	-3.48	86.43		Average Detector	
4	2400.000	58.45	-3.51	54.94	Delta =31.49dBc		Average Detector
5	2411.400	89.91	-3.48	86.43		Average Detector	

802.11g-Highest Bandedge


Vertical (Worst case)

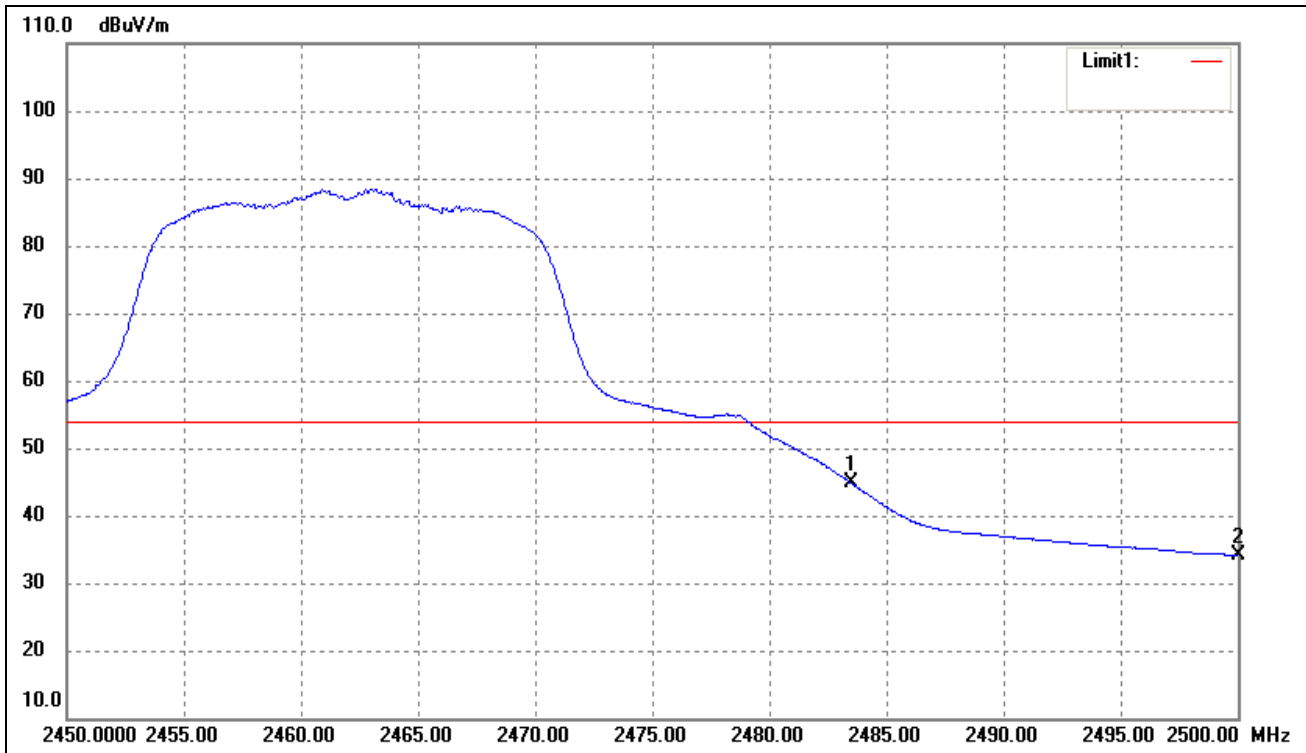

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	48.15	-3.33	44.82	54.00	-9.18	Average Detector
	2483.500	70.87	-3.33	67.54	74.00	-6.46	Peak Detector
2	2500.000	37.38	-3.28	34.10	54.00	-19.90	Average Detector
	2500.000	60.06	-3.28	56.78	74.00	-17.22	Peak Detector

802.11n-HT20-Lowest Bandedge


Vertical (Worst case)

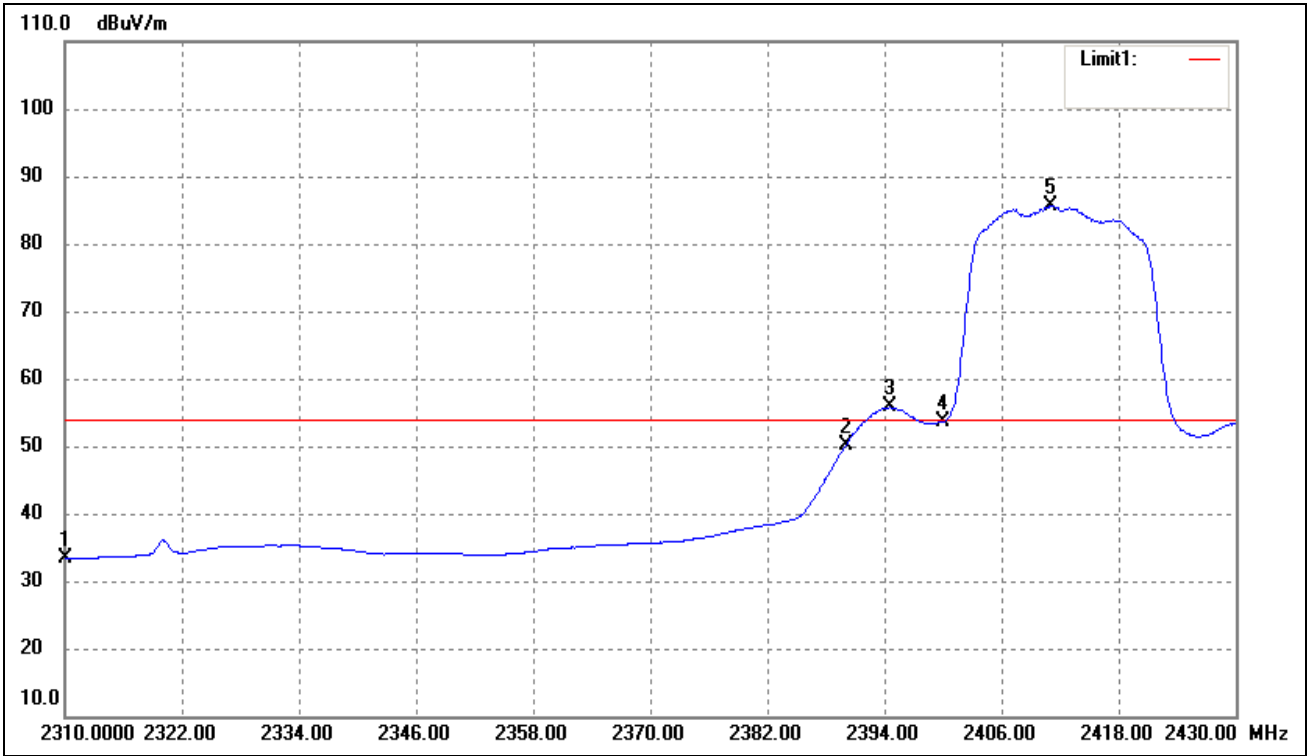

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	36.98	-3.71	33.27	54.00	-20.73	Average Detector
		52.69	-3.71	48.98	74.00	-25.02	Peak Detector
2	2390.000	53.78	-3.54	50.24	54.00	-3.76	Average Detector
		73.96	-3.54	70.42	74.00	-3.58	Peak Detector
3	2394.600	59.31	-3.53	55.78	Delta =29.90dBc		Average Detector
5	2411.040	89.16	-3.48	85.68		Peak Detector	
4	2400.000	57.25	-3.51	53.74	Delta =31.94dBc		Average Detector
5	2411.040	89.16	-3.48	85.68		Average Detector	

802.11n-HT20-Highest Bandedge

Vertical (Worst case)

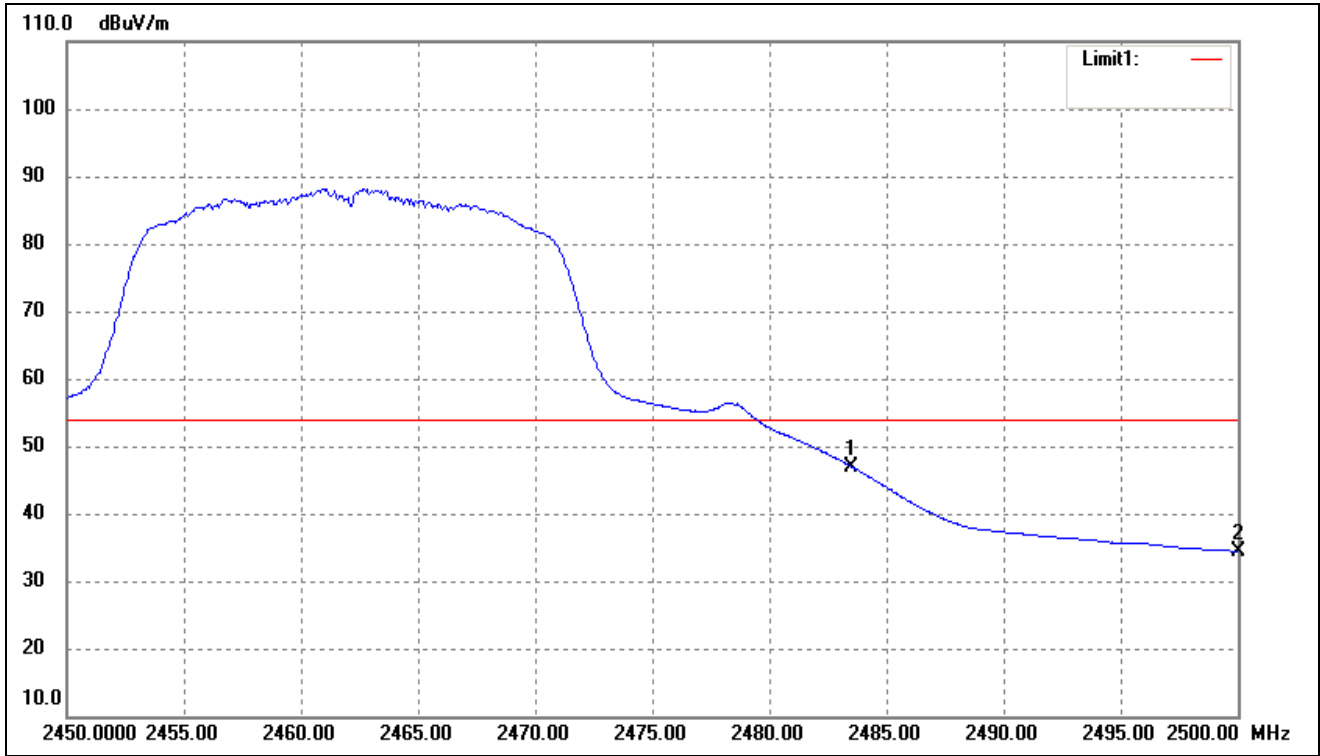

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	50.33	-3.33	47.00	54.00	-7.00	Average Detector
	2483.500	70.87	-3.33	67.54	74.00	-6.46	Peak Detector
2	2500.000	37.68	-3.28	34.40	54.00	-19.60	Average Detector
	2500.000	59.72	-3.28	56.44	74.00	-17.56	Peak Detector

10. Conducted Emissions

10.1 Measurement Uncertainty

Base on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement is ± 2.88 dB.

10.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2014-05-28	2015-05-27
L.I.S.N	Schwarz beck	NSLK8126	8126-224	2014-05-28	2015-05-27
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2014-05-28	2015-05-27


10.3 Test Procedure

The setup of EUT is according with per ANSI C63.4-2009 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

10.4 Basic Test Setup Block Diagram

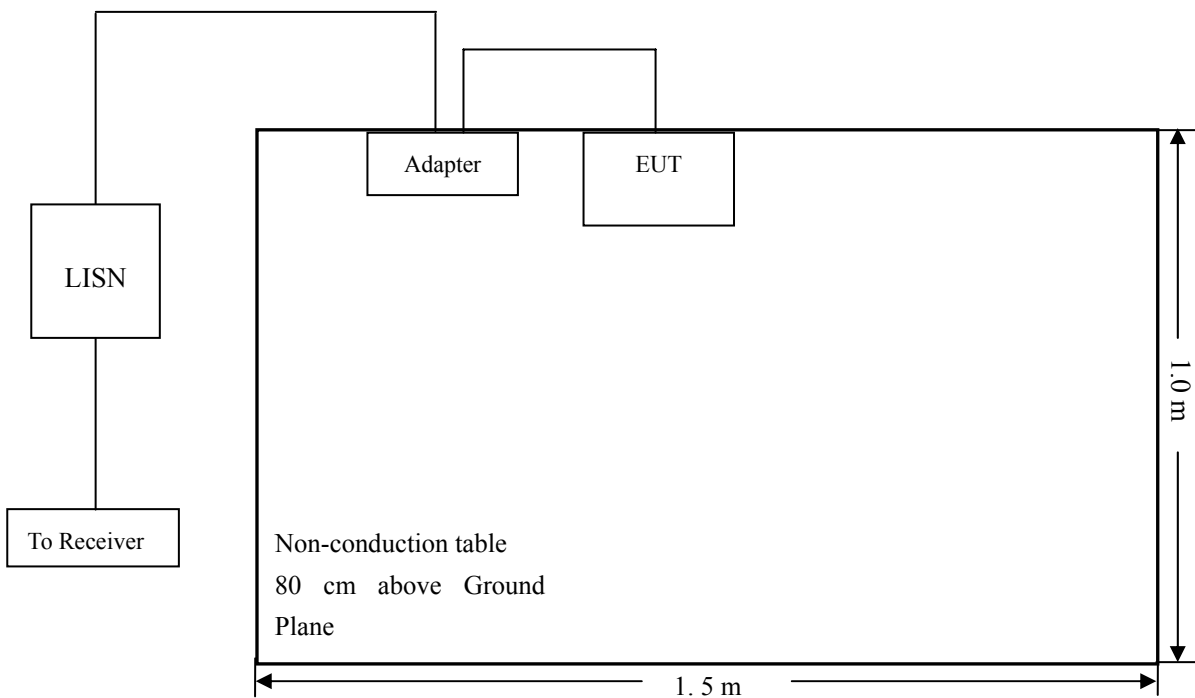

10.5 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

10.6 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency 150 kHz
 Stop Frequency..... 30 MHz
 Sweep Speed Auto
 IF Bandwidth..... 10 kHz
 Quasi-Peak Adapter Bandwidth 9 kHz
 Quasi-Peak Adapter Mode Normal

10.7 Summary of Test Results/Plots

According to the data in section 9.8, the EUT complied with the FCC Part 15.207 Conducted margin for a Class B device, with the *worst* margin reading of:


-16.32 dB at 28.5940 MHz in the Line, Avg detector, 0.15-30MHz

10.8 Conducted Emissions Test Data

Plot of Conducted Emissions Test Data


EUT: Netatmo Security Camera
 Tested Model: NSC01
 Operating Condition: WiFi Transmitting
 Comment: AC 120V/60Hz; Adapter DC 5V

Test Specification: Neutral

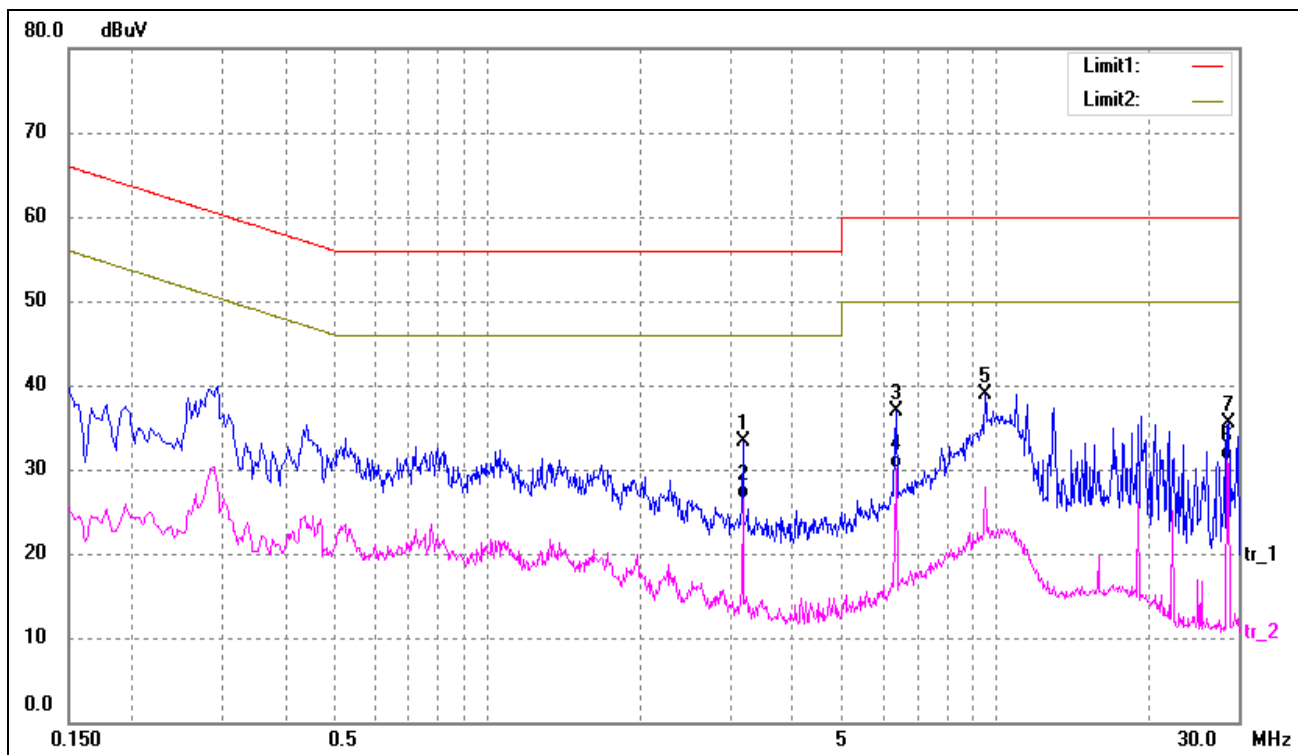

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	3.1780	23.26	10.00	33.26	56.00	-22.74	peak
2	3.1780	16.48	10.00	26.48	46.00	-19.52	AVG
3	6.3540	26.88	10.00	36.88	60.00	-23.12	peak
4	6.3540	20.01	10.00	30.01	50.00	-19.99	AVG
5	9.5380	28.90	10.00	38.90	60.00	-21.10	peak
6*	28.6020	18.12	13.00	31.12	50.00	-18.88	AVG
7	28.6060	22.46	13.00	35.46	60.00	-24.54	peak

Test Specification: Line

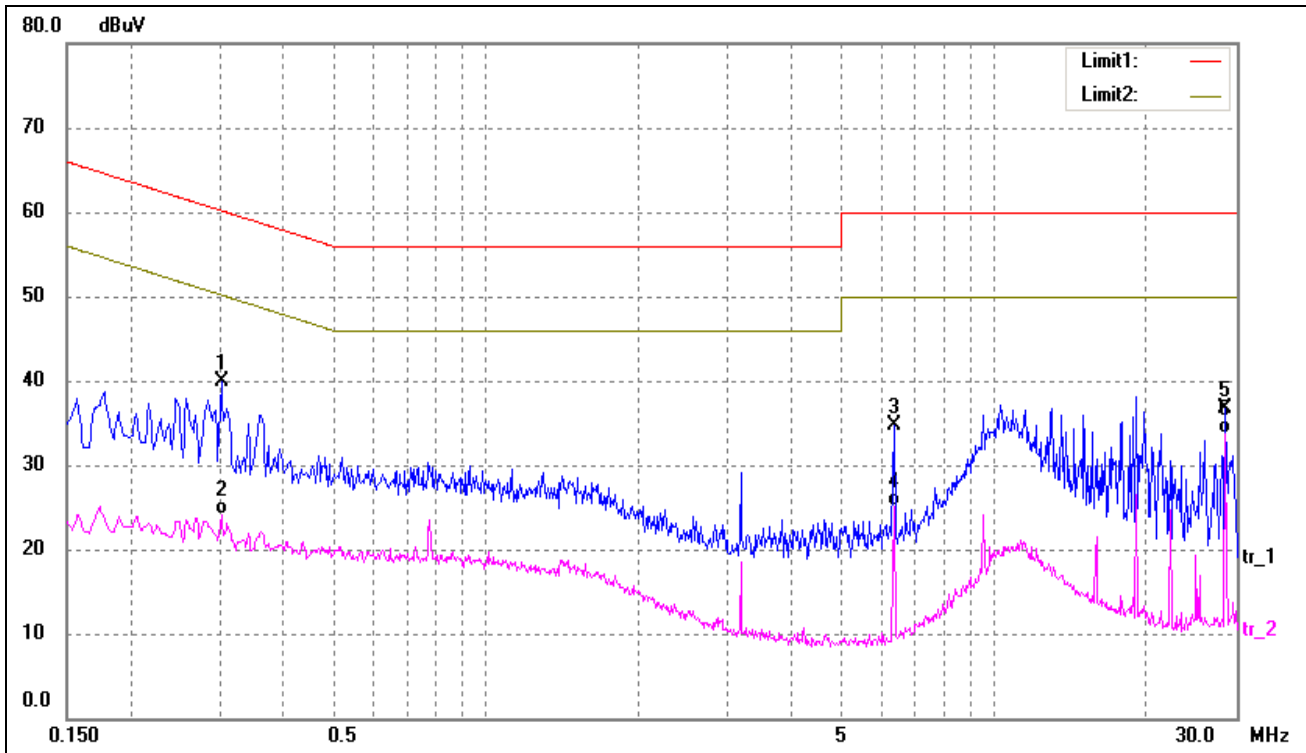

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.3020	30.43	9.50	39.93	60.19	-20.26	peak
2	0.3020	14.56	9.50	24.06	50.19	-26.13	AVG
3	6.3540	24.66	10.00	34.66	60.00	-25.34	peak
4	6.3540	15.05	10.00	25.05	50.00	-24.95	AVG
5	28.5940	23.68	13.00	36.68	60.00	-23.32	peak
6*	28.5940	20.68	13.00	33.68	50.00	-16.32	AVG

***** END OF REPORT *****