



EXHIBIT 2

SCHEMATICS


Block Diagram of Cye Robot Circuit Board

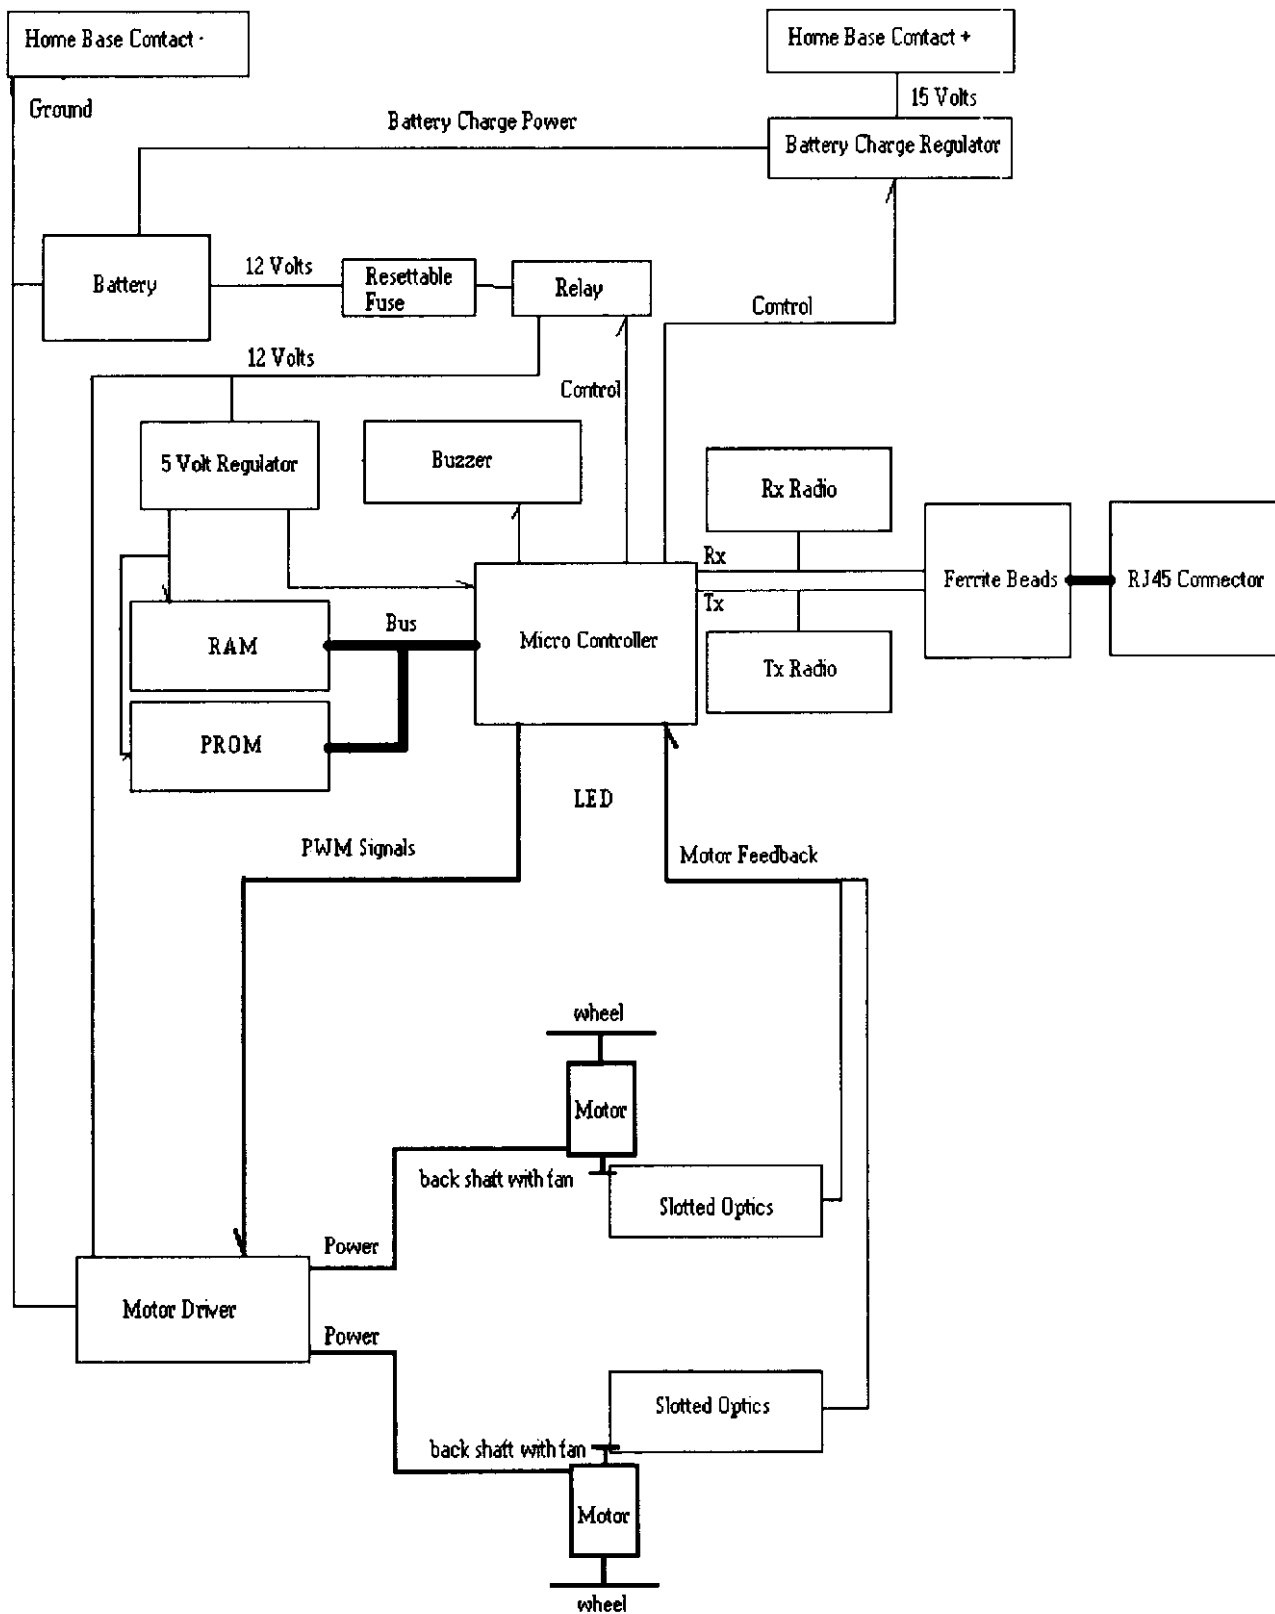

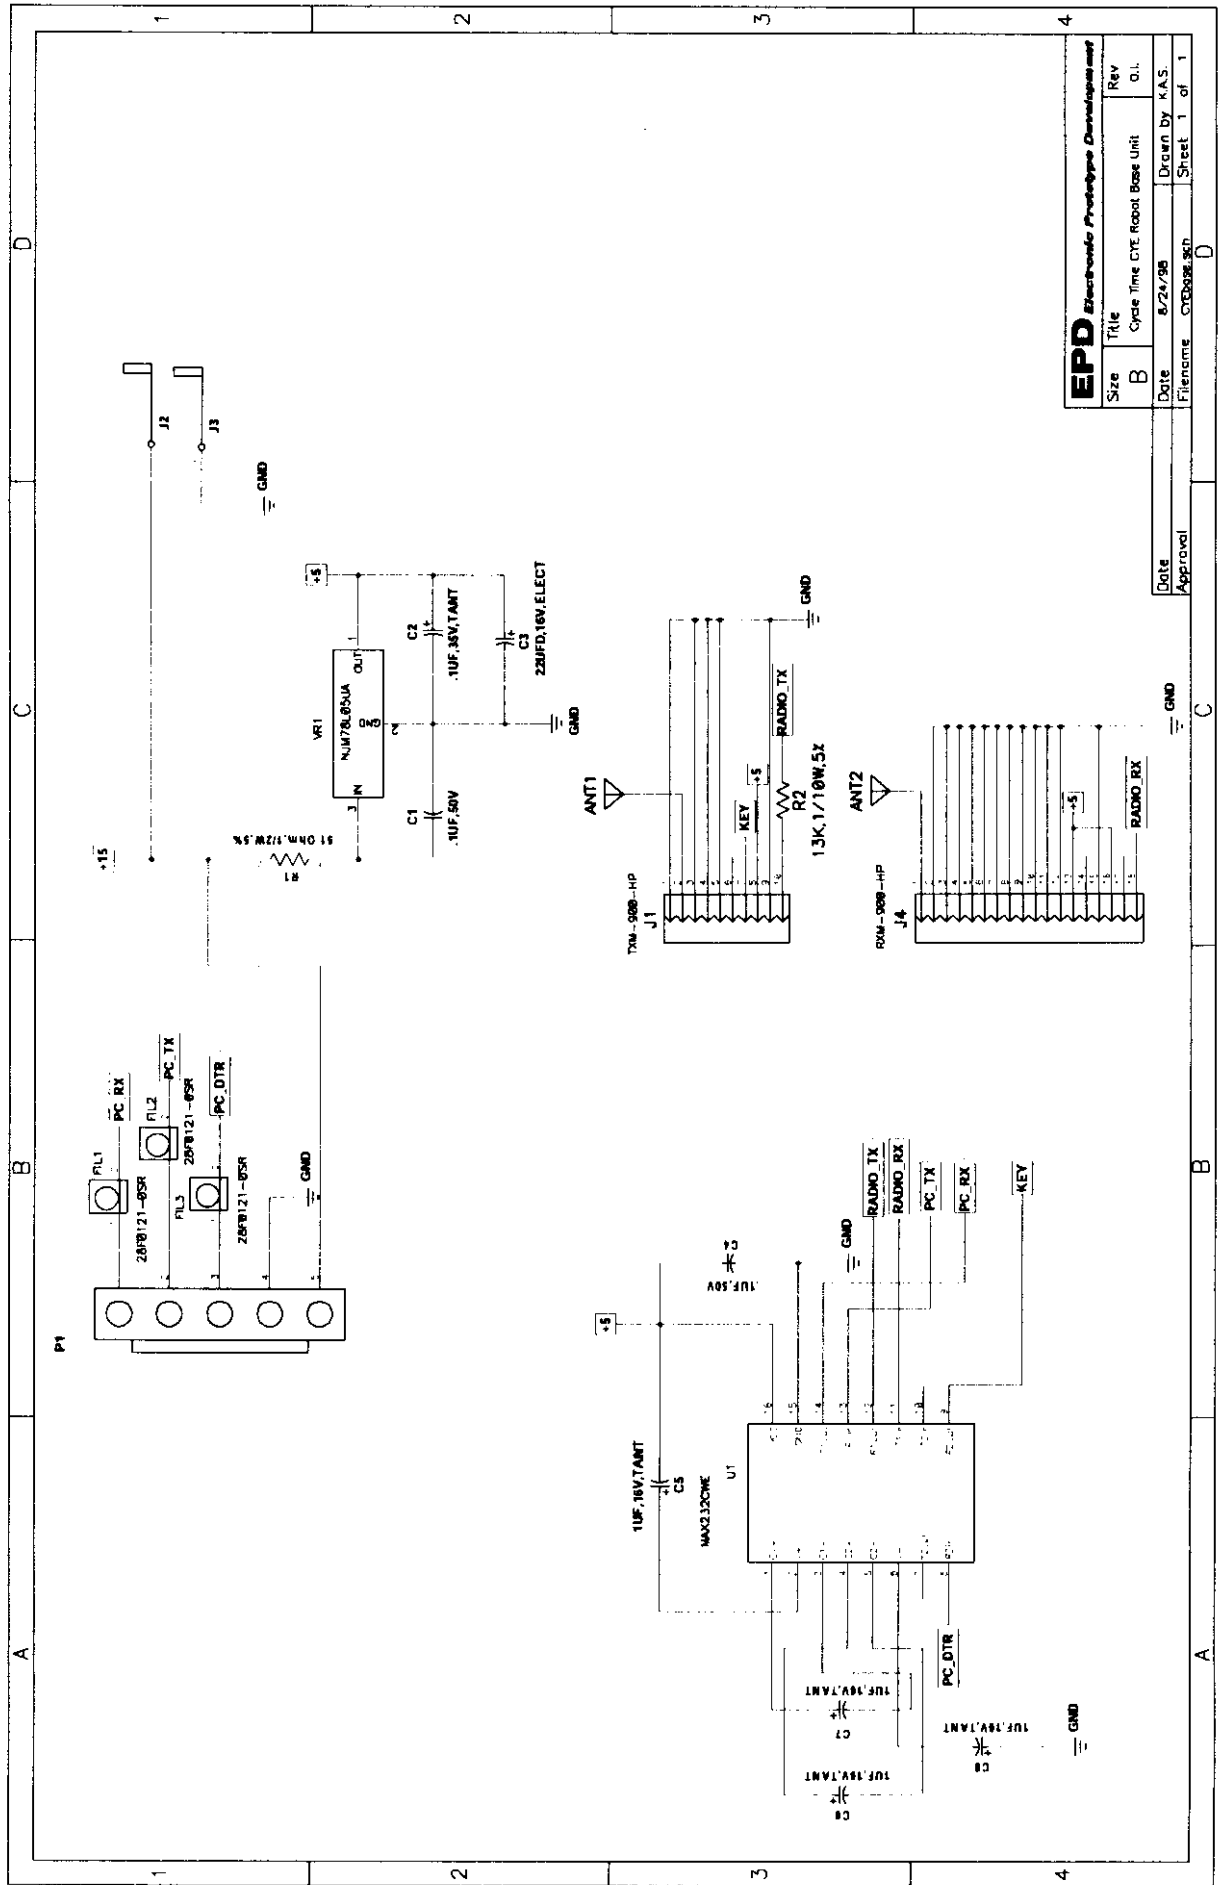

EPD Electronic Prototype Development				
Size	Title	Cycle Time	Base Unit	Rev
B	B	8/24/98	0.1	0.1
Date	Approval	Filename	Drawn By	Sheet 1 of 1
8/24/98		C:\Program Files\EPD\EPD.sch	K.A.S.	

Linux RF Module Block/Signal Diagram

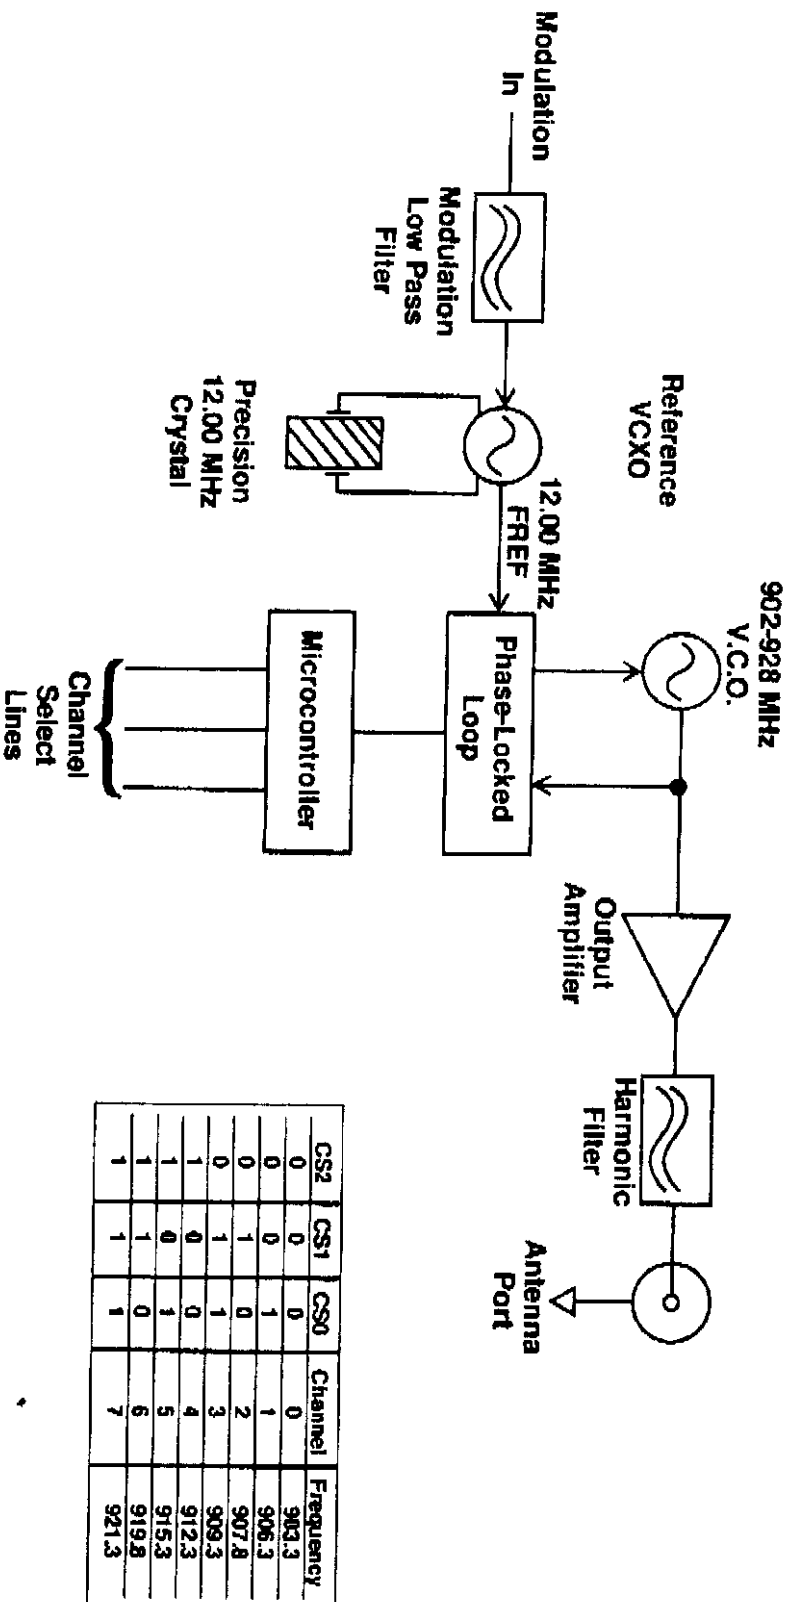

Linux
TECHNOLOGIES
LOWEST POWER MODULE

575 SE ASHLEY PLACE • GRANTS PASS, OR 97526
PHONE: (800) 736-6677 • FAX: (541) 471-6251

Module Series HP TXM Architecture
Modulation Method FM/FSK Duty Cycle
Frequency 902-928MHz Overall Accuracy ±50KHz
Occupied Bandwidth 32KHz

This product utilizes a modular hybrid RF stage manufactured by Linux Technologies Inc. The module contains all RF components excepting antennas. While each module is inherently designed to meet or exceed all FCC requirements, external factors such as antenna selection, transmission content, and intended application may affect its use. A block diagram of the module's internal architecture and signal path is shown above. Additional information regarding the use, construction or testing of Linux modules may be obtained by calling (541) 471-6256, from 8-4 PST or addressing a written e-mail request to info@linxtechnologies.com.