



- Unwanted Emissions in Restricted Frequency Bands
- Above 1GHz

Test channel:	Lowest	Polarization:	Horizontal
---------------	--------	---------------	------------

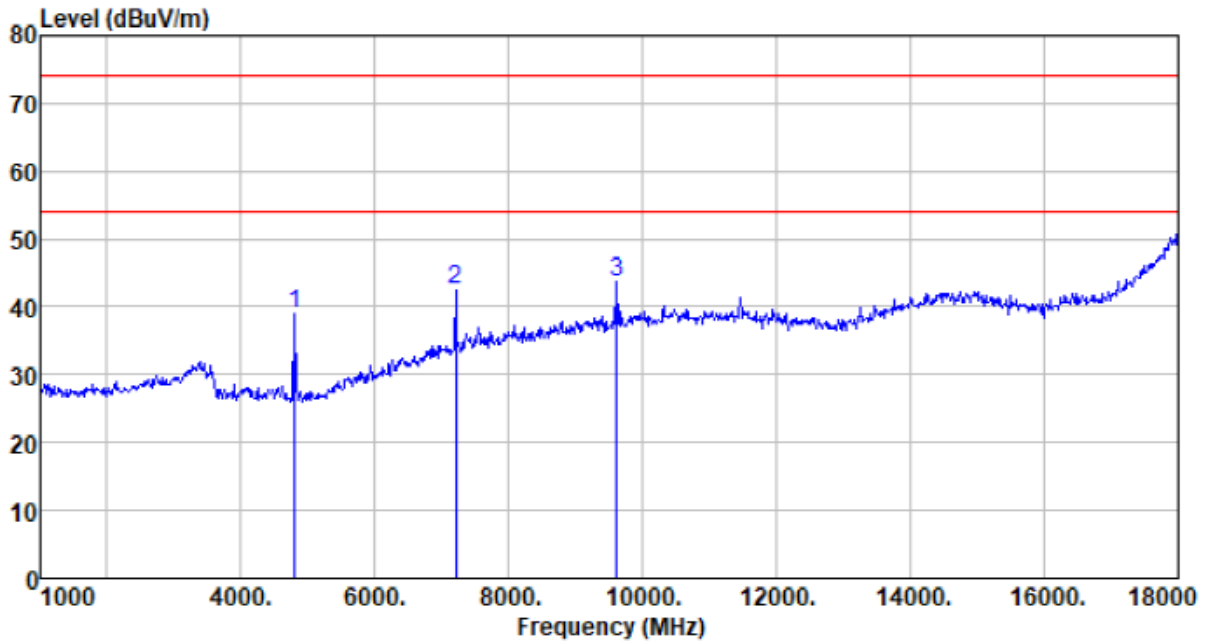


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4805.200	41.01	31.20	4.61	37.73	39.09	74.00	-34.91	Peak
7207.800	35.45	36.16	6.48	35.63	42.46	74.00	-31.54	Peak
9610.400	32.85	37.93	7.97	34.94	43.81	74.00	-30.19	Peak

Test channel:	Lowest	Polarization:	Vertical
---------------	--------	---------------	----------

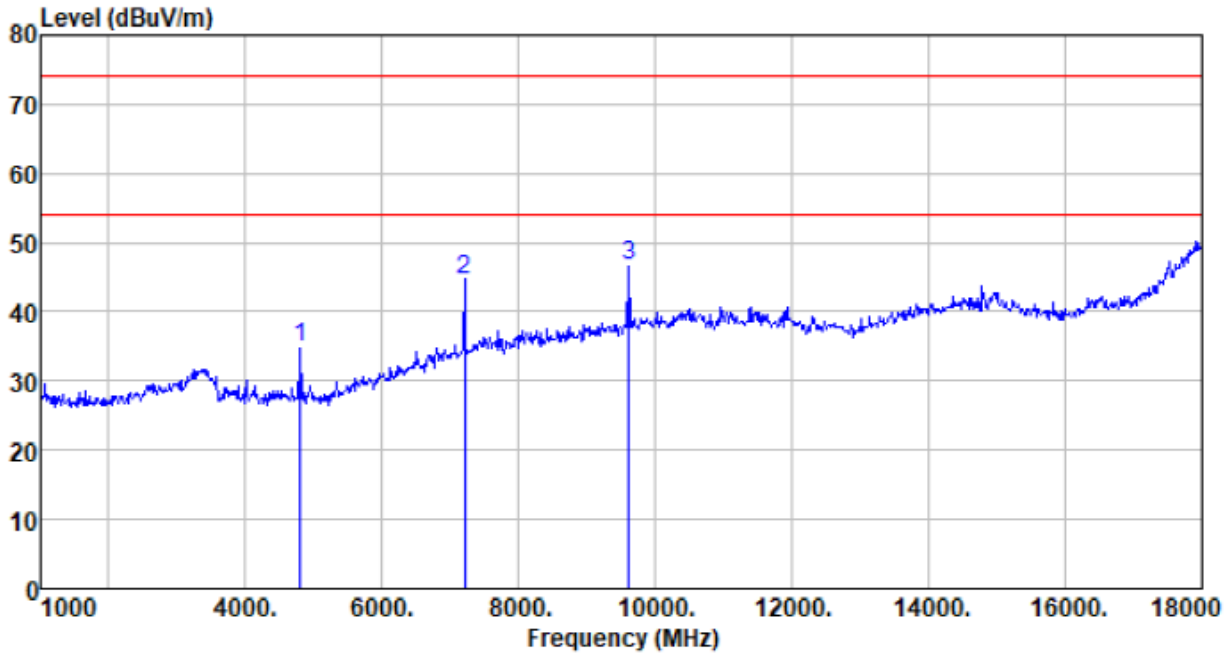


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4805.200	36.87	31.20	4.61	37.73	34.95	74.00	-39.05	Peak
7207.800	37.55	36.16	6.48	35.63	44.56	74.00	-29.44	Peak
9610.400	35.67	37.93	7.97	34.94	46.63	74.00	-27.37	Peak

Test channel:	Middle	Polarization:	Horizontal
---------------	--------	---------------	------------

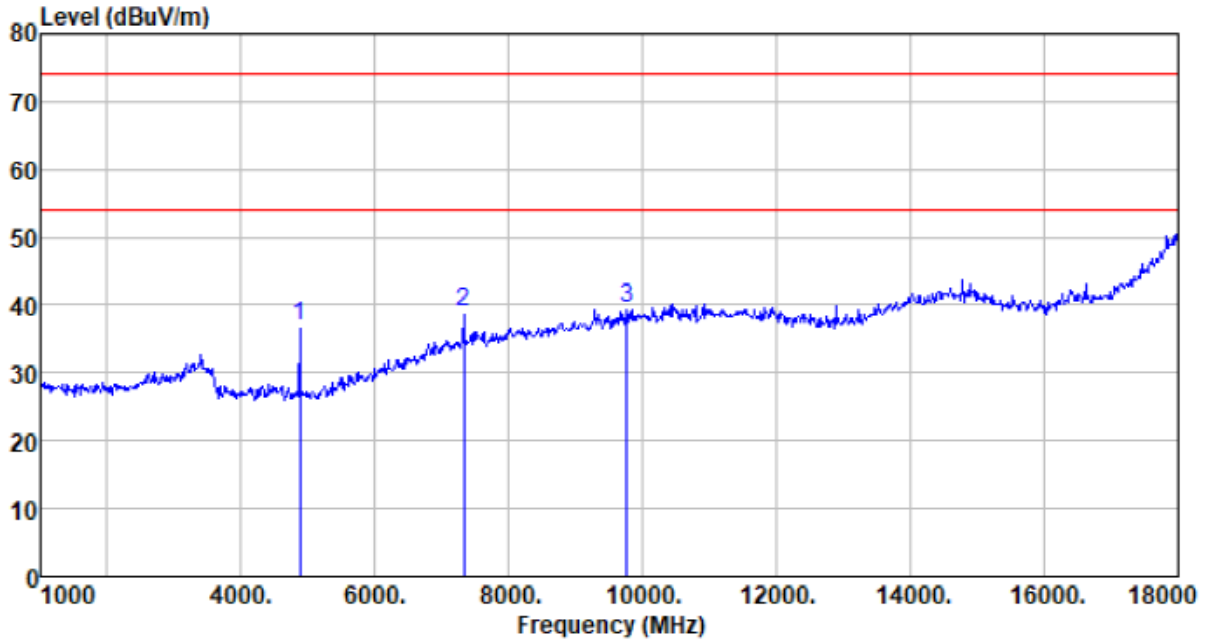


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4880.800	38.67	31.31	4.69	37.75	36.92	74.00	-37.08	Peak
7321.200	31.57	36.43	6.63	35.60	39.03	74.00	-34.97	Peak
9761.600	28.46	38.10	8.03	35.03	39.56	74.00	-34.44	Peak

Test channel:	Middle	Polarization:	Vertical
---------------	--------	---------------	----------

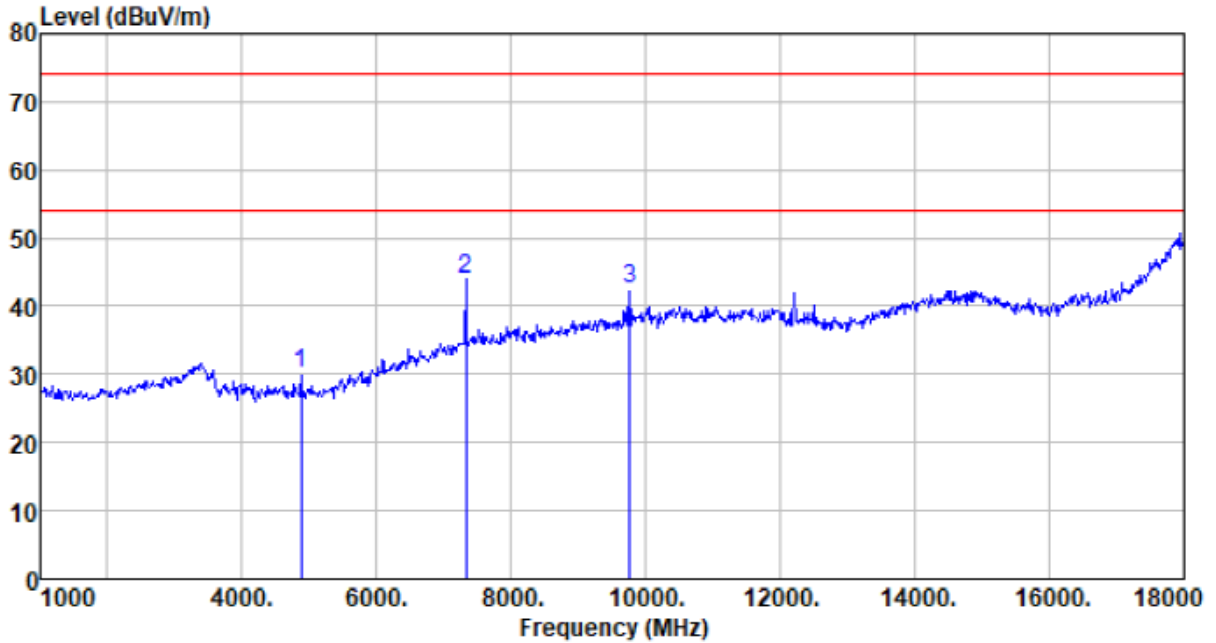


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4880.800	31.78	31.31	4.69	37.75	30.03	74.00	-43.97	Peak
7321.200	36.46	36.43	6.63	35.60	43.92	74.00	-30.08	Peak
9761.600	31.48	38.10	8.03	35.03	42.58	74.00	-31.42	Peak

Test channel:	Highest	Polarization:	Horizontal
---------------	---------	---------------	------------

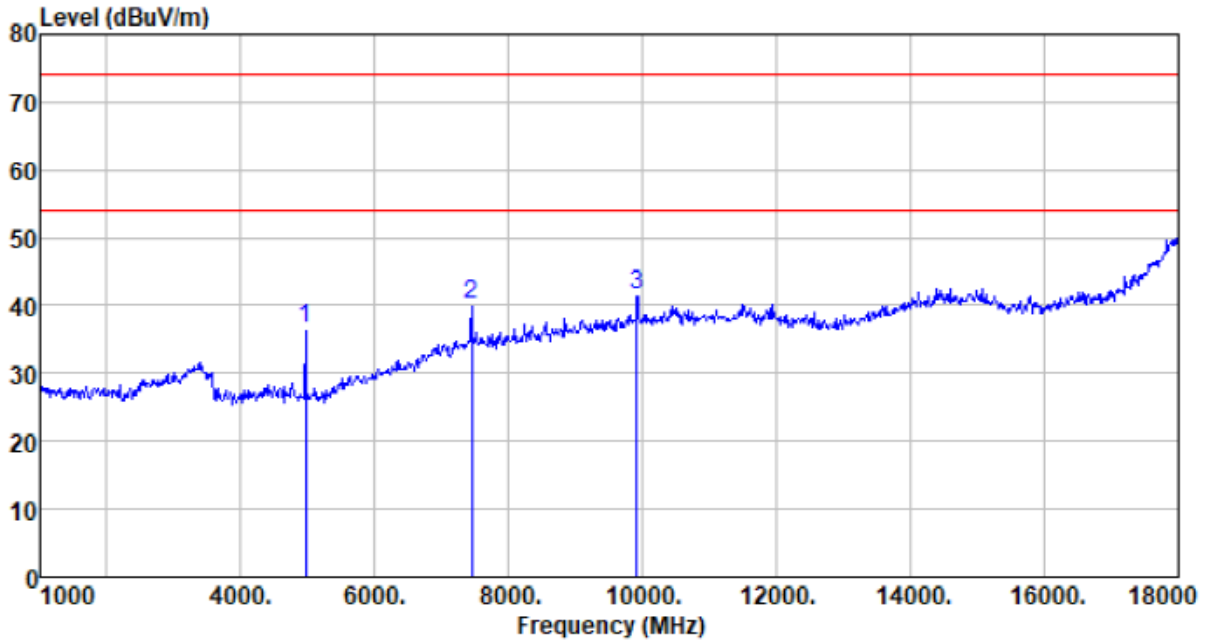

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4958.800	38.14	31.44	4.79	37.78	36.59	74.00	-37.41	Peak
7438.800	32.15	36.66	6.77	35.56	40.02	74.00	-33.98	Peak
9917.600	30.26	38.30	8.09	35.14	41.51	74.00	-32.49	Peak

Test channel:	Highest	Polarization:	Vertical
---------------	---------	---------------	----------

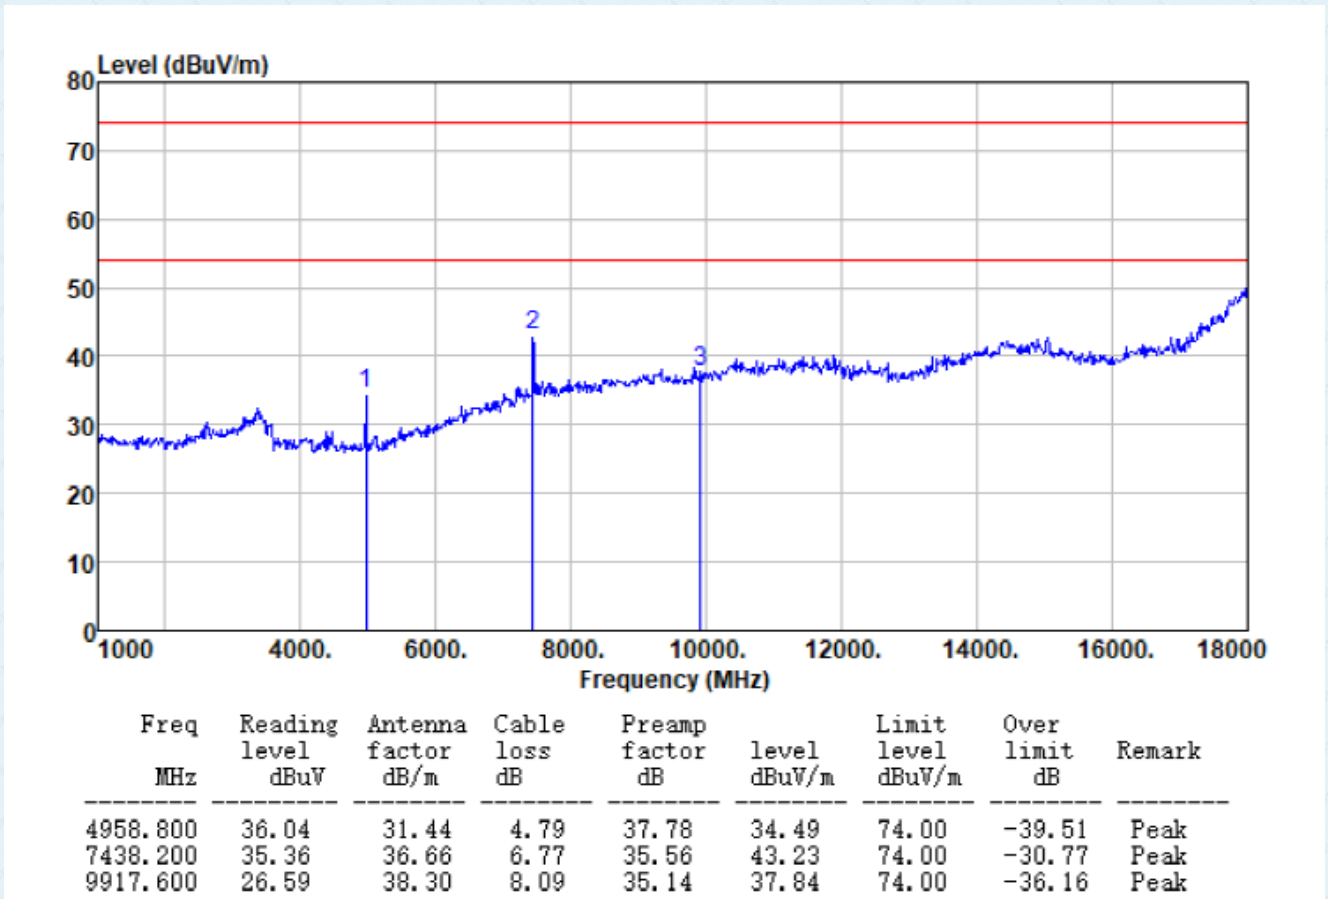


Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*”, means this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.


Unwanted Emissions in Non-restricted Frequency Bands

Test channel:	Lowest	Polarization:	Horizontal
---------------	--------	---------------	------------

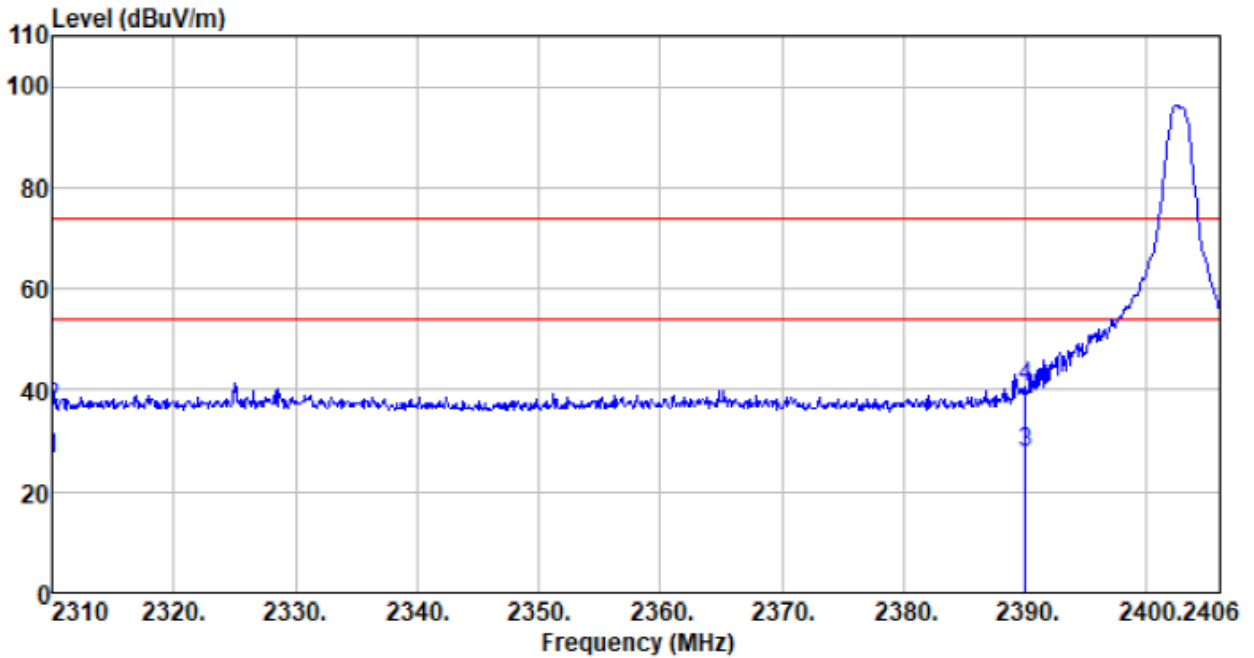


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2310.000	33.13	27.14	2.81	36.79	26.29	54.00	-27.71	Average
2310.000	43.57	27.14	2.81	36.79	36.73	74.00	-37.27	Peak
2390.000	34.01	27.37	2.91	36.85	27.44	54.00	-26.56	Average
2390.000	47.35	27.37	2.91	36.85	40.78	74.00	-33.22	Peak

Test channel:	Lowest	Polarization:	Vertical
---------------	--------	---------------	----------

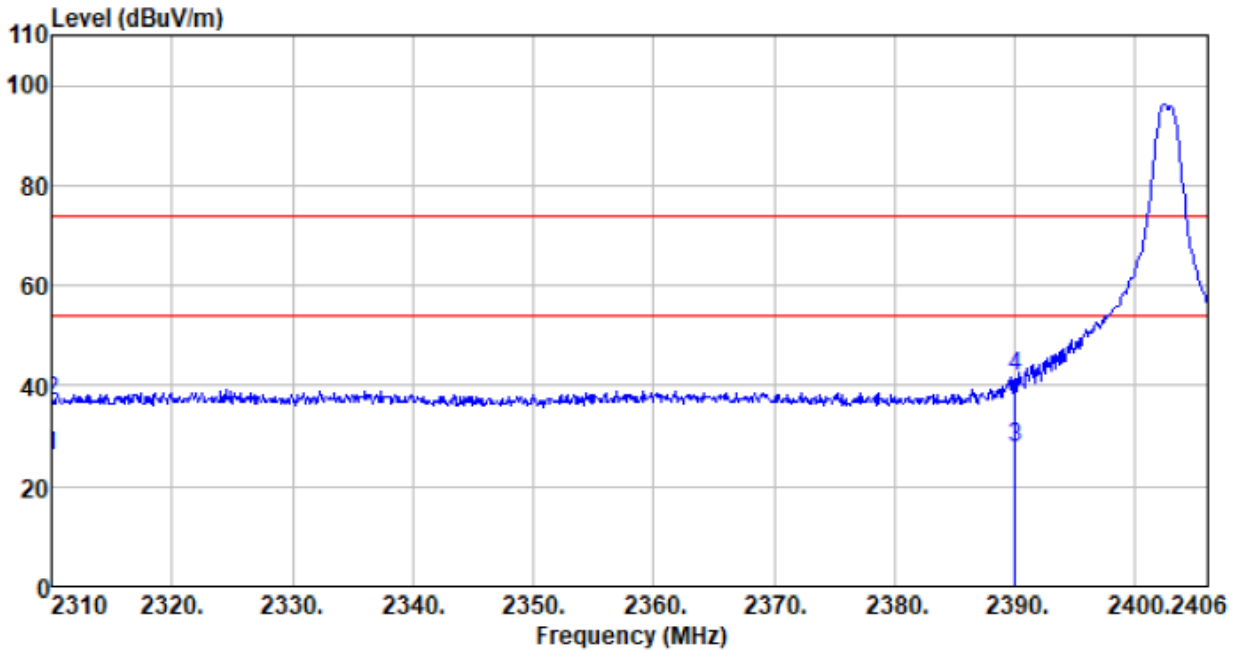


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2310.000	32.79	27.14	2.81	36.79	25.95	54.00	-28.05	Average
2310.000	43.88	27.14	2.81	36.79	37.04	74.00	-36.96	Peak
2390.000	34.04	27.37	2.91	36.85	27.47	54.00	-26.53	Average
2390.000	48.36	27.37	2.91	36.85	41.79	74.00	-32.21	Peak

Test channel:	Highest	Polarization:	Horizontal
---------------	---------	---------------	------------

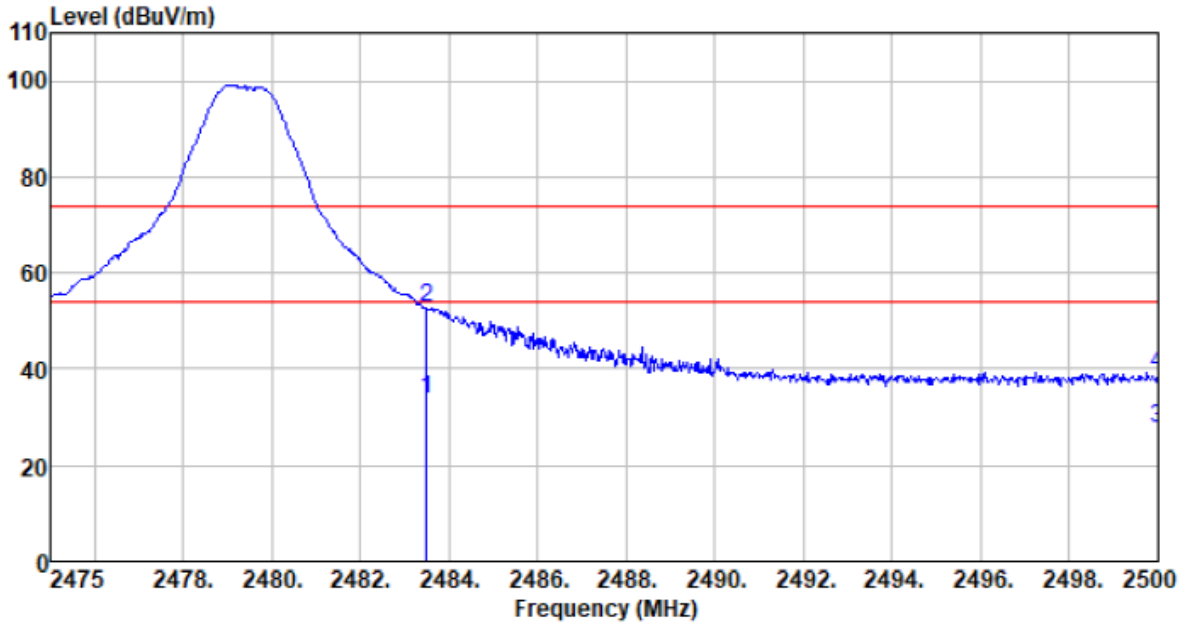

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2483.500	40.03	27.66	2.99	36.93	33.75	54.00	-20.25	Average
2483.500	58.88	27.66	2.99	36.93	52.60	74.00	-21.40	Peak
2500.000	33.65	27.70	3.01	36.94	27.42	54.00	-26.58	Average
2500.000	45.12	27.70	3.01	36.94	38.89	74.00	-35.11	Peak

Test channel:	Highest	Polarization:	Vertical
---------------	---------	---------------	----------

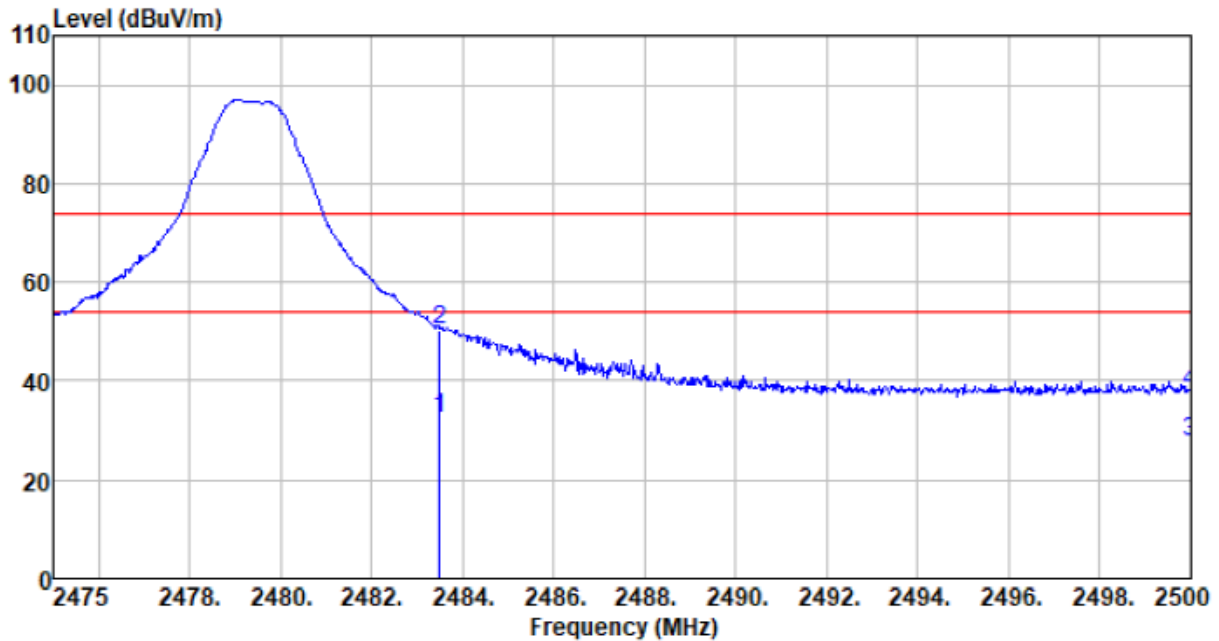

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2483.500	38.65	27.66	2.99	36.93	32.37	54.00	-21.63	Average
2483.500	56.79	27.66	2.99	36.93	50.51	74.00	-23.49	Peak
2500.000	33.75	27.70	3.01	36.94	27.52	54.00	-26.48	Average
2500.000	44.10	27.70	3.01	36.94	37.87	74.00	-36.13	Peak

Remarks:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. “*”, means this data is the too weak instrument of signal is unable to test.

8 Test Setup Photo

Reference to the **appendix I** for details.

9 EUT Constructional Details

Reference to the **appendix II** for details.

---End---