



HCT CO., LTD.

CERTIFICATION DIVISION

105-1, JANGAM-RI, MAJANG-MYEON, ICHEON-SI, GYEONGGI-DO, KOREA

TEL : +82 31 645 6300 FAX : +82 31 645 6401 www.hct.co.kr

CERTIFICATE OF COMPLIANCE

FCC PART 27 Certification

Applicant Name: ADRF KOREA, Inc.	Date of Issue: September 12, 2012
Address: 5-5, Mojeon-Ri, Backsa-Myun, Icheon-City, Kyunggi-Do, Korea	Test Site/Location: HCT CO., LTD., 105-1, Jangam-ri, Majang-Myeon, Icheon-si, Gyeonggi-Do, Korea
	Test Report No.: HCTR1208FR39-1

FCC ID : **N52-AXM700-9543**

APPLICANT : **ADRF KOREA, Inc.**

EUT Type: **REPEATER**

Model: **AXM700-9543**

Frequency Ranges:
DL : 728 MHz ~ 740 MHz, 746 MHz ~ 757 MHz
UL : 698 MHz ~ 710 MHz, 776 MHz ~ 787 MHz

Conducted Output Power:
DL : 20 W
UL : 1 W

FCC Rules Part(s): **CFR 47, Part 27**

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of Part 27 of the FCC Rules under normal use and maintenance.

Report prepared by
:Chang Seok Choi
Test engineer of RF Team

Approved by
: Sang Jun Lee
Manager of RF Team

FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1208FR39-1	Date of Issue: September 12, 2012	EUT Type: REPEATER	FCC ID: S2O-AXM700-9543	Page 1 of 49

Revision

TEST REPORT NO.	DATE	DESCRIPTION
HCTR1208FR39	August 24, 2012	First Approval Report
HCTR1208FR39-1	Sptember 12,2012	Add 5 MHz Out of Band Rejection data

CONTENTS

1. CLIENT INFORMATION.....	4
2. TEST SUMMARY	5
2.1. STANDARDS	5
2.2. MODE OF OPERATION DURING THE TEST	5
3. STANDARDS ENVIRONMENTAL TEST CONDITIONS.....	5
4. TEST EQUIPMENT.....	6
5. RF OUTPUT POWER.....	7
6. OCCUPIED BANDWIDTH.....	14
7. SPURIOUS AND HARMONIC EMISSION AT ANTENNA TERMINAL.....	25
8. FIELD STRENGTH OF SPURIOUS RADIATION	42
9. FREQUENCY STABILITY OVER TEMPERATURE AND VOLTAGE VARIATIONS	46
10. RF EXPOSURE STATEMENT	48

FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1208FR39-1	Date of Issue: September 12,2012	EUT Type: REPEATER	FCC ID: N52-AXM700-9543	Page 3 of 49

1. CLIENT INFORMATION

The EUT has been tested by request of

Company	ADRF KOREA, Inc. 5-5, Mojeon-Ri, Backsa-Myun, Icheon-City, Kyunggi-Do, Korea
Contact Point	Attention: Ms. Julie Song Tel. : 800-313-9345

- FCC ID: N52-AXM700-9543
- APPLICANT: ADRF KOREA, Inc.
- EUT Type: Repeater
- Model: AXM700-9543
- Frequency Ranges: DL : 728 MHz ~ 740 MHz, 746 MHz ~ 757 MHz
UL : 698 MHz ~ 710 MHz, 776 MHz ~ 787 MHz
- Conducted Output Power: DL : 20 W, UL : 1 W
- Antenna Gain(s) : 16 dBi
- FCC Rules Part(s): CFR Title 47 Part 27 Sub Part C

FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1208FR39-1	Date of Issue: September 12, 2012	EUT Type: REPEATER	FCC ID: N52-AXM700-9543	Page 4 of 49

2. TEST SUMMARY

2.1. STANDARDS

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with FCC Part 27.

SECTION	TEST ITEMS	RESULTS
§2.1046, §27.50	Conducted Output Power	Compliant
§2.1049	Occupied Bandwidth	Compliant
§2.1053, §27.53	Spurious Emissions at Antenna Terminals	Compliant
§2.1053, §27.53	Radiated Spurious Emissions	Compliant
§2.1055	Frequency stability	Compliant

2.2. MODE OF OPERATION DURING THE TEST

The EUT was operated in a manner representative of the typical usage of the equipment.

During all testing, system components were manipulated within the confines of typical usage to maximize each emission. All Modulation (QPSK, 16QAM and 64QAM) modes were tested.

The device does not supply antenna(s) with the system, so the dummy loads were connected to the RF output ports for radiated spurious emission testing.

3. STANDARDS ENVIRONMENTAL TEST CONDITIONS

Temperature :	+ 15 °C to + 35 °C
Relative humidity:	30 % to 60 %
Air pressure	860 mbar to 1 060 mbar

FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1208FR39-1	Date of Issue: September 12,2012	EUT Type: REPEATER	FCC ID: N52-AXM700-9543	Page 5 of 49

4. TEST EQUIPMENT

Manufacturer	Model / Equipment	Serial No.	Calibration Due
Schwarzbeck	BBHA 9120D / Double Ridged Horn Antenna	147	05/15/2014
Schwarzbeck	BBHA 9120D / Double Ridged Horn Antenna	937	10/17/2013
Schwarzbeck	VULB 9168 / TRILOG Antenna	9168-200	02/19/2013
HD	MA240 / Antenna Position Tower	556	N/A
EMCO	1050 / Turn Table	114	N/A
HD GmbH	HD 100 / Controller	13	N/A
HD GmbH	KMS 560 / SlideBar	12	N/A
MITEQ	AMF-6B-180265-35-10P / POWER AMP	667624	04/16/2013
Agilent	N9020A /Signal Analyzer	US46220219	05/02/2013
Agilent	6674A / DC Power Supply	3501A00901	05/02/2013
WEINSCHTEL	67-30-33 / Attenuator	BU5347	11/07/2012
WEINSCHTEL	AF9003-69-31 / Attenuator	5701	11/07/2012
Nang-Yeoul	NY-THR18750 / Temperature Chamber	NY-2009012201A	11/08/2012

5. RF OUTPUT POWER

Test Requirements:

§ 2.1046 Measurements required: RF power output:

§ 2.1046 (a) For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in § 2.1033(c)(8). The electrical characteristics of the radio frequency load attached to the output terminals when this test is made shall be stated.

§ 2.1046 (b) For single sideband, independent sideband, and single channel, controlled carrier radiotelephone transmitters, the procedure specified in paragraph (a) of this section shall be employed and, in addition, the transmitter shall be modulated during the test as specified and as applicable in § 2.1046 (b) (1-5). In all tests, the input level of the modulating signal shall be such as to develop rated peak envelope power or carrier power, as appropriate, for the transmitter.

§ 2.1046 (c) For measurements conducted pursuant to paragraphs (a) and (b) of this section, all calculations and methods used by the applicant for determining carrier power or peak envelope power, as appropriate, on the basis of measured power in the radio frequency load attached to the transmitter output terminals shall be shown. Under the test conditions specified, no components of the emission spectrum shall exceed the limits specified in the applicable rule parts as necessary for meeting occupied bandwidth or emission limitations.


§ 27.50 Power limits and duty cycle. (b) The following power and antenna height limits apply to transmitters operating in the 746- 763 MHz, 775- 793 MHz and 805- 806 MHz bands: (2) Fixed and base stations transmitting a signal in the 746-757 MHz, 758-763 MHz, 776-787 MHz, and 788-793 MHz bands with an emission bandwidth of 1 MHz or less must not exceed an ERP of 1000 watts and an antenna height of 305 m HAAT, except that antenna heights greater than 305 m HAAT are permitted if power levels are reduced below 1000 watts ERP in accordance with Table 1 of this section.

(c) The following power and antenna height requirements apply to stations transmitting in the 698- 746 MHz band: (3) Fixed and base stations transmitting a signal with an emission bandwidth greater than 1 MHz must not exceed an ERP of 1000 watts/MHz and an antenna height of 305 m HAAT, except that antenna heights greater than 305 m HAAT are permitted if power levels are reduced below 1000 watts/MHz ERP in accordance with Table 3 of this section;

FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1208FR39-1	Date of Issue: September 12,2012	EUT Type: REPEATER	FCC ID: N52-AXM700-9543	Page 7 of 49

Test Procedures:

As required by 47 CFR 2.1046, RF power output measurements were made at the RF output terminals using an attenuator and spectrum analyzer or power meter. This test was performed in all applicable modulations.

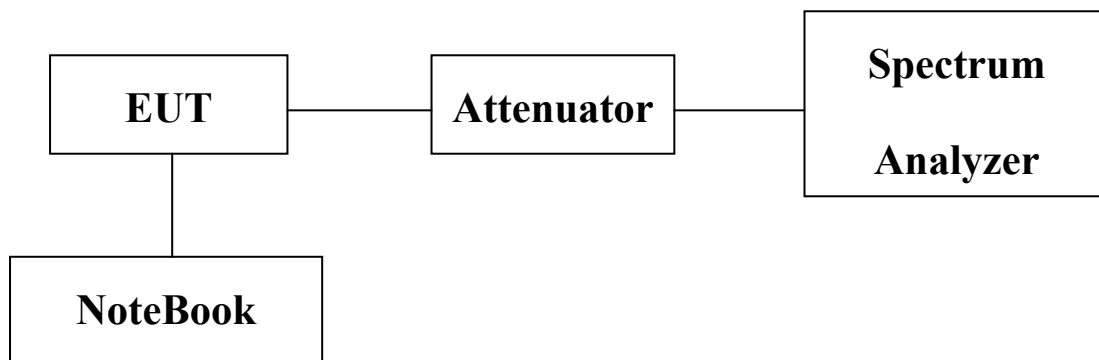

Block Diagram 1. RF Power Output Test Setup

Test Results:

Input Signal	Modulation	Input Level (dBm)	Maximum Amp Gain
LTE	QPSK, 16QAM, 64QAM	DL : -52 dBm UL : -65 dBm	DL : 95 dB UL : 82 dB

[Downlink]


Band	Bandwidth	Frequency (MHz)	Measured Average Output Power dBm(W)
A	5 MHz	731	42.53(17.9061)
B		737	42.78(18.9671)
A&B	10 MHz	734	42.76(18.8800)
C		751.5	43.01(19.9986)

[Uplink]


Band	Bandwidth	Frequency (MHz)	Measured Average Output Power dBm (W)
A	5 MHz	701	29.91(0.9795)
B		707	29.64(0.9205)
A&B	10 MHz	704	29.84(0.9638)
C		781.5	29.86(0.9683)

Plots of RF Output Power

[LTE Downlink A_5 MHz]

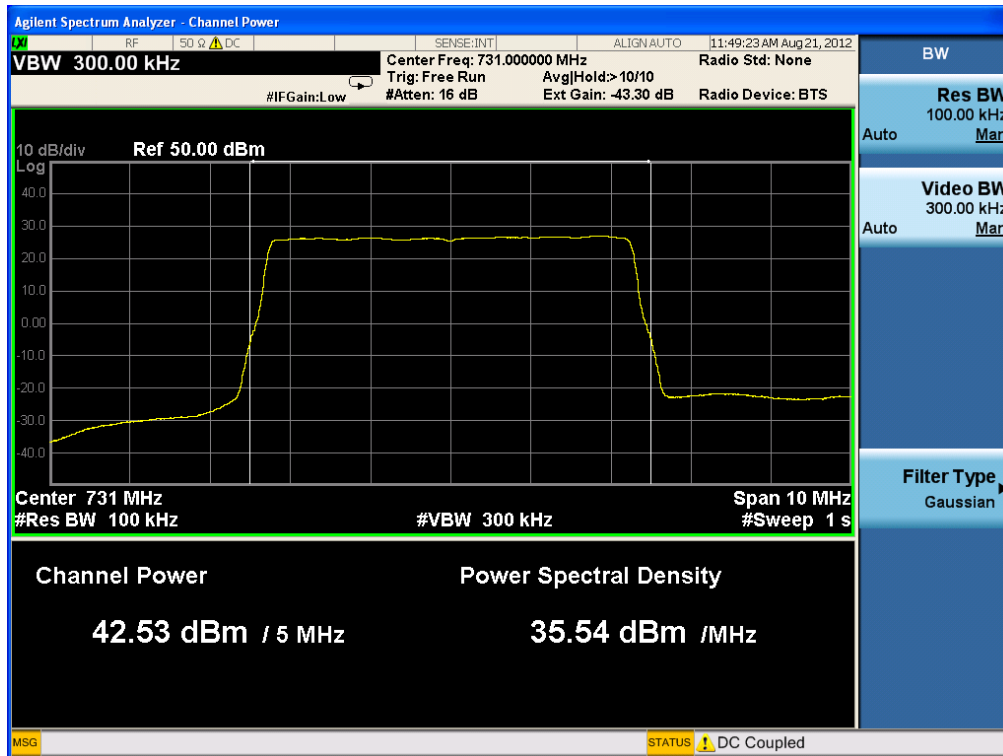


[LTE Downlink B_5 MHz]

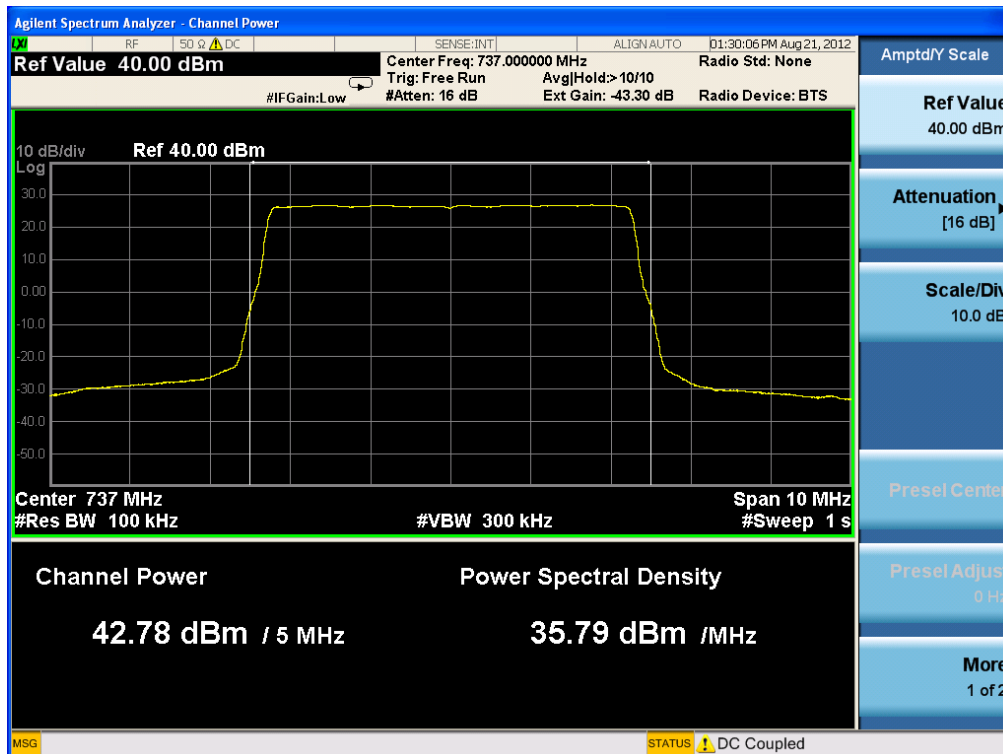

FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1208FR39-1	Date of Issue: September 12, 2012	EUT Type: REPEATER	FCC ID: N52-AXM700-9543	Page 10 of 49

[LTE Downlink A&B_10 MHz]

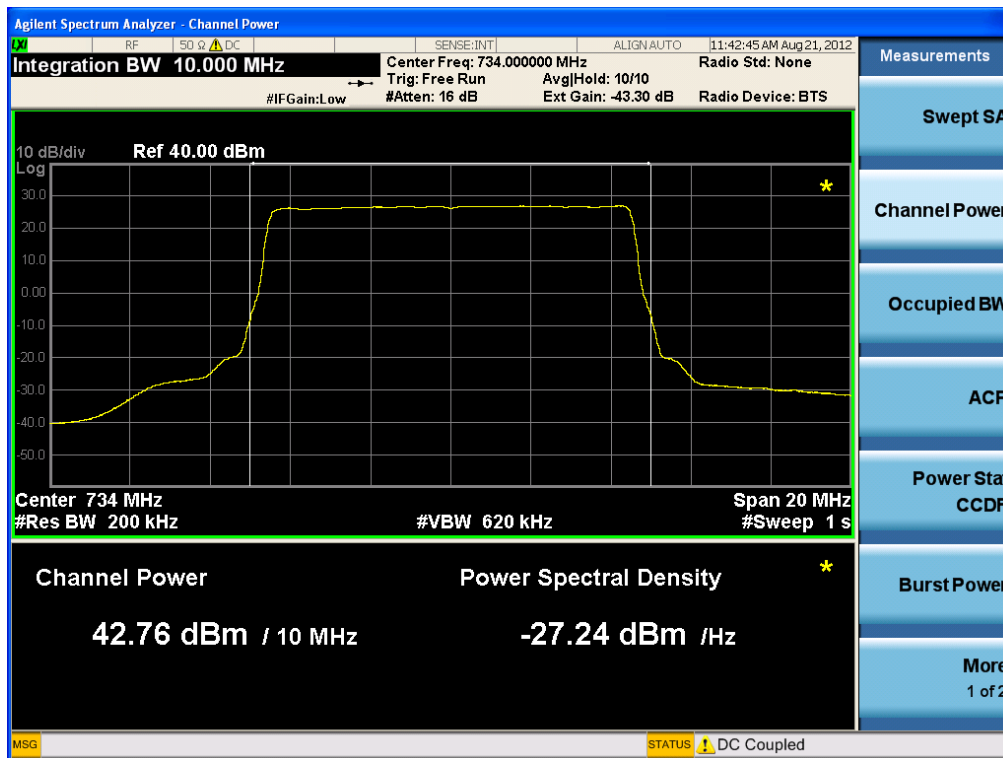


[LTE Downlink C_10 MHz]




FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1208FR39-1	Date of Issue: September 12, 2012	EUT Type: REPEATER	FCC ID: N52-AXM700-9543	Page 11 of 49

[LTE Uplink A_5 MHz]

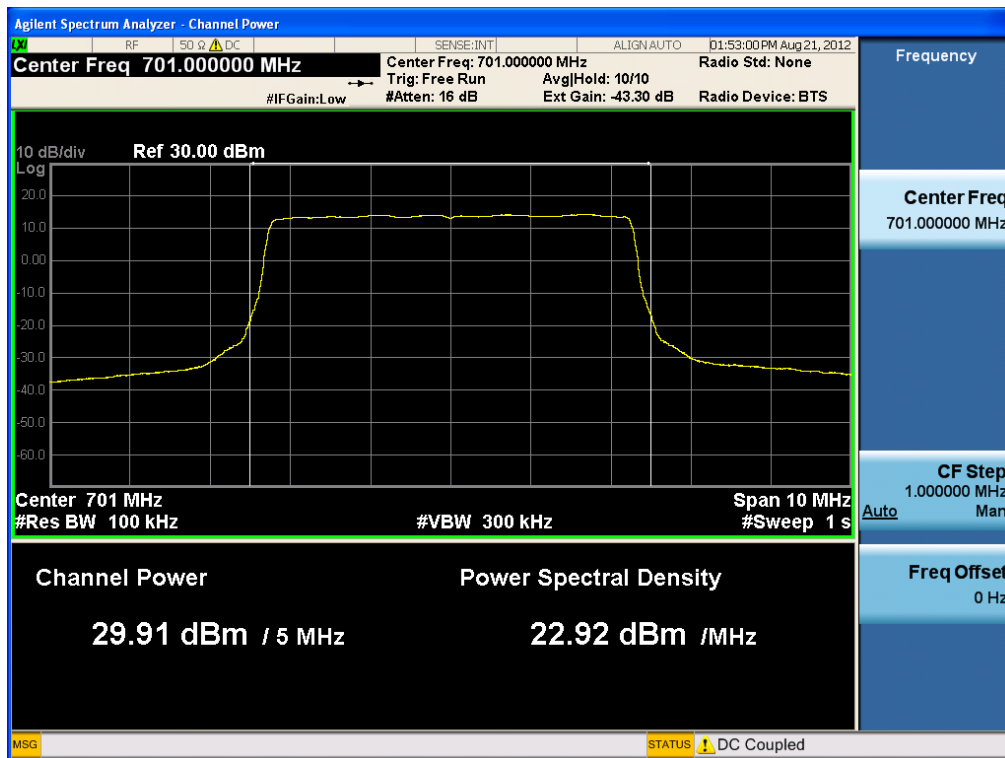


[LTE Uplink B_5 MHz]

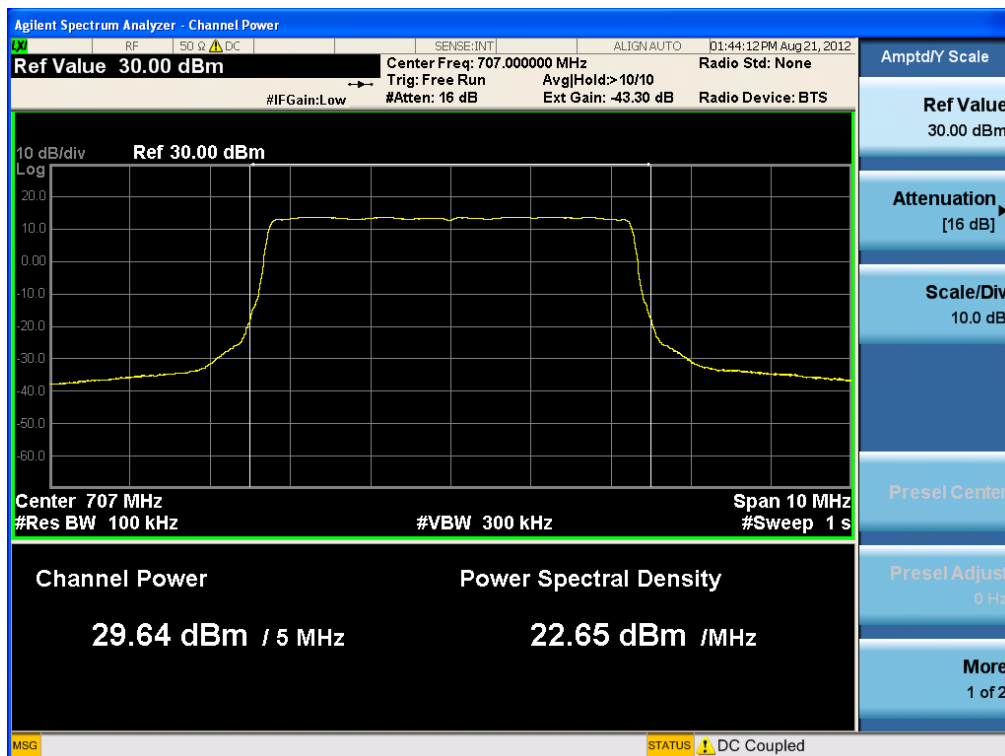


FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1208FR39-1	Date of Issue: September 12,2012	EUT Type: REPEATER	FCC ID: N52-AXM700-9543	Page 12 of 49

[LTE Uplink A&B_10 MHz]

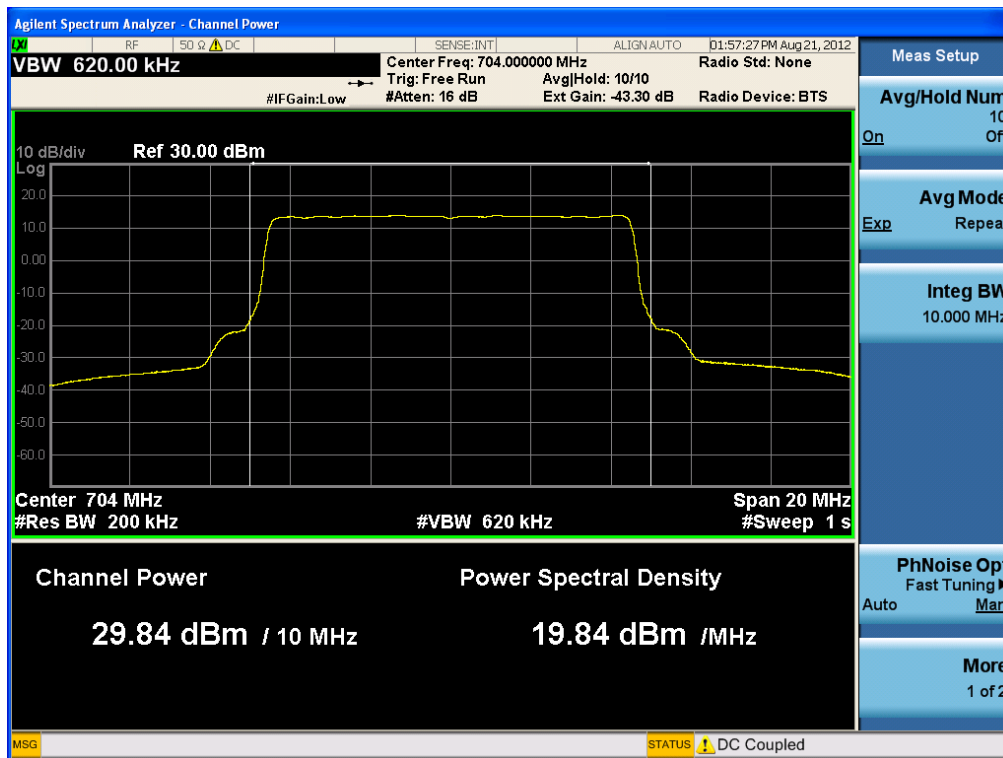

[LTE Uplink C_10 MHz]

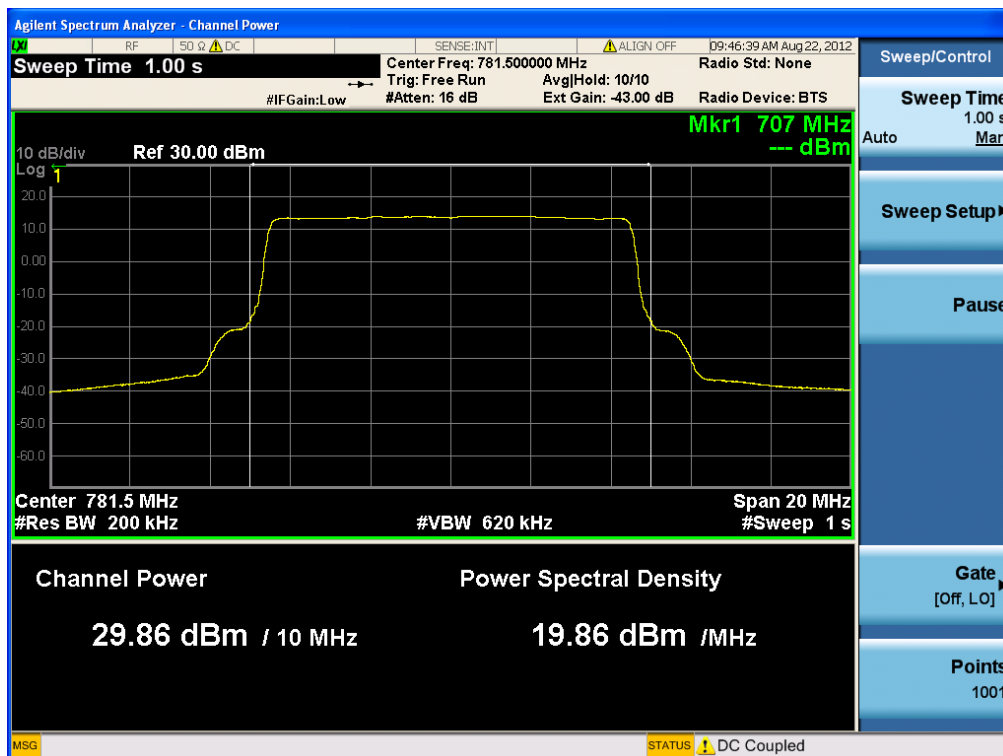

FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1208FR39-1	Date of Issue: September 12, 2012	EUT Type: REPEATER	FCC ID: N52-AXM700-9543	Page 13 of 49

6. OCCUPIED BANDWIDTH

Test Requirement(s): § 2.1049 Measurements required: Occupied bandwidth:

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured under the specified conditions of § 2.1049 (a) through (i) as applicable.

Test Procedures: As required by 47 CFR 2.1049, *occupied bandwidth measurements* were made with a Spectrum Analyzer connected to the RF ports for both Uplink and Downlink. The modulation characteristics of signal generator's carrier was measured first at a maximum RF level prescribed by the OEM. The signal generator was then connected to either the Uplink or Downlink input at the appropriate RF level. The resulting modulated signal through the EUT was measured and compared against the original signal.

Test Results: The EUT complies with the requirements of this section.

Input Signal	Modulation	Input Level (dBm)	Maximum Amp Gain
LTE	QPSK, 16QAM, 64QAM	DL : -52 dBm UL : -65 dBm	DL : 95 dB UL : 82 dB

[Downlink Output]

Band	Bandwidth	Frequency (MHz)	Occupied Bandwidth (MHz)
A	5 MHz	731	4.4982
B		737	4.4994
A&B	10 MHz	734	8.9701
C		751.5	8.9785

[Downlink Input]

Band	Bandwidth	Frequency (MHz)	Occupied Bandwidth (MHz)
A	5 MHz	731	4.4982
B		737	4.4982
A&B	10 MHz	734	8.9809
C		751.5	8.9811

[Uplink Output]


Band	Bandwidth	Frequency (MHz)	Occupied Bandwidth (MHz)
A	5 MHz	701	4.4925
B		707	4.4969
A&B	10 MHz	704	8.9719
C		781.5	8.9642

[Uplink Input]


Band	Bandwidth	Frequency (MHz)	Occupied Bandwidth (MHz)
A	5 MHz	701	4.5186
B		707	4.5185
A&B	10 MHz	704	9.0704
C		781.5	9.0764

Plots of Occupied Bandwidth

[Output LTE Downlink A_5 MHz]

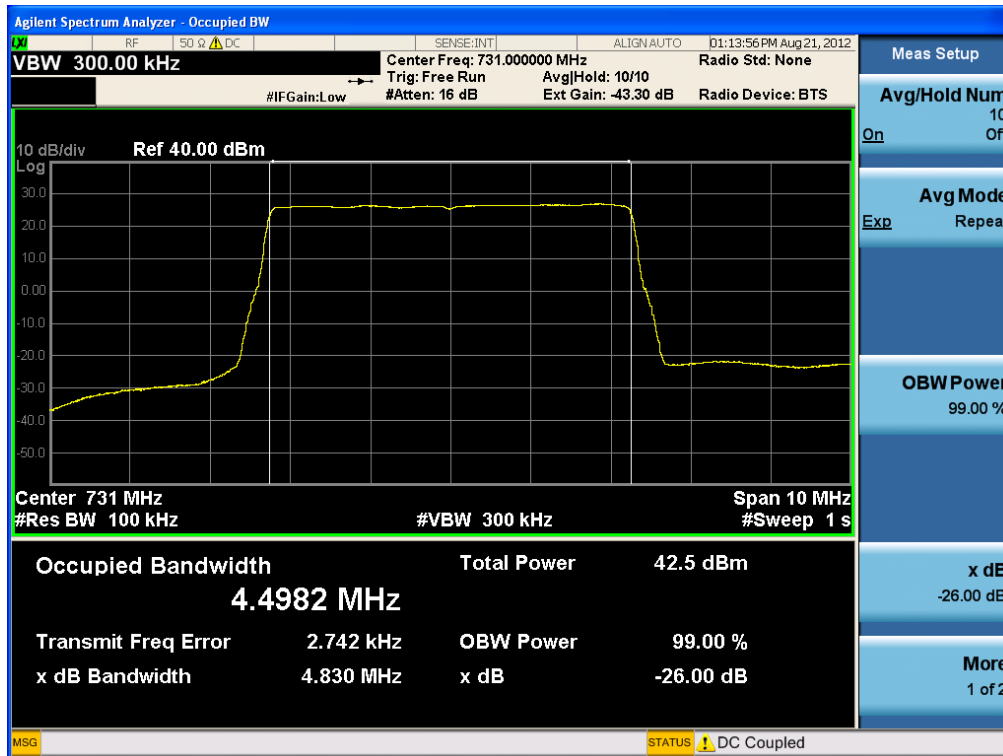


[Output LTE Downlink B_5 MHz]

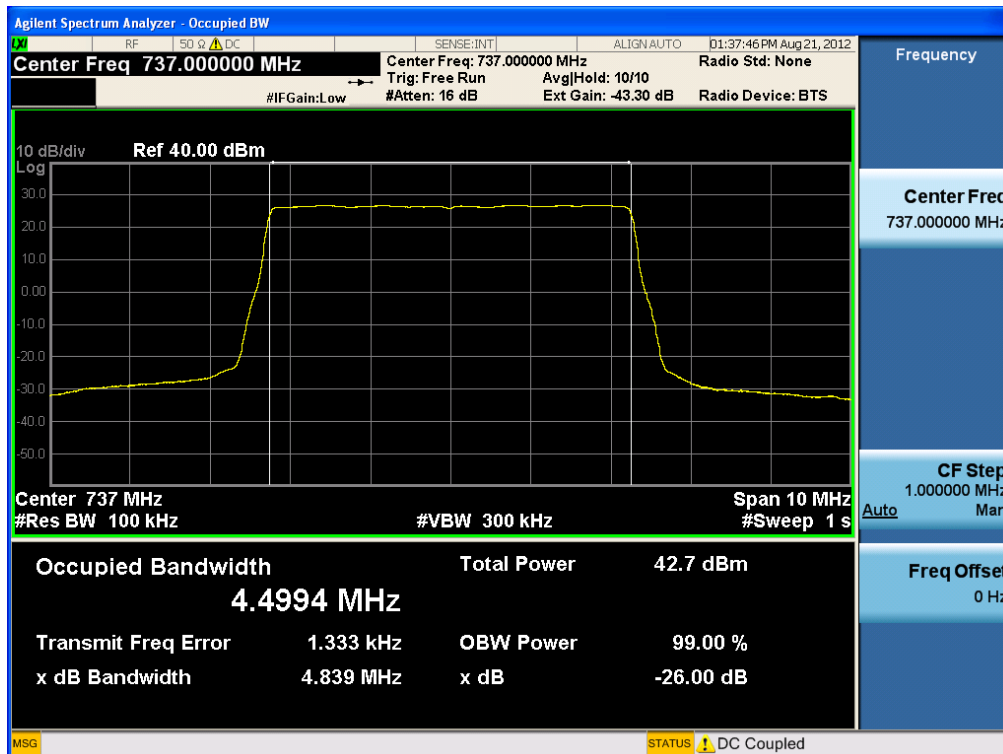


FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1208FR39-1	Date of Issue: September 12,2012	EUT Type: REPEATER	FCC ID: N52-AXM700-9543	Page 17 of 49

[Output LTE Downlink A&B_10 MHz]

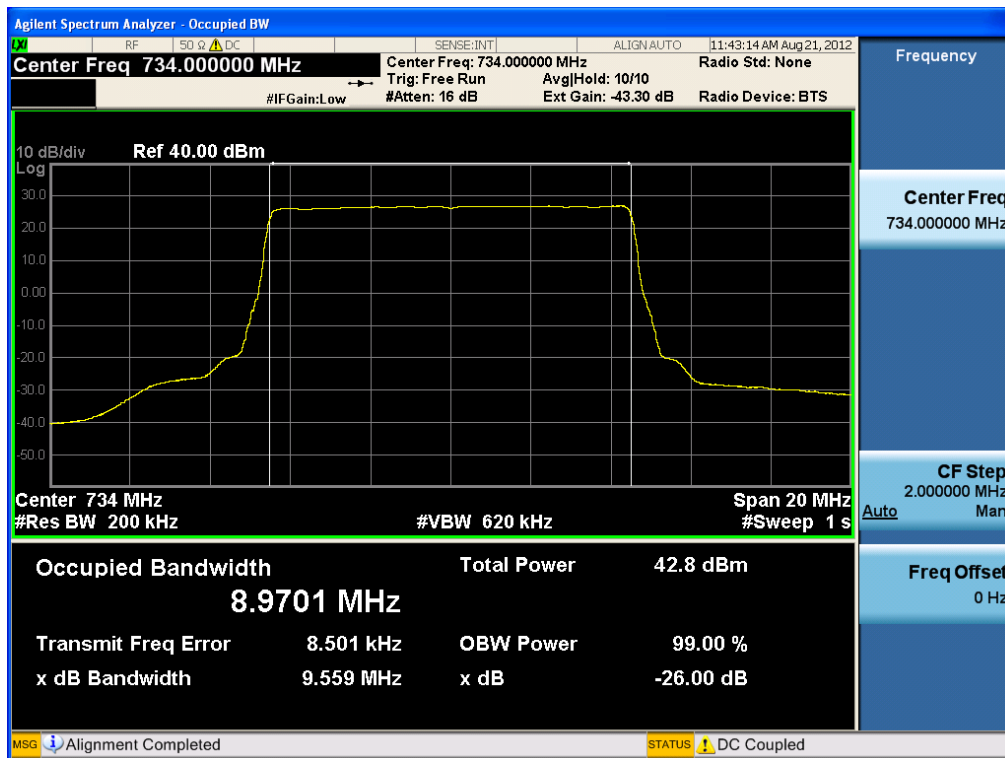


[Output LTE Downlink C_10 MHz]

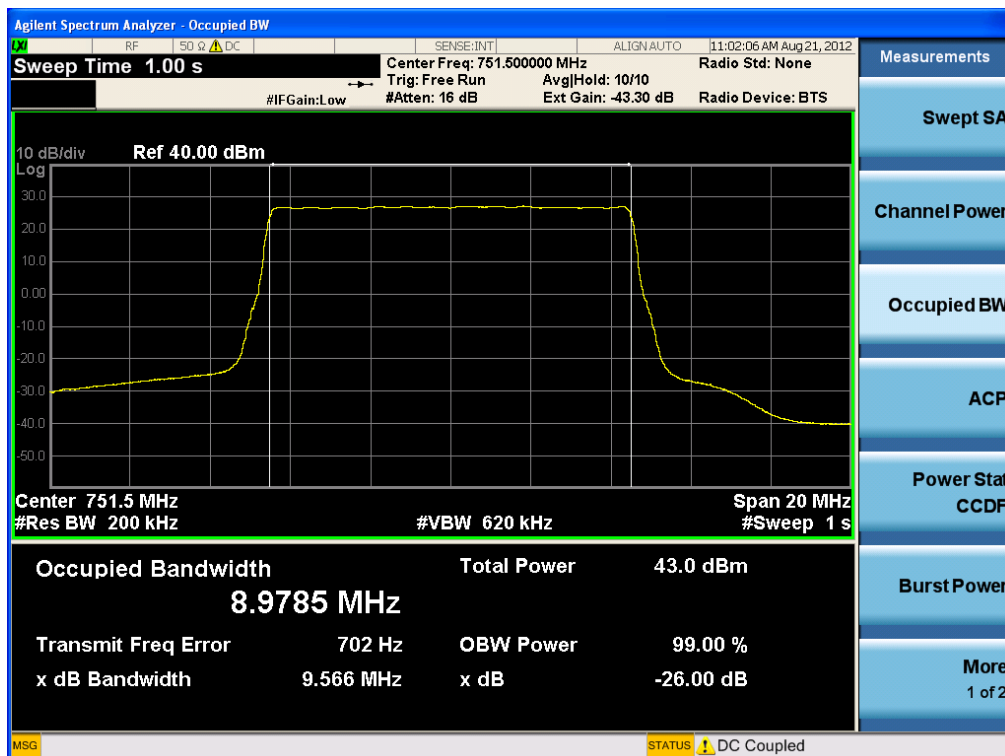


FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1208FR39-1	Date of Issue: September 12,2012	EUT Type: REPEATER	FCC ID: N52-AXM700-9543	Page 18 of 49

[Input LTE Downlink A_5 MHz]

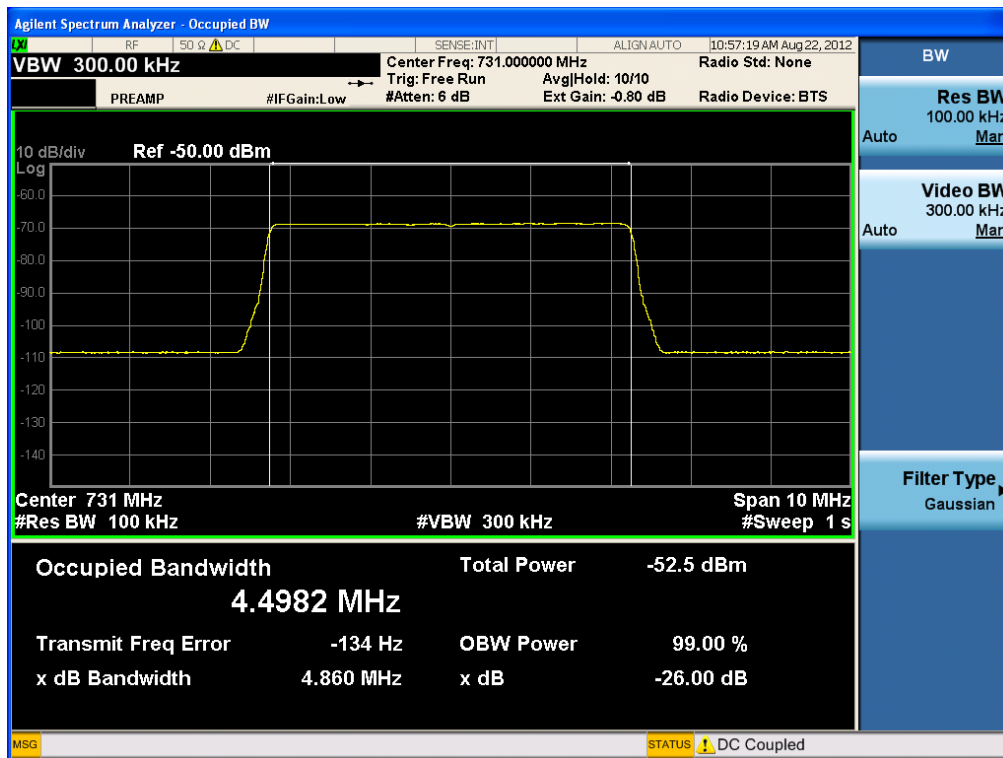


[Input LTE Downlink B_5 MHz]

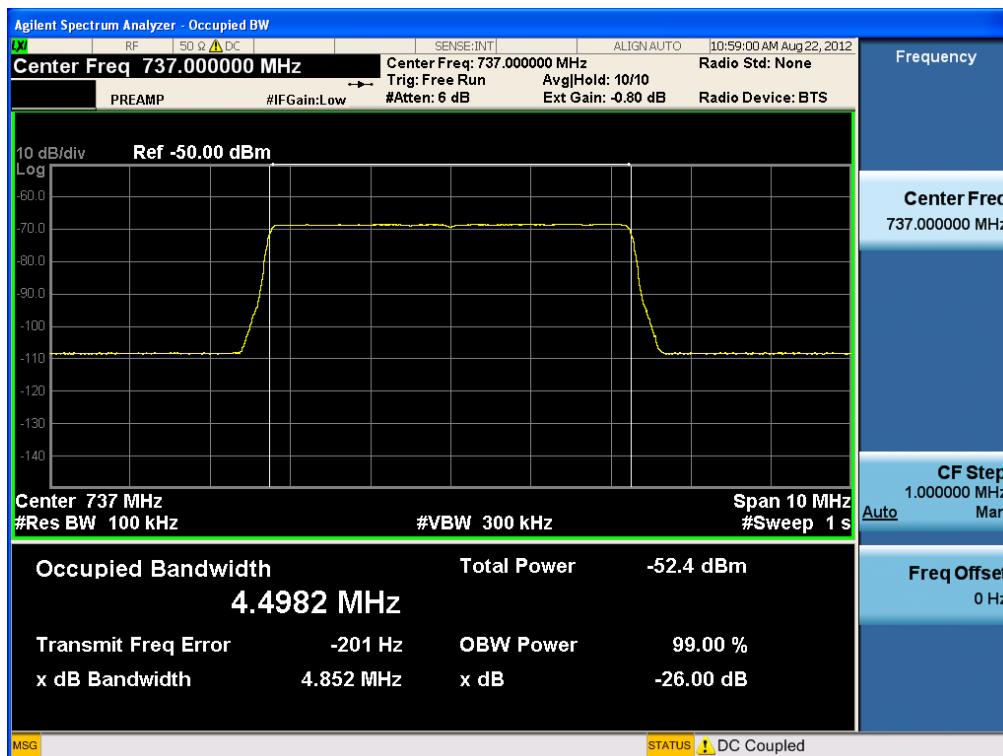


FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1208FR39-1	Date of Issue: September 12, 2012	EUT Type: REPEATER	FCC ID: N52-AXM700-9543	Page 19 of 49

[Input LTE Downlink A&B_10 MHz]

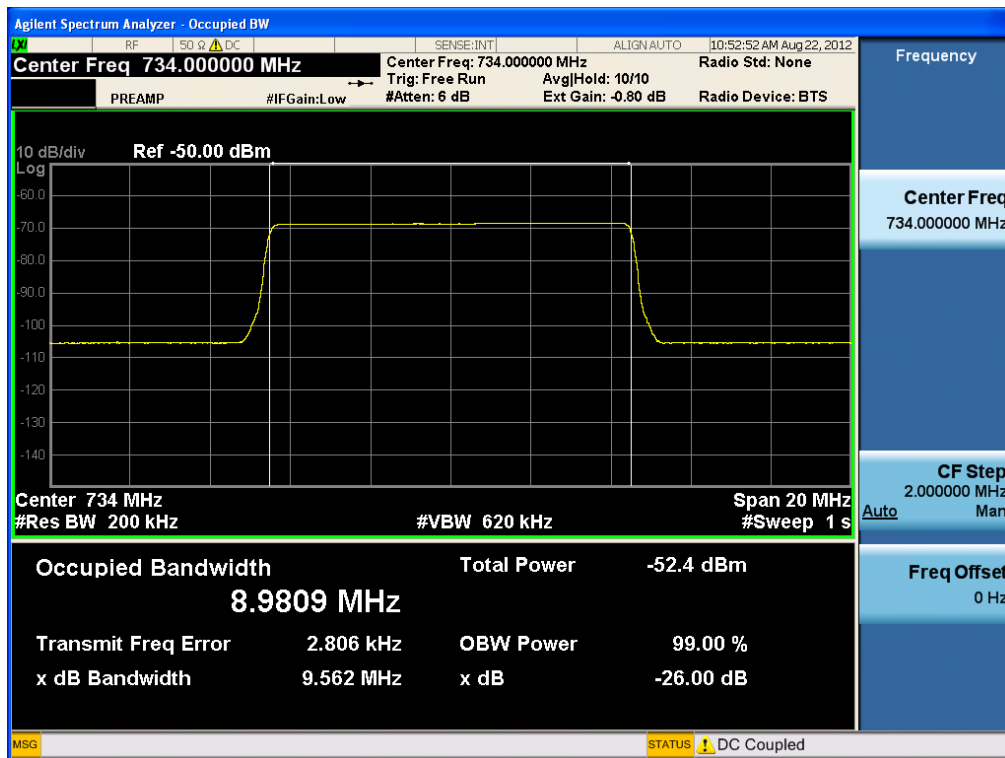


[Input LTE Downlink C_10 MHz]

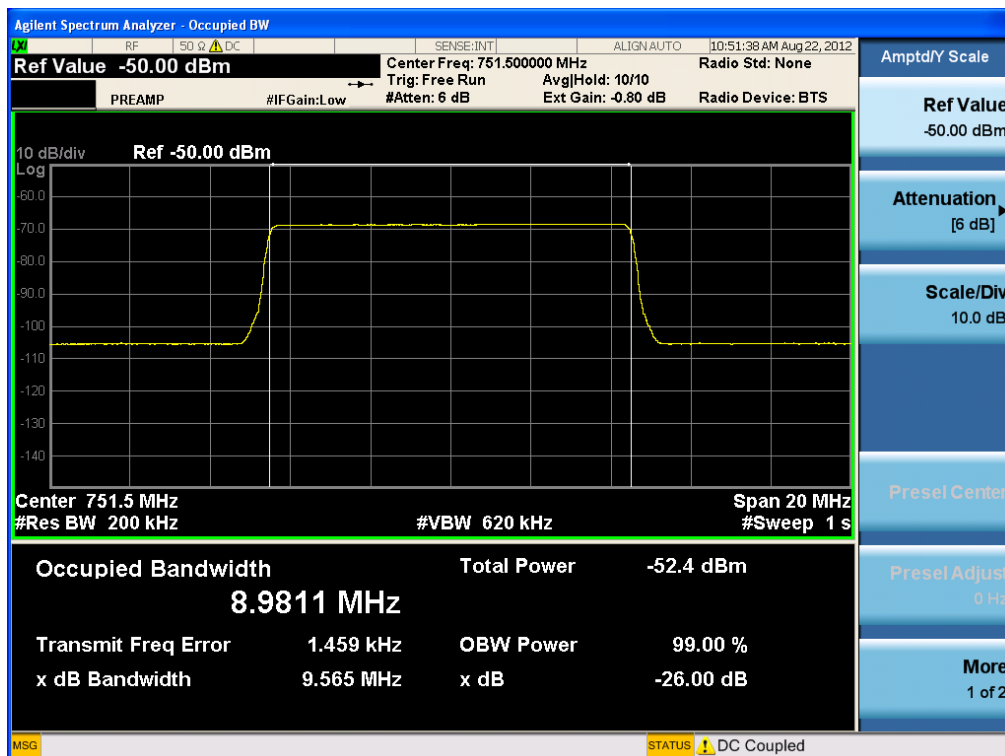


FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1208FR39-1	Date of Issue: September 12,2012	EUT Type: REPEATER	FCC ID: N52-AXM700-9543	Page 20 of 49

[Output LTE Uplink A_5 MHz]

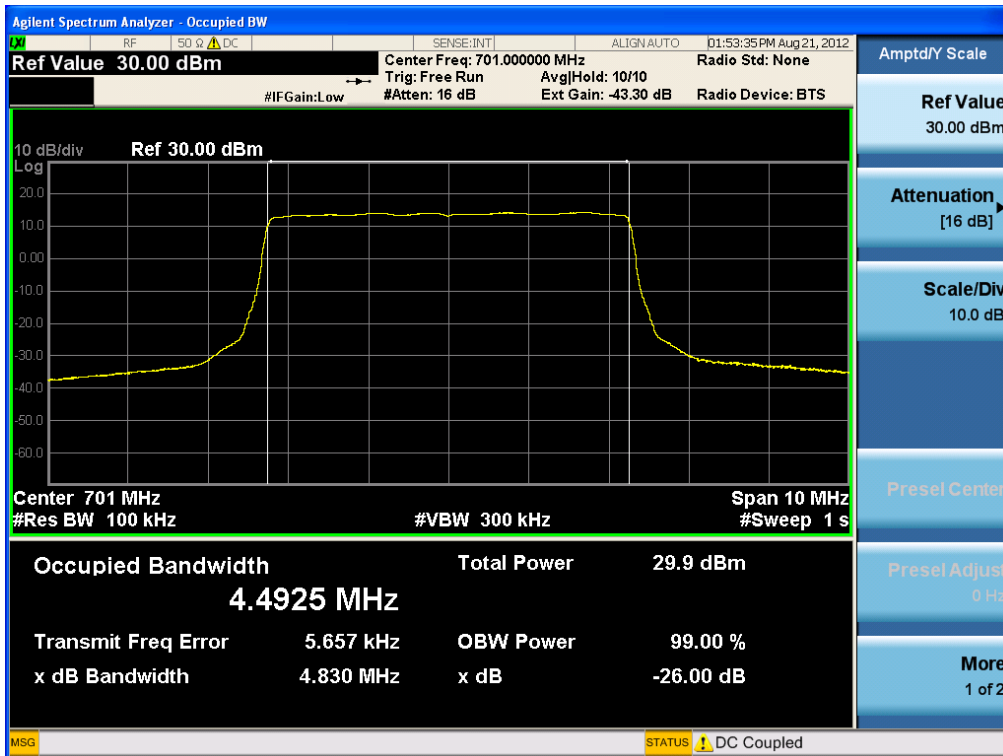


[Output LTE Uplink B_5 MHz]

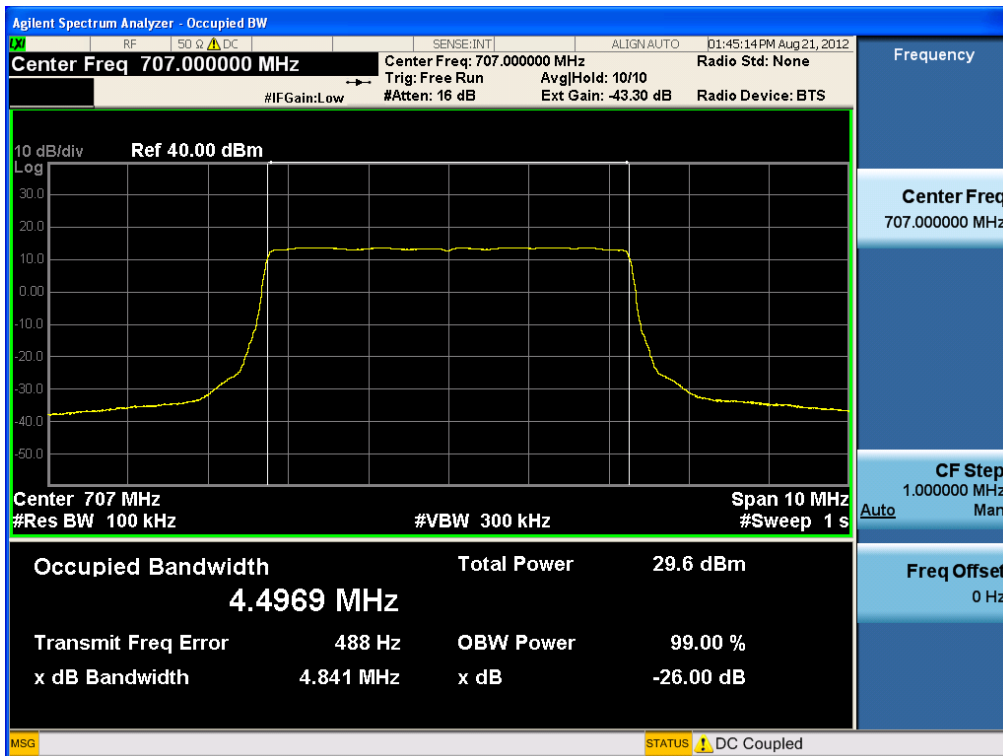


FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1208FR39-1	Date of Issue: September 12, 2012	EUT Type: REPEATER	FCC ID: N52-AXM700-9543	Page 21 of 49

[Output LTE Uplink A&B_10 MHz]

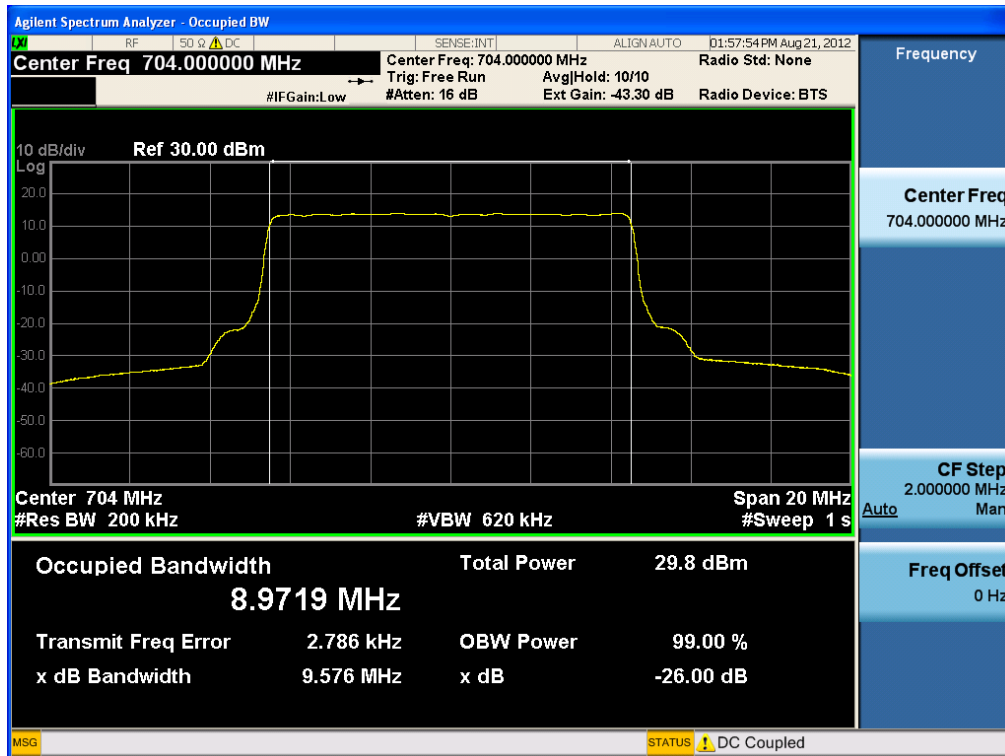


[Output LTE Uplink C_10 MHz]

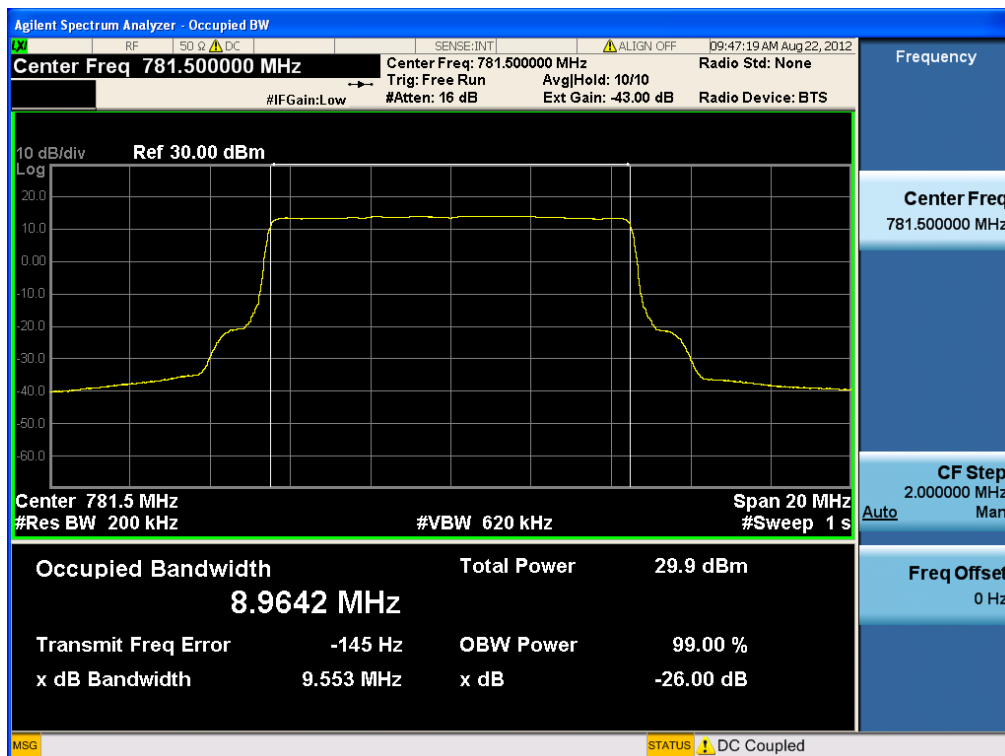


FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1208FR39-1	Date of Issue: September 12, 2012	EUT Type: REPEATER	FCC ID: N52-AXM700-9543	Page 22 of 49

[Input LTE Uplink A_5 MHz]

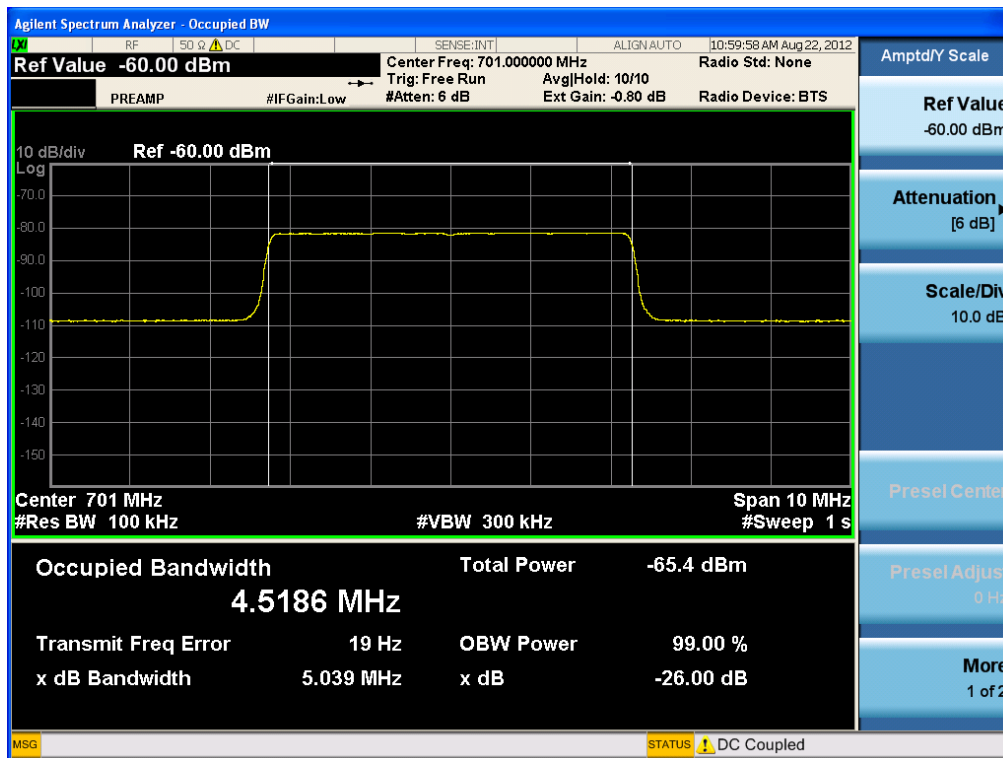


[Input LTE Uplink B_5 MHz]

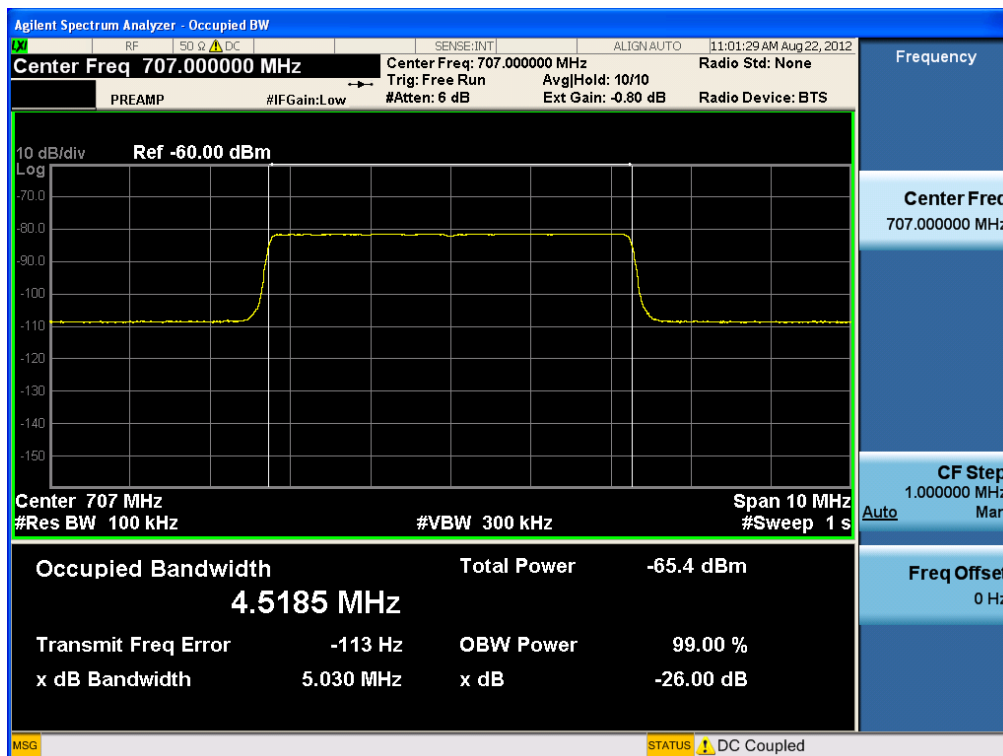


FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1208FR39-1	Date of Issue: September 12, 2012	EUT Type: REPEATER	FCC ID: N52-AXM700-9543	Page 23 of 49

[Input LTE Uplink A&B_10 MHz]

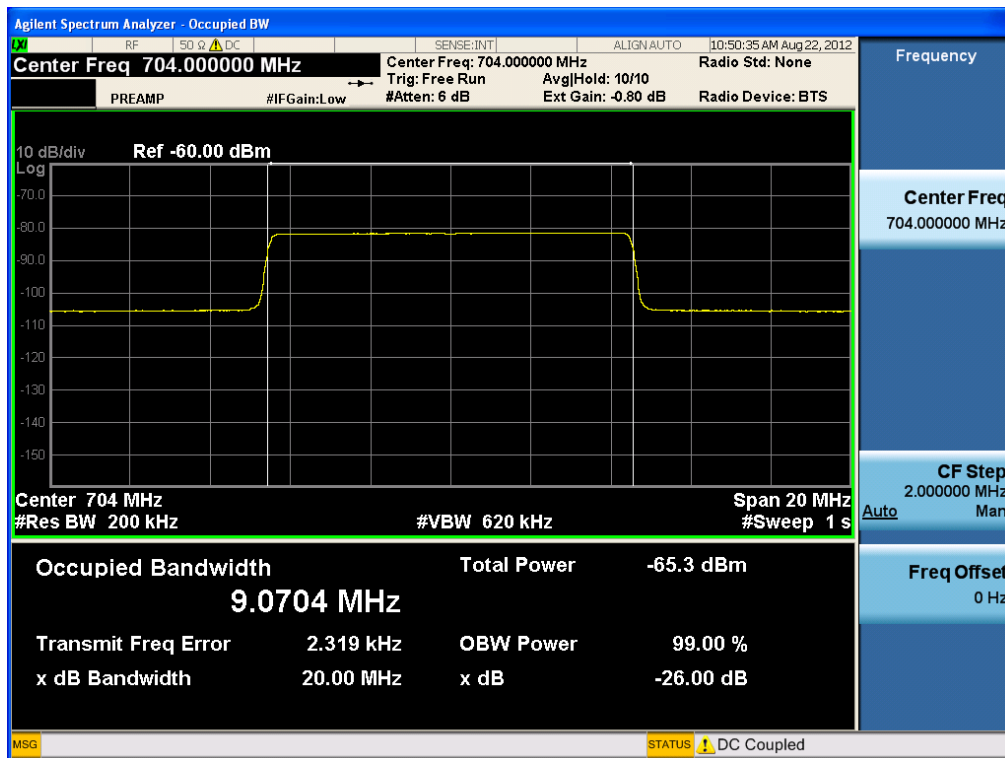

[Input LTE Uplink C_10 MHz]

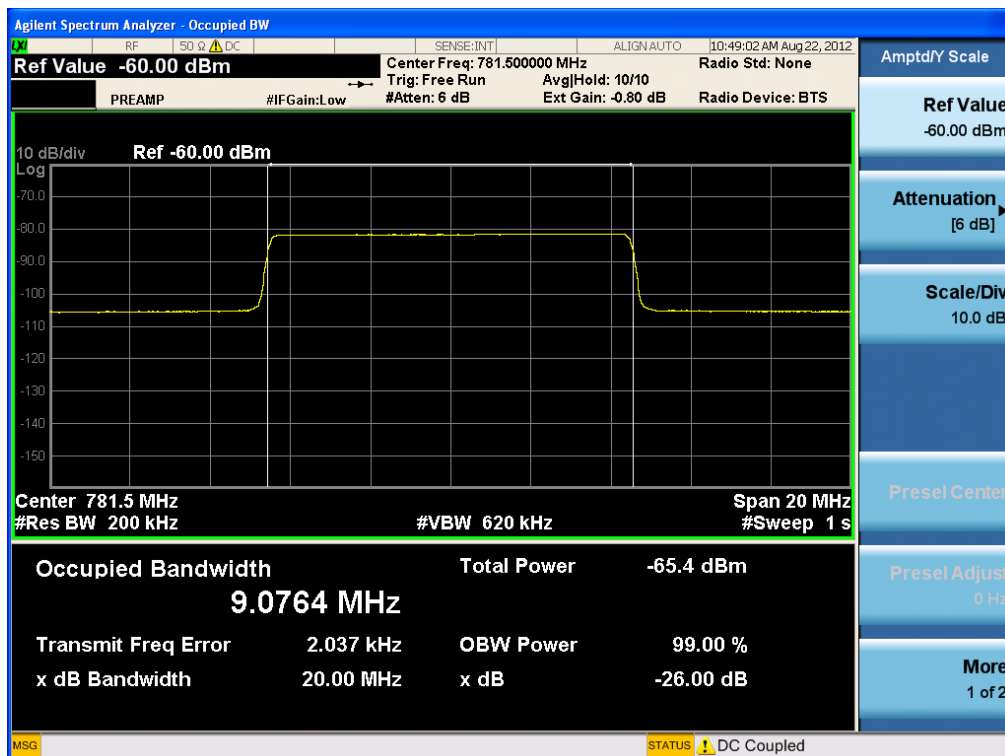

FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1208FR39-1	Date of Issue: September 12,2012	EUT Type: REPEATER	FCC ID: N52-AXM700-9543	Page 24 of 49

7. SPURIOUS AND HARMONIC EMISSION AT ANTENNA TERMINAL

Test Requirement(s): § 2.1051 Measurements required: Spurious emissions at antenna terminals:

The radio frequency voltage or powers generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of each harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in § 2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.

§ 27.53 Emission limits

(c) For operations in the 746–758 MHz band and the 776–788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(1) On any frequency outside the 746–758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;

(2) On any frequency outside the 776–788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;

(3) On all frequencies between 763–775 MHz and 793–805 MHz, by a factor not less than $76 + 10 \log (P)$ dB in a 6.25 kHz band segment, for base and fixed stations;

Test Procedures: A modulated carrier generated by the signal generator carrier was connected to either the Uplink or Downlink RF port at a maximum level as determined by the spectrum analyzer was connected to either the Uplink or Downlink port depending on the circuitry being measured.

The spectrum was investigated from 30 MHz to the 26.5 GHz of the carrier.

Test Results: The EUT complies with the requirements of this section. There were no detectable Spurious emissions for this EUT.

FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1208FR39-1	Date of Issue: September 12, 2012	EUT Type: REPEATER	FCC ID: N52-AXM700-9543	Page 25 of 49

Plots of BAND EDGE

[LTE Downlink A&B_10 MHz]




[LTE Downlink C_10 MHz]




FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1208FR39-1	Date of Issue: September 12,2012	EUT Type: REPEATER	FCC ID: N52-AXM700-9543	Page 26 of 49

[LTE Uplink A&B_10 MHz]

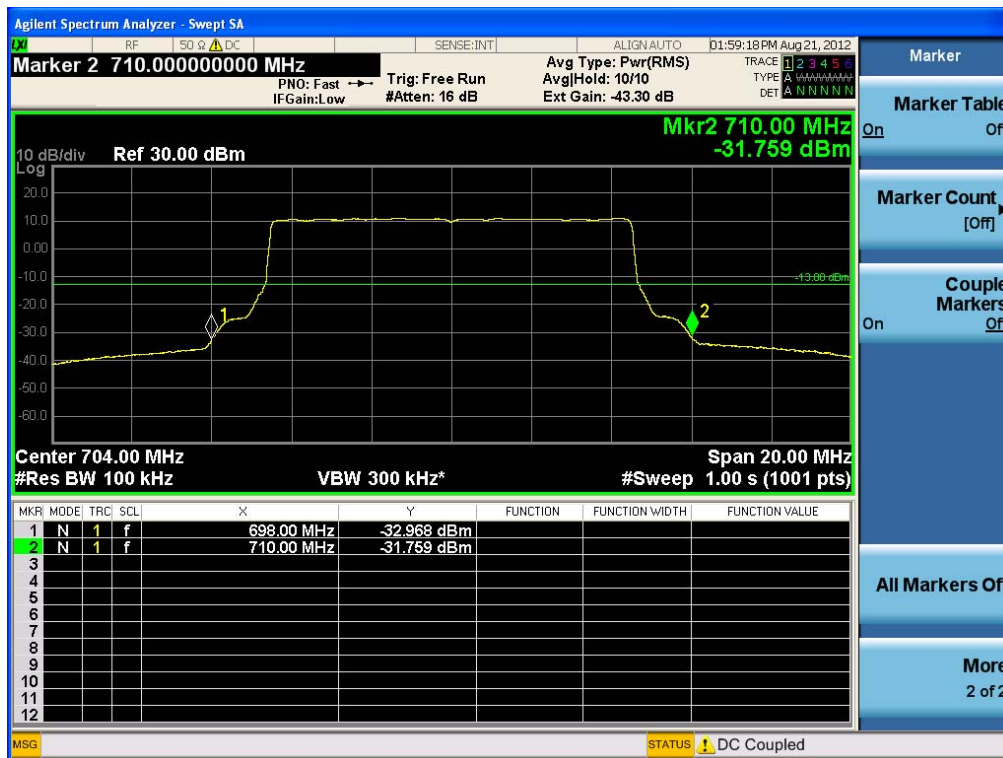

[LTE Uplink C_10 MHz]

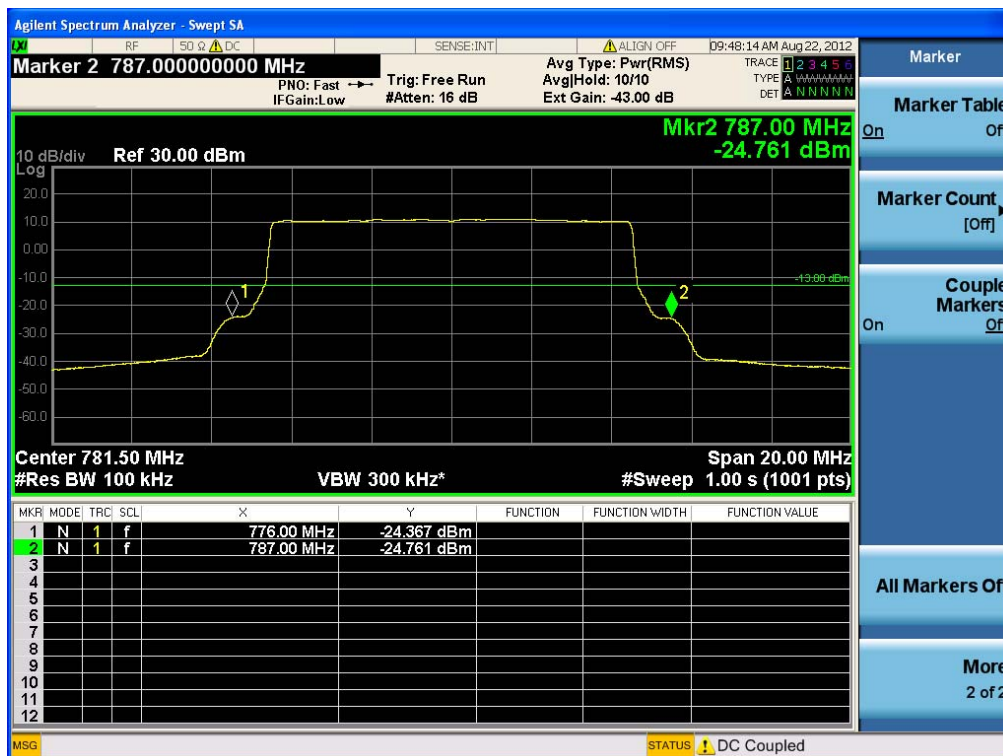


FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1208FR39-1	Date of Issue: September 12,2012	EUT Type: REPEATER	FCC ID: N52-AXM700-9543	Page 27 of 49


Plots of Spurious Emission

Conducted Spurious Emissions (30 MHz – 1 GHz)

[LTE Downlink A_5 MHz]

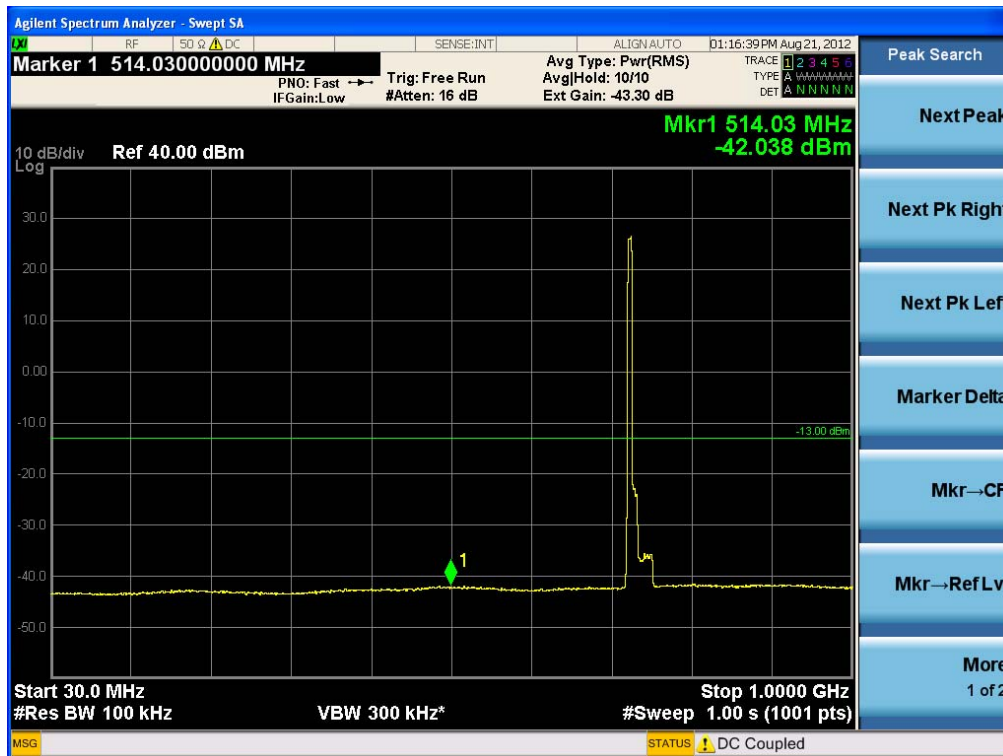


[LTE Downlink B_5 MHz]

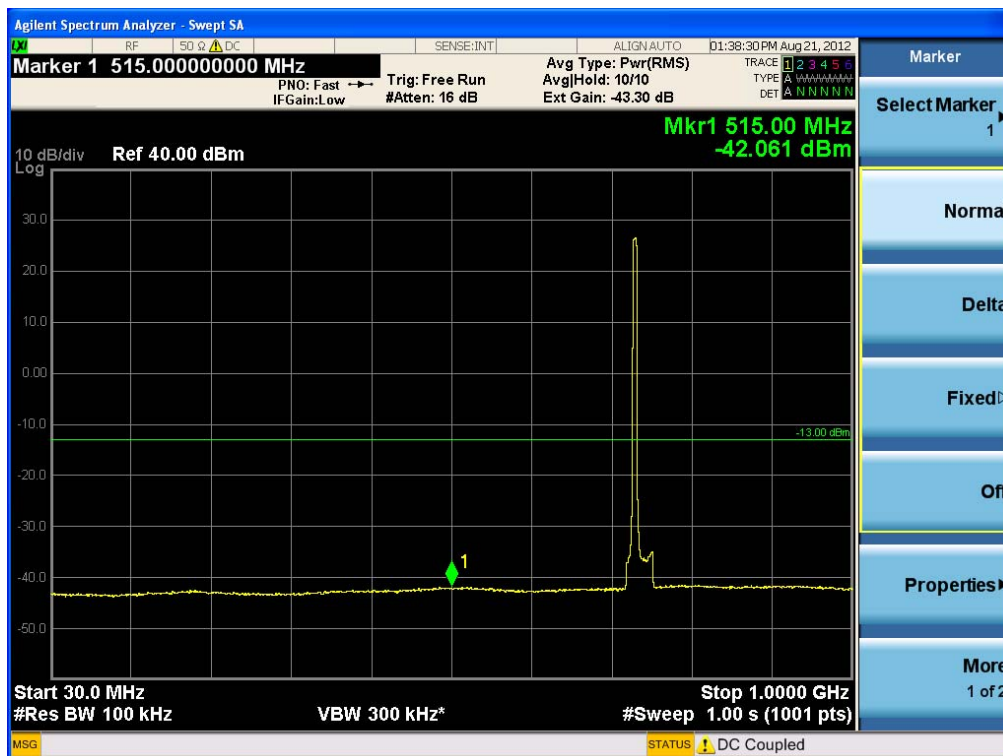


FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1208FR39-1	Date of Issue: September 12, 2012	EUT Type: REPEATER	FCC ID: N52-AXM700-9543	Page 28 of 49

[LTE Downlink A&B_10 MHz]

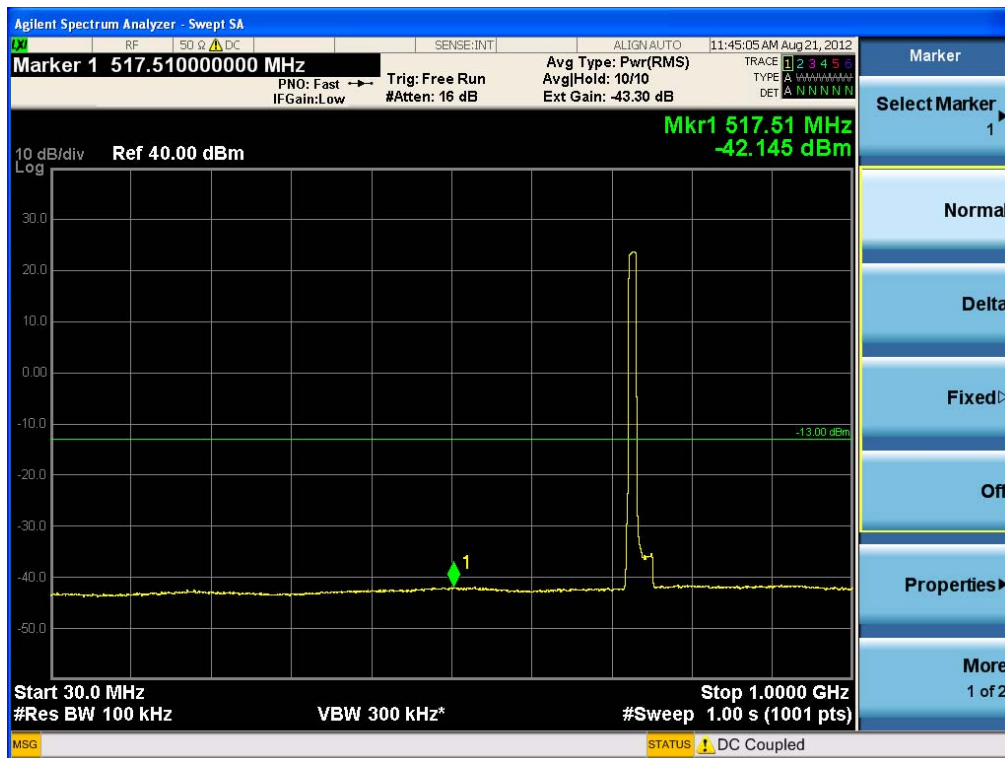


[LTE Downlink C_10 MHz]

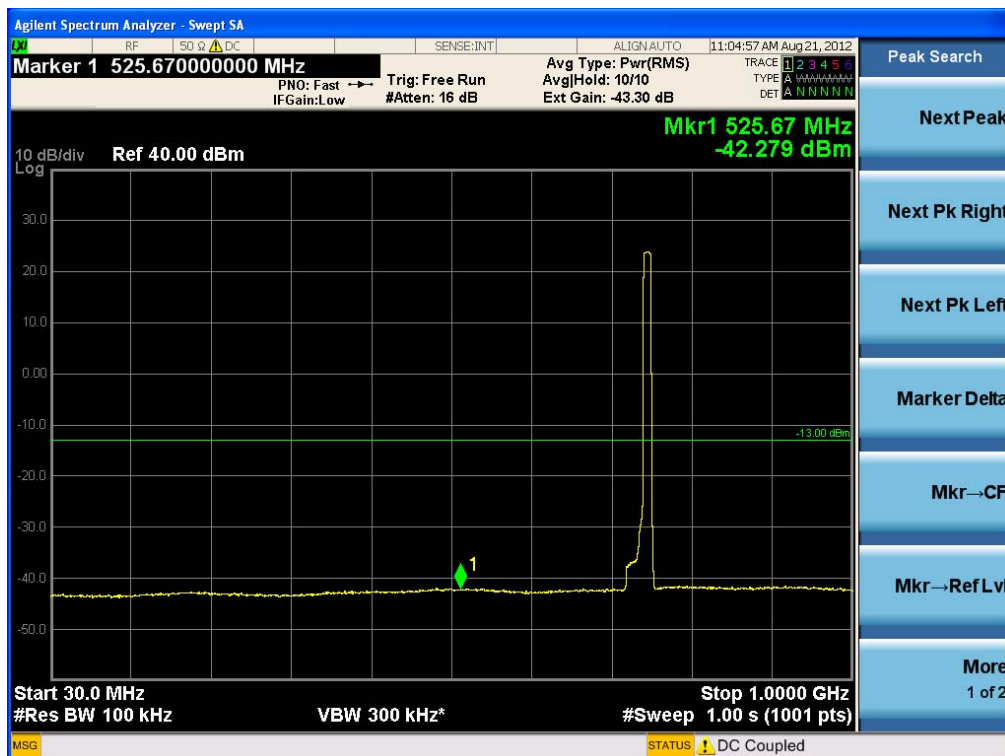


FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1208FR39-1	Date of Issue: September 12,2012	EUT Type: REPEATER	FCC ID: N52-AXM700-9543	Page 29 of 49

[LTE Uplink A_5 MHz]

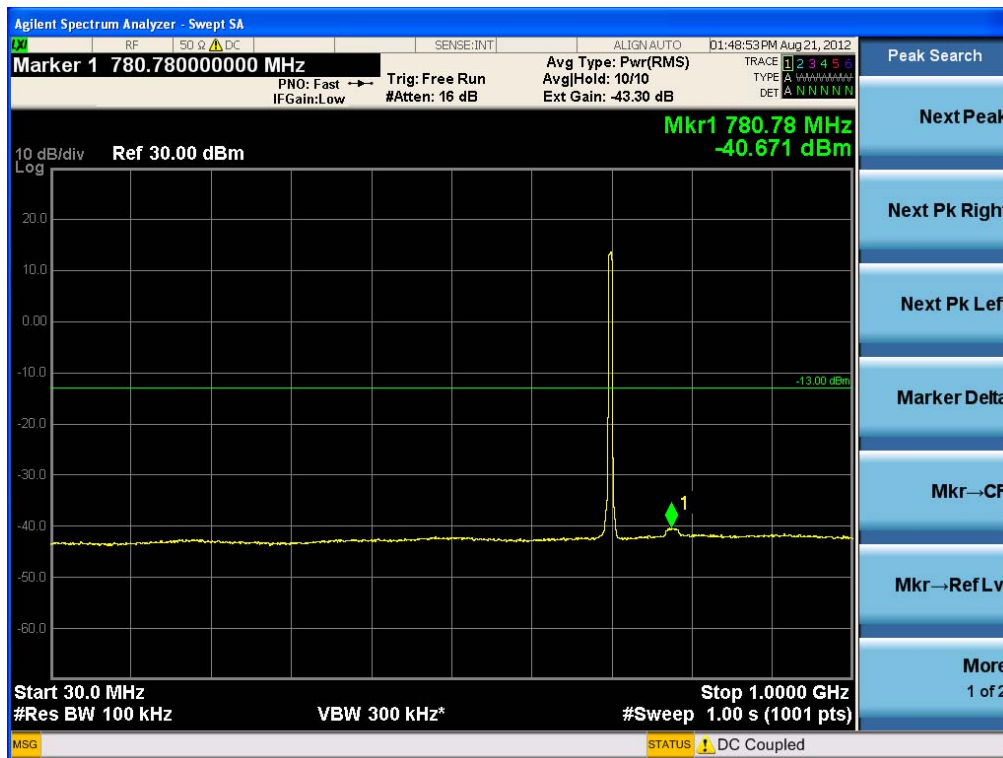


[LTE Uplink B_5 MHz]

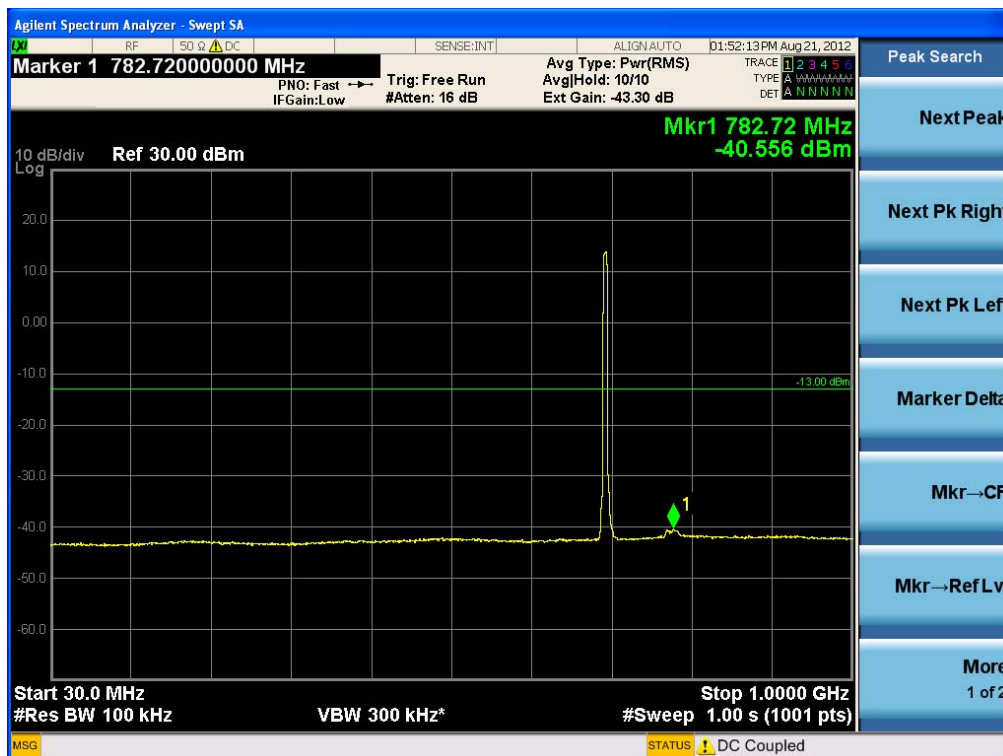


FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1208FR39-1	Date of Issue: September 12,2012	EUT Type: REPEATER	FCC ID: N52-AXM700-9543	Page 30 of 49

[LTE Uplink A&B_10 MHz]

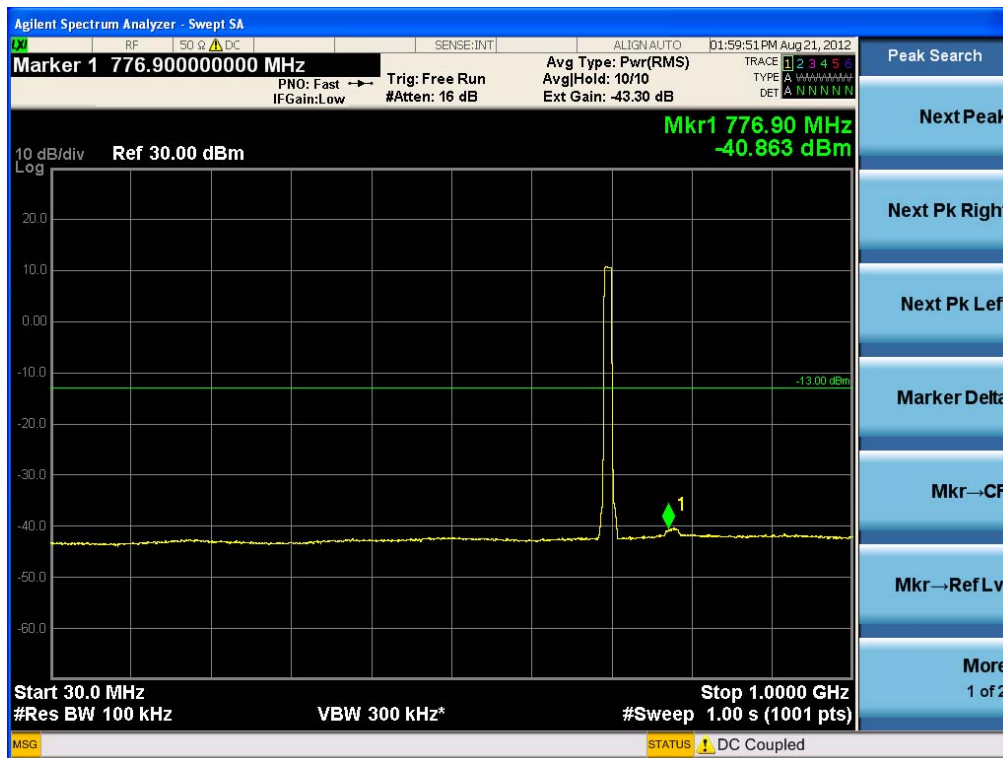

[LTE Uplink C_10 MHz]

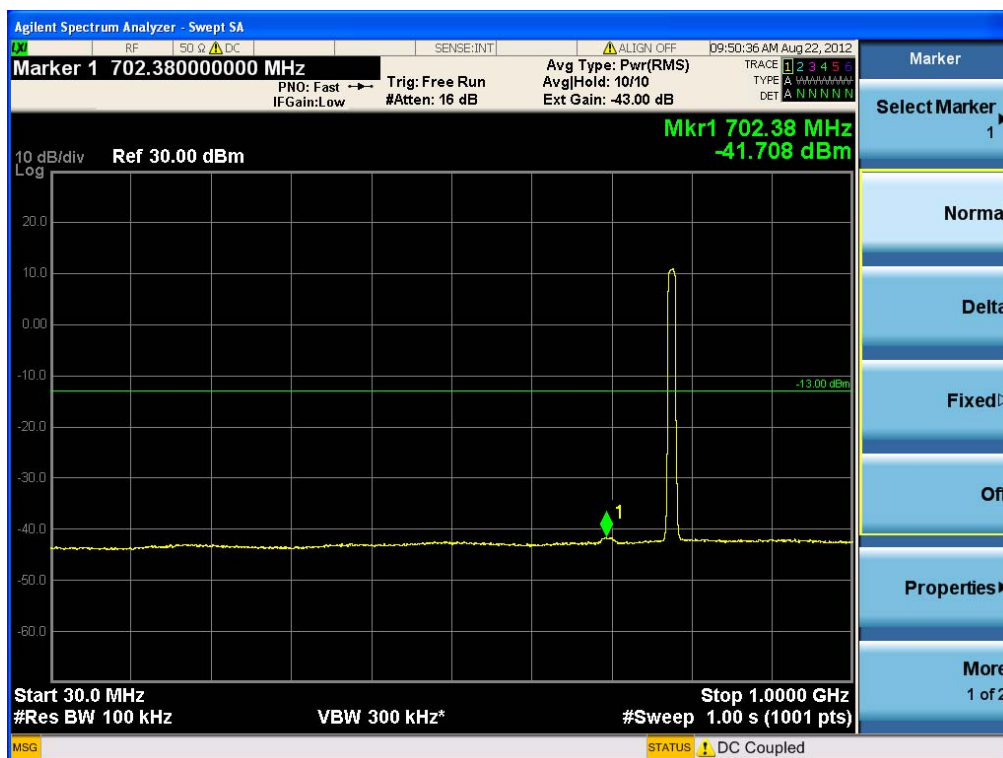

FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1208FR39-1	Date of Issue: September 12,2012	EUT Type: REPEATER	FCC ID: N52-AXM700-9543	Page 31 of 49

Conducted Spurious Emissions (1 GHz –26.5 GHz)

[LTE Downlink A_5 MHz]



[LTE Downlink B_5 MHz]



FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1208FR39-1	Date of Issue: September 12,2012	EUT Type: REPEATER	FCC ID: N52-AXM700-9543	Page 32 of 49

[LTE Downlink A&B_10 MHz]



[LTE Downlink C_10 MHz]



FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1208FR39-1	Date of Issue: September 12,2012	EUT Type: REPEATER	FCC ID: N52-AXM700-9543	Page 33 of 49

[LTE Uplink A_5 MHz]



[LTE Uplink B_5 MHz]



FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1208FR39-1	Date of Issue: September 12,2012	EUT Type: REPEATER	FCC ID: N52-AXM700-9543	Page 34 of 49

[LTE Uplink A&B_10 MHz]



[LTE Uplink C_10 MHz]



FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1208FR39-1	Date of Issue: September 12,2012	EUT Type: REPEATER	FCC ID: N52-AXM700-9543	Page 35 of 49

Conducted Spurious Emissions (763~775: -46 dBm/6.25 kHz)

[LTE Downlink C_10 MHz]




[LTE Uplink C_10 MHz]




FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1208FR39-1	Date of Issue: September 12,2012	EUT Type: REPEATER	FCC ID: N52-AXM700-9543	Page 36 of 49

Conducted Spurious Emissions (793~805: -46 dBm/6.25 kHz)

[LTE Downlink C_10 MHz]

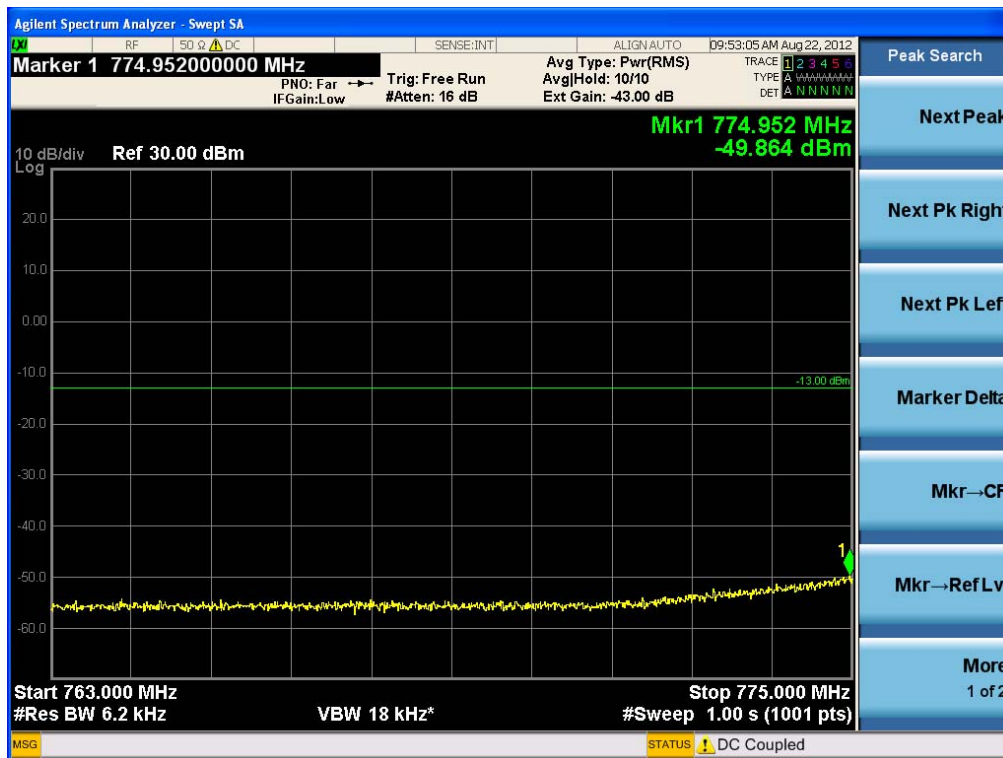


[LTE Uplink C_10 MHz]

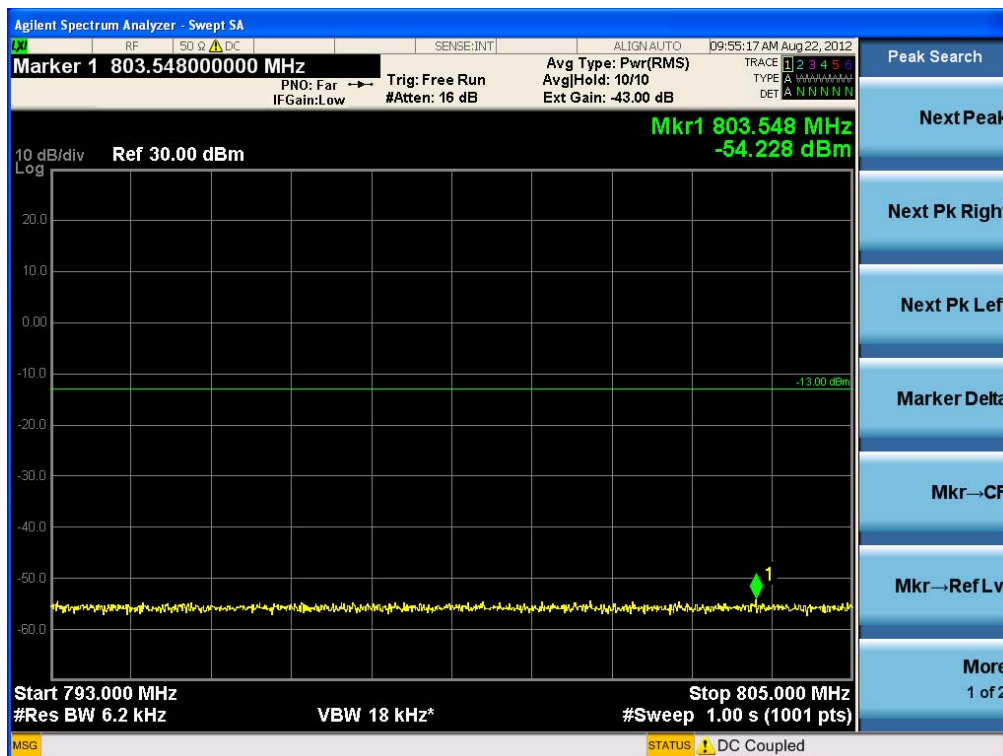


FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1208FR39-1	Date of Issue: September 12, 2012	EUT Type: REPEATER	FCC ID: N52-AXM700-9543	Page 37 of 49

Intermodulation Spurious Emissions

[LTE Downlink A&B_10 MHz]

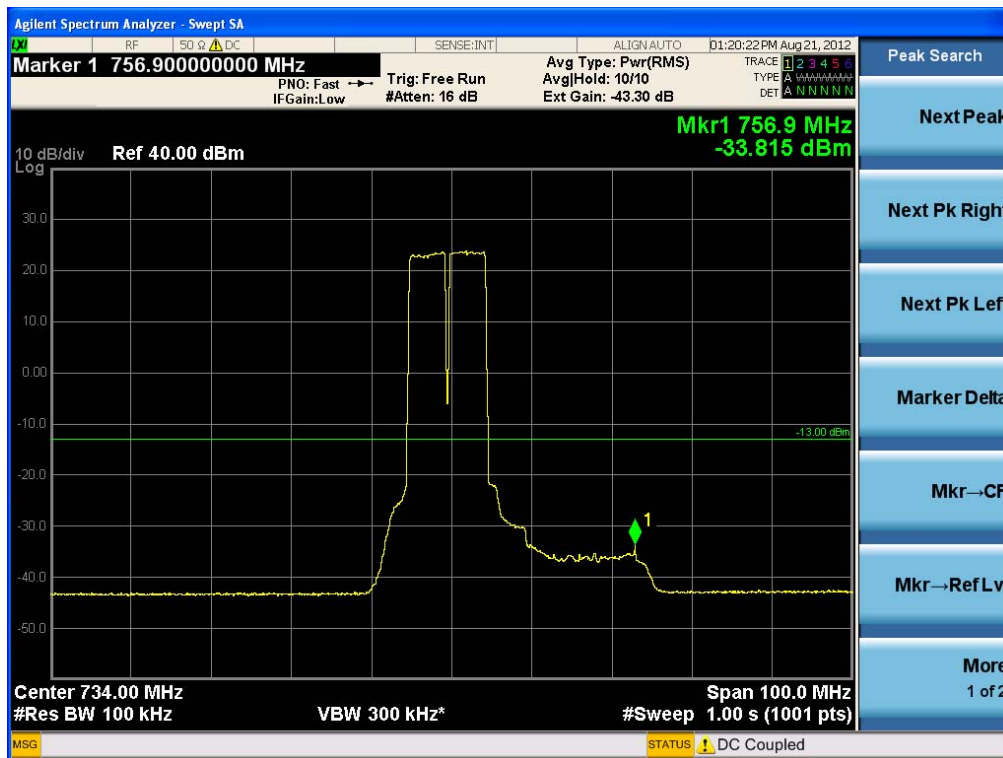


[LTE Downlink C_10 MHz]

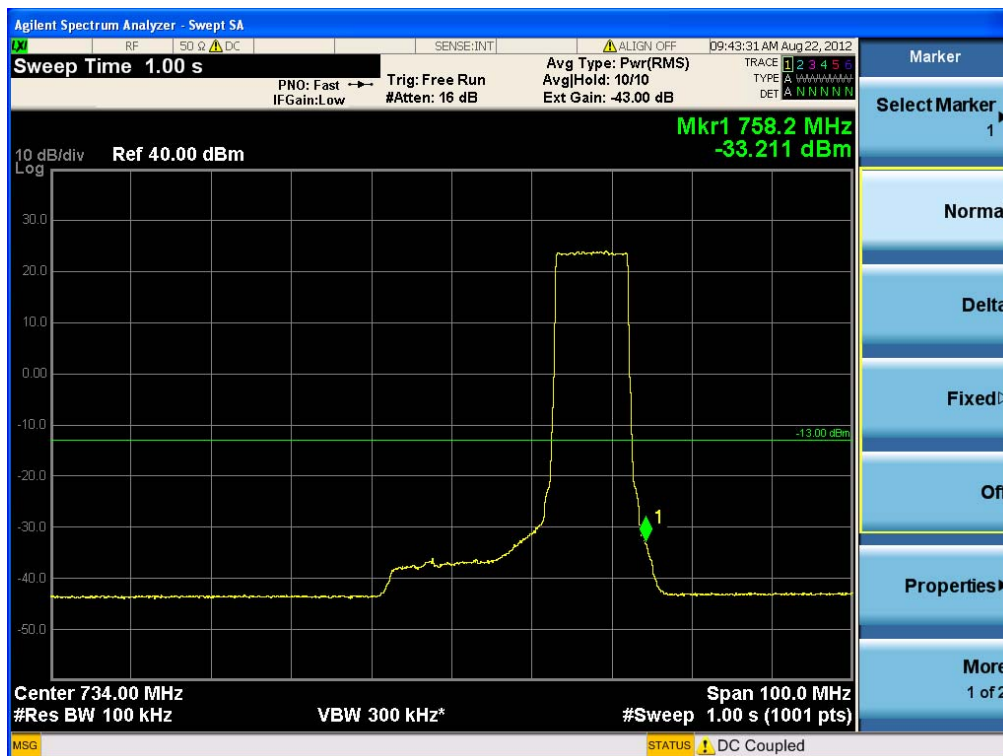


FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1208FR39-1	Date of Issue: September 12, 2012	EUT Type: REPEATER	FCC ID: N52-AXM700-9543	Page 38 of 49

[LTE Uplink A&B_10 MHz]

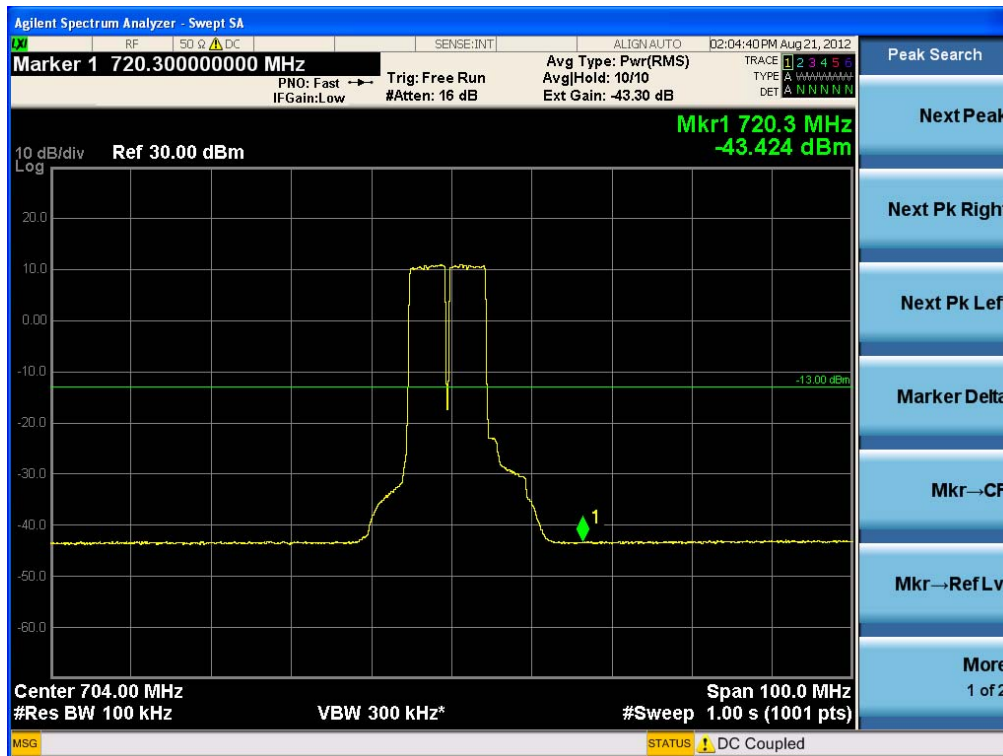


[LTE Uplink C_10 MHz]

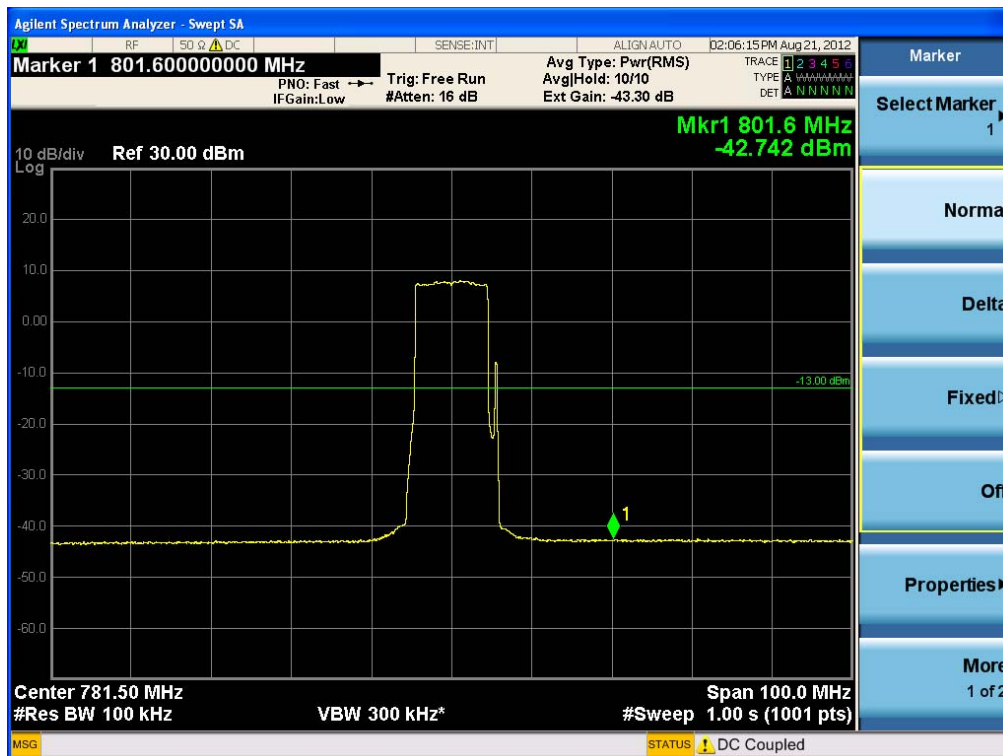


FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1208FR39-1	Date of Issue: September 12,2012	EUT Type: REPEATER	FCC ID: N52-AXM700-9543	Page 39 of 49

Out of Band Rejection

[LTE Downlink 5 MHz A,B Band]

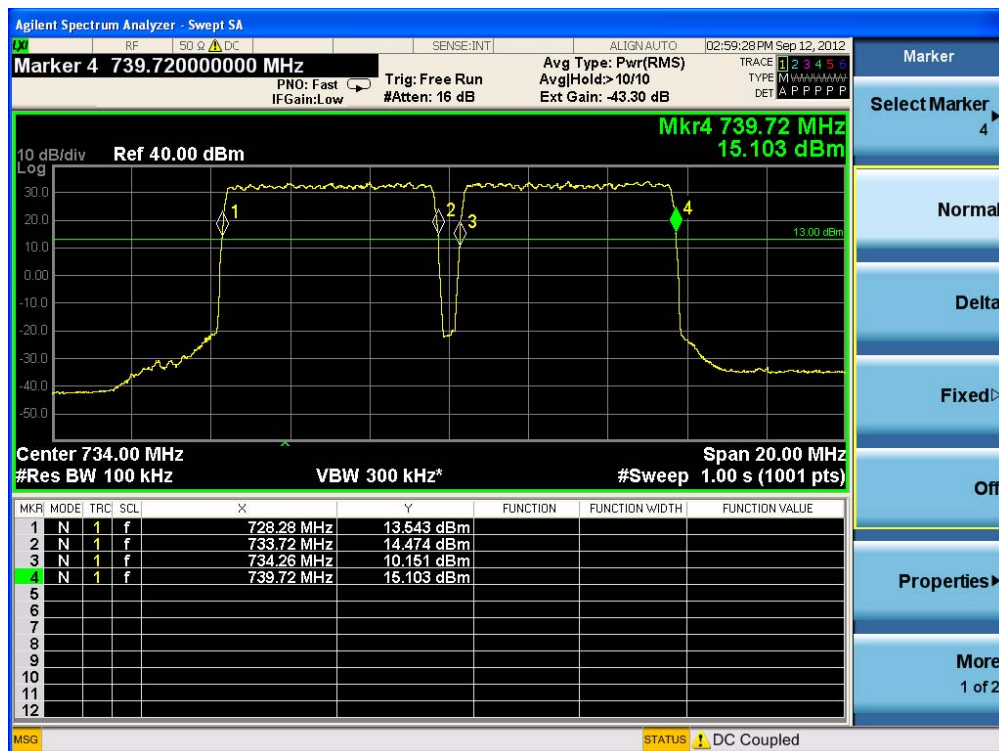


[LTE Downlink 10 MHz A+B,C Band]

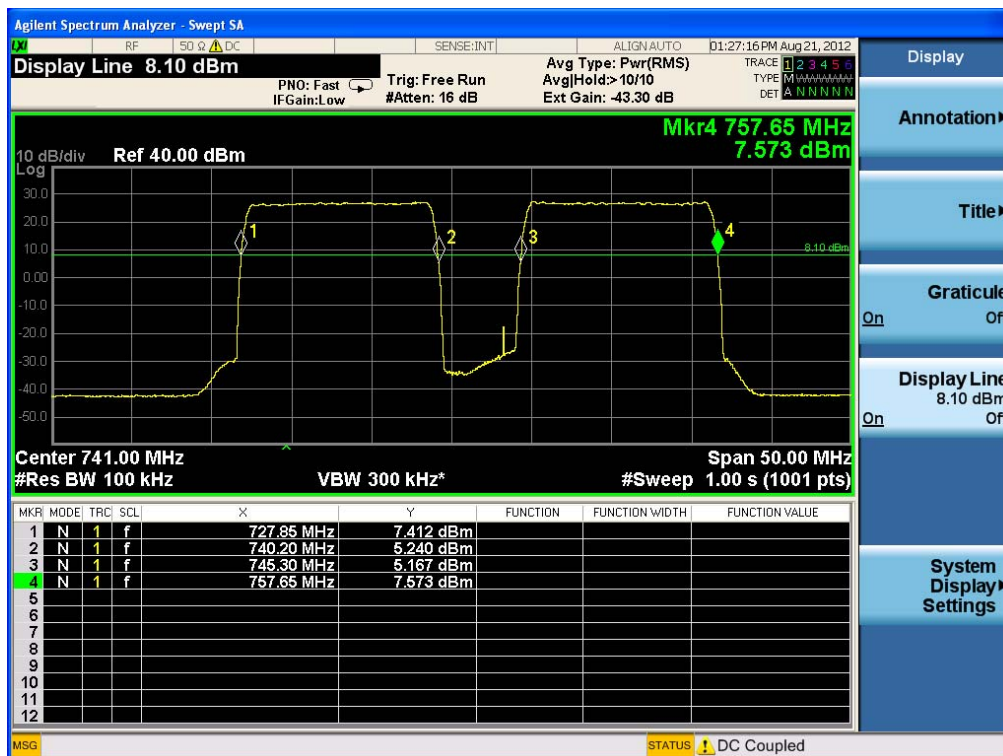


FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1208FR39-1	Date of Issue: September 12,2012	EUT Type: REPEATER	FCC ID: N52-AXM700-9543	Page 40 of 49

[LTE Uplink _5 MHz A,B Band]

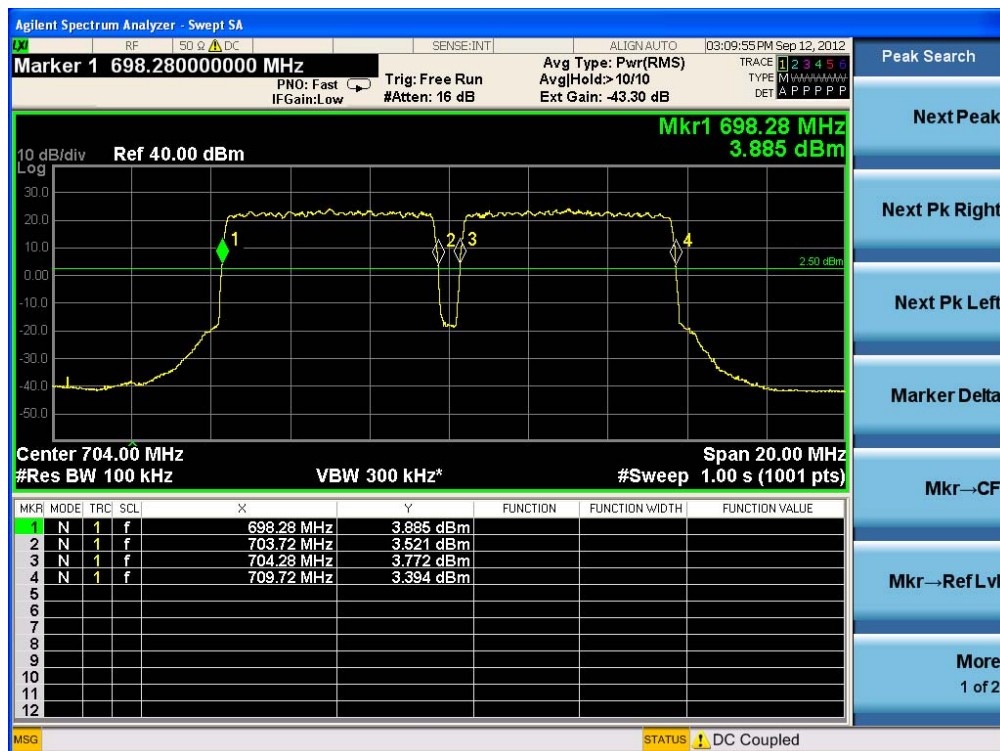

[LTE Uplink _10 MHz A+B,C Band]

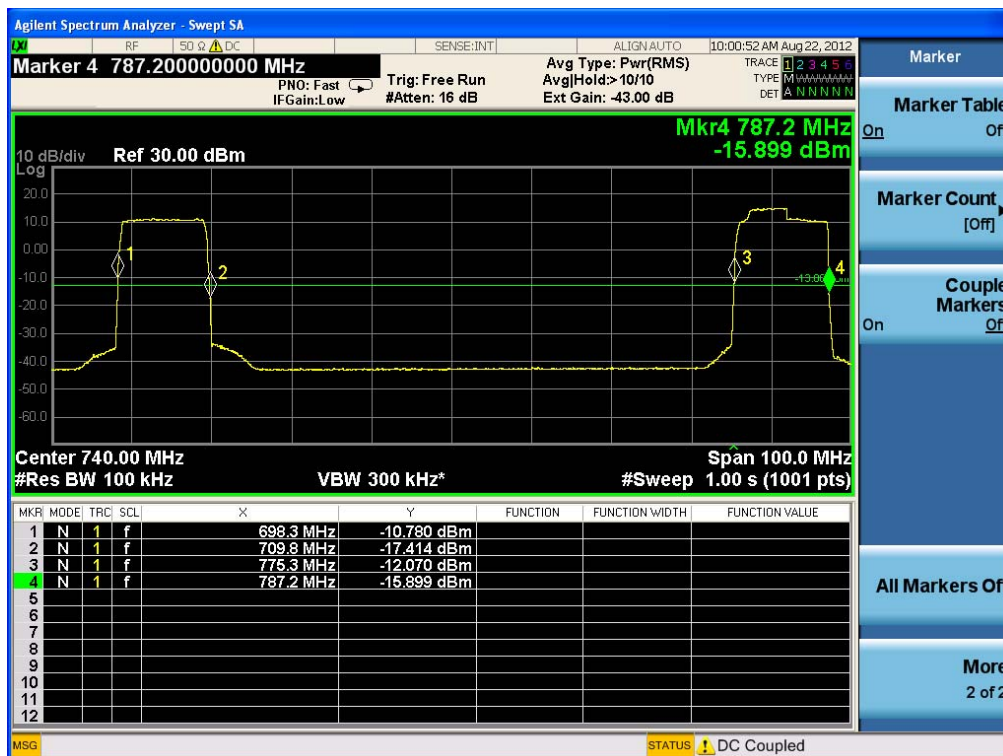

8. FIELD STRENGTH OF SPURIOUS RADIATION

Test Requirement(s): § 2.1053 Measurements required: Field strength of spurious radiation.

§ 2.1053 (a) Measurements shall be made to detect spurious emissions that may be Radiated directly from the cabinet, control circuits, power leads, or intermediate circuit elements under normal conditions of installation and operation. Curves or equivalent data shall be supplied showing the magnitude of each harmonic and other spurious emission. For this test, single sideband, independent sideband, and controlled carrier transmitters shall be modulated under the conditions specified in paragraph (c) of § 2.1049, as appropriate. For equipment operating on frequencies below 890 MHz, an open field test is normally required with the measuring instrument antenna located in the far-field at all test frequencies. In the event it is either impractical or impossible to make open field measurements (e.g. a broadcast transmitter installed in a building) measurements will be accepted of the equipment as installed. Such measurements must be accompanied by a description of the site where the measurements were made showing the location of any possible source of reflections which might distort the field strength measurements. Information submitted shall include the relative radiated power of each spurious emission with reference to the rated power output of the transmitter, assuming all emissions are radiated from half-wave dipole antennas.

§ 2.1053 (b): The measurements specified in paragraph (a) of this section shall be made for the following equipment:

- (1) Those in which the spurious emissions are required to be 60 dB or more below the mean power of the transmitter.
- (2) All equipment operating on frequencies higher than 25 MHz.
- (3) All equipment where the antenna is an integral part of, and attached directly to The transmitter.
- (4) Other types of equipment as required, when deemed necessary by the Commission.

§ 27.53 Emission limit (c) For operations in the 746–758 MHz band and the 776–788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1208FR39-1	Date of Issue: September 12,2012	EUT Type: REPEATER	FCC ID: N52-AXM700-9543	Page 42 of 49

(1) On any frequency outside the 746–758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;

(2) On any frequency outside the 776–788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;

(f) For operations in the 746–763 MHz, 775–793 MHz, and 805–806 MHz bands, emissions in the band 1559–1610 MHz shall be limited to –70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and –80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

Test Procedures: As required by 47 CFR 2.1053, *field strength of radiated spurious measurements* were made in accordance with the procedures of TIA/EIA-603-A-2001 "Land Mobile FM or PM Communications Equipment Measurement and Performance Standards".

Radiated emission measurements were performed inside a 3 meter semi-anechoic chamber.


The EUT was set at a distance of 3m from the receiving antenna. The EUT's RF ports were terminated to 50ohm load. The EUT was set to transmit at the low, mid and high channels of the transmitter frequency range at its maximum power level. The EUT was rotated about 360

and the receiving antenna scanned from 1-3m in order to capture the maximum emission. A calibrated antenna source was positioned in place of the EUT and the previously recorded signal was duplicated. The maximum EIRP of the emission was calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps were carried out with the receiving antenna in both vertical and horizontal polarization. Harmonic emissions up to the 10th or 40GHz, whichever was the lesser, were investigated.

Test Results:

FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1208FR39-1	Date of Issue: September 12,2012	EUT Type: REPEATER	FCC ID: N52-AXM700-9543	Page 43 of 49

Radiated Spurious Emissions Test Setup

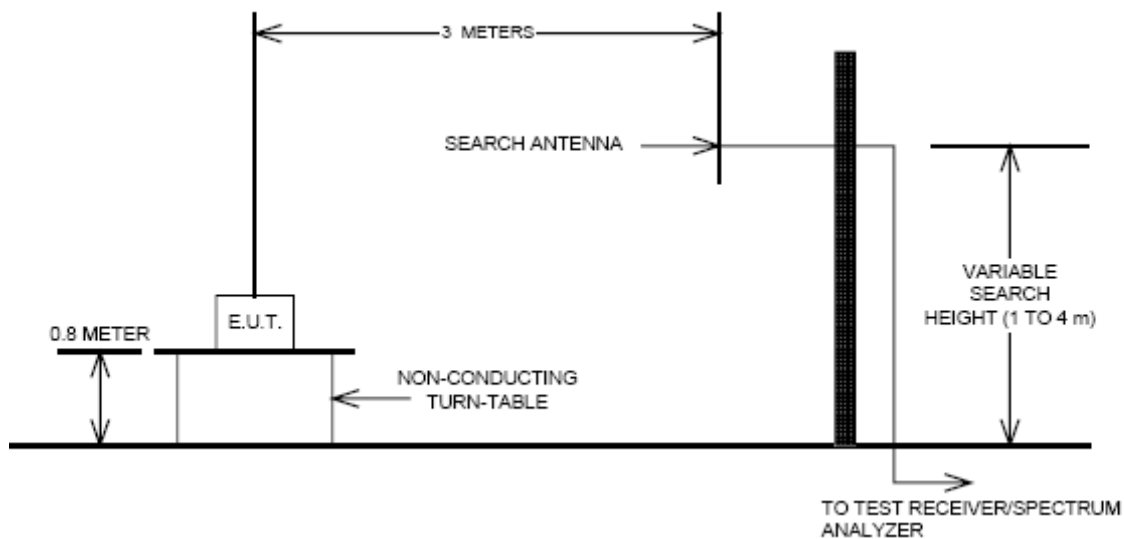

[Downlink]

Frequency	Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBd)	C.L	SigGen Level [dBm]	Pol.	ERP (dBm)	Margin (dB)
734	1468.00	-79.25	5.75	5.01	-49.42	V	-48.68	-35.68
	2202.00	-79.52	8.42	5.97	-47.62	V	-45.17	-32.17
751.5	1503.00	-80.12	6.14	4.70	-49.95	V	-48.51	-35.51
	2254.50	-79.66	8.43	6.06	-46.95	V	-44.58	-31.58

[Uplink]

Frequency	Freq.(MHz)	<u>Measured</u> <u>Level</u> [dBm]	Ant. Gain (dBd)	C.L	<u>SigGen</u> <u>Level</u> [dBm]	Pol.	ERP (dBm)	Margin (dB)
704	1408.00	-79.25	5.09	4.54	-49.79	V	-49.24	-36.24
	2112.00	-79.52	8.41	5.82	-47.05	V	-44.46	-31.46
781.5	1563.00	-79.24	6.80	4.80	-48.86	V	-46.86	-33.86
	2344.50	-79.06	8.43	6.21	-45.85	V	-43.63	-30.63

9. FREQUENCY STABILITY OVER TEMPERATURE AND VOLTAGE VARIATIONS

Test Requirement(s): §2.1055(a)(1)

Test Procedures:

As required by 47 CFR 2.1055, *Frequency Stability measurements* were made at the RF output terminals using a Spectrum Analyzer.


The EUT was placed in the Environmental Chamber.

A CW signal was injected into the EUT at the appropriate RF level. The frequency counter option on the Spectrum Analyzer was used to measure frequency deviations. The frequency drift was investigated for every 10 °C increment until the unit is stabilized then recorded the reading in tabular format with the temperature range of -30 to 50 °C.

Voltage supplied to EUT is 110 Vac reference temperature was done at 20°C.

The voltage was varied by ± 15 % of nominal

Test Setup:

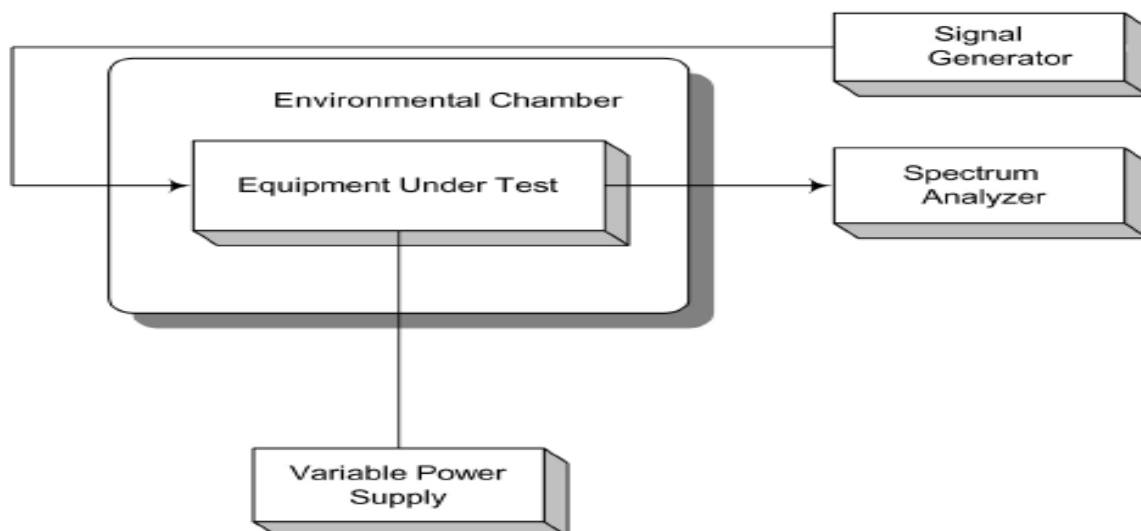

Test Results:

FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1208FR39-1	Date of Issue: September 12,2012	EUT Type: REPEATER	FCC ID: N52-AXM700-9543	Page 46 of 49

The E.U.T was found in compliance for Frequency Stability and Voltage Test

Frequency Stability and Voltage Test Results

Reference: 115 Vac at 20°C Freq. = 751.5 MHz

Voltage (%)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (Hz)	ppm
100%	+20(Ref)	781 999 994	-5.9	0.0	0.0000
	-30	782 000 003	2.6	8.5	0.0109
	-20	782 000 002	2.1	8.0	0.0102
	-10	782 000 001	0.5	6.4	0.0082
	0	781 999 999	-1.1	4.8	0.0061
	+10	781 999 998	-2.5	3.4	0.0043
	+30	781 999 996	-4.4	1.5	0.0019
	+40	781 999 995	-4.9	1.0	0.0013
	+50	781 999 995	-5.2	0.7	0.0009
115%	+20	781 999 996	-4.3	1.6	0.0020
85%	+20	781 999 996	-4.0	1.9	0.0024

Reference: 230 Vac at 20°C Freq. = 781.5 MHz

Voltage (%)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (Hz)	ppm
100%	+20(Ref)	781 499 986	-14.0	0.0	0.0000
	-30	781 499 987	-13.0	1.0	0.0013
	-20	781 499 985	-15.0	-1.0	-0.0013
	-10	781 499 988	-12.0	2.0	0.0026
	0	781 499 989	-11.0	3.0	0.0038
	+10	781 499 990	-10.0	4.0	0.0051
	+30	781 499 986	-14.0	0.0	0.0000
	+40	781 499 987	-13.0	1.0	0.0013
	+50	781 499 988	-12.0	2.0	0.0026
115%	+20	781 499 985	-15.0	-1.0	-0.0013

FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1208FR39-1	Date of Issue: September 12,2012	EUT Type: REPEATER	FCC ID: N52-AXM700-9543	Page 47 of 49

85%	+20	781 499 986	-14.0	0.0	0.0000
-----	-----	-------------	-------	-----	--------

10. RF EXPOSURE STATEMENT

1. LIMITS

According to §1.1310 and §2.1091 RF exposure is calculated.

(B) Limits for General Population/Uncontrolled Exposures

Frequency range (MHz)	Electric field Strength (V/m)	Magnetic field Strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
0.3 - 1.34	614	1.63	*(100)	30
1.34 - 30	824/f	2.19/f	*(180/ f ²)	30
30 - 300	27.5	0.073	0.2	30
300 - 1500	f/1500	30
1500 - 100.000	1.0	30

F = frequency in MHz

* = Plane-wave equivalent power density

2. MAXIMUM PERMISSIBLE EXPOSURE Prediction

Prediction of MPE limit at a given distance

Equation from page 18 of OET Bulletin 65, Edition 97-01

$$S = PG/4\pi R^2$$

S = Power density

P = power input to antenna

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna

FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1208FR39-1	Date of Issue: September 12,2012	EUT Type: REPEATER	FCC ID: N52-AXM700-9543	Page 48 of 49

2-1 Limit (Down Link)

Max Peak output Power at antenna input terminal	43.010	dBm
Max Peak output Power at antenna input terminal	19.999	W
Prediction distance	400.000	cm
Prediction frequency	751.5000	MHz
Antenna Gain(typical)	16.000	dBi
Antenna Gain(numeric)	39.811	—
Power density at prediction frequency(S)	0.396	mW/cm ²
MPE limit for uncontrolled exposure at prediction frequency	0.501	mW/cm ²

2-2 Limit (Up Link)

Max Peak output Power at antenna input terminal	29.910	dBm
Max Peak output Power at antenna input terminal	0.979	W
Prediction distance	100.000	cm
Prediction frequency	701.0000	MHz
Antenna Gain(typical)	16.000	dBi
Antenna Gain(numeric)	39.811	—
Power density at prediction frequency(S)	0.310	mW/cm ²
MPE limit for uncontrolled exposure at prediction frequency	0.467	mW/cm ²

3. RESULTS

The power density level at 400 cm is 0.396 mW/cm², which is below the uncontrolled exposure limit of 0.501 mW/cm² at Down Link

Warning: In order to avoid the possibility of exceeding the FCC radio frequency exposure limits, it must also have a minimum distance of 400 cm from the body during normal operation.