

Table of Content

FCC 15.407 # Max output power and psd ~ WLAN5Gx a mode U-NII-3	3
ISED RSS247 # Max output power and psd ~ WLAN5Gx a mode U-NII-3	8
FCC 15.407 # Max output power and psd ~ WLAN5Gx a mode U-NII-3	13
ISED RSS247 # Max output power and psd ~ WLAN5Gx a mode U-NII-3	18
FCC 15.407 # Max output power and psd ~ WLAN5Gx a mode U-NII-3	23
ISED RSS247 # Max output power and psd ~ WLAN5Gx a mode U-NII-3	28
FCC 15.407 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-3	33
ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-3	38
FCC 15.407 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-3	43
ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-3	48
FCC 15.407 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-3	53
ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-3	58
FCC 15.407 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-3	63
ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-3	68
FCC 15.407 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-3	73
ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-3	78

FCC 15.407 # Max output power and psd ~ WLAN5Gx a mode U-NII-3

References

TC start	27.02.2024 09:38:33
Ambit temp [°C] humidity [rel%]	21.1 40
System version	4.7.1.6
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F, E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx a mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx a mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5745
Frequency mid to test	False Freq [MHz] 5785
Frequency high to test	False Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1.4
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 5745 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	--	--	7.11	dBm	INFO
Ref. Frequency	--	--	5746.800	MHz	INFO


Evaluation max. Duty Cycle

Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result Summary					
Number of detected Bursts:46					
Duty Cycle (Burst Ratio) max	--	--	0.941	--	INFO
Duty Cycle max	--	--	0.264	dB	INFO
Duty Cycle (Burst Ratio) min	--	--	0.898	--	INFO
Duty Cycle min	--	--	0.467	dB	INFO
Max TX Burst Length	--	--	2	ms	INFO
Min Gap Length	--	--	0.125	ms	INFO
Max Gap Length	--	--	0.225	ms	INFO

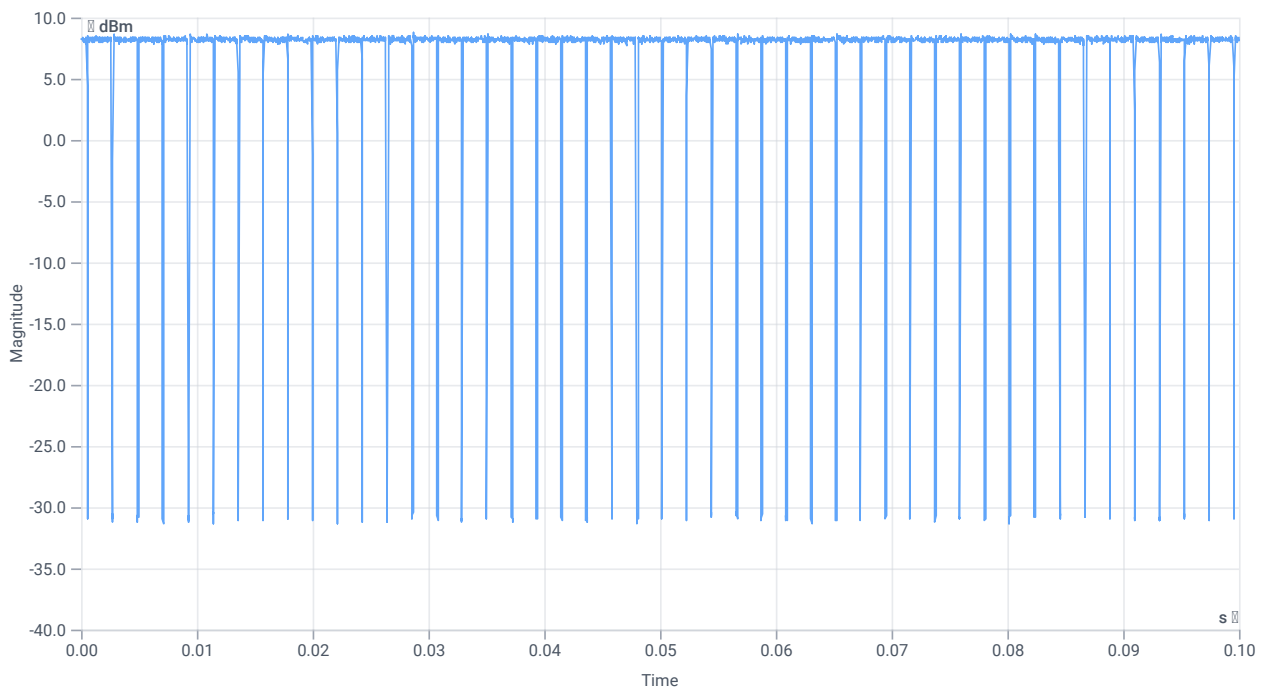

Evaluation Bandwidth

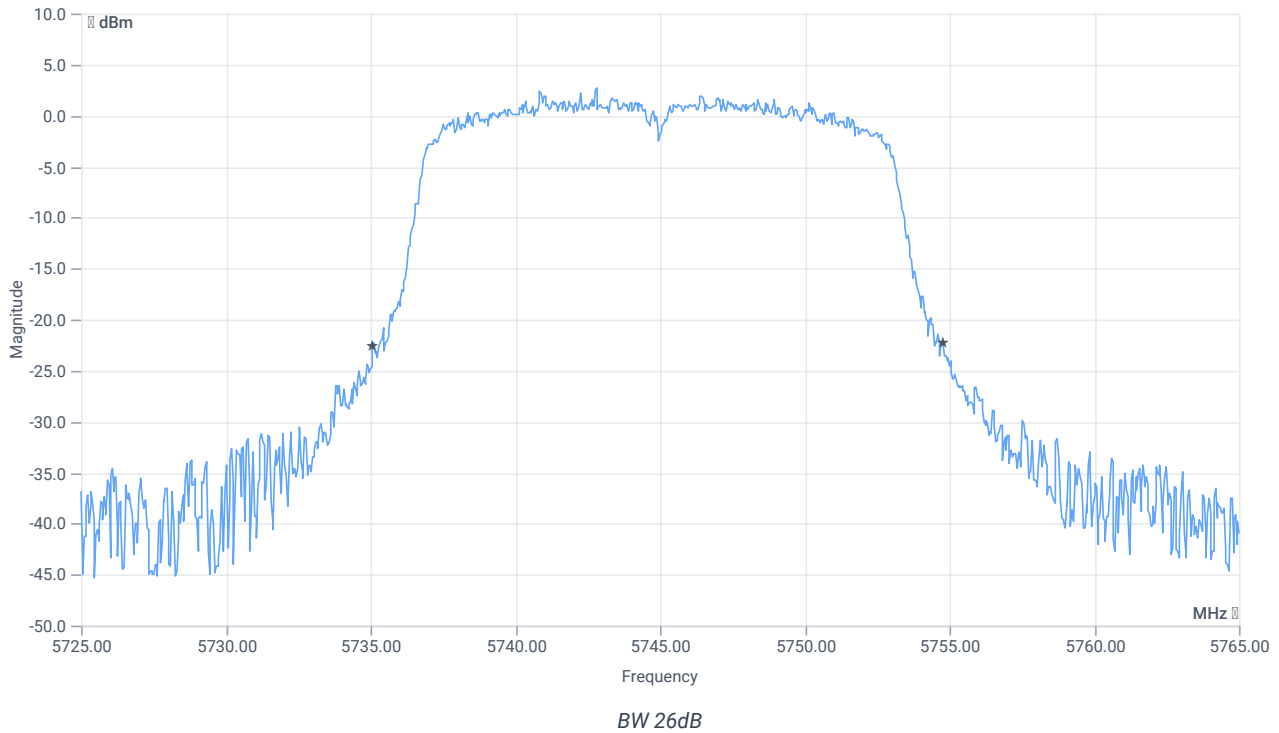


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	19.68	MHz	INFO
T1 26dB	---	---	5735.0800	MHz	INFO
T2 26dB	---	---	5754.7600	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	19.11 16.82 20
Start [MHz] Stop [MHz]	5725.000 5765.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

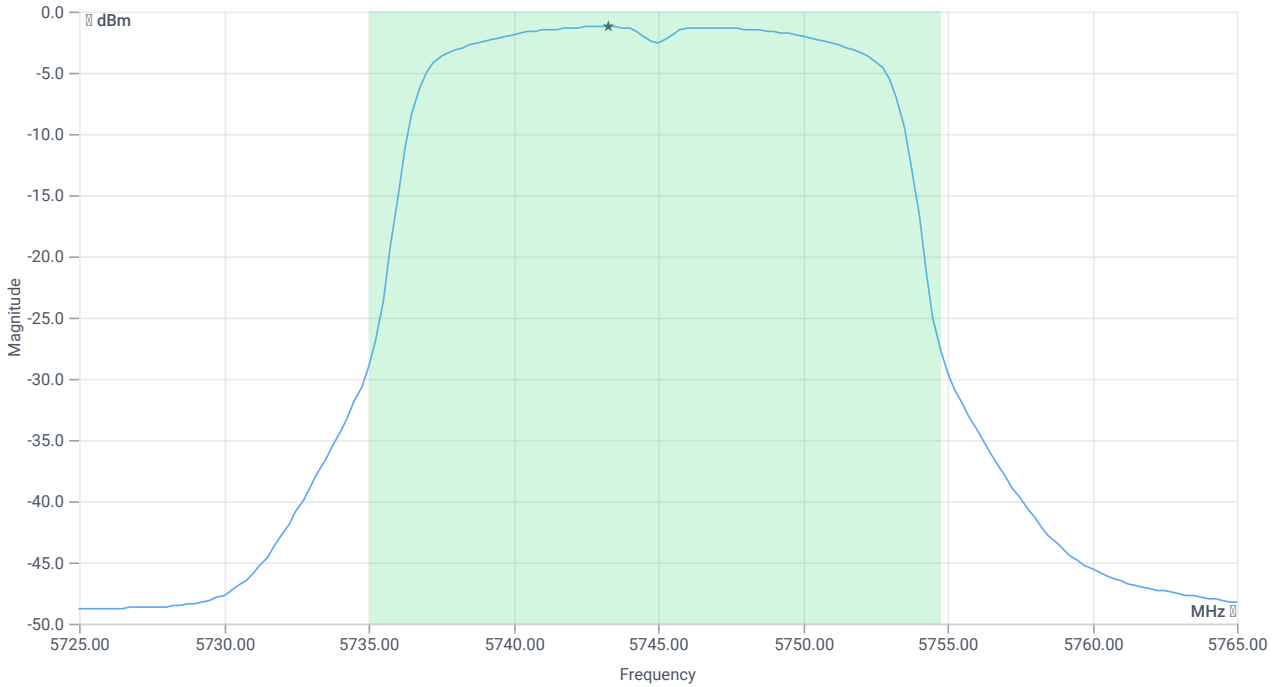

Max OP and PSD


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max Output Power	--	--	9.84	dBm	INFO
Duty Cycle Correction	--	--	0.47	dB	INFO
Limit absolute					
Max Output Power DC corrected	--	30	10.31	dBm	PASS
Limit: 11 dBm + 10 log 19.68					
Max Output Power DC corrected	--	23.94	10.31	dBm	na

Power Spectral Density U-NII-3

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	19.11 16.82 20
Start [MHz] Stop [MHz]	5725.000 5765.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

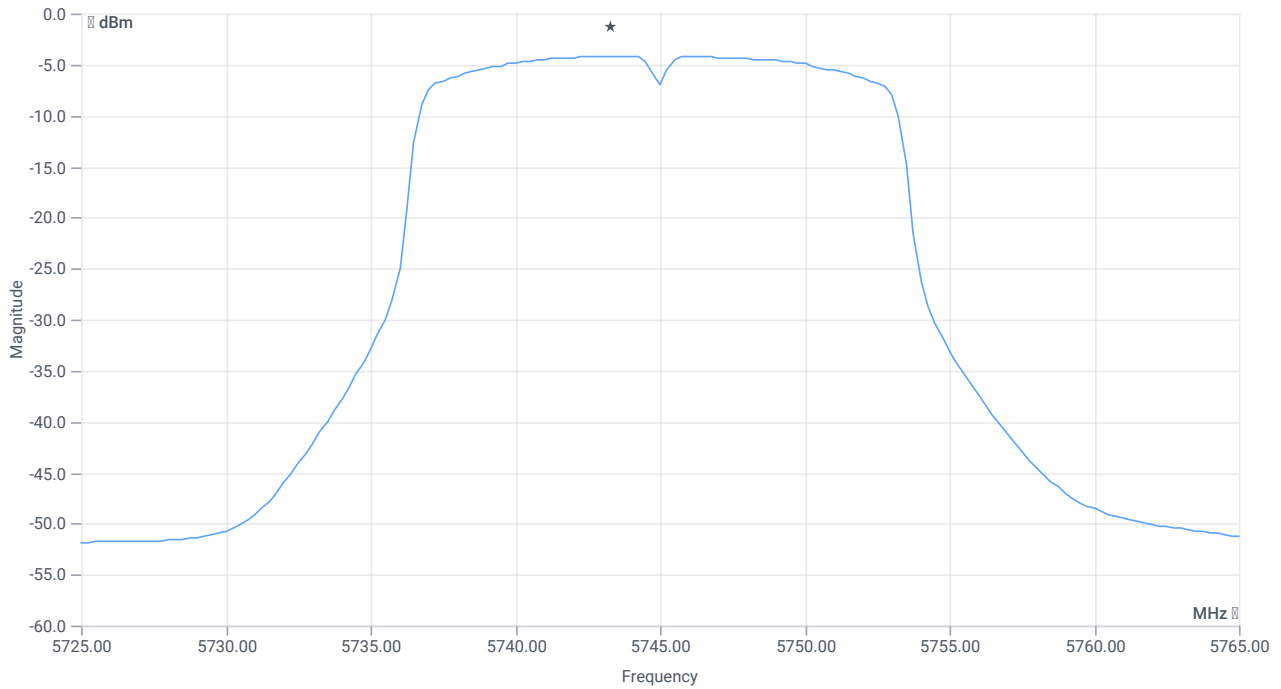

PSD UNII-3

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power Spectral Density	--	--	-4.21	dBm/0.5MHz	INFO
Duty Cycle Correction	--	--	0.47	dB	INFO
Power Spectral Density DC corrected	--	30	-3.74	dBm/0.5MHz	PASS

Verdict

PASS

ISED RSS247 # Max output power and psd ~ WLAN5Gx a mode U-NII-3

References

TC start	27.02.2024 09:41:04
Ambit temp [°C] humidity [rel%]	21.1 39
System version	4.7.1.6
Standard Version	ISED RSS247 NI
Method	
Description	ISED Max Output Power & PSD - WLAN5Gx a mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx a mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5745
Frequency mid to test	False Freq [MHz] 5785
Frequency high to test	False Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1.4
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 5745 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	--	--	7.06	dBm	INFO
Ref. Frequency	--	--	5742.400	MHz	INFO


Evaluation max. Duty Cycle

Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result Summary					
Number of detected Bursts:45					
Duty Cycle (Burst Ratio) max	--	--	0.941	--	INFO
Duty Cycle max	--	--	0.264	dB	INFO
Duty Cycle (Burst Ratio) min	--	--	0.909	--	INFO
Duty Cycle min	--	--	0.414	dB	INFO
Max TX Burst Length	--	--	2	ms	INFO
Min Gap Length	--	--	0.125	ms	INFO
Max Gap Length	--	--	0.2	ms	INFO

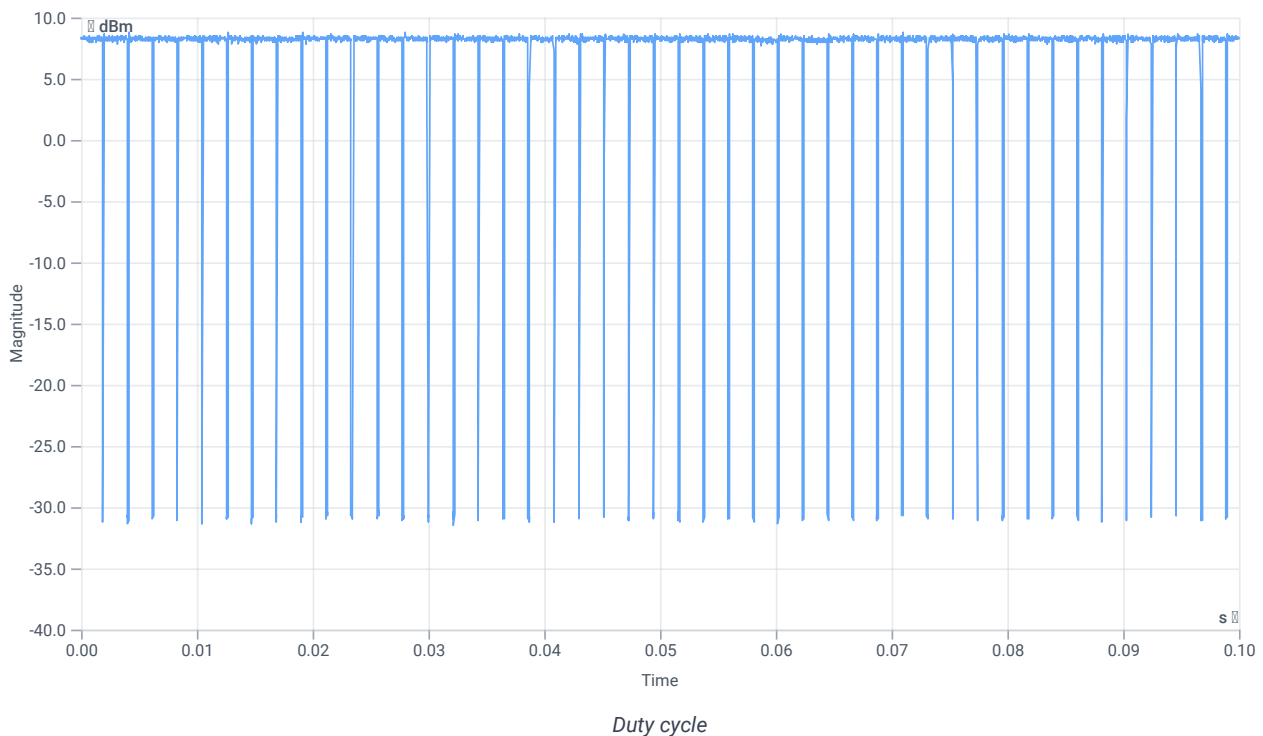

Evaluation Bandwidth

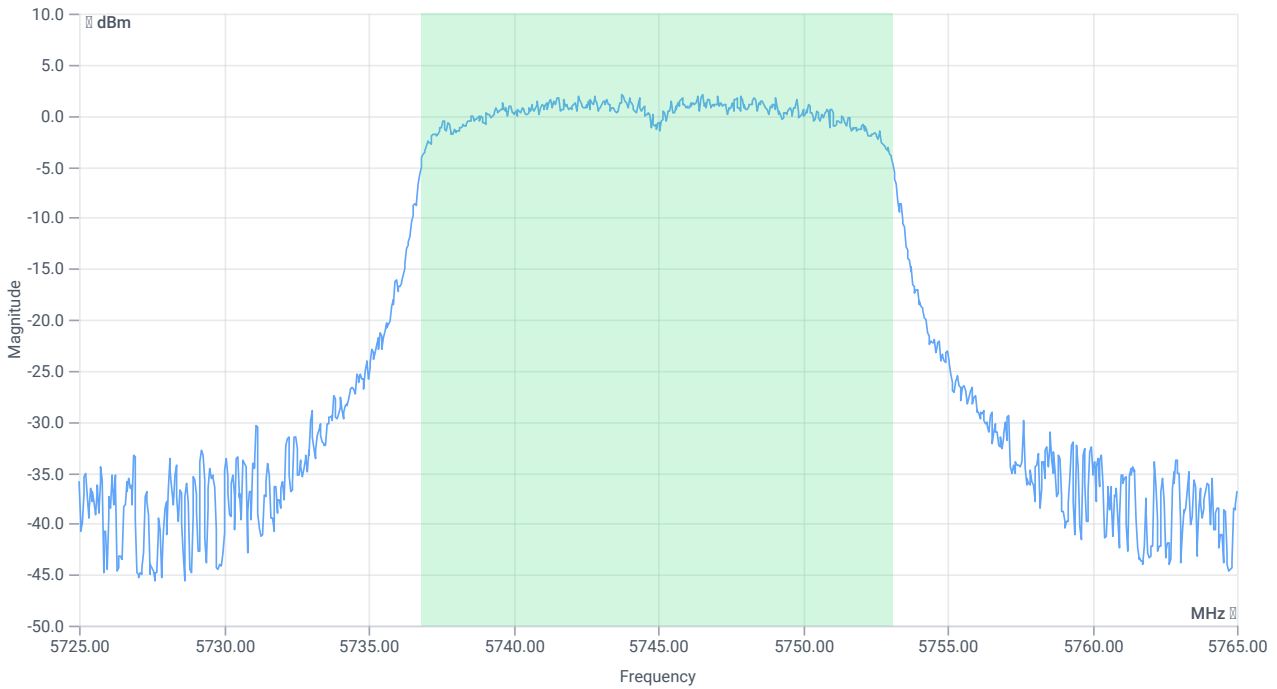

BW 99PCT


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	--	--	16.304	MHz	INFO
T1 99%	--	--	5736.8082	MHz	INFO
T2 99%	--	--	5753.1119	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	19.06 16.82 20
Start [MHz] Stop [MHz]	5725.000 5765.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

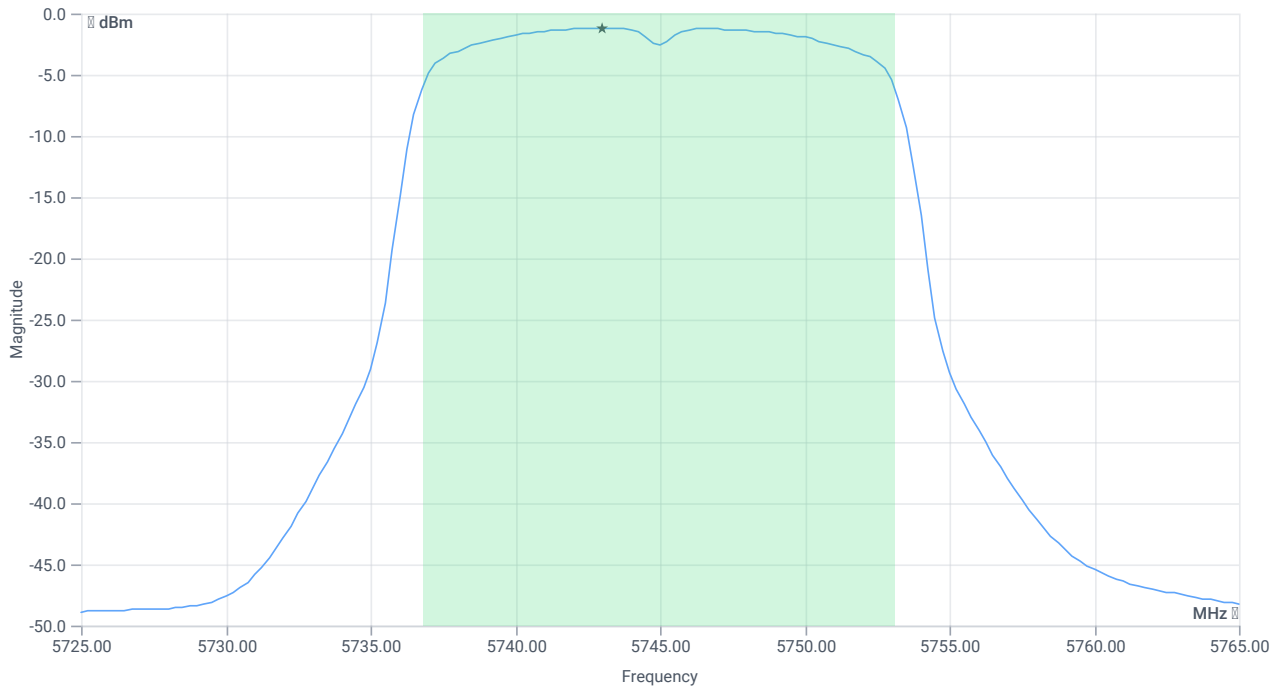

Max OP and PSD


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max Output Power	--	--	9.83	dBm	INFO
Duty Cycle Correction	--	--	0.41	dB	INFO
Limit absolute					
Max Output Power DC corrected	--	30	10.24	dBm	PASS
Limit: 11 dBm + 10 log 16.304					
Max Output Power DC corrected	--	23.12	10.24	dBm	na

Power Spectral Density U-NII-3

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	19.06 16.82 20
Start [MHz] Stop [MHz]	5725.000 5765.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

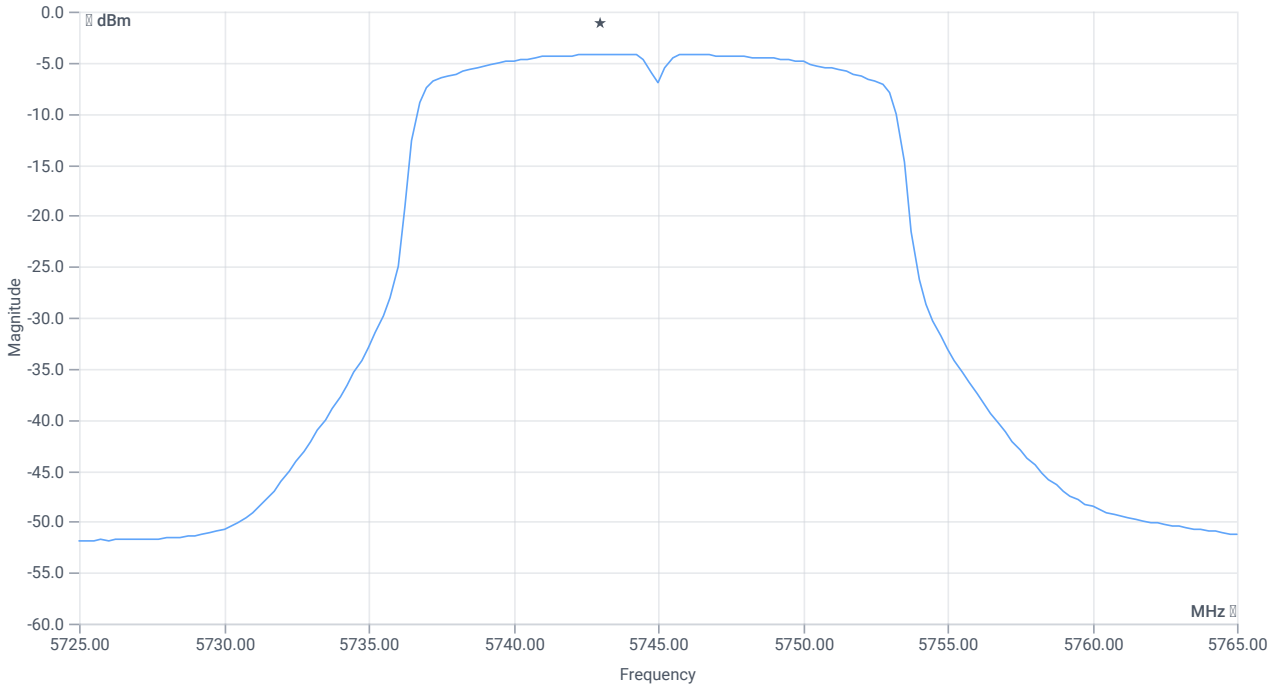

PSD UNII-3

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power Spectral Density	--	--	-4.2	dBm/0.5MHz	INFO
Duty Cycle Correction	--	--	0.41	dB	INFO
Power Spectral Density DC corrected	--	30	-3.79	dBm/0.5MHz	PASS

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx a mode U-NII-3

References

TC start	27.02.2024 09:43:54
Ambit temp [°C] humidity [rel%]	21.2 39
System version	4.7.1.6
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F, E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx a mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx a mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5745
Frequency mid to test	True Freq [MHz] 5785
Frequency high to test	False Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1.4
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 5785 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	--	--	7.58	dBm	INFO
Ref. Frequency	--	--	5782.600	MHz	INFO


Evaluation max. Duty Cycle

Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result Summary					
Number of detected Bursts:46					
Duty Cycle (Burst Ratio) max	--	--	0.941	--	INFO
Duty Cycle max	--	--	0.264	dB	INFO
Duty Cycle (Burst Ratio) min	--	--	0.899	--	INFO
Duty Cycle min	--	--	0.462	dB	INFO
Max TX Burst Length	--	--	2	ms	INFO
Min Gap Length	--	--	0.125	ms	INFO
Max Gap Length	--	--	0.225	ms	INFO

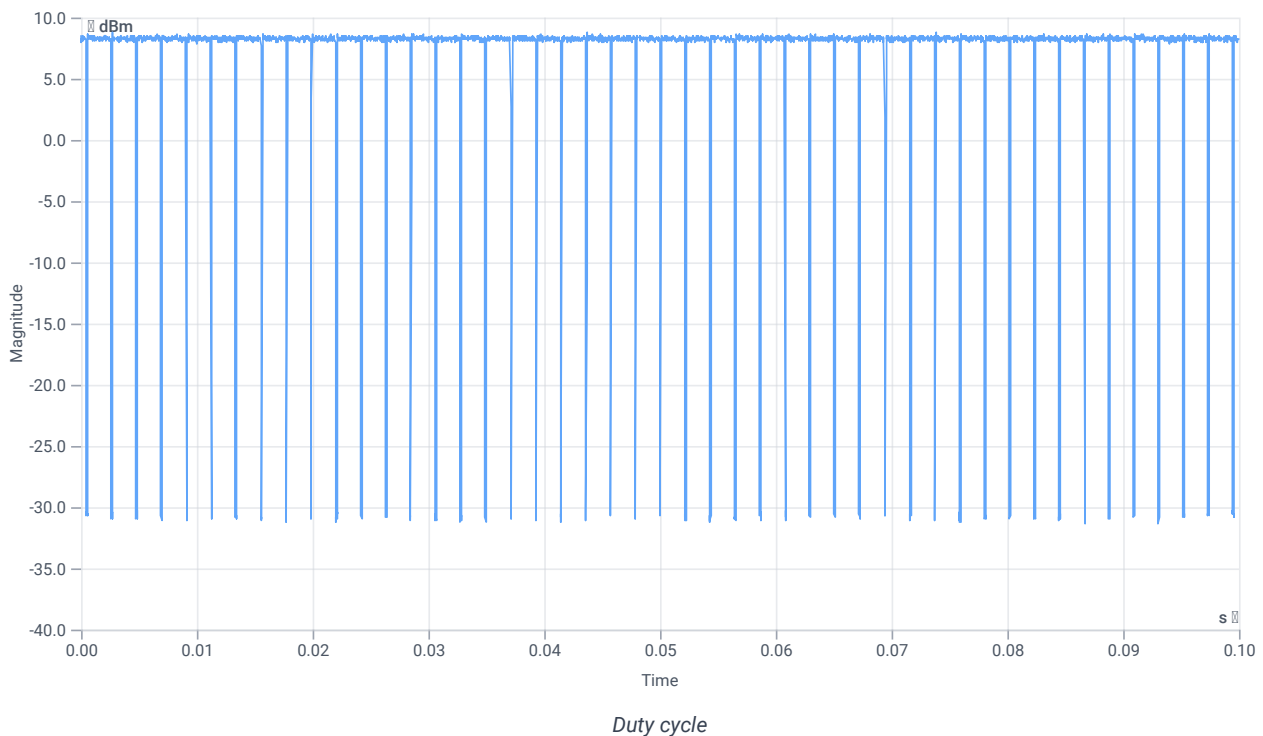

Evaluation Bandwidth

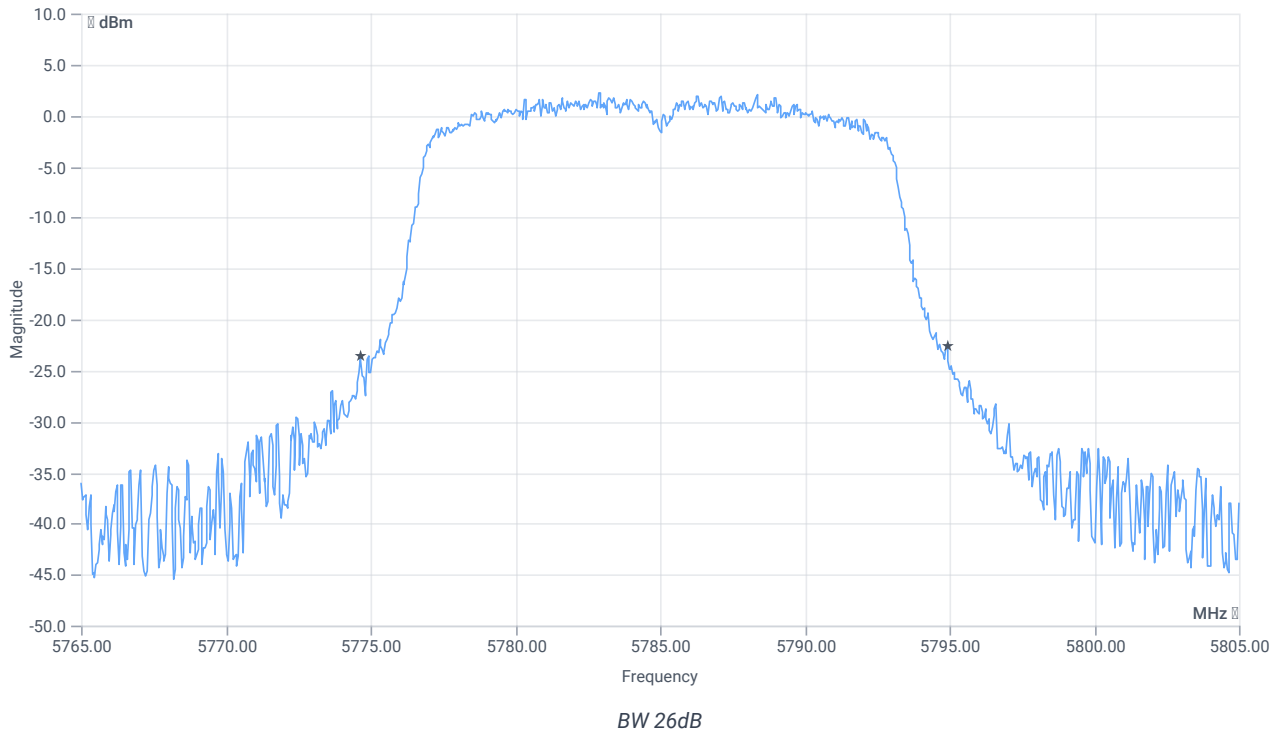


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	20.28	MHz	INFO
T1 26dB	---	---	5774.6400	MHz	INFO
T2 26dB	---	---	5794.9200	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	19.58 16.8 20
Start [MHz] Stop [MHz]	5765.000 5805.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

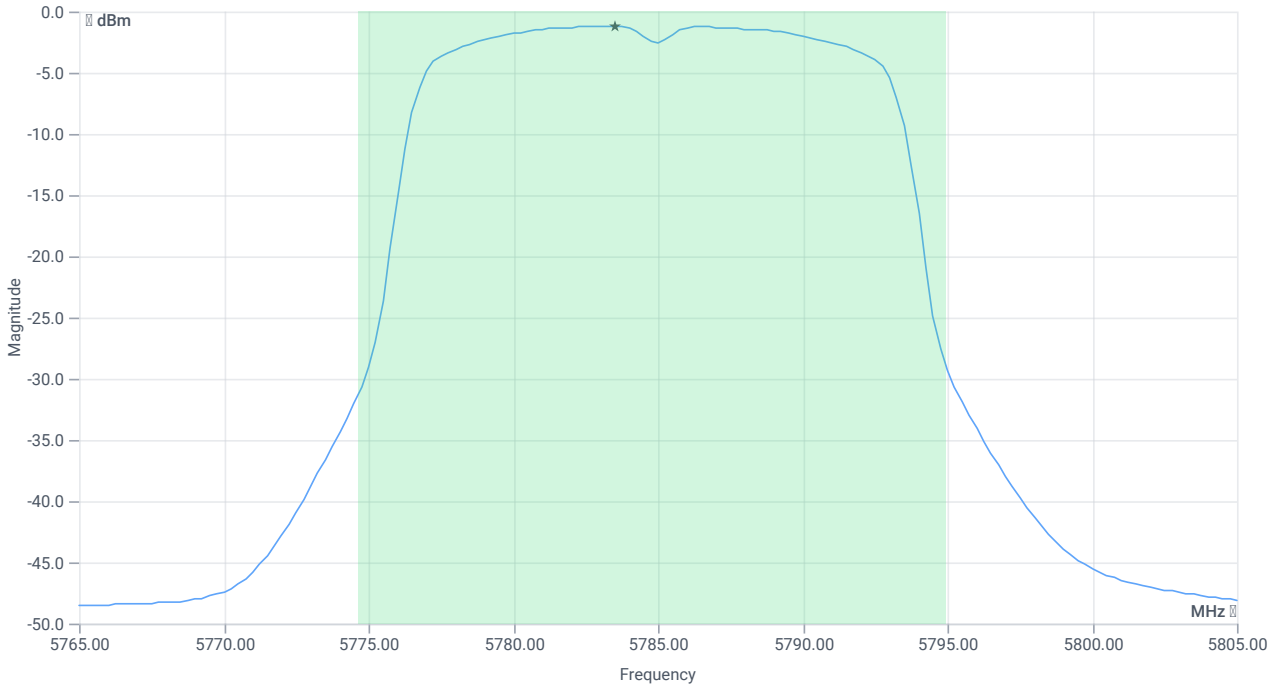

Max OP and PSD


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max Output Power	--	--	9.89	dBm	INFO
Duty Cycle Correction	--	--	0.46	dB	INFO
Limit absolute					
Max Output Power DC corrected	--	30	10.35	dBm	PASS
Limit: 11 dBm + 10 log 20.28					
Max Output Power DC corrected	--	24.07	10.35	dBm	na

Power Spectral Density U-NII-3

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	19.58 16.8 20
Start [MHz] Stop [MHz]	5765.000 5805.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

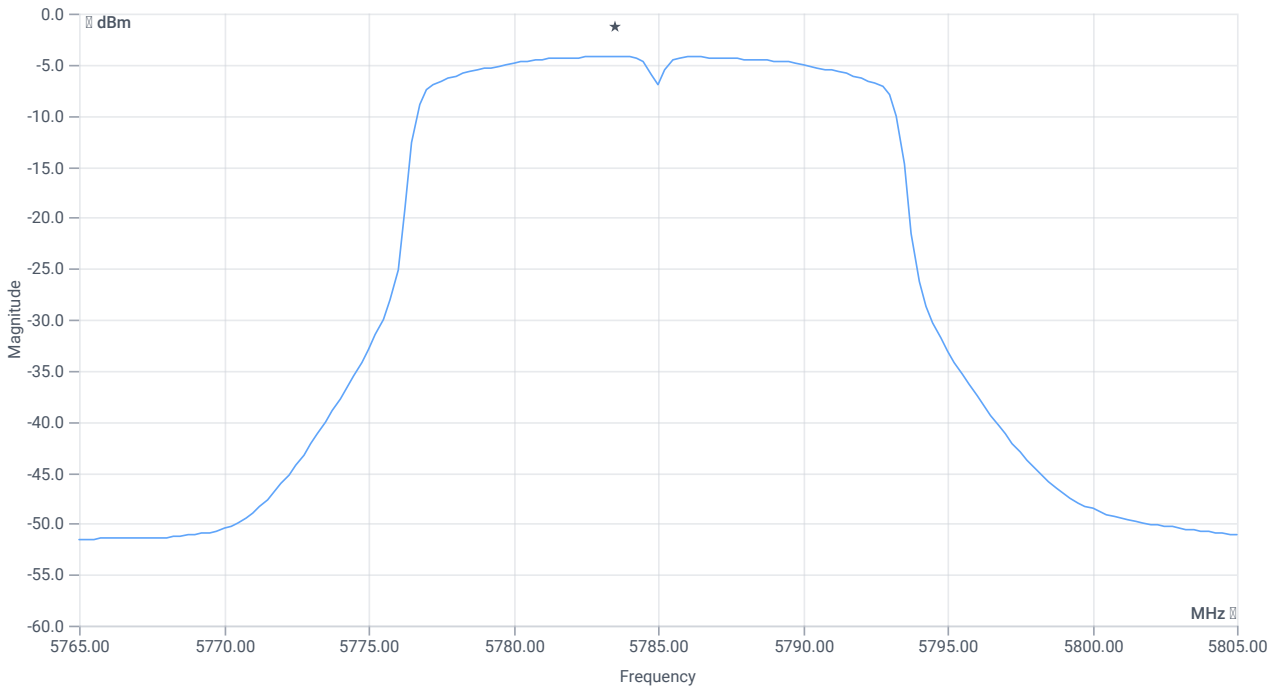

PSD UNII-3

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power Spectral Density	--	--	-4.25	dBm/0.5MHz	INFO
Duty Cycle Correction	--	--	0.46	dB	INFO
Power Spectral Density DC corrected	--	30	-3.79	dBm/0.5MHz	PASS

Verdict

PASS

ISED RSS247 # Max output power and psd ~ WLAN5Gx a mode U-NII-3

References

TC start	27.02.2024 09:46:24
Ambit temp [°C] humidity [rel%]	21.2 39
System version	4.7.1.6
Standard Version	ISED RSS247 NI
Method	
Description	ISED Max Output Power & PSD - WLAN5Gx a mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx a mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5745
Frequency mid to test	True Freq [MHz] 5785
Frequency high to test	False Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1.4
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 5785 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	--	--	7.23	dBm	INFO
Ref. Frequency	--	--	5786.400	MHz	INFO


Evaluation max. Duty Cycle

Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result Summary					
Number of detected Bursts:45					
Duty Cycle (Burst Ratio) max	--	--	0.941	--	INFO
Duty Cycle max	--	--	0.264	dB	INFO
Duty Cycle (Burst Ratio) min	--	--	0.898	--	INFO
Duty Cycle min	--	--	0.467	dB	INFO
Max TX Burst Length	--	--	2	ms	INFO
Min Gap Length	--	--	0.125	ms	INFO
Max Gap Length	--	--	0.225	ms	INFO

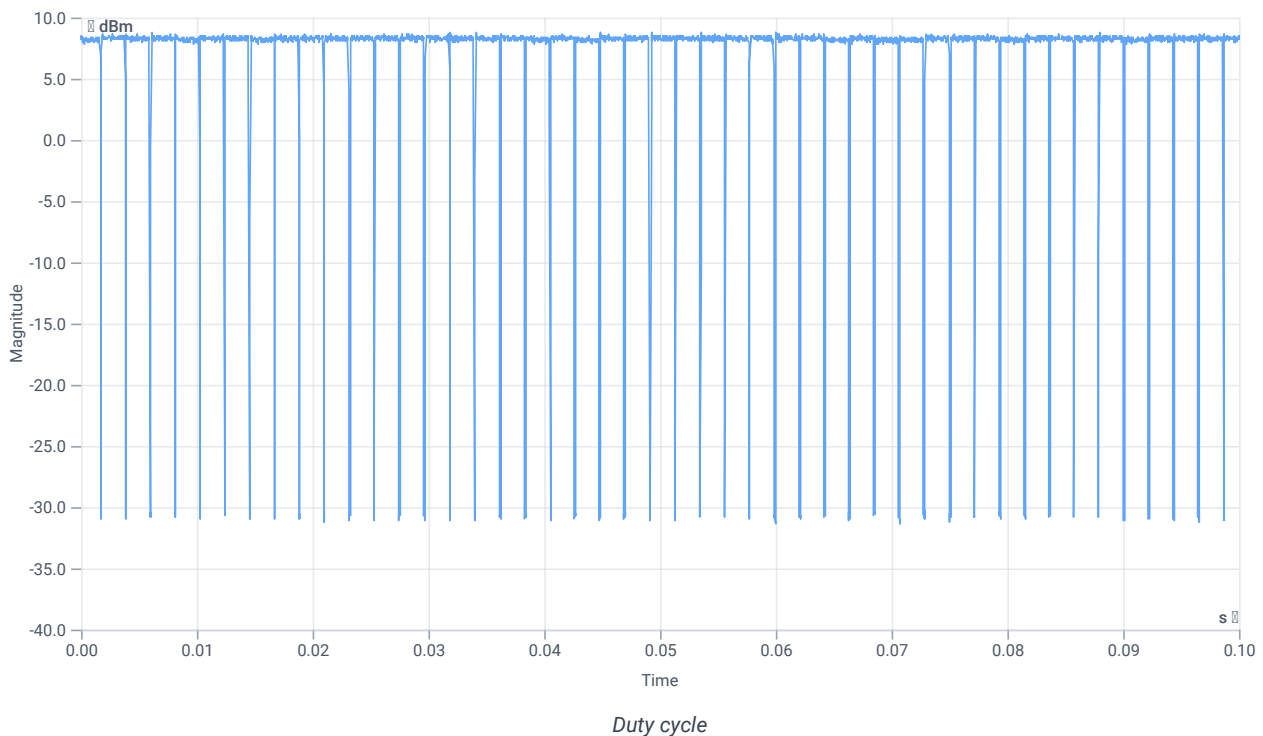

Evaluation Bandwidth

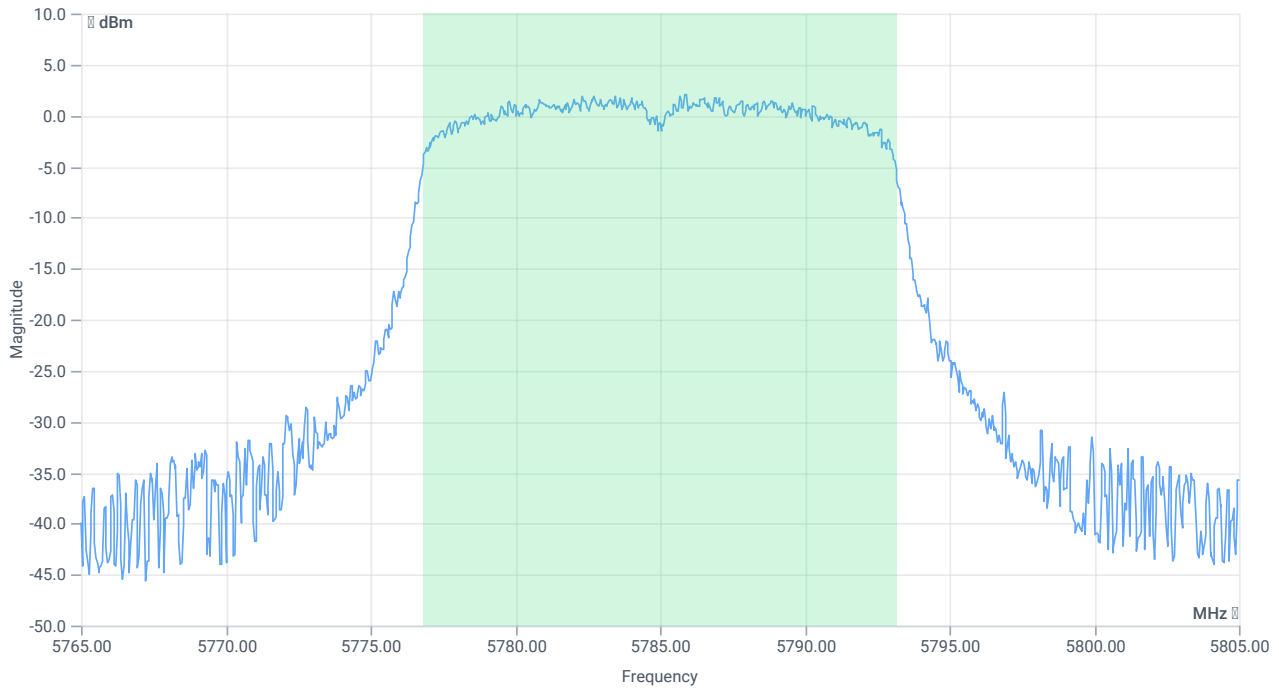

BW 99PCT


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	16.344	MHz	INFO
T1 99%	---	---	5776.8082	MHz	INFO
T2 99%	---	---	5793.1518	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	19.23 16.8 20
Start [MHz] Stop [MHz]	5765.000 5805.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

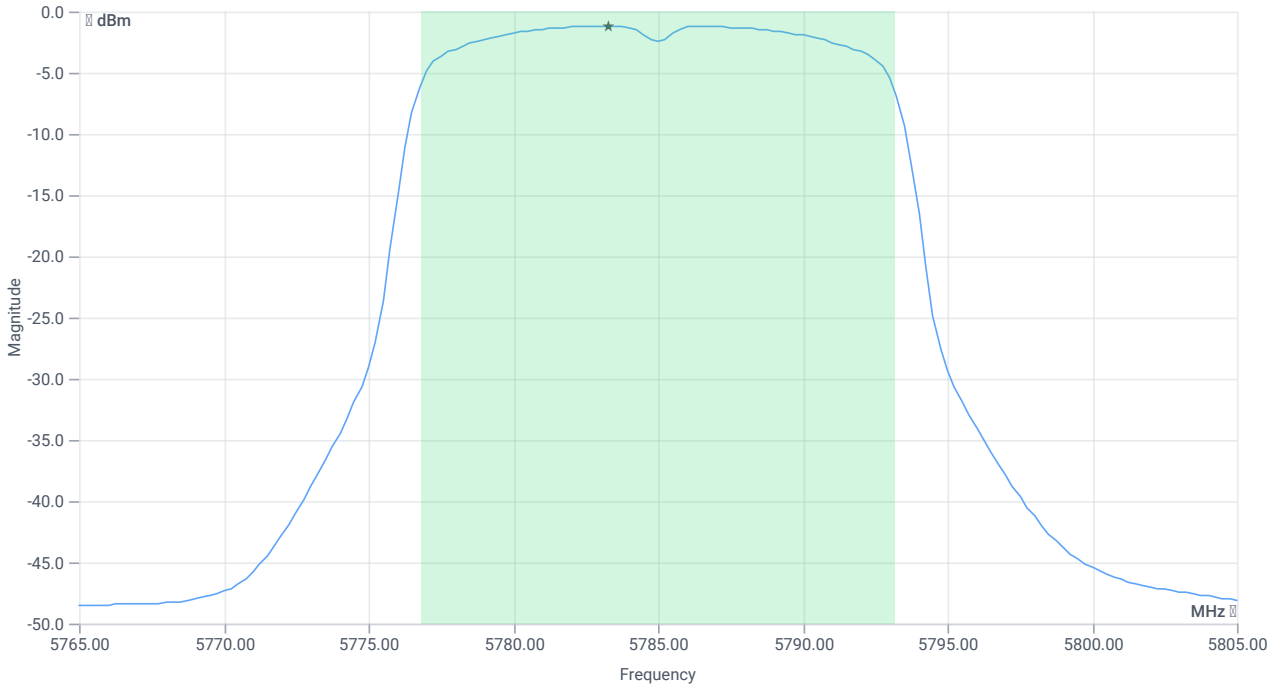

Max OP and PSD


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max Output Power	--	--	9.85	dBm	INFO
Duty Cycle Correction	--	--	0.47	dB	INFO
Limit absolute					
Max Output Power DC corrected	--	30	10.32	dBm	PASS
Limit: 11 dBm + 10 log 16.344					
Max Output Power DC corrected	--	23.13	10.32	dBm	na

Power Spectral Density U-NII-3

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	19.23 16.8 20
Start [MHz] Stop [MHz]	5765.000 5805.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

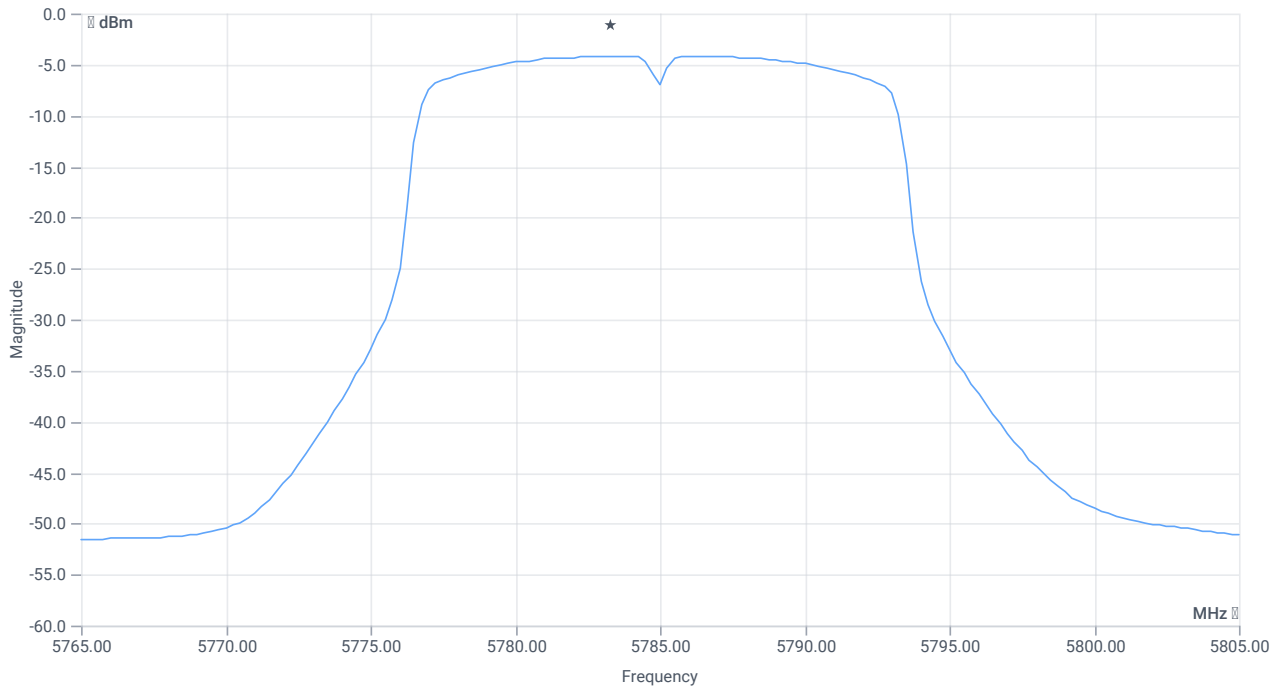

PSD UNII-3

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power Spectral Density	--	--	-4.18	dBm/0.5MHz	INFO
Duty Cycle Correction	--	--	0.47	dB	INFO
Power Spectral Density DC corrected	--	30	-3.71	dBm/0.5MHz	PASS

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx a mode U-NII-3

References

TC start	27.02.2024 09:49:09
Ambit temp [°C] humidity [rel%]	21.2 39
System version	4.7.1.6
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F, E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx a mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx a mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5745
Frequency mid to test	False Freq [MHz] 5785
Frequency high to test	True Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1.4
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 5825 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	--	--	6.34	dBm	INFO
Ref. Frequency	--	--	5827.000	MHz	INFO


Evaluation max. Duty Cycle

Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result Summary					
Number of detected Bursts:46					
Duty Cycle (Burst Ratio) max	--	--	0.941	--	INFO
Duty Cycle max	--	--	0.264	dB	INFO
Duty Cycle (Burst Ratio) min	--	--	0.899	--	INFO
Duty Cycle min	--	--	0.462	dB	INFO
Max TX Burst Length	--	--	2	ms	INFO
Min Gap Length	--	--	0.125	ms	INFO
Max Gap Length	--	--	0.225	ms	INFO

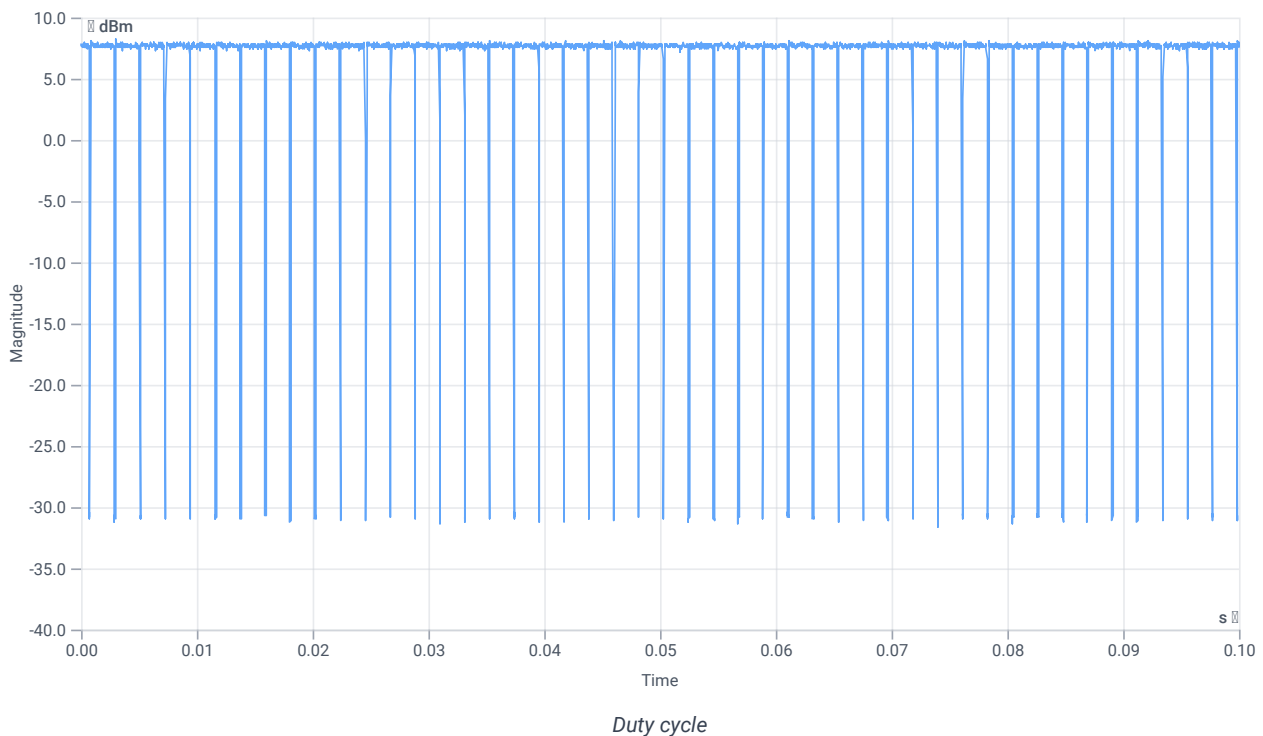

Evaluation Bandwidth

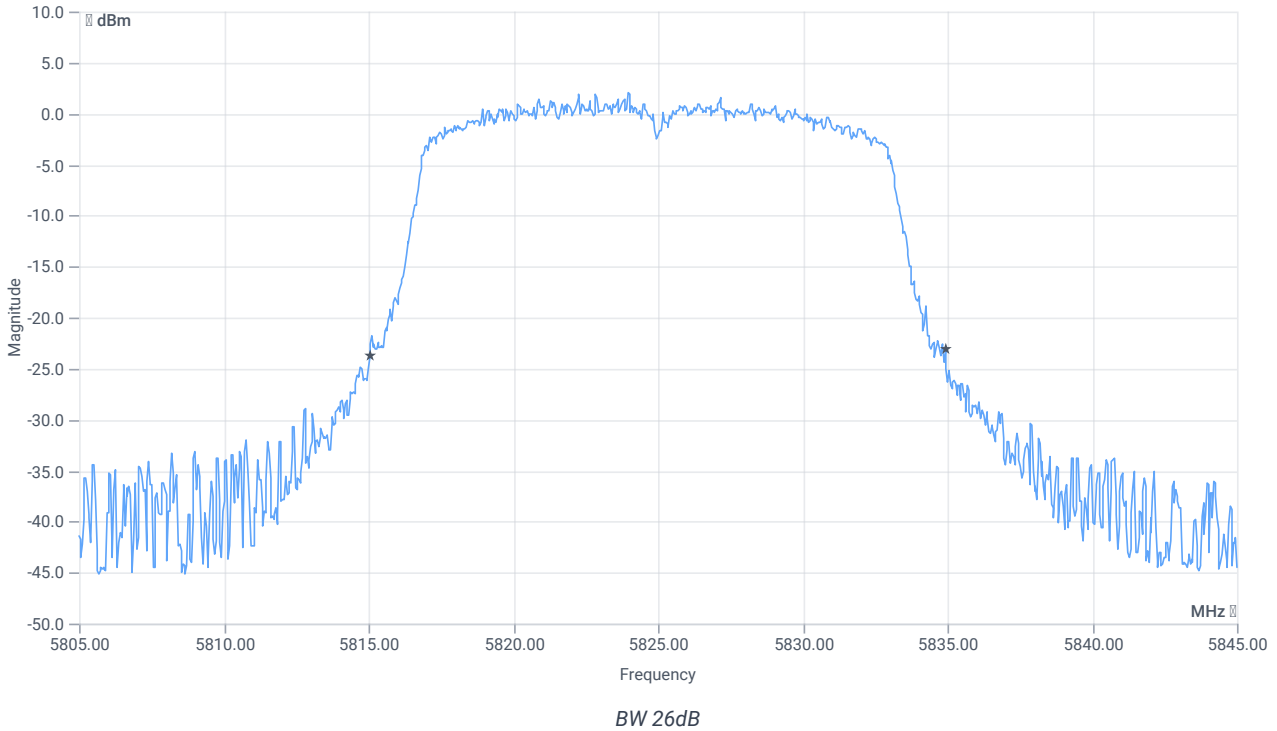


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	19.88	MHz	INFO
T1 26dB	---	---	5815.0400	MHz	INFO
T2 26dB	---	---	5834.9200	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	18.34 16.78 20
Start [MHz] Stop [MHz]	5805.000 5845.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

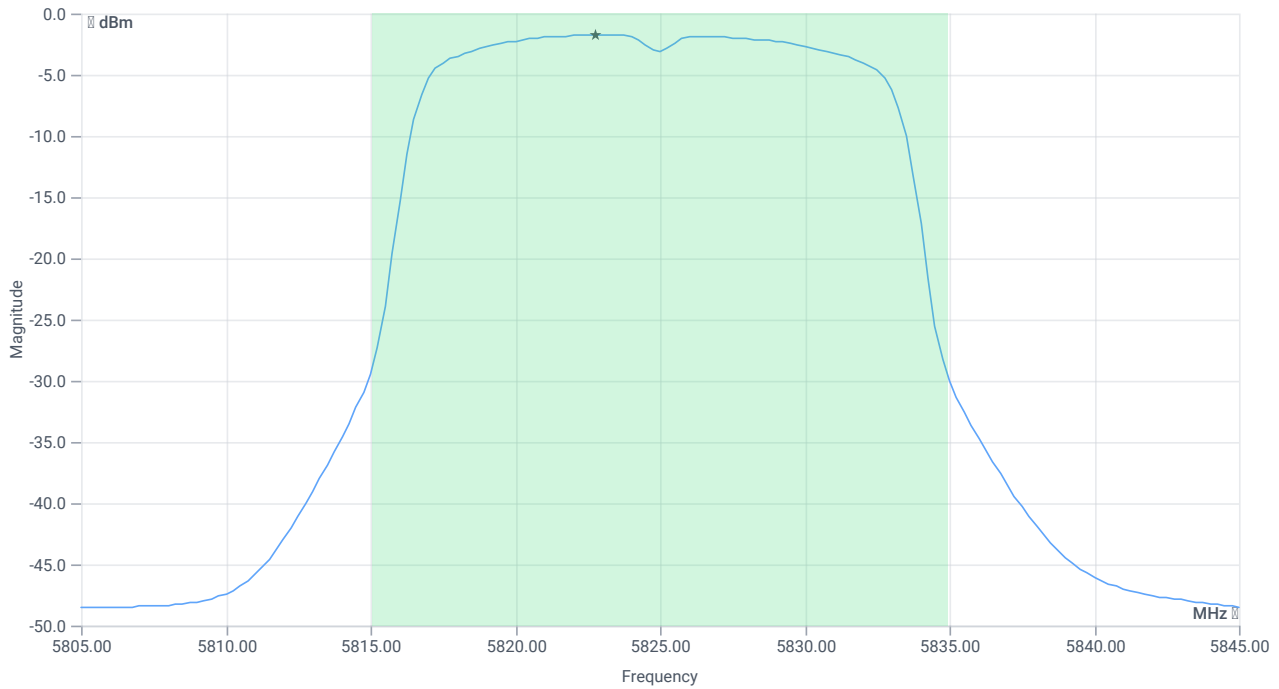

Max OP and PSD


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max Output Power	--	--	9.33	dBm	INFO
Duty Cycle Correction	--	--	0.46	dB	INFO
Limit absolute					
Max Output Power DC corrected	--	30	9.79	dBm	PASS
Limit: 11 dBm + 10 log 19.88					
Max Output Power DC corrected	--	23.98	9.79	dBm	na

Power Spectral Density U-NII-3

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	18.34 16.78 20
Start [MHz] Stop [MHz]	5805.000 5845.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

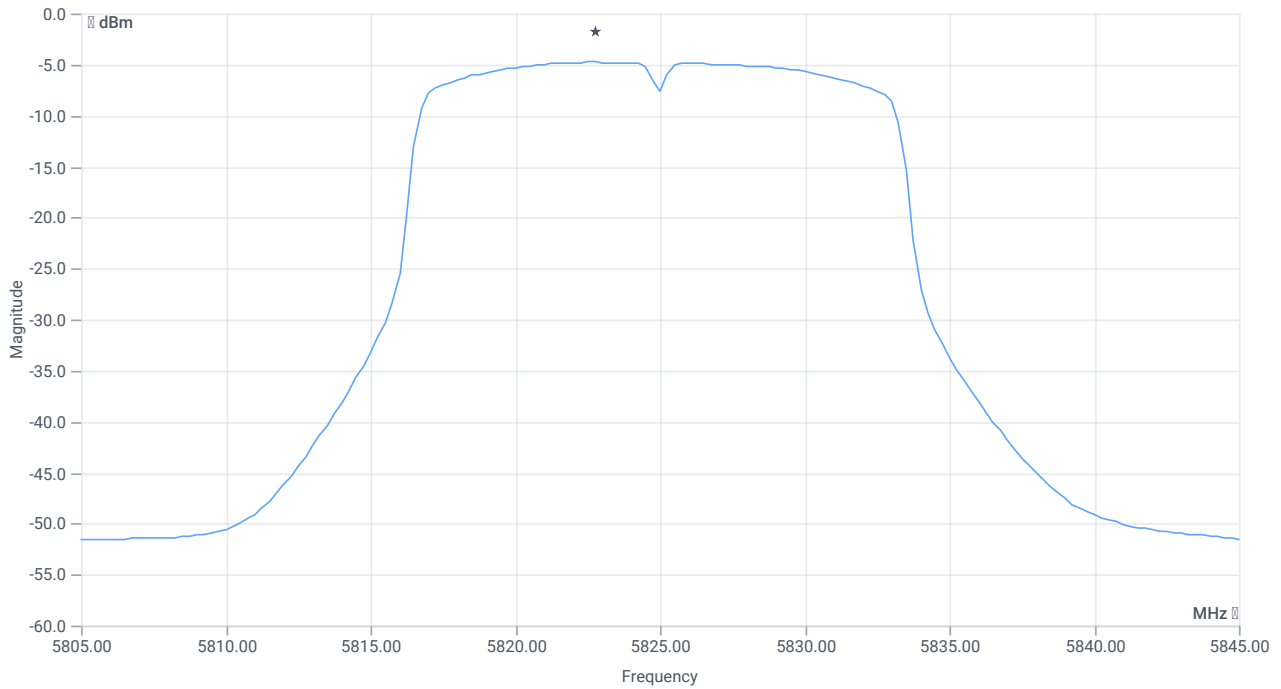

PSD UNII-3

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power Spectral Density	--	--	-4.76	dBm/0.5MHz	INFO
Duty Cycle Correction	--	--	0.46	dB	INFO
Power Spectral Density DC corrected	--	30	-4.3	dBm/0.5MHz	PASS

Verdict

PASS

ISED RSS247 # Max output power and psd ~ WLAN5Gx a mode U-NII-3

References

TC start	27.02.2024 09:51:39
Ambit temp [°C] humidity [rel%]	21.2 39
System version	4.7.1.6
Standard Version	ISED RSS247 NI
Method	
Description	ISED Max Output Power & PSD - WLAN5Gx a mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx a mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5745
Frequency mid to test	False Freq [MHz] 5785
Frequency high to test	True Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1.4
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 5825 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	--	--	6.62	dBm	INFO
Ref. Frequency	--	--	5823.000	MHz	INFO


Evaluation max. Duty Cycle

Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result Summary					
Number of detected Bursts:45					
Duty Cycle (Burst Ratio) max	--	--	0.941	--	INFO
Duty Cycle max	--	--	0.264	dB	INFO
Duty Cycle (Burst Ratio) min	--	--	0.899	--	INFO
Duty Cycle min	--	--	0.462	dB	INFO
Max TX Burst Length	--	--	2	ms	INFO
Min Gap Length	--	--	0.125	ms	INFO
Max Gap Length	--	--	0.225	ms	INFO

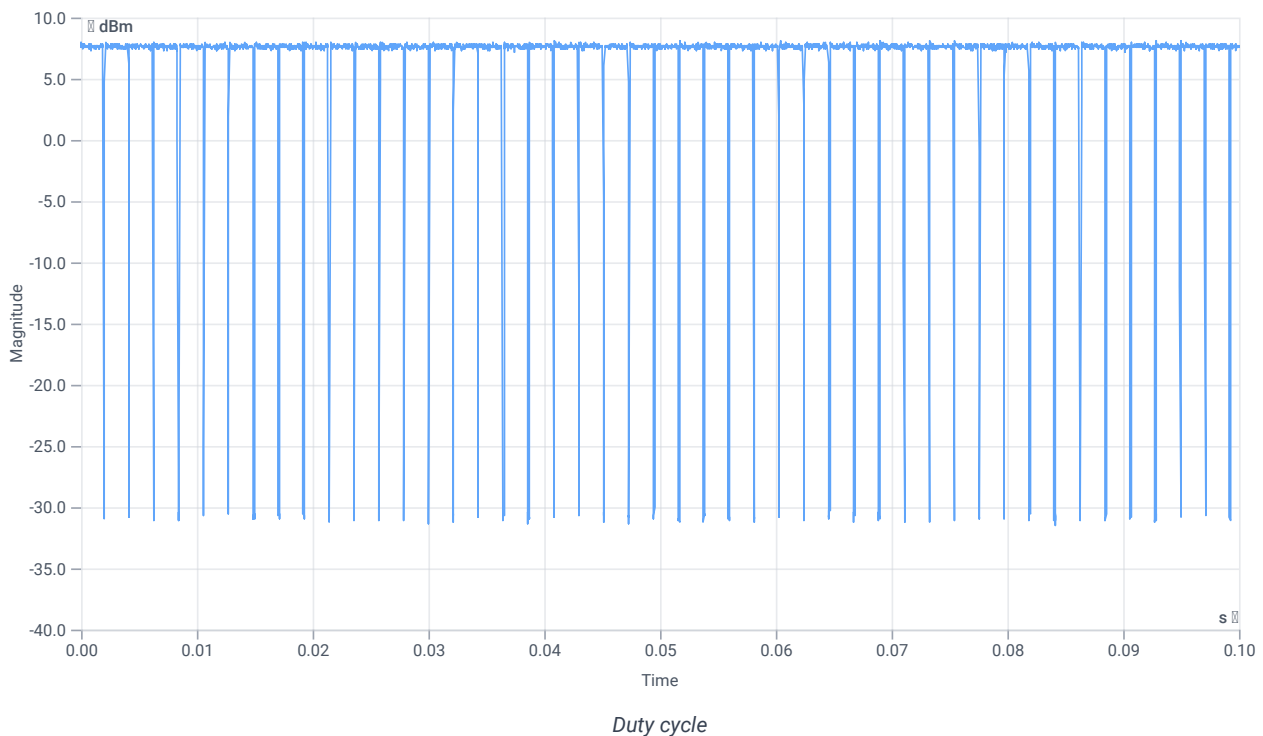

Evaluation Bandwidth

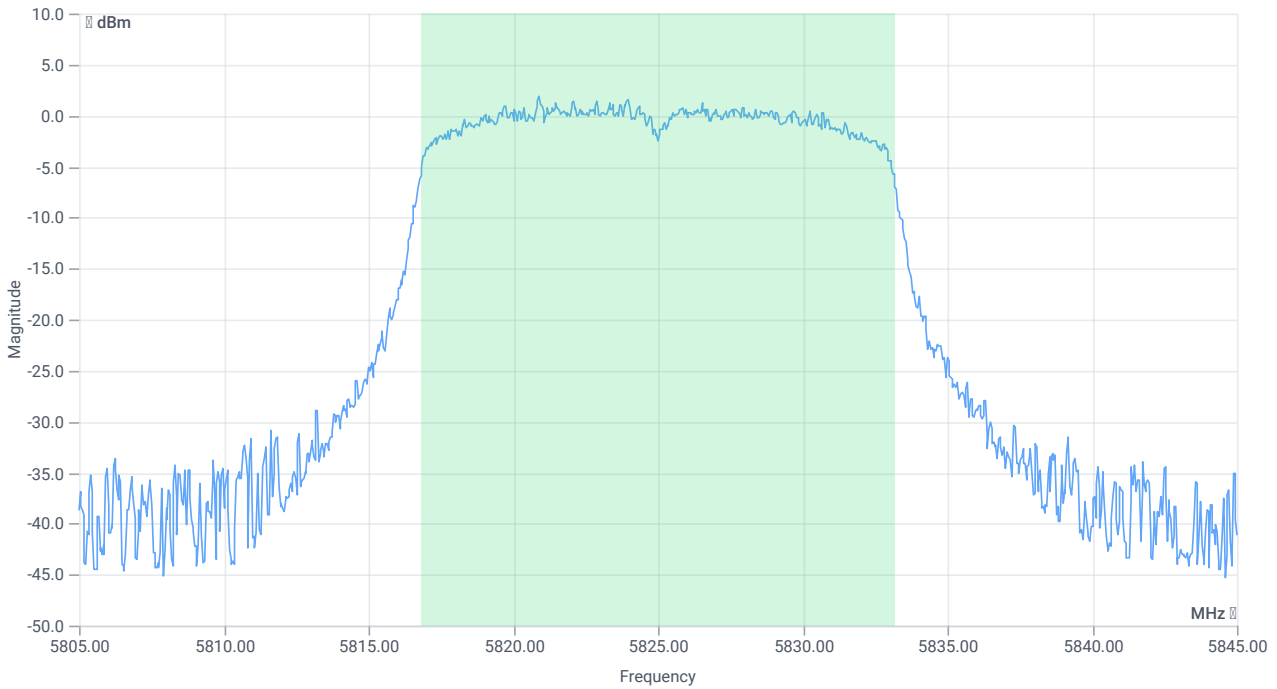

BW 99PCT


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	16.344	MHz	INFO
T1 99%	---	---	5816.8082	MHz	INFO
T2 99%	---	---	5833.1518	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	18.62 16.78 20
Start [MHz] Stop [MHz]	5805.000 5845.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

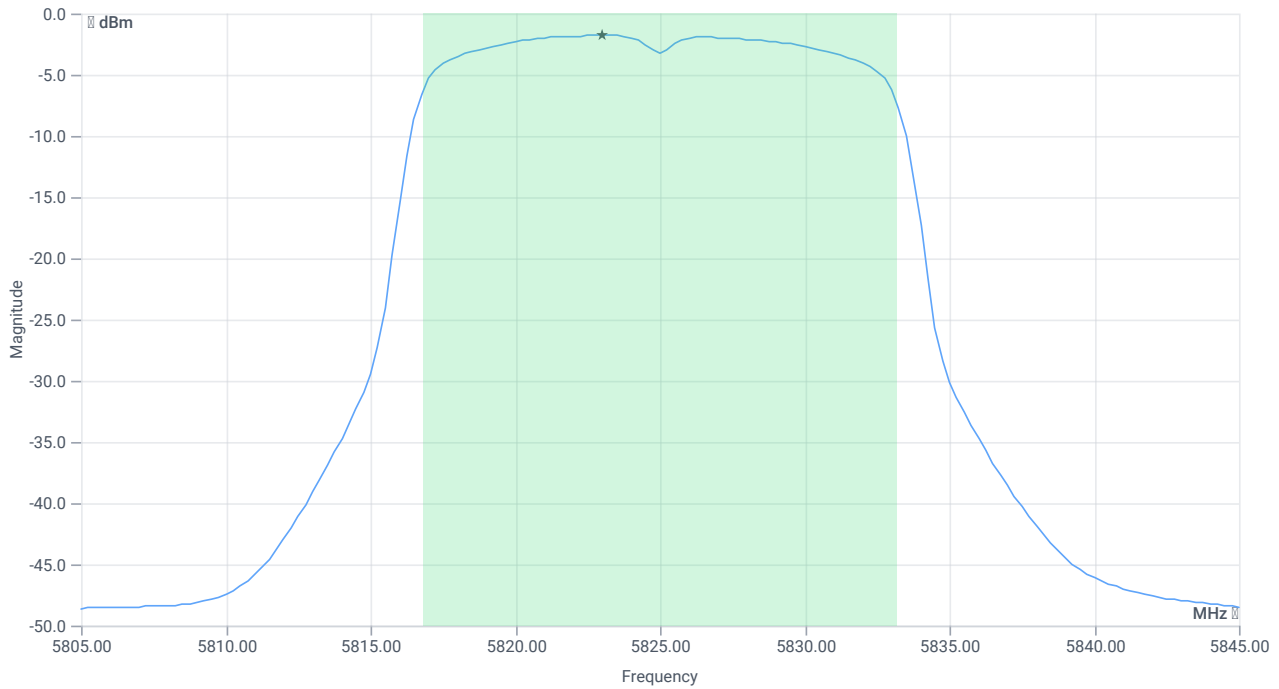

Max OP and PSD


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max Output Power	--	--	9.2	dBm	INFO
Duty Cycle Correction	--	--	0.46	dB	INFO
Limit absolute					
Max Output Power DC corrected	--	30	9.66	dBm	PASS
Limit: 11 dBm + 10 log 16.344					
Max Output Power DC corrected	--	23.13	9.66	dBm	na

Power Spectral Density U-NII-3

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	18.62 16.78 20
Start [MHz] Stop [MHz]	5805.000 5845.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

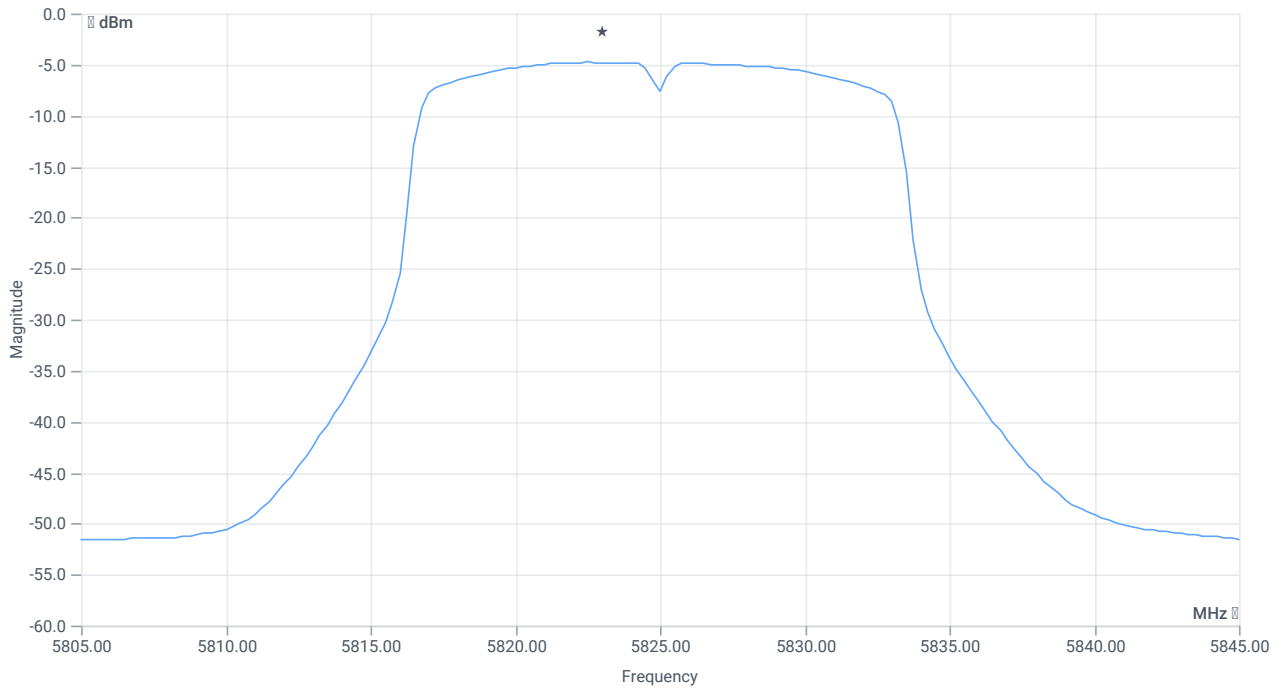

PSD UNII-3

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power Spectral Density	--	--	-4.78	dBm/0.5MHz	INFO
Duty Cycle Correction	--	--	0.46	dB	INFO
Power Spectral Density DC corrected	--	30	-4.32	dBm/0.5MHz	PASS

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-3

References

TC start	27.02.2024 09:58:33
Ambit temp [°C] humidity [rel%]	21.2 39
System version	4.7.1.6
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F, E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx n-HT20 mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx n-HT20 mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5745
Frequency mid to test	False Freq [MHz] 5785
Frequency high to test	False Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1.4
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 5745 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	--	--	6.77	dBm	INFO
Ref. Frequency	--	--	5742.400	MHz	INFO


Evaluation max. Duty Cycle

Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result Summary					
Number of detected Bursts:49					
Duty Cycle (Burst Ratio) max	--	--	0.938	--	INFO
Duty Cycle max	--	--	0.278	dB	INFO
Duty Cycle (Burst Ratio) min	--	--	0.892	--	INFO
Duty Cycle min	--	--	0.496	dB	INFO
Max TX Burst Length	--	--	1.875	ms	INFO
Min Gap Length	--	--	0.125	ms	INFO
Max Gap Length	--	--	0.225	ms	INFO

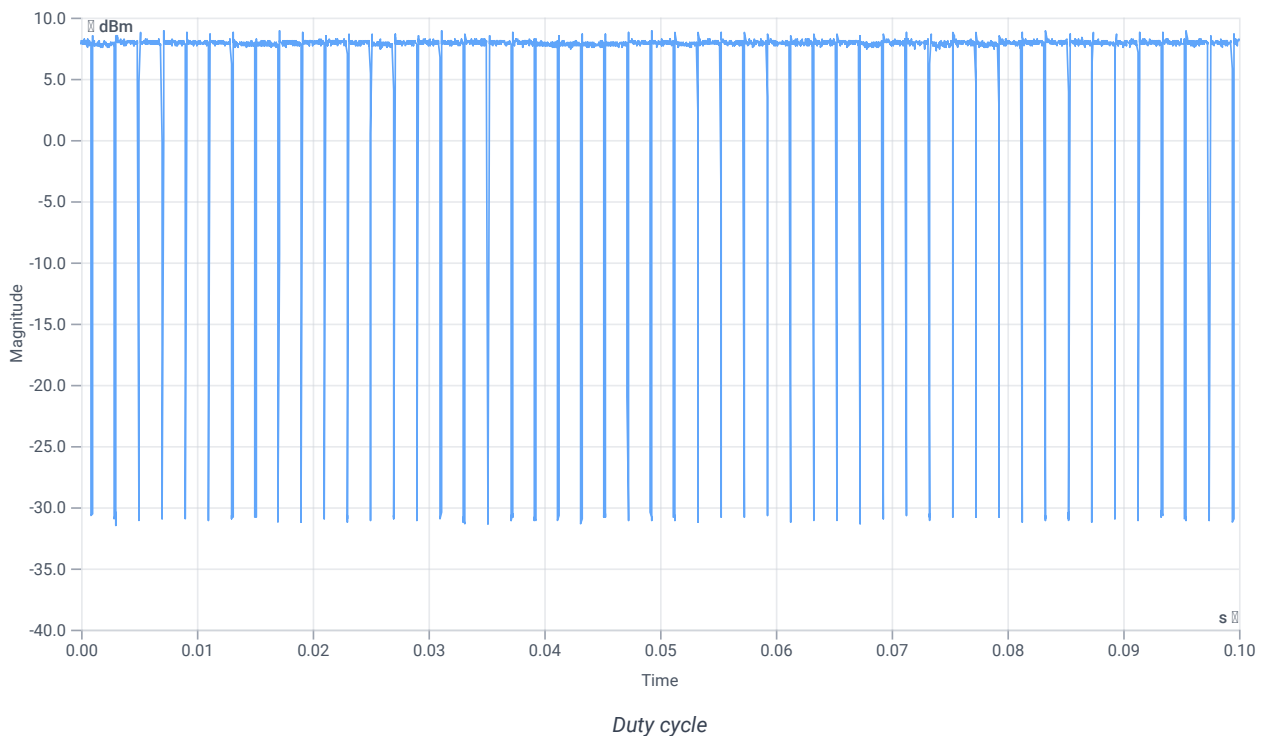

Evaluation Bandwidth

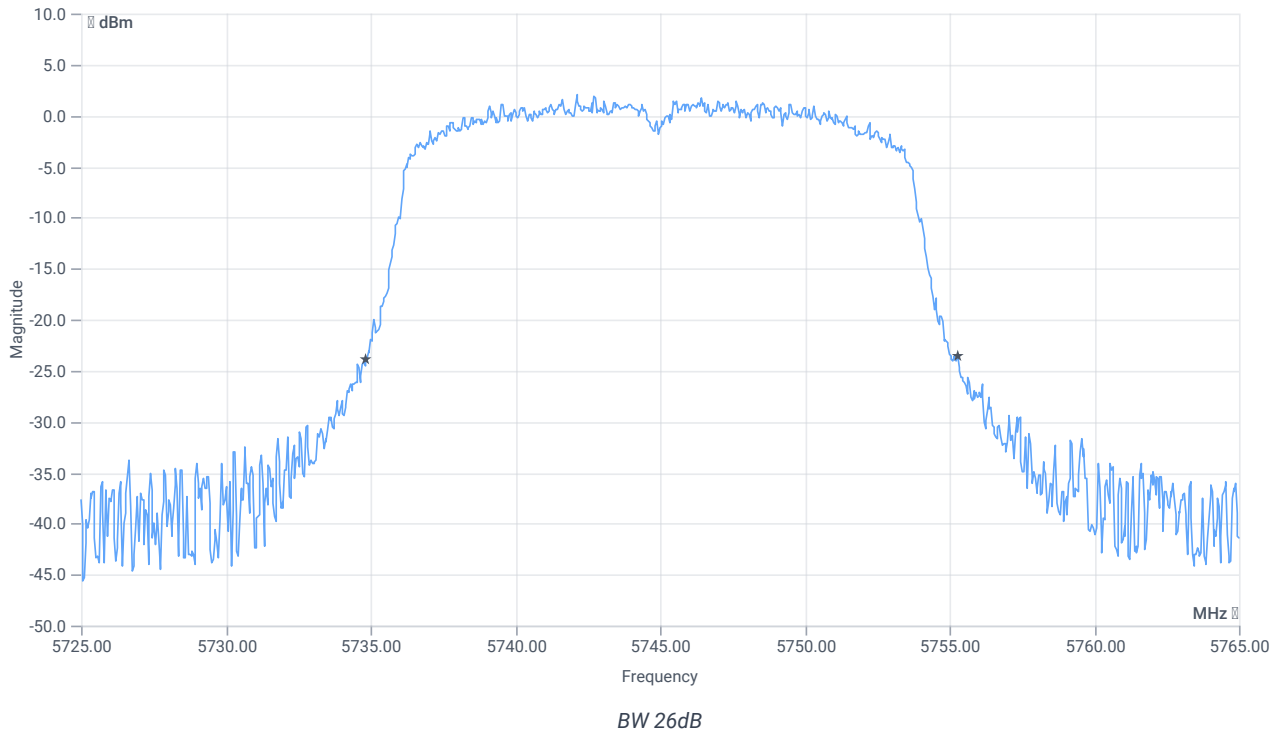


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	20.44	MHz	INFO
T1 26dB	---	---	5734.8400	MHz	INFO
T2 26dB	---	---	5755.2800	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	18.77 16.82 20
Start [MHz] Stop [MHz]	5725.000 5765.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

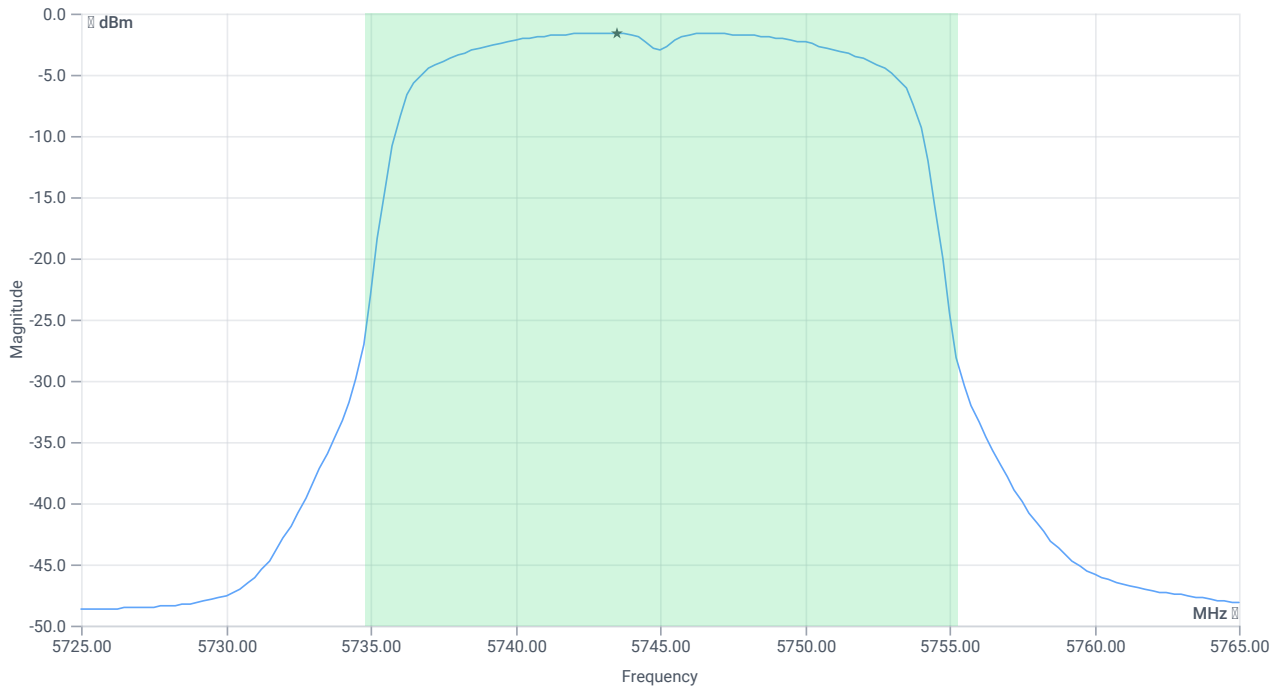

Max OP and PSD


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max Output Power	--	--	9.67	dBm	INFO
Duty Cycle Correction	--	--	0.5	dB	INFO
Limit absolute					
Max Output Power DC corrected	--	30	10.17	dBm	PASS
Limit: 11 dBm + 10 log 20.44					
Max Output Power DC corrected	--	24.1	10.17	dBm	na

Power Spectral Density U-NII-3

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	18.77 16.82 20
Start [MHz] Stop [MHz]	5725.000 5765.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

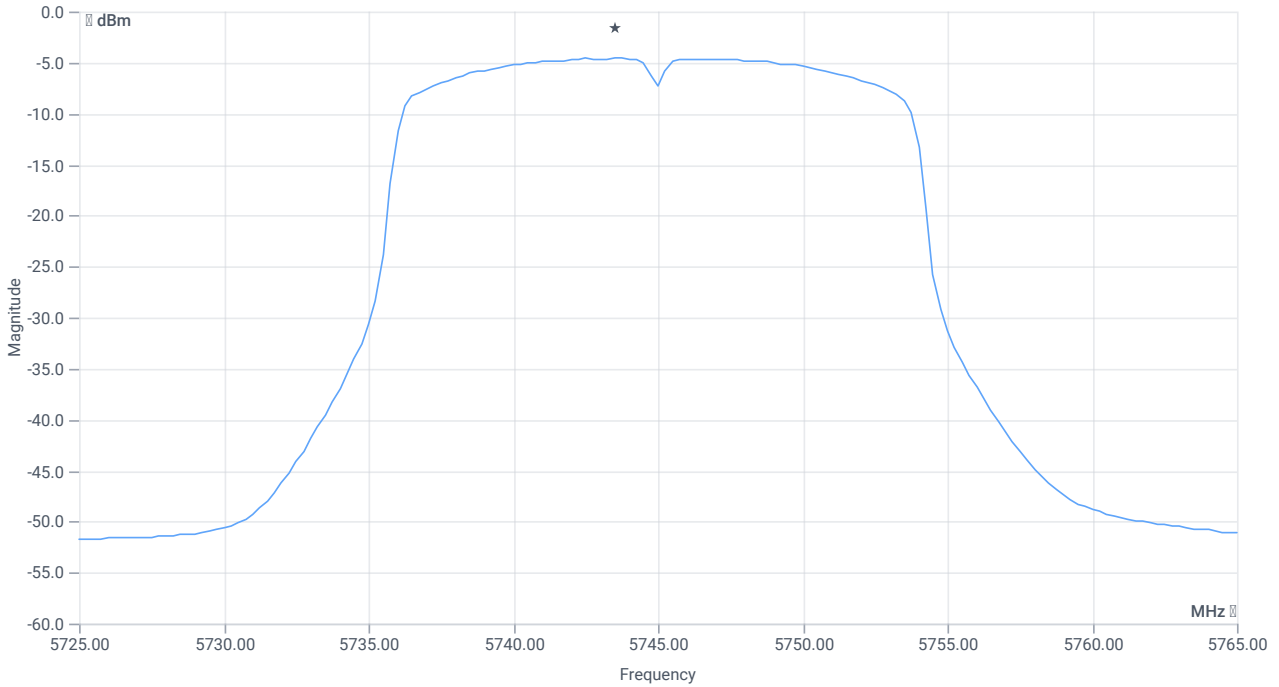

PSD UNII-3

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power Spectral Density	--	--	-4.6	dBm/0.5MHz	INFO
Duty Cycle Correction	--	--	0.5	dB	INFO
Power Spectral Density DC corrected	--	30	-4.1	dBm/0.5MHz	PASS

Verdict

PASS

ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-3

References

TC start	27.02.2024 10:01:02
Ambit temp [°C] humidity [rel%]	21.3 39
System version	4.7.1.6
Standard Version	ISED RSS247 NI
Method	
Description	ISED Max Output Power & PSD - WLAN5Gx n-HT20 mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx n-HT20 mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5745
Frequency mid to test	False Freq [MHz] 5785
Frequency high to test	False Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1.4
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 5745 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	--	--	7.31	dBm	INFO
Ref. Frequency	--	--	5742.000	MHz	INFO


Evaluation max. Duty Cycle

Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result Summary					
Number of detected Bursts:49					
Duty Cycle (Burst Ratio) max	--	--	0.938	--	INFO
Duty Cycle max	--	--	0.278	dB	INFO
Duty Cycle (Burst Ratio) min	--	--	0.892	--	INFO
Duty Cycle min	--	--	0.496	dB	INFO
Max TX Burst Length	--	--	1.875	ms	INFO
Min Gap Length	--	--	0.125	ms	INFO
Max Gap Length	--	--	0.225	ms	INFO

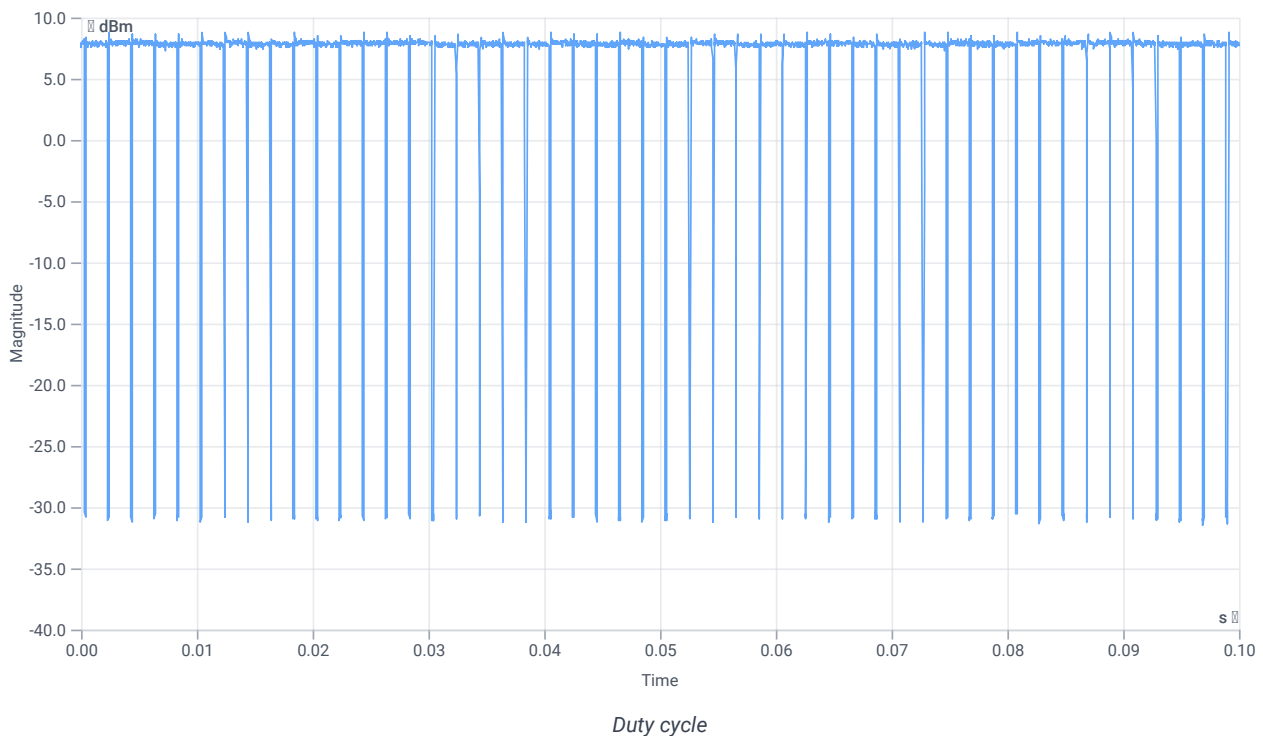

Evaluation Bandwidth

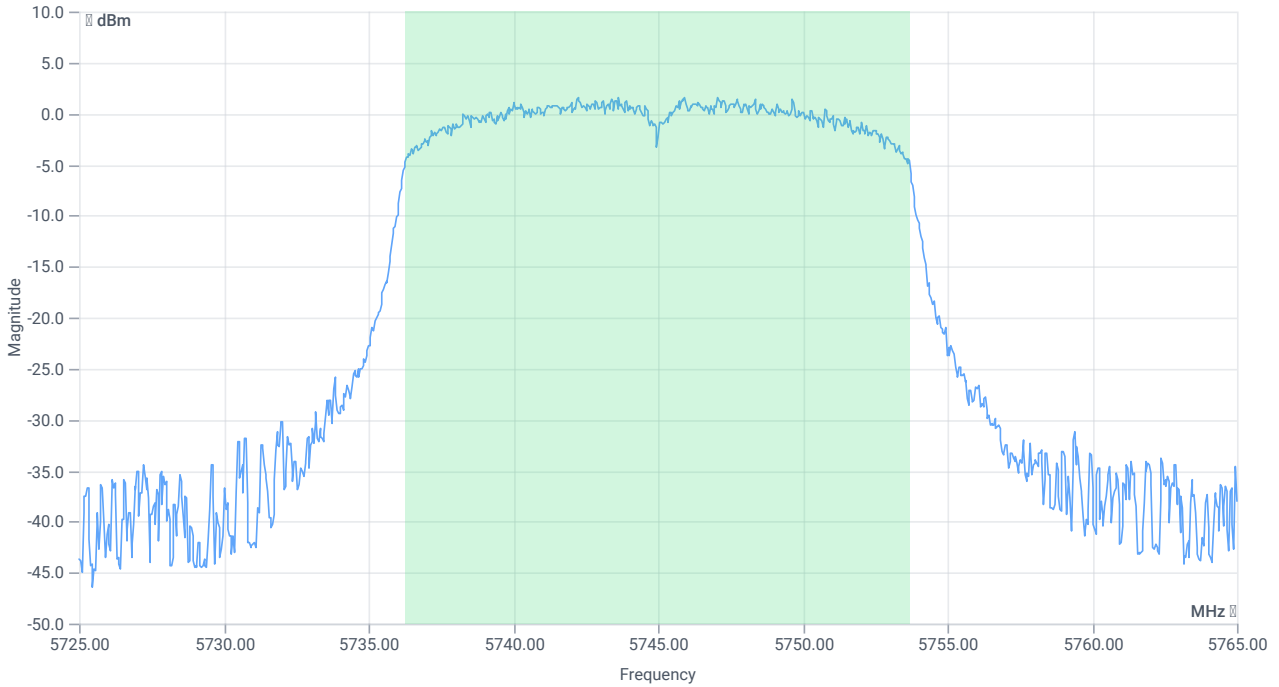

BW 99PCT


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	17.423	MHz	INFO
T1 99%	---	---	5736.2488	MHz	INFO
T2 99%	---	---	5753.6713	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	19.31 16.82 20
Start [MHz] Stop [MHz]	5725.000 5765.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

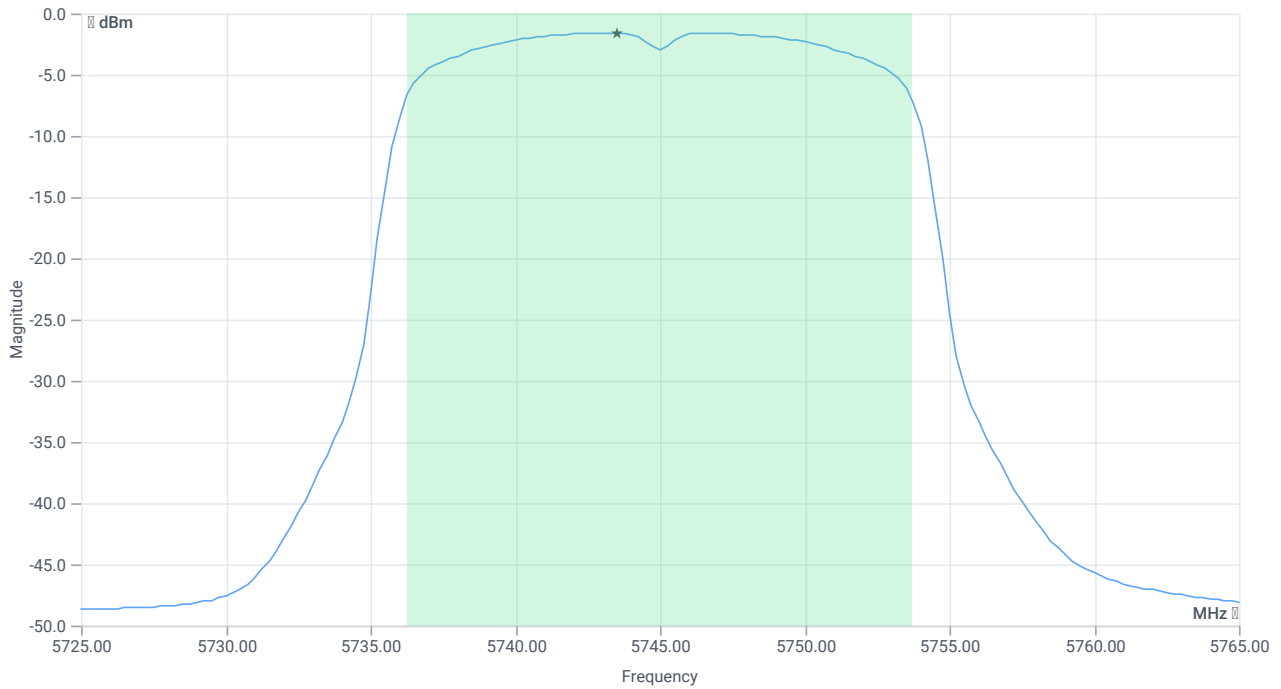

Max OP and PSD


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max Output Power	--	--	9.61	dBm	INFO
Duty Cycle Correction	--	--	0.5	dB	INFO
Limit absolute					
Max Output Power DC corrected	--	30	10.11	dBm	PASS
Limit: 11 dBm + 10 log 17.423					
Max Output Power DC corrected	--	23.41	10.11	dBm	na

Power Spectral Density U-NII-3

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	19.31 16.82 20
Start [MHz] Stop [MHz]	5725.000 5765.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

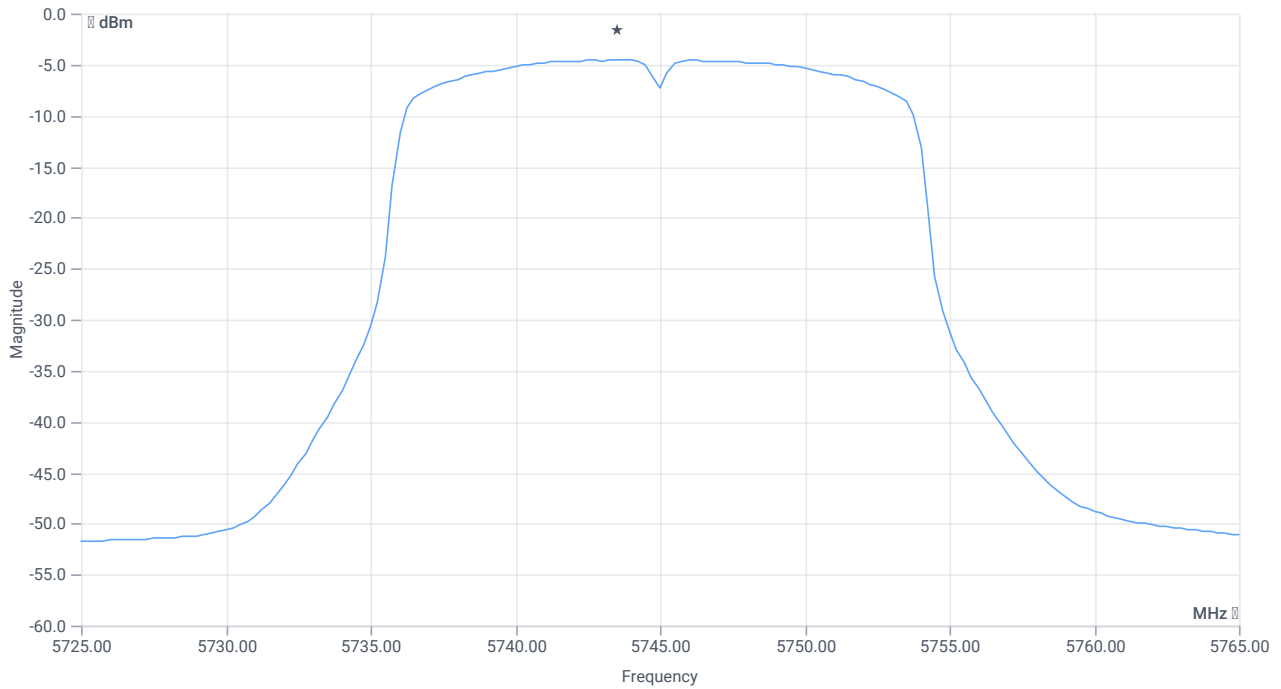

PSD UNII-3

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power Spectral Density	--	--	-4.55	dBm/0.5MHz	INFO
Duty Cycle Correction	--	--	0.5	dB	INFO
Power Spectral Density DC corrected	--	30	-4.05	dBm/0.5MHz	PASS

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-3

References

TC start	27.02.2024 10:06:12
Ambit temp [°C] humidity [rel%]	21.3 39
System version	4.7.1.6
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F, E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx n-HT20 mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx n-HT20 mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5745
Frequency mid to test	True Freq [MHz] 5785
Frequency high to test	False Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1.4
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 5785 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	--	--	5.81	dBm	INFO
Ref. Frequency	--	--	5785.800	MHz	INFO


Evaluation max. Duty Cycle

Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result Summary					
Number of detected Bursts:49					
Duty Cycle (Burst Ratio) max	--	--	0.938	--	INFO
Duty Cycle max	--	--	0.278	dB	INFO
Duty Cycle (Burst Ratio) min	--	--	0.902	--	INFO
Duty Cycle min	--	--	0.448	dB	INFO
Max TX Burst Length	--	--	1.875	ms	INFO
Min Gap Length	--	--	0.125	ms	INFO
Max Gap Length	--	--	0.2	ms	INFO

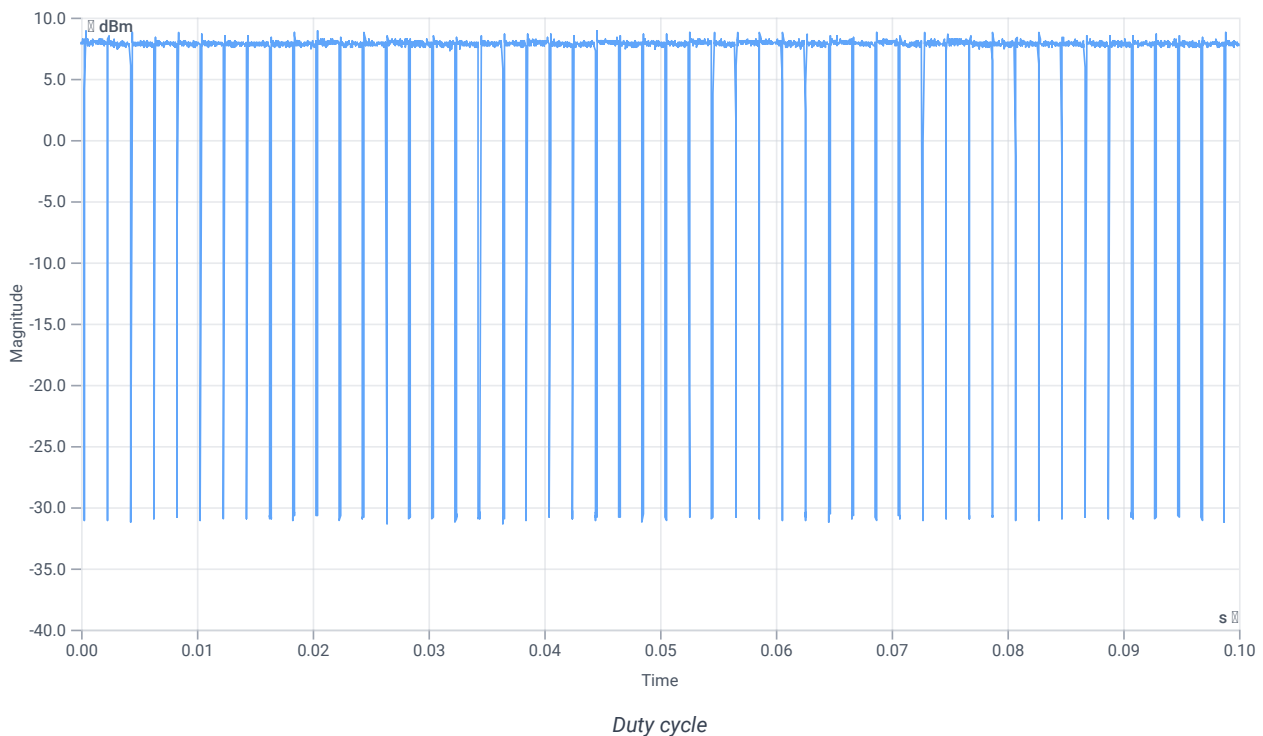

Evaluation Bandwidth

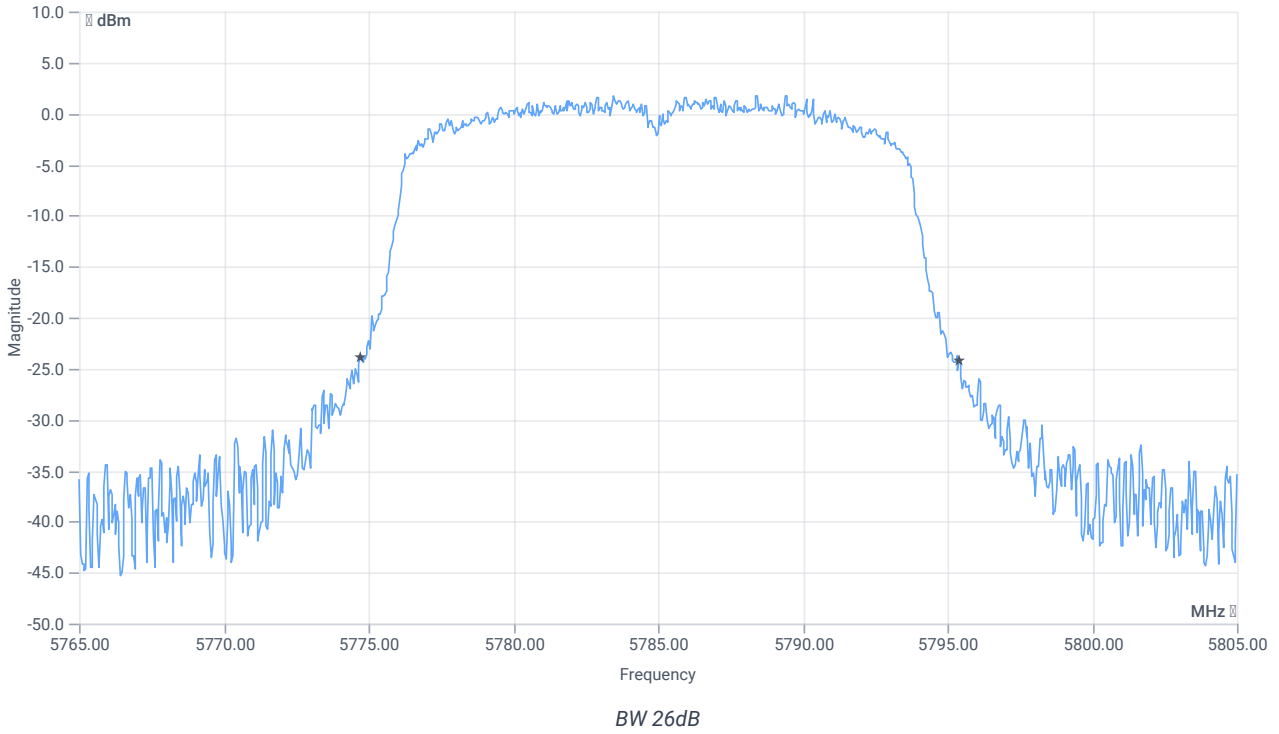


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	20.68	MHz	INFO
T1 26dB	---	---	5774.7200	MHz	INFO
T2 26dB	---	---	5795.4000	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	17.81 16.8 20
Start [MHz] Stop [MHz]	5765.000 5805.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

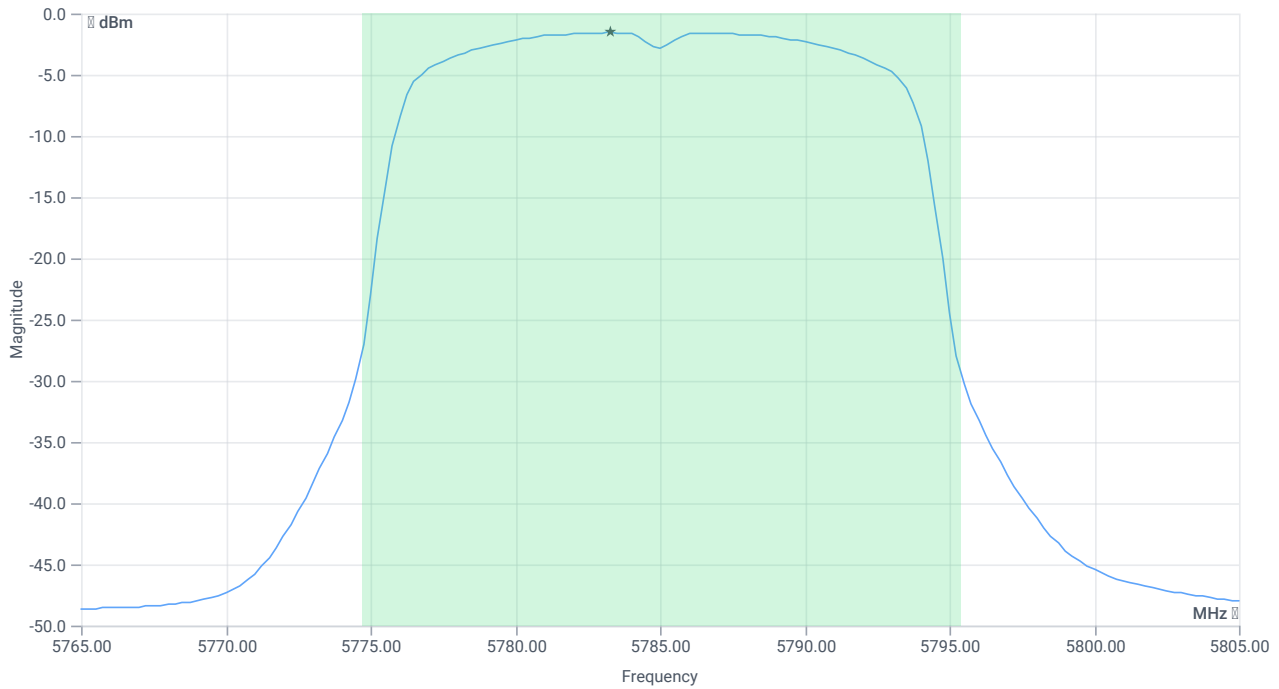

Max OP and PSD


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max Output Power	--	--	9.71	dBm	INFO
Duty Cycle Correction	--	--	0.45	dB	INFO
Limit absolute					
Max Output Power DC corrected	--	30	10.16	dBm	PASS
Limit: 11 dBm + 10 log 20.68					
Max Output Power DC corrected	--	24.16	10.16	dBm	na

Power Spectral Density U-NII-3

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	17.81 16.8 20
Start [MHz] Stop [MHz]	5765.000 5805.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

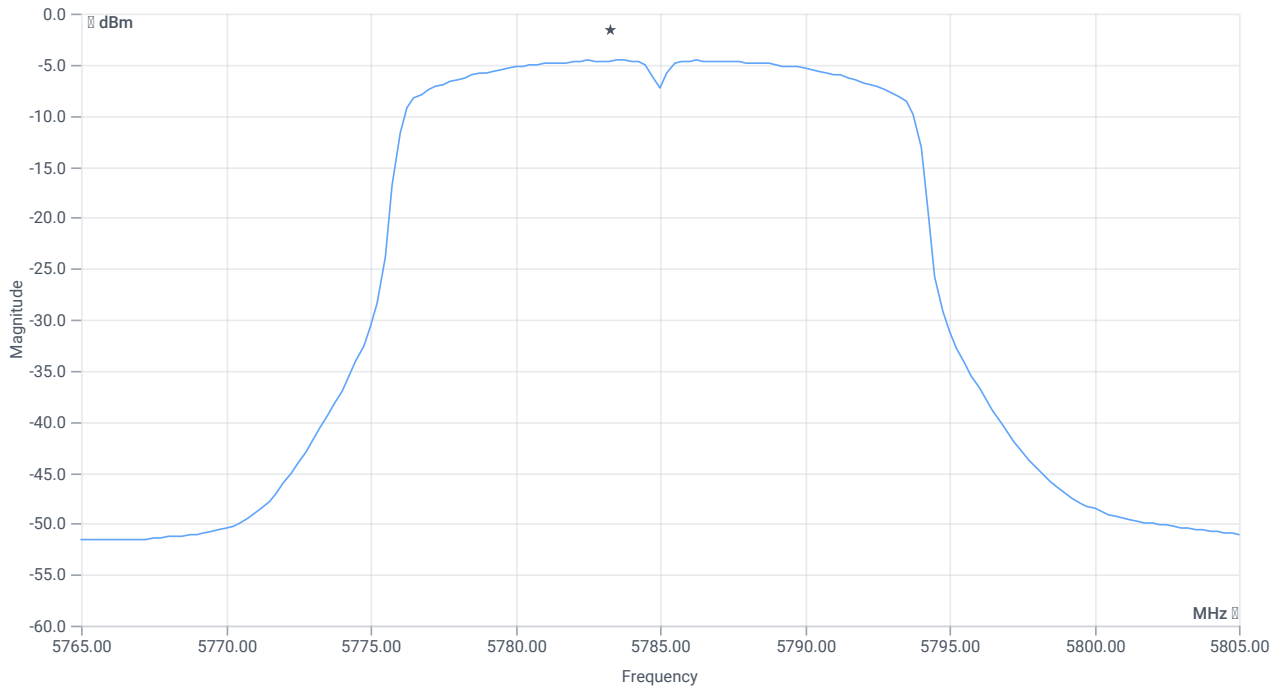

PSD UNII-3

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power Spectral Density	--	--	-4.59	dBm/0.5MHz	INFO
Duty Cycle Correction	--	--	0.45	dB	INFO
Power Spectral Density DC corrected	--	30	-4.14	dBm/0.5MHz	PASS

Verdict

PASS

ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-3

References

TC start	27.02.2024 10:18:46
Ambit temp [°C] humidity [rel%]	21.4 39
System version	4.7.1.6
Standard Version	ISED RSS247 NI
Method	
Description	ISED Max Output Power & PSD - WLAN5Gx n-HT20 mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx n-HT20 mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5745
Frequency mid to test	True Freq [MHz] 5785
Frequency high to test	False Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1.4
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 5785 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	--	--	6.52	dBm	INFO
Ref. Frequency	--	--	5789.000	MHz	INFO


Evaluation max. Duty Cycle

Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result Summary					
Number of detected Bursts:45					
Duty Cycle (Burst Ratio) max	--	--	0.941	--	INFO
Duty Cycle max	--	--	0.264	dB	INFO
Duty Cycle (Burst Ratio) min	--	--	0.899	--	INFO
Duty Cycle min	--	--	0.462	dB	INFO
Max TX Burst Length	--	--	2	ms	INFO
Min Gap Length	--	--	0.125	ms	INFO
Max Gap Length	--	--	0.225	ms	INFO

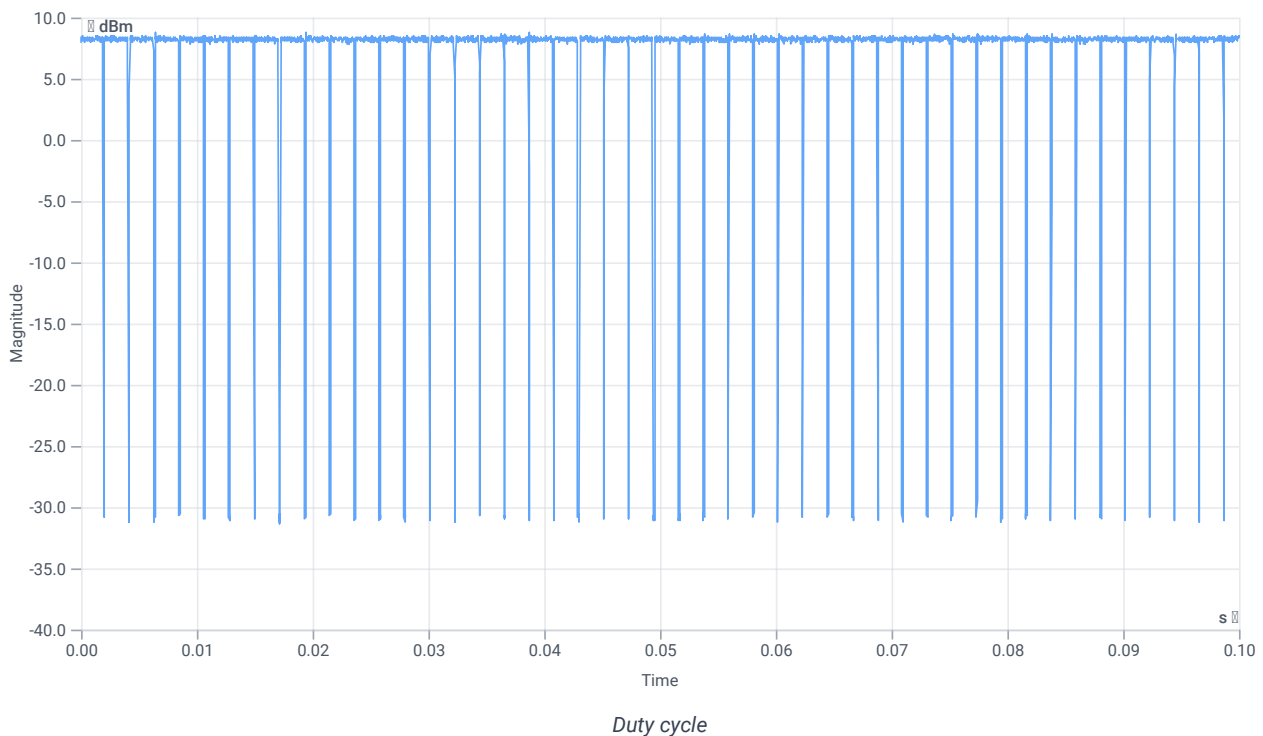

Evaluation Bandwidth

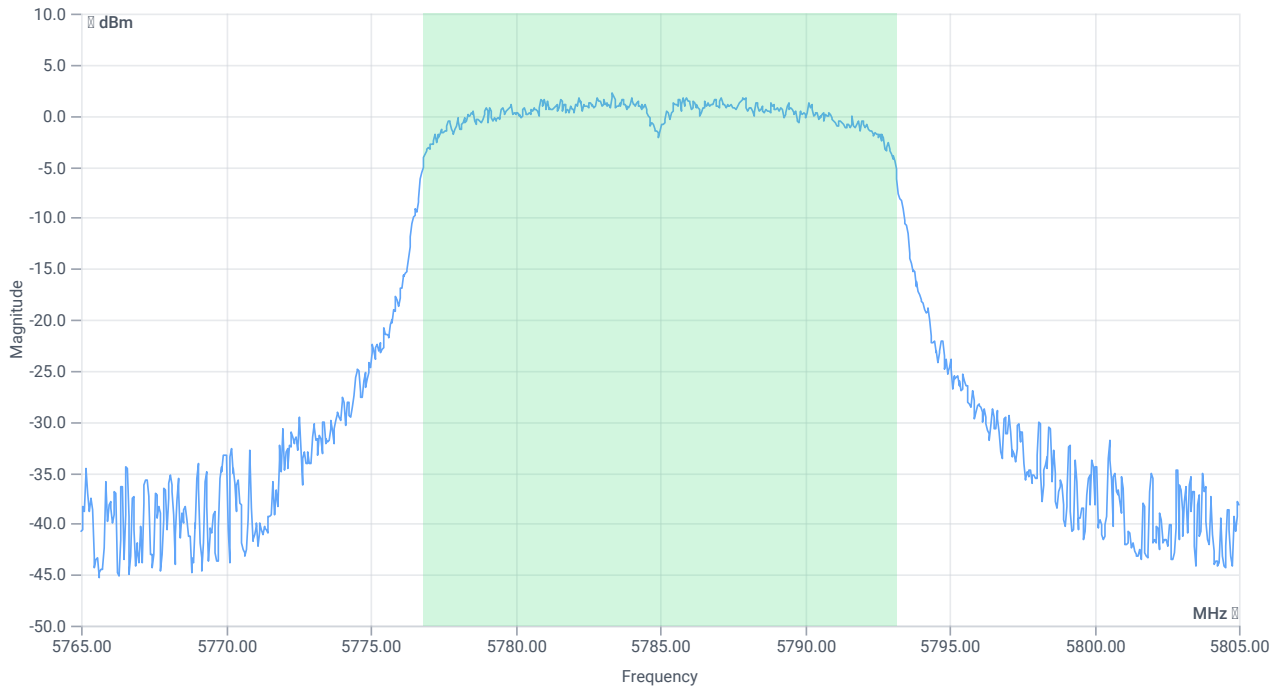

BW 99PCT


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	--	--	16.344	MHz	INFO
T1 99%	--	--	5776.8082	MHz	INFO
T2 99%	--	--	5793.1518	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	18.52 16.8 20
Start [MHz] Stop [MHz]	5765.000 5805.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

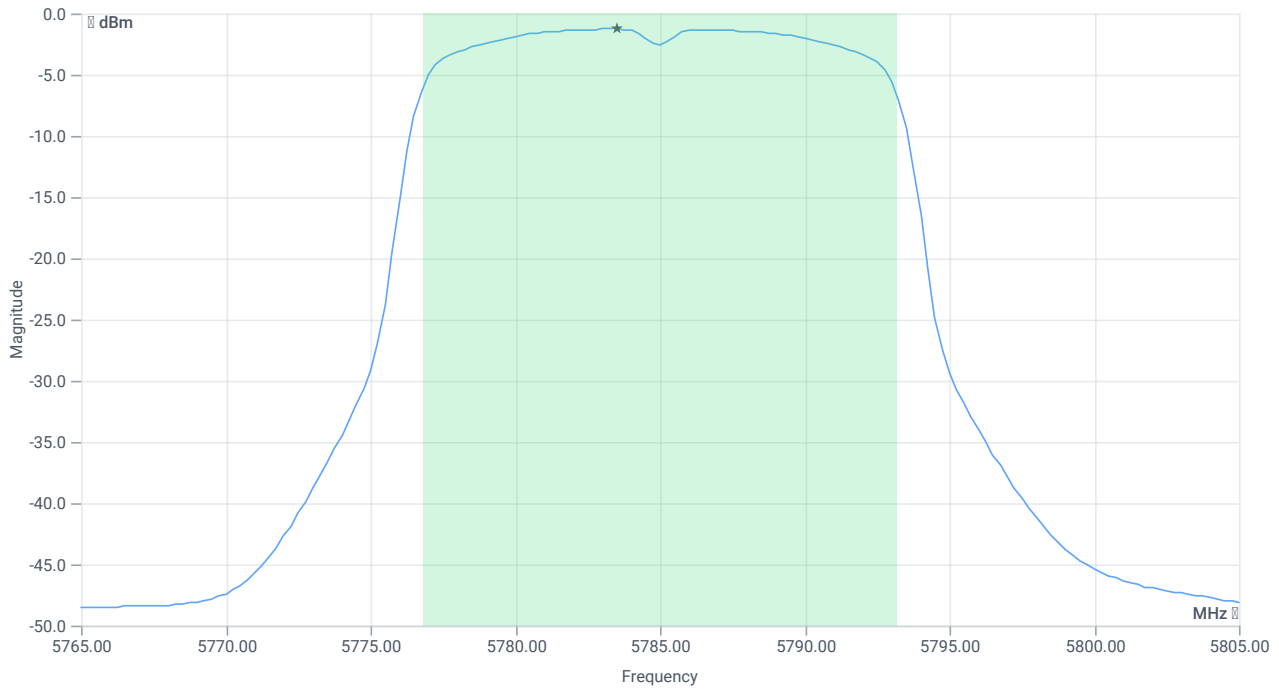

Max OP and PSD


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max Output Power	--	--	9.76	dBm	INFO
Duty Cycle Correction	--	--	0.46	dB	INFO
Limit absolute					
Max Output Power DC corrected	--	30	10.22	dBm	PASS
Limit: 11 dBm + 10 log 16.344					
Max Output Power DC corrected	--	23.13	10.22	dBm	na

Power Spectral Density U-NII-3

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	18.52 16.8 20
Start [MHz] Stop [MHz]	5765.000 5805.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

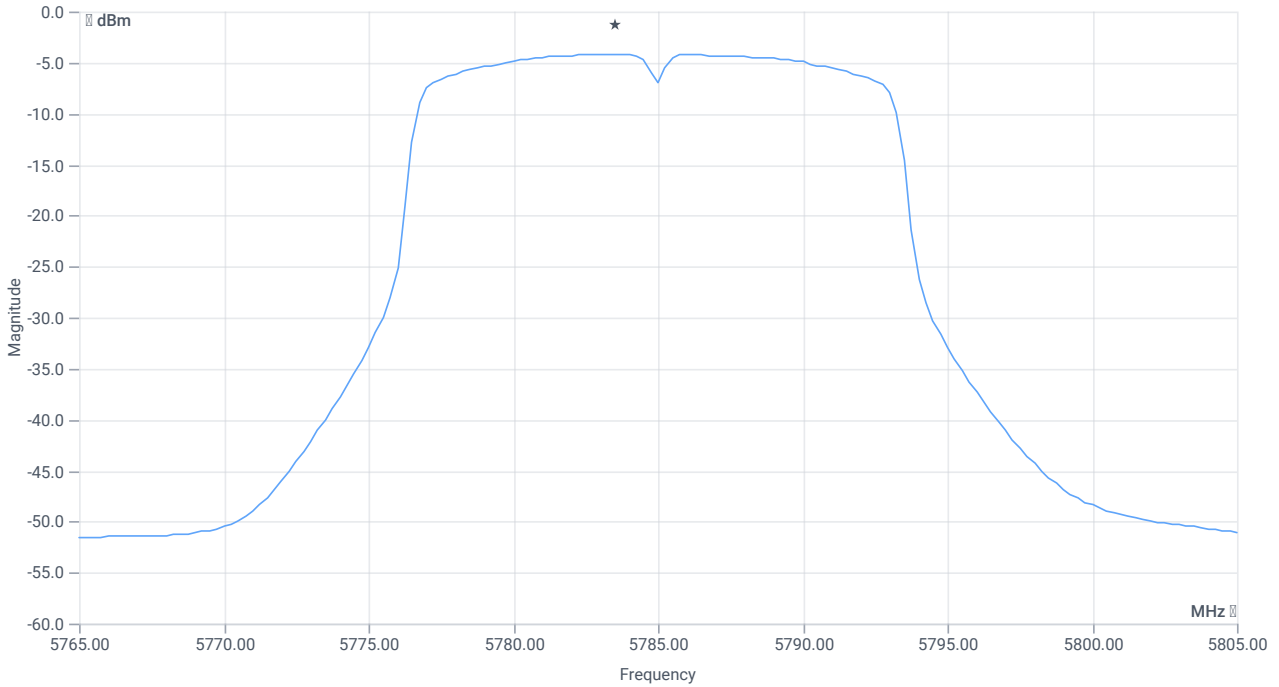

PSD UNII-3

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power Spectral Density	--	--	-4.25	dBm/0.5MHz	INFO
Duty Cycle Correction	--	--	0.46	dB	INFO
Power Spectral Density DC corrected	--	30	-3.79	dBm/0.5MHz	PASS

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-3

References

TC start	27.02.2024 10:21:51
Ambit temp [°C] humidity [rel%]	21.5 39
System version	4.7.1.6
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F, E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx n-HT20 mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx n-HT20 mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5745
Frequency mid to test	False Freq [MHz] 5785
Frequency high to test	True Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1.4
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 5825 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	--	--	5.88	dBm	INFO
Ref. Frequency	--	--	5827.200	MHz	INFO


Evaluation max. Duty Cycle

Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result Summary					
Number of detected Bursts:49					
Duty Cycle (Burst Ratio) max	--	--	0.938	--	INFO
Duty Cycle max	--	--	0.278	dB	INFO
Duty Cycle (Burst Ratio) min	--	--	0.892	--	INFO
Duty Cycle min	--	--	0.496	dB	INFO
Max TX Burst Length	--	--	1.875	ms	INFO
Min Gap Length	--	--	0.125	ms	INFO
Max Gap Length	--	--	0.225	ms	INFO

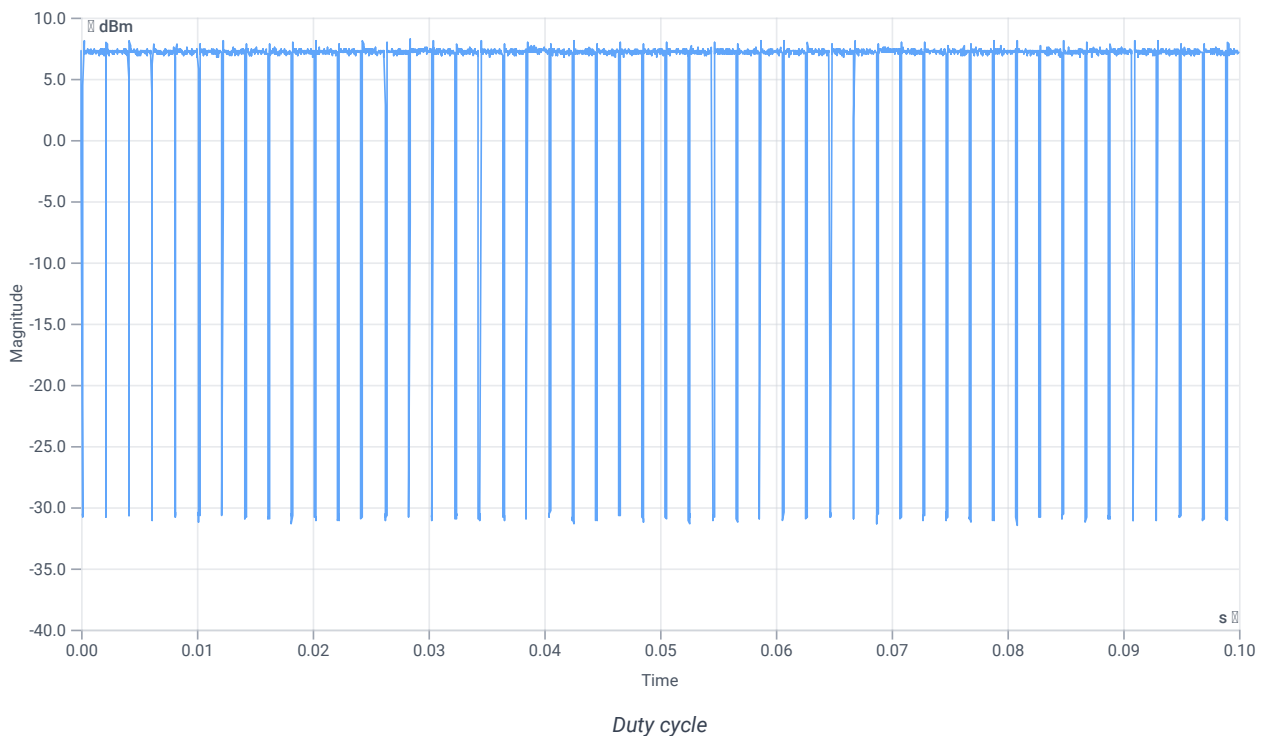

Evaluation Bandwidth

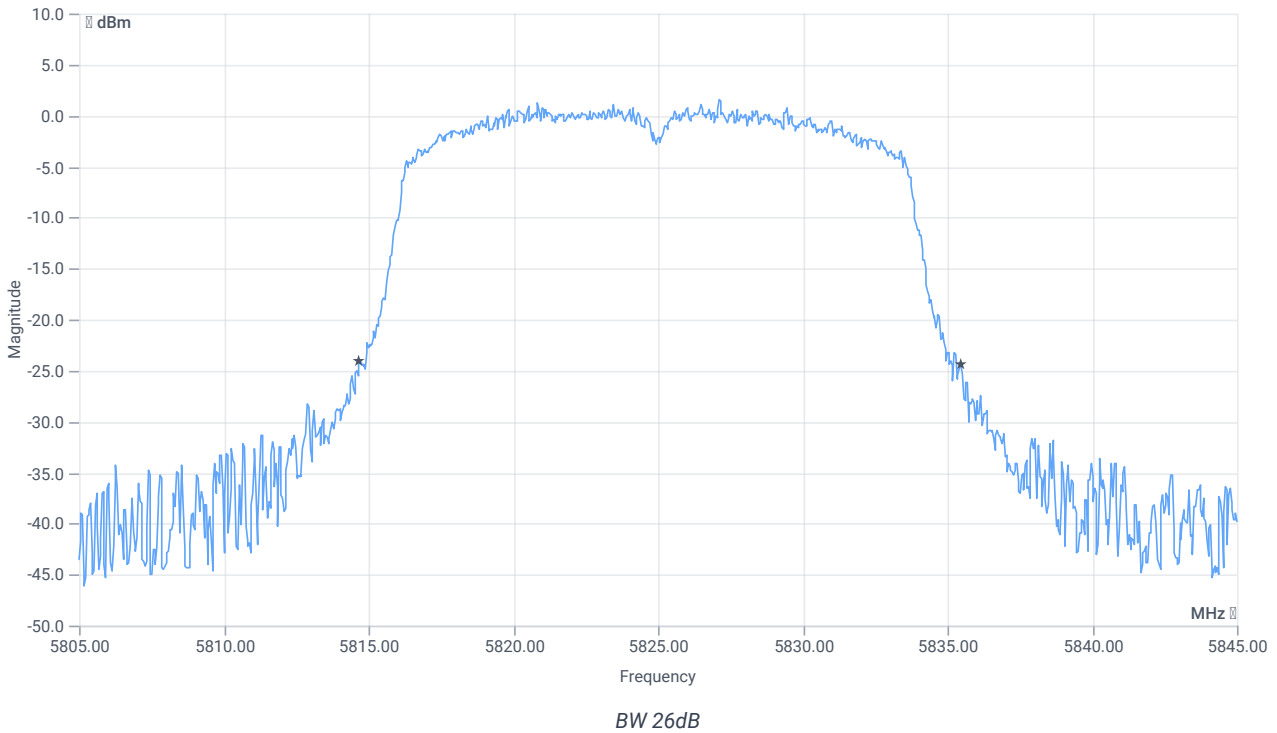


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	20.8	MHz	INFO
T1 26dB	---	---	5814.6800	MHz	INFO
T2 26dB	---	---	5835.4800	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	17.88 16.78 20
Start [MHz] Stop [MHz]	5805.000 5845.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

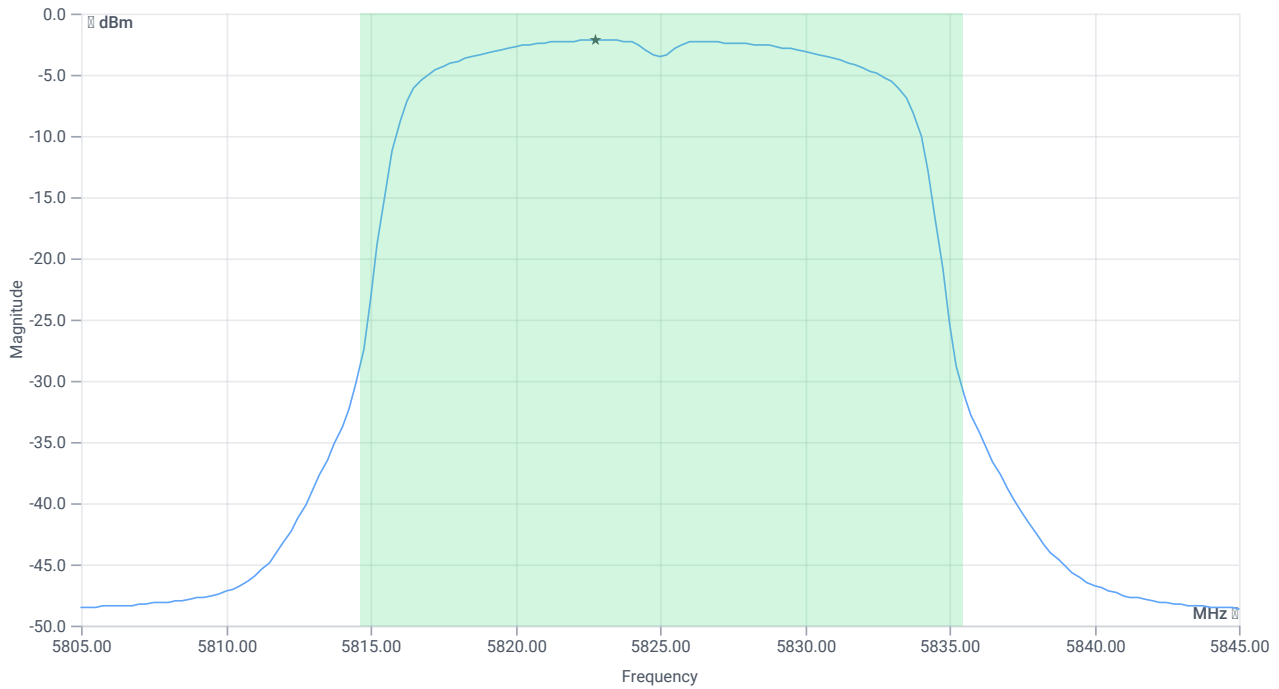

Max OP and PSD


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max Output Power	--	--	9.05	dBm	INFO
Duty Cycle Correction	--	--	0.5	dB	INFO
Limit absolute					
Max Output Power DC corrected	--	30	9.55	dBm	PASS
Limit: 11 dBm + 10 log 20.8					
Max Output Power DC corrected	--	24.18	9.55	dBm	na

Power Spectral Density U-NII-3

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	17.88 16.78 20
Start [MHz] Stop [MHz]	5805.000 5845.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

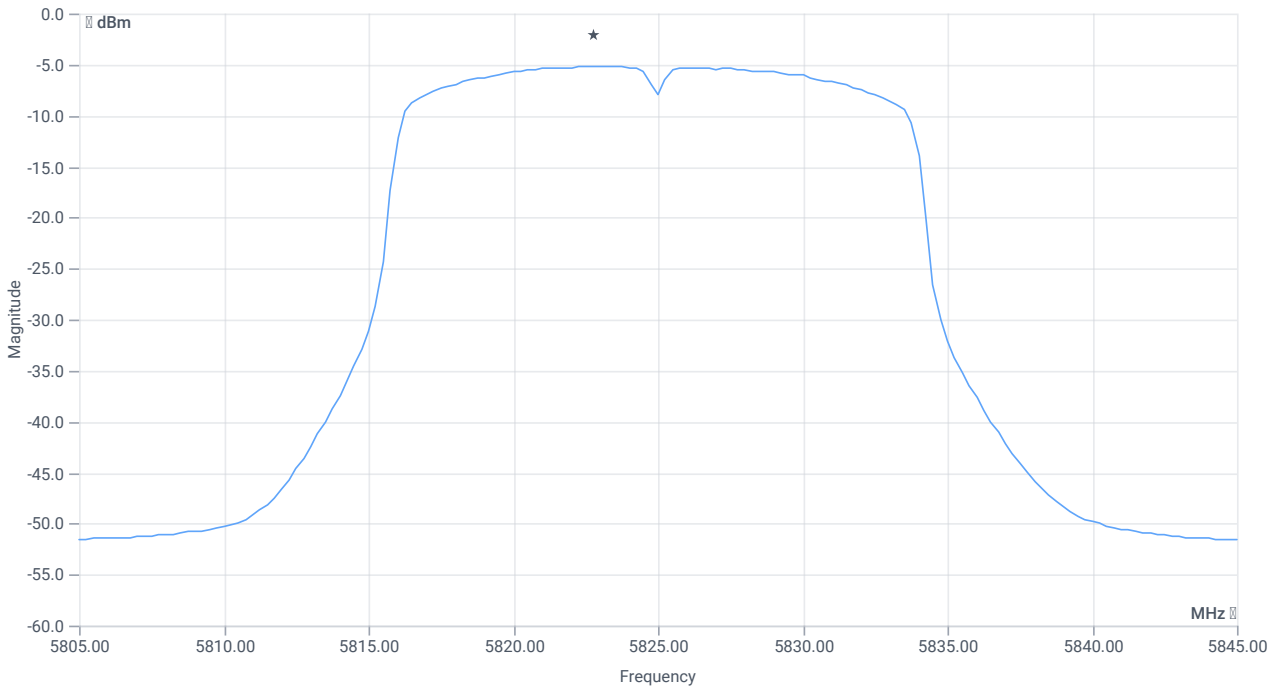

PSD UNII-3

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power Spectral Density	--	--	-5.19	dBm/0.5MHz	INFO
Duty Cycle Correction	--	--	0.5	dB	INFO
Power Spectral Density DC corrected	--	30	-4.69	dBm/0.5MHz	PASS

Verdict

PASS

ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-3

References

TC start	27.02.2024 10:24:19
Ambit temp [°C] humidity [rel%]	21.5 39
System version	4.7.1.6
Standard Version	ISED RSS247 NI
Method	
Description	ISED Max Output Power & PSD - WLAN5Gx n-HT20 mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx n-HT20 mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5745
Frequency mid to test	False Freq [MHz] 5785
Frequency high to test	True Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1.4
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 5825 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	--	--	5.77	dBm	INFO
Ref. Frequency	--	--	5823.800	MHz	INFO


Evaluation max. Duty Cycle

Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result Summary					
Number of detected Bursts:49					
Duty Cycle (Burst Ratio) max	--	--	0.938	--	INFO
Duty Cycle max	--	--	0.278	dB	INFO
Duty Cycle (Burst Ratio) min	--	--	0.892	--	INFO
Duty Cycle min	--	--	0.496	dB	INFO
Max TX Burst Length	--	--	1.875	ms	INFO
Min Gap Length	--	--	0.125	ms	INFO
Max Gap Length	--	--	0.225	ms	INFO

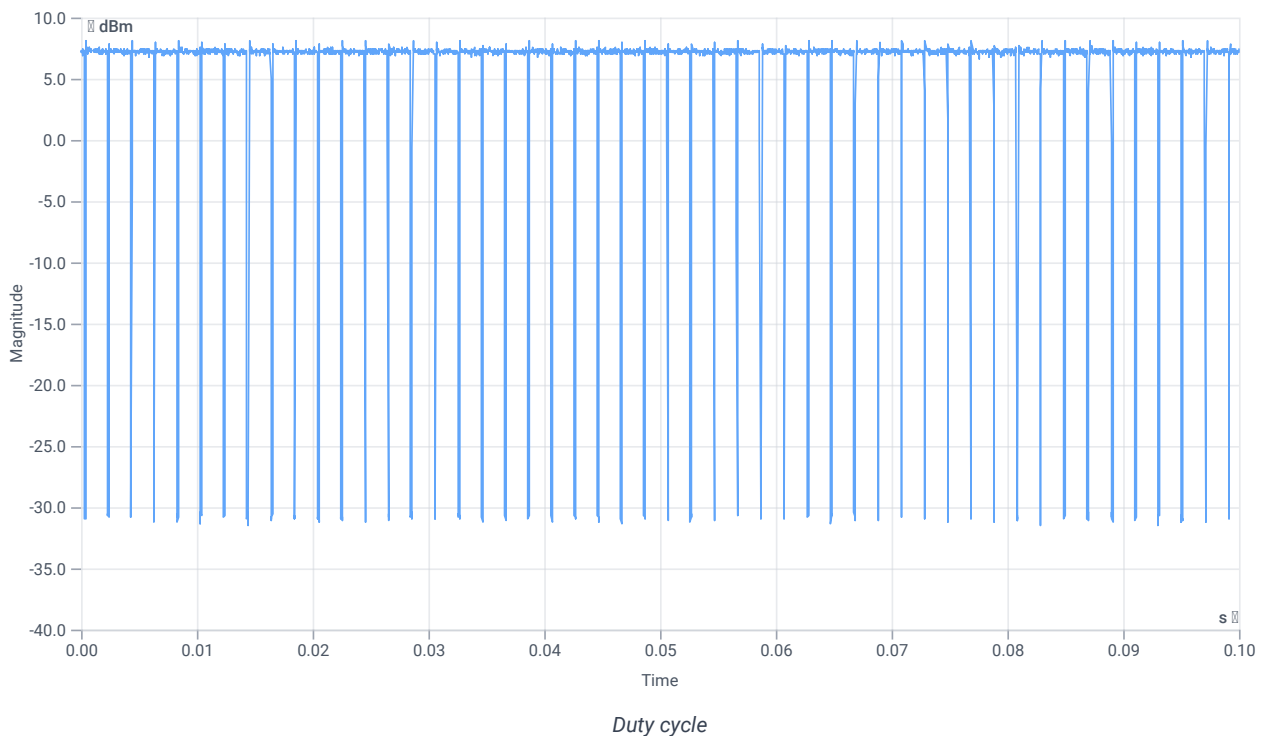

Evaluation Bandwidth

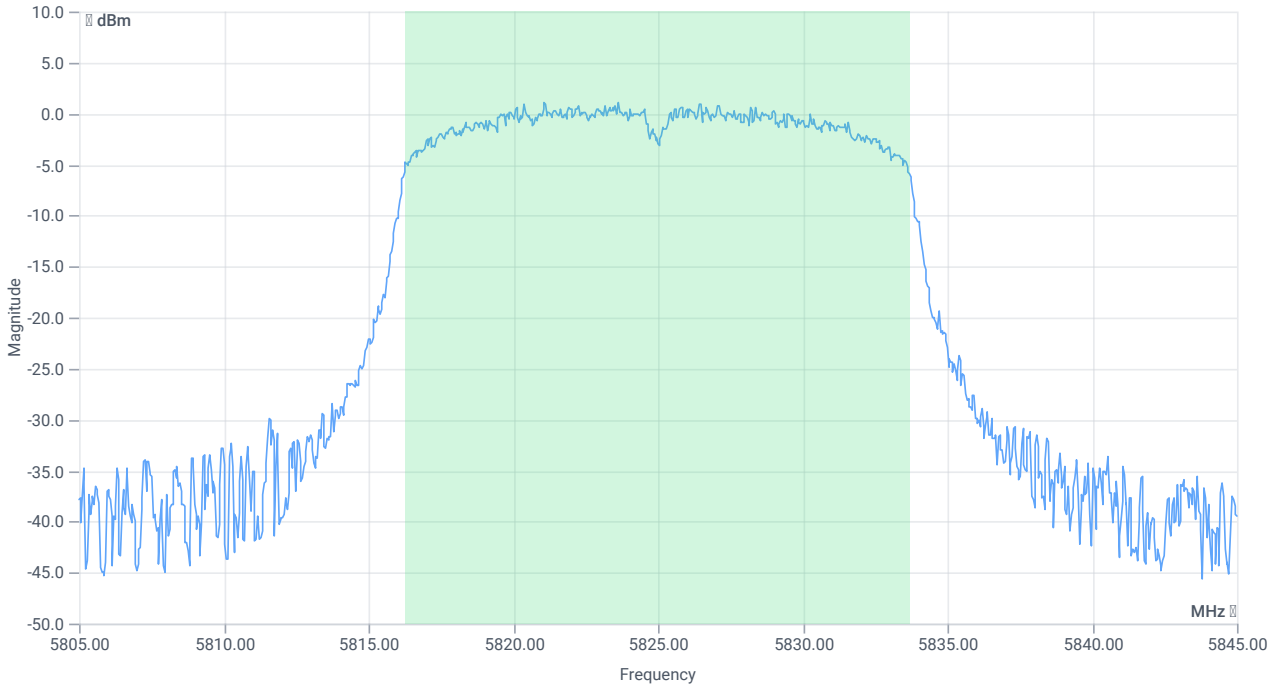

BW 99PCT


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	--	--	17.423	MHz	INFO
T1 99%	--	--	5816.2488	MHz	INFO
T2 99%	--	--	5833.6713	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	17.77 16.78 15
Start [MHz] Stop [MHz]	5805.000 5845.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

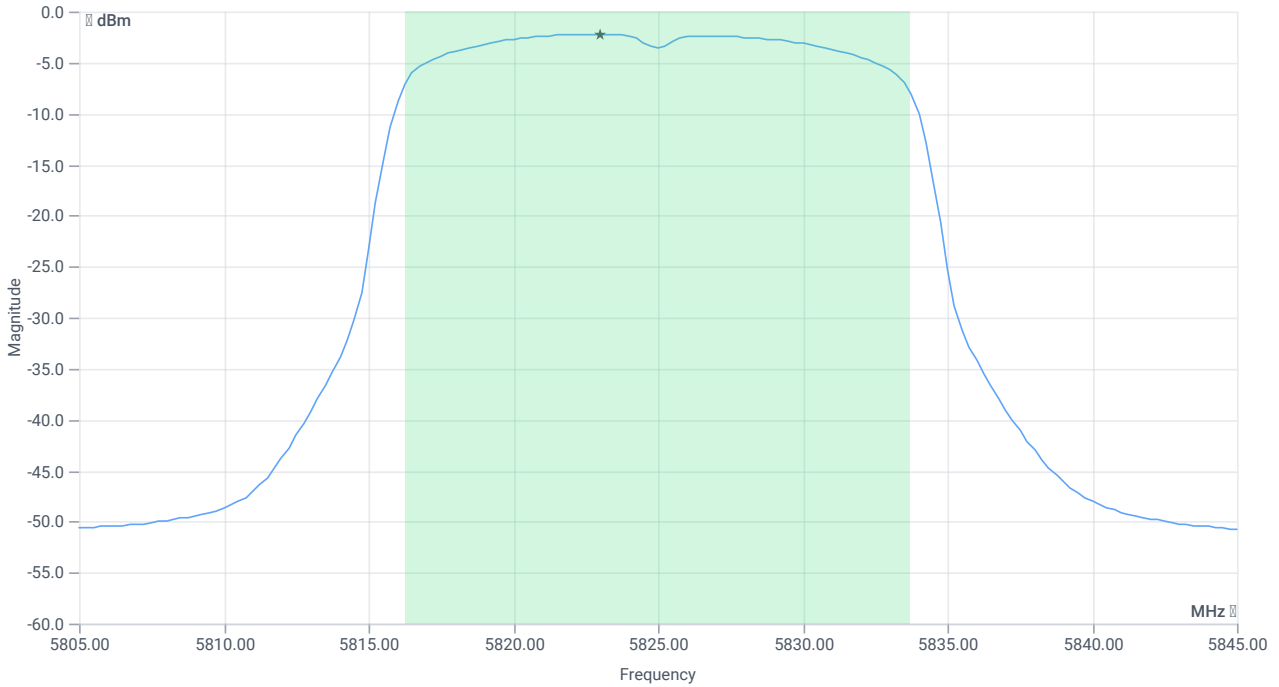

Max OP and PSD


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max Output Power	--	--	8.93	dBm	INFO
Duty Cycle Correction	--	--	0.5	dB	INFO
Limit absolute					
Max Output Power DC corrected	--	30	9.43	dBm	PASS
Limit: 11 dBm + 10 log 17.423					
Max Output Power DC corrected	--	23.41	9.43	dBm	na

Power Spectral Density U-NII-3

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	17.77 16.78 20
Start [MHz] Stop [MHz]	5805.000 5845.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

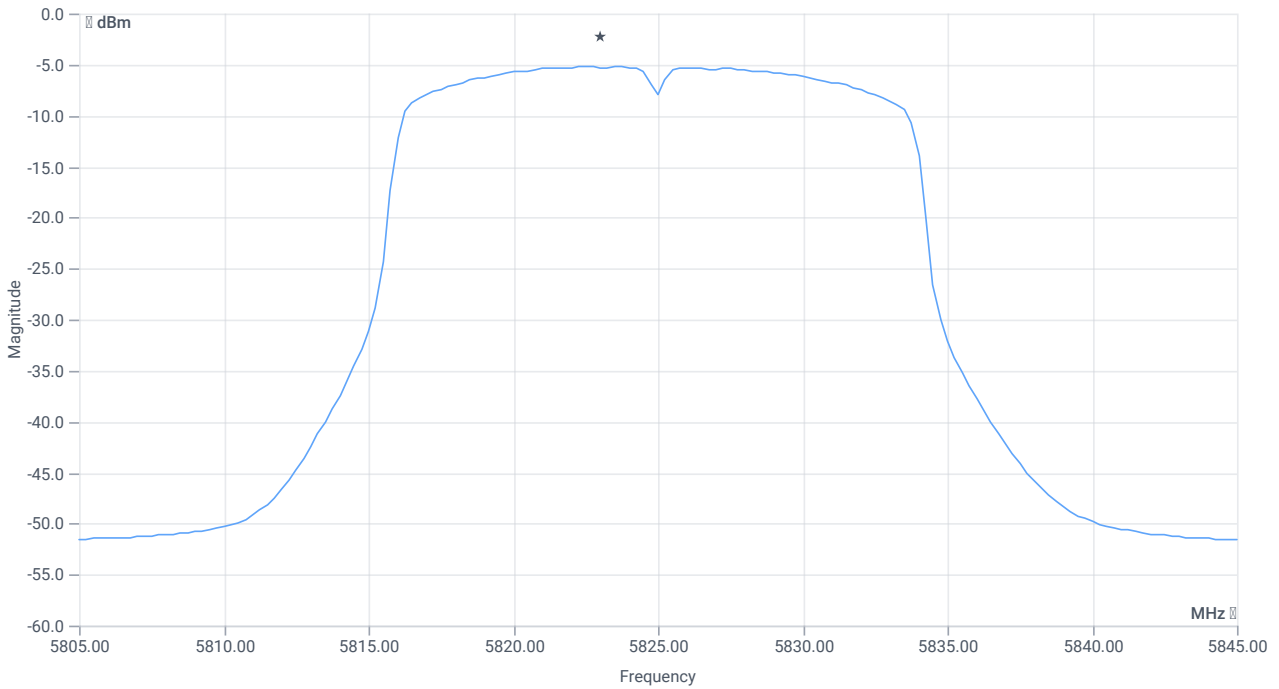

PSD UNII-3

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power Spectral Density	--	--	-5.21	dBm/0.5MHz	INFO
Duty Cycle Correction	--	--	0.5	dB	INFO
Power Spectral Density DC corrected	--	30	-4.71	dBm/0.5MHz	PASS

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-3

References

TC start	27.02.2024 10:32:57
Ambit temp [°C] humidity [rel%]	21.5 39
System version	4.7.1.6
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F, E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx n-HT40 mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx n-HT40 mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5755
Frequency mid to test	False Freq [MHz] 0
Frequency high to test	False Freq [MHz] 5795
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1.4
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 5755 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	--	--	3.85	dBm	INFO
Ref. Frequency	--	--	5751.000	MHz	INFO


Evaluation max. Duty Cycle

Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result Summary					
Number of detected Bursts:94					
Duty Cycle (Burst Ratio) max	--	--	0.878	--	INFO
Duty Cycle max	--	--	0.565	dB	INFO
Duty Cycle (Burst Ratio) min	--	--	0.795	--	INFO
Duty Cycle min	--	--	0.996	dB	INFO
Max TX Burst Length	--	--	0.9	ms	INFO
Min Gap Length	--	--	0.125	ms	INFO
Max Gap Length	--	--	0.225	ms	INFO

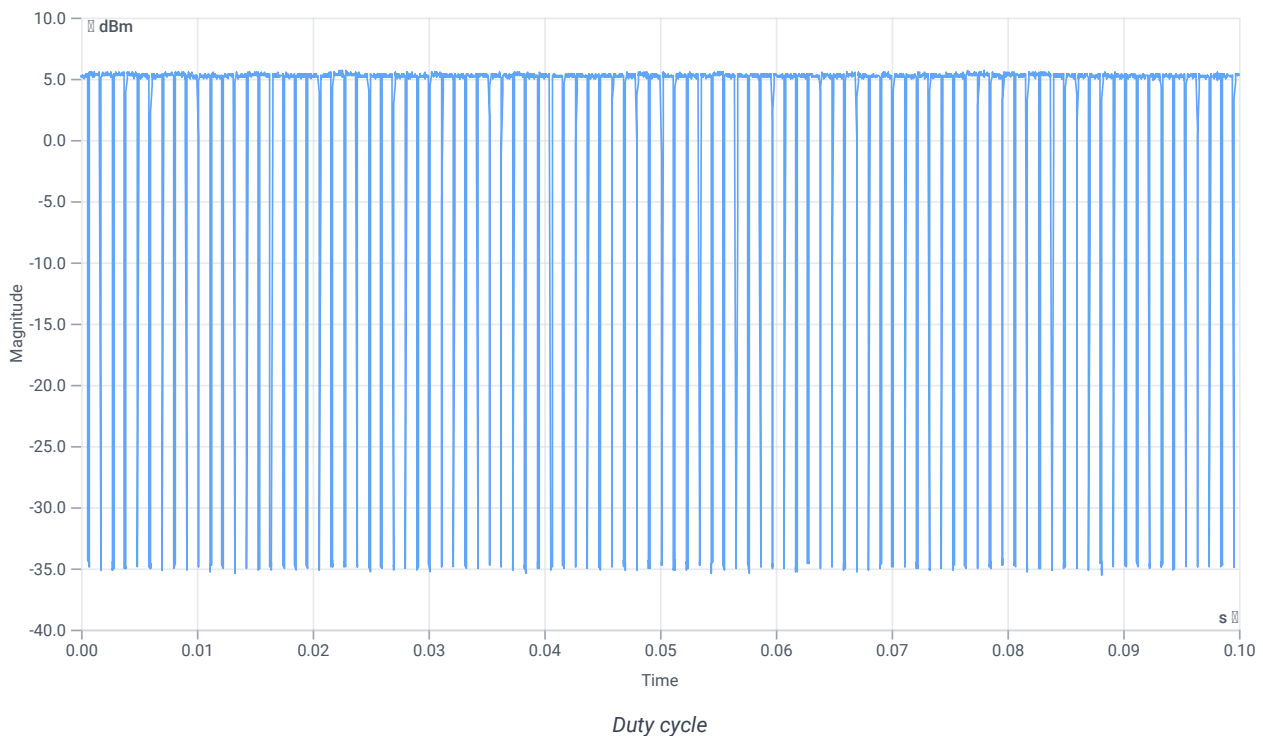

Evaluation Bandwidth

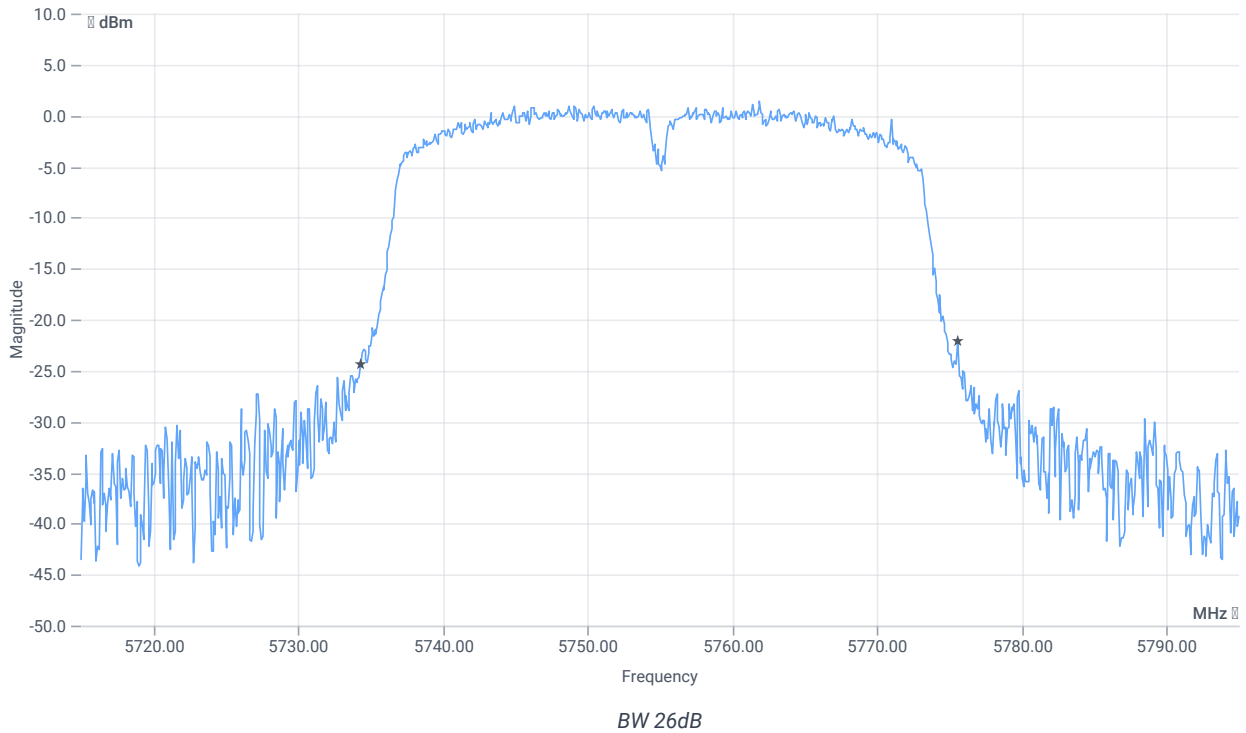


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	41.28	MHz	INFO
T1 26dB	---	---	5734.2800	MHz	INFO
T2 26dB	---	---	5775.5600	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.86 16.87 15
Start [MHz] Stop [MHz]	5715.000 5795.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

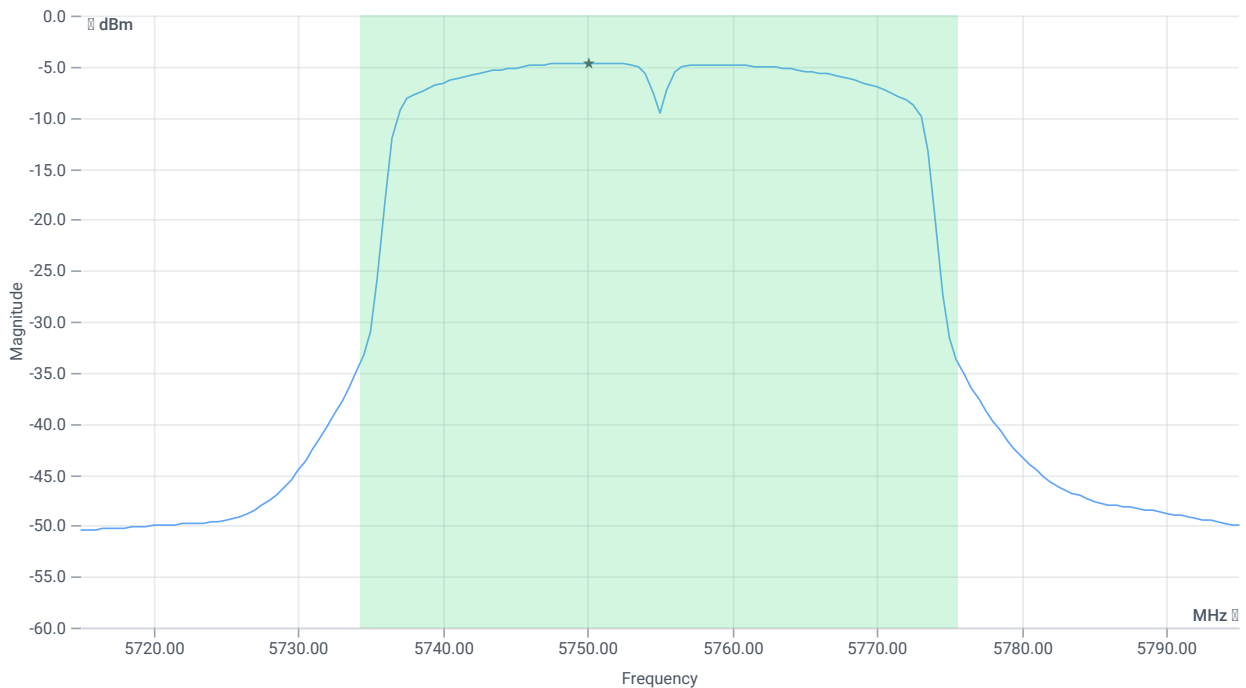

Max OP and PSD


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max Output Power	--	--	9.65	dBm	INFO
Duty Cycle Correction	--	--	1	dB	INFO
Limit absolute					
Max Output Power DC corrected	--	30	10.65	dBm	PASS
Limit: 11 dBm + 10 log 41.28					
Max Output Power DC corrected	--	27.16	10.65	dBm	na

Power Spectral Density U-NII-3

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.86 16.87 15
Start [MHz] Stop [MHz]	5715.000 5795.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

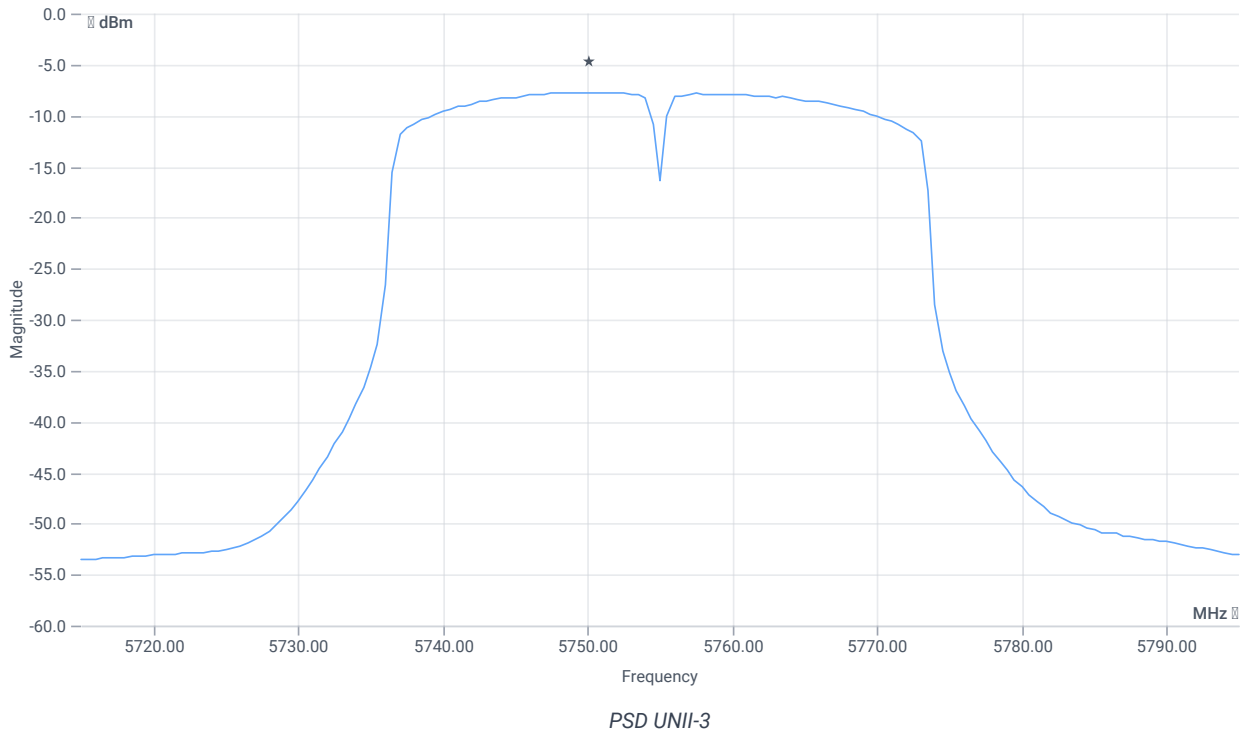

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power Spectral Density	--	--	-7.71	dBm/0.5MHz	INFO
Duty Cycle Correction	--	--	1	dB	INFO
Power Spectral Density DC corrected	--	30	-6.71	dBm/0.5MHz	PASS

Verdict

PASS

ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-3

References

TC start	27.02.2024 10:35:24
Ambit temp [°C] humidity [rel%]	21.5 39
System version	4.7.1.6
Standard Version	ISED RSS247 NI
Method	
Description	ISED Max Output Power & PSD - WLAN5Gx n-HT40 mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx n-HT40 mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5755
Frequency mid to test	False Freq [MHz] 0
Frequency high to test	False Freq [MHz] 5795
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1.4
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 5755 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	--	--	4.24	dBm	INFO
Ref. Frequency	--	--	5750.600	MHz	INFO


Evaluation max. Duty Cycle

Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result Summary					
Number of detected Bursts:94					
Duty Cycle (Burst Ratio) max	--	--	0.878	--	INFO
Duty Cycle max	--	--	0.565	dB	INFO
Duty Cycle (Burst Ratio) min	--	--	0.814	--	INFO
Duty Cycle min	--	--	0.894	dB	INFO
Max TX Burst Length	--	--	0.9	ms	INFO
Min Gap Length	--	--	0.125	ms	INFO
Max Gap Length	--	--	0.2	ms	INFO

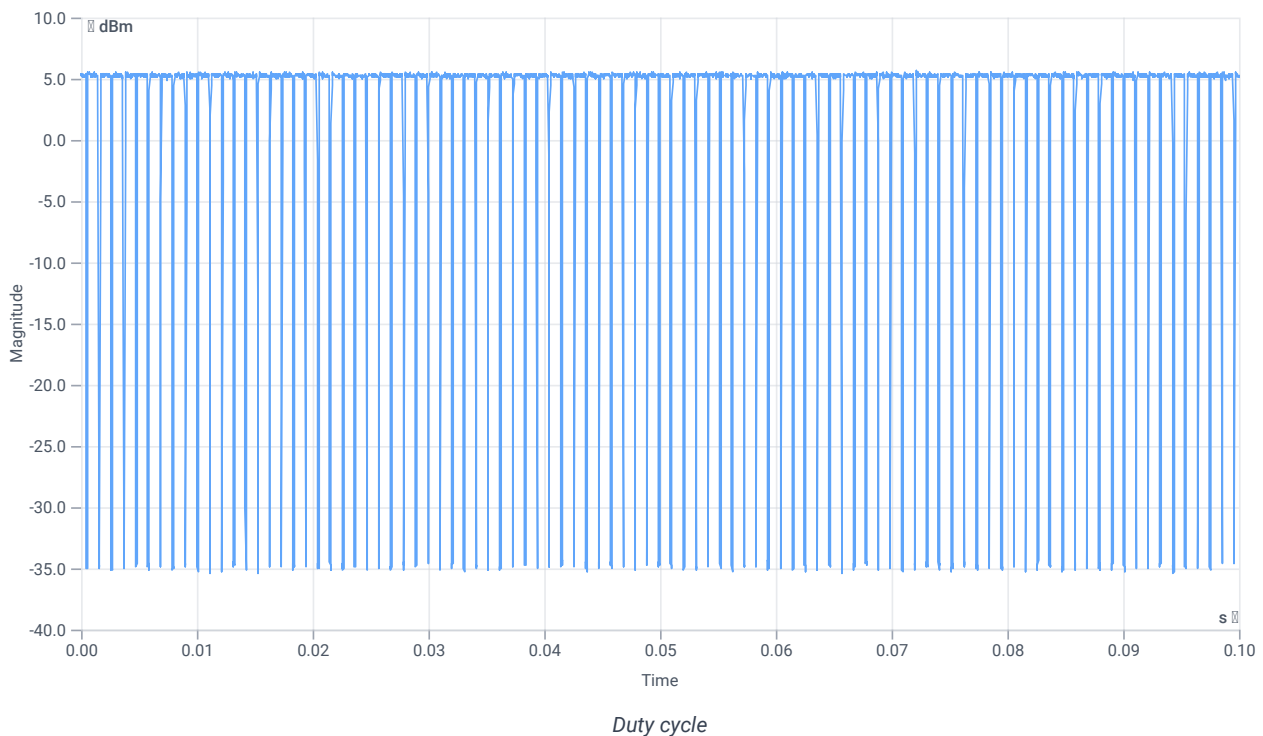

Evaluation Bandwidth

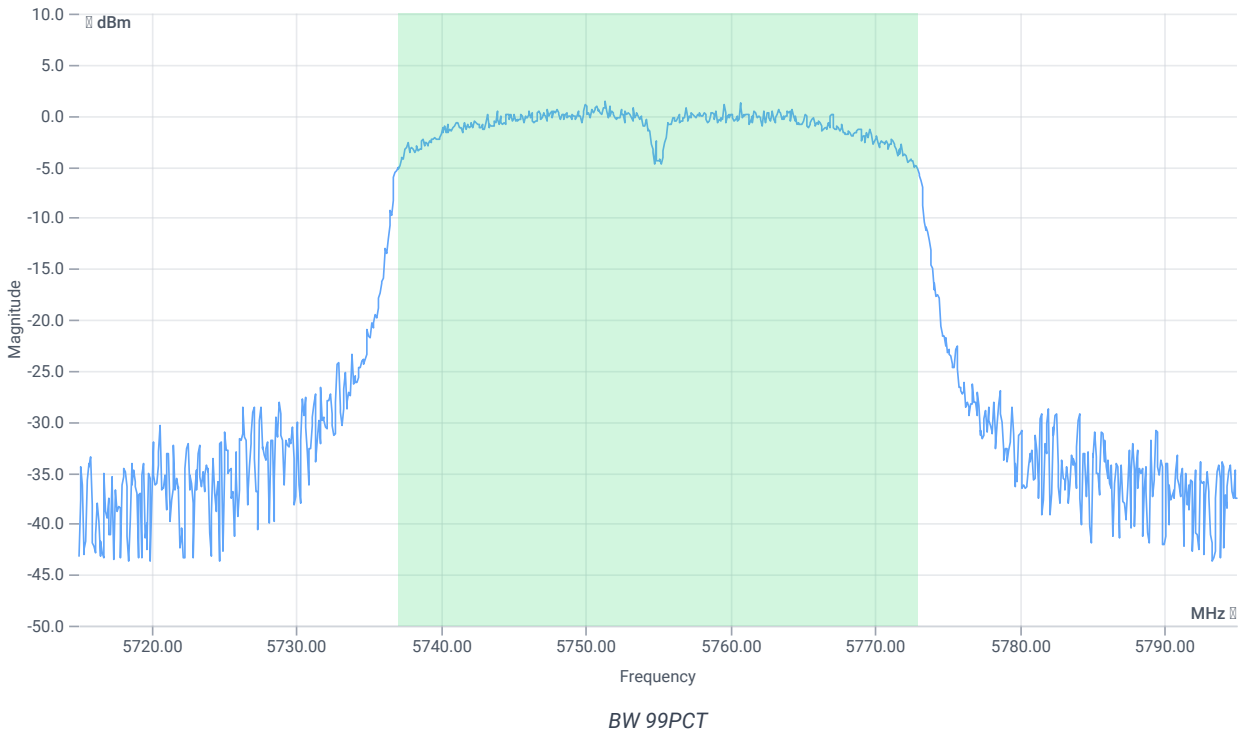


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	35.964	MHz	INFO
T1 99%	---	---	5737.0180	MHz	INFO
T2 99%	---	---	5772.9820	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	16.24 16.87 15
Start [MHz] Stop [MHz]	5715.000 5795.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

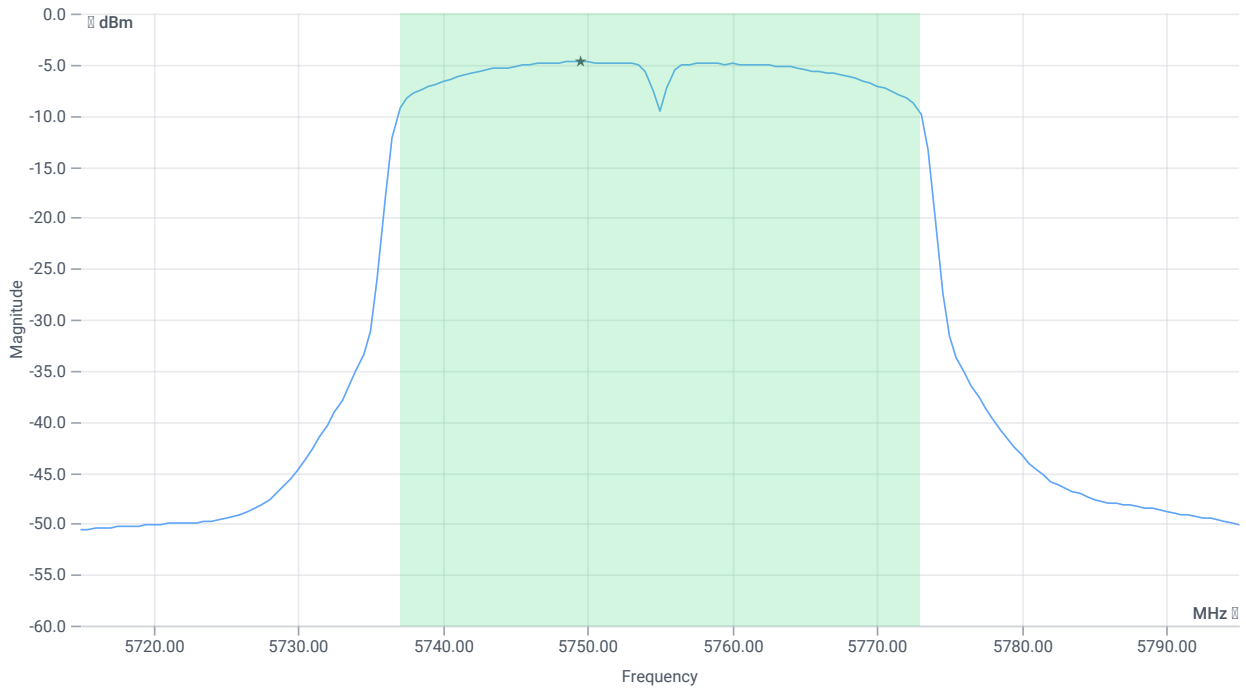

Max OP and PSD


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max Output Power	--	--	9.56	dBm	INFO
Duty Cycle Correction	--	--	0.89	dB	INFO
Limit absolute					
Max Output Power DC corrected	--	30	10.45	dBm	PASS
Limit: 11 dBm + 10 log 35.964					
Max Output Power DC corrected	--	26.56	10.45	dBm	na

Power Spectral Density U-NII-3

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	16.24 16.87 15
Start [MHz] Stop [MHz]	5715.000 5795.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

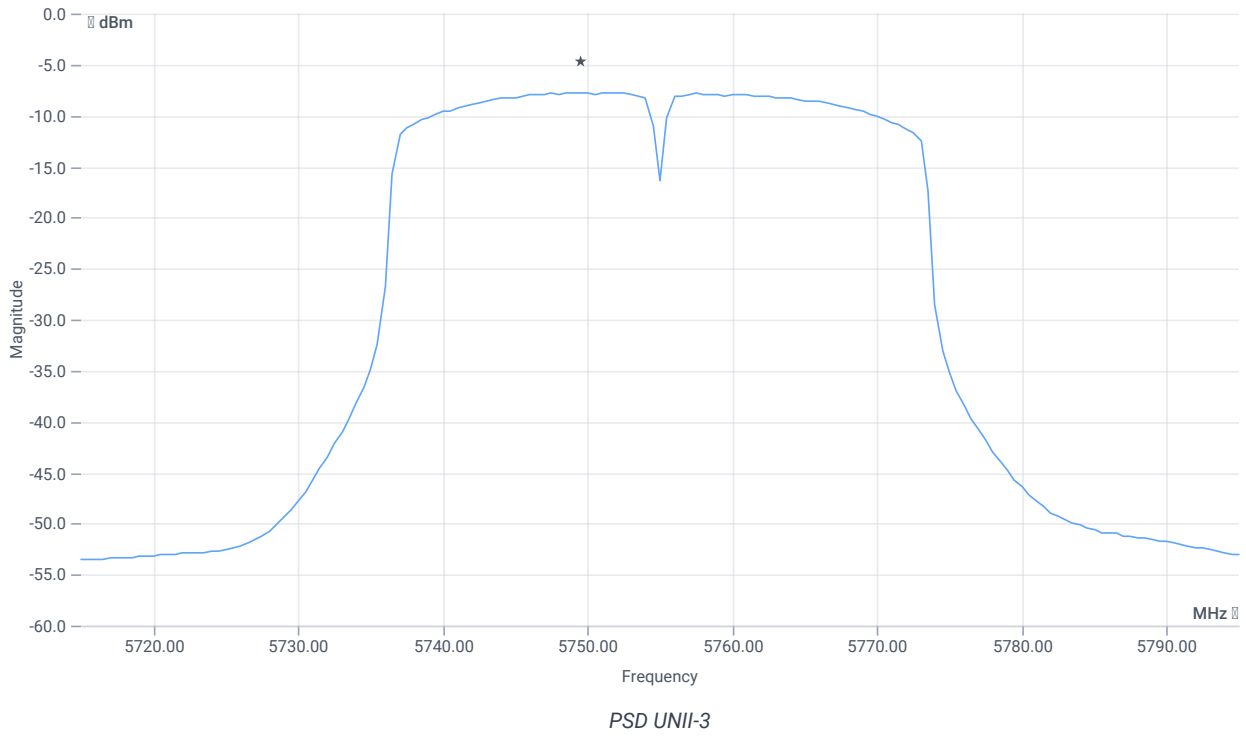

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power Spectral Density	--	--	-7.74	dBm/0.5MHz	INFO
Duty Cycle Correction	--	--	0.89	dB	INFO
Power Spectral Density DC corrected	--	30	-6.85	dBm/0.5MHz	PASS

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-3

References

TC start	27.02.2024 10:45:43
Ambit temp [°C] humidity [rel%]	21.6 39
System version	4.7.1.6
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F, E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx n-HT40 mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx n-HT40 mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5755
Frequency mid to test	False Freq [MHz] 0
Frequency high to test	True Freq [MHz] 5795
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1.4
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 5795 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	--	--	3.62	dBm	INFO
Ref. Frequency	--	--	5796.600	MHz	INFO


Evaluation max. Duty Cycle

Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result Summary					
Number of detected Bursts:94					
Duty Cycle (Burst Ratio) max	--	--	0.878	--	INFO
Duty Cycle max	--	--	0.565	dB	INFO
Duty Cycle (Burst Ratio) min	--	--	0.8	--	INFO
Duty Cycle min	--	--	0.969	dB	INFO
Max TX Burst Length	--	--	0.9	ms	INFO
Min Gap Length	--	--	0.125	ms	INFO
Max Gap Length	--	--	0.225	ms	INFO

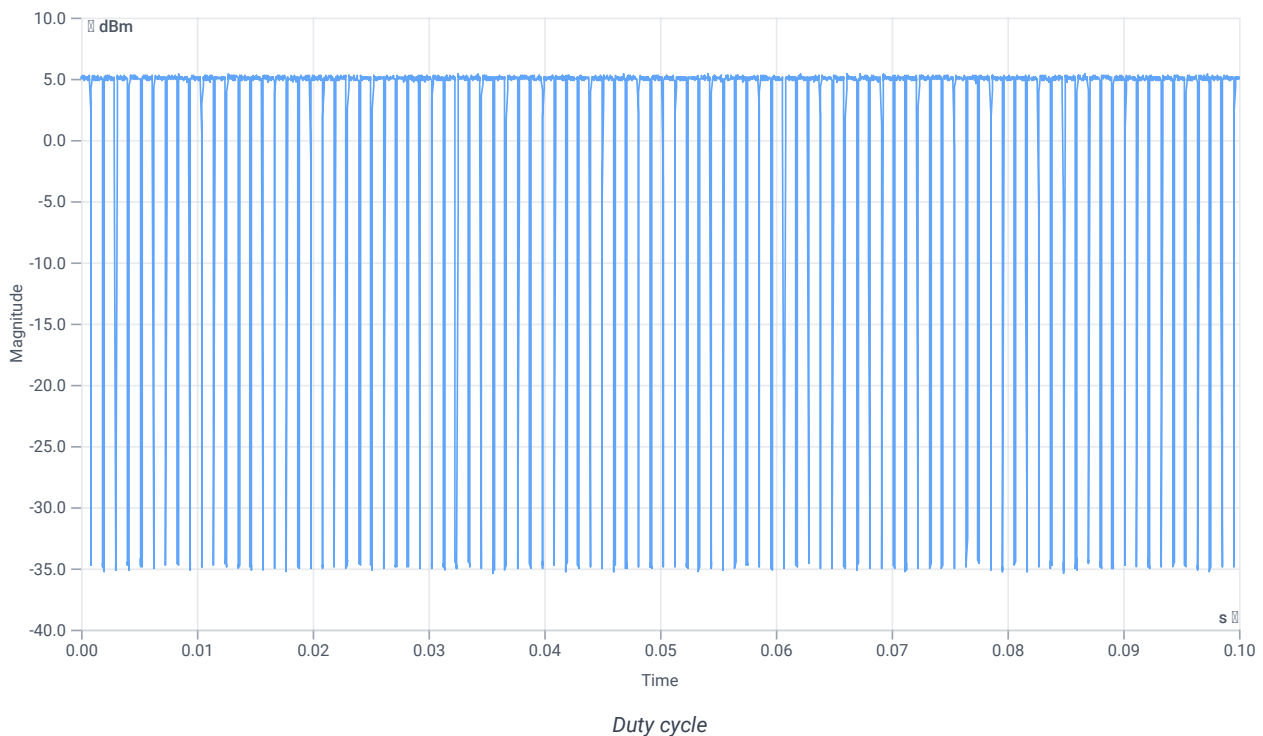

Evaluation Bandwidth

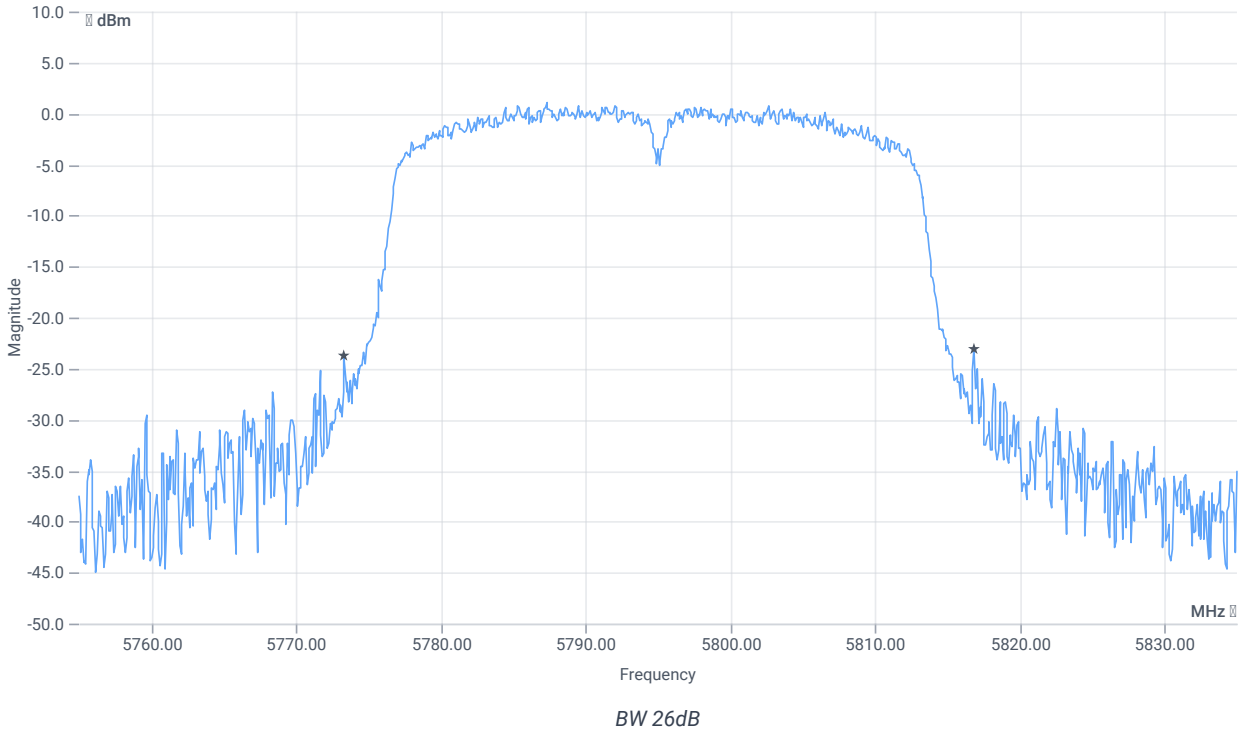


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	43.52	MHz	INFO
T1 26dB	---	---	5773.3200	MHz	INFO
T2 26dB	---	---	5816.8400	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.62 16.77 15
Start [MHz] Stop [MHz]	5755.000 5835.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

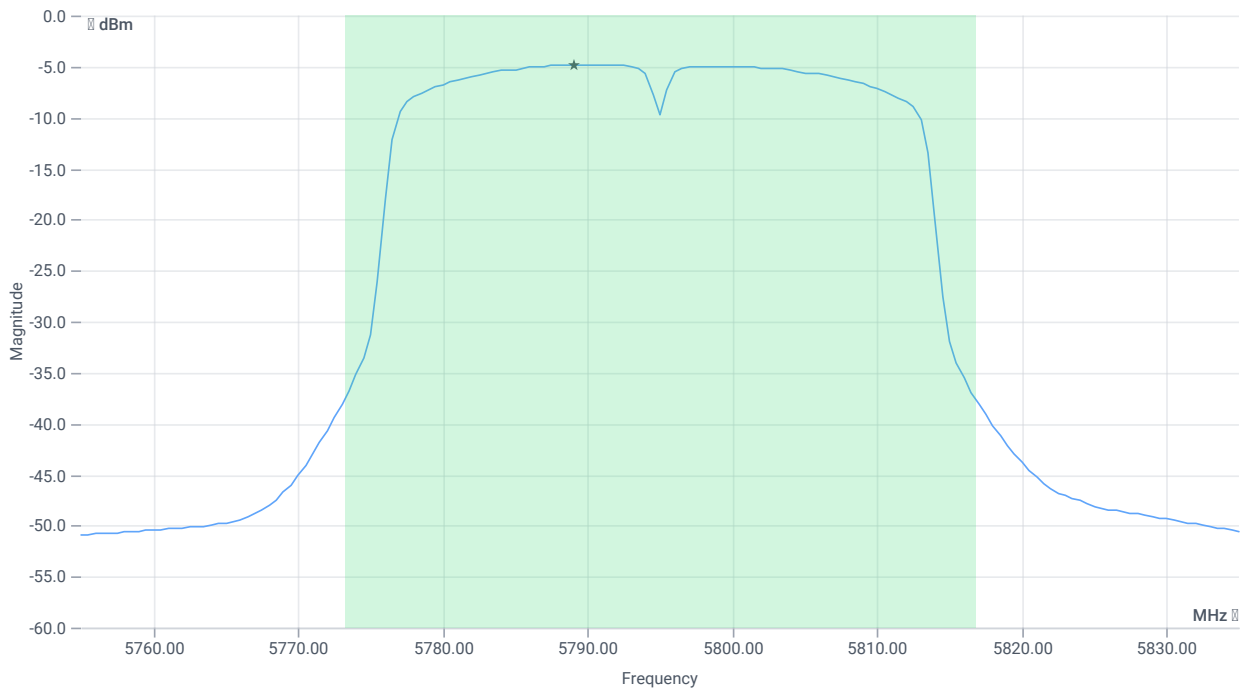

Max OP and PSD


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max Output Power	--	--	9.52	dBm	INFO
Duty Cycle Correction	--	--	0.97	dB	INFO
Limit absolute					
Max Output Power DC corrected	--	30	10.49	dBm	PASS
Limit: 11 dBm + 10 log 43.52					
Max Output Power DC corrected	--	27.39	10.49	dBm	na

Power Spectral Density U-NII-3

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.62 16.77 15
Start [MHz] Stop [MHz]	5755.000 5835.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

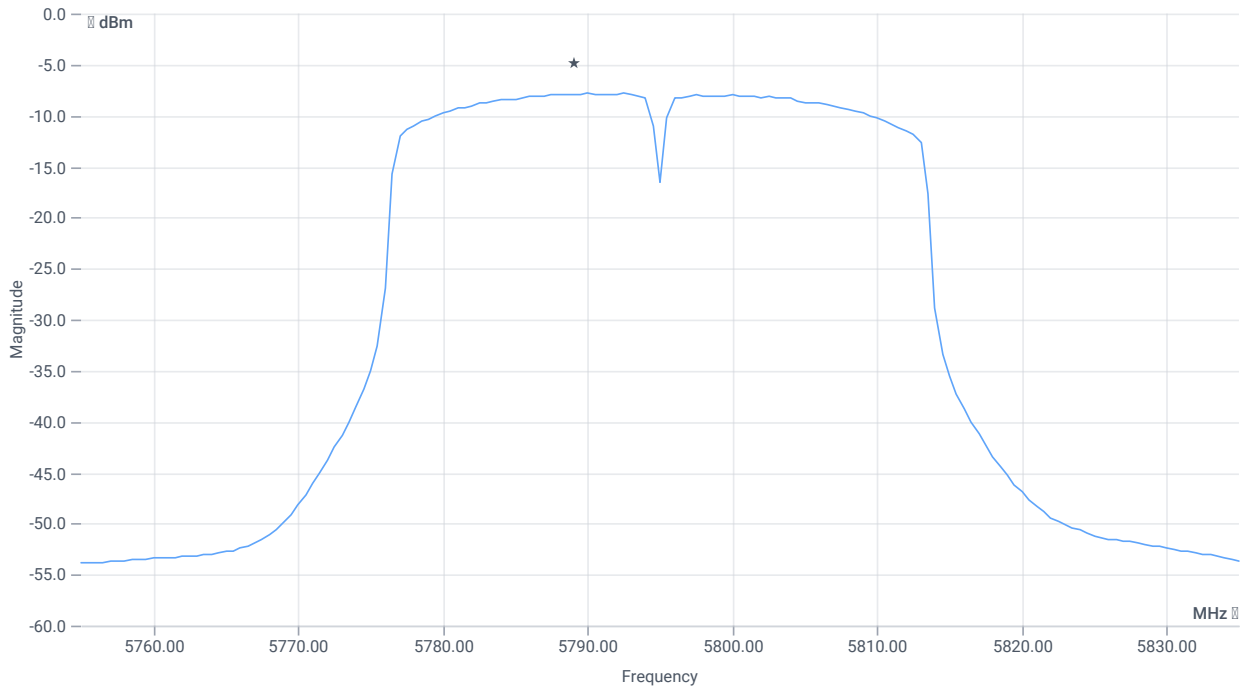

PSD UNII-3

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power Spectral Density	--	--	-7.85	dBm/0.5MHz	INFO
Duty Cycle Correction	--	--	0.97	dB	INFO
Power Spectral Density DC corrected	--	30	-6.88	dBm/0.5MHz	PASS

Verdict

PASS

ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-3

References

TC start	27.02.2024 10:59:37
Ambit temp [°C] humidity [rel%]	21.7 38
System version	4.7.1.6
Standard Version	ISED RSS247 NI
Method	
Description	ISED Max Output Power & PSD - WLAN5Gx n-HT40 mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx n-HT40 mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5755
Frequency mid to test	False Freq [MHz] 0
Frequency high to test	True Freq [MHz] 5795
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1.4
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 5795 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	--	--	3.88	dBm	INFO
Ref. Frequency	--	--	5789.210	MHz	INFO

Evaluation max. Duty Cycle


Duty Cycle evaluation

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result Summary					
Number of detected Bursts:8					
Duty Cycle (Burst Ratio) max	--	--	0.903	--	INFO
Duty Cycle max	--	--	0.443	dB	INFO
Duty Cycle (Burst Ratio) min	--	--	0.837	--	INFO
Duty Cycle min	--	--	0.773	dB	INFO
Max TX Burst Length	--	--	0.928	ms	INFO
Min Gap Length	--	--	0.1	ms	INFO
Max Gap Length	--	--	0.18	ms	INFO

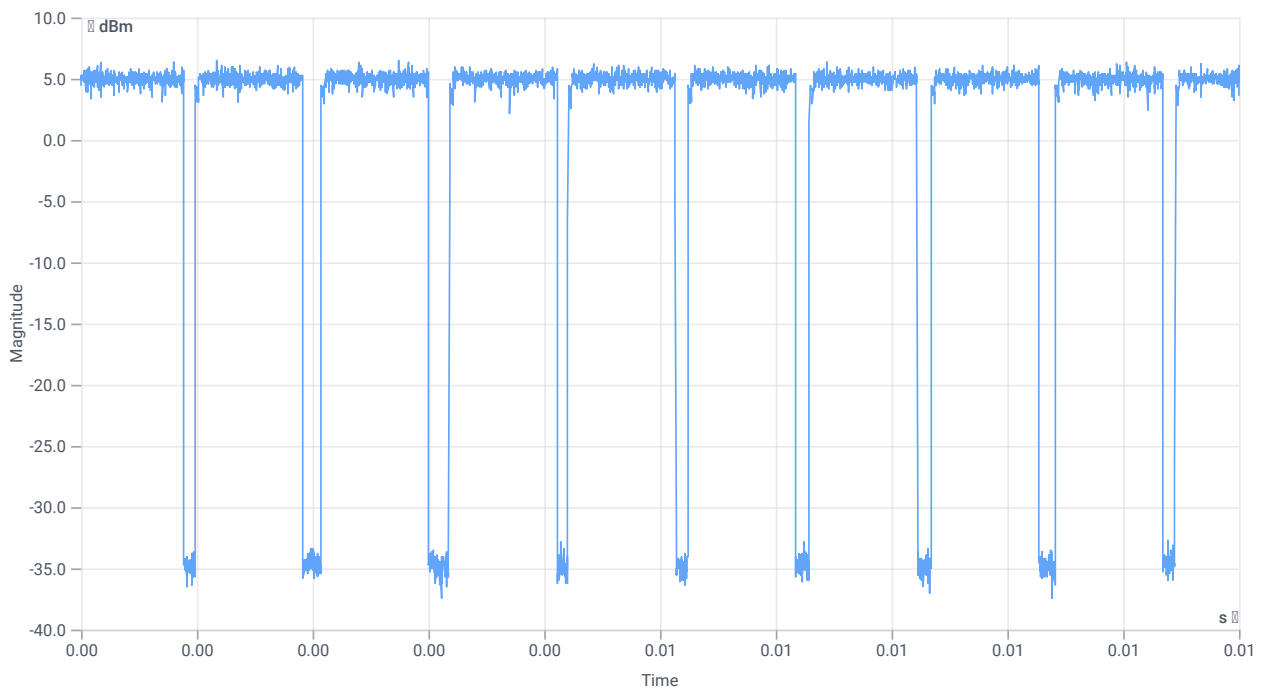

Duty cycle

Evaluation Bandwidth

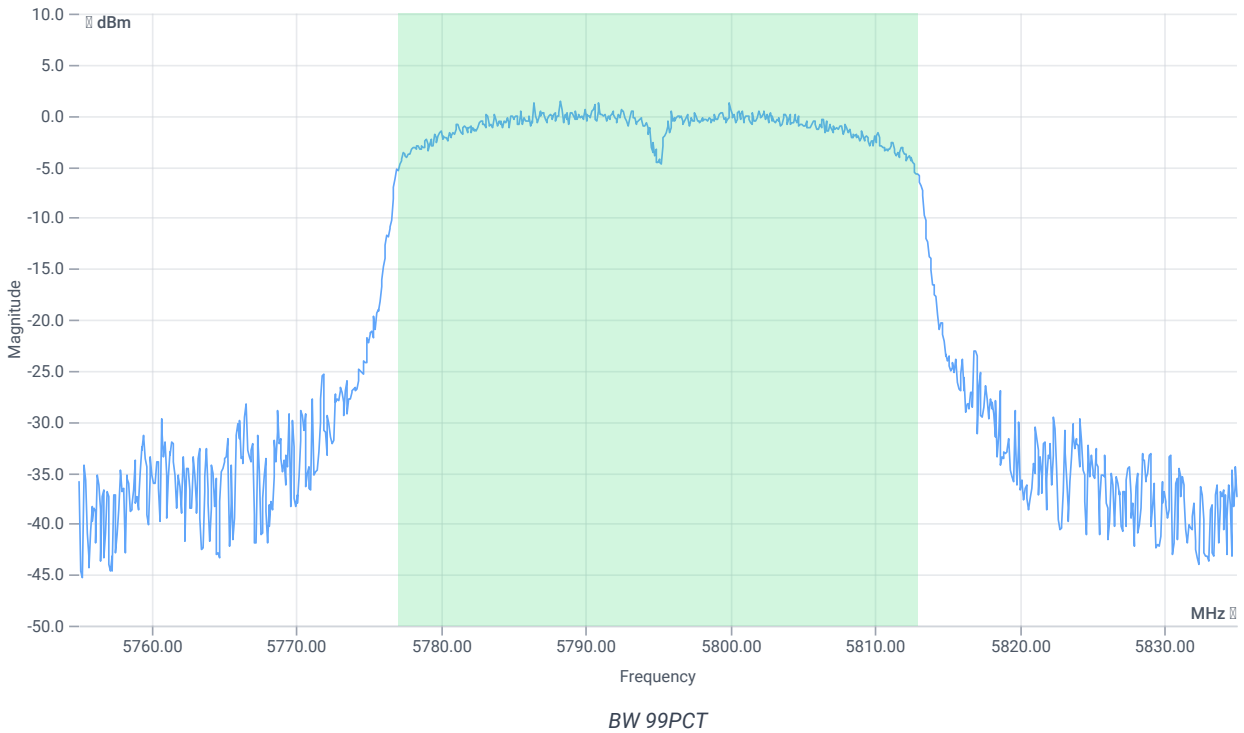


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	35.884	MHz	INFO
T1 99%	---	---	5777.0180	MHz	INFO
T2 99%	---	---	5812.9021	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.88 16.77 15
Start [MHz] Stop [MHz]	5755.000 5835.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	5370 1 161 SWE

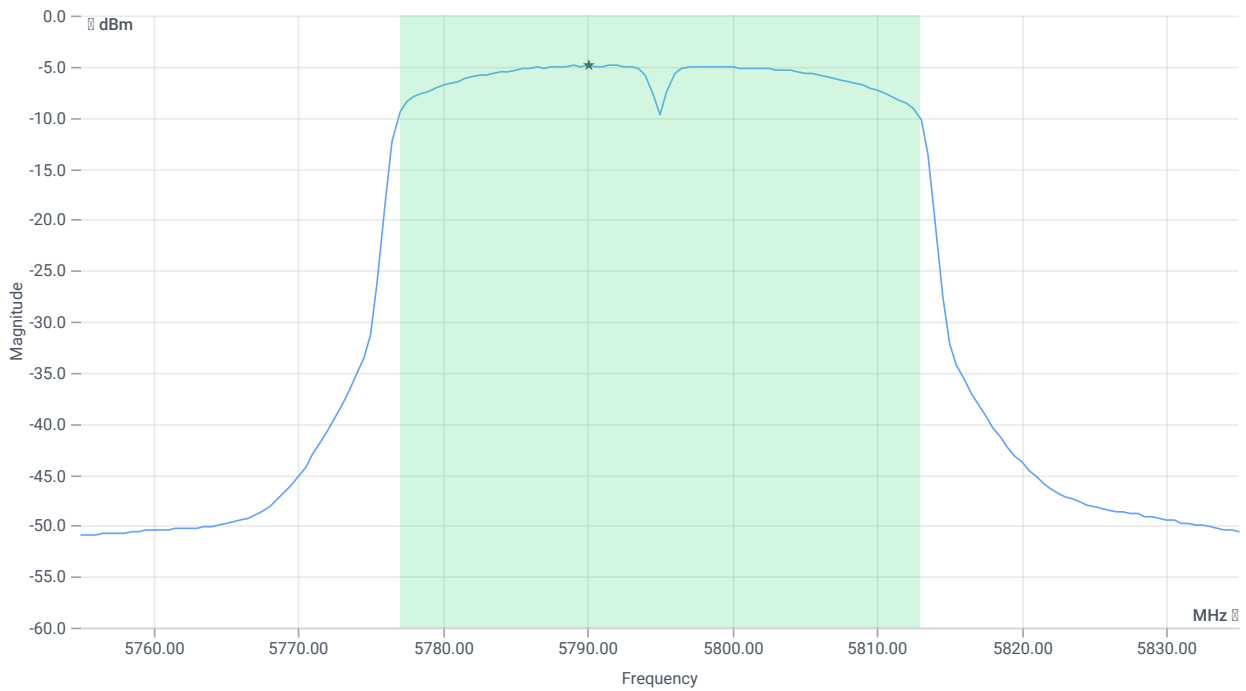

Max OP and PSD


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max Output Power	--	--	9.38	dBm	INFO
Duty Cycle Correction	--	--	0.77	dB	INFO
Limit absolute					
Max Output Power DC corrected	--	30	10.15	dBm	PASS
Limit: 11 dBm + 10 log 35.884					
Max Output Power DC corrected	--	26.55	10.15	dBm	na

Power Spectral Density U-NII-3

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.88 16.77 15
Start [MHz] Stop [MHz]	5755.000 5835.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	5370 1 161 SWE

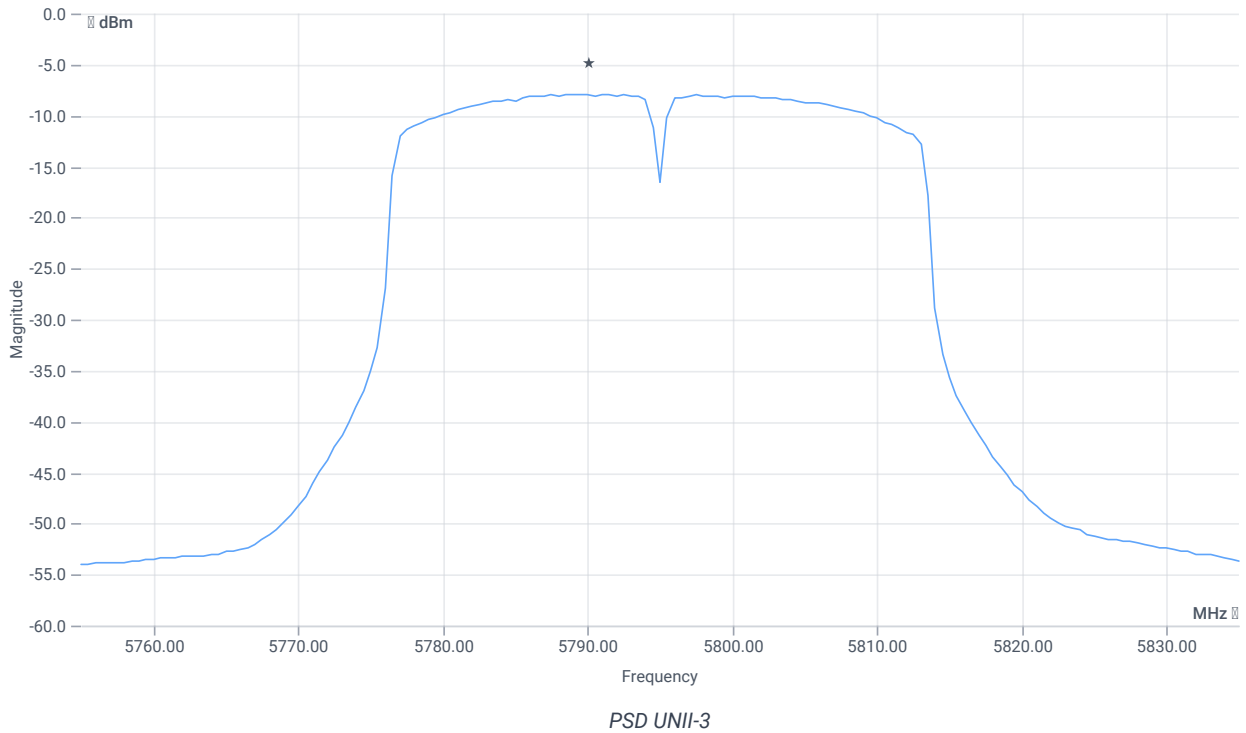

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power Spectral Density	--	--	-7.92	dBm/0.5MHz	INFO
Duty Cycle Correction	--	--	0.77	dB	INFO
Power Spectral Density DC corrected	--	30	-7.15	dBm/0.5MHz	PASS

Verdict

PASS

- END OF DOCUMENT -