



FCC RADIO TEST REPORT

FCC ID: N5MSP-1078

Product : Bluetooth speaker

Trade Name : N/A

Model Number : SP-1078

Serial Model : N/A

Report No. : BZT-2014NT0626144F

Prepared for

Accesspro Electronics Co., Ltd.

Room 3B27, 3F. No. 5, Sec.5 , Hsin Yi Road, Taipei, Taiwan

Prepared by

BZT Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street
Bao'an District, Shenzhen P.R. China

TEST RESULT CERTIFICATION

Applicant's name Accesspro Electronics Co., Ltd.
 Address Room 3B27, 3F. No. 5, Sec.5 , Hsin Yi Road, Taipei, Taiwan
Manufacturer's Name Accesspro Electronics Co., Ltd.
 Address Shan Sha Village Industry Zone, Heng Li Town

Product description

Product name Bluetooth speaker
 Model and/or type reference SP-1078
 Serial Model : N/A
 Ratings DC 5V From PC with AC 120V/50Hz or DC 3.7V from Battery

Standards FCC Part15.247

Test procedure ANSI C63.4-2003

This device described above has been tested by BZT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of BZT, this document may be altered or revised by BZT, personal only, and shall be noted in the revision of the document.

Date of Test
 Date (s) of performance of tests 27 June. 2014 ~31 June. 2014
 Date of Issue 01 July. 2014
 Test Result **Pass**

Testing Engineer	:	
		(Lynn Chen)
Technical Manager	:	
		(Carlen Liu)
Authorized Signatory	:	
		(Tommy zhang)

Table of Contents

	Page
1 . SUMMARY OF TEST RESULTS	5
1.1 TEST FACILITY	6
1.2 MEASUREMENT UNCERTAINTY	6
2 . GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 DESCRIPTION OF TEST MODES	9
2.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	9
2.4 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
2.5 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	11
2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS	12
3 . EMC EMISSION TEST	13
3.1 CONDUCTED EMISSION MEASUREMENT	13
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS	13
3.1.2 TEST PROCEDURE	14
3.1.3 DEVIATION FROM TEST STANDARD	14
3.1.4 TEST SETUP	14
3.1.5 EUT OPERATING CONDITIONS	14
3.1.6 TEST RESULTS	15
3.2 RADIATED EMISSION MEASUREMENT	17
3.2.1 RADIATED EMISSION LIMITS	17
3.2.2 TEST PROCEDURE	18
3.2.3 DEVIATION FROM TEST STANDARD	18
3.2.4 TEST SETUP	19
3.2.5 EUT OPERATING CONDITIONS	20
3.2.6 TEST RESULTS (BELOW 30 MHZ)	21
3.2.7 TEST RESULTS (BETWEEN 30M – 1000 MHZ)	22
3.2.8 TEST RESULTS (ABOVE 1000 MHZ)	24
3.2.9 TEST RESULTS (RESTRICTED BANDS REQUIREMENTS)	30
4 . NUMBER OF HOPPING CHANNEL	46
4.1 APPLIED PROCEDURES / LIMIT	46
4.1.1 TEST PROCEDURE	46
4.1.2 DEVIATION FROM STANDARD	46
4.1.3 TEST SETUP	46
4.1.4 EUT OPERATION CONDITIONS	46
4.1.5 TEST RESULTS	47

Table of Contents

	Page
5 . AVERAGE TIME OF OCCUPANCY	49
5.1 APPLIED PROCEDURES / LIMIT	49
5.1.1 TEST PROCEDURE	49
5.1.2 DEVIATION FROM STANDARD	49
5.1.3 TEST SETUP	49
5.1.4 EUT OPERATION CONDITIONS	49
5.1.5 TEST RESULTS	50
6 . HOPPING CHANNEL SEPARATION MEASUREMENT	54
6.1 APPLIED PROCEDURES / LIMIT	54
6.1.1 TEST PROCEDURE	54
6.1.2 DEVIATION FROM STANDARD	54
6.1.3 TEST SETUP	54
6.1.4 EUT OPERATION CONDITIONS	54
6.1.5 TEST RESULTS	55
7 . BANDWIDTH TEST	60
7.1 APPLIED PROCEDURES / LIMIT	60
7.1.1 TEST PROCEDURE	60
7.1.2 DEVIATION FROM STANDARD	60
7.1.3 TEST SETUP	60
7.1.4 EUT OPERATION CONDITIONS	60
7.1.5 TEST RESULTS	61
8 . PEAK OUTPUT POWER TEST	65
8.1 APPLIED PROCEDURES / LIMIT	65
8.1.1 TEST PROCEDURE	65
8.1.2 DEVIATION FROM STANDARD	65
8.1.3 TEST SETUP	65
8.1.4 EUT OPERATION CONDITIONS	65
8.1.5 TEST RESULTS	66
9 . ANTENNA REQUIREMENT	67
9.1 STANDARD REQUIREMENT	67
9.2 EUT ANTENNA	67
10 . EUT TEST PHOTO	68
APPENDIX-PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.247(a)(1)	Hopping Channel Separation	PASS	
15.247(b)(1)	Peak Output Power	PASS	
15.247(c)	Radiated Spurious Emission	PASS	
15.247(a)(iii)	Number of Hopping Frequency	PASS	
15.247(a)(iii)	Dwell Time	PASS	
15.247(a)(1)	Bandwidth	PASS	
15.205	Band Edge Emission	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

1.1 TEST FACILITY

BZT Testing Technology Co., Ltd

Add. : 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen P.R. China.

FCC Registration No.: 701733

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power,conducted	$\pm 0.16\text{dB}$
3	Spurious emissions,conducted	$\pm 0.21\text{dB}$
4	All emissions,radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^\circ\text{C}$
7	Humidity	$\pm 2\%$

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Bluetooth speaker
Trade Name	N/A
Model Name	SP-1078
Serial Model	N/A
Model Difference	N.A
Product Description	The EUT is a Bluetooth speaker
	Operation Frequency: 2402~2480 MHz
	Modulation Type: FHSS
	Bit Rate of Transmitter: GFSK(1Mbps), $\pi/4$ DQPSK(2Mbps), 8-DPSK(3Mbps)
	Number Of Channel: 79 CH
	Antenna Designation: Please see Note 3.
	Antenna Gain(Peak): 0dBi
	Output Power(Conducted): 1.98 dBm (Max.)
	EIRP: 2.98 dBm(Max.)
	Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.
Channel List	Please refer to the Note 2.
Ratings	DC 5V From PC with AC 120V/50Hz or DC 3.7V from Battery
Battery	3.7V
Connecting I/O Port(s)	Please refer to the User's Manual

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.

Channel List					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	27	2429	54	2456
01	2403	28	2430	55	2457
02	2404	29	2431	56	2458
03	2405	30	2432	57	2459
04	2406	31	2433	58	2460
05	2407	32	2434	59	2461
06	2408	33	2435	60	2462
07	2409	34	2436	61	2463
08	2410	35	2437	62	2464
09	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		

3.

Table for Filed Antenna

Ant	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	N/A	N/A	PCB Antenna	NA	1	BT Antenna

The EUT antenna is integral Antenna. no antenna other than that furnished by the responsible party shall be used with the device.

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	CH00
Mode 2	CH39
Mode 3	CH78

For Conducted Emission	
Final Test Mode	Description
Mode4	Link mode

For Radiated Emission	
Final Test Mode	Description
Mode 1	CH00
Mode 2	CH39
Mode 3	CH78
Mode4	Link mode


Note:

- (1) The measurements are performed at the highest, middle, lowest available channels.

2.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of FHSS

Test software Version	Test program: CSR		
Frequency	2402 MHz	2441 MHz	2480 MHz
Parameters(1Mbps)	DEF	DEF	DEF
Parameters(3Mbps)	DEF	DEF	DEF

2.4 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

2.5 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Bluetooth speaker	N/A	SP-1078	N/A	EUT
E-2	Notebook	Acer	4552G	N/A	

Item	Shielded Type	Ferrite Core	Length	Note
C-1	USB	N/A	1.2m	

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.

2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4407B	MY45108040	2014.05.06	2015.06.05	1 year
2	Test Receiver	R&S	ESPI	101318	2014.05.06	2015.06.05	1 year
3	Bilog Antenna	TESEQ	CBL6111D	31216	2013.08.12	2014.08.11	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264416	2014.05.06	2015.06.05	1 year
5	Spectrum Analyzer	ADVANTEST	R3132	150900201	2014.05.06	2015.06.05	1 year
6	Horn Antenna	EM	EM-AH-10180	2011071402	2013.08.12	2014.08.11	1 year
7	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2013.08.12	2014.08.11	1 year
8	Amplifier	EM	EM-30180	060538	2014.05.06	2015.06.05	1 year
9	Loop Antenna	ARA	PLA-1030/B	1029	2013.08.12	2014.08.11	1 year
10	Power Meter	R&S	NRVS	100696	2014.05.06	2015.06.05	1 year
11	Power Sensor	R&S	URV5-Z4	0395.1619.05	2014.05.06	2015.06.05	1 year

Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	101160	2014.05.06	2015.06.05	1 year
2	LISN	R&S	ENV216	101313	2014.05.06	2015.06.05	1 year
3	LISN	EMCO	3816/2	00042990	2014.05.06	2015.06.05	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2014.05.06	2015.06.05	1 year
5	Passive Voltage Probe	R&S	ESH2-Z3	100196	2014.05.06	2015.06.05	1 year
6	Absorbing clamp	R&S	MOS-21	100423	2014.05.06	2015.06.05	1 year

3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)		Standard
	Quasi-peak	Average	Quasi-peak	Average	
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	73.00	60.00	56.00	46.00	CISPR
5.0 -30.0	73.00	60.00	60.00	50.00	CISPR

0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	73.00	60.00	56.00	46.00	FCC
5.0 -30.0	73.00	60.00	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.4 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

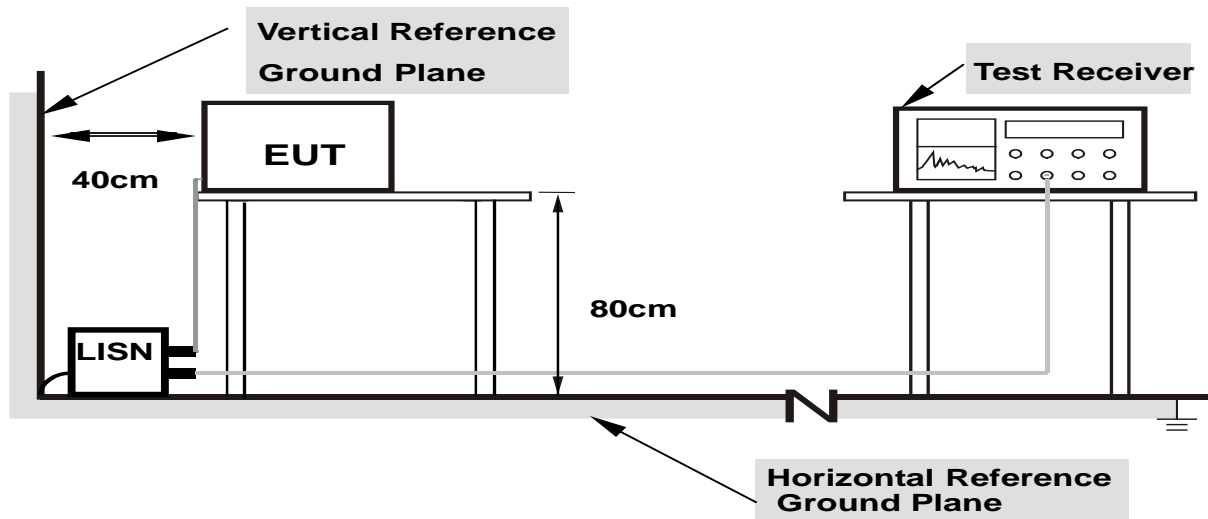


- Note:**
- 1.Support units were connected to second LISN.
 - 2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

3.1.6 TEST RESULTS

EUT :	Bluetooth speaker	Model Name. :	SP-1078
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5V from PC with AC 120V/50Hz	Test Mode :	Link mode

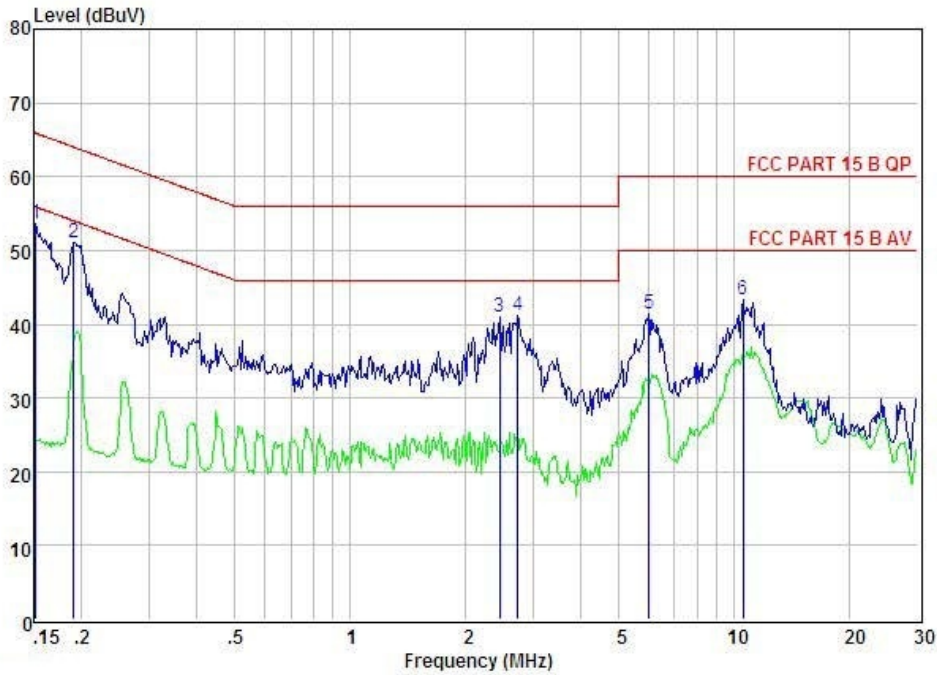


Condition : FCC PART 15 B QP POL: NEUTRAL Temp:24 °C Hum:56 %

Item	Freq MHz	Read dBuV	LISN Factor dB	Preamp Factor dB	Cable Loss dB	Level dBuV	Limit dBuV	Margin dBuV	Remark
1	0.152	43.73	0.03	-9.72	0.10	53.58	65.91	-12.33	QP
2	0.190	41.23	0.03	-9.72	0.10	51.08	64.02	-12.94	QP
3	2.448	31.02	0.06	-9.70	0.11	40.89	56.00	-15.11	QP
4	2.736	31.28	0.07	-9.70	0.11	41.16	56.00	-14.84	QP
5	5.993	31.61	0.11	-9.61	0.14	41.47	60.00	-18.53	QP
6	10.564	33.37	0.21	-9.50	0.22	43.30	60.00	-16.70	QP

Remarks: Level = Read + LISN Factor - Preamp Factor + Cable loss



EUT :	Bluetooth speaker	Model Name. :	SP-1078
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5V from PC with AC 120V/50Hz	Test Mode :	Link mode

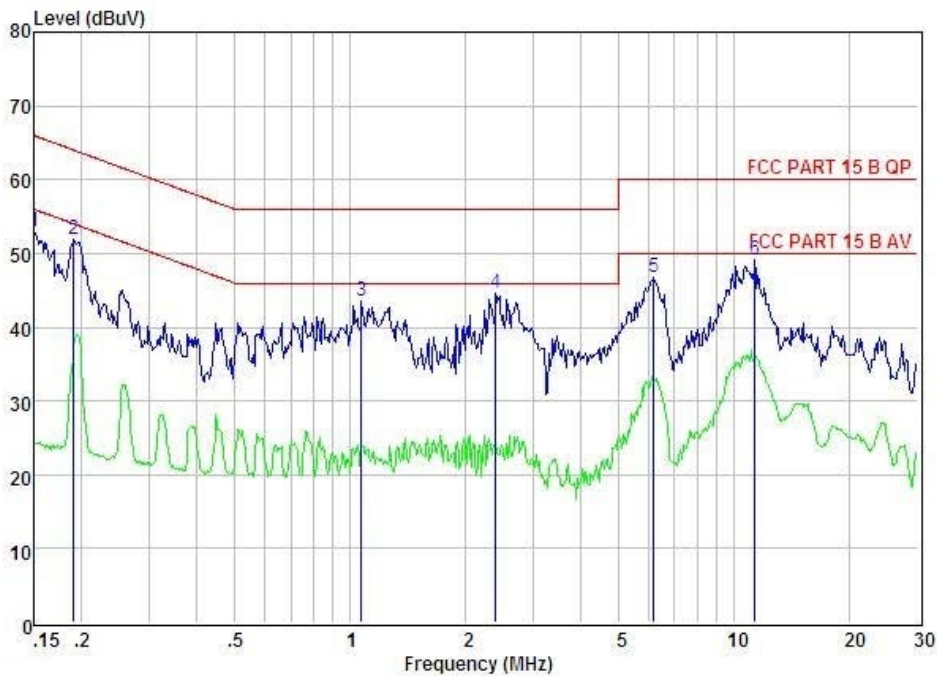

Condition : FCC PART 15 B QP POL: LINE Temp:24 °C Hum:56 %

Item	Freq MHz	Read dBuV	LISN Factor dB	Preamp Factor dB	Cable Loss dB	Level dBuV	Limit dBuV	Margin dBuV	Remark
1	0.150	43.12	0.03	-9.72	0.10	52.97	66.00	-13.03	QP
2	0.190	41.96	0.03	-9.72	0.10	51.81	64.02	-12.21	QP
3	1.071	33.70	0.04	-9.71	0.10	43.55	56.00	-12.45	QP
4	2.396	34.82	0.06	-9.70	0.11	44.69	56.00	-11.31	QP
5	6.186	36.90	0.11	-9.60	0.14	46.75	60.00	-13.25	QP
6	11.317	39.10	0.24	-9.48	0.22	49.04	60.00	-10.96	QP

Remarks: Level = Read + LISN Factor - Preamp Factor + Cable loss

3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class A (dBuV/m) (at 3M)		Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE	PEAK	AVERAGE
Above 1000	80	60	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

FREQUENCY RANGE OF RADIATED MEASUREMENT (For unintentional radiators)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 – 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.2.2 TEST PROCEDURE

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

3.2.3 DEVIATION FROM TEST STANDARD


No deviation

3.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

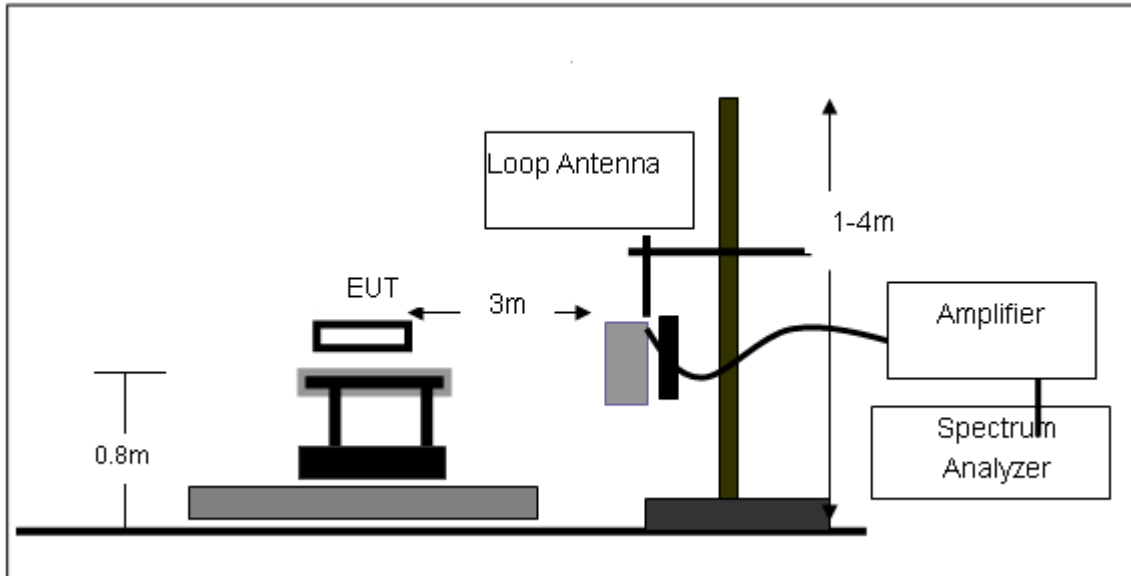

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

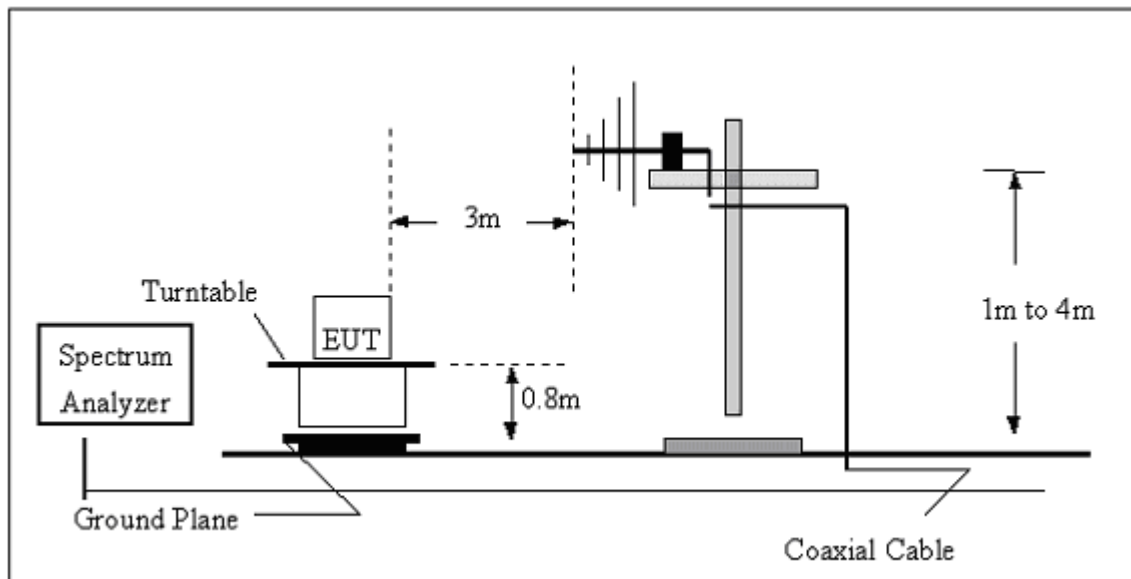

(C) Radiated Emission Test-Up Frequency Above 1GHz

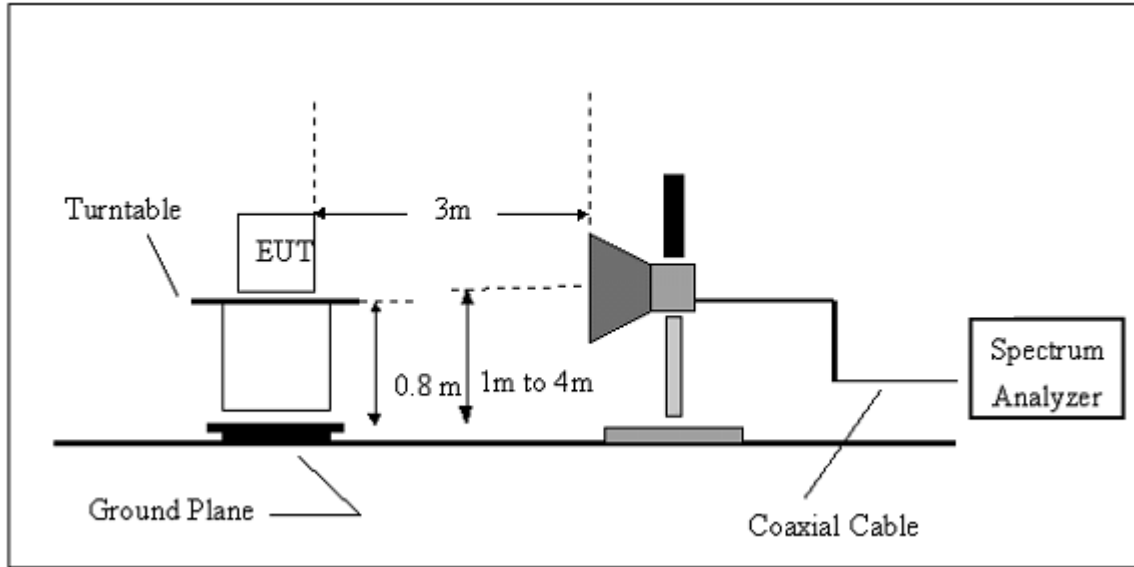

3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

3.2.6 TEST RESULTS (BELOW 30 MHZ)

EUT :	Bluetooth speaker	Model Name :	SP-1078
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Polarization :	---
Test Voltage :	DC 5V from PC with AC 120V/50Hz		
Test Mode :	Link mode		

Freq. (MHz)	Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	State P/F
--	--	--	--	PASS
--	--	--	--	PASS

NOTE:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.

3.2.7 TEST RESULTS (BETWEEN 30M – 1000 MHZ)

EUT :	Bluetooth speaker	Model Name :	SP-1078
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Polarization :	Vertical
Test Voltage :	DC 5V from PC with AC 120V/50Hz		
Test Mode :	Link mode		

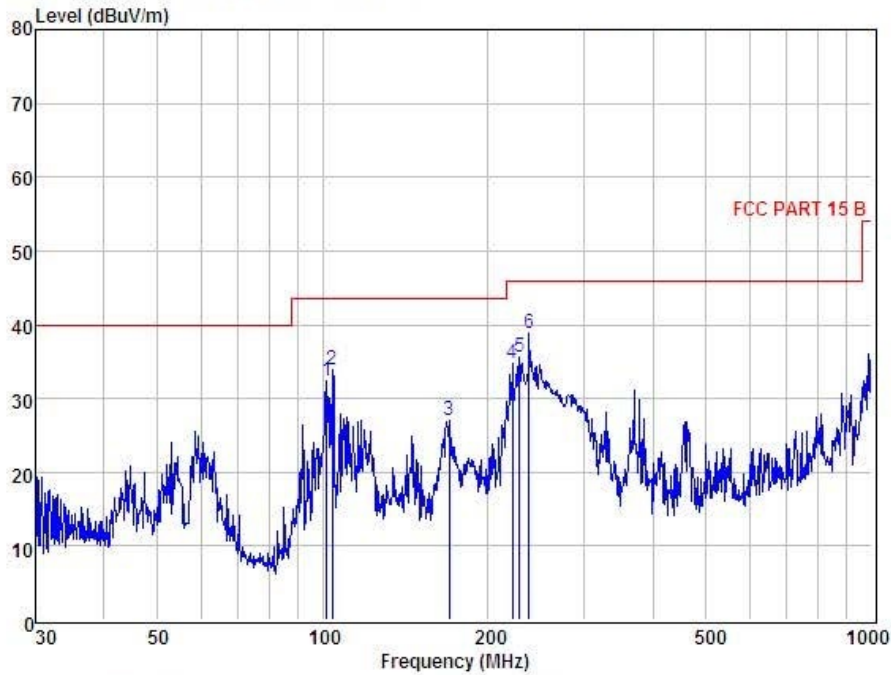


Condition : FCC PART 15 B 3m POL: VERTICAL									
Item	Freq	Read	Antenna	Preamp	Cable	Level	Limit	Margin	Remark
	MHz	dBuV	Factor	Factor	Loss	dBuV	dBuV	dBuV	
			dB	dB	dB				
1	101.64	48.45	10.35	26.84	0.34	32.30	43.50	-11.20	QP
2	104.17	49.63	10.74	26.85	0.32	33.84	43.50	-9.66	QP
3	170.19	40.08	13.18	26.92	0.68	27.02	43.50	-16.48	QP
4	221.39	50.35	10.75	27.07	0.68	34.71	46.00	-11.29	QP
5	228.49	51.10	11.10	27.08	0.55	35.67	46.00	-10.33	QP
6	237.48	54.04	11.40	27.09	0.50	38.85	46.00	-7.15	QP

Remark: Level = Read Level + Antenna Factor - Preamp Factor + Cable Loss



EUT :	Bluetooth speaker	Model Name :	SP-1078
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Polarization :	Horizontal
Test Voltage :	DC 5V from PC with AC 120V/50Hz		
Test Mode :	Link mode		

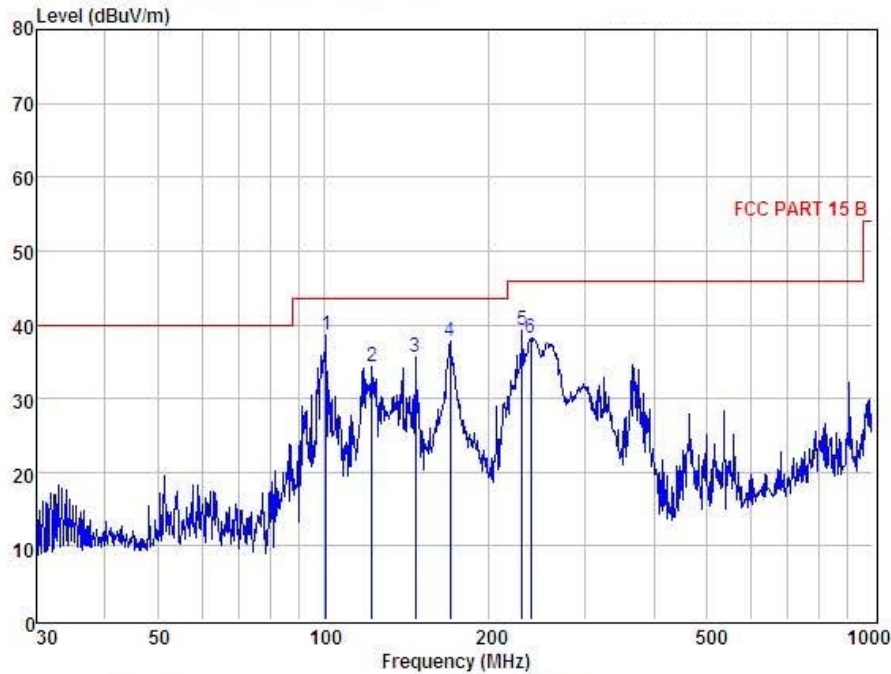

Condition : FCC PART 15 B									
Item	Freq	Read	Antenna	3m	POL:	Level	Limit	Margin	Remark
	MHz	dBuV	Factor	Preamp	Cable	dBuV	dBuV	dBuV	
			dB	Factor	Loss				
				dB	dB				
1	100.93	54.66	10.35	26.84	0.40	38.57	43.50	-4.93	QP
2	122.40	48.35	12.35	26.88	0.43	34.25	43.50	-9.25	QP
3	146.89	48.34	13.90	26.91	0.37	35.70	43.50	-7.80	QP
4	170.19	50.87	13.18	26.92	0.68	37.81	43.50	-5.69	QP
5	230.10	54.51	11.21	27.08	0.58	39.22	46.00	-6.78	QP
6	238.31	53.38	11.40	27.09	0.54	38.23	46.00	-7.77	QP

Remark: Level = Read Level + Antenna Factor - Preamp Factor + Cable Loss

3.2.8 TEST RESULTS (ABOVE 1000 MHZ)

EUT :	Bluetooth speaker	Model Name :	SP-1078
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 5V from PC with AC 120V/50Hz
Test Mode :	TX 2402MHz – CH 00(1Mbps)	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dBµV)	Factor (dB)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Detector Type
4804	56.89	-3.64	53.25	74	-20.75	peak
4804	45.78	-3.64	42.14	54	-11.86	AVG
7206	55.37	-0.95	54.42	74	-19.58	peak
7206	44.16	-0.95	43.21	54	-10.79	AVG
9608	53.64	2.15	55.79	74	-18.21	peak
9608	41.41	2.15	43.56	54	-10.44	AVG

Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT :	Bluetooth speaker	Model Name :	SP-1078
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 5V from PC with AC 120V/50Hz
Test Mode :	TX 2402MHz – CH 00(1Mbps)	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBµV)	Factor (dB)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Detector Type
4804	56.39	-3.64	52.75	74	-21.25	peak
4804	45.16	-3.64	41.52	54	-12.48	AVG
7206	55.17	-0.95	54.22	74	-19.78	peak
7206	43.71	-0.95	42.76	54	-11.24	AVG
9608	54.49	2.15	56.64	74	-17.36	peak
9608	41.81	2.15	43.96	54	-10.04	AVG

Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT :	Bluetooth speaker	Model Name :	SP-1078
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 5V from PC with AC 120V/50Hz
Test Mode :	TX 2441MHz – CH 39(1Mbps)	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4882	55.36	-3.68	51.68	74	-22.32	peak
4882	44.15	-3.68	40.47	54	-13.53	AVG
7323	53.20	-0.82	52.38	74	-21.62	peak
7323	42.09	-0.82	41.27	54	-12.73	AVG
9764	54.03	0.81	54.84	74	-19.16	peak
9764	42.62	0.81	43.43	54	-10.57	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT :	Bluetooth speaker	Model Name :	SP-1078
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 5V from PC with AC 120V/50Hz
Test Mode :	TX 2441MHz – CH 39(1Mbps)	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4882	56.30	-3.68	52.62	74	-21.38	peak
4882	45.64	-3.68	41.96	54	-12.04	AVG
7323	53.73	-0.82	52.91	74	-21.09	peak
7323	42.24	-0.82	41.42	54	-12.58	AVG
9764	54.87	0.81	55.68	74	-18.32	peak
9764	43.54	0.81	44.35	54	-9.65	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.



EUT :	Bluetooth speaker	Model Name :	SP-1078
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 5V from PC with AC 120V/50Hz
Test Mode :	TX 2480MHz – CH 78(1Mbps)	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4960	54.18	-3.59	50.59	74	-23.41	peak
4960	43.72	-3.59	40.13	54	-13.87	AVG
7440	52.65	-0.69	51.96	74	-22.04	peak
7440	43.94	-0.69	43.25	54	-10.75	AVG
9920	52.73	1.14	53.87	74	-20.13	peak
9920	42.24	1.14	43.38	54	-10.62	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT :	Bluetooth speaker	Model Name :	SP-1078
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 5V from PC with AC 120V/50Hz
Test Mode :	TX 2480MHz – CH 78(1Mbps)	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4960	53.77	-3.59	50.18	74	-23.82	peak
4960	44.84	-3.59	41.25	54	-12.75	AVG
7440	53.25	-0.69	52.56	74	-21.44	peak
7440	42.61	-0.69	41.92	54	-12.08	AVG
9920	55.33	1.14	56.47	74	-17.53	peak
9920	44.08	1.14	45.22	54	-8.78	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.



EUT :	Bluetooth speaker	Model Name :	SP-1078
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 5V from PC with AC 120V/50Hz
Test Mode :	TX 2402MHz – CH 00(3 Mbps)	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4804	55.87	-3.64	52.23	74	-21.77	peak
4804	45.81	-3.64	42.17	54	-11.83	AVG
7206	53.78	-0.95	52.83	74	-21.17	peak
7206	44.36	-0.95	43.41	54	-10.59	AVG
9608	53.48	2.15	55.63	74	-18.37	peak
9608	43.38	2.15	45.53	54	-8.47	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT :	Bluetooth speaker	Model Name :	SP-1078
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 5V from PC with AC 120V/50Hz
Test Mode :	TX 2402MHz – CH 00(3 Mbps)	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4804	54.80	-3.64	51.16	74	-22.84	peak
4804	45.71	-3.64	42.07	54	-11.93	AVG
7206	54.20	-0.95	53.25	74	-20.75	peak
7206	44.47	-0.95	43.52	54	-10.48	AVG
9608	53.11	2.15	55.26	74	-18.74	peak
9608	42.23	2.15	44.38	54	-9.62	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT :	Bluetooth speaker	Model Name :	SP-1078
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 5V from PC with AC 120V/50Hz
Test Mode :	TX 2441MHz – CH 39(3 Mbps)	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4882	54.31	-3.68	50.63	74	-23.37	peak
4882	45.52	-3.68	41.84	54	-12.16	AVG
7323	53.33	-0.82	52.51	74	-21.49	peak
7323	43.97	-0.82	43.15	54	-10.85	AVG
9764	53.87	0.81	54.68	74	-19.32	peak
9764	43.04	0.81	43.85	54	-10.15	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT :	Bluetooth speaker	Model Name :	SP-1078
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 5V from PC with AC 120V/50Hz
Test Mode :	TX 2441MHz – CH 39(3 Mbps)	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4882	54.31	-3.68	50.63	74	-23.37	peak
4882	45.43	-3.68	41.75	54	-12.25	AVG
7323	53.84	-0.82	53.02	74	-20.98	peak
7323	43.65	-0.82	42.83	54	-11.17	AVG
9764	53.22	0.81	54.03	74	-19.97	peak
9764	43.34	0.81	44.15	54	-9.85	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.



EUT :	Bluetooth speaker	Model Name :	SP-1078
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 5V from PC with AC 120V/50Hz
Test Mode :	TX 2480MHz – CH 78(3Mbps)	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4960	55.45	-3.59	51.86	74	-22.14	peak
4960	46.91	-3.59	43.32	54	-10.68	AVG
7440	53.96	-0.69	53.27	74	-20.73	peak
7440	45.12	-0.69	44.43	54	-9.57	AVG
9920	55.22	1.14	56.36	74	-17.64	peak
9920	44.61	1.14	45.75	54	-8.25	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT :	Bluetooth speaker	Model Name :	SP-1078
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 5V from PC with AC 120V/50Hz
Test Mode :	TX 2480MHz – CH 78(3Mbps)	Polarization :	Vertical


Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4960	53.35	-3.59	49.76	74	-24.24	peak
4960	44.40	-3.59	40.81	54	-13.19	AVG
7440	52.92	-0.69	52.23	74	-21.77	peak
7440	42.85	-0.69	42.16	54	-11.84	AVG
9920	53.23	1.14	54.37	74	-19.63	peak
9920	42.59	1.14	43.73	54	-10.27	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

3.2.9 TEST RESULTS (RESTRICTED BANDS REQUIREMENTS)


EUT :	Bluetooth speaker	Model Name :	SP-1078
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Polarization :	Horizontal
Test Voltage :	DC 5V from PC with AC 120V/50Hz		
Test Mode :	CH00 for GFSK		

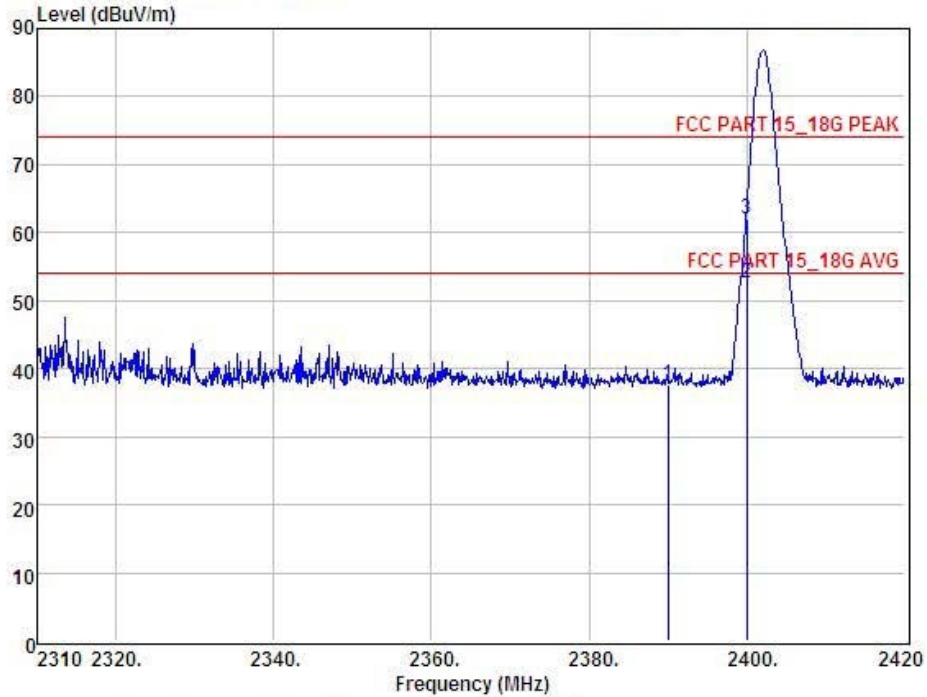

Condition : FCC PART 15_18G PEAK 3m POL: HORIZONTAL									
Item	Freq	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Level	Limit	Margin	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dBuV	
1	2390.00	41.08	27.62	34.97	3.92	37.65	74.00	-36.35	Peak
2	2400.00	56.09	27.62	34.97	3.94	52.68	54.00	-1.32	Average
3	2400.00	65.45	27.62	34.97	3.94	62.04	74.00	-11.96	Peak

Remark: Level = Read Level + Antenna Factor - Preamp Factor + Cable Loss

EUT :	Bluetooth speaker	Model Name :	SP-1078
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Polarization :	Vertical
Test Voltage :	DC 5V from PC with AC 120V/50Hz		
Test Mode :	CH00 for GFSK		

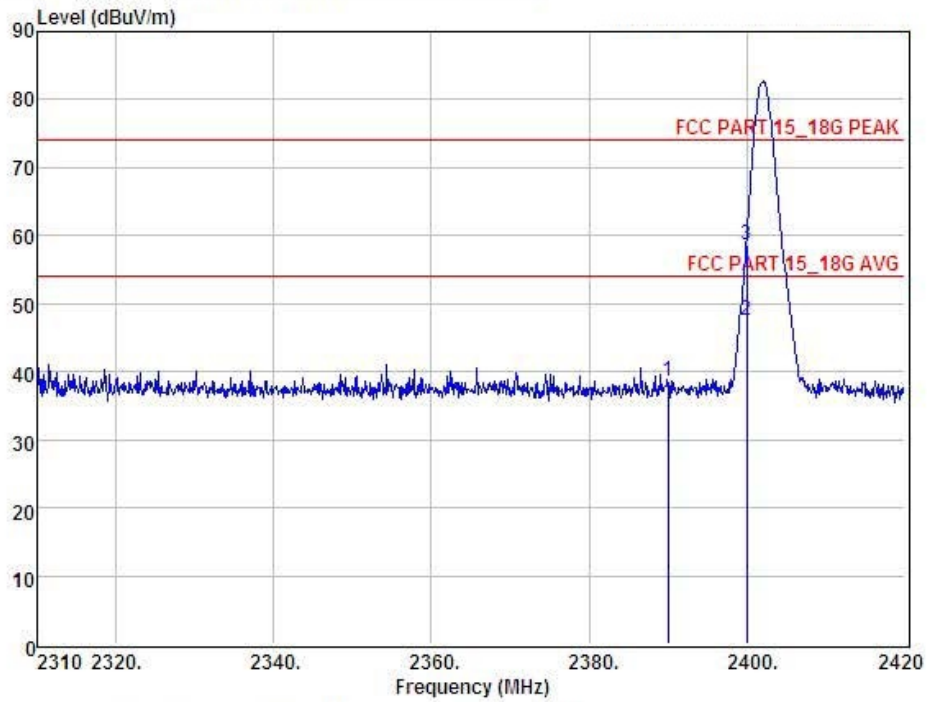


Condition : FCC PART 15_18G PEAK 3m POL: VERTICAL

Item	Freq MHz	Read Level dBuV	Antenna Factor dB	Preamp Factor dB	Cable Loss dB	Level dBuV	Limit dBuV	Margin dBuV	Remark
1	2390.00	42.07	27.62	34.97	3.92	38.64	74.00	-35.36	Peak
2	2400.00	50.94	27.62	34.97	3.94	47.53	54.00	-6.47	Average
3	2400.00	62.05	27.62	34.97	3.94	66.64	74.00	-15.36	Peak

Remark: Level = Read Level + Antenna Factor - Preamp Factor + Cable Loss


EUT :	Bluetooth speaker	Model Name :	SP-1078
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Polarization :	Horizontal
Test Voltage :	DC 5V from PC with AC 120V/50Hz		
Test Mode :	CH78 for GFSK		

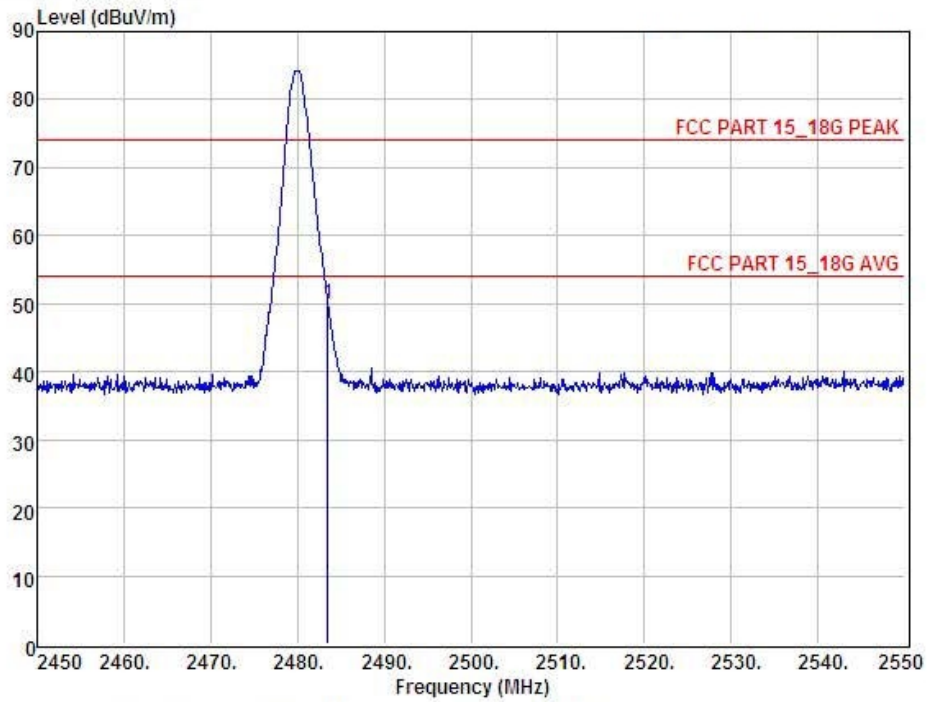

Condition		: FCC PART 15_18G PEAK 3m					POL: HORIZONTAL			
Item	Freq	Read	Antenna	Preamp	Cable	Level	Limit	Margin	Remark	
	MHz	dBuV	Factor	Factor	Loss	dBuV	dBuV	dBuV		
			dB	dB	dB					
1	2483.50	53.24	27.59	34.97	4.00	49.86	74.00	-24.14	Peak	

Remark: Level = Read Level + Antenna Factor - Preamp Factor + Cable Loss


EUT :	Bluetooth speaker	Model Name :	SP-1078
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Polarization :	Vertical
Test Voltage :	DC 5V from PC with AC 120V/50Hz		
Test Mode :	CH78 for GFSK		

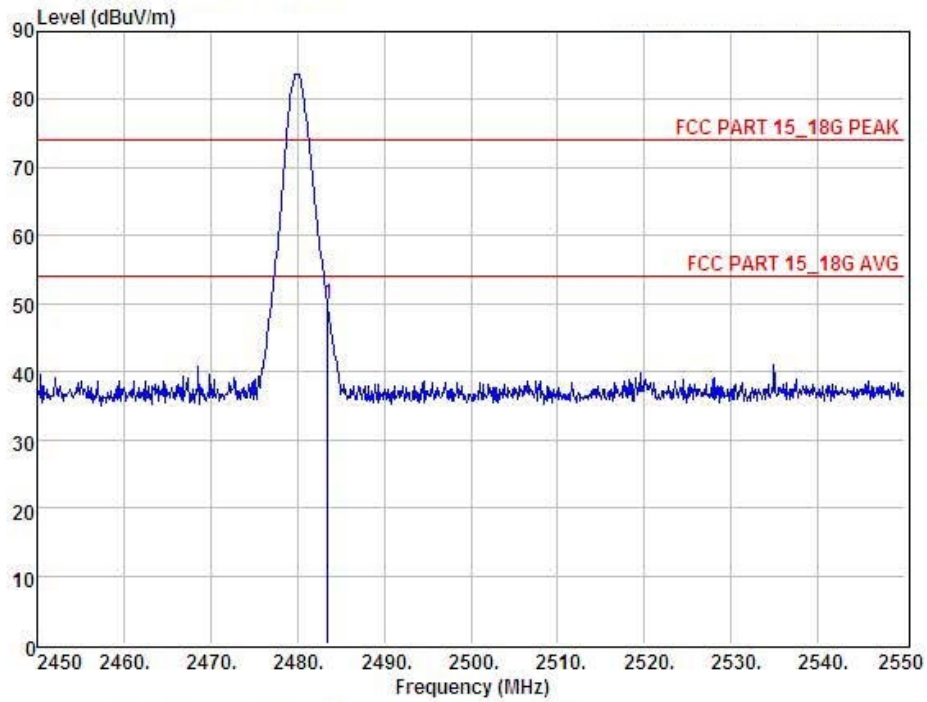

Condition : FCC PART 15_18G PEAK 3m POL: VERTICAL									
Item	Freq	Read	Antenna	Preamp	Cable	Level	Limit	Margin	Remark
	MHz	Level	Factor	Factor	Loss	dBuV	dBuV	dBuV	
		dBuV	dB	dB	dB				
1	2483.50	53.31	27.59	34.97	4.00	49.93	74.00	-24.07	Peak


Remark: Level = Read Level + Antenna Factor - Preamp Factor + Cable Loss

EUT :	Bluetooth speaker	Model Name :	SP-1078
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Polarization :	Horizontal
Test Voltage :	DC 5V from PC with AC 120V/50Hz		
Test Mode :	Hopping for GFSK		

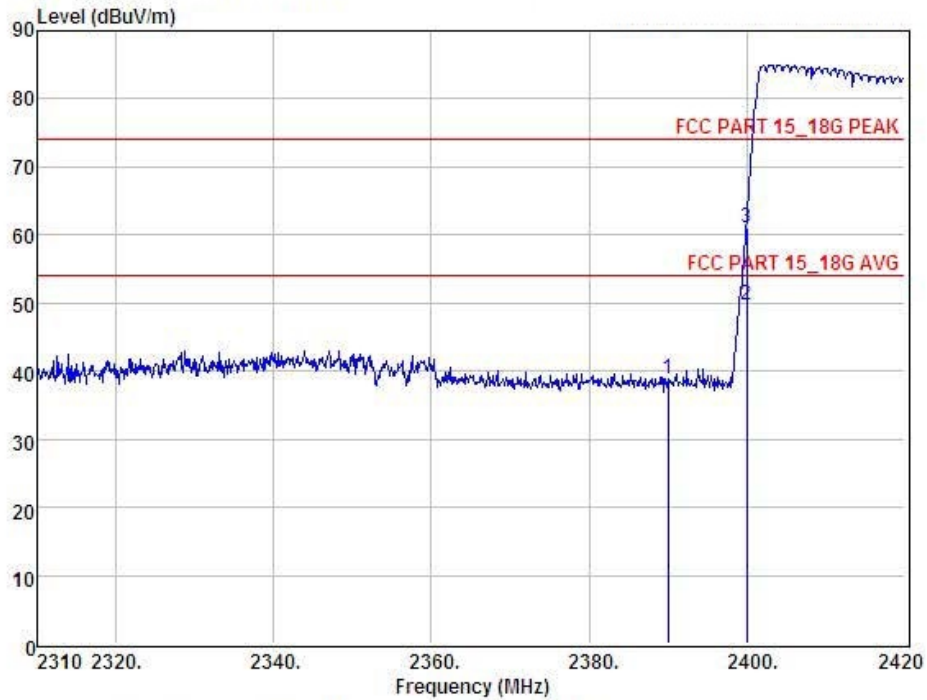

Condition : FCC PART 15_18G PEAK 3m POL: HORIZONTAL									
Item	Freq	Read	Antenna	Preamp	Cable	Level	Limit	Margin	Remark
	MHz	Level	Factor	Factor	Loss	dBuV	dBuV	dBuV	
		dBuV	dB	dB	dB				
1	2390.00	42.25	27.62	34.97	3.92	38.82	74.00	-35.18	Peak
2	2400.00	53.23	27.62	34.97	3.94	49.82	54.00	-4.18	Average
3	2400.00	64.39	27.62	34.97	3.94	60.98	74.00	-13.02	Peak

Remark: Level = Read Level + Antenna Factor - Preamp Factor + Cable Loss

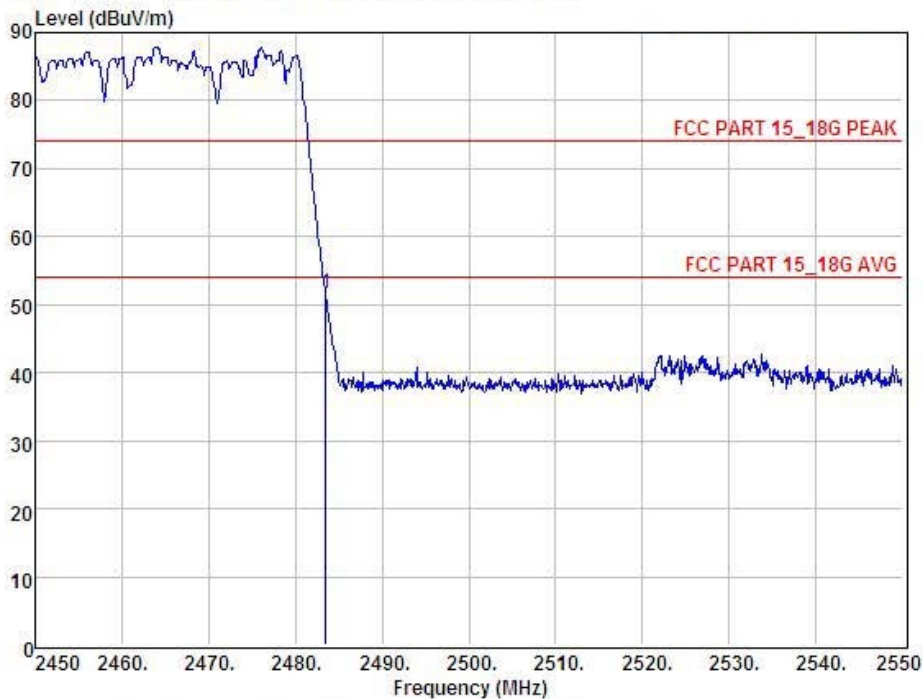


Condition : FCC PART 15_18G PEAK 3m POL: HORIZONTAL

Item	Freq MHz	Read Level dBuV	Antenna Factor dB	Preamp Factor dB	Cable Loss dB	Level dBuV	Limit dBuV	Margin dBuV	Remark
1	2483.50	54.96	27.59	34.97	4.00	51.58	74.00	-22.42	Peak

Remark: Level = Read Level + Antenna Factor - Preamp Factor + Cable Loss




EUT :	Bluetooth speaker	Model Name :	SP-1078
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Polarization :	Vertical
Test Voltage :	DC 5V from PC with AC 120V/50Hz		
Test Mode :	Hopping for GFSK		

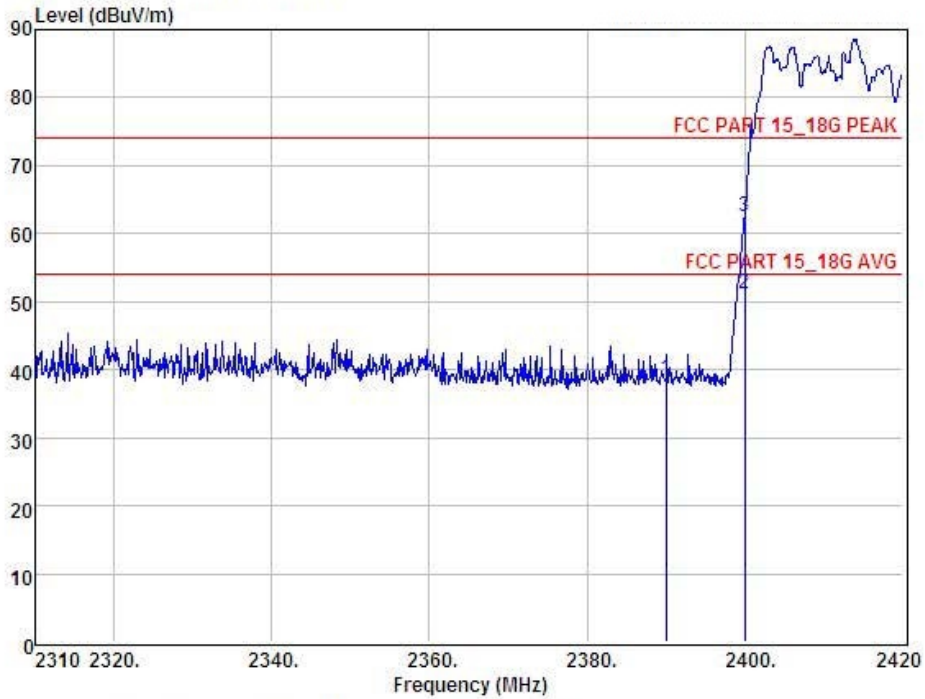

Condition		: FCC PART 15_18G PEAK 3m				POL: VERTICAL			
Item	Freq	Read	Antenna	Preamp	Cable	Level	Limit	Margin	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dBuV	
1	2390.00	42.08	27.62	34.97	3.92	38.65	74.00	-35.35	Peak
2	2400.00	54.61	27.62	34.97	3.94	51.20	54.00	-2.80	Average
3	2400.00	65.79	27.62	34.97	3.94	62.38	74.00	-11.62	Peak

Remark: Level = Read Level + Antenna Factor - Preamp Factor + Cable Loss

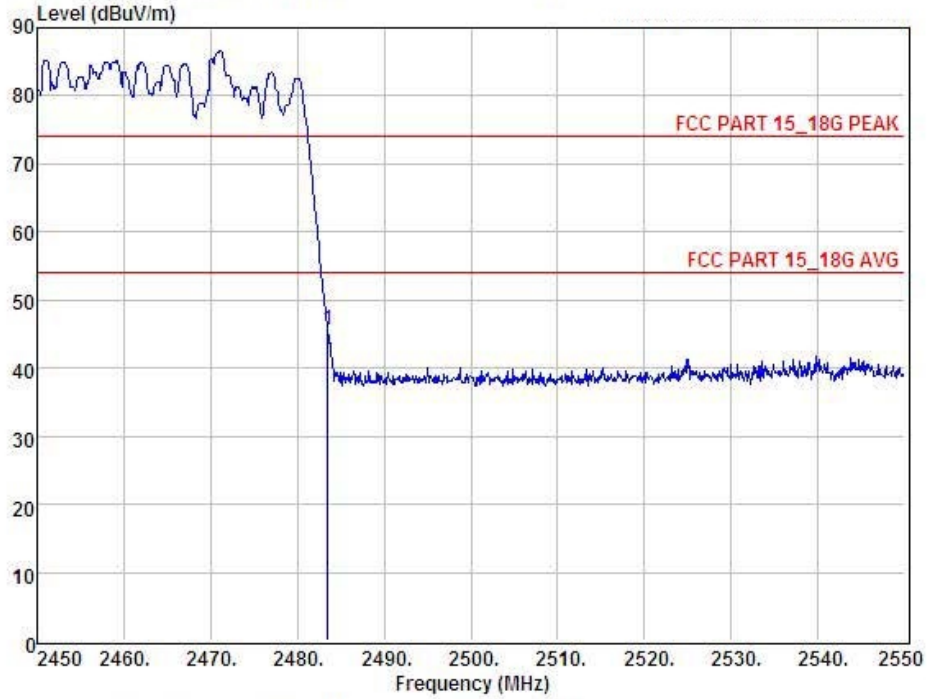


Condition : FCC PART 15_18G PEAK 3m POL: VERTICAL

Item	Freq MHz	Read Level dBuV	Antenna Factor dB	Preamp Factor dB	Cable Loss dB	Level dBuV	Limit dBuV	Margin dBuV	Remark
1	2483.50	48.91	27.59	34.97	4.00	45.53	74.00	-28.47	Peak

Remark: Level = Read Level + Antenna Factor - Preamp Factor + Cable Loss

EUT :	Bluetooth speaker	Model Name :	SP-1078
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Polarization :	Horizontal
Test Voltage :	DC 5V from PC with AC 120V/50Hz		
Test Mode :	CH00 for 8-DPSK		

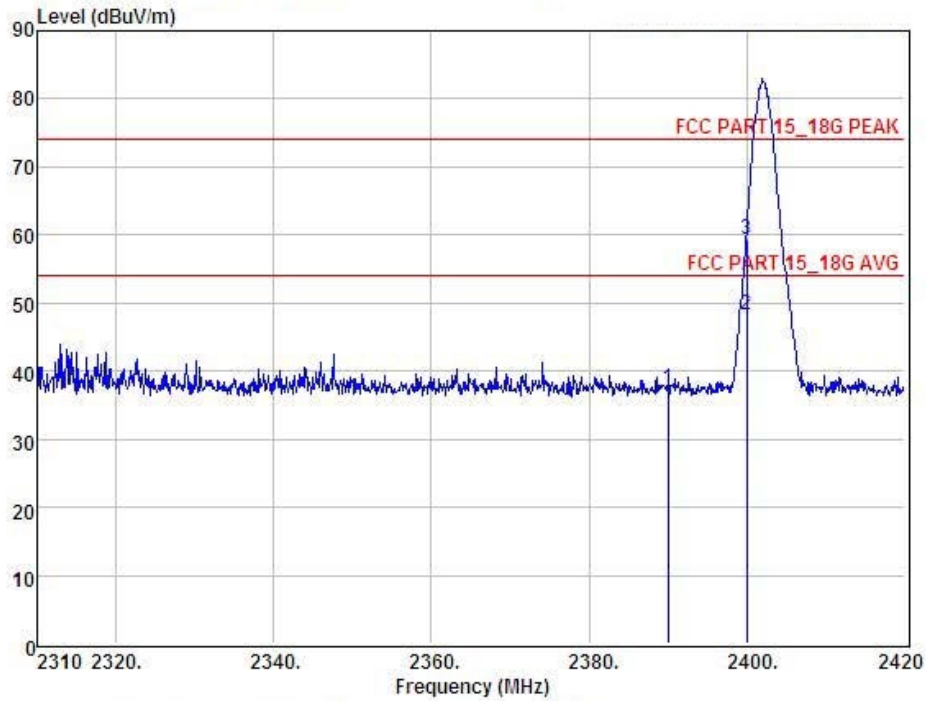


Condition : FCC PART 15_18G PEAK 3m POL: HORIZONTAL

Item	Freq MHz	Read Level dBuV	Antenna Factor dB	Preamp Factor dB	Cable Loss dB	Level dBuV	Limit dBuV	Margin dBuV	Remark
1	2390.00	40.91	27.62	34.97	3.92	37.48	74.00	-36.52	Peak
2	2400.00	51.66	27.62	34.97	3.94	48.25	54.00	-5.75	Average
3	2400.00	62.75	27.62	34.97	3.94	59.34	74.00	-14.66	Peak

Remark: Level = Read Level + Antenna Factor - Preamp Factor + Cable Loss


EUT :	Bluetooth speaker	Model Name :	SP-1078
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Polarization :	Vertical
Test Voltage :	DC 5V from PC with AC 120V/50Hz		
Test Mode :	CH00 for 8-DPSK		

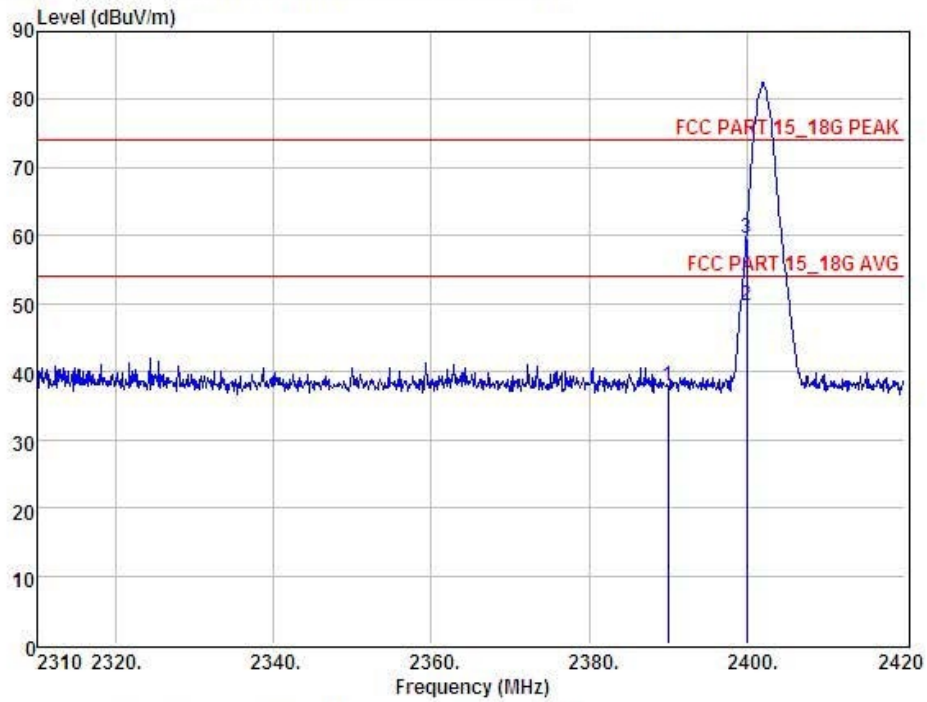

Condition : FCC PART 15_18G PEAK 3m POL: VERTICAL									
Item	Freq	Read	Antenna	Preamp	Cable	Level	Limit	Margin	Remark
	MHz	Level	Factor	Factor	Loss	dBuV	dBuV	dBuV	
		dBuV	dB	dB	dB				
1	2390.00	41.38	27.62	34.97	3.92	37.95	74.00	-36.05	Peak
2	2400.00	53.16	27.62	34.97	3.94	49.75	54.00	-4.25	Average
3	2400.00	62.99	27.62	34.97	3.94	59.58	74.00	-14.42	Peak

Remark: Level = Read Level + Antenna Factor - Preamp Factor + Cable Loss


EUT :	Bluetooth speaker	Model Name :	SP-1078
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Polarization :	Horizontal
Test Voltage :	DC 5V from PC with AC 120V/50Hz		
Test Mode :	CH78 for 8-DPSK		

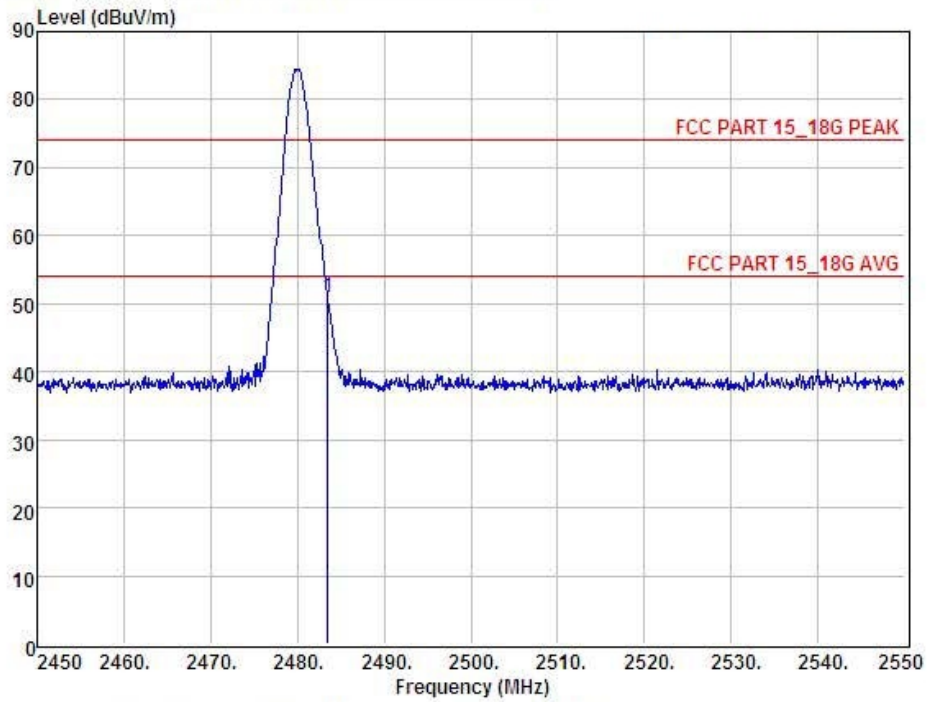

Condition : FCC PART 15_18G PEAK 3m POL: HORIZONTAL									
Item	Freq	Read	Antenna	Preamp	Cable	Level	Limit	Margin	Remark
	MHz	Level	Factor	Factor	Loss	dBuV	dBuV	dBuV	
		dBuV	dB	dB	dB				
1	2483.50	54.34	27.59	34.97	4.00	50.96	74.00	-23.04	Peak

Remark: Level = Read Level + Antenna Factor - Preamp Factor + Cable Loss


EUT :	Bluetooth speaker	Model Name :	SP-1078
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Polarization :	Vertical
Test Voltage :	DC 5V from PC with AC 120V/50Hz		
Test Mode :	CH78 for 8-DPSK		

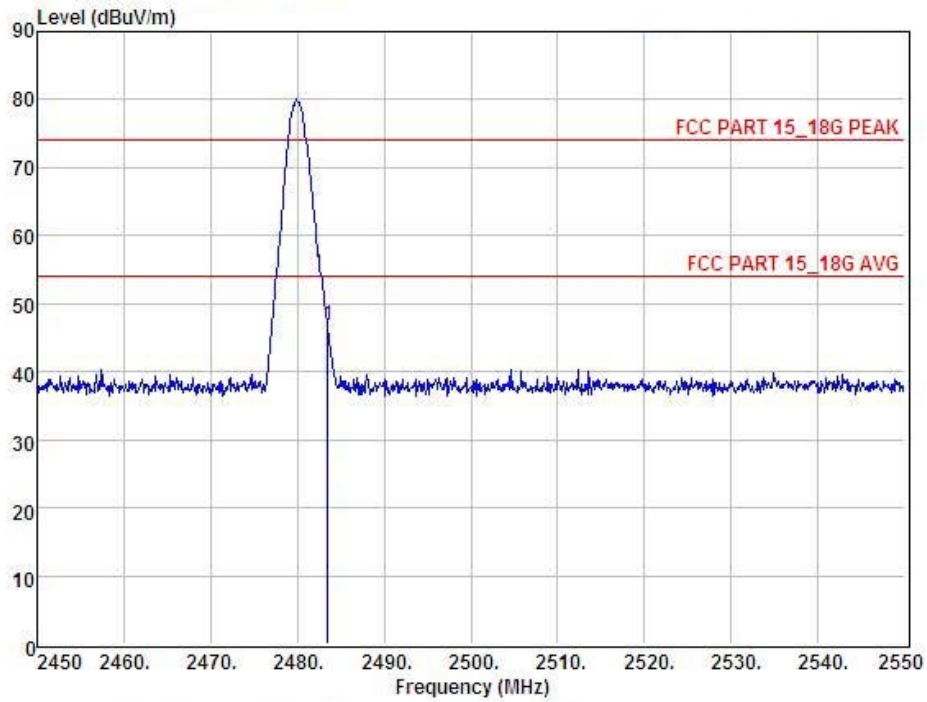

Condition : FCC PART 15_18G PEAK 3m POL: VERTICAL									
Item	Freq	Read	Antenna	Preamp	Cable	Level	Limit	Margin	Remark
	MHz	Level	Factor	Factor	Loss	dBuV	dBuV	dBuV	
		dBuV	dB	dB	dB				
1	2483.50	50.20	27.59	34.97	4.00	46.82	74.00	-27.18	Peak

Remark: Level = Read Level + Antenna Factor - Preamp Factor + Cable Loss


EUT :	Bluetooth speaker	Model Name :	SP-1078
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Polarization :	Horizontal
Test Voltage :	DC 5V from PC with AC 120V/50Hz		
Test Mode :	Hopping for 8-DPSK		

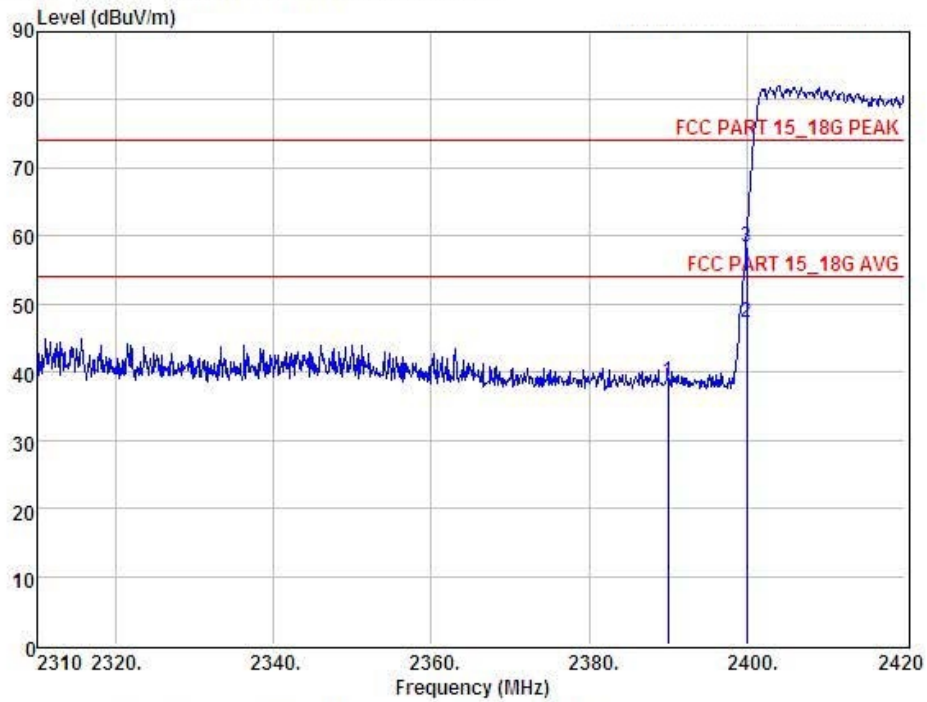

Condition : FCC PART 15_18G PEAK 3m POL: HORIZONTAL

Item	Freq MHz	Read Level dBuV	Antenna Factor dB	Preamp Factor dB	Cable Loss dB	Level dBuV	Limit dBuV	Margin dBuV	Remark
1	2390.00	41.97	27.62	34.97	3.92	38.54	74.00	-35.46	Peak
2	2400.00	80.62	27.62	34.97	3.94	47.21	54.00	-6.79	Average
3	2400.00	61.84	27.62	34.97	3.94	58.43	74.00	-15.57	Peak

Remark: Level = Read Level + Antenna Factor - Preamp Factor + Cable Loss

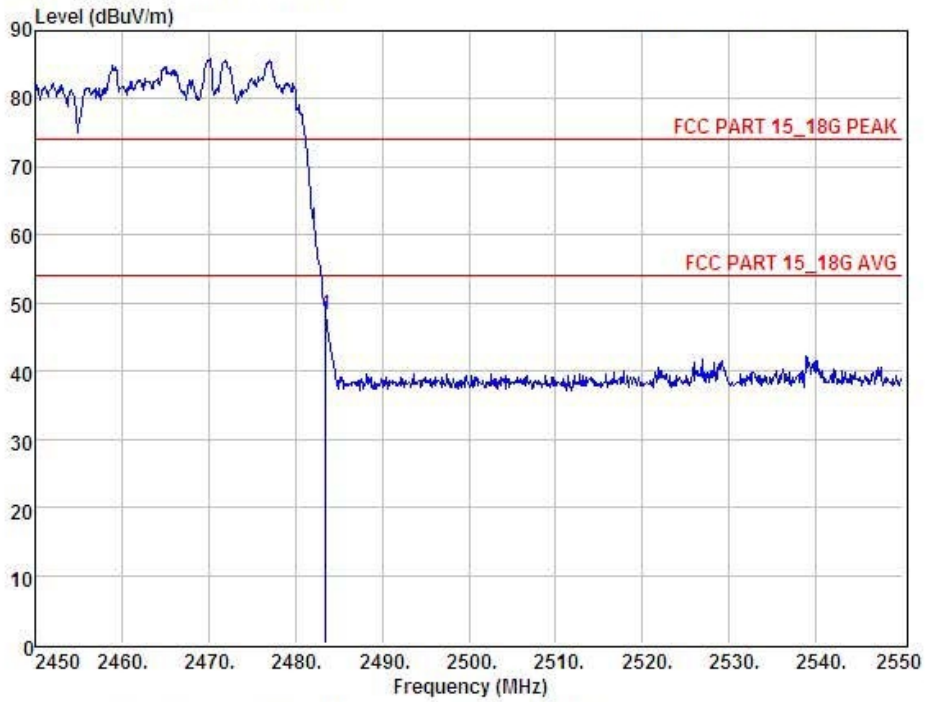


Condition : FCC PART 15_18G PEAK 3m POL: HORIZONTAL

Item	Freq MHz	Read Level dBuV	Antenna Factor dB	Preamp Factor dB	Cable Loss dB	Level dBuV	Limit dBuV	Margin dBuV	Remark
1	2483.50	51.59	27.59	34.97	4.00	48.21	74.00	-25.79	Peak

Remark: Level = Read Level + Antenna Factor - Preamp Factor + Cable Loss


EUT :	Bluetooth speaker	Model Name :	SP-1078
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Polarization :	Vertical
Test Voltage :	DC 5V from PC with AC 120V/50Hz		
Test Mode :	Hopping for 8-DPSK		

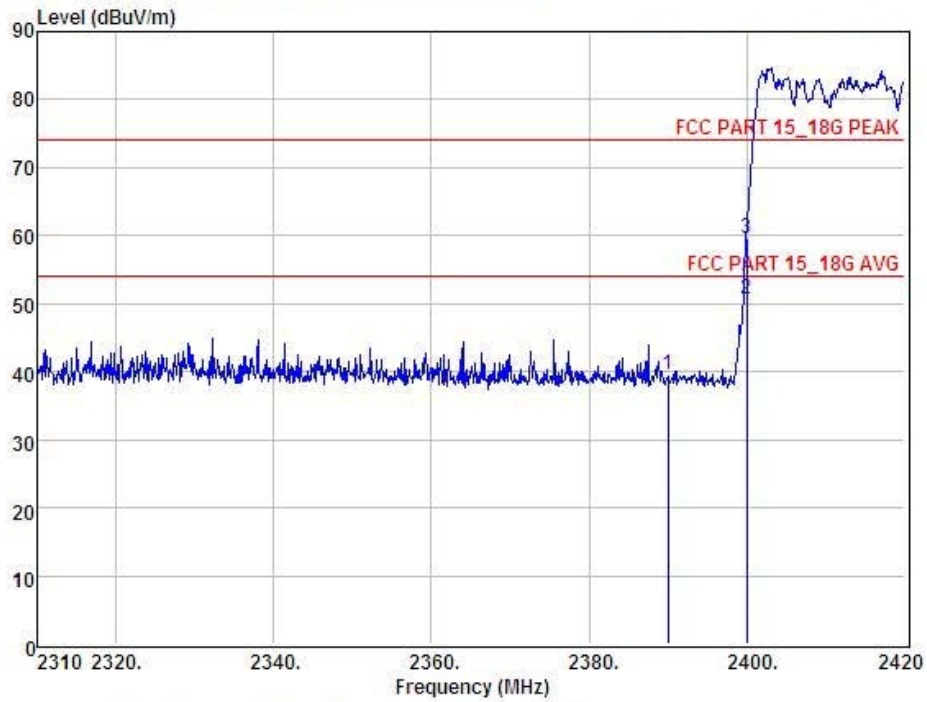

Condition : FCC PART 15_18G PEAK 3m POL: VERTICAL

Item	Freq MHz	Read Level dBuV	Antenna Factor dB	Preamp Factor dB	Cable Loss dB	Level dBuV	Limit dBuV	Margin dBuV	Remark
1	2390.00	42.95	27.62	34.97	3.92	39.52	74.00	-34.48	Peak
2	2400.00	54.14	27.62	34.97	3.94	50.73	54.00	-3.27	Average
3	2400.00	63.00	27.62	34.97	3.94	59.59	74.00	-14.41	Peak

Remark: Level = Read Level + Antenna Factor - Preamp Factor + Cable Loss

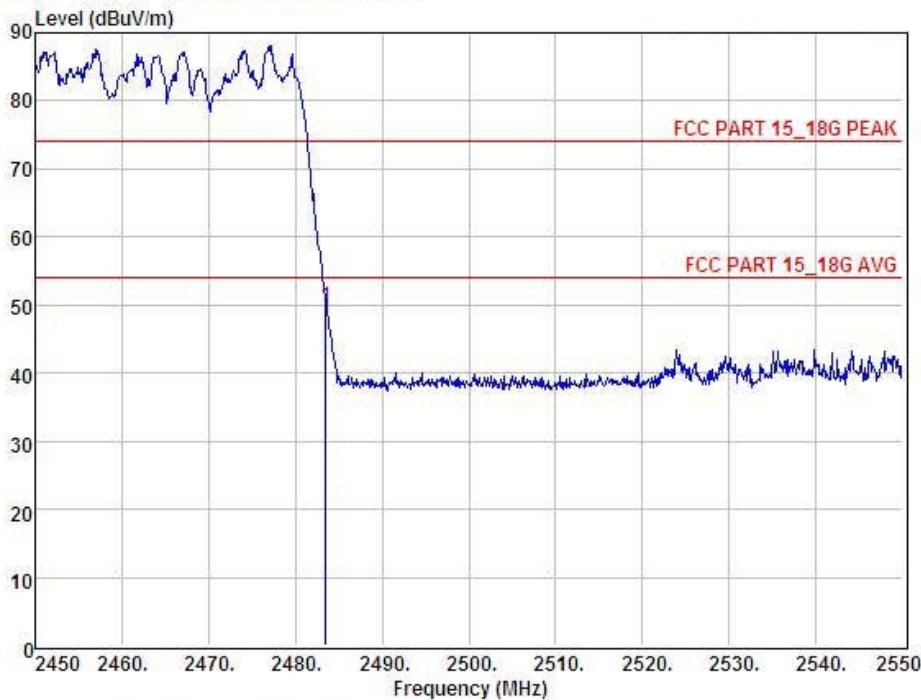

Condition : FCC PART 15_18G PEAK 3m POL: VERTICAL

Item	Freq MHz	Read Level dBuV	Antenna Factor dB	Preamp Factor dB	Cable Loss dB	Level dBuV	Limit dBuV	Margin dBuV	Remark
1	2483.50	53.18	27.59	34.97	4.00	49.80	74.00	-24.20	Peak

Remark: Level = Read Level + Antenna Factor - Preamp Factor + Cable Loss

4. NUMBER OF HOPPING CHANNEL

4.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (a)(1)(iii)	Number of Hopping Channel	≥15	2400-2483.5	PASS

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> Operating Frequency Range
RB	300 kHz
VB	1000 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting : RBW= 100KHz, VBW=100KHz, Sweep time = Auto.

4.1.2 DEVIATION FROM STANDARD

No deviation.

4.1.3 TEST SETUP




4.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

4.1.5 TEST RESULTS


EUT :	Bluetooth speaker	Model Name :	SP-1078
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1015 hPa	Test Voltage :	DC 5V from PC with AC 120V/50Hz
Test Mode :	Hopping Mode for GFSK		

Number of Hopping Channel	79
---------------------------	----

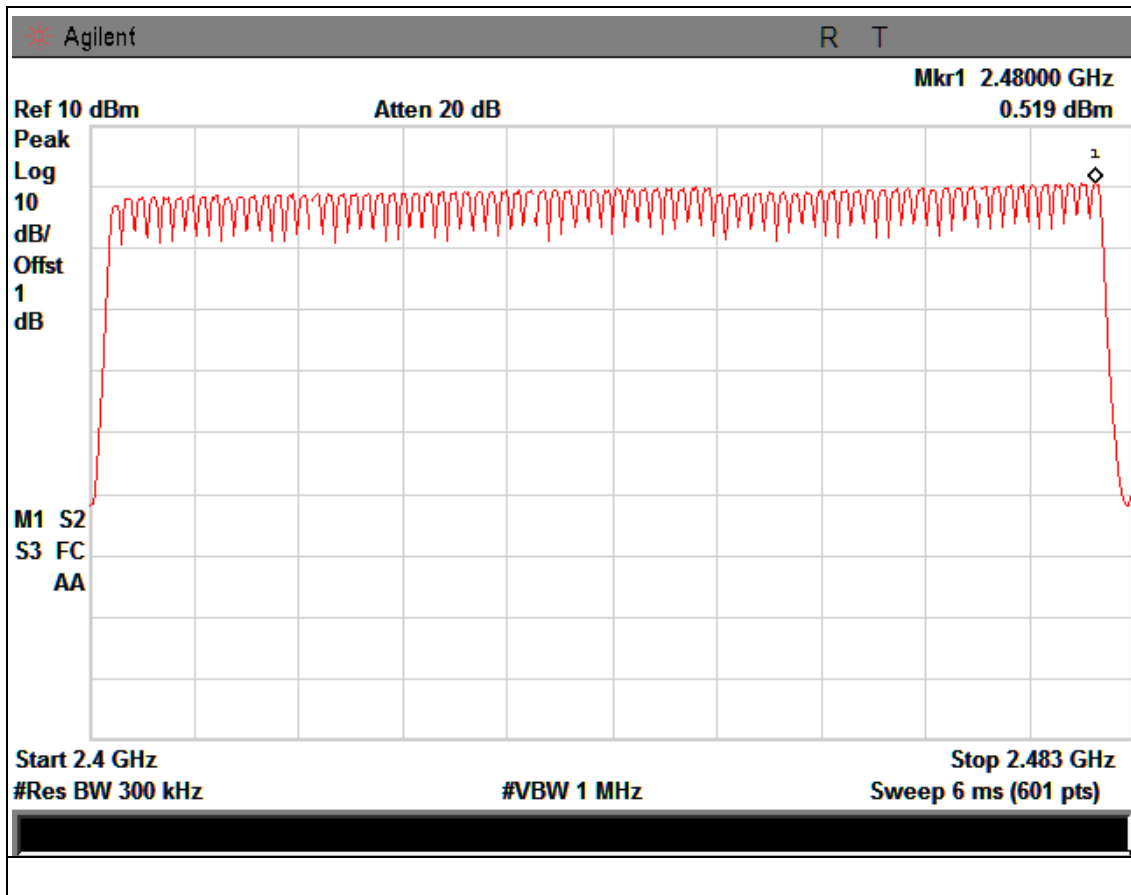

EUT :	Bluetooth speaker	Model Name :	SP-1078
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1015 hPa	Test Voltage :	DC 5V from PC with AC 120V/50Hz
Test Mode :	Hopping Mode for 8-DPSK		

Number of Hopping Channel	79
---------------------------	----

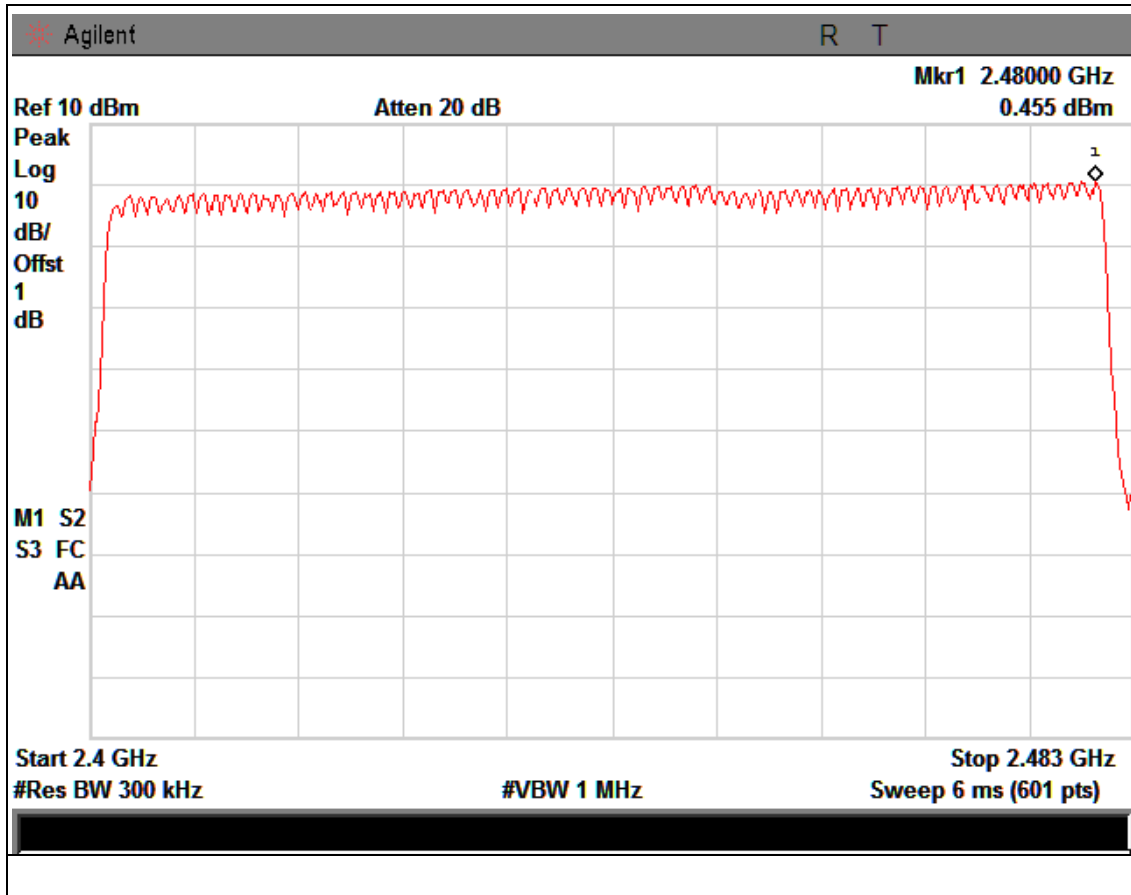

5. AVERAGE TIME OF OCCUPANCY

5.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (a)(1)(iii)	Average Time of Occupancy	0.4sec	2400-2483.5	PASS


5.1.1 TEST PROCEDURE

- a. The transmitter output (antenna port) was connected to the spectrum analyzer
- b. Set RBW of spectrum analyzer to 1MHz and VBW to 1MHz.
- c. Use a video trigger with the trigger level set to enable triggering only on full pulses.
- d. Sweep Time is more than once pulse time.
- e. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- f. Measure the maximum time duration of one single pulse.
- g. Set the EUT for DH5, DH3 and DH1 packet transmitting.
- h. Measure the maximum time duration of one single pulse.
- i. DH5 Packet permit maximum $1600 / 79 / 6 = 3.37$ hops per second in each channel (5 time slots RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times $3.37 \times 31.6 = 106.6$ within 31.6 seconds.
- j. DH3 Packet permit maximum $1600 / 79 / 4 = 5.06$ hops per second in each channel (3 time slots RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times $5.06 \times 31.6 = 160$ within 31.6 seconds.
- k. DH1 Packet permit maximum $1600 / 79 / 2 = 10.12$ hops per second in each channel (1 time slot RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times $10.12 \times 31.6 = 320$ within 31.6 seconds.

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP

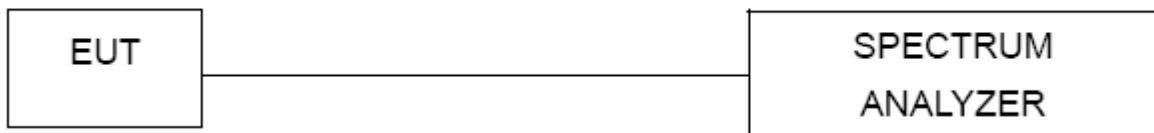


5.1.4 EUT OPERATION CONDITIONS



The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

5.1.5 TEST RESULTS

EUT :	Bluetooth speaker	Model Name :	SP-1078
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 5V from PC with AC 120V/50Hz
Test Mode :	CH39 -DH1/DH3/DH5 (1Mbps Mode) for GFSK		


Data Packet	Frequency (MHz)	Pluse Duration (ms)	Dwell Time (s)	Limit (s)
DH1	2441	0.3667	0.117	0.4
DH3	2441	2.3670	0.379	0.4
DH5	2441	2.8500	0.304	0.4


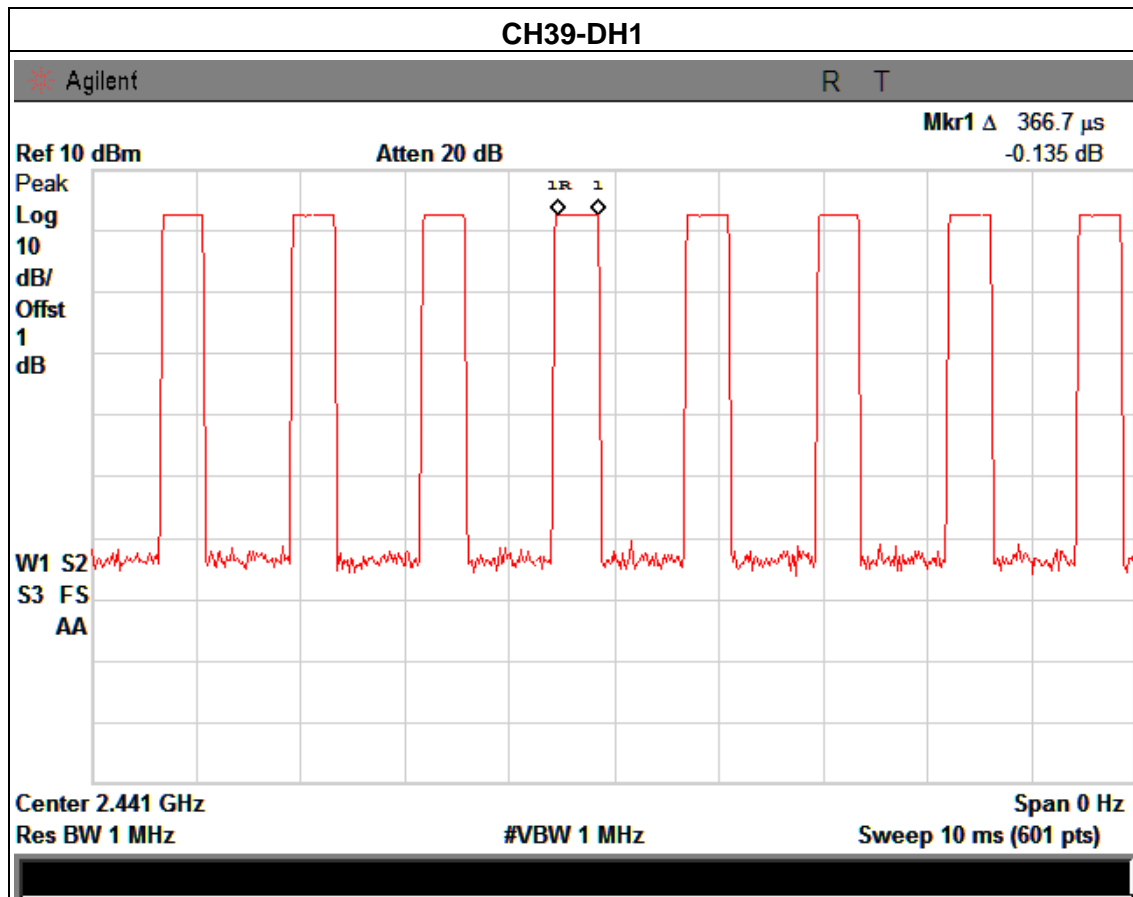


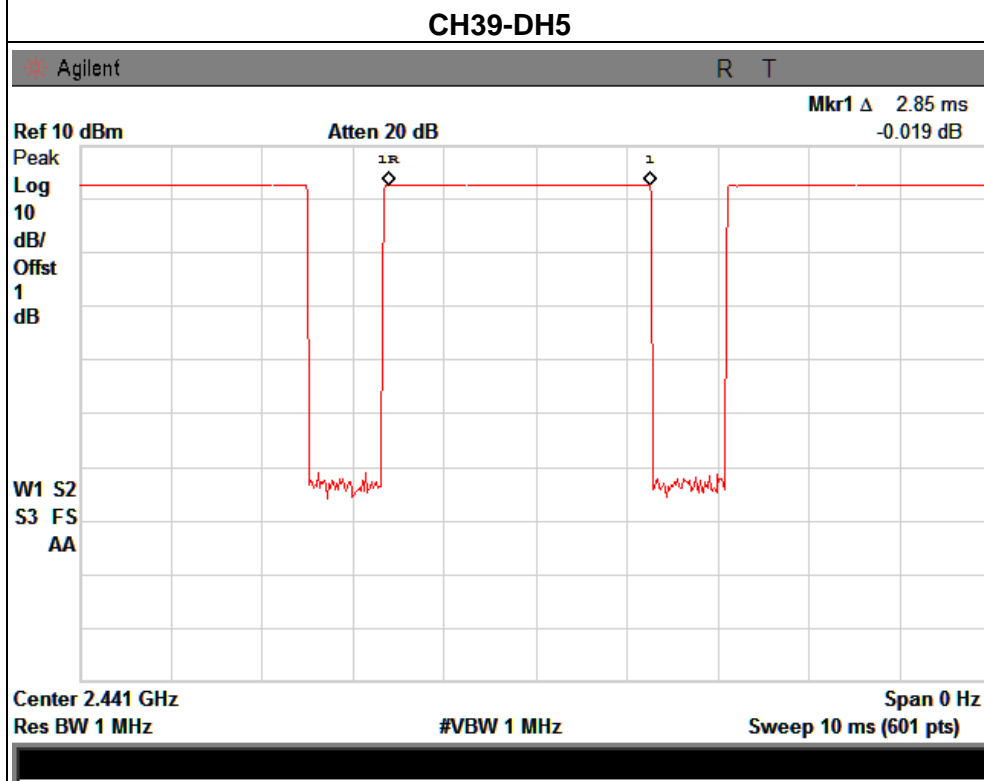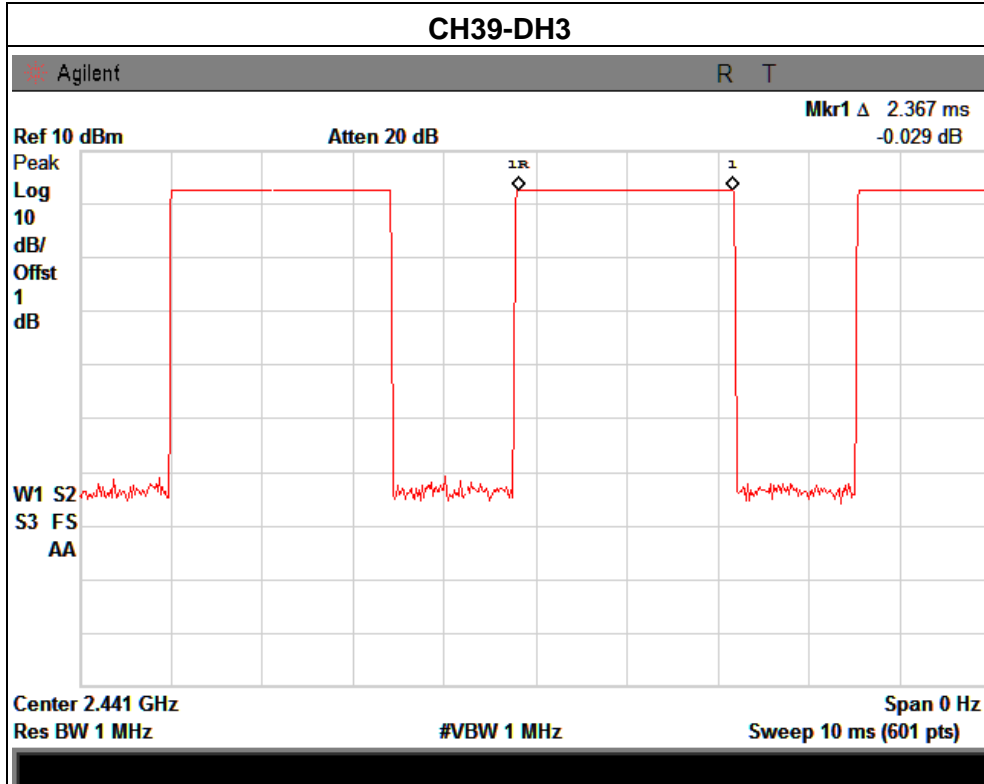

EUT :	Bluetooth speaker	Model Name :	SP-1078
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 5V from PC with AC 120V/50Hz
Test Mode :	CH39 -DH1/DH3/DH5 (3Mbps Mode) 8-DPSK		

Data Packet	Frequency (MHz)	Pluse Duration (ms)	Dwell Time (s)	Limit (s)
3-DH1	2441	0.3833	0.123	0.4
3-DH3	2441	2.4000	0.384	0.4
3-DH5	2441	2.8670	0.306	0.4

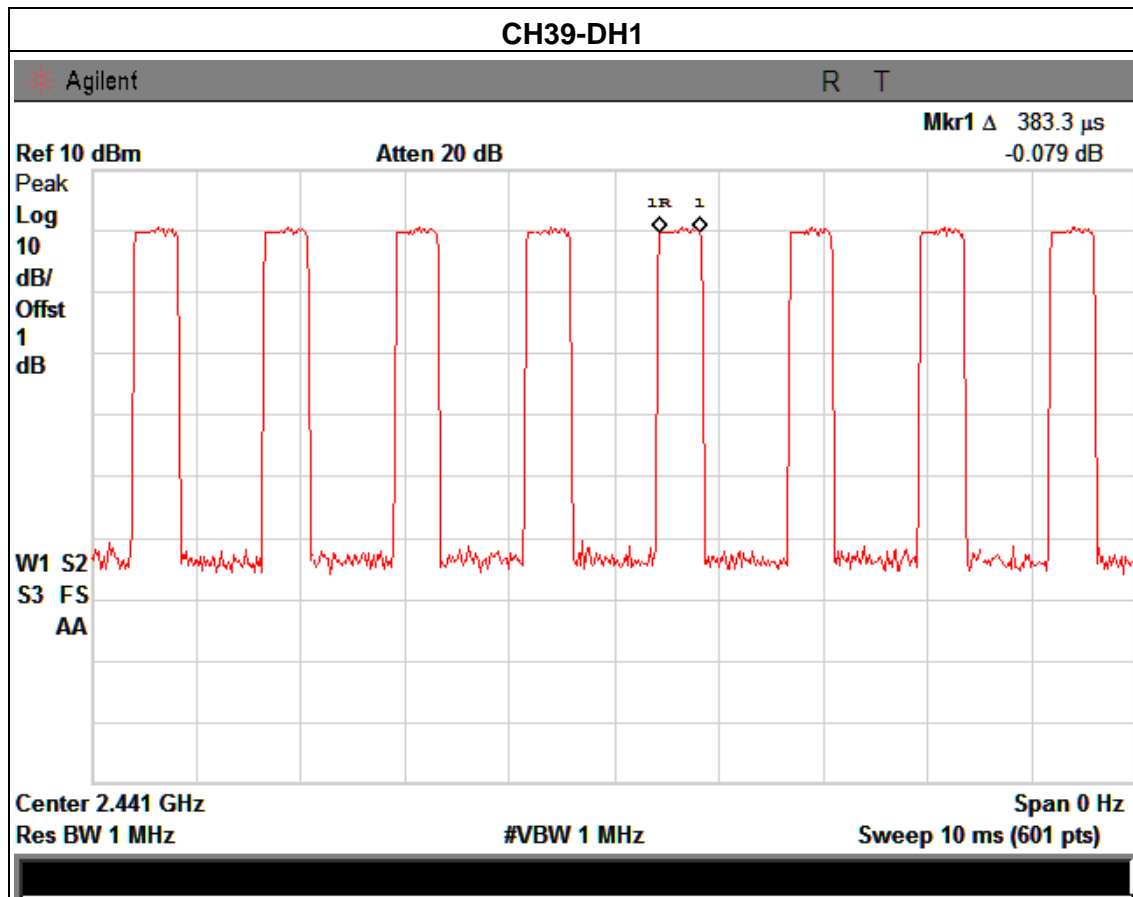

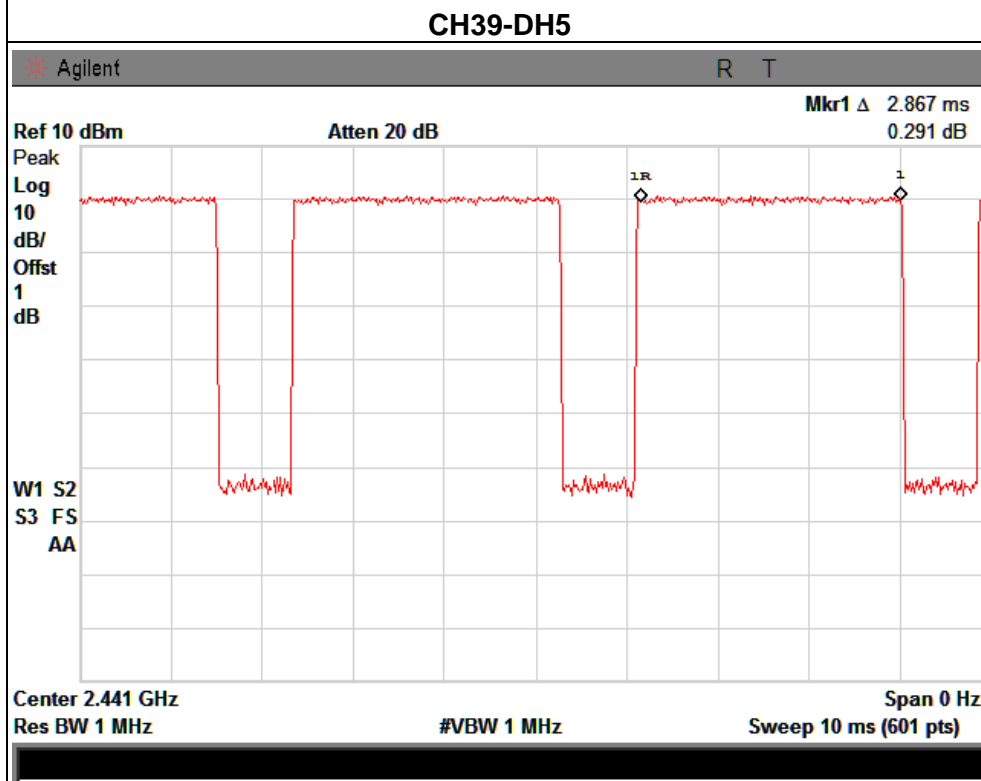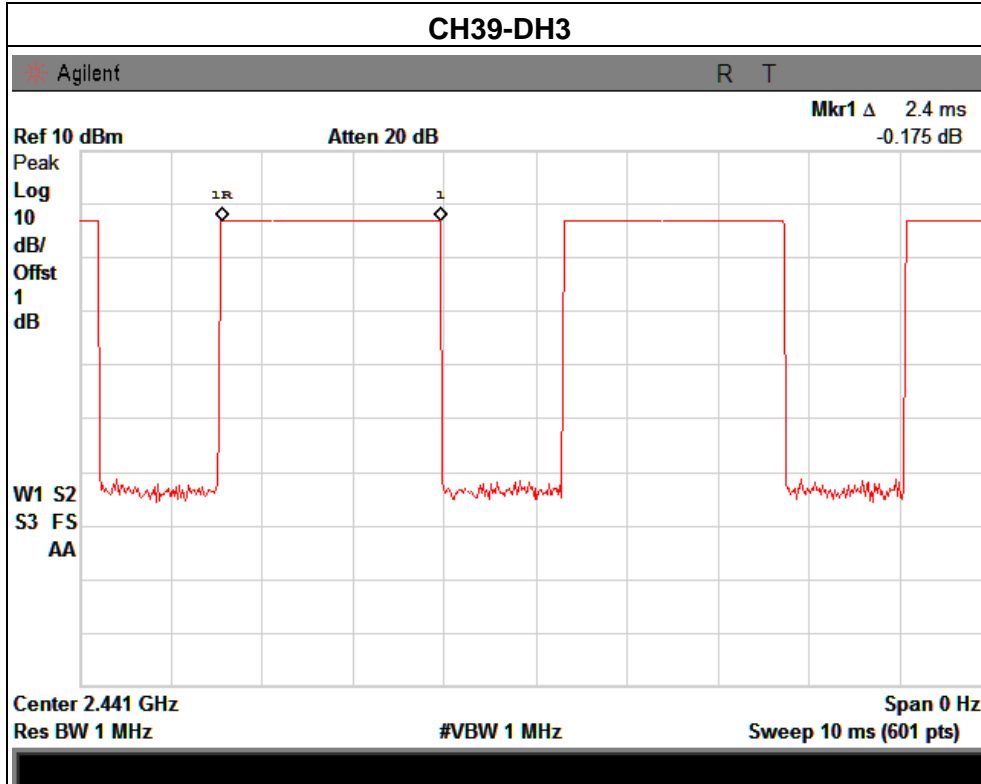

6. HOPPING CHANNEL SEPARATION MEASUREMENT

6.1 APPLIED PROCEDURES / LIMIT

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RB	30 kHz (20dB Bandwidth) / 100 kHz (Channel Separation)
VB	100 kHz (20dB Bandwidth) / 100 kHz (Channel Separation)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto


6.1.1 TEST PROCEDURE

- The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
- The resolution bandwidth of 30 kHz and the video bandwidth of 100 kHz were utilised for 20 dB bandwidth measurement.
- The resolution bandwidth of 100 kHz and the video bandwidth of 100 kHz were utilised for channel separation measurement.

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP

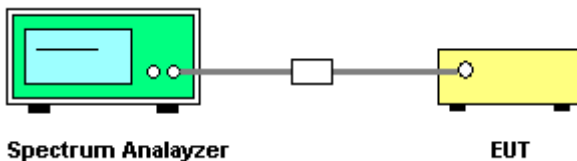

6.1.4 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.1.5 TEST RESULTS


EUT :	Bluetooth speaker	Model Name :	SP-1078
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 5V from PC with AC 120V/50Hz
Test Mode :	CH00 / CH39 /CH78 (1Mbps Mode)		



Frequency	Ch. Separation (MHz)	Limit (MHz)	Result
GFSK CH00	1.005	0.824701	Complies
GFSK CH39	1.005	0.836492	Complies
GFSK CH78	1.005	0.838865	Complies

Frequency	Ch. Separation (MHz)	Limit (MHz)	Result
8-DPSK CH00	1.005	0.853	Complies
8-DPSK CH39	1.005	0.849	Complies
8-DPSK CH78	1.005	0.853	Complies

For GFSK:


Ch. Separation Limits: > 20dB bandwidth


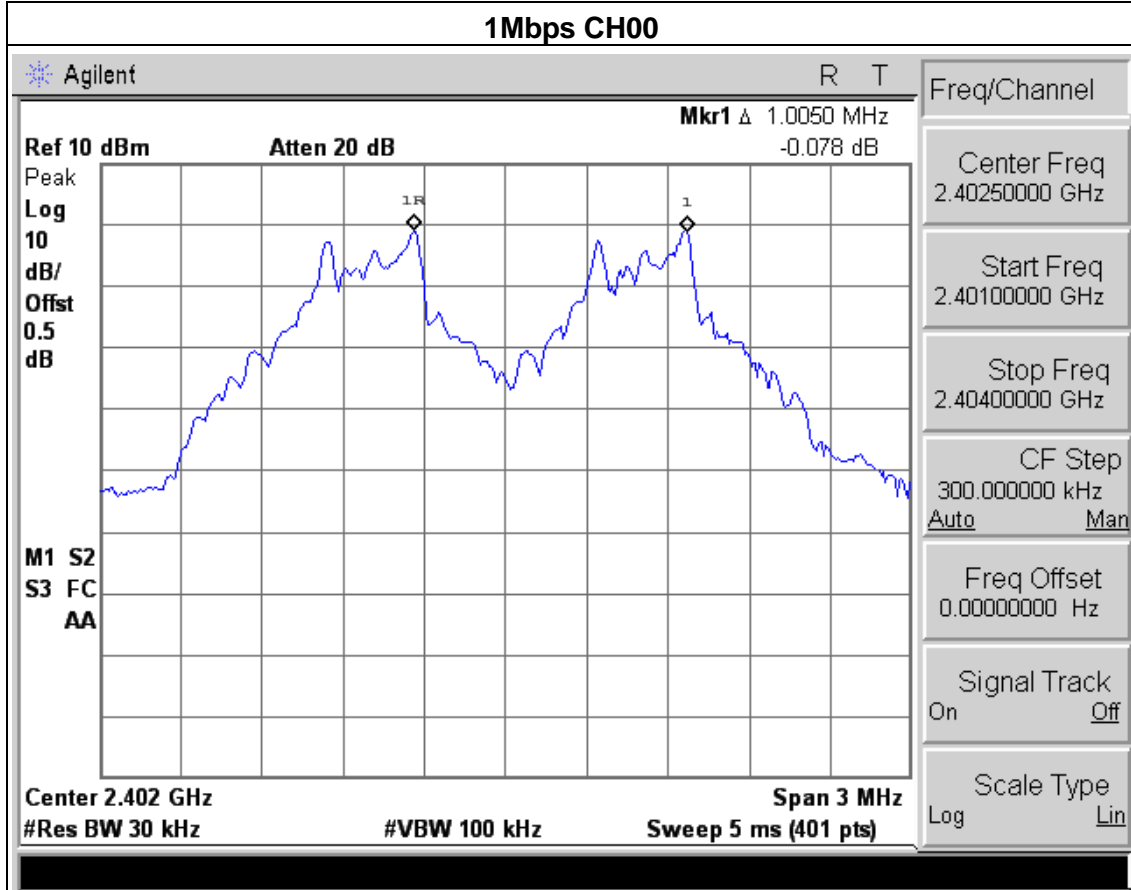


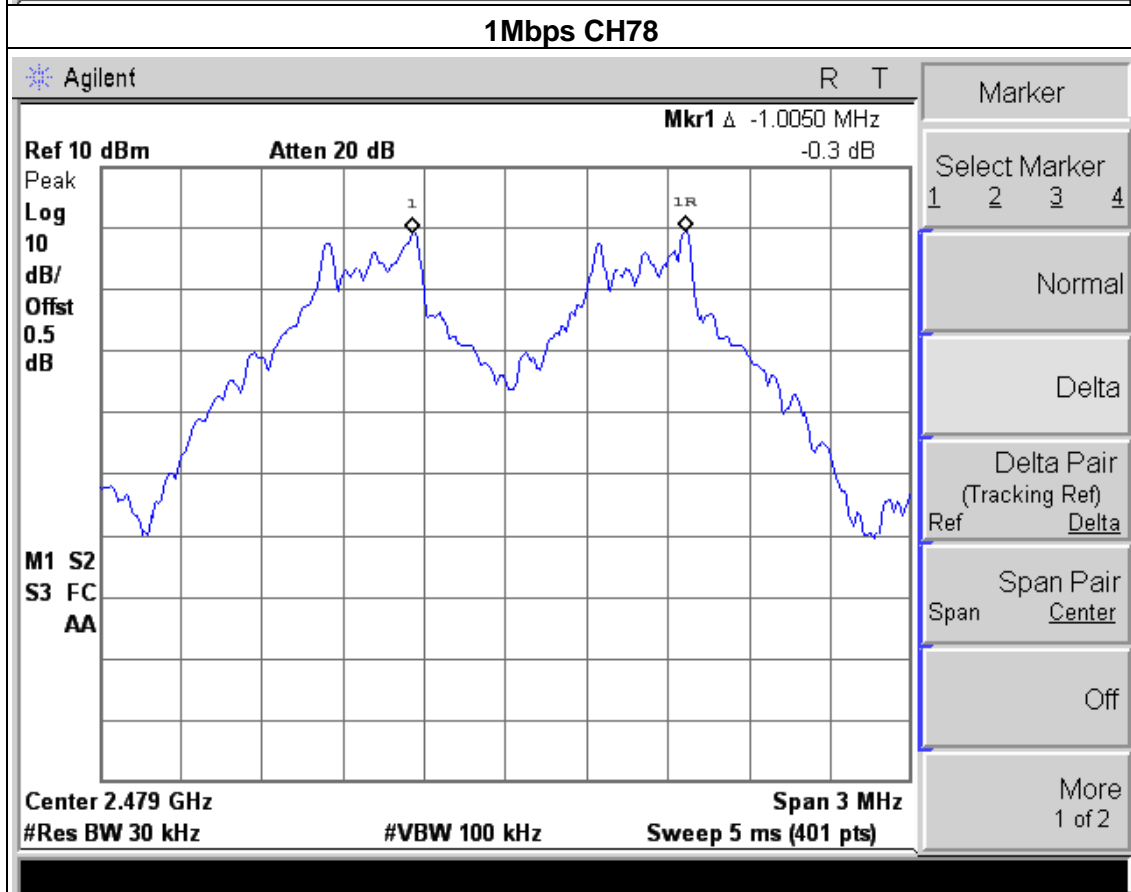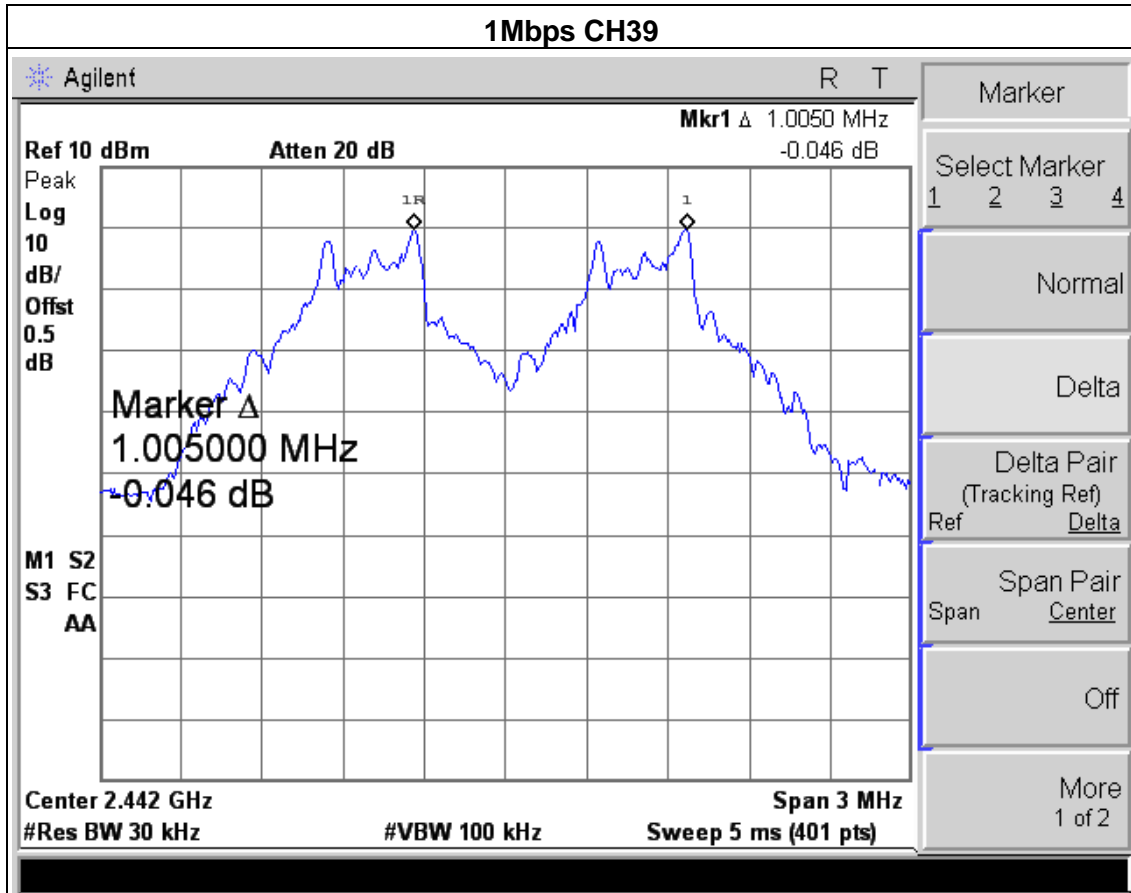

For 8-DPSK:

Ch. Separation Limits: > 2/3 of 20dB bandwidth

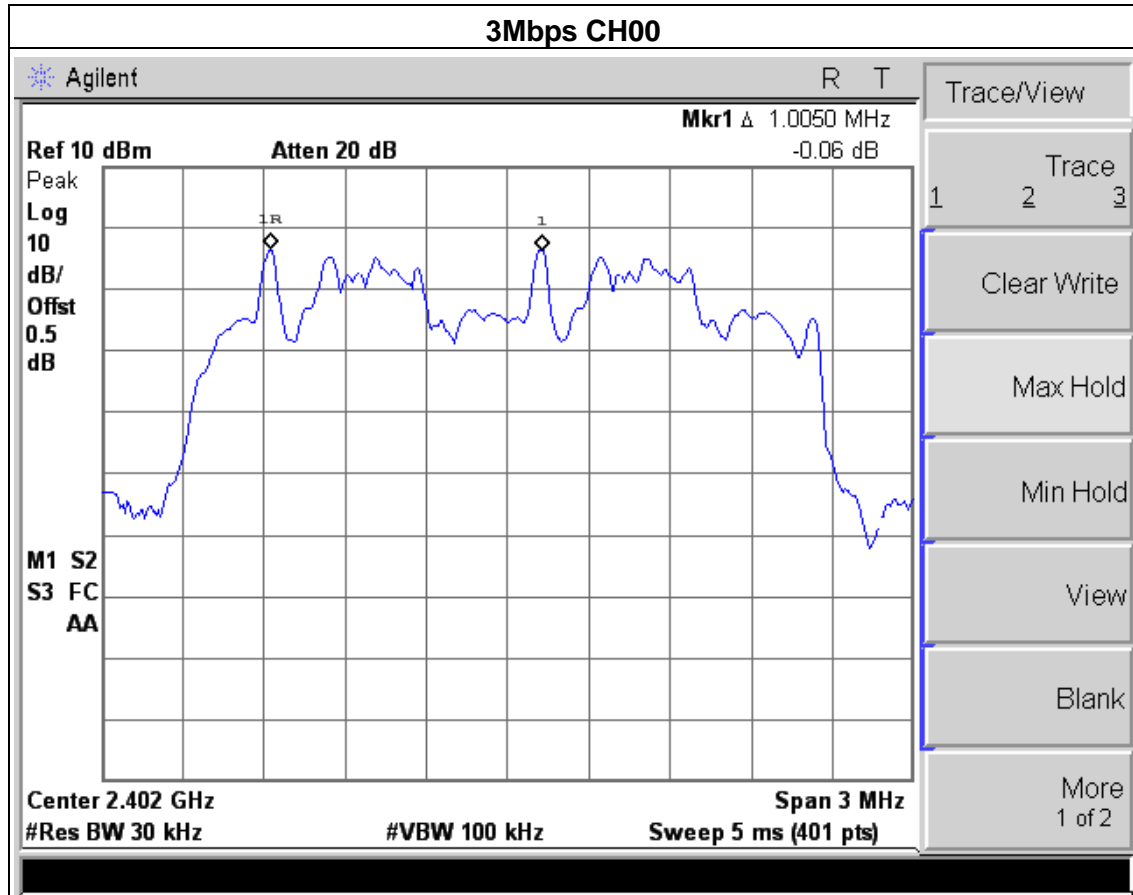

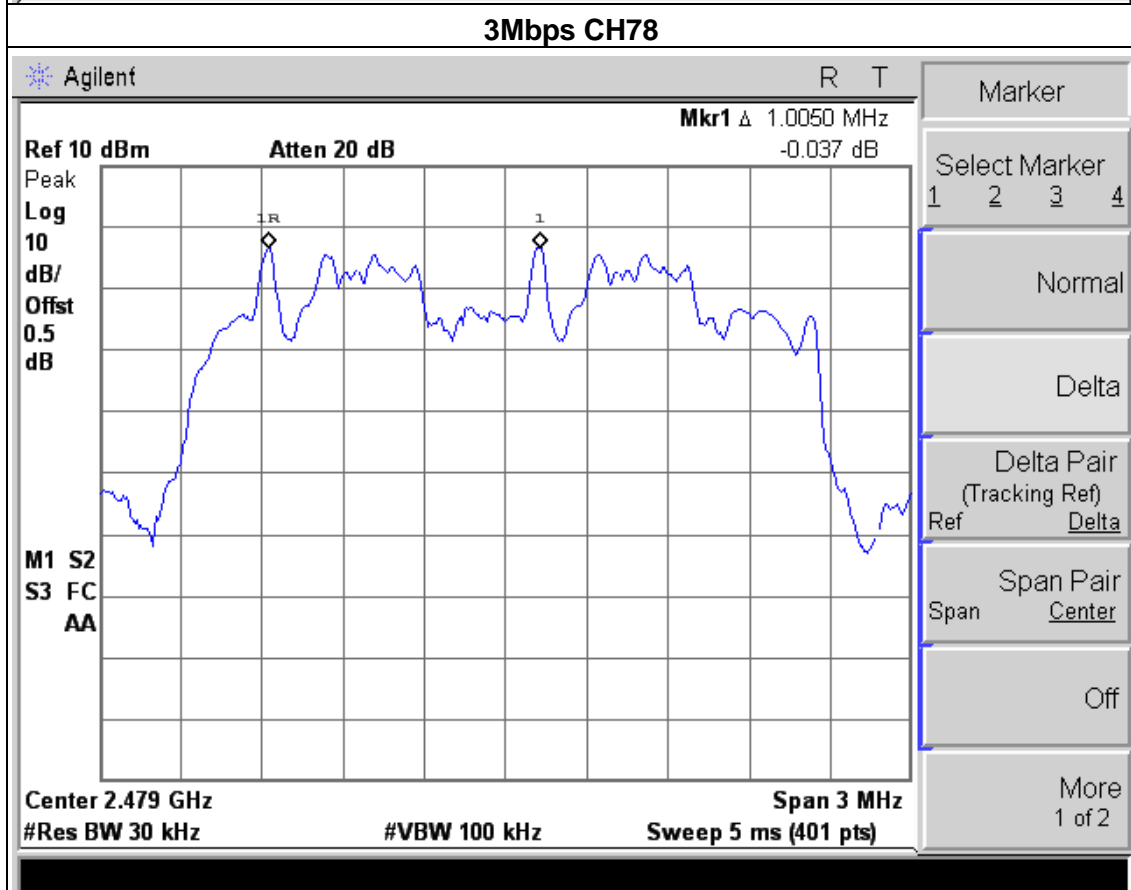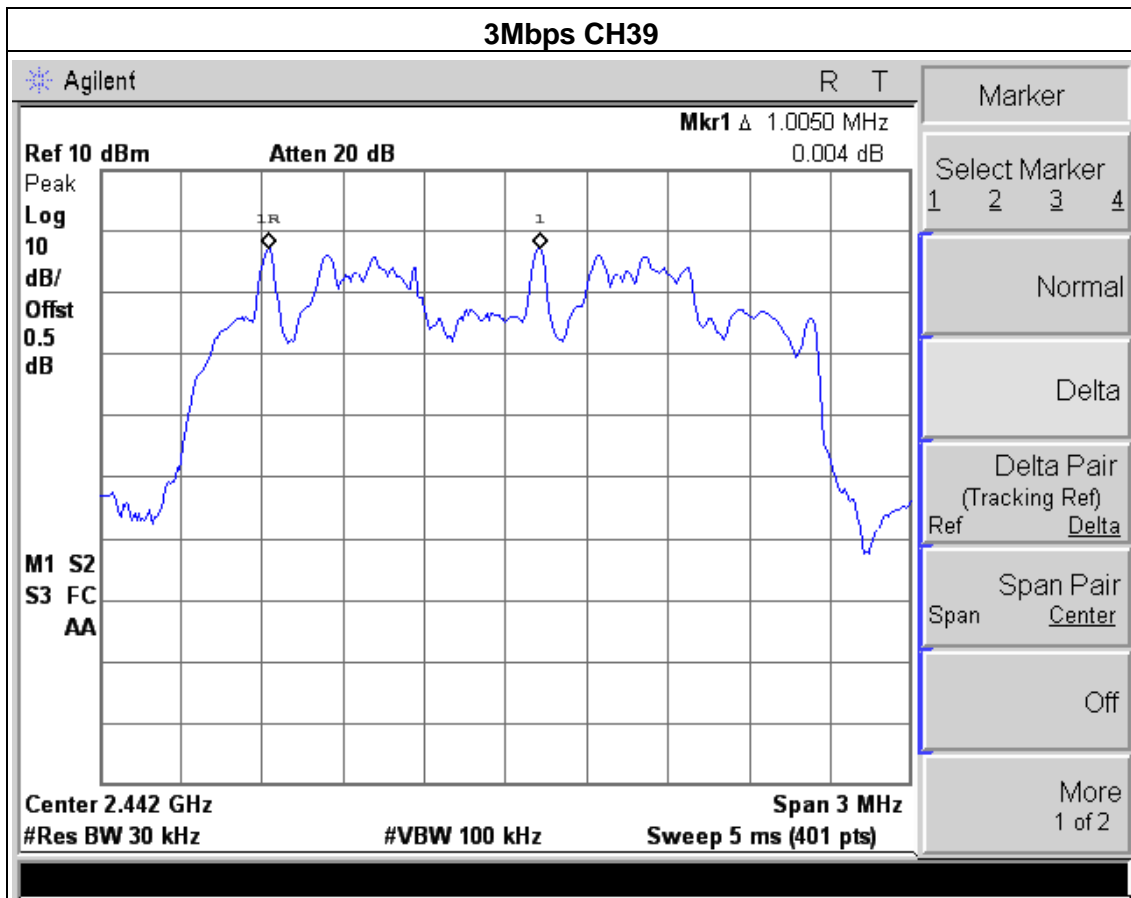

7. BANDWIDTH TEST

7.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (a)(1)	Bandwidth	(20dB bandwidth)	2400-2483.5	PASS

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RB	30 kHz (20dB Bandwidth) / 30 kHz (Channel Separation)
VB	100 kHz (20dB Bandwidth) / 30 kHz (Channel Separation)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto


7.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting : RBW= 30KHz, VBW=100KHz, Sweep time = Auto.

7.1.2 DEVIATION FROM STANDARD

No deviation.

7.1.3 TEST SETUP

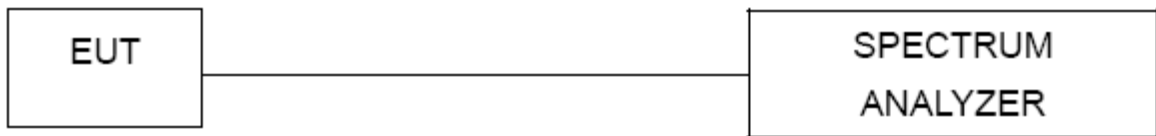


7.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

7.1.5 TEST RESULTS

EUT :	Bluetooth speaker	Model Name :	SP-1078
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 5V from PC with AC 120V/50Hz
Test Mode :	CH00 / CH39 /C78 for GFSK		

Frequency	20dB Bandwidth (kHz)	Result
2402 MHz	824.701	PASS
2441 MHz	836.492	PASS
2480 MHz	838.865	PASS

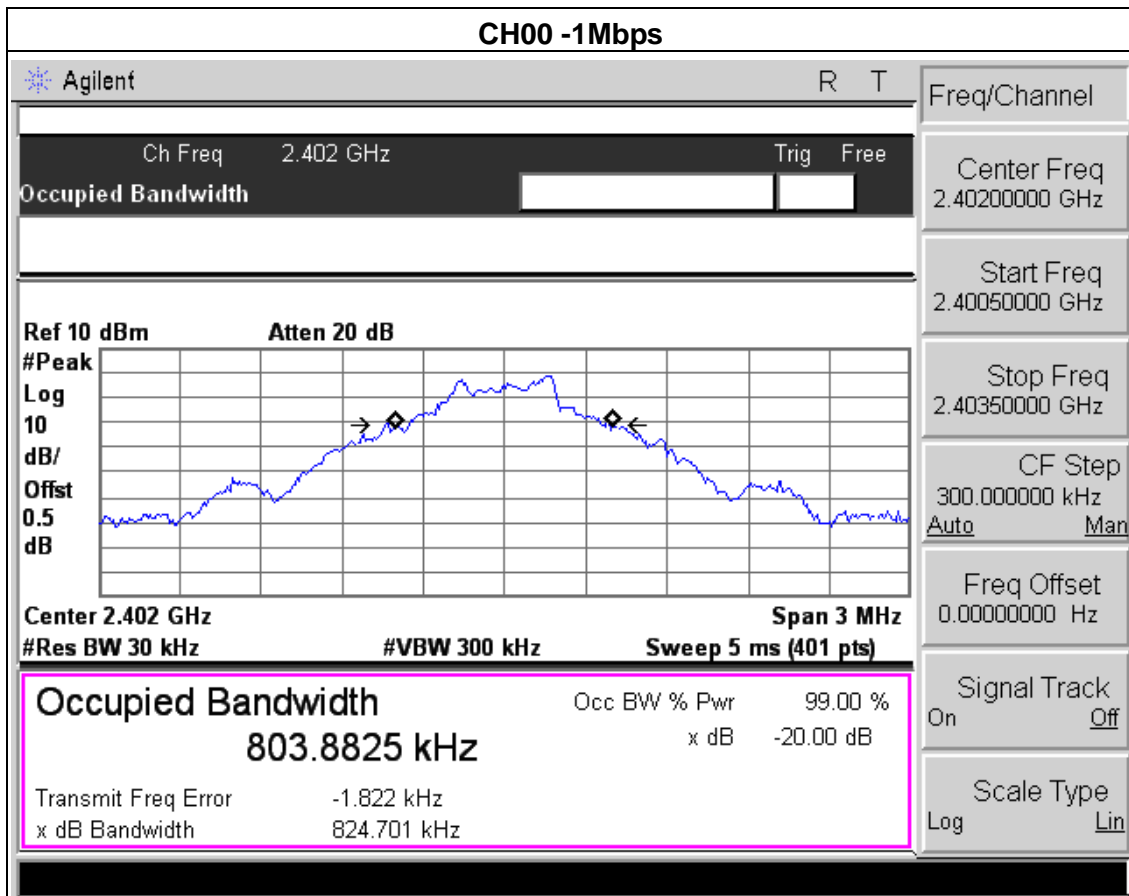



CH39 -1Mbps

Agilent R T

Ch Freq 2.441 GHz Trig Free

Occupied Bandwidth [] []

Ref 10 dBm Atten 20 dB

#Peak #

Log #

10 #

dB/ #

Offst #

0.5 #

dB #

Center 2.441 GHz Span 3 MHz

#Res BW 30 kHz #VBW 300 kHz Sweep 5 ms (401 pts)

Occupied Bandwidth	Occ BW % Pwr	99.00 %
825.9612 kHz	x dB	-20.00 dB
Transmit Freq Error	-4.896 kHz	
x dB Bandwidth	836.492 kHz	

Freq/Channel

Center Freq
2.44100000 GHz

Start Freq
2.43950000 GHz

Stop Freq
2.44250000 GHz

CF Step
300.000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

Scale Type
Log Lin

CH78 -1Mbps

Agilent R T

Ch Freq 2.48 GHz Trig Free

Occupied Bandwidth [] []

Ref 10 dBm Atten 20 dB

#Peak #

Log #

10 #

dB/ #

Offst #

0.5 #

dB #

Center 2.48 GHz Span 3 MHz

#Res BW 30 kHz #VBW 300 kHz Sweep 5 ms (401 pts)

Occupied Bandwidth	Occ BW % Pwr	99.00 %
827.9801 kHz	x dB	-20.00 dB
Transmit Freq Error	-5.654 kHz	
x dB Bandwidth	838.865 kHz	

Meas Setup

Avg Number
10
On Off

Avg Mode
Exp Repeat

Max Hold
On Off

Occ BW % Pwr
99.00 %


OBW Spar
3.00000000 MHz

x dB
-20.00 dB

Optimize
Ref Level

EUT :	Bluetooth speaker	Model Name :	SP-1078
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 5V from PC with AC 120V/50Hz
Test Mode :	CH00 / CH39 /C78 for 8-DPSK		

Frequency	20dB Bandwidth (MHz)	Result
2402 MHz	1.279	PASS
2441 MHz	1.273	PASS
2480 MHz	1.279	PASS

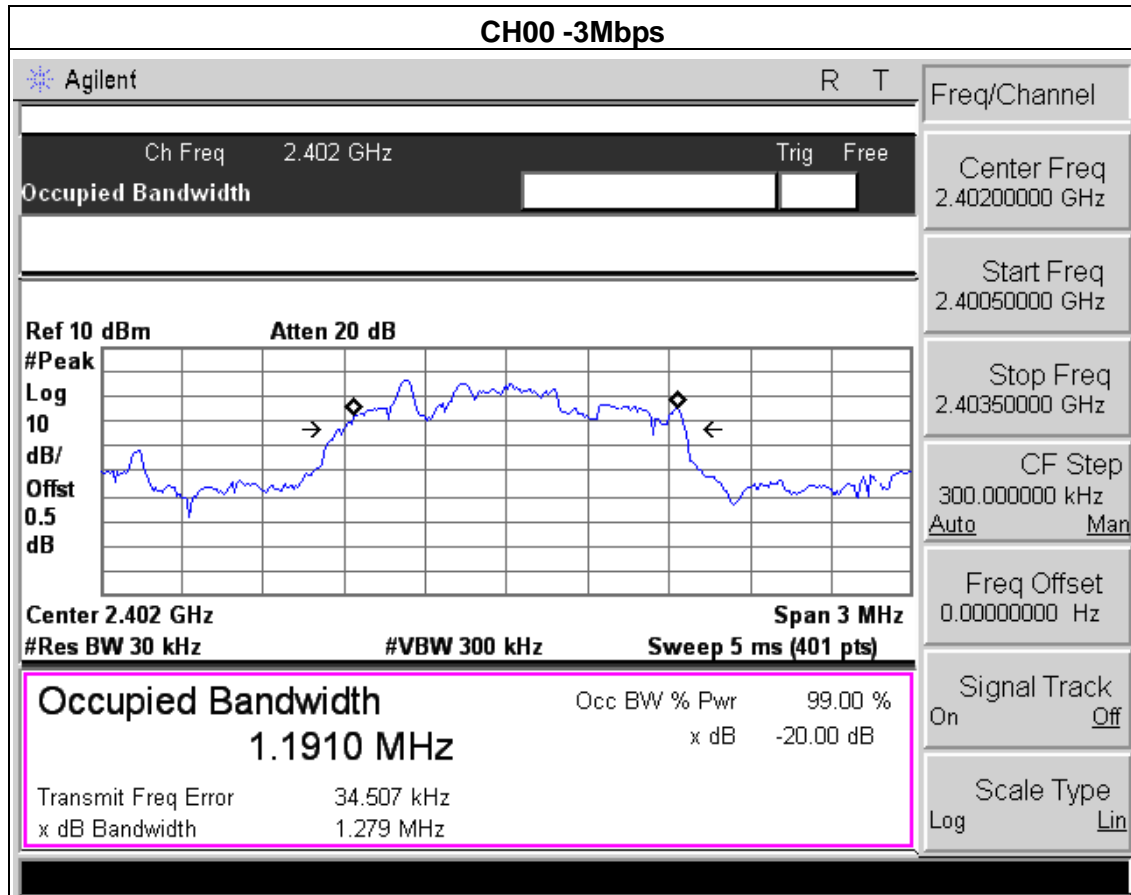



CH39 -3Mbps

Agilent R T

Ch Freq 2.441 GHz Trig Free

Occupied Bandwidth [] []

Ref 10 dBm Atten 20 dB

#Peak #

Log #

10 #

dB/ #

Offst #

0.5 #

dB #

Center 2.441 GHz Span 3 MHz

#Res BW 30 kHz #VBW 300 kHz Sweep 5 ms (401 pts)

Occupied Bandwidth	Occ BW % Pwr	99.00 %
1.1890 MHz	x dB	-20.00 dB
Transmit Freq Error	35.724 kHz	
x dB Bandwidth	1.273 MHz	

Freq/Channel

Center Freq
2.44100000 GHz

Start Freq
2.43950000 GHz

Stop Freq
2.44250000 GHz

CF Step
300.000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

Scale Type
Log Lin

CH78 -3Mbps

Agilent R T

Ch Freq 2.48 GHz Trig Free

Occupied Bandwidth [] []

Ref 10 dBm Atten 20 dB

#Peak #

Log #

10 #

dB/ #

Offst #

0.5 #

dB #

Center 2.48 GHz Span 3 MHz

#Res BW 30 kHz #VBW 300 kHz Sweep 5 ms (401 pts)

Occupied Bandwidth	Occ BW % Pwr	99.00 %
1.1921 MHz	x dB	-20.00 dB
Transmit Freq Error	32.825 kHz	
x dB Bandwidth	1.279 MHz	

Meas Setup

Avg Number
10
On Off

Avg Mode
Exp Repeat

Max Hold
On Off

Occ BW % Pwr
99.00 %

OBW Spar
3.00000000 MHz

x dB
-20.00 dB

Optimize
Ref Level

8. PEAK OUTPUT POWER TEST

8.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (b)(i)	Peak Output Power	1 w or 30dBm for GFSK 0.125W or 21dBm for EDR	2400-2483.5	PASS

8.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the Power meter

8.1.2 DEVIATION FROM STANDARD

No deviation.

8.1.3 TEST SETUP



8.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

8.1.5 TEST RESULTS

EUT :	Bluetooth speaker	Model Name :	SP-1078
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 5V from PC with AC 120V/50Hz
Test Mode :	CH00/ CH39 /CH78 (1Mbps Mode) for GFSK		

Test Channel	Frequency (MHz)	Peak Output Power (dBm)	LIMIT (dBm)	Result
CH00	2402	1.98	30	PASS
CH39	2441	1.84	30	PASS
CH78	2480	1.87	30	PASS

EUT :	Bluetooth speaker	Model Name :	SP-1078
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 5V from PC with AC 120V/50Hz
Test Mode :	CH00/ CH39 /CH78 (3 Mbps Mode) for 8-DPSK		

Test Channel	Frequency (MHz)	Peak Output Power (dBm)	LIMIT (dBm)	Result
CH00	2402	1.52	21	PASS
CH39	2441	1.41	21	PASS
CH78	2480	1.45	21	PASS

9. ANTENNA REQUIREMENT

9.1 STANDARD REQUIREMENT



15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

9.2 EUT ANTENNA

The EUT antenna is PCB Antenna. It complies with the standard requirement.

10. EUT TEST PHOTO

Radiated Measurement Photos

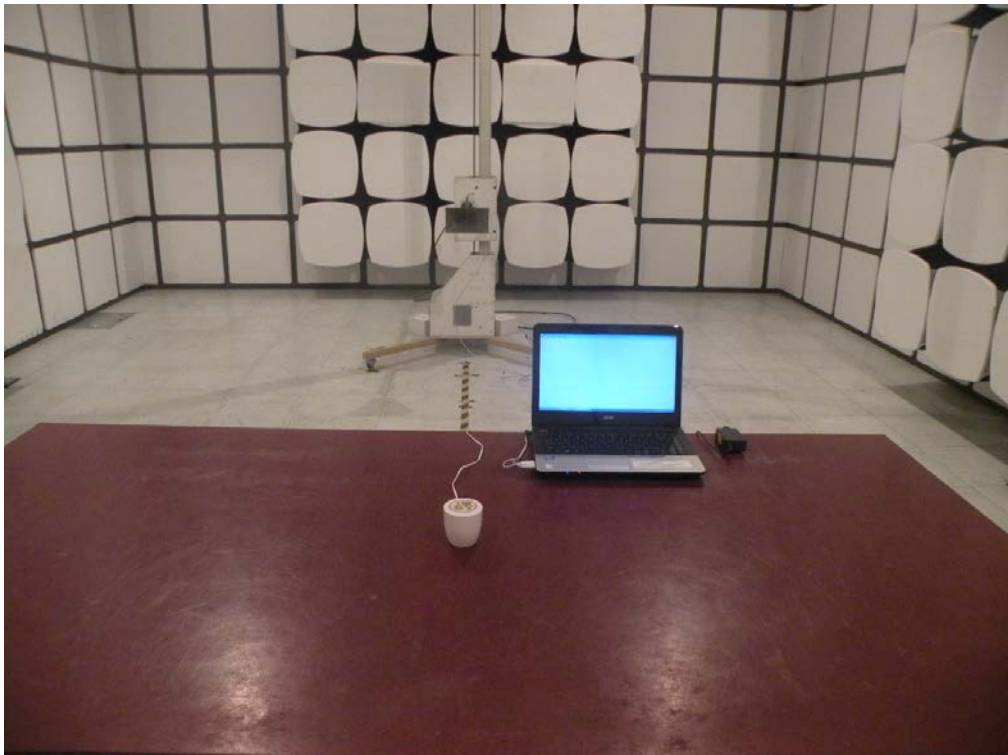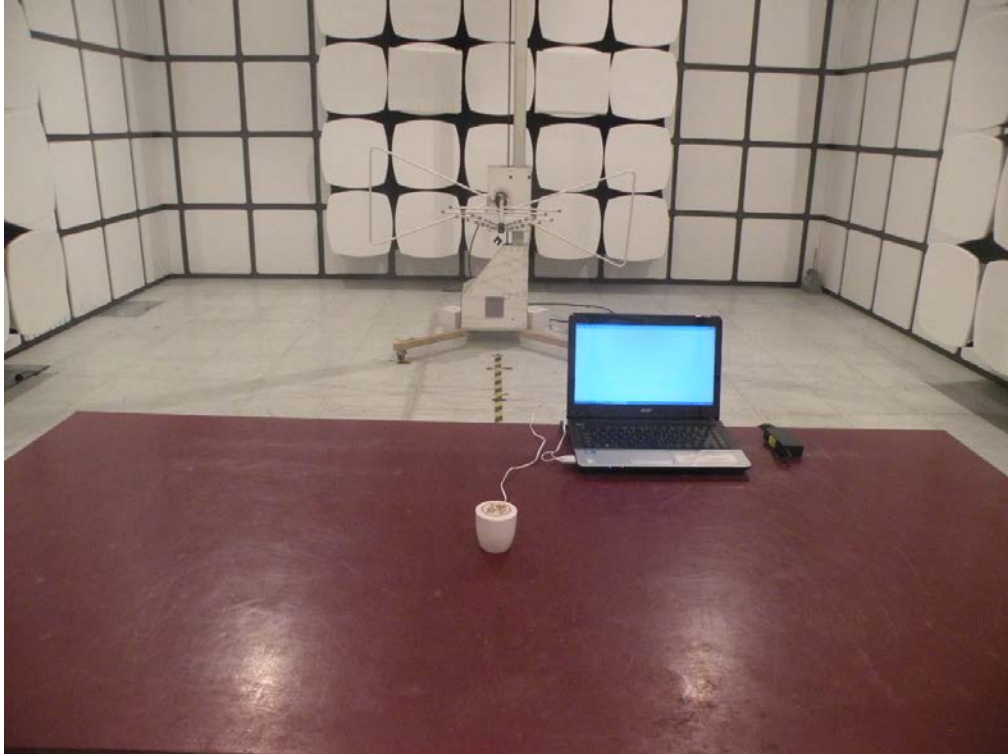



Conducted Measurement Photos

