

# Test Report

## INTENTIONAL RADIATOR TESTS ACCORDING TO FCC PART 15 C and INDUSTRY CANADA REQUIREMENTS

Equipment Under Test: 2.4 GHz Transceiver

Type/ Model: DRC-10 D3

Manufacturer: Scanreco AB  
Årsta Skolgränd 22  
SE-47144 Stockholm  
SWEDEN

Customer: Scanreco AB  
Årsta Skolgränd 22  
SE-47144 Stockholm  
SWEDEN

FCC Rule Part: 15.247: 2012  
IC Rule Part: RSS-210, Issue 8, 2010  
RSS-GEN Issue 4, 2014

KDB: Filing and Measurement Guidelines for  
Frequency Hopping Spread Spectrum Systems  
DA 00-705 (March 30, 2000)

Date: February 6, 2015

Issued by:



Timo Hietala  
Testing Engineer

Date: February 6, 2015

Checked by:



Janne Nyman  
Compliance Specialist

**Table of Contents**

---

PRODUCT DESCRIPTION .....	3
Equipment Under Test (EUT) .....	3
Ratings and declarations .....	3
Power Supply .....	3
GENERAL REMARKS.....	4
Disclaimer .....	4
SUMMARY OF TESTING.....	5
EUT Test Conditions during Testing .....	5
TEST RESULTS.....	6
Maximum Peak Conducted Output Power .....	6
Transmitter Radiated Emissions 30 MHz to 26.5 GHz.....	8
Test results with internal antenna .....	9
Conducted Spurious Emissions 30 MHz to 26.5 GHz and Band Edge .....	11
20 dB Bandwidth of the Hopping Channel .....	19
99% Occupied Power Bandwidth .....	21
LIST OF TEST EQUIPMENT .....	23
Conducted Emissions.....	23
Radiated Emissions.....	23

## Equipment Under Test (EUT)

Wireless System-final product  
 Type/ Model: DRC-10 D3  
 Serial Number: -

DRC-10 D3 is an industrial hand-held 2.4 GHz transceiver that supports frequency hopping.

Two samples were tested: one sample with a temporary antenna connector (SMA, conducted measurements) and one sample with an internal antenna (radiated measurements).

## Classification of the device

Fixed device	<input type="checkbox"/>
Mobile Device (Human body distance > 20cm)	<input checked="" type="checkbox"/>
Portable Device (Human body distance < 20cm)	<input type="checkbox"/>

## Modifications Incorporated in the EUT

No modifications were applied to the EUT during testing

## Ratings and declarations

Operating Frequency Range (OFR): 2405 – 2480 MHz  
 Channels: 16  
 Channel separation: 5 MHz  
 Conducted power: 19.94 dBm  
 Transmission technique: FHSS  
 Modulation: GFSK  
 Integrated antenna gain: -  
 External antenna gain: 0.0 dBi

## Power Supply

2 x 1.32 VDC Ni-MH batteries, new batteries were used when testing the EUT.

**Disclaimer**

This test report is issued under SGS Fimko general terms of delivery (available on request and accessible at [www.fi.sgs.com](http://www.fi.sgs.com)). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues defined therein. Unless otherwise stated: (a) the results shown in this document refer only to the sample(s) tested and (b) such sample(s) are retained for three months. This document cannot be reproduced except in full, without prior approval of SGS Fimko.

Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law.

## SUMMARY OF TESTING

Test Specification	Description of Test	Result
§15.207(a) / RSS-GEN 8.8	Conducted Emissions on Power Supply Lines	N/A
§15.247(b)(1) / RSS-210 8.4	Maximum Peak Conducted Output Power	PASS
15.247(a)(1) / RSS-210 A8.1	Hopping Channel Carrier Frequency Separation	N/T <sup>1)</sup>
§15.247(a)(1)(iii) / RSS-210 A8.1	Number of Hopping Frequencies	N/T <sup>1)</sup>
§15.247(a)(1)(iii) / RSS-210 A8.1	Average Time of Occupancy of Hopping Frequency	N/T <sup>1)</sup>
§15.247(a)(1) / RSS-210 A8.1	20 dB Bandwidth	PASS
RSS-GEN 6.6	99 % Occupied Bandwidth	PASS
§15.247(d) / RSS-210 A8.5	100 kHz Bandwidth of Frequency Band Edges and Conducted Spurious Emissions	PASS
§15.209(a), §15.247(d) / RSS-210 A8.5 / RSS-GEN 8.10	Radiated Emissions Within The Restricted Bands	PASS
§15.209 / RSS-GEN 8.9	Unintentional Radiated Emissions	PASS

N/A: Battery operated EUT.

N/T <sup>1)</sup>: Not Tested, test data from the test report 277830-1B has been re-used for the EUT. The radio circuitry in both test reports is the same.

### EUT Test Conditions during Testing

The EUT was configured into the wanted channel and was in continuous transmit mode during all the tests.

Following channels were used during the tests:

Channel	Frequency/ MHz
LOW	2405
MID	2440
HIGH	2480

### Test Facility

<input type="checkbox"/>	Testing Location / address: FCC registration number: <b>90598</b>	SGS Fimko Ltd Särkiniementie 3 FI-00210, HELSINKI FINLAND
<input checked="" type="checkbox"/>	Testing Location / address: FCC registration number: <b>178986</b> Industry Canada registration number: <b>8708A-2</b>	SGS Fimko Ltd Karakaarenkuja 4 FI-02610, ESPOO FINLAND

**Maximum Peak Conducted Output Power**


**Standard:** ANSI C63.10 (2013)  
**Tested by:** PKA  
**Date:** 31.10.2014  
**Humidity:** 40 % RH  
**Temperature:** 22.7 °C  
**Measurement uncertainty** ± 2.87dB Level of confidence 95 % (k = 2)

**FCC Rule: 15.247(b) (1)**

For frequency hopping systems operating in the 2400-2483.5 MHz, employing at least 75 channels limit is 1.0 Watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signalling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the *maximum conducted output power* is the highest total transmit power occurring in any mode.

**Results:**


Channel	Conducted Power [dBm]	Limit [dBm]	Margin [dBm]	Result
Low	19.92	20.97	1.05	PASS
Mid	19.60	20.97	1.37	PASS
High	19.10	20.97	1.87	PASS

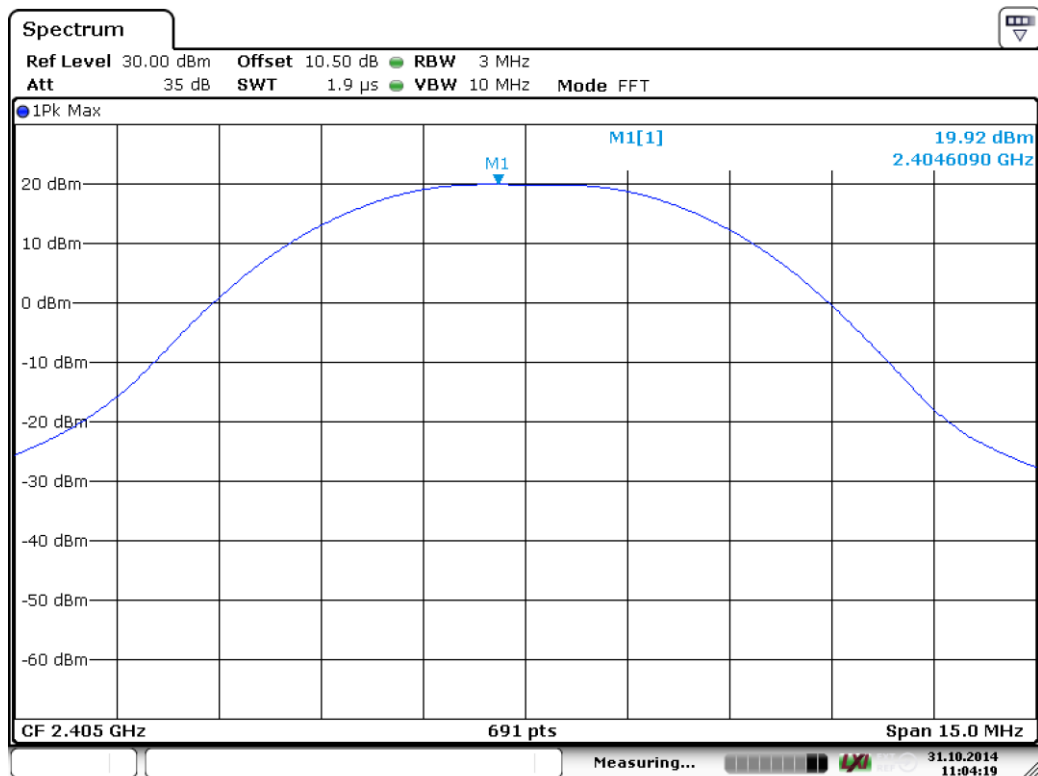

Date: 31.OCT.2014 11:04:19


**Figure 1. Channel LOW.**

## Maximum Peak Conducted Output Power

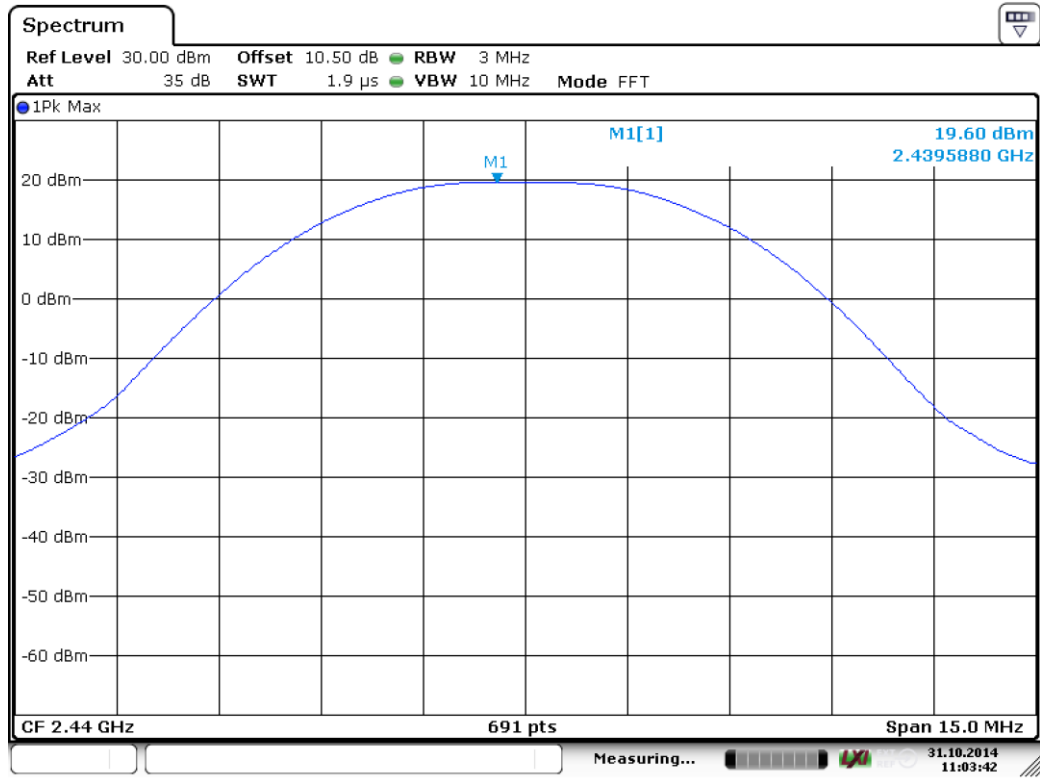

Date: 31.OCT.2014 11:03:41

Figure 2. Channel MID.

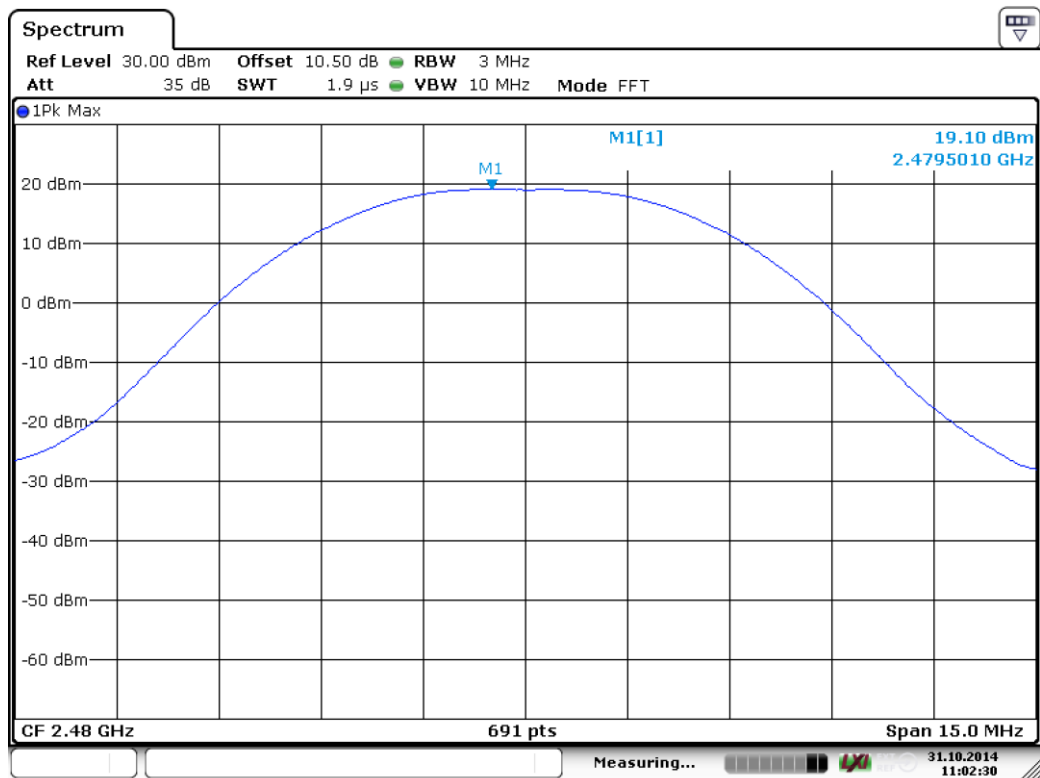

Date: 31.OCT.2014 11:02:30

Figure 3. Channel HIGH.

**Transmitter Radiated Emissions 30 MHz to 26.5 GHz**

<b>Standard:</b>	ANSI C63.10	(2013)
<b>Tested by:</b>	RRE	
<b>Date:</b>	14.11.2014	
<b>Temperature:</b>	21 - 22 °C	
<b>Humidity:</b>	35 - 41 % RH	
<b>Measurement uncertainty</b>	± 4.51 dB	Level of confidence 95 % (k = 2)

**FCC Rule: 15.247(d), 15.209(a)**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

The correction factor in the final result table contains the sum of the transducers (antenna + amplifier + cables). The result value is the measured value corrected with the correction factor.

The measurements above 1 GHz were performed by using a peak detector and a Duty Cycle correction factor(dB) -21.35 dB, see test report 277830-1 chapter: Duty cycle correction factor, Transmit time in 100 ms.

The measurements were performed with the EUT being in three orthogonal positions (X, Y, Z). Below 1 GHz the measurements were performed at MID channel, above 1 GHz the measurements were performed at LOW, MID and HIGH channels.



Test results with internal antenna

Final results 30 – 1000 MHz:

FCC Part 15 Class B Spurious Emission 30-1000MHz 3m

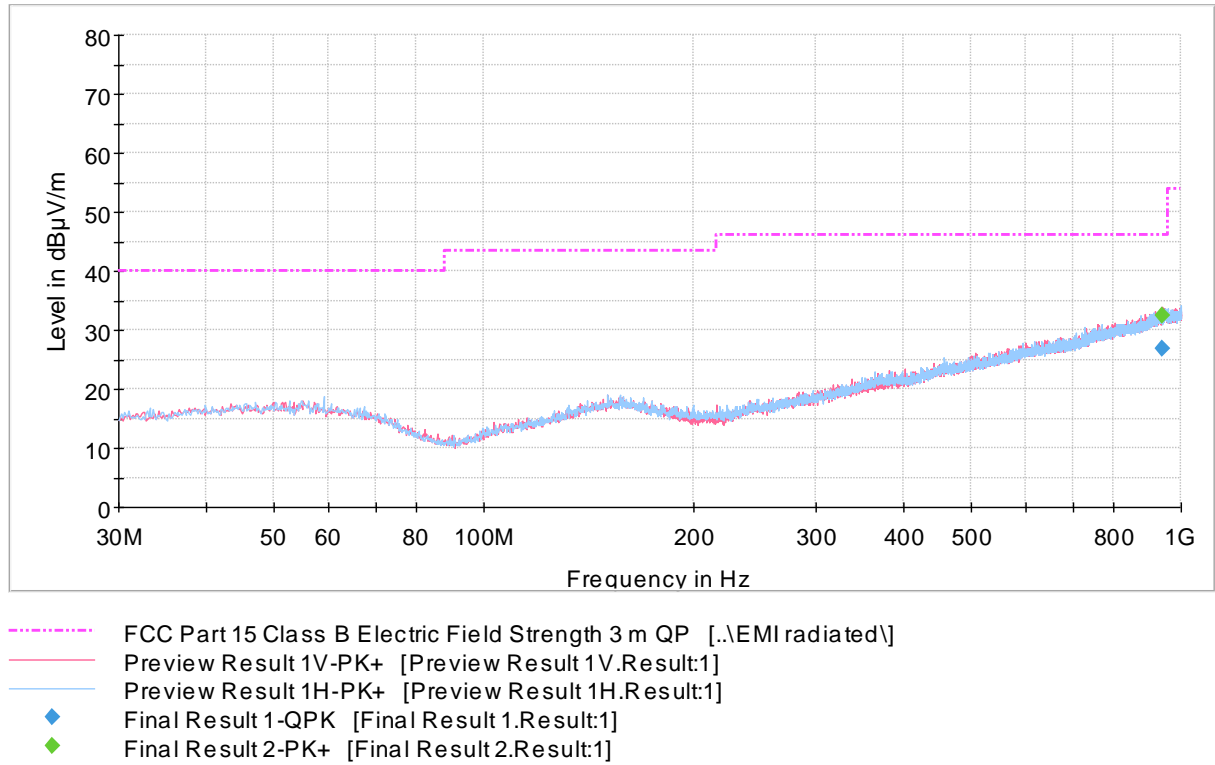


Figure 4. Measured curve with peak-detector. Channel MID.

Final measurements from the worst frequencies

Table 1. Final results 30 – 1000 MHz (QP).

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time 15x(ms)	Bandwidth (kHz)	Height (cm)	Pol.	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
940.555000	26.9	1000.0	120.000	100.0	V	140.0	28.0	19.1	46.0	

**Transmitter Radiated Emissions 30 MHz to 26.5 GHz**

Final results 1.0 – 26.5 GHz:

**Table 2.** LOW channel (RBW 1000 kHz, VBW 3000 kHz)

Frequency (MHz)	Peak			Average		
	Result (dBµV/m)	Limit (dBµV/m)	Margin dB	Result (dBµV/m)	Limit (dBµV/m)	Margin dB
7213.20	70.8	74.0	3.2	49.5	54.0	4.5

Radiated emissions in restricted bands 1 GHz – 26.5 GHz

**Table 3.** HIGH channel (RBW 1000 kHz, VBW 3000 kHz)

Frequency (MHz)	Peak			Average		
	Result (dBµV/m)	Limit (dBµV/m)	Margin dB	Result (dBµV/m)	Limit (dBµV/m)	Margin dB
7438.20	58.1	74.0	15.9	36.8	54.0	17.2

Band edge compliance:

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

LOW (2405 MHz), below 2390 MHz:

Detector (RBW: 1MHz)	Result (dBµV/m)	Margin (dB)	Limit (dBµV/m)	Comment
Peak	61.8	12.2	74.0	PASS
Average	40.5	13.5	54.0	PASS

LOW (2405 MHz), 2390-2400 MHz:

Detector (RBW: 100 kHz)	Result (dBc)	Margin (dB)	Limit (dBc)	Comment
Peak	-50.9	30.9	-20.0	PASS

HIGH (2480 MHz), above 2483.5 MHz:


Detector (RBW: 1MHz)	Result (dBµV/m)	Margin (dB)	Limit (dBµV/m)	Comment
Peak	73.3	0.7	74.0	PASS
Average	52.0	2.0	54.0	PASS

**Conducted Spurious Emissions 30 MHz to 26.5 GHz and Band Edge**

**Conducted Spurious Emissions 30 MHz to 26.5 GHz and Band Edge**

**Standard:** ANSI C63.10 (2013)  
**Tested by:** PKA  
**Date:** 31.10.2014  
**Temperature:** 22.7 °C / 22.9 °C  
**Humidity:** 40 % / 41 % RH


**FCC Rule: 15.247 (d)**

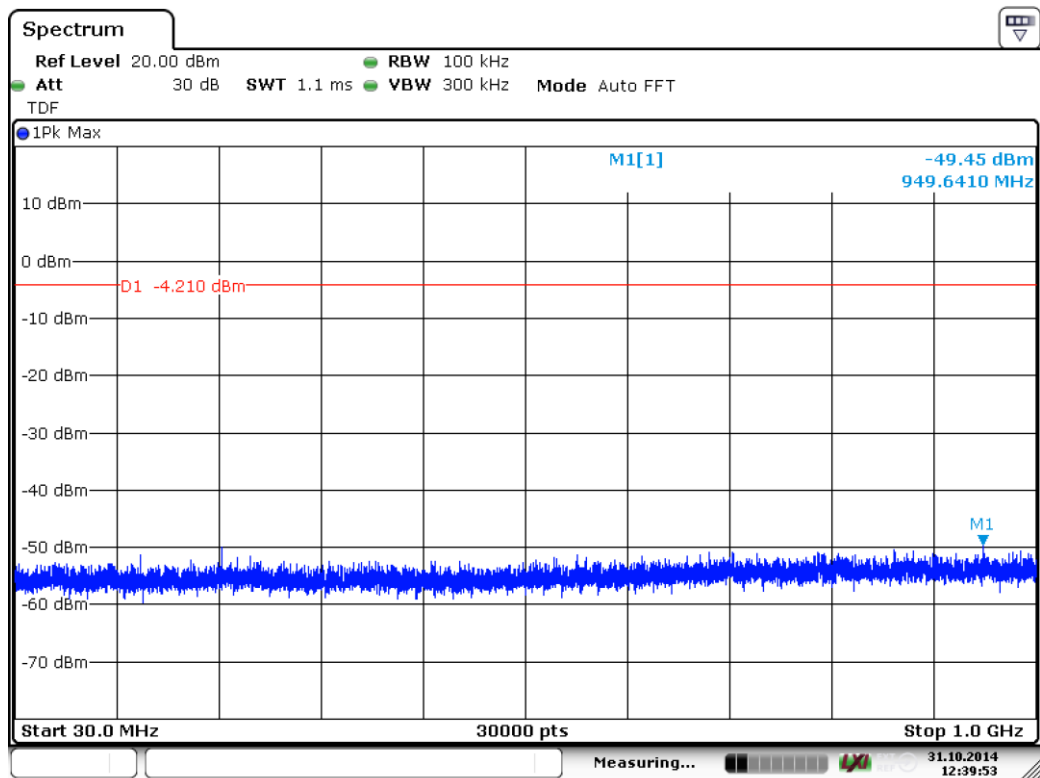

Date: 31.OCT.2014 12:39:53


**Figure 5.** Low channel conductive emission 30 MHz to 1000 MHz.

Conducted Spurious Emissions 30 MHz to 26.5 GHz and Band Edge

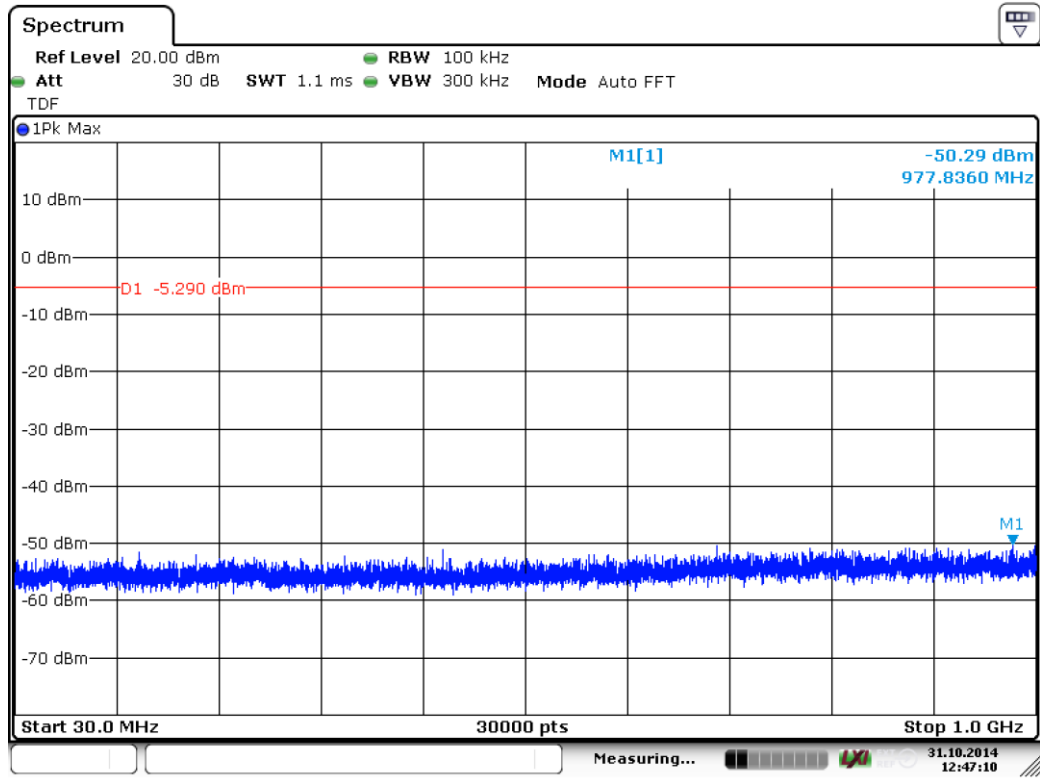

Date: 31.OCT.2014 12:47:09


Figure 6. Mid channel conductive emission 30 MHz to 1000 MHz.

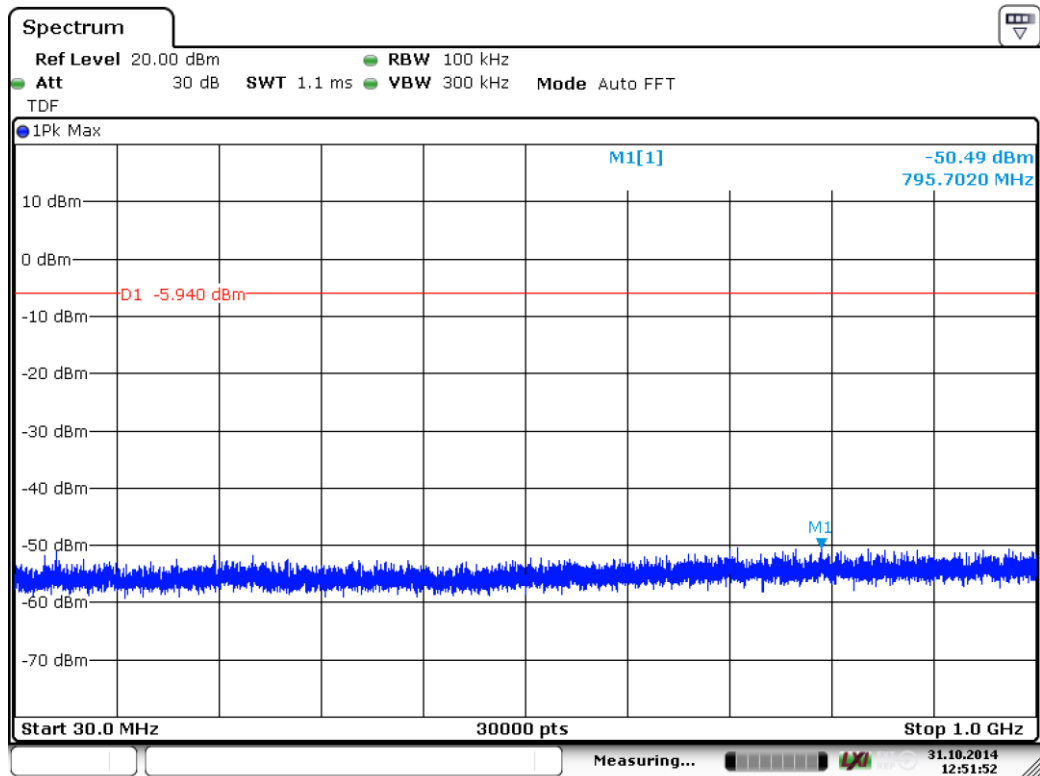

Date: 31.OCT.2014 12:51:52


Figure 7. High channel conductive emission 30 MHz to 1000 MHz.

Conducted Spurious Emissions 30 MHz to 26.5 GHz and Band Edge

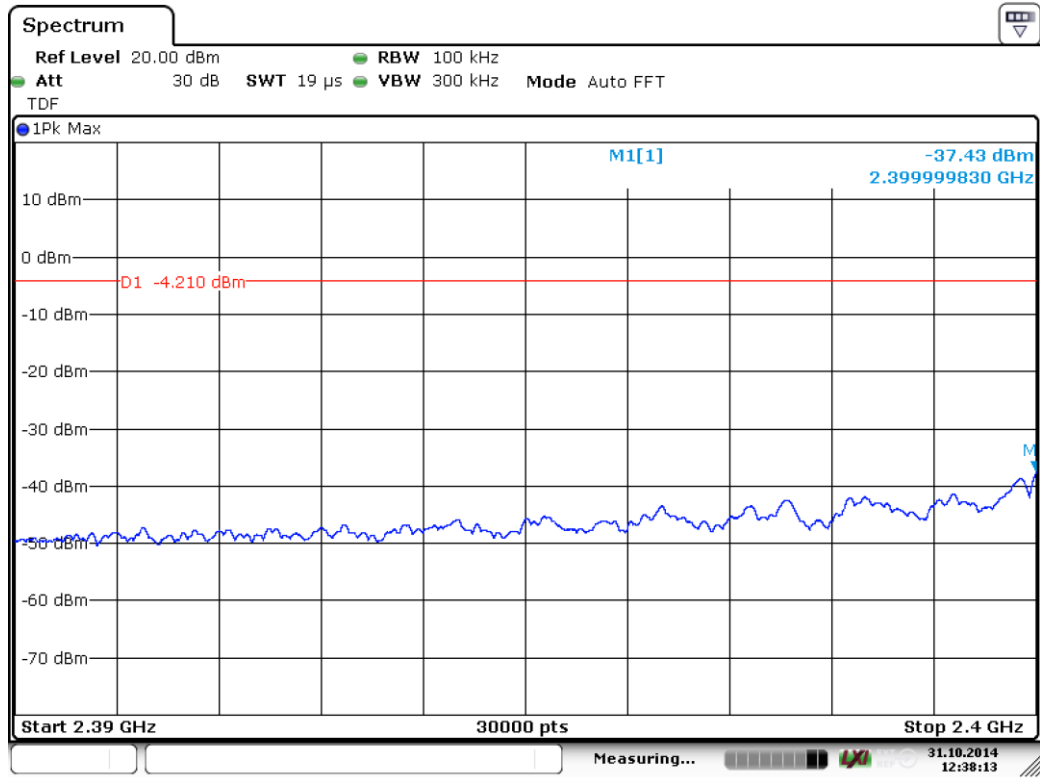

Date: 31.OCT.2014 12:38:13


Figure 8. Low channel conductive emission at low band edge.

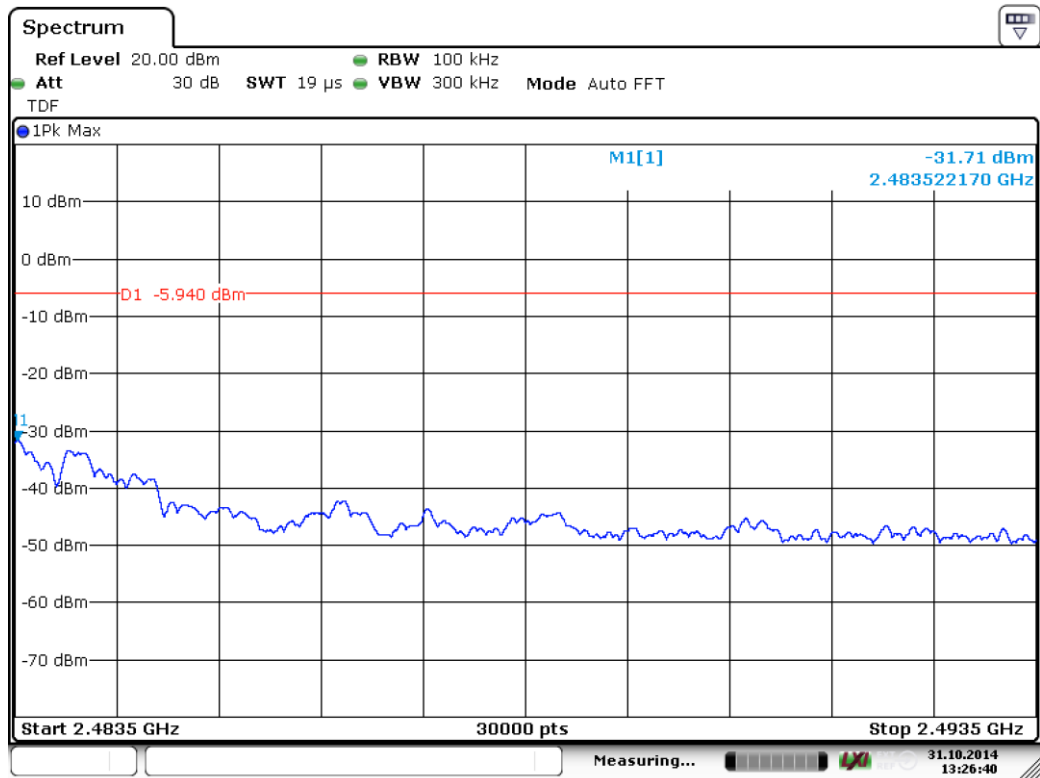

Date: 31.OCT.2014 13:26:39


Figure 9. High channel conductive emission at high band edge.

Conducted Spurious Emissions 30 MHz to 26.5 GHz and Band Edge

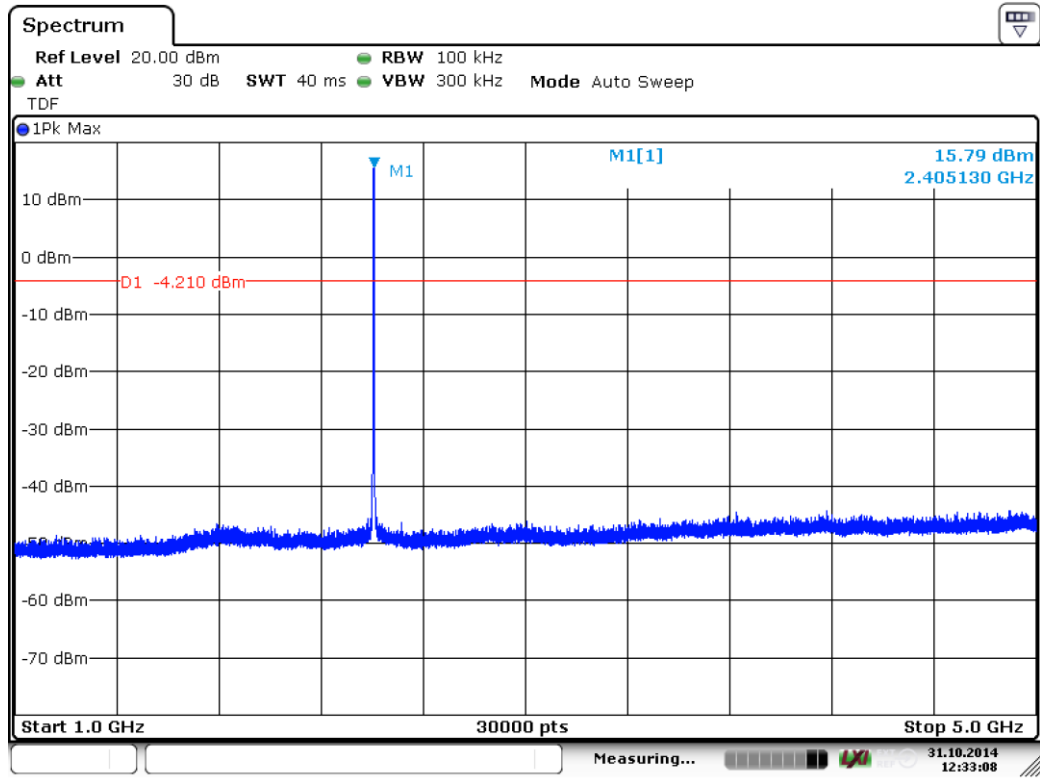

Date: 31.OCT.2014 12:33:08


Figure 10. Low channel conductive emission 1 GHz to 5 GHz.

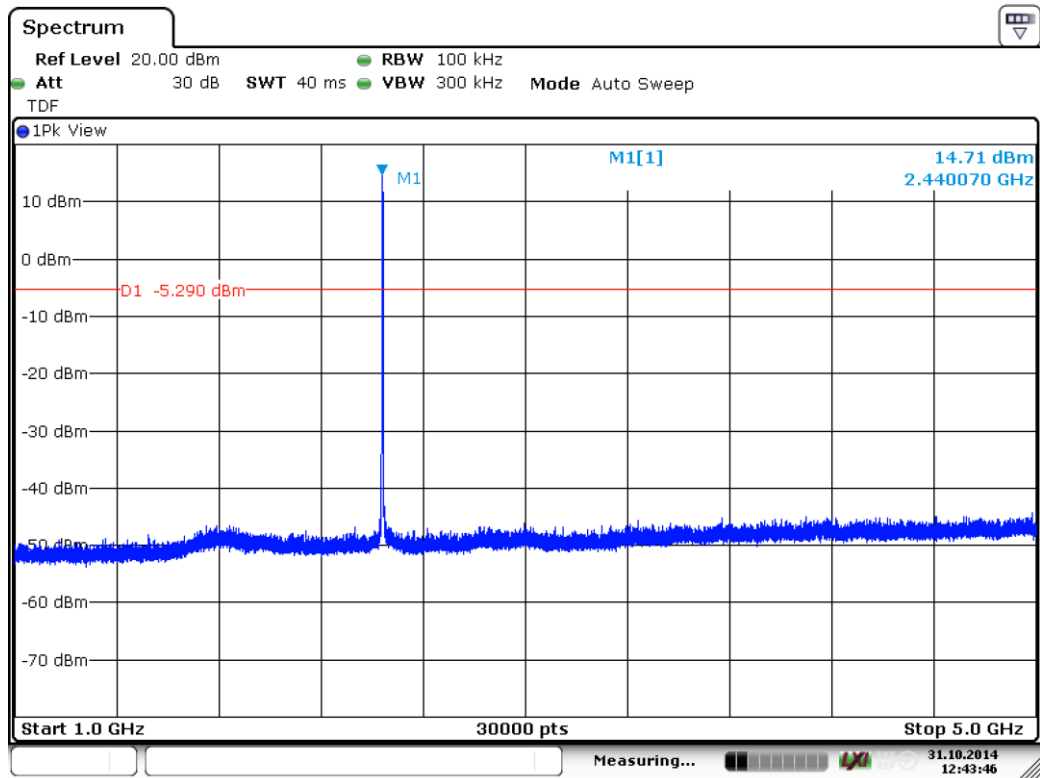

Date: 31.OCT.2014 12:43:46


Figure 11. Mid channel conductive emission 1 GHz to 5 GHz.

Conducted Spurious Emissions 30 MHz to 26.5 GHz and Band Edge

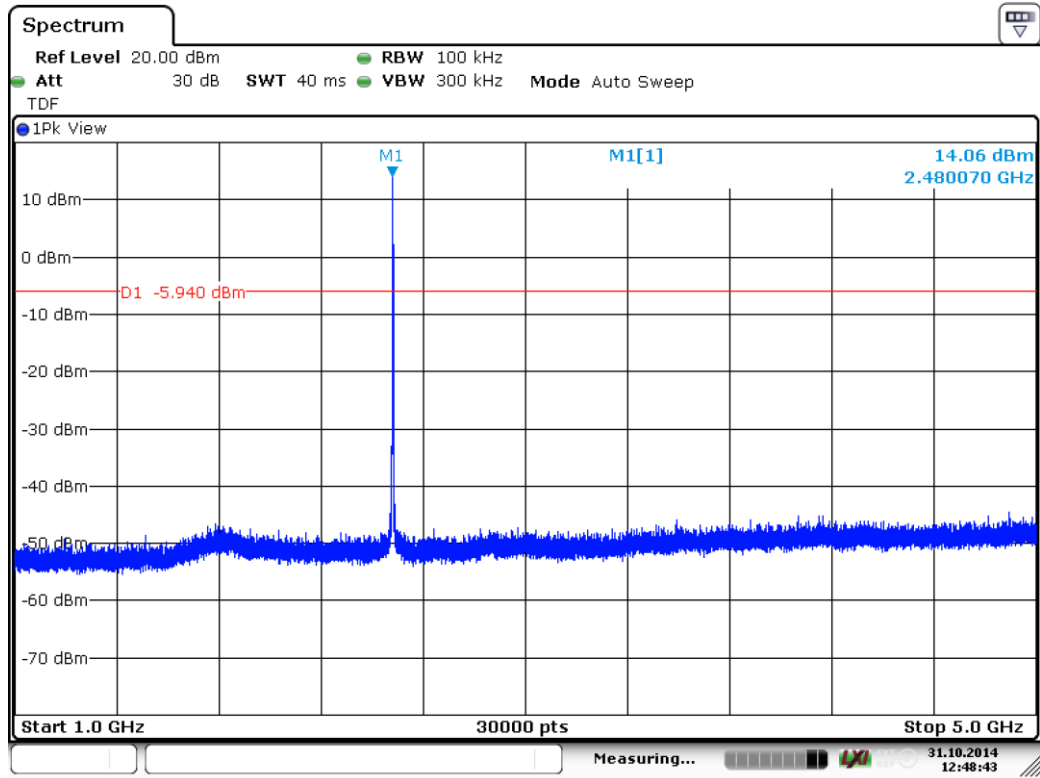

Date: 31.OCT.2014 12:48:43


Figure 12. High channel conductive emission 1 GHz to 5 GHz.

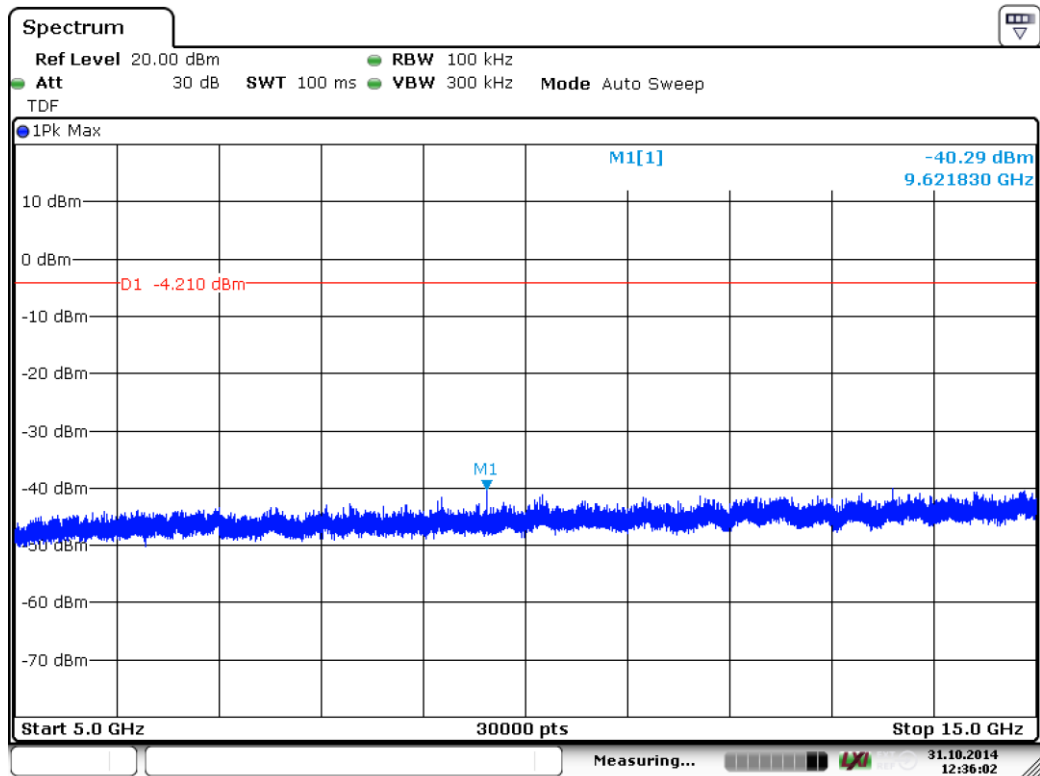

Date: 31.OCT.2014 12:36:02


Figure 13. Low channel conductive emission 5 GHz to 15 GHz.

Conducted Spurious Emissions 30 MHz to 26.5 GHz and Band Edge

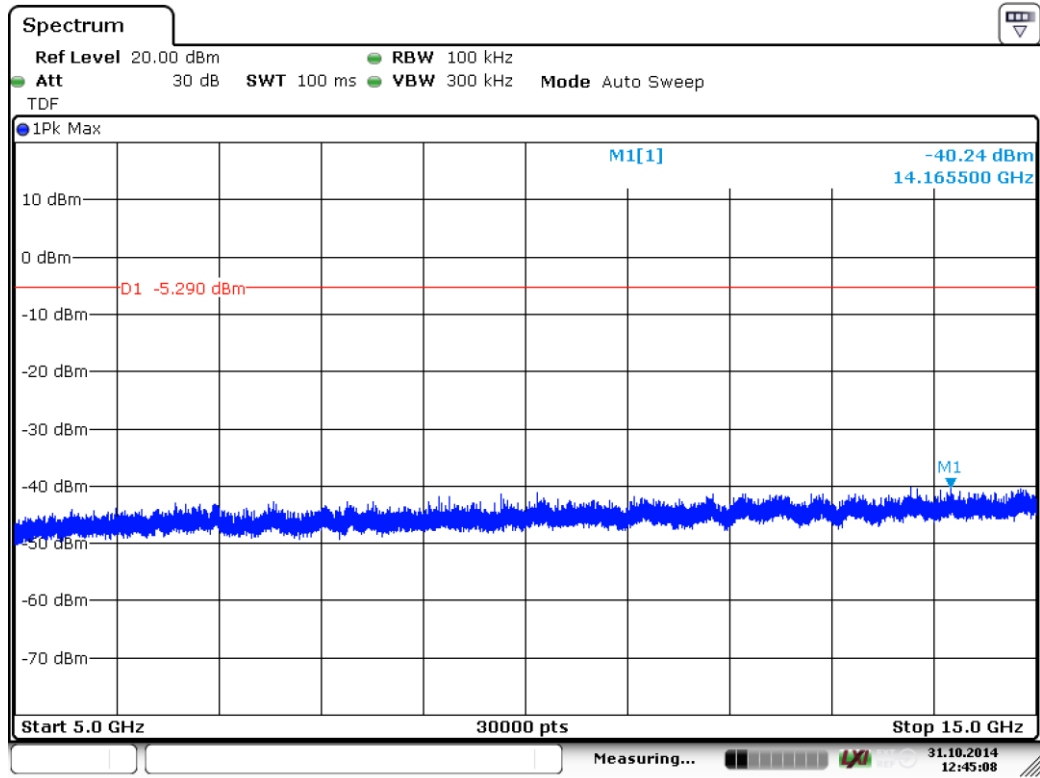

Date: 31.OCT.2014 12:45:08

Figure 14. Mid channel conductive emission 5 GHz to 15 GHz.

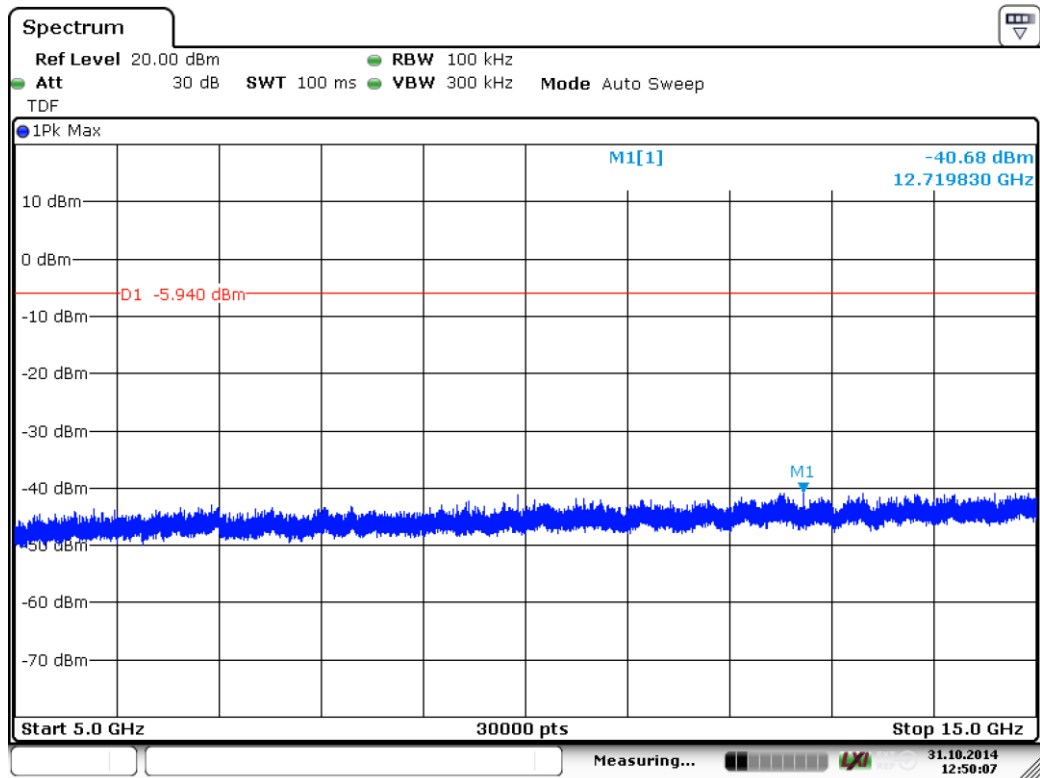


Date: 31.OCT.2014 12:50:07

Figure 15. High channel conductive emission 5 GHz to 15 GHz.




## Conducted Spurious Emissions 30 MHz to 26.5 GHz and Band Edge

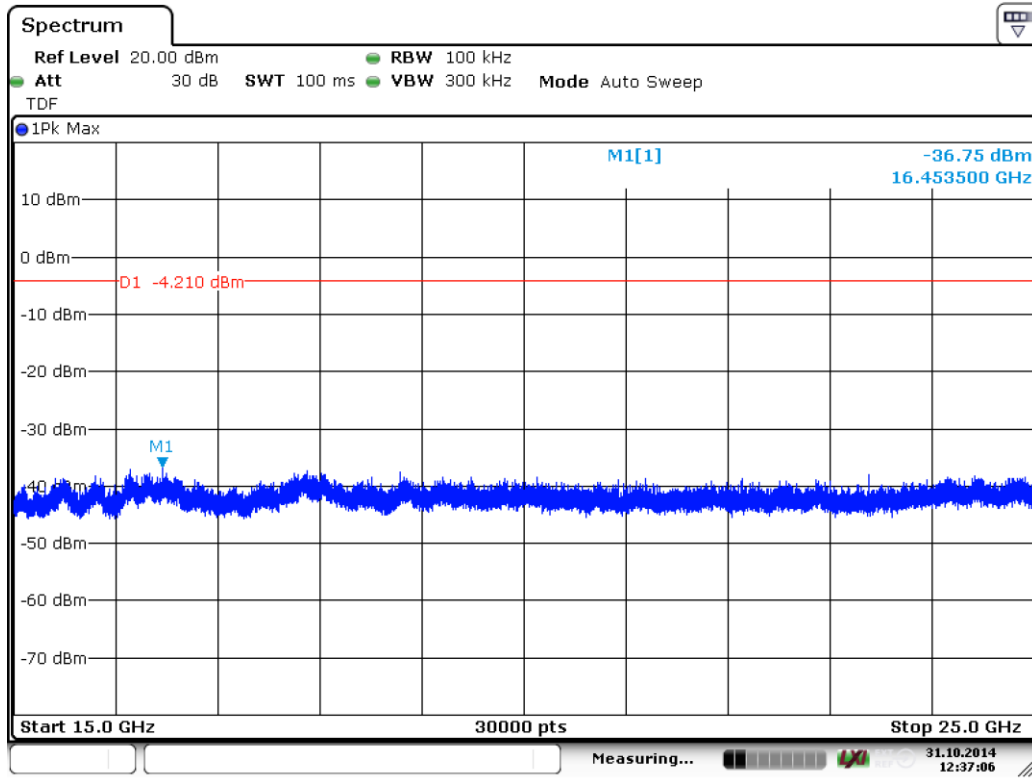

Date: 31.OCT.2014 12:37:05


**Figure 16.** Low channel conductive emission 15 GHz to 25 GHz.

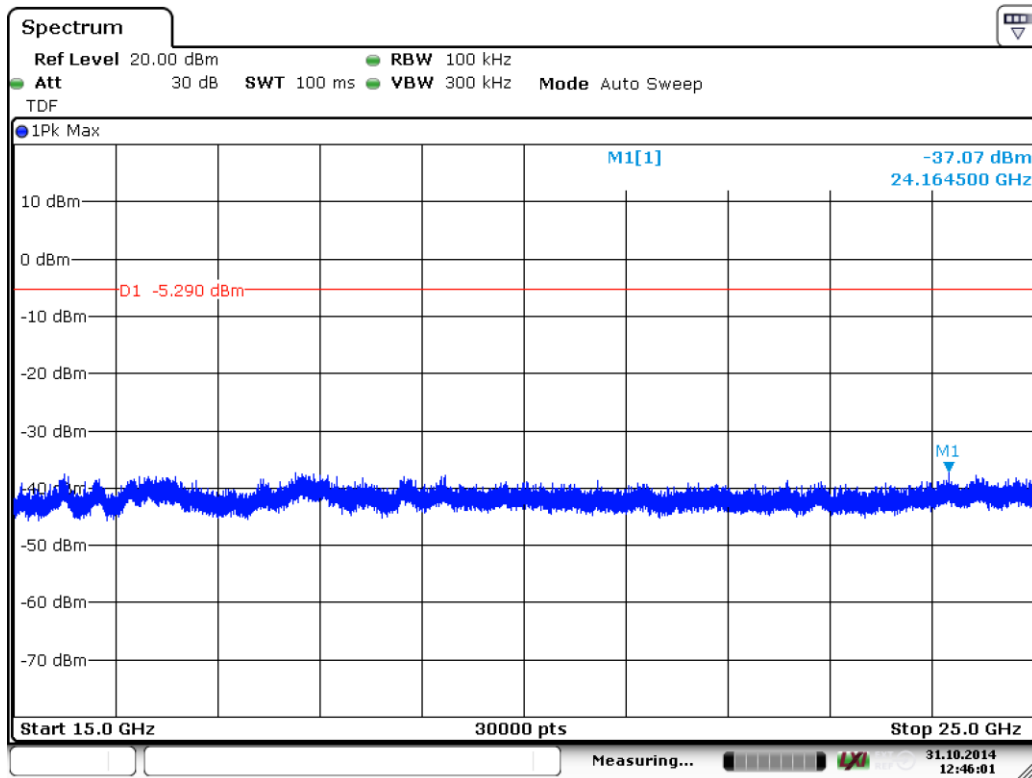

Date: 31.OCT.2014 12:46:01

**Figure 17.** Mid channel conductive emission 15 GHz to 25 GHz.

## Conducted Spurious Emissions 30 MHz to 26.5 GHz and Band Edge

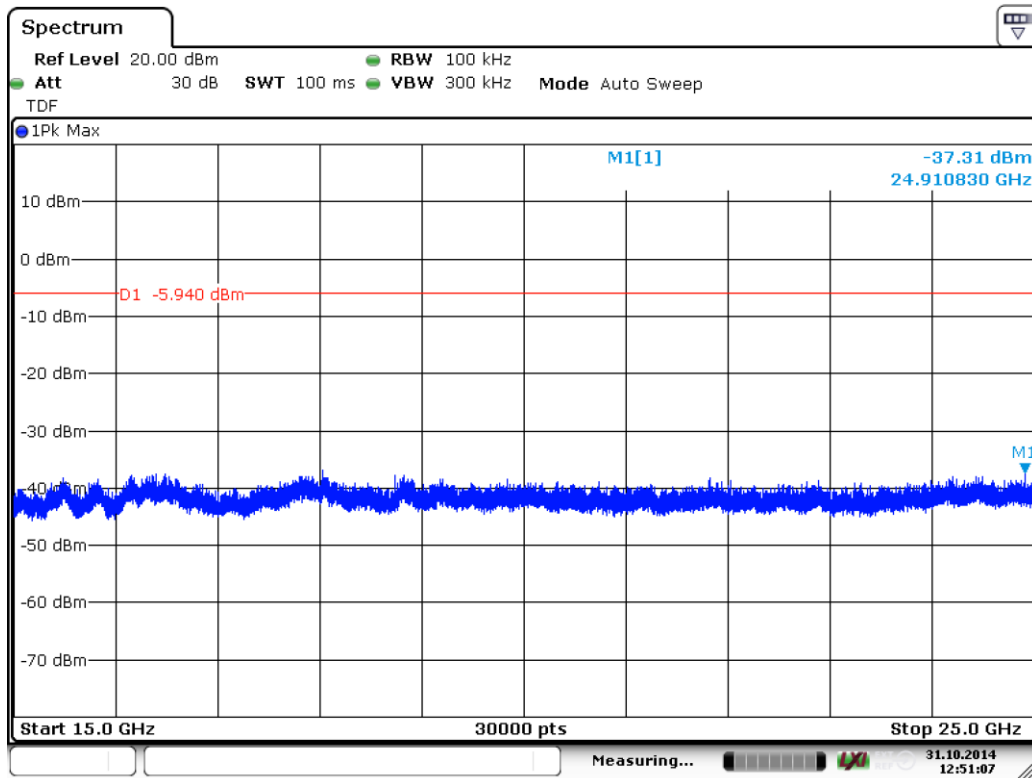

Date: 31.OCT.2014 12:51:07

**Figure 18.** High channel conductive emission 15 GHz to 25 GHz.

### 20 dB Bandwidth of the Hopping Channel


**Standard:** ANSI C63.10 (2013)  
**Tested by:** PKA  
**Date:** 31.10.2014  
**Temperature:** 22.7 °C  
**Humidity:** 37 % RH

**FCC Rule: 15.247(a)(1)**

**Results:**

**Table 4.** 20 dB bandwidth test results.


Channel	20 dB BW [kHz]
Low	2764.0
Mid	2808.0
High	2793.0

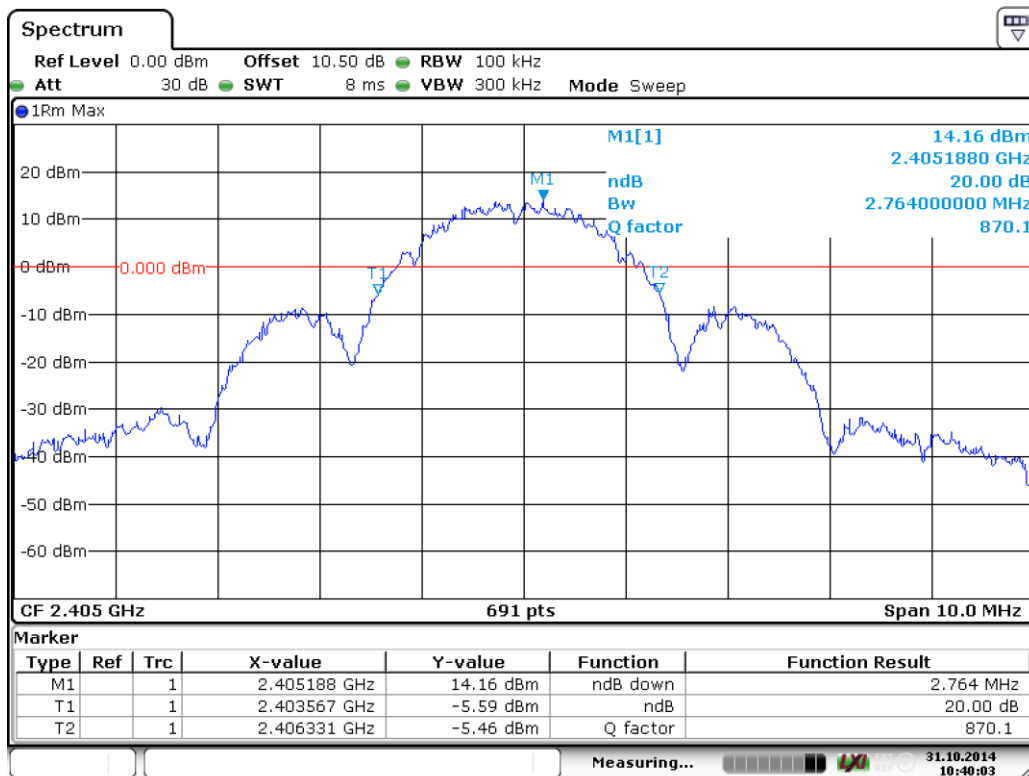

Date: 31.OCT.2014 10:40:03


**Figure 19.** 20 dB channel BW. Channel LOW.

## 20 dB Bandwidth of the Hopping Channel

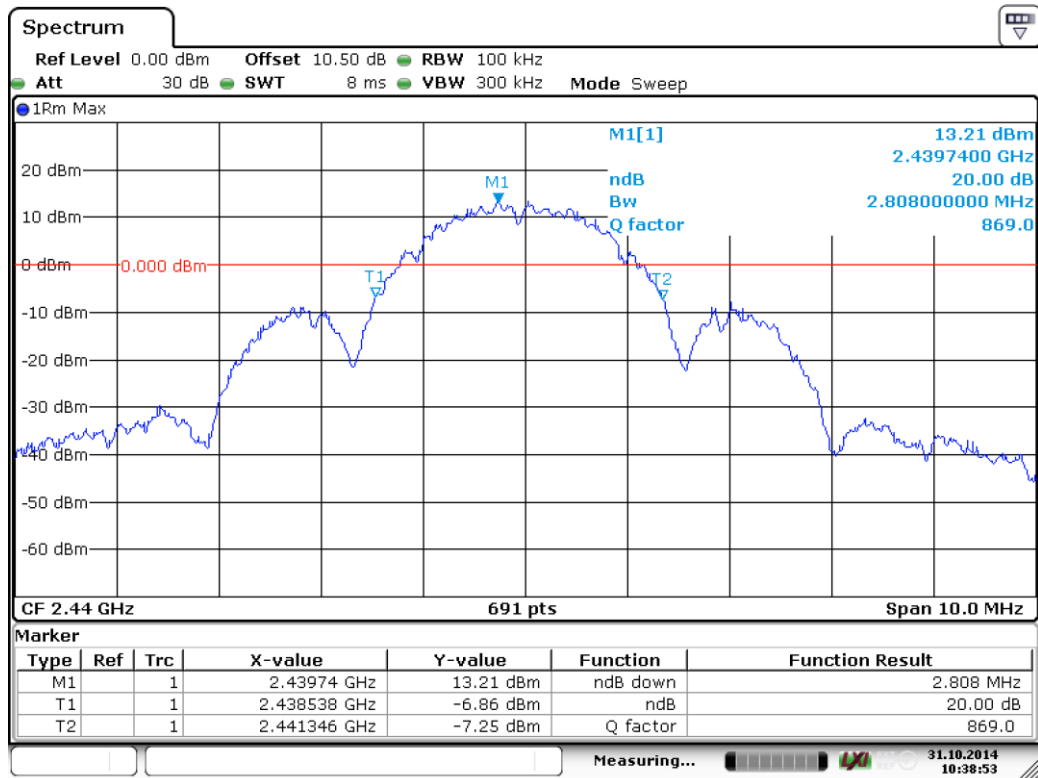

Date: 31.OCT.2014 10:38:53

Figure 20. 20 dB channel BW. Channel MID.

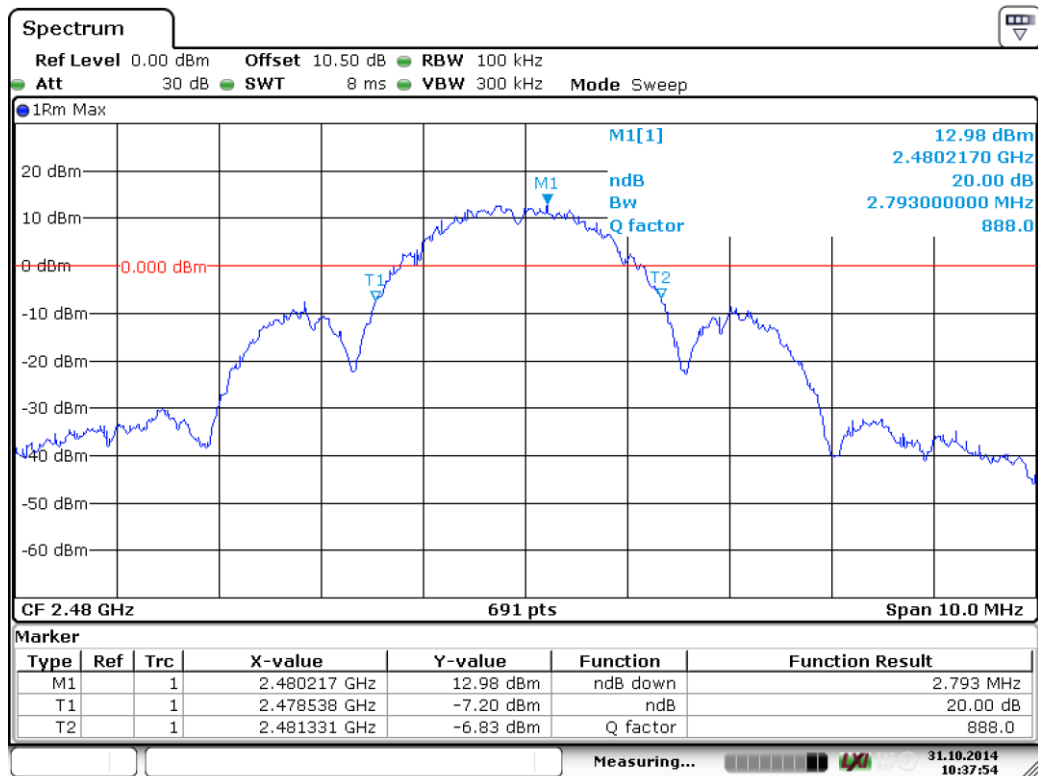

Date: 31.OCT.2014 10:37:53

Figure 21. 20 dB channel BW. Channel HIGH.


### 99% Occupied Power Bandwidth

Standard: RSS-GEN (2014)  
 Tested by: PKA  
 Date: 31.10.2014  
 Temperature: 22.7 °C  
 Humidity: 37 % RH

RSS-GEN 4.7.

Table 5.


Channel	99% BW [MHz]	Limit	Result
Low	2.605	-	PASS
Mid	2.590	-	PASS
High	2.605	-	PASS

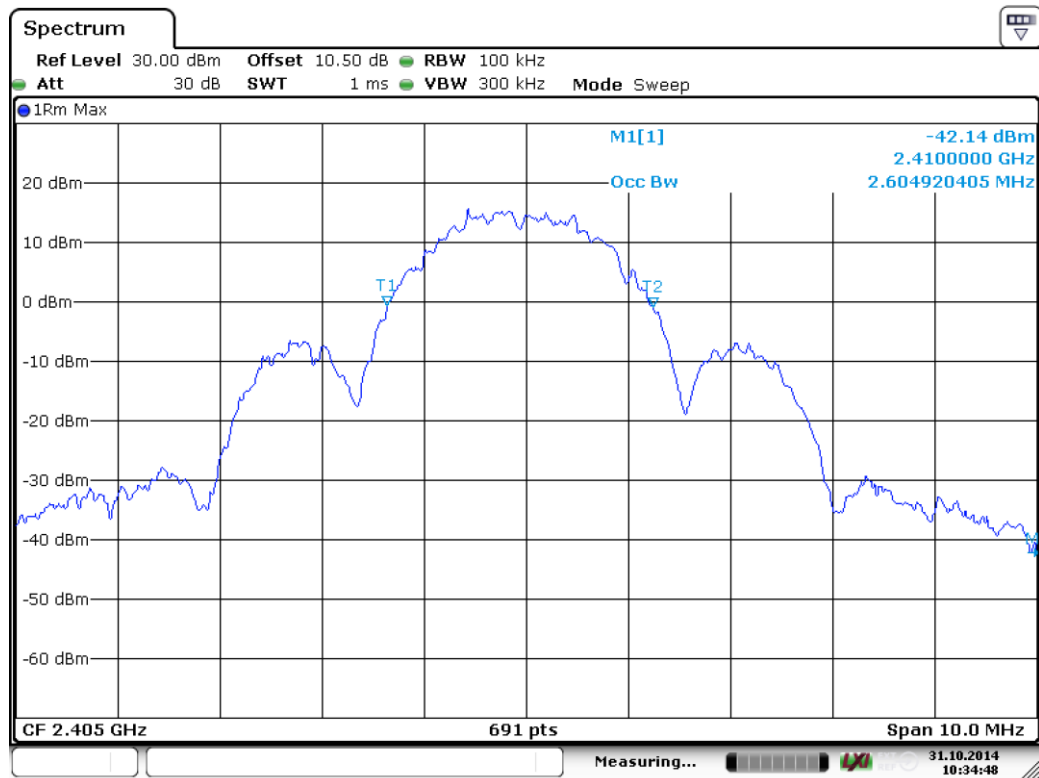

Date: 31.OCT.2014 10:34:48


Figure 22. Low channel 99% Occupied Power Bandwidth.

## 99% Occupied Power Bandwidth

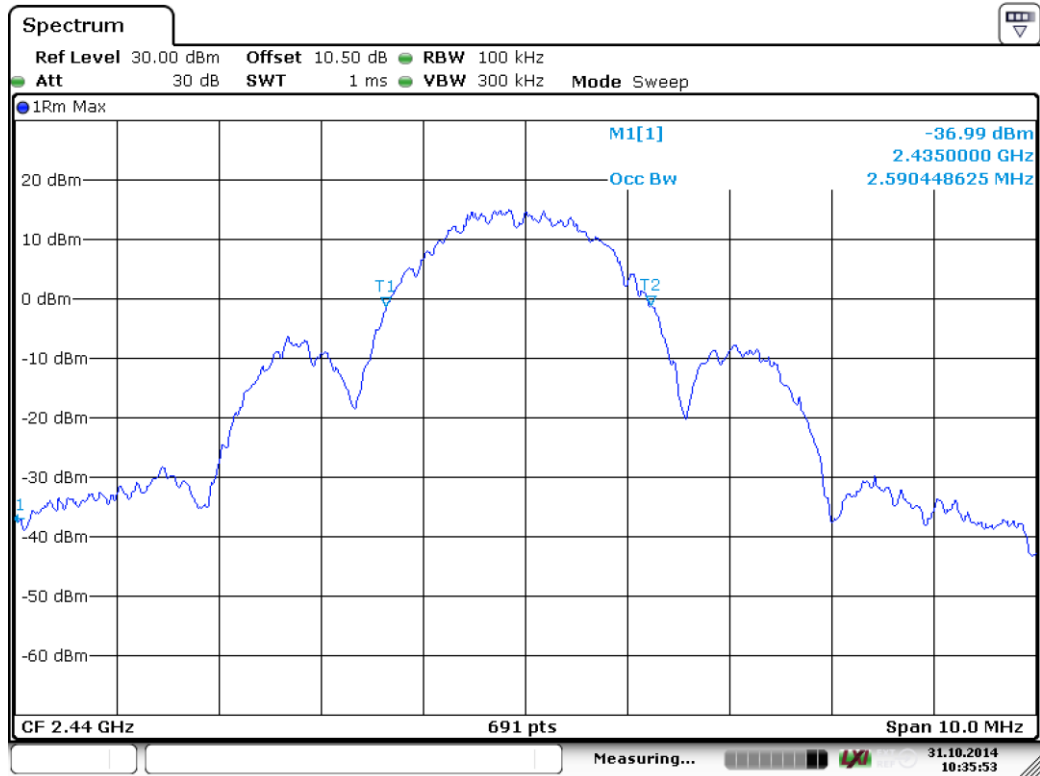

Date: 31.OCT.2014 10:35:53

**Figure 23.** Mid channel 99% Occupied Power Bandwidth.

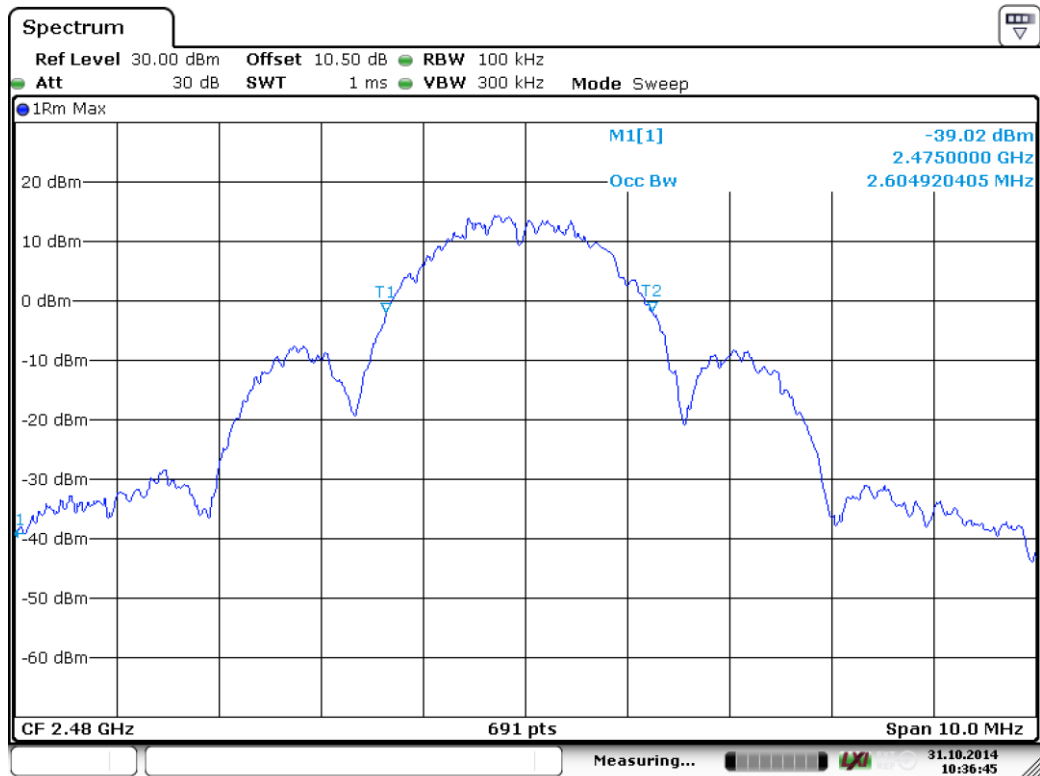

Date: 31.OCT.2014 10:36:45

**Figure 24.** High channel 99% Occupied Power Bandwidth.

## LIST OF TEST EQUIPMENT

### Conducted Emissions

Equipment	Manufacturer	Type	Serial no	Inv.no
TEST RECEIVER	ROHDE & SCHWARZ	ESU 26	100185	8453
TEST SOFTWARE	ROHDE & SCHWARZ	EMC-32	-	-
PULSE LIMITER	ROHDE & SCHWARZ	ESH3-Z2	#1	8359
LISN	ROHDE & SCHWARZ	ESH3-Z5	863794/014	8019
AC Power Source	CALIFORNIA INSTRUMENTS	5001 iX Series II	58209	7826

### Radiated Emissions

Equipment	Manufacturer	Type	Serial no	Inv.no
TEST RECEIVER	ROHDE & SCHWARZ	ESU 26	100185	8453
TEST SOFTWARE	ROHDE & SCHWARZ	EMC-32	-	-
ANTENNA (30-1000 MHz)	SCHWARZBECK	VULB 9168	8168-503	8911
ANTENNA MAST	DEISEL	MA240	240/455	5017
TURNTABLE	DEISEL	DS420	-	5015
CONTROLLER	COMTEST	HD100	100/457	5018
AC Power Source	CALIFORNIA INSTRUMENTS	5001 iX Series II	58209	7826

All used measurement equipment was calibrated (if required).