

Test Report



INTENTIONAL RADIATOR TESTS ACCORDING TO FCC PART 15 C AND ISED CANADA REQUIREMENTS

Equipment Under Test: 2.4GHz radio module

Model: D3 DRC-J

Manufacturer: Scanreco AB
Stensätravägen 13
SE-127 39 Skärholmen, Sweden

Customer: Scanreco AB
Stensätravägen 13
SE-127 39 Skärholmen, Sweden

FCC Rule Part: 15.247: 2017

IC Rule Part: RSS-247, Issue 2, 2017

RSS-GEN Issue 5 Amendment 1, 2019

KDB: 558074 D01 15.247 Meas Guidance v05r02
Guidance for Compliance Measurements on Digital
Transmission Systems, Frequency Hopping Spread
Spectrum System, and Hybrid System Devices
Operating Under §15.247 of the FCC rules
(April 2, 2019)

Date:

12 August 2019

Issued by:

Pekka Kälviäinen
Testing Engineer

Date:

12 August 2019

Checked by:

Rauno Repo
Senior EMC/RF Specialist

Table of Contents

GENERAL REMARKS	3
Disclaimer.....	3
RELEASE HISTORY.....	4
Page 5: Trademark changed to Scanreco.....	4
Page 11: Measuring distance added (3m).	4
Page 45: Calibration date of SMBV100A updated.....	4
PRODUCT DESCRIPTION	5
Equipment Under Test	5
General Description	5
Ratings and declarations.....	5
Power Supply.....	5
Mechanical Size of the EUT	5
SUMMARY OF TESTING	6
EUT Test Conditions during Testing	6
TEST RESULTS	8
Antenna requirement.....	8
Maximum Peak Conducted Output Power	9
Transmitter Radiated Spurious Emissions 9 kHz – 26.5 GHz.....	12
Transmitter Band Edge Measurement and Conducted Spurious Emissions	20
20 dB Bandwidth of the Hopping Channel	28
Hopping Channel Carrier Frequencies Separation.....	31
Number of Hopping Channels	34
Average Time of Occupancy of Hopping Frequency	36
6 dB Bandwidth of the Channel	39
99% Occupied Bandwidth	42
Duty cycle correction factor, Transmit time in 100 ms	45
TEST EQUIPMENT	46

GENERAL REMARKS**Disclaimer**

This document is issued by the Company under its General Conditions of service accessible at http://www.sgs.com/terms_and_conditions.htm. attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein.

Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This document cannot be reproduced except in full, without prior approval of the Company.

RELEASE HISTORY

Version	Changes	Issued
1.0	Initial release	4 July 2019
1.1	spelling errors corrected Page 5: Trademark changed to Scanreco. Page 11: Measuring distance added (3m). Page 45: Calibration date of SMBV100A updated	12 August 2019

PRODUCT DESCRIPTION

Equipment Under Test

Trade mark: Scanreco
Model: D3 DRC-J
Type: PN: 50504, Rev: A
Serial no: 004715 (conducted measurements), 004716 (radiated measurements)
FCC ID: N5OD3DRCJ
IC: 6476A-D3DRCJ

General Description

EUT is 2.4GHz radio module that supports frequency hopping (FHSS). The EUT has been tested as a radio module. A part of a typical host (plastic) was needed when testing in order to control the radio module and obtain full functionality.

Classification

- | | |
|--|-------------------------------------|
| Fixed device | <input type="checkbox"/> |
| Mobile Device (Human body distance > 20cm) | <input checked="" type="checkbox"/> |
| Portable Device (Human body distance < 20cm) | <input type="checkbox"/> |

Modifications Incorporated in the EUT

No modifications were applied during the tests. Two EUTs were used during the tests, one for radiated and one for conducted measurements. Conducted measurements sample was having RF connector.

Ratings and declarations

Operating Frequency Range (OFR): 2405 - 2480 MHz
Channels: 16
Channel separation: 5 MHz
Transmission technique: FHSS
Antenna type: quarter wave
Integral Antenna gain: 0 dBi

Power Supply

Operating voltage: 7.2 VDC

Mechanical Size of the EUT

Height: 150 mm Width: 250 mm Depth: 170 mm Weight: 1.8kg

SUMMARY OF TESTING

Test Specification	Description of Test	Result
§15.203	Antenna requirement	PASS
§15.207(a) / RSS-GEN 8.8	Conducted Emissions on Power Supply Lines	PASS
§15.247(b)(3) / RSS-247 5.4(d)	Maximum Peak Conducted Output Power	PASS
§15.247(a)(1) / RSS-247 5.1	Hopping Channel Carrier Frequency Separation	PASS
§15.247(a)(1) / RSS-247 5.1	Number of Hopping Frequencies	PASS
§15.247(a)(1) / RSS-247 5.1	Average Time of Occupancy of Hopping Frequency	PASS
§15.247(a)(1) / RSS-247 5.1	20 dB Bandwidth	PASS
§15.247(a)(2) / RSS-247 5.2(a)	6 dB Bandwidth	PASS
§15.247(e) / RSS-247 5.2(b)	Power Spectral Density	N/T ⁽¹⁾
RSS-GEN 6.7	99% Occupied Bandwidth	PASS
§15.247(d) / RSS-247 5.5	100 kHz Bandwidth of Frequency Band Edges and Conducted Spurious Emissions	PASS
§15.209(a), §15.247(d) / RSS-247 5.5	Radiated Emissions Within the Restricted Bands	PASS


1) Not applicable for FHSS

The decision rule applied for the tests results stated in this test report is according to the requirements of section 1.3 of ANSI C63.10-2013.

EUT Test Conditions during Testing

EUT was configured into the wanted test mode by pressing the host buttons in a specific order. In the tests, where continuous transmit was used the hopping was stopped and EUT was configured to wanted test channel. Max power was used during all tests. EUT was powered by laboratory power supply. In normal use 7.2VDC, 2000mAh NiMH rechargeable battery back is used. During the tests, battery pack was not installed. The EUT was tested when connected to a host device allowing the controlling of the EUT.

Test	Operating mode
Conducted Emissions on Power Supply Lines	continuous transmit
Maximum Peak Conducted Output Power	continuous transmit
Hopping Channel Carrier Frequency Separation	Hopping
Number of Hopping Frequencies	Hopping
Average Time of Occupancy of Hopping Frequency	Hopping
20 dB Bandwidth	Hopping
6 dB Bandwidth	continuous transmit
99% Occupied Bandwidth	continuous transmit
100 kHz Bandwidth of Frequency Band Edges and Conducted Spurious Emissions	continuous transmit, hopping
Radiated Emissions Within the Restricted Bands	continuous transmit

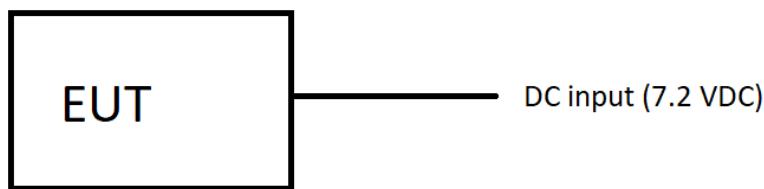**Figure 1:** Test setup blocking diagram**Table 1:** Test frequencies

Channel	Frequency (MHz)
1, low	2405
8, middle	2440
16, high	2480
1-16, hopping mode	2405-2480

Test Facility

Testing Laboratory / address: FCC registration number: 904175	SGS Fimko Ltd Särkinenmentie 3 FI-00210, HELSINKI FINLAND
Test Site:	<input type="checkbox"/> K10LAB, ISED Canada registration number: 8708A-1 <input checked="" type="checkbox"/> K5LAB, ISED Canada registration number: 8708A-2 <input type="checkbox"/> L3LAB <input type="checkbox"/> T10LAB

TEST RESULTS**Antenna requirement**

Standard: FCC Rule §15.203
Tested by: JAT
Date: 2 July 2019

FCC Rule: 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Specification	Requirement (at least one of the following shall be applied)	Conclusion
§15.203	<ol style="list-style-type: none">1. Permanently attached antenna2. Unique coupling to the intentional radiator3. Professionally installed radio. The installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.	PASS
Note	Option 1 is used	

Maximum Peak Conducted Output Power**Maximum Peak Conducted Output Power**

Standard:	ANSI C63.10	(2013)
Tested by:	JAT	
Date:	2 July 2019	
Temperature:	23 ± 3 °C	
Humidity:	20 - 60 % RH	
Measurement uncertainty:	± 2.87dB	Level of confidence 95 % (k = 2)

FCC Rule: 15.247(b)(3)
RSS-247 5.4(d)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05 and ANSI C63.10-2013 7.8.5

Measured values are peak values.

Results:

Table 2: Maximum conducted output power

Channel	Conducted Power [dBm]	Limit [dBm]	Margin [dBm]	Result
1 Low	20.2	21	0.8	PASS
8 Mid	19.9	21	1.1	PASS
16 High	17.9	21	3.1	PASS

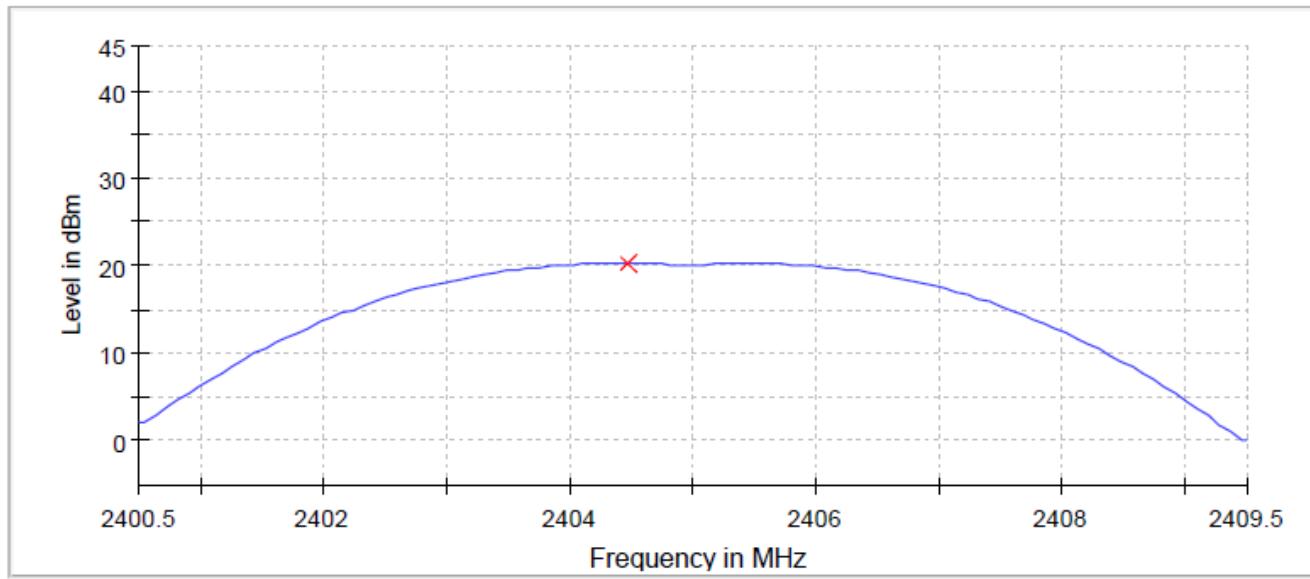
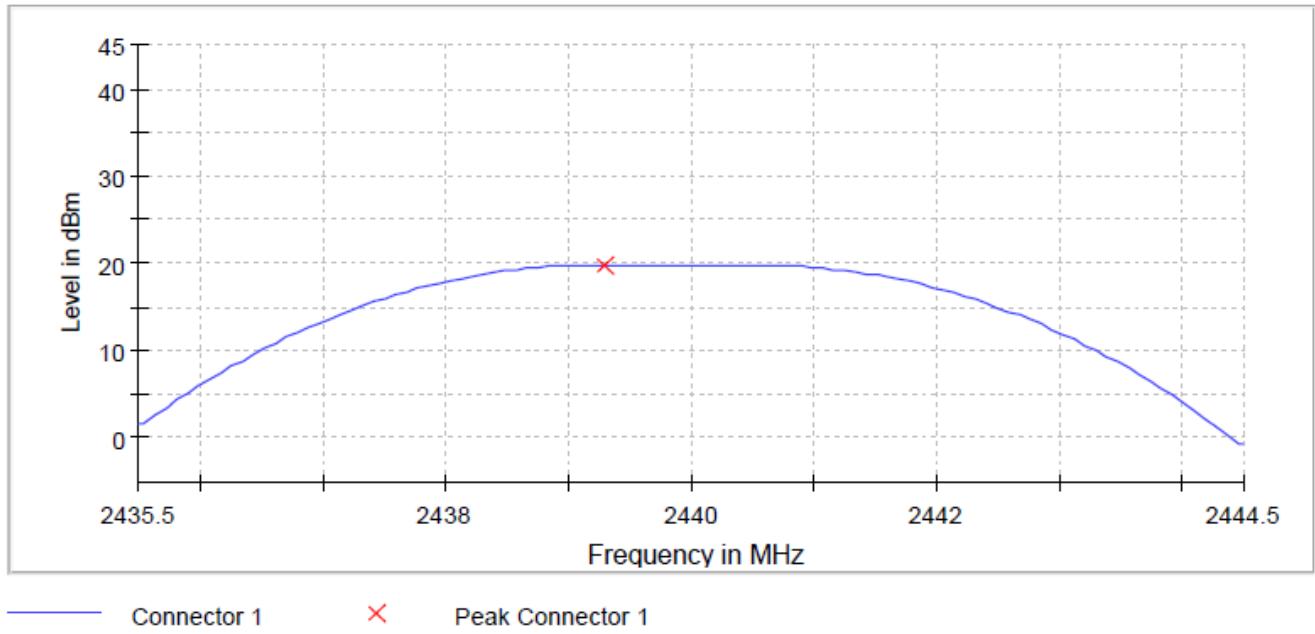
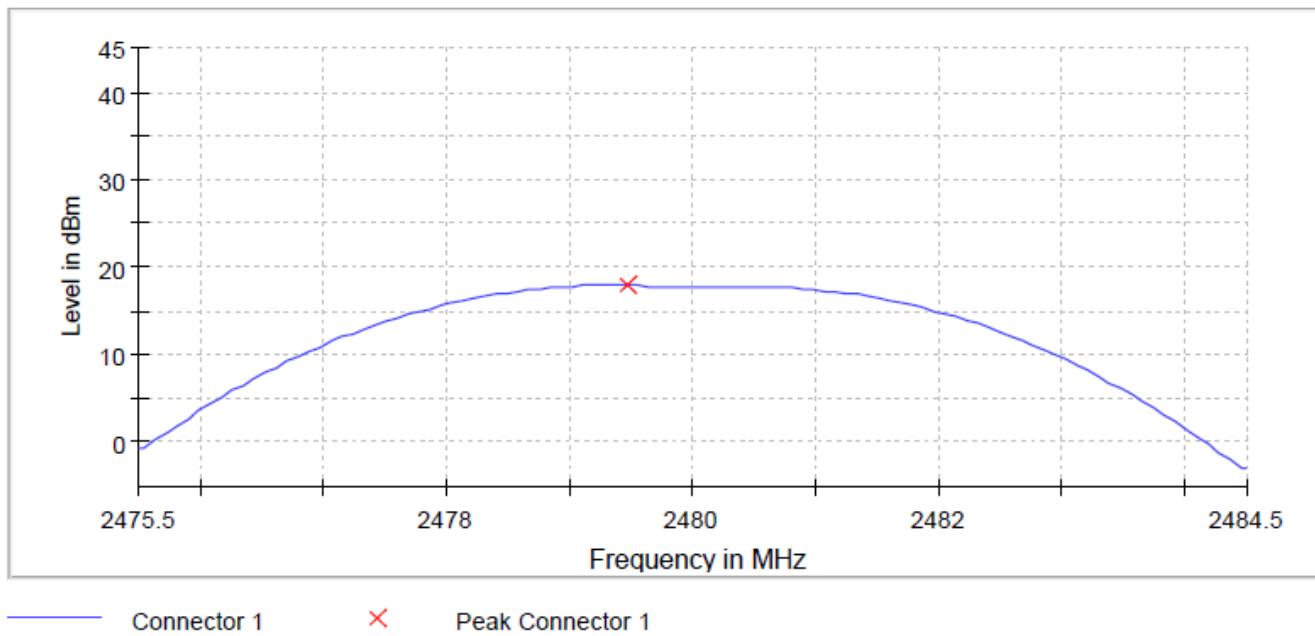


Figure 2: Conducted power, Channel LOW

Maximum Peak Conducted Output Power**Figure 3:** Conducted power, Channel MID**Figure 4:** Conducted power, Channel HIGH

Maximum Peak Conducted Output Power**Table 3:** Measurement settings, maximum conducted output power

Setting	Instrument Value	Target Value
Span	9.000 MHz	9.000 MHz
RBW	3.000 MHz	>= 2.825 MHz
VBW	10.000 MHz	>= 9.000 MHz
SweepPoints	101	~ 101
Sweeptime	1.271 µs	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	40.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.04 dB	0.50 dB

Transmitter Radiated Spurious Emissions 9 kHz – 26.5 GHz

Standard: ANSI C63.10 (2013)
Tested by: JAT
Date: 24 June – 2 July 2019
Temperature: 23 ± 3 °C
Humidity: 20 - 60 % RH
Measurement uncertainty: ± 4.51 dB Level of confidence 95 % (k = 2)

FCC Rule: 15.247(d), 15.209(a)**RSS-247 5.5**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

The correction factor in the final result table contains the sum of the transducers (antenna + amplifier + cables).

Peak values of emissions below 1000 MHz measured for reference as well as transmitter fundamental.






The measurements above 1 GHz were performed by using a peak detector and a Duty Cycle correction factor(dB) -21.39 dB, see chapter: Duty cycle correction factor, Transmit time in 100 ms.

The pre-measurements were performed with the EUT being in three orthogonal positions (X, Y, Z). Final measurements were done in worst position.

Measuring distance was 3 meters.

Frequency range [MHz]	Limit [μ V/m]	Limit [dB μ V/m]	Detector
30 - 80	100	40.0	Quasi-peak
88 - 216	150	43.5	Quasi-peak
216 - 960	200	46.0	Quasi-peak
960 - 1000	500	53.9	Quasi-peak
Above 1000	500	53.9	Average
Above 1000	5000	73.9	Peak

Transmitter Radiated Spurious Emissions 9 kHz – 26.5 GHz

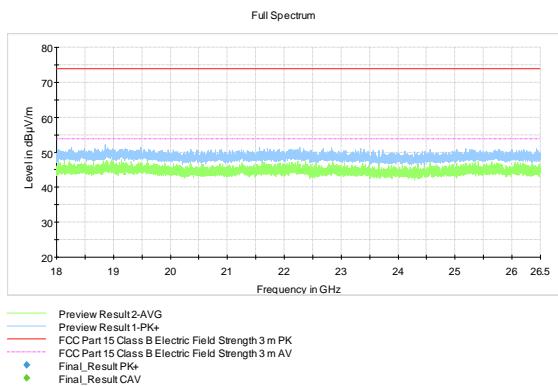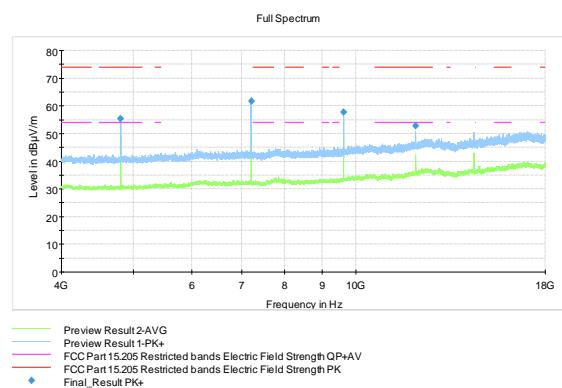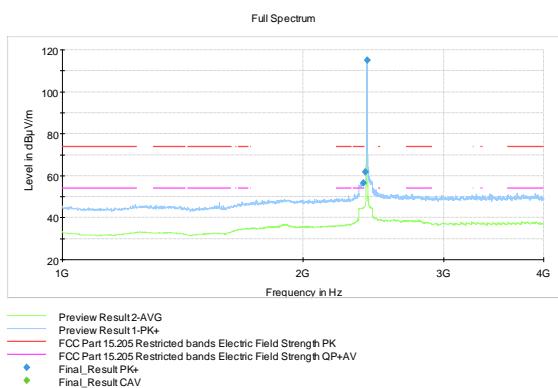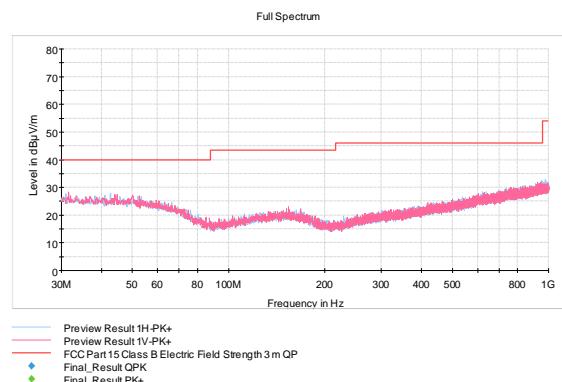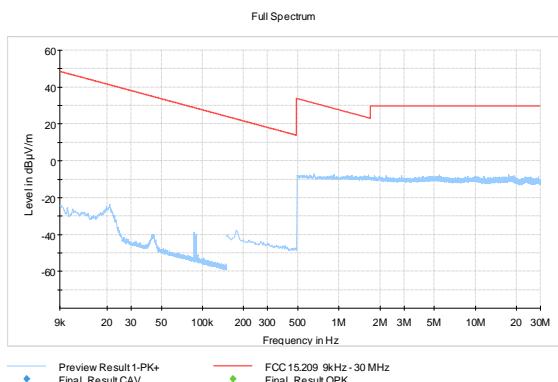Results LOW channel


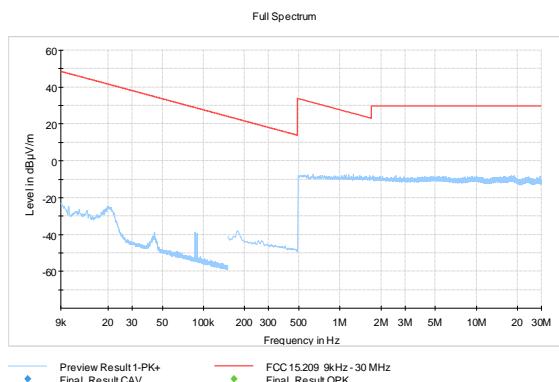
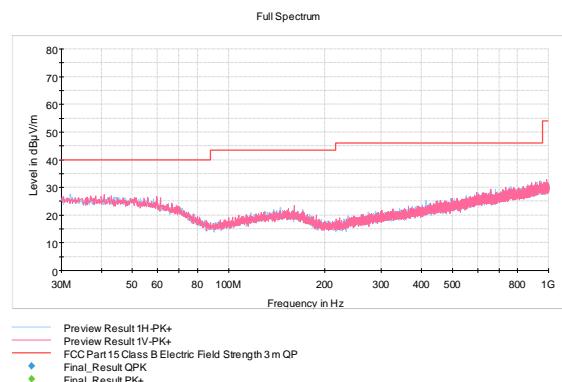
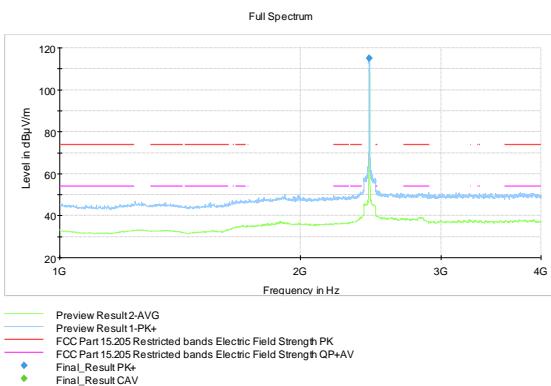
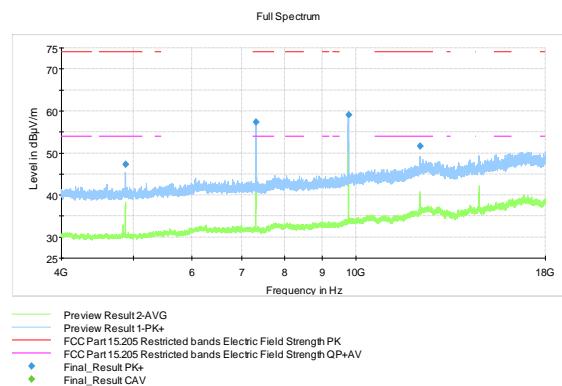
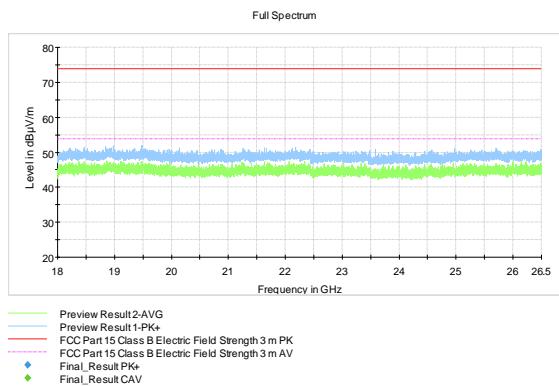
Transmitter Radiated Spurious Emissions 9 kHz – 26.5 GHz**Table 4:** Peak results LOW channel

Frequency (MHz)	MaxPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment
2381.600000	56.65	73.90	17.25	1000.0	1000.000	134.0	V	228.0	13.9	-
2395.000000	61.82	94.90	33.08	1000.0	1000.000	107.0	V	290.0	14.0	limit -20dBc
2405.500000	114.90	---	---	1000.0	1000.000	116.0	V	248.0	14.1	Tx fundamental
4808.800000	55.27	73.90	18.63	1000.0	1000.000	166.0	H	6.0	7.2	-
7216.200000	61.78	94.90	33.12	1000.0	1000.000	178.0	V	154.0	10.3	limit -20dBc
9621.700000	57.60	94.90	37.30	1000.0	1000.000	163.0	H	203.0	13.6	limit -20dBc
12027.000000	52.68	73.90	21.22	1000.0	1000.000	122.0	V	191.0	16.8	-

Table 5: Average results LOW channel, calculated from Max Peak results (Max Peak result minus Duty Cycle correction factor(dB) -21.39 dB)

Frequency (MHz)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment
2381.600000	35.26	73.51	38.25	1000.0	1000.000	134.0	V	228.0	13.9	-
2395.000000	40.43	53.90	13.47	1000.0	1000.000	107.0	V	290.0	14.0	limit -20dBc
2405.500000	93.51	---	---	1000.0	1000.000	116.0	V	248.0	14.1	Tx fundamental
4808.800000	33.88	73.51	39.63	1000.0	1000.000	166.0	H	6.0	7.2	-
7216.200000	40.39	53.90	13.51	1000.0	1000.000	178.0	V	154.0	10.3	limit -20dBc
9621.700000	36.21	73.51	37.30	1000.0	1000.000	163.0	H	203.0	13.6	limit -20dBc
12027.000000	31.29	73.51	42.22	1000.0	1000.000	122.0	V	191.0	16.8	-

Transmitter Radiated Spurious Emissions 9 kHz – 26.5 GHz

Results MID channel

Figure 10: MID channel (9 kHz – 30 MHz)

Figure 11: MID channel (30 MHz – 1000 MHz)

Figure 12: MID channel (1 GHz – 4 GHz)

Figure 13: MID channel (4 GHz – 18 GHz)

Figure 14: MID channel (18 GHz – 26.5 GHz)

Transmitter Radiated Spurious Emissions 9 kHz – 26.5 GHz**Table 6:** Peak results MID channel






Frequency (MHz)	MaxPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment
2439.400000	115.12	---	---	1000.0	1000.000	130.0	V	241.0	13.9	Tx fundamental
4878.800000	47.30	73.90	26.60	1000.0	1000.000	173.0	V	187.0	7.2	-
7318.200000	57.33	73.90	16.57	1000.0	1000.000	152.0	H	189.0	10.2	-
9761.700000	59.01	95.12	36.11	1000.0	1000.000	159.0	H	150.0	13.9	limit -20dBc
12202.100000	51.63	73.90	22.27	1000.0	1000.000	100.0	V	223.0	16.9	-

Table 7: Average results MID channel, calculated from Max Peak results (Max Peak result minus Duty Cycle correction factor(dB) -21.39 dB)

Frequency (MHz)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment
2439.400000	93.73	---	---	1000.0	1000.000	130.0	V	241.0	13.9	Tx fundamental
4878.800000	25.91	53.90	27.99	1000.0	1000.000	173.0	V	187.0	7.2	-
7318.200000	35.94	53.90	17.96	1000.0	1000.000	152.0	H	189.0	10.2	-
9761.700000	37.62	73.73	36.11	1000.0	1000.000	159.0	H	150.0	13.9	limit -20dBc
12202.100000	30.24	53.90	23.66	1000.0	1000.000	100.0	V	223.0	16.9	-

Transmitter Radiated Spurious Emissions 9 kHz – 26.5 GHz

Results HIGH channel

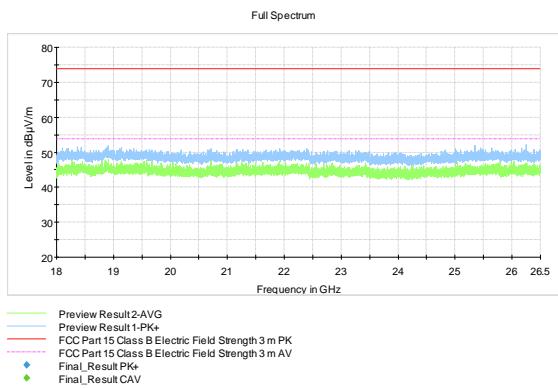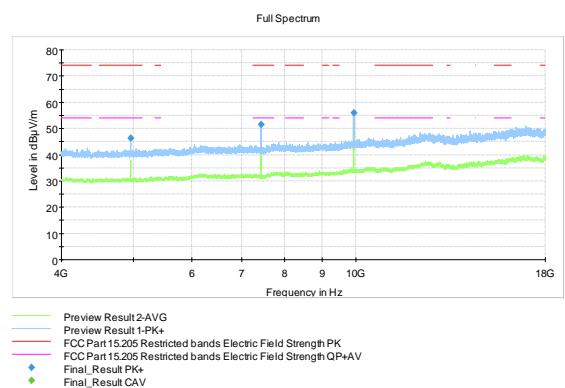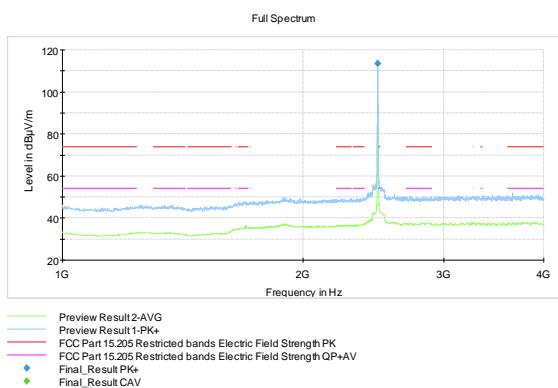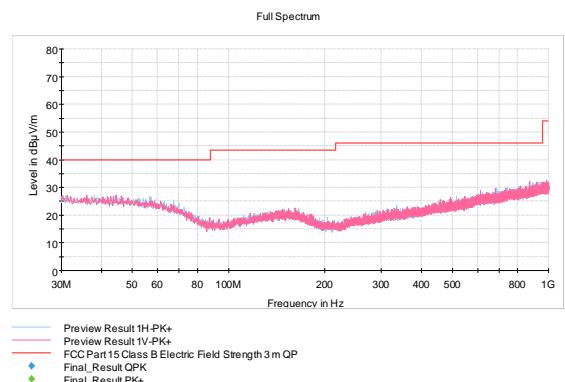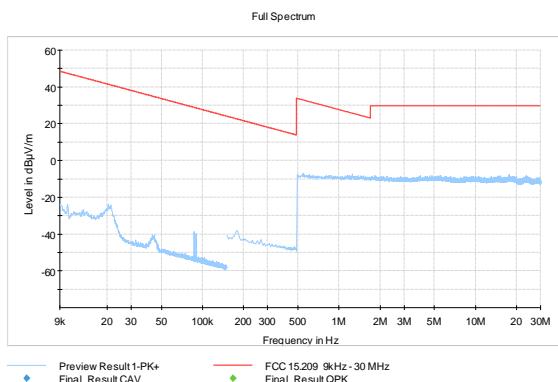

Transmitter Radiated Spurious Emissions 9 kHz – 26.5 GHz**Table 8:** Peak results HIGH channel

Frequency (MHz)	MaxPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment
2479.400000	113.37	---	---	1000.0	1000.000	111.0	V	256.0	14.1	Tx fundamental
4959.300000	46.21	73.9	27.69	1000.0	1000.000	129.0	V	180.0	7.1	-
7438.300000	51.63	73.9	22.27	1000.0	1000.000	159.0	V	313.0	10.3	-
9921.500000	56.03	93.37	37.34	1000.0	1000.000	129.0	H	148.0	14.1	limit -20dBc

Table 9: Average results HIGH channel, calculated from Max Peak results (Max Peak result minus Duty Cycle correction factor(dB) -21.39 dB)

Frequency (MHz)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment
2479.400000	91.98	---	---	1000.0	1000.000	111.0	V	256.0	14.1	Tx fundamental
4959.300000	24.82	53.90	29.08	1000.0	1000.000	129.0	V	180.0	7.1	-
7438.300000	30.24	53.90	23.66	1000.0	1000.000	159.0	V	313.0	10.3	-
9921.500000	34.64	71.98	37.34	1000.0	1000.000	129.0	H	148.0	14.1	limit -20dBc

Transmitter Radiated Spurious Emissions 9 kHz – 26.5 GHz

Radiated lower and upper band edge results

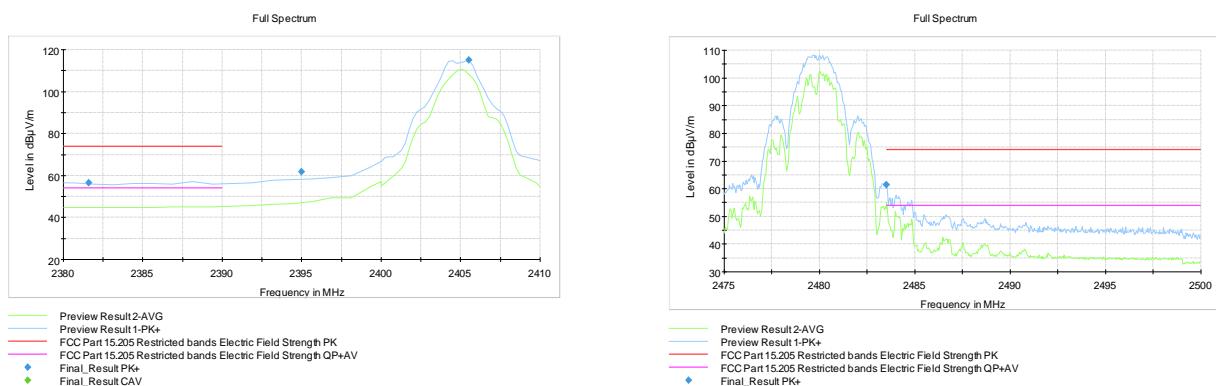


Figure 20: Radiated lower and upper band edge results

Table 10: Peak results Radiated lower and upper band edge results

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment
2381.600000	56.65	73.90	17.25	1000.0	1000.000	134.0	V	228.0	13.9	-
2395.000000	61.82	94.90	33.08	1000.0	1000.000	107.0	V	290.0	14.0	limit -20dBc
2405.500000	114.90	---	---	1000.0	1000.000	116.0	V	248.0	14.1	Tx fundamental
2479.400000	113.37	---	---	1000.0	1000.000	111.0	V	256.0	14.1	Tx fundamental
2483.500000	61.34	73.90	12.56	1000.0	100.000	111.0	V	193.0	14.1	-

Table 11: Average results Radiated lower and upper band edge results. Results are calculated from Max Peak results (Max Peak result minus Duty Cycle correction factor(dB) -21.37 dB)

Frequency (MHz)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment
2381.600000	35.26	73.51	38.25	1000.0	1000.000	134.0	V	228.0	13.9	-
2395.000000	40.43	53.90	13.47	1000.0	1000.000	107.0	V	290.0	14.0	limit -20dBc
2405.500000	93.51	---	---	1000.0	1000.000	116.0	V	248.0	14.1	Tx fundamental
2479.400000	91.98	---	---	1000.0	1000.000	111.0	V	256.0	14.1	Tx fundamental
2483.500000	39.95	53.90	13.95	1000.0	100.000	111.0	V	193.0	14.1	-

Transmitter Band Edge Measurement and Conducted Spurious Emissions

Standard: ANSI C63.10 (2013)
Tested by: JAT
Date: 2 July 2019
Temperature: 23 ± 3 °C
Humidity: 20 - 60 % RH
Measurement uncertainty: ± 2.87 dB Level of confidence 95 % (k = 2)

FCC Rule: 15.247(d), 15.209(a)

RSS-247 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Table 17: Band edge attenuation

Band Edge Attenuation	
Lower Band Edge	Upper Band Edge
-51.9 dBc	-46.4 dBc
Limit: -20 dBc	

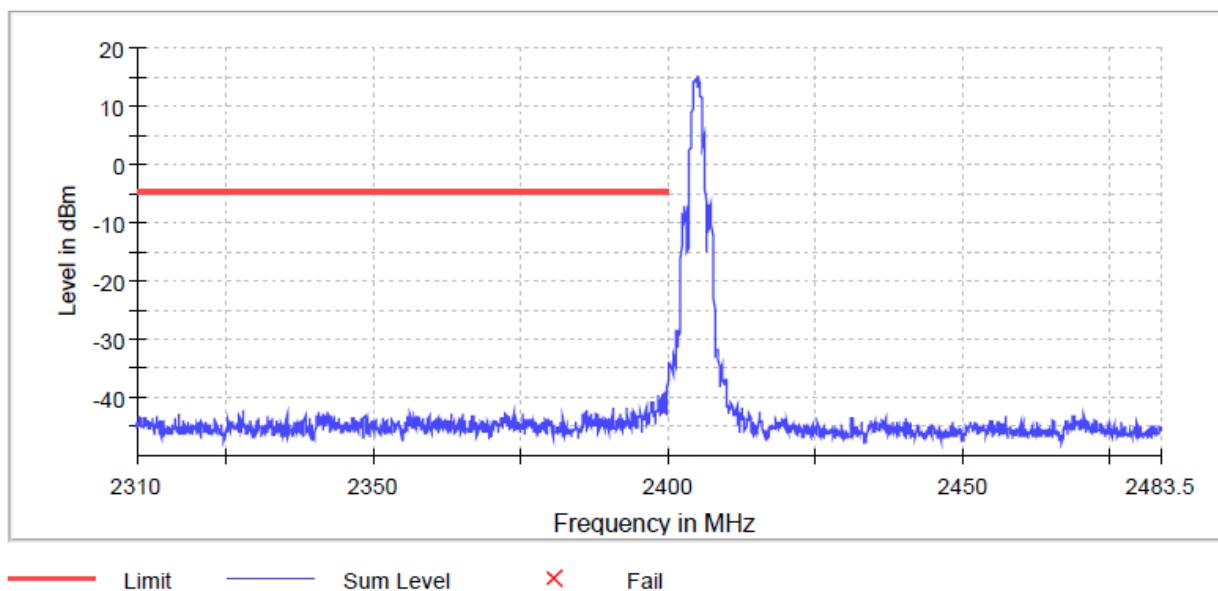
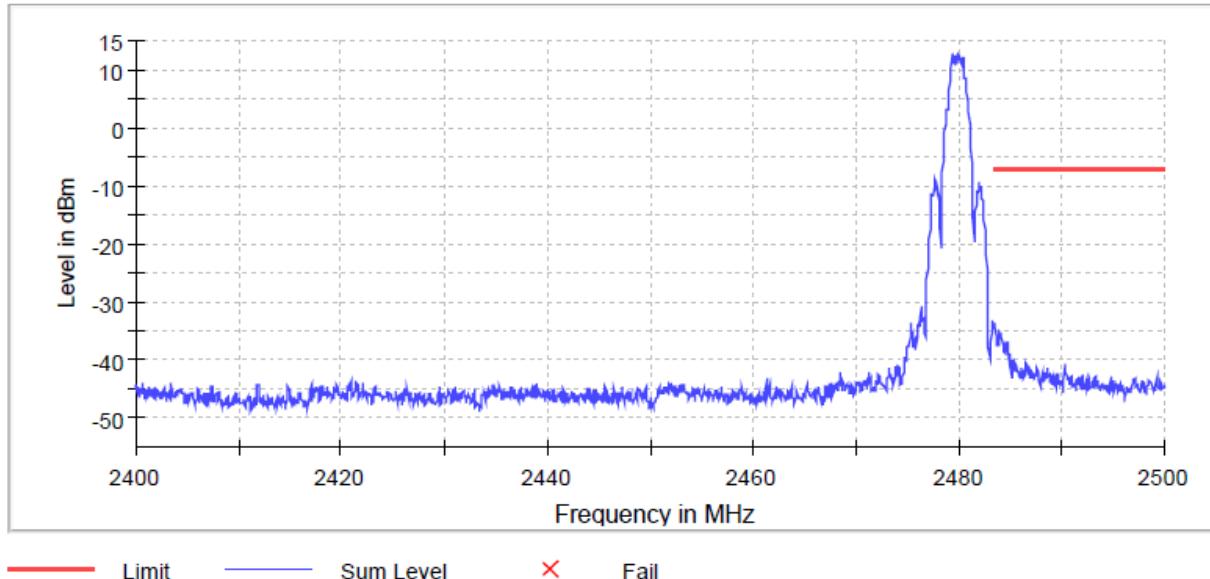


Figure 21: Lower Band Edge

Transmitter Band Edge Measurement and Conducted Spurious Emissions

Table 12: Lower band edge results

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2399.975000	-36.7	31.9	-4.7	PASS
2399.775000	-37.9	33.1	-4.7	PASS
2399.825000	-37.9	33.2	-4.7	PASS
2399.875000	-38.4	33.7	-4.7	PASS
2399.925000	-39.1	34.3	-4.7	PASS
2399.925000	-39.2	34.5	-4.7	PASS
2399.725000	-39.5	34.7	-4.7	PASS
2399.675000	-39.7	35.0	-4.7	PASS
2399.175000	-39.7	35.0	-4.7	PASS
2399.275000	-39.7	35.0	-4.7	PASS
2398.325000	-39.8	35.1	-4.7	PASS
2398.275000	-40.0	35.2	-4.7	PASS
2398.375000	-40.4	35.7	-4.7	PASS
2399.075000	-40.4	35.7	-4.7	PASS
2399.025000	-40.6	35.9	-4.7	PASS


**Figure 22:** Upper Band Edge**Table 13:** Upper band edge results

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2483.525000	-33.4	26.4	-7.0	PASS
2483.575000	-34.4	27.4	-7.0	PASS
2484.025000	-35.3	28.3	-7.0	PASS
2484.175000	-35.4	28.3	-7.0	PASS
2483.975000	-35.5	28.5	-7.0	PASS
2484.125000	-35.7	28.7	-7.0	PASS
2483.625000	-36.0	29.0	-7.0	PASS
2484.225000	-36.1	29.1	-7.0	PASS
2484.075000	-36.2	29.1	-7.0	PASS
2484.775000	-36.8	29.8	-7.0	PASS
2484.625000	-36.8	29.8	-7.0	PASS
2483.725000	-36.9	29.8	-7.0	PASS
2483.925000	-36.9	29.9	-7.0	PASS
2484.825000	-37.0	30.0	-7.0	PASS
2484.675000	-37.1	30.1	-7.0	PASS


Transmitter Band Edge Measurement and Conducted Spurious Emissions

Table 14: Band edge attenuation, Hopping mode


Band Edge Attenuation	
Lower Band Edge	Upper Band Edge
-55.2 dBc	-49.9 dBc
Limit: -20 dBc	

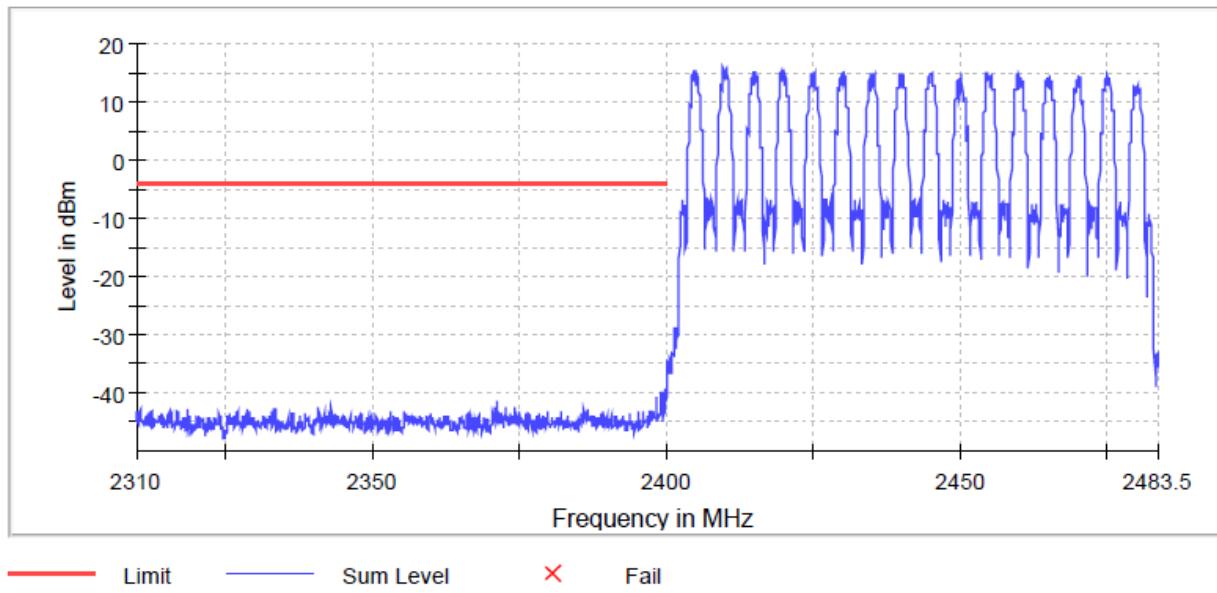**Figure 23:** Lower Band Edge, hopping mode**Table 15:** Lower band edge results, hopping mode

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2399.825000	-39.3	35.2	-4.1	PASS
2399.775000	-39.3	35.3	-4.1	PASS
2399.725000	-39.6	35.5	-4.1	PASS
2399.675000	-39.7	35.7	-4.1	PASS
2399.225000	-39.9	35.8	-4.1	PASS
2399.175000	-40.0	35.9	-4.1	PASS
2399.975000	-40.7	36.7	-4.1	PASS
2398.275000	-40.9	36.8	-4.1	PASS
2399.875000	-40.9	36.9	-4.1	PASS
2398.325000	-41.3	37.2	-4.1	PASS
2399.025000	-41.4	37.4	-4.1	PASS
2371.225000	-41.5	37.4	-4.1	PASS
2399.075000	-41.5	37.4	-4.1	PASS
2371.275000	-41.7	37.6	-4.1	PASS
2399.925000	-41.9	37.8	-4.1	PASS

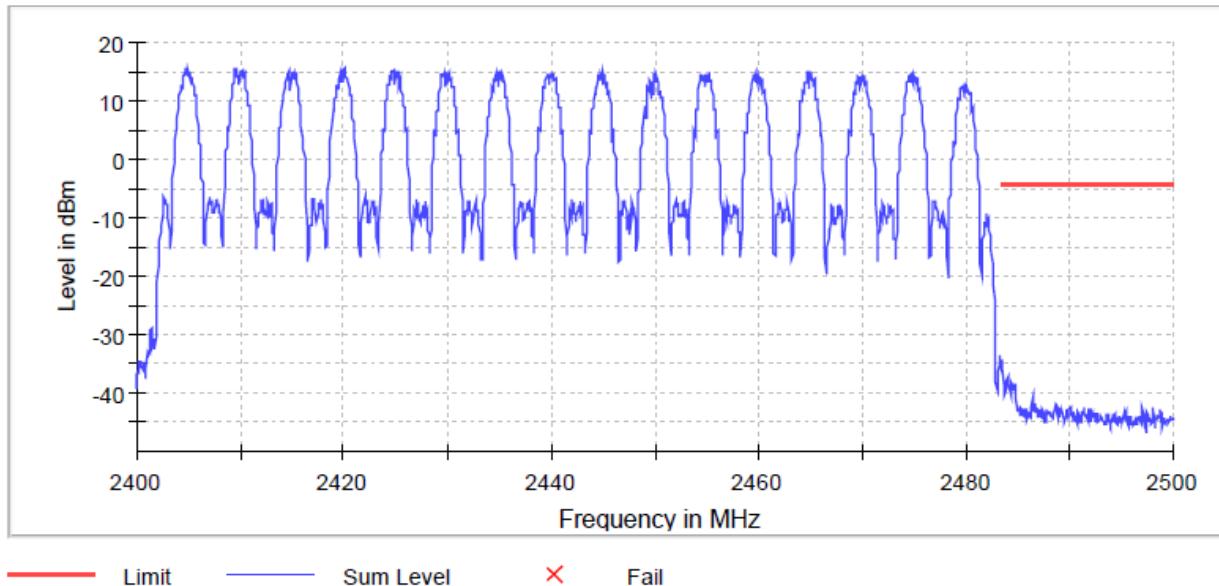Transmitter Band Edge Measurement and Conducted Spurious Emissions**Figure 24:** Upper Band Edge, hopping mode**Table 16:** Upper band edge results, hopping mode


Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2483.525000	-34.2	29.9	-4.3	PASS
2483.575000	-35.8	31.4	-4.3	PASS
2484.125000	-37.0	32.7	-4.3	PASS
2484.075000	-37.1	32.7	-4.3	PASS
2484.175000	-37.7	33.3	-4.3	PASS
2484.025000	-37.7	33.4	-4.3	PASS
2483.725000	-37.9	33.5	-4.3	PASS
2483.775000	-38.0	33.7	-4.3	PASS
2483.925000	-38.1	33.7	-4.3	PASS
2484.475000	-38.2	33.9	-4.3	PASS
2483.975000	-38.3	34.0	-4.3	PASS
2484.725000	-38.4	34.1	-4.3	PASS
2484.675000	-38.5	34.2	-4.3	PASS
2484.225000	-38.6	34.2	-4.3	PASS
2484.375000	-38.6	34.2	-4.3	PASS

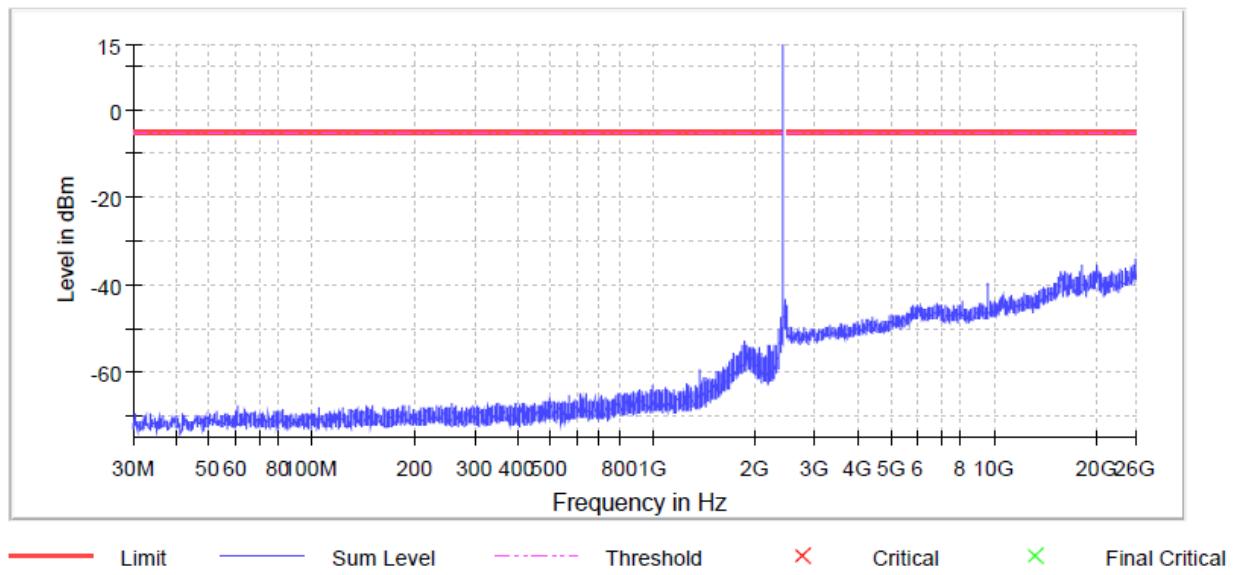Transmitter Band Edge Measurement and Conducted Spurious Emissions**Conducted spurious emissions results LOW channel****Figure 25:** Conducted spurious emissions 30 - 26500 MHz LOW channel**Table 17:** Pre measurements, conducted spurious emissions LOW channel

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
25924.676065	-34.3	29.2	-5.1
25854.863637	-35.1	29.9	-5.1
25878.379402	-35.4	30.3	-5.1
20132.449166	-35.6	30.5	-5.1
25469.058115	-35.7	30.5	-5.1
25892.341888	-35.7	30.6	-5.1
18190.193939	-35.7	30.6	-5.1
25895.281358	-35.8	30.7	-5.1
25882.053741	-35.8	30.7	-5.1
25898.220829	-35.8	30.7	-5.1
25252.272156	-35.9	30.8	-5.1
25777.702533	-35.9	30.8	-5.1
25837.226813	-35.9	30.8	-5.1
25901.160300	-35.9	30.8	-5.1
25935.699080	-36.0	30.8	-5.1

Table 18: Final measurements, conducted spurious emissions LOW channel

No final measurements were made; no emissions near the limit.

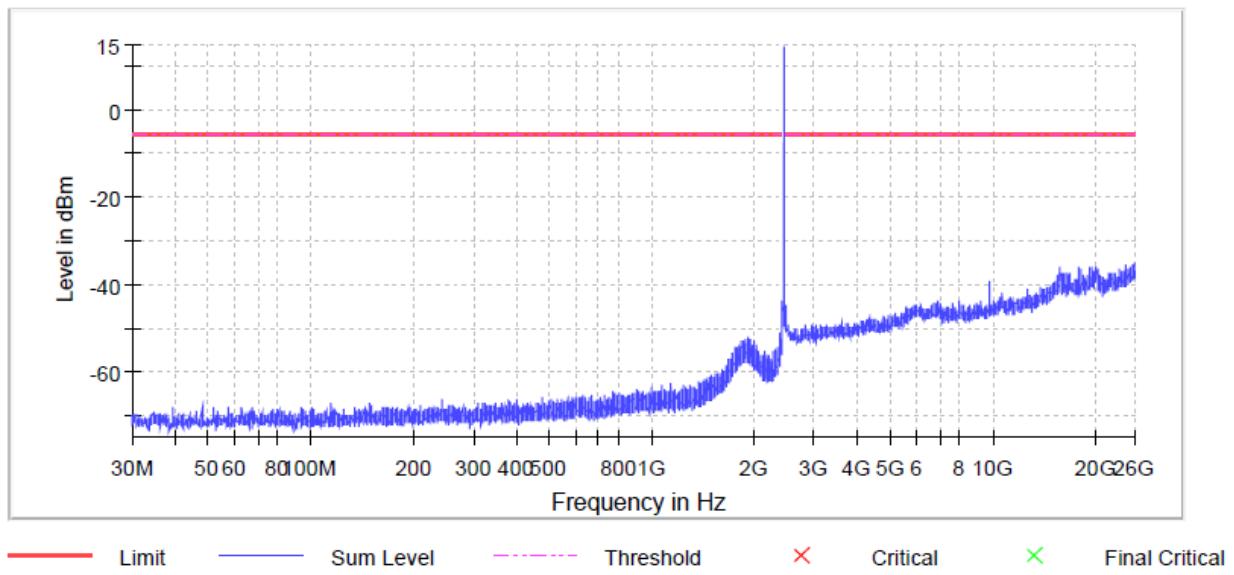Transmitter Band Edge Measurement and Conducted Spurious Emissions**Conducted spurious emissions results MID channel****Figure 26:** Conducted spurious emissions 30 - 26500 MHz MID channel**Table 19:** Pre-measurements, conducted spurious emissions MID channel

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
25853.393902	-35.0	29.4	-5.6
25855.598505	-35.2	29.7	-5.6
25719.647988	-35.5	29.9	-5.6
25878.379402	-35.5	30.0	-5.6
25876.174799	-35.5	30.0	-5.6
25883.523476	-35.6	30.0	-5.6
25899.690564	-35.6	30.0	-5.6
25829.878137	-35.6	30.1	-5.6
24632.043850	-35.6	30.1	-5.6
25840.166284	-35.6	30.1	-5.6
25882.788608	-35.7	30.1	-5.6
25830.613004	-35.7	30.1	-5.6
25896.751094	-35.7	30.2	-5.6
25869.560990	-35.7	30.2	-5.6
25775.497930	-35.8	30.2	-5.6

Table 20: Final measurements, conducted spurious emissions MID channel

No final measurements were made; no emissions near the limit.

Transmitter Band Edge Measurement and Conducted Spurious Emissions

Conducted spurious emissions results HIGH channel

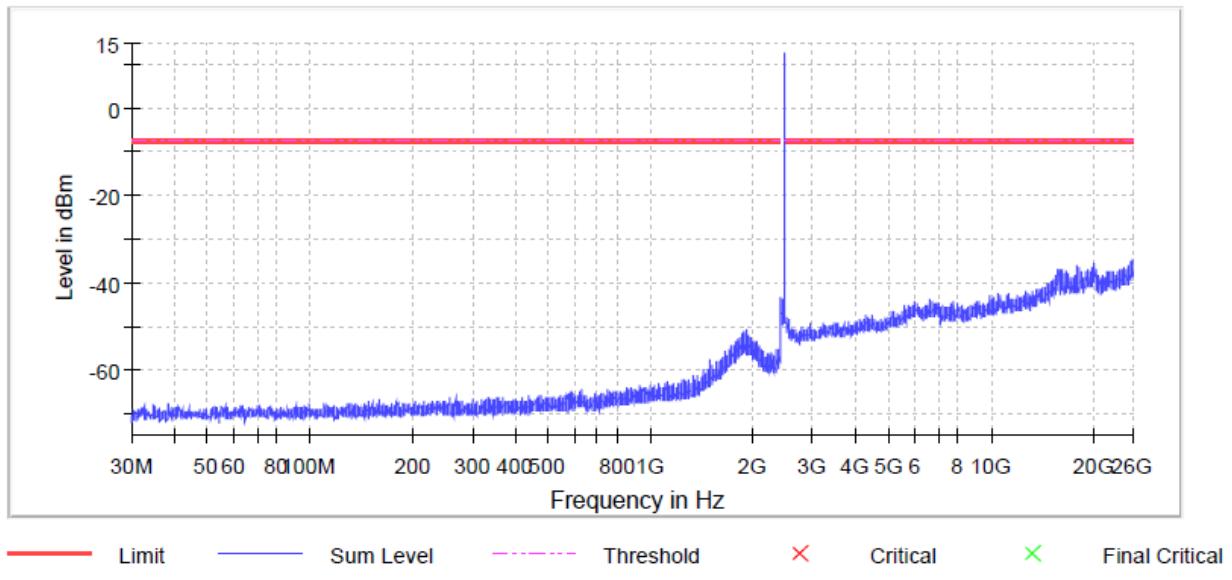


Figure 27: Conducted spurious emissions 30 - 26500 MHz HIGH channel

Table 21: Pre measurements, conducted spurious emissions HIGH channel

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
2483.867434	-32.3	25.0	-7.3
25901.160300	-34.5	27.2	-7.3
25564.590911	-35.0	27.7	-7.3
25900.425432	-35.1	27.8	-7.3
25881.318873	-35.2	27.9	-7.3
25677.760531	-35.3	28.0	-7.3
20144.941916	-35.5	28.3	-7.3
25957.745110	-35.6	28.3	-7.3
25909.243844	-35.7	28.4	-7.3
25853.393902	-35.7	28.5	-7.3
25873.970196	-35.9	28.6	-7.3
25857.068240	-35.9	28.6	-7.3
25549.158690	-35.9	28.6	-7.3
25886.462946	-35.9	28.6	-7.3
25912.183315	-36.0	28.7	-7.3

Table 22: Final measurements, conducted spurious emissions HIGH channel

No final measurements were made; no emissions near the limit.

Transmitter Band Edge Measurement and Conducted Spurious Emissions**Table 23:** Measurement settings, band edge

Setting	Instrument Value	Target Value
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
Sweeptime	94.727 µs	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	40.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	8 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.28 dB	0.50 dB

Table 24: Measurement settings, spurious emissions

Setting	Instrument Value	Target Value
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	32100	~ 47400
Sweeptime	32.100 ms	AUTO
Reference Level	-10.000 dBm	-30.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	30	30
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	1.00 dB	1.00 dB
Run	33 / max. 40	max. 40
Stable	1 / 1	1
Max Stable Difference	0.39 dB	1.00 dB


20 dB Bandwidth of the Hopping Channel**20 dB Bandwidth of the Hopping Channel**



Standard: ANSI C63.10 (2013)
Tested by: JAT
Date: 2 July 2019
Temperature: 23 ± 3 °C
Humidity: 20 - 60 % RH

FCC Rule: §15.247(a)(1)(iii)
RSS-247 5.1

Results:**Table 25:** 20 dB bandwidth test results

Channel	20 dB BW [kHz]	Minimum limit [kHz]	Result
Low	2825	-	PASS
Mid	2875		PASS
High	2850		PASS

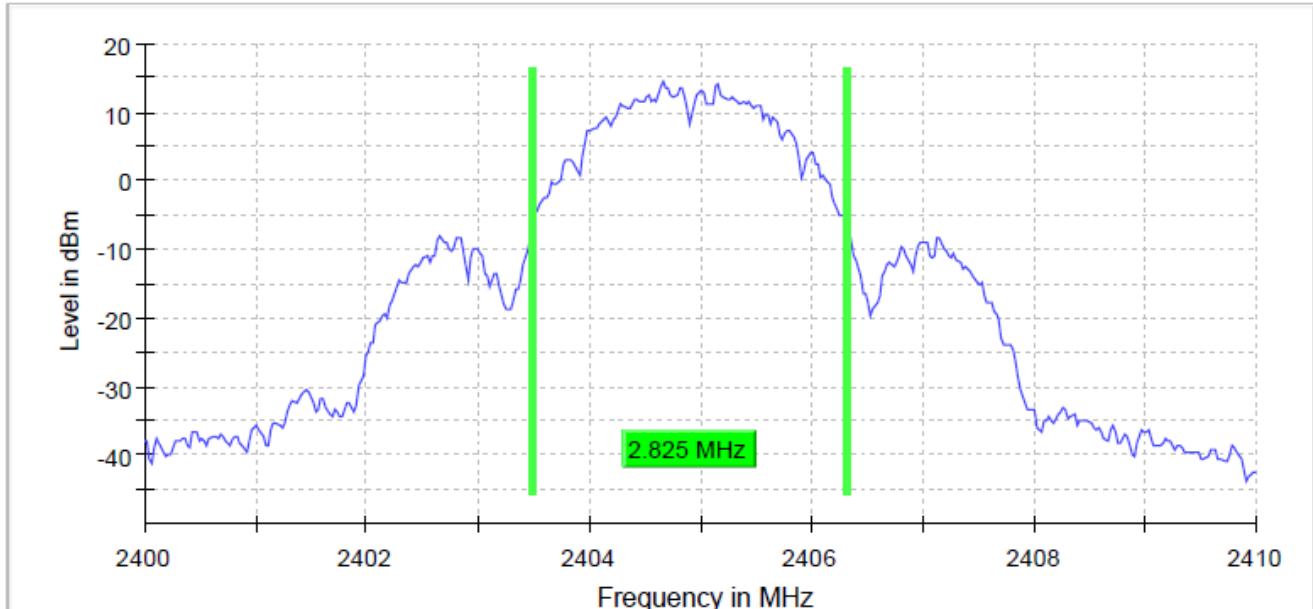**Figure 28:** 20 dB channel BW, channel LOW

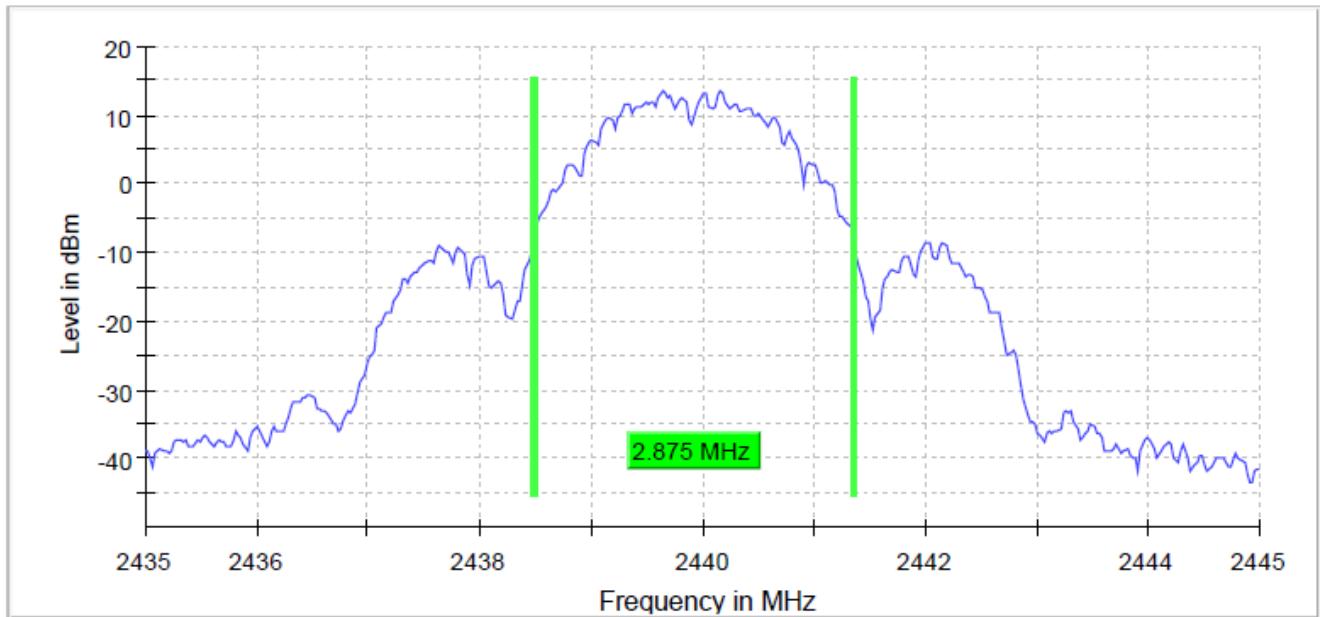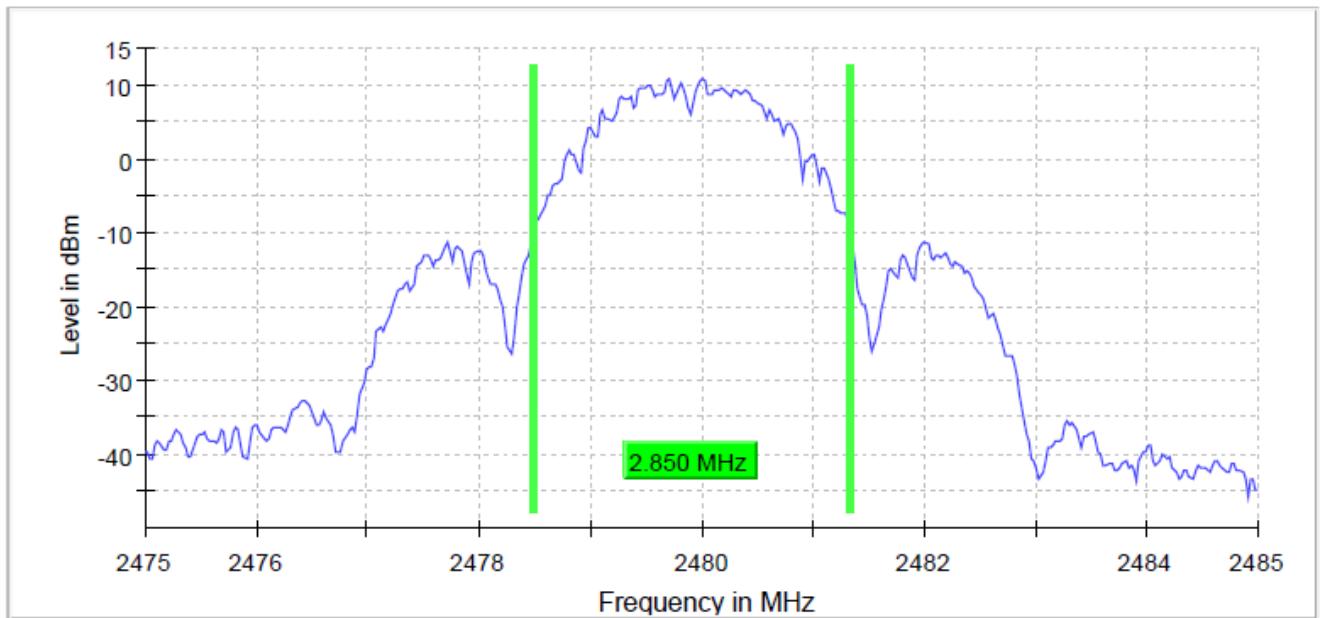20 dB Bandwidth of the Hopping Channel**Figure 29:** 20 dB channel BW, channel MID**Figure 30:** 20 dB channel BW, channel HIGH

20 dB Bandwidth of the Hopping Channel**Table 26:** Measurement settings, 20 dB bandwidth

Setting	Instrument Value	Target Value
Span	10.000 MHz	10.000 MHz
RBW	50.000 kHz	>= 50.000 kHz
VBW	200.000 kHz	>= 1500.000
SweepPoints	400	~ 400
Sweeptime	37.930 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	44 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.49 dB	0.50 dB

Hopping Channel Carrier Frequencies Separation**Hopping Channel Carrier Frequencies Separation**


Standard: ANSI C63.10 (2013)
Tested by: JAT
Date: 2 July 2019
Temperature: 23 ± 3 °C
Humidity: 20 - 60 % RH

FCC Rule: 15.247(a)(1)
RSS-247 5.1

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test result**Table 27:** Hopping channel carrier frequencies separation test result

DUT Frequency [MHz]	Center Frequency low Channel (MHz)	Center Frequency high Channel (MHz)	Channel Separation [MHz]	Minimum limit (MHz)	Result
2405.000000	2404.826733	2409.876238	5.049505	1.883333	PASS
2440.000000	2439.826733	2444.876238	5.049505	1.916667	PASS
2480.000000	2474.826733	2479.876238	5.049505	1.900000	PASS

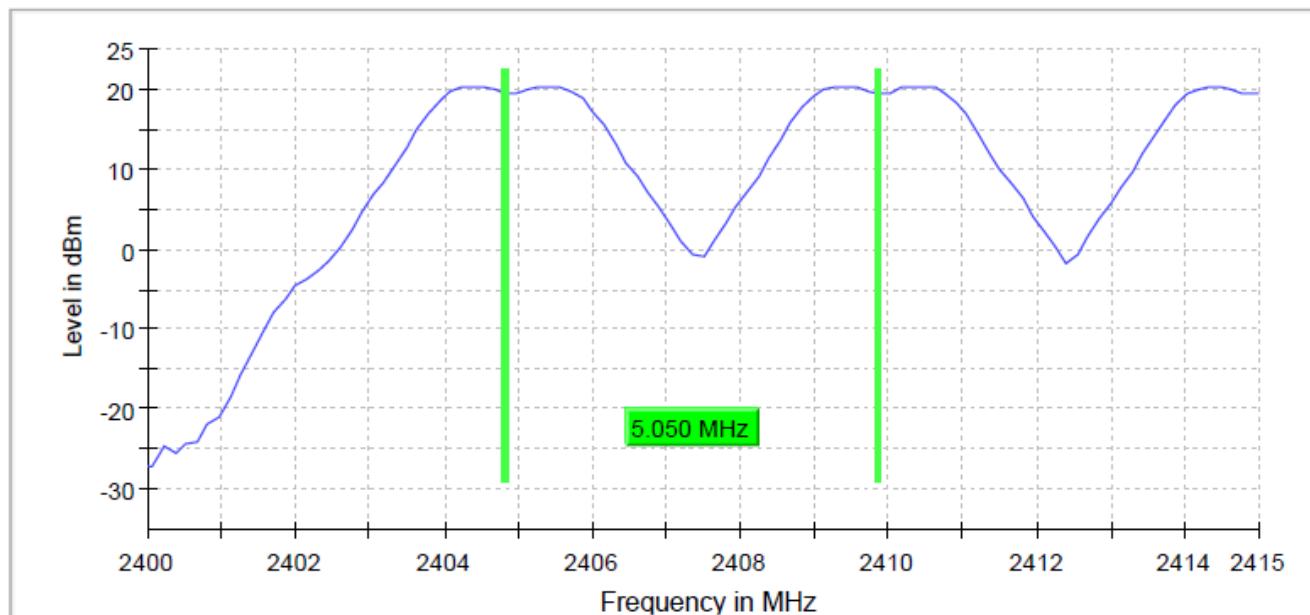**Figure 31:** Measured hopping channels carrier frequency separation, DUT frequency 2405MHz

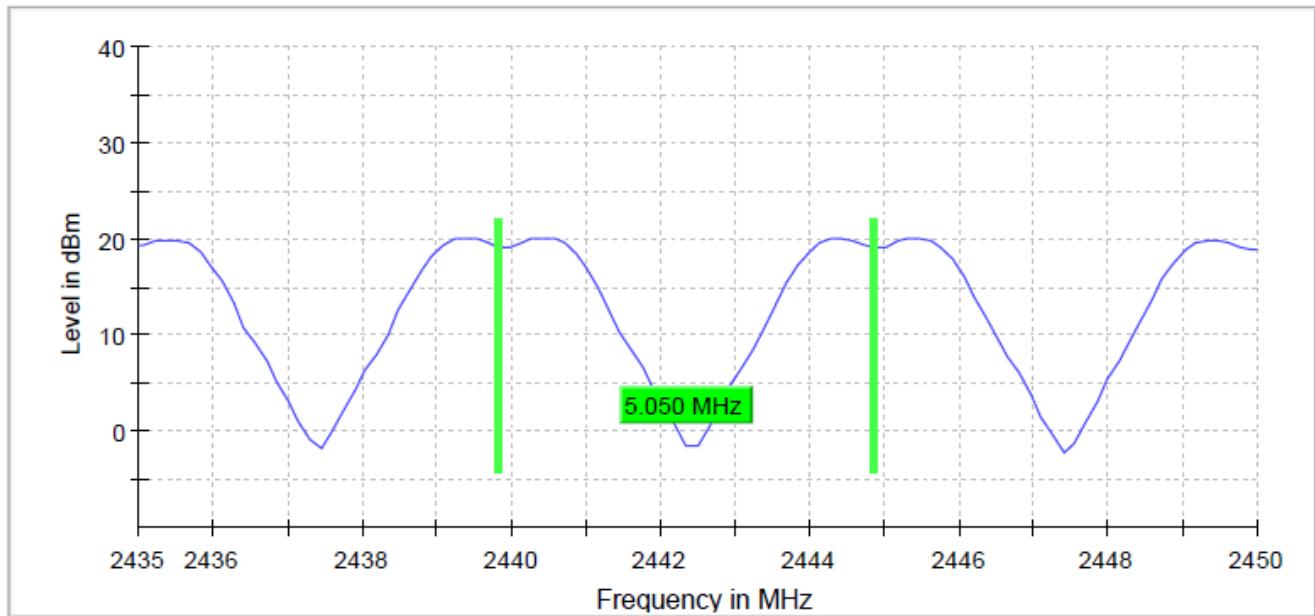
Hopping Channel Carrier Frequencies Separation

Figure 32: Measured hopping channels carrier frequency separation, DUT frequency 2440MHz

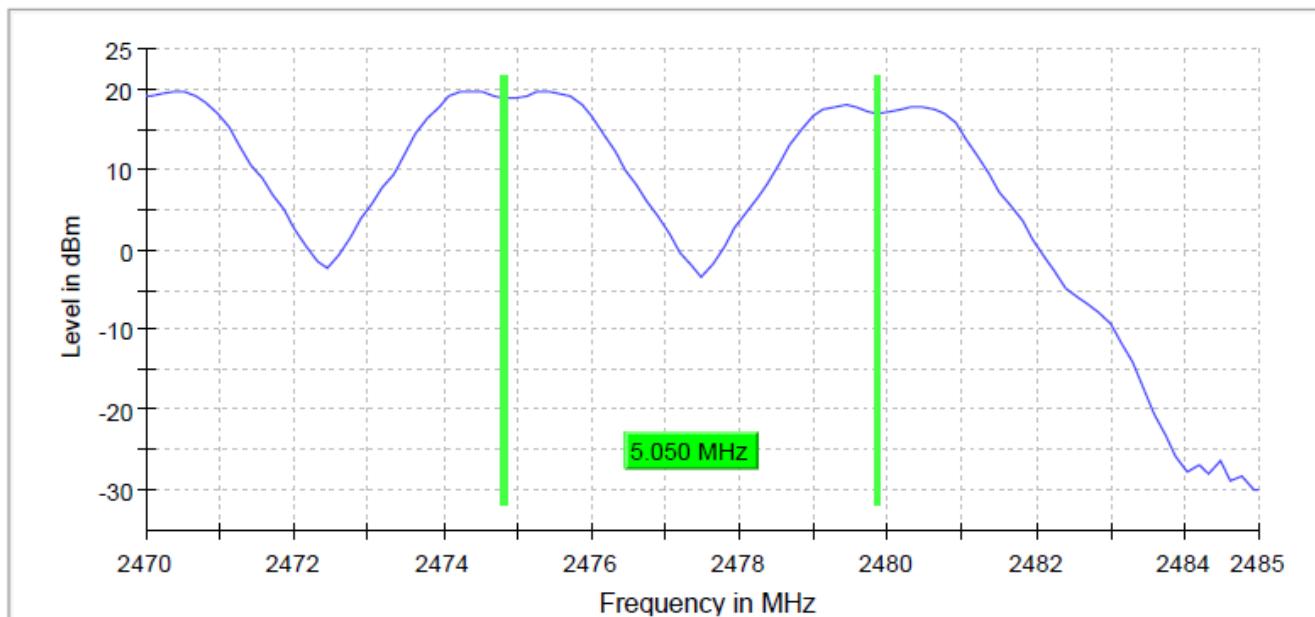


Figure 33: Measured hopping channels carrier frequency separation, DUT frequency 2480MHz

Hopping Channel Carrier Frequencies Separation**Table 28:** Measurement settings, Hopping channel carrier frequencies separation

Setting	Instrument Value	Target Value
Span	15.000 MHz	15.000 MHz
RBW	1.000 MHz	<= 1.500 MHz
VBW	1.000 MHz	>= 1.000 MHz
SweepPoints	101	~ 15
Sweeptime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	11 / max. 150	max. 150
Stable	10 / 10	10
Max Stable Difference	0.12 dB	0.50 dB

Number of Hopping Channels**Number of Hopping Channels**

Standard: ANSI C63.10 (2013)
Tested by: JAT
Date: 2 July 2019
Temperature: 23 ± 3 °C
Humidity: 20 - 60 % RH

FCC Rule: 15.247(a)(1)(iii)
RSS-247 5.1

For frequency hopping systems operating in the 2400-2483.5 MHz band shall use at least 15 channels.

Test result**Table 29: Number of hopping channels**

Operating frequency [MHz]	Number of channels	Minimum Limit	Result
2405 - 2480	16	15	PASS

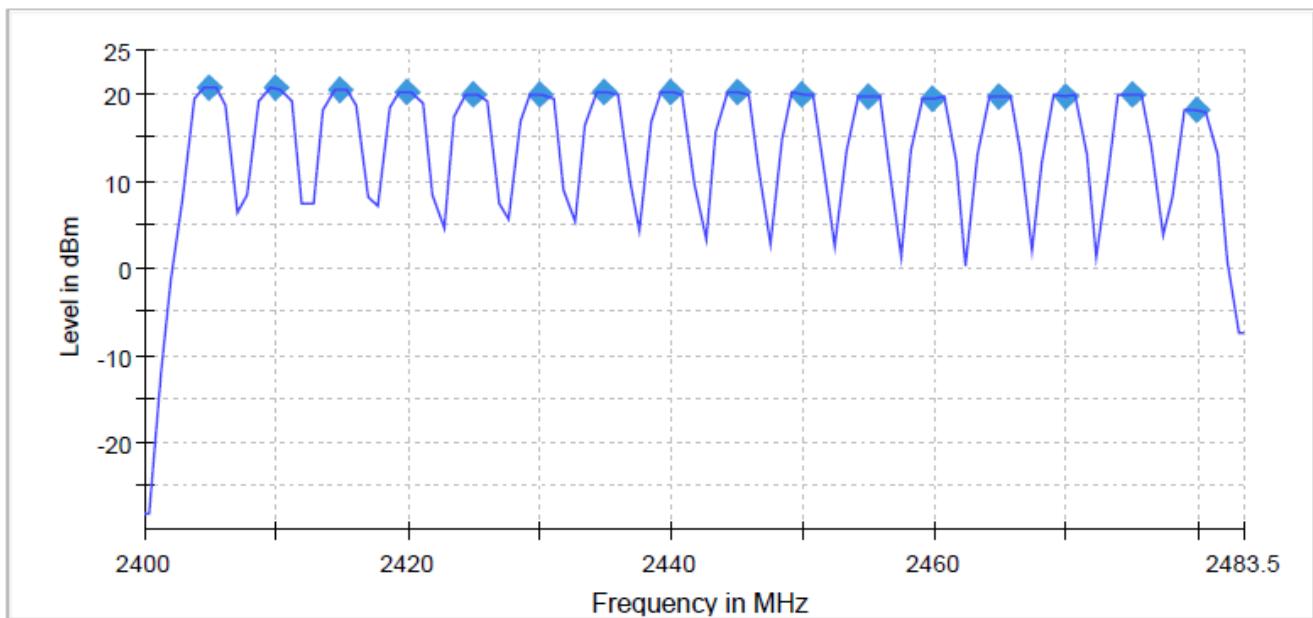
**Figure 34: Number of hopping channels**

Table 30: Measurement settings, Number of hopping channels

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	1.000 MHz	<= 1.495 MHz
VBW	1.000 MHz	>= 1.000 MHz
SweepPoints	101	~ 84
Sweeptime	11.377 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	6 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.18 dB	0.50 dB

Average Time of Occupancy of Hopping Frequency**Average Time of Occupancy of Hopping Frequency**

Standard: ANSI C63.10 (2013)
Tested by: JAT
Date: 2 July 2019
Temperature: 23 ± 3 °C
Humidity: 20 - 60 % RH

FCC Rule: 15.247(a)(1)(iii)
RSS-247 5.1

For frequency hopping systems operating in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

Test result**Table 31:** Result

DUT Frequency (MHz)	Result	Number of Hops	Average time of occupancy (ms)	Threshold (dBm)
2405.000000	PASS	84	362.203	-3.0
2440.000000	PASS	83	357.947	-3.0
2480.000000	PASS	83	357.919	-3.0

Table 32: Periode

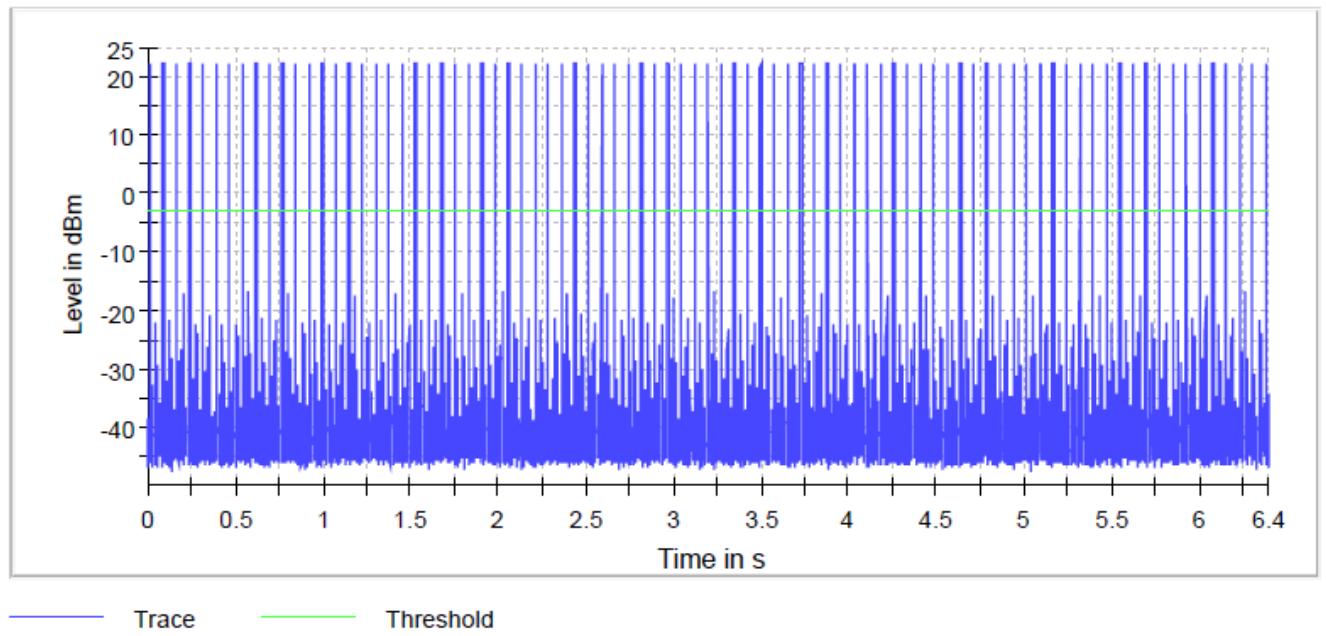
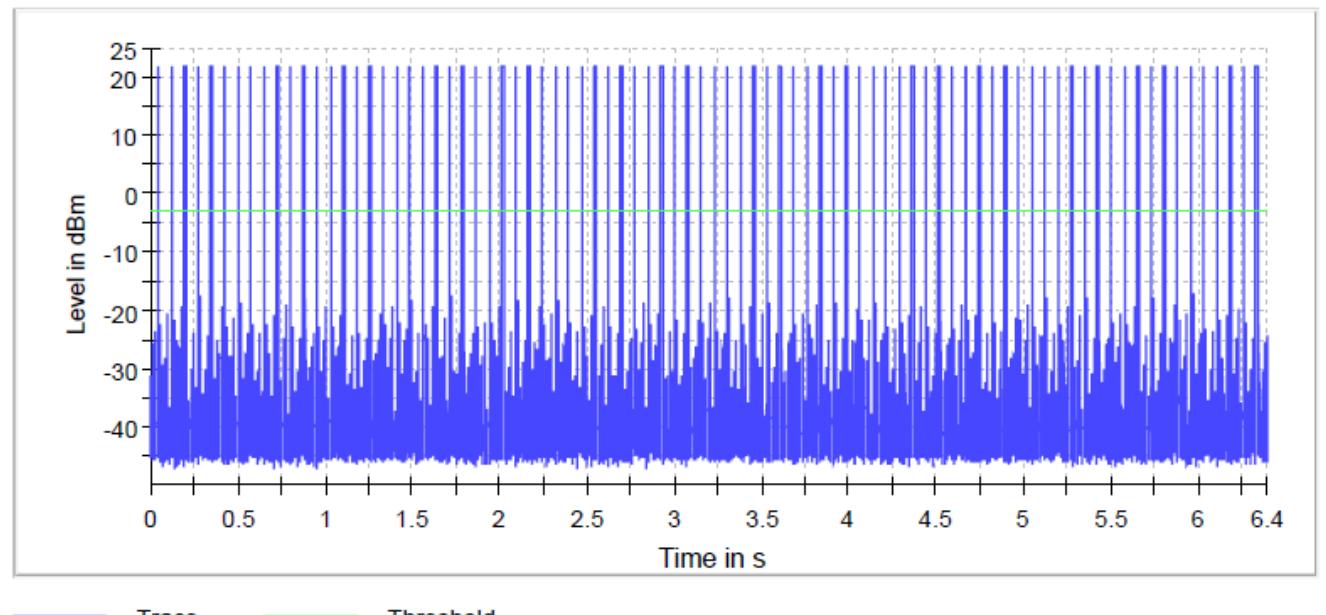
DUT Frequency (MHz)	Min (ms)	Max (ms)	Mean (ms)
2405.000000	75.863	75.882	75.868
2440.000000	75.863	75.876	75.868
2480.000000	75.864	75.882	75.868

Table 33: Transmit Time per Hop

DUT Frequency (MHz)	Min (ms)	Max (ms)	Limit Max for Max (ms)	Limit Min for Max (ms)	Mean (ms)
2405.000000	4.261	4.262	400.000	0.000	4.261
2440.000000	4.261	4.262	400.000	0.000	4.261
2480.000000	4.260	4.261	400.000	0.000	4.261

Table 34: Dwell time

DUT Frequency (MHz)	Min (ms)	Max (ms)	Mean (ms)
2405.000000	4.261	4.262	4.261
2440.000000	4.261	4.262	4.261
2480.000000	4.260	4.261	4.261

Average Time of Occupancy of Hopping Frequency**Figure 35: Time of channel occupancy LOW channel****Figure 36: Time of channel occupancy MID channel**

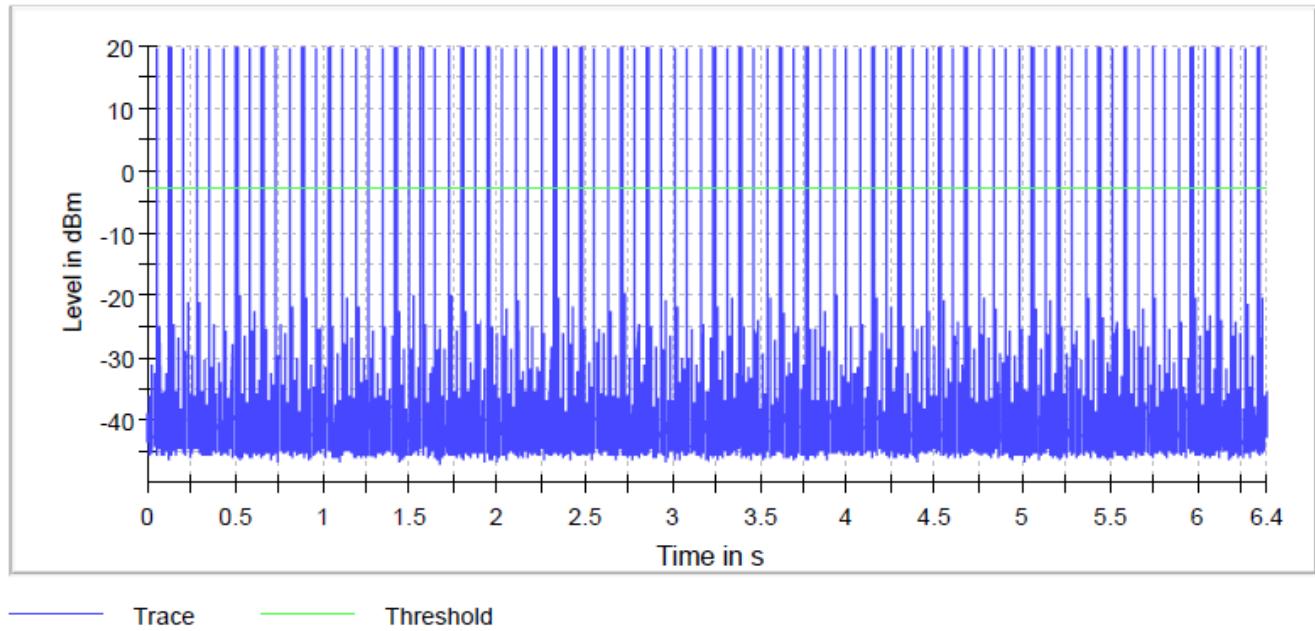
Average Time of Occupancy of Hopping Frequency

Figure 37: Time of channel occupancy HIGH channel

Table 35: Measurement settings, Time of channel occupancy

Setting	Instrument Value	Target Value
Span	ZeroSpan	ZeroSpan
RBW	2.000 MHz	~ 2.500 MHz
VBW	5.000 MHz	~ 6.000 MHz
SweepPoints	30001	~ 30001
Sweeptime	6.400 s	6.400 s
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	0.000 dB	0.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	1	1
Filter	Channel	Channel
Trace Mode	Clear Write	Clear Write
Sweeptype	Sweep	AUTO
Preamp	off	off
Trigger	External	External
Trigger Offset	0.000 s	0.000 s
OSP settings		
Measurement Time	6.400 s	6.400 s
Tracepoints	6400000	6400000
Time resolution	1.000 µs	1.000 µs
Detector	RMS	RMS

6 dB Bandwidth of the Channel

Standard: ANSI C63.10 (2013)
Tested by: JAT
Date: 2 July 2019
Temperature: 23 ± 3 °C
Humidity: 20 - 60 % RH

FCC Rule: 15.247(a)(2)
RSS-247 5.2(a)

Results:

Table 36: 6 dB bandwidth test results

DUT Frequency (MHz)	6 dB BW [kHz]	Minimum limit [kHz]
2405.000000	1650	500
2440.000000	1750	
2480.000000	1750	

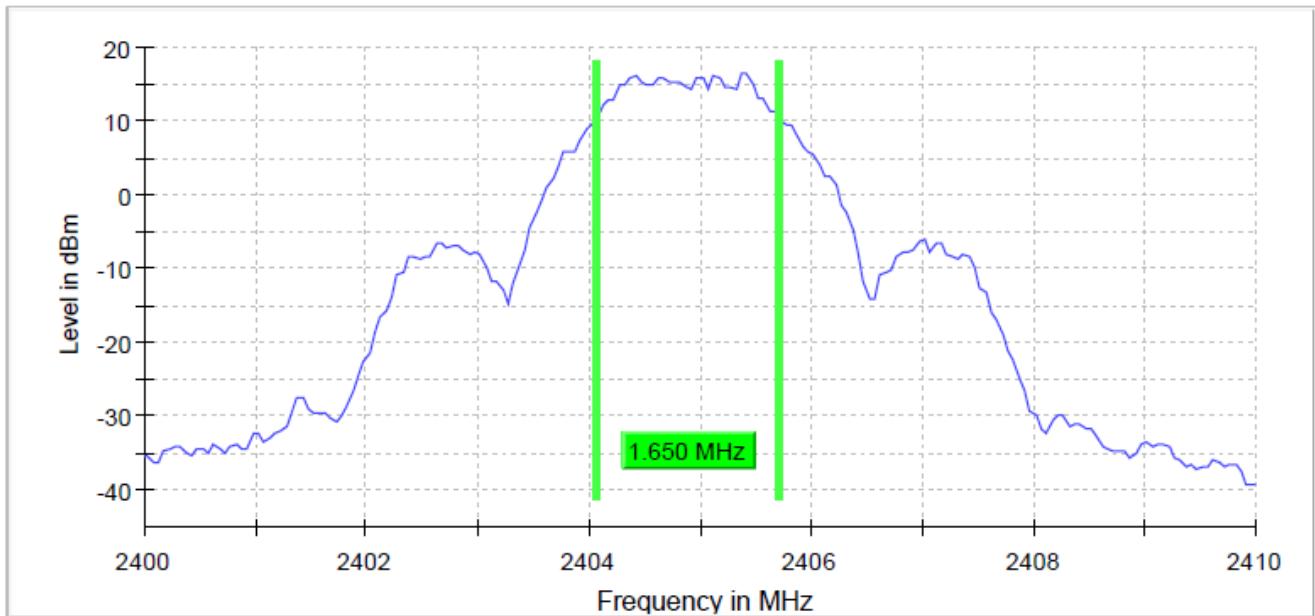


Figure 38: 6 dB bandwidth, channel LOW

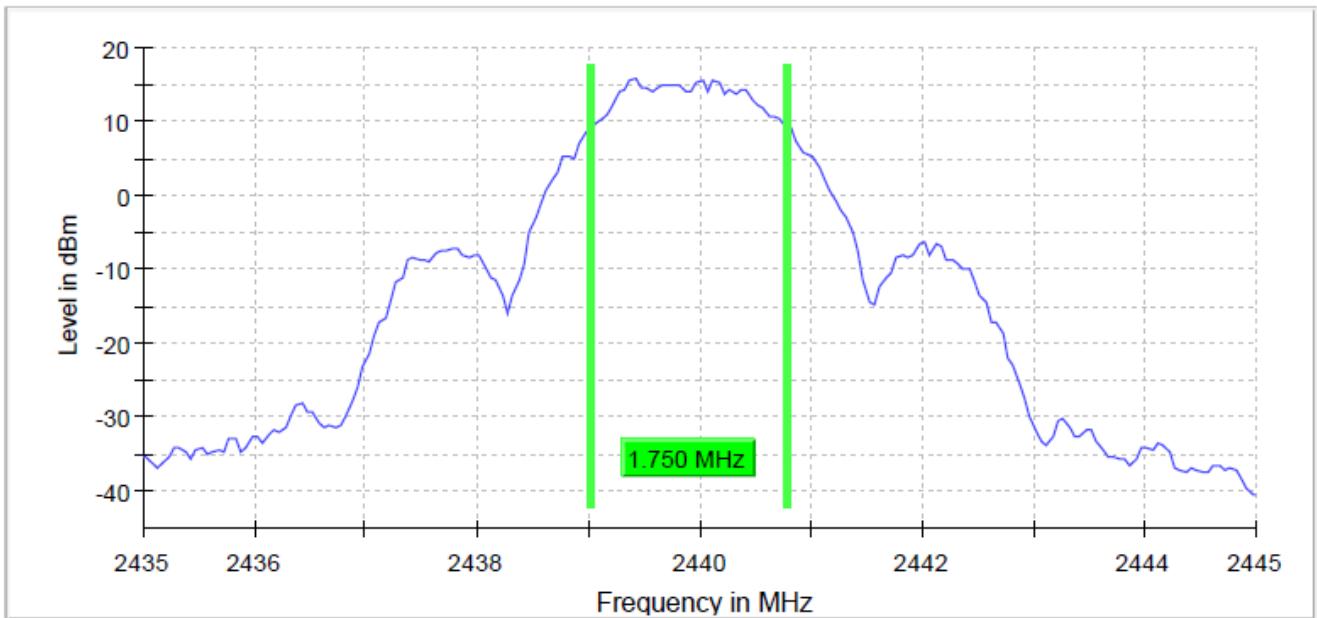


Figure 39: 6 dB bandwidth, channel MID

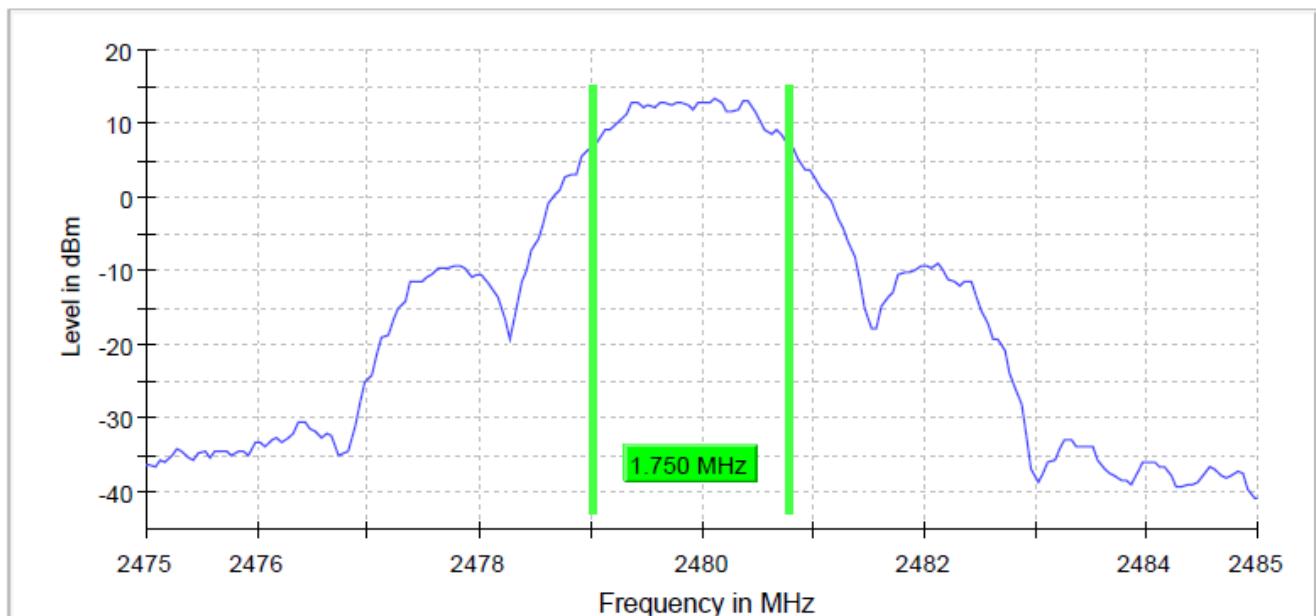


Figure 40: 6 dB bandwidth, channel HIGH

Table 37: Measurement settings, 6 dB bandwidth

Setting	Instrument Value	Target Value
Span	10.000 MHz	10.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	200	~ 200
Sweeptime	18.945 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	500	500
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	29 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.29 dB	0.50 dB


99% Occupied Bandwidth

Standard: RSS-GEN (2019)
Tested by: JAT
Date: 2 July 2019
Temperature: 23 ± 3 °C
Humidity: 20 - 60 % RH

RSS-GEN 6.6

Results**Table 38:** 99% occupied bandwidth test results

Channel	Limit	99 % BW [MHz]	Result
Low	-	2.60000	PASS
Mid	-	2.60000	PASS
High	-	2.57500	PASS

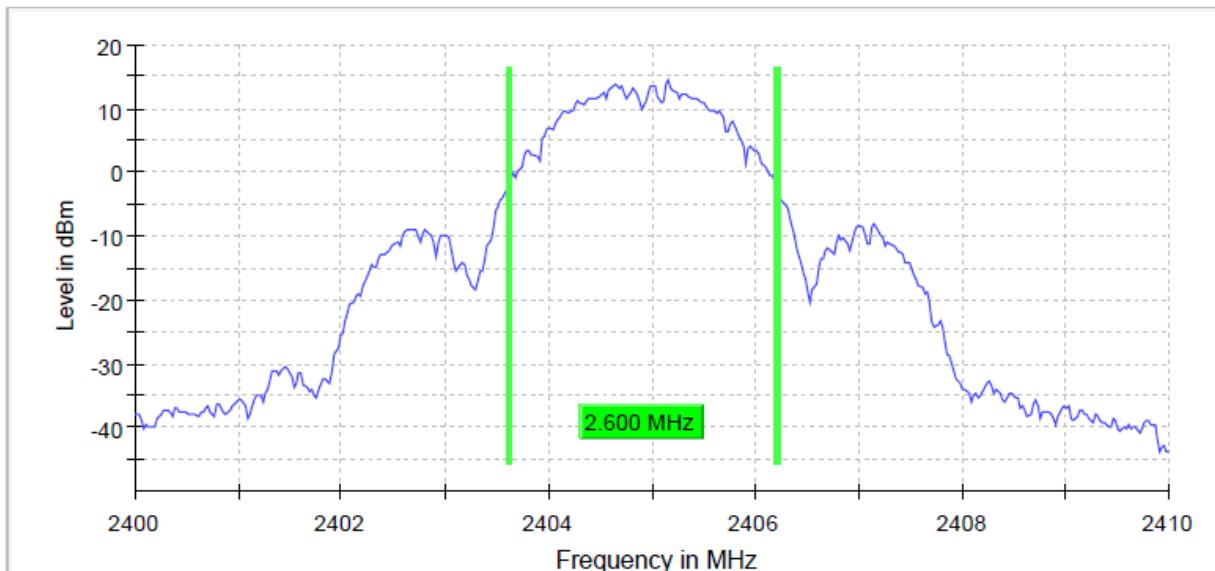**Figure 41:** 99% OBW, channel LOW

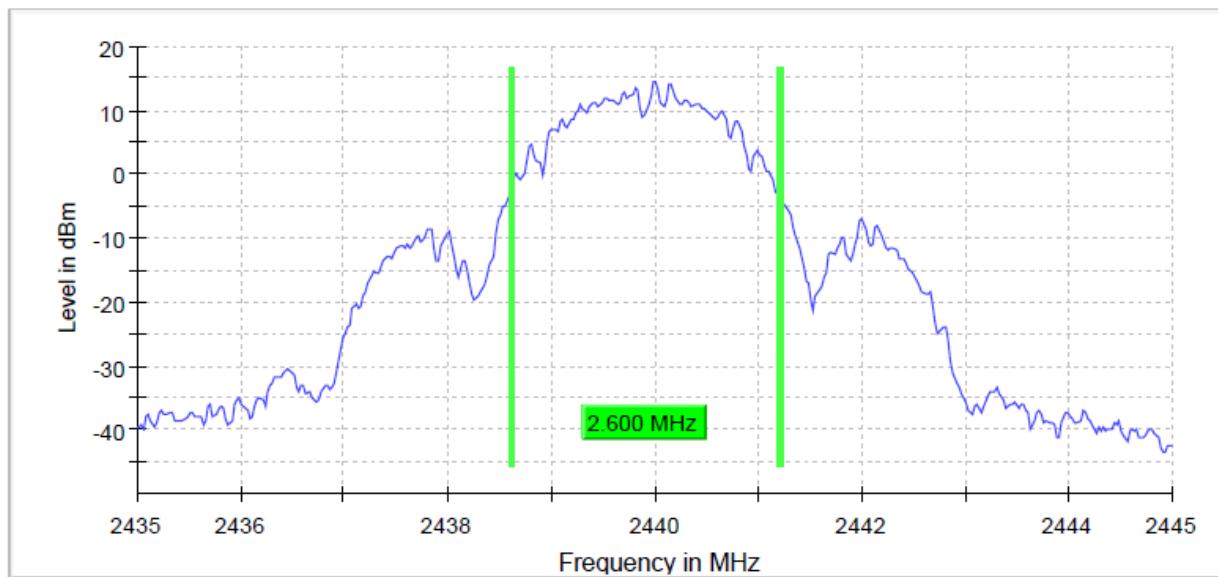
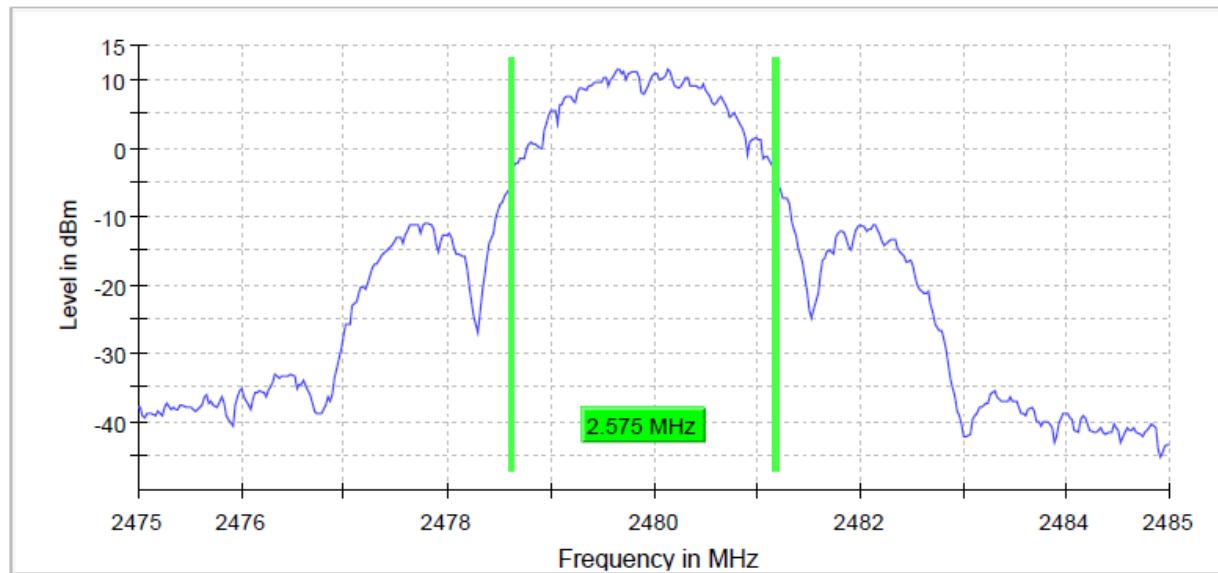
**Figure 42:** 99% OBW, channel MID**Figure 43:** 99% OBW, channel HIGH

Table 39: Measurements settings, 99% occupied bandwidth

Setting	Instrument Value	Target Value
Span	10.000 MHz	10.000 MHz
RBW	50.000 kHz	>= 50.000 kHz
VBW	200.000 kHz	>= 150.000 kHz
SweepPoints	400	~ 400
Sweeptime	37.930 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	500	500
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	28 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.21 dB	0.30 dB

Duty cycle correction factor, Transmit time in 100 ms**Duty cycle correction factor, Transmit time in 100 ms**

Standard:	ANSI C63.10	(2013)
Tested by:	JAT	
Date:	27 June 2019	
Temperature:	23 ± 3 °C	
Humidity:	20 - 60 % RH	

Spectrum analyzer with zero span was used to investigate spectrum.

15.35(c) Unless otherwise specified, e.g. § 15.255(b), when the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value. The exact method of calculating the average field strength shall be submitted with any application for certification or shall be retained in the measurement data file for equipment subject to notification or verification.

Results

Pulse period (T) = 75.87ms

Pulses/100ms=2

Length of one pulse = 4.26ms

Duty Cycle Correction Factor = $20 \cdot \log(T_{occ}/100) = 20 \cdot \log(2 \cdot 4.26/100) = -21.39 \text{ dB}$

TEST EQUIPMENT**RF-Test Equipment**

Equipment	Manufacturer	Type	Inv or serial	Prev Calib	Next Calib
ANTENNA	A.H. SYSTEMS	SAS-200/518	inv:7873	-	-
SPECTRUM ANALYZER	AGILENT	E7405A	inv:9746	2018-01-08	2020-01-08
RF PREAMPLIFIER	CIAO	CA118-3123	inv:10278	2018-11-26	2019-11-26
RF PREAMPLIFIER	CIAO	CA1840-5019	inv:10593	2018-09-12	2019-09-12
TEMPERATURE/ HUMIDITY METER	DAVIS	VantagePro	inv:5296	2018-09-18	2019-09-18
POWER SUPPLY	DELTA	SM 130-25D	inv:10406	-	-
TEMPERATURE/ HUMIDITY SENSOR	EDS	OW-ENV-TH	inv:10517	2018-11-13	2019-11-13
TEMPERATURE/ HUMIDITY SENSOR	EDS	OW-ENV-TH	inv:10516	2018-11-13	2019-11-13
ANTENNA	EMCO	3117, 1-18GHz	inv:7293	2018-03-14	2020-03-14
ANTENNA	ETS LINDGREN	3160-10, 26.5-40GHz	inv:9151	2018-08-09	2019-08-09
ATTENUATOR	INMET	10 dB, DC-40 GHz	inv:10347	2019-04-01	2021-04-01
TURNTABLE	MATURO	DS430 UPGRADED	inv:10182	-	-
MAST & TURNTABLE CONTROLLER	MATURO	NCD	inv:10183	-	-
ANTENNA MAST	MATURO	TAM 4.0E	inv:10181	-	-
TEST SOFTWARE	ROHDE & SCHWARZ	EMC-32	-	-	-
EMI TEST RECEIVER	ROHDE & SCHWARZ	ESW26	inv:10679	2019-06-28	2020-06-27
SPECTRUM ANALYZER	ROHDE & SCHWARZ	FSV40	inv:10881	2019-02-07	2021-02-07
ANTENNA	ROHDE & SCHWARZ	HFH2-Z2 , 335.4711.52	inv:8013	2018-10-30	2020-10-30
OSP BASE UNIT	ROHDE & SCHWARZ	OSP120	inv:10882	2019-02-28	2021-02-28
OSP-B157W 8 PORT	ROHDE & SCHWARZ	OSP-B157W8	inv:10883	2019-02-06	2021-02-06
OSP-B157WX	ROHDE & SCHWARZ	OSP-B157WX	inv:10884	2019-02-13	2021-02-13
RF SIGNAL GENERATOR	ROHDE & SCHWARZ	SMB100A	inv:9288	2017-02-10	2020-02-10
VECTOR SIGNAL GENERATOR	ROHDE & SCHWARZ	SMBV100A	inv:9290	2019-06-27	2022-06-27
ANTENNA	SCHWARZBECK	VULB 9168, 30-2000MHz	inv:8911	2018-10-25	2020-10-25
POWER SUPPLY	THANDAR	PL330TP	inv:9787	-	-
POWER SUPPLY	THANDAR	TS3021S	sn:099610	-	-
FILTER	WAINWRIGHT	HP, WHKX4.0/18G-10SS	inv:10403	2019-04-01	2021-04-01

Conducted Emissions

Equipment	Manufacturer	Type	Inv or serial	Prev Calib	Next Calib
POWER SUPPLY	CALIFORNIA INSTR.	5001i-400	inv:9488	-	-
TEST SOFTWARE	ROHDE & SCHWARZ	EMC-32	-	-	-
LISN	ROHDE & SCHWARZ	ENV216	inv:9611	2019-03-01	2020-03-01
EMI TEST RECEIVER	ROHDE & SCHWARZ	ESW26	inv:10679	2019-06-28	2020-06-27