

# FCC Test Report

**FCC ID** : N5V925-00000640  
**Equipment** : FCAM  
**Brand Name** : PowerFleet  
**Model Name** : LV710  
**Applicant** : I.D. Systems, Inc.  
123 Tice Boulevard, Suite 101, Woodcliff Lake, NJ  
07677 USA  
**Manufacturer** : RoyalTek Company Ltd.  
5f,No.188 Wen Hwa 2nd Rd.,Kuei Shan, Tao Yuan  
33383,Taiwan,R.O.C  
**Standard** : 47 CFR FCC Part 15.247

The product was received on May. 30, 2019, and testing was started from Jun. 13, 2019 and completed on Jun. 24, 2019. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.



Approved by: Allen Lin

**SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory**

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



# Table of Contents

**HISTORY OF THIS TEST REPORT .....3**

**SUMMARY OF TEST RESULT .....4**

**1 GENERAL DESCRIPTION .....5**

1.1 Information.....5

1.2 Testing Applied Standards .....6

1.3 Testing Location Information .....6

1.4 Measurement Uncertainty .....6

**2 TEST CONFIGURATION OF EUT.....7**

2.1 Test Condition .....7

2.2 Test Channel Mode .....7

2.3 The Worst Case Measurement Configuration.....7

2.4 Accessories and Support Equipment .....8

2.5 Test Setup Diagram .....8

**3 TRANSMITTER TEST RESULT .....9**

3.1 AC Power-line Conducted Emissions .....9

3.2 DTS Bandwidth.....11

3.3 Maximum Conducted Output Power .....12

3.4 Power Spectral Density .....14

3.5 Emissions in Non-restricted Frequency Bands .....15

3.6 Emissions in Restricted Frequency Bands.....16

**4 TEST EQUIPMENT AND CALIBRATION DATA.....20**

**APPENDIX A. TEST RESULTS OF DTS BANDWIDTH**

**APPENDIX B. TEST RESULTS OF MAXIMUM CONDUCTED OUTPUT POWER**

**APPENDIX C. TEST RESULTS OF POWER SPECTRAL DENSITY**

**APPENDIX D. TEST RESULTS OF EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS**

**APPENDIX E. TEST RESULTS OF EMISSIONS IN RESTRICTED FREQUENCY BANDS**

**APPENDIX F. TEST PHOTOS**

**PHOTOGRAPHS OF EUT V01**





### Summary of Test Result

Report Clause	Ref.Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.207	AC Power-line Conducted Emissions	Not Required	-
3.2	15.247(a)	DTS Bandwidth	PASS	-
3.3	15.247(b)	Maximum Conducted Output Power	PASS	-
3.4	15.247(e)	Power Spectral Density	PASS	-
3.5	15.247(d)	Emissions in Non-restricted Frequency Bands	PASS	-
3.6	15.247(d)	Emissions in Restricted Frequency Bands	PASS	-

<b>Declaration of Conformity:</b>
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.
<b>Comments and explanations:</b>
None

Reviewed by: Jackson Tsai

Report Producer: Kate Lo

# 1 General Description

## 1.1 Information

### 1.1.1 RF General Information

Frequency Range (MHz)	Bluetooth Mode	Ch. Frequency (MHz)	Channel Number
2400-2483.5	LE	2402-2480	0-39 [40]

Band	Mode	BWch (MHz)	Nant
2.4-2.4835GHz	BT-LE(1Mbps)	1.0	1TX

Note:

- Bluetooth LE uses a GFSK (1Mbps) modulation for DSSS.
- BWch is the nominal channel bandwidth.

### 1.1.2 Antenna Information

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	-	ANT-H2U34W1H1Z0400	Chip antenna	I-PEX	1.5

For BT function:

For IEEE 802.15.1 Bluetooth mode (1TX/1RX)

Ant. 1 (port 1) could transmit/receive.

### 1.1.3 EUT Information

Operational Condition	
EUT Power Type	From Battery
EUT Function	<input checked="" type="checkbox"/> Point-to-multipoint <input type="checkbox"/> Point-to-point
Type of EUT	
<input checked="" type="checkbox"/>	Stand-alone
<input type="checkbox"/>	Combined (EUT where the radio part is fully integrated within another device)
	Combined Equipment - Brand Name / Model No.: ...
<input type="checkbox"/>	Plug-in radio (EUT intended for a variety of host systems)
	Host System - Brand Name / Model No.: ...
<input type="checkbox"/>	Other:

### 1.1.4 Mode Test Duty Cycle

Mode	DC	DCF(dB)	T(s)	VBW(Hz) ≥ 1/T
BT-LE(1Mbps)	1	0	n/a (DC>=0.98)	n/a (DC>=0.98)

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.

## 1.2 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ◆ 47 CFR FCC Part 15
- ◆ ANSI C63.10-2013
- ◆ KDB 558074 D01 v05r02
- ◆ KDB 414788 D01 v01r01

## 1.3 Testing Location Information

Testing Location				
<input checked="" type="checkbox"/>	HWA YA	ADD : No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)		
		TEL : 886-3-327-3456	FAX : 886-3-327-0973	
Test site Designation No. TW1190 with FCC.				
<input type="checkbox"/>	JHUBEI	ADD : No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County, Taiwan (R.O.C.)		
		TEL : 886-3-656-9065	FAX : 886-3-656-9085	
Test site Designation No. TW0006 with FCC.				

Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
RF Conducted	TH01-HY	Barry	23.6~25.3°C / 66~72%	24/Jun/2019
Radiated	03CH03-HY	Justin	18.6~23.8°C / 51.2~55.7%	13/Jun/2019

## 1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.54 dB	Confidence levels of 95%
Radiated Emission (9kHz ~ 30MHz)	1.6 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	4.3 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.9 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.3 dB	Confidence levels of 95%
Temperature	0.7 °C	Confidence levels of 95%
Humidity	4 %	Confidence levels of 95%

## 2 Test Configuration of EUT

### 2.1 Test Condition

RF Conducted	Abbreviation	Remark
TnomVnom	Tnom	20°C
-	Vnom	3.6V




### 2.2 Test Channel Mode

Test Software	DoS
---------------	-----

Mode	Power Setting
BT-LE(1Mbps)	-
2402MHz	8
2440MHz	8
2480MHz	8

### 2.3 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	DTS Bandwidth Maximum Conducted Output Power Power Spectral Density Emissions in Non-restricted Frequency Bands
Test Condition	Conducted measurement at transmit chains

The Worst Case Mode for Following Conformance Tests			
Tests Item	Emissions in Restricted Frequency Bands		
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.		
Operating Mode < 1GHz	CTX		
1	Battery mode		
Operating Mode > 1GHz	CTX		
Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane
			
Worst Planes of EUT			V

## 2.4 Accessories and Support Equipment


Accessories				
Battery	<b>Brand Name</b>	EVE	<b>Model Name</b>	ES-341550
	<b>Power Rating</b>	3.6Vdc	<b>Type</b>	Li-ion, Y

Reminder: Regarding to more detail and other information, please refer to user manual.

Support Equipment - RF Conducted				
No.	Equipment	Brand Name	Model Name	FCC ID
1	Notebook	DELL	E5410	DoC
2	Adapter for NB	DELL	HA65NM130	DoC
3	Fixture	-	-	-

Note: Support equipment No.3 was provided by customer.

## 2.5 Test Setup Diagram

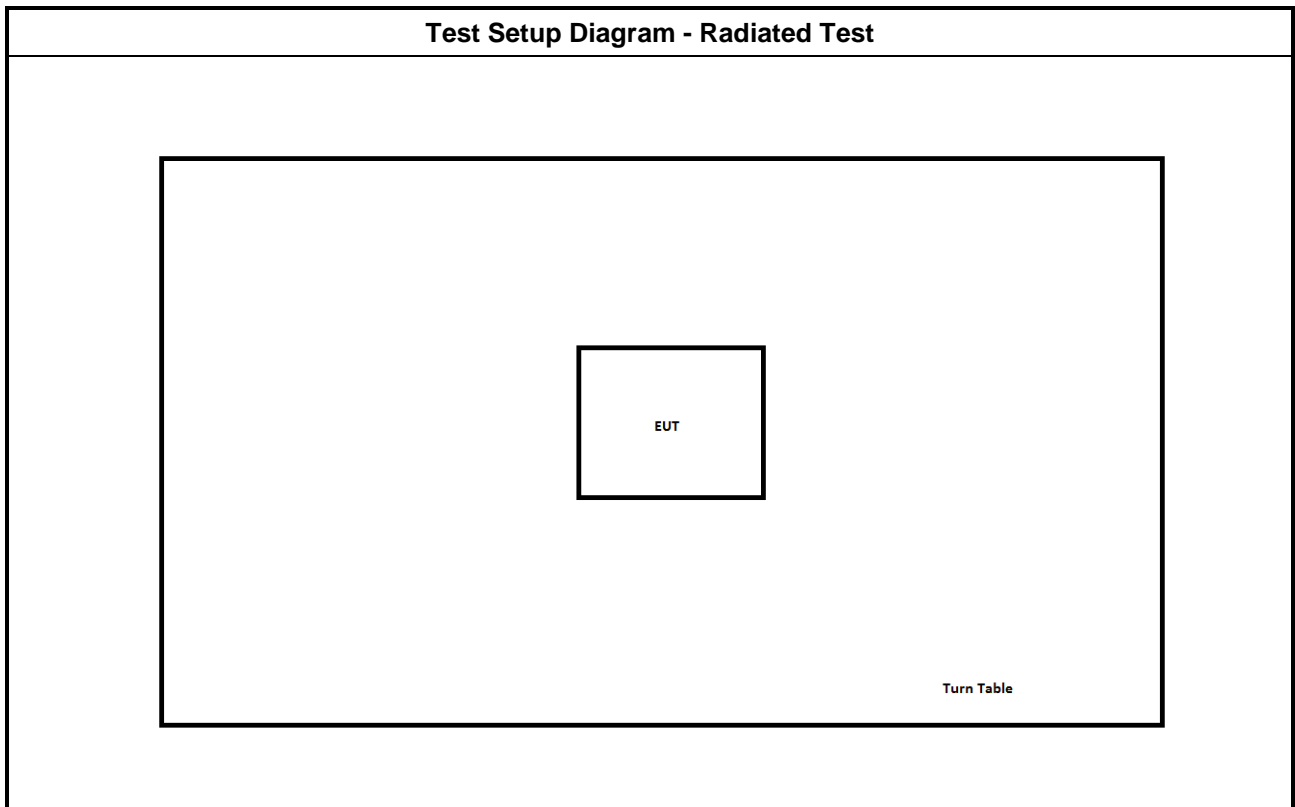



### 3 Transmitter Test Result

#### 3.1 AC Power-line Conducted Emissions

##### 3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: \* Decreases with the logarithm of the frequency.

##### 3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

##### 3.1.3 Test Procedures

Test Method
<ul style="list-style-type: none"> <li>▪ Refer as ANSI C63.10-2013, clause 6.2 foray power-line conducted emissions.</li> </ul>



### 3.2 DTS Bandwidth

#### 3.2.1 6dB Bandwidth Limit

6dB Bandwidth Limit
<b>Systems using digital modulation techniques:</b>
<ul style="list-style-type: none"> <li>▪ 6 dB bandwidth <math>\geq</math> 500 kHz.</li> </ul>


#### 3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.2.3 Test Procedures

Test Method
<ul style="list-style-type: none"> <li>▪ For the emission bandwidth shall be measured using one of the options below:</li> </ul>
<input checked="" type="checkbox"/> Refer as KDB 558074, clause 8.2 (11.8 of ANSI C63.10) DTS bandwidth measurement.
<input type="checkbox"/> Refer as RSS-Gen, clause 6.7 for occupied bandwidth testing.
<input type="checkbox"/> Refer as ANSI C63.10, clause 6.9.3 for occupied bandwidth testing.

#### 3.2.4 Test Setup

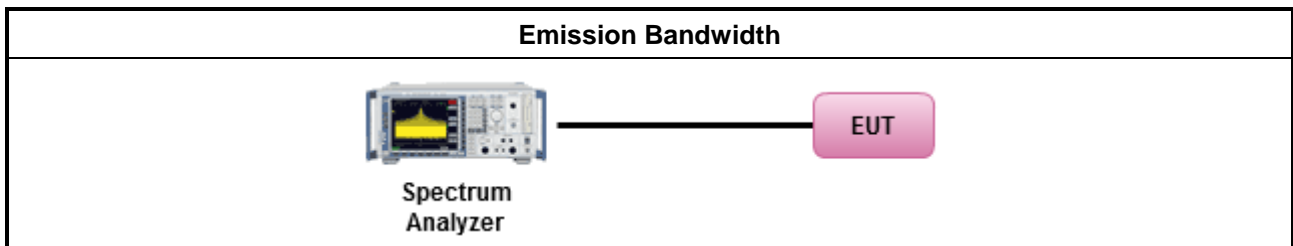

#### 3.2.5 Test Result of Emission Bandwidth

Refer as Appendix A

### 3.3 Maximum Conducted Output Power

#### 3.3.1 Maximum Conducted Output Power Limit

Maximum Conducted Output Power Limit	
	<ul style="list-style-type: none"> <li>▪ If <math>G_{TX} \leq 6</math> dBi, then <math>P_{Out} \leq 30</math> dBm (1 W)</li> </ul>
	<ul style="list-style-type: none"> <li>▪ Point-to-multipoint systems (P2M): If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 30 - (G_{TX} - 6)</math> dBm</li> </ul>
	<ul style="list-style-type: none"> <li>▪ Point-to-point systems (P2P): If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 30 - (G_{TX} - 6)/3</math> dBm</li> </ul>
	<ul style="list-style-type: none"> <li>▪ Smart antenna system (SAS):</li> </ul>
	<ul style="list-style-type: none"> <li>- Single beam: If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 30 - (G_{TX} - 6)/3</math> dBm</li> </ul>
	<ul style="list-style-type: none"> <li>- Overlap beam: If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 30 - (G_{TX} - 6)/3</math> dBm</li> </ul>
	<ul style="list-style-type: none"> <li>- Aggregate power on all beams: If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 30 - (G_{TX} - 6)/3 + 8</math> dB dBm</li> </ul>
<b>e.i.r.p. Power Limit:</b>	
	<ul style="list-style-type: none"> <li>▪ 2400-2483.5 MHz Band</li> </ul>
	<ul style="list-style-type: none"> <li>▪ Point-to-multipoint systems (P2M): <math>P_{eirp} \leq 36</math> dBm (4 W)</li> </ul>
	<ul style="list-style-type: none"> <li>▪ Point-to-point systems (P2P): <math>P_{eirp} \leq \text{MAX}(36, [P_{Out} + G_{TX}])</math> dBm</li> </ul>
	<ul style="list-style-type: none"> <li>▪ Smart antenna system (SAS)</li> </ul>
	<ul style="list-style-type: none"> <li>- Single beam: <math>P_{eirp} \leq \text{MAX}(36, P_{Out} + G_{TX})</math> dBm</li> </ul>
	<ul style="list-style-type: none"> <li>- Overlap beam: <math>P_{eirp} \leq \text{MAX}(36, P_{Out} + G_{TX})</math> dBm</li> </ul>
	<ul style="list-style-type: none"> <li>- Aggregate power on all beams: <math>P_{eirp} \leq \text{MAX}(36, [P_{Out} + G_{TX} + 8])</math> dBm</li> </ul>
$P_{Out}$ = maximum peak conducted output power or maximum conducted output power in dBm, $G_{TX}$ = the maximum transmitting antenna directional gain in dBi.	


#### 3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

### 3.3.3 Test Procedures

Test Method	
<ul style="list-style-type: none"> <li>▪ Maximum Peak Conducted Output Power</li> </ul>	
<input type="checkbox"/>	Refer as KDB 558074, clause 8.3.1.1 (11.9.1.1 of ANSI C63.10) RBW ≥ EBW method.
<input type="checkbox"/>	Refer as KDB 558074, clause 8.3.1.2 (11.9.1.2 of ANSI C63.10) integrated band power method.
<input type="checkbox"/>	Refer as KDB 558074, clause 8.3.1.3 (11.9.1.3 of ANSI C63.10) peak power meter.
<ul style="list-style-type: none"> <li>▪ Maximum Average Conducted Output Power</li> </ul>	
<input type="checkbox"/>	Refer as KDB 558074, clause 8.3.2.2 (11.9.2.2 of ANSI C63.10) using a spectrum analyzer.
<input checked="" type="checkbox"/>	Refer as KDB 558074, clause 8.3.2.3 (11.9.2.3 of ANSI C63.10) using a power meter.
<ul style="list-style-type: none"> <li>▪ For conducted measurement.</li> </ul>	
<ul style="list-style-type: none"> <li>▪ If the EUT supports multiple transmit chains using options given below: Refer as KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.</li> </ul>	
<ul style="list-style-type: none"> <li>▪ If multiple transmit chains, EIRP calculation could be following as methods:  <math>P_{total} = P_1 + P_2 + \dots + P_n</math>                      (calculated in linear unit [mW] and transfer to log unit [dBm])  <math>EIRP_{total} = P_{total} + DG</math> </li> </ul>	

### 3.3.4 Test Setup

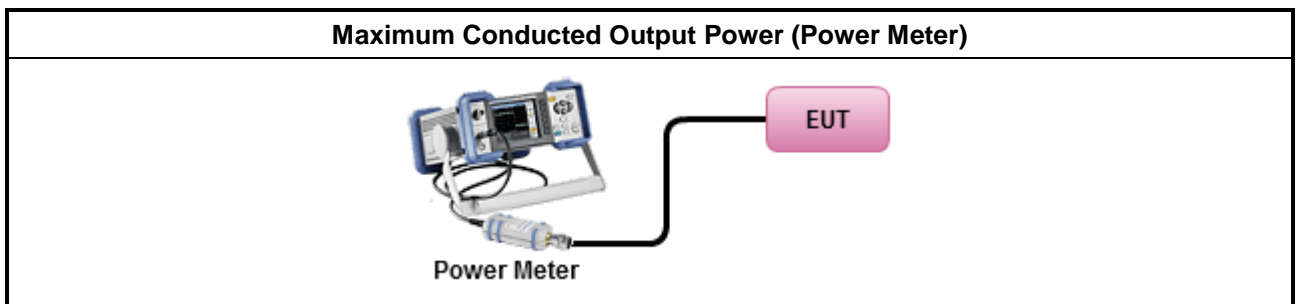

### 3.3.5 Test Result of Maximum Conducted Output Power

Refer as Appendix B

### 3.4 Power Spectral Density

#### 3.4.1 Power Spectral Density Limit

Power Spectral Density Limit
<ul style="list-style-type: none"> <li>Power Spectral Density (PSD) ≤ 8 dBm/3kHz</li> </ul>


#### 3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.4.3 Test Procedures

Test Method
<ul style="list-style-type: none"> <li>Peak power spectral density procedures that the same method as used to determine the conducted output power. If maximum peak conducted output power was measured to demonstrate compliance to the output power limit, then the peak PSD procedure below (Method PKPSD) shall be used. If maximum conducted output power was measured to demonstrate compliance to the output power limit, then one of the average PSD procedures shall be used, as applicable based on the following criteria (the peak PSD procedure is also an acceptable option).</li> </ul>
<input checked="" type="checkbox"/> Refer as KDB 558074, clause 8.4 (11.10 of ANSI C63.10) Method PKPSD.
<ul style="list-style-type: none"> <li>For conducted measurement.             <ul style="list-style-type: none"> <li>If The EUT supports multiple transmit chains using options given below:                 <ul style="list-style-type: none"> <li>Measure and sum the spectra across the outputs. Refer as KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.</li> </ul> </li> </ul> </li> </ul>

#### 3.4.4 Test Setup

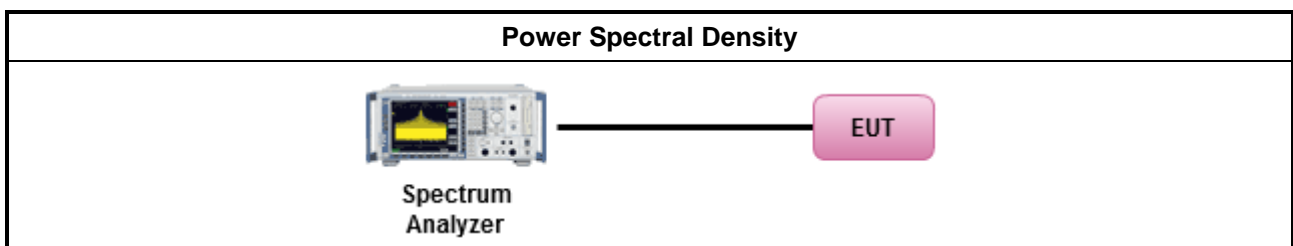

#### 3.4.5 Test Result of Power Spectral Density

Refer as Appendix C

### 3.5 Emissions in Non-restricted Frequency Bands

#### 3.5.1 Emissions in Non-restricted Frequency Bands Limit

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dB)
Peak output power procedure	20
Average output power procedure	30

Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak level.

Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average level.


#### 3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.5.3 Test Procedures

Test Method
<ul style="list-style-type: none"> <li>Refer as KDB 558074, clause 8.5 (11.11 of ANSI C63.10) for non-restricted frequency bands.</li> </ul>

#### 3.5.4 Test Setup

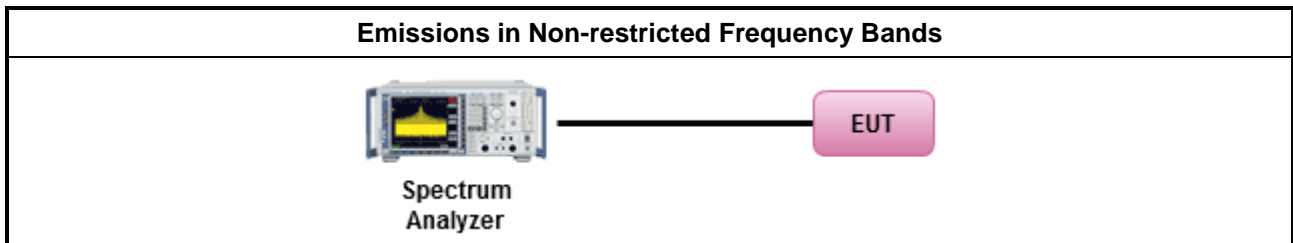

#### 3.5.5 Test Result of Emissions in Non-restricted Frequency Bands

Refer as Appendix D

### 3.6 Emissions in Restricted Frequency Bands

#### 3.6.1 Emissions in Restricted Frequency Bands Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB / decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m.

#### 3.6.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.




### 3.6.3 Test Procedures

Test Method	
	<ul style="list-style-type: none"> <li>▪ The average emission levels shall be measured in [duty cycle <math>\geq</math> 98 or duty factor].</li> </ul>
	<ul style="list-style-type: none"> <li>▪ Refer as ANSI C63.10, clause 6.10.3 band-edge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.</li> </ul>
	<ul style="list-style-type: none"> <li>▪ For the transmitter unwanted emissions shall be measured using following options below:               <ul style="list-style-type: none"> <li>▪ Refer as KDB 558074, clause 8.6 (11.12 of ANSI C63.10) for restricted frequency bands.</li> </ul> </li> </ul>
	<ul style="list-style-type: none"> <li>▪ For the transmitter band-edge emissions shall be measured using following options below:               <ul style="list-style-type: none"> <li>▪ Refer as KDB 558074 clause 8.7.1, When the performing peak or average radiated measurements, emissions within 2 MHz of the authorized band edge may be measured using the marker-delta method described below.</li> <li>▪ Refer as KDB 558074, clause 8.7.2 (6.10.6 of ANSI C63.10) for marker-delta method for band-edge measurements.</li> <li>▪ Refer as KDB 558074, clause 8.7.3 for narrower resolution bandwidth (100kHz) using the band power and summing the spectral levels.</li> </ul> </li> </ul>
	<ul style="list-style-type: none"> <li>▪ Use the following spectrum analyzer settings:               <ul style="list-style-type: none"> <li>▪ Set RBW=100 kHz for <math>f &lt; 1</math> GHz; VBW=3 * RBW; Sweep = auto; Detector function = peak; Trace = max hold.</li> <li>▪ Set RBW = 1 MHz, VBW= 3MHz for <math>f \geq 1</math> GHz for peak measurement. For average measurement, refer as 1.1.4.</li> </ul> </li> </ul>
	<ul style="list-style-type: none"> <li>▪ KDB 414788 Open-Field Test Sites and Chamber Correlation Justification.               <ul style="list-style-type: none"> <li>▪ Based on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in regulations; however, an attempt should be made to avoid making measurements in the near field.</li> <li>▪ Open-field site and chamber correlation testing had been performed and chamber measured test result is the worst case test result.</li> </ul> </li> </ul>

### 3.6.4 Test Setup

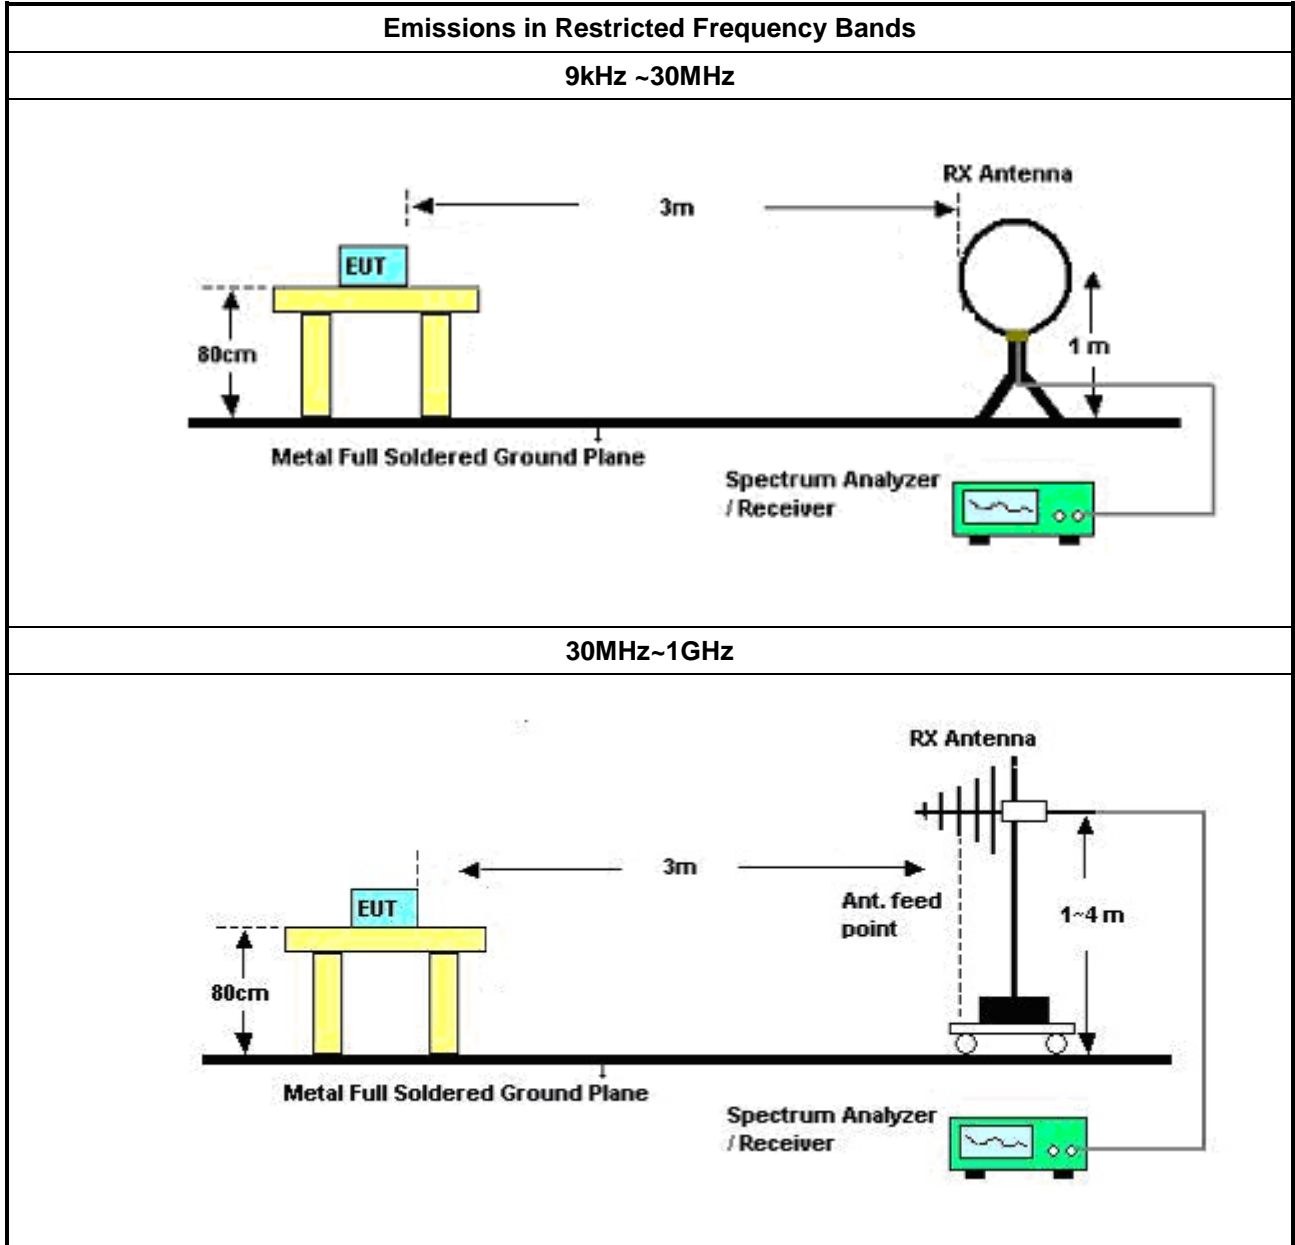

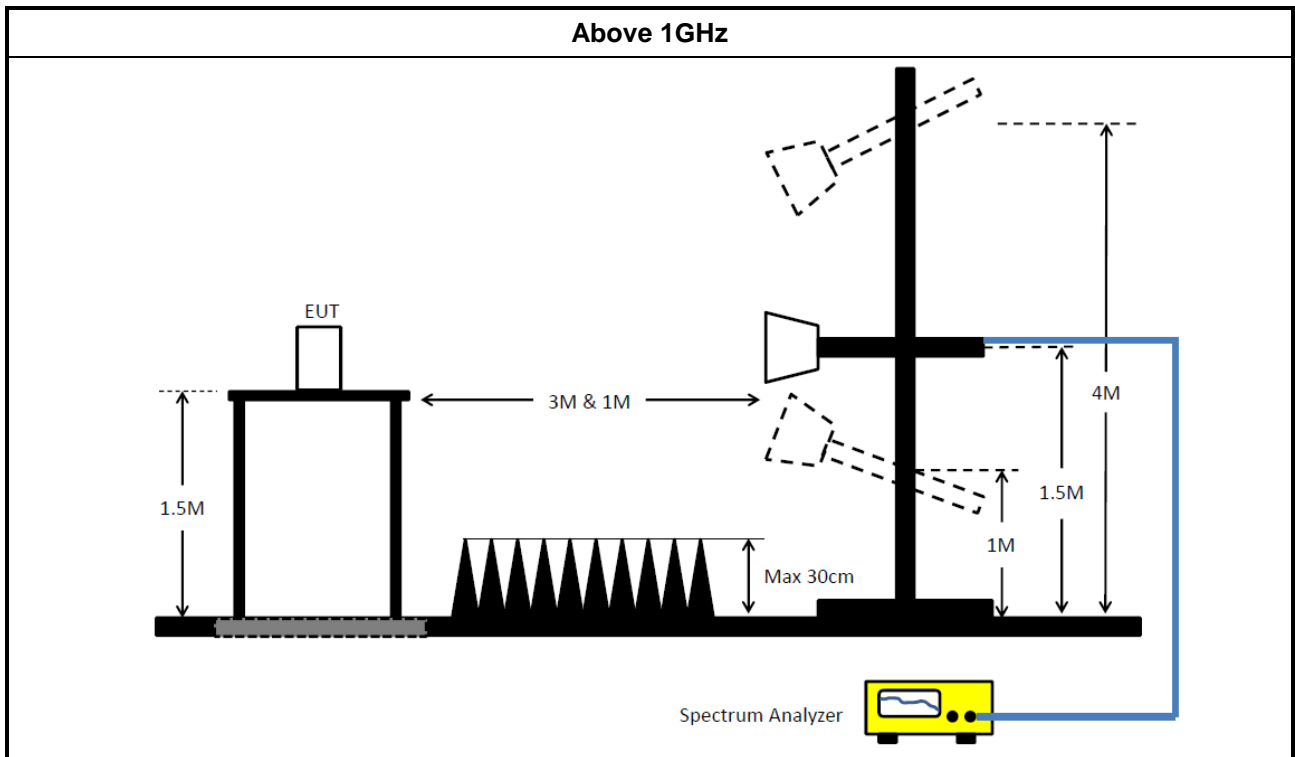

### 3.6.5 Test Result of Emissions in Restricted Frequency Bands (Below 30MHz)

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

### 3.6.6 Test Result of Emissions in Restricted Frequency Bands

Refer as Appendix E



## 4 Test Equipment and Calibration Data

### Instrument for Radiated Test

Instrument	Manufacturer	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30MHz~1GHz 3m	30/Oct/2018	29/Oct/2019
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	1GHz~18GHz 3m	30/Oct/2018	29/Oct/2019
Amplifier	HP	8447D	2944A08033	10kHz~1.3GHz	22/Apr/2019	21/Apr/2020
EMI Test Receiver	R&S	ESR3	102052	9kHz~3.6GHz	09/Apr/2019	08/Apr/2020
Bilog Antenna with 5dB Pad	ETS	3142B & MTJ6102-05	00022055	26MHz~3GHz	19/Nov/2018	18/Nov/2019
Microwave System Pre-amplifier	KEYSIGHT	83017A	MY53270196	1GHz~26.5GHz	05/Sep/2018	04/Sep/2019
Signal Analyzer	R&S	FSV40	101500	10Hz~40GHz	18/Jul/2018	17/Jul/2019
RF Cable-R03m	Jye Bao	RG142	CB021	9kHz~1GHz	22/Mar/2019	21/Mar/2020
RF CABLE 6m	HUBER+SUHNER	SUOFLEX 104	SN 805801/4	1GHz~40GHz	21/Mar/2019	20/Mar/2020
RF CABLE 7m	HUBER+SUHNER	SUOFLEX 104	SN 805805/4	1GHz~40GHz	01/May/2019	30/Apr/2020
Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170339	18GHz~40GHz	19/Mar/2019	18/Mar/2020
Double Ridged Guide Horn Antenna	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1531	1GHz~18GHz	09/Mar/2019	08/Mar/2020
Pre-amplifier	MITEQ	TTA1840-35-HG	1864481	18GHz~40GHz	24/Aug/2018	23/Aug/2019

### Instrument for Conducted Test

Instrument	Manufacturer	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
Spectrum Analyzer	R&S	FSV 40	101013	10Hz~40GHz	13/Mar/2019	12/Mar/2020
Power Sensor	Anritsu	MA2411B	1339407	300MHz~40GHz	17/Nov/2018	16/Nov/2019
Power Meter	Anritsu	ML2495A	1517010	300MHz~40GHz	17/Nov/2018	16/Nov/2019
Cable 0.2m	HUBER	MY10710/4	RF Cable - 01	30MHz~18G	21/Mar/2019	20/Mar/2020
Cable 0.2m	HUBER	MY10711/4	RF Cable - 02	30MHz~18G	21/Mar/2019	20/Mar/2020
Cable 0.5m	HUBER	MY39470/4	RF Cable - 29	30MHz~18G	21/Mar/2019	20/Mar/2020
SMB100A Signal Generator	R&S	SMB100A03	181147	100kHz~40GHz	12/Nov/2018	10/Nov/2020



Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
BT-LE(1Mbps)	736.25k	1.063M	1M06F1D	723.75k	1.057M



**Max-N dB** = Maximum 6dB down bandwidth; **Max-OBW** = Maximum 99% occupied bandwidth;  
**Min-N dB** = Minimum 6dB down bandwidth; **Min-OBW** = Minimum 99% occupied bandwidth;




Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	500k	727.5k	1.063M
2440MHz	Pass	500k	736.25k	1.063M
2480MHz	Pass	500k	723.75k	1.057M

Port X-N dB = Port X 6dB down bandwidth; Port X-OBW = Port X 99% occupied bandwidth;

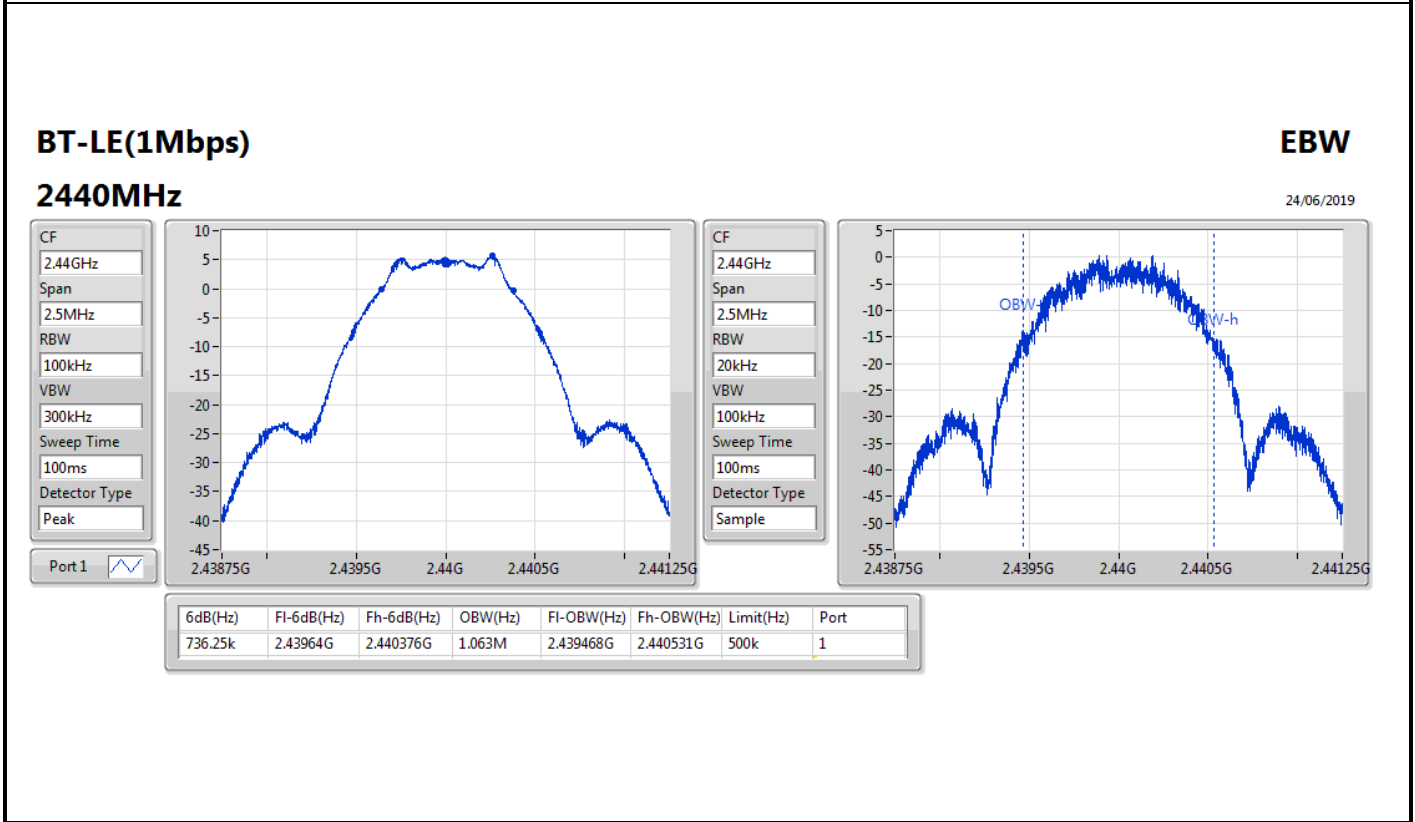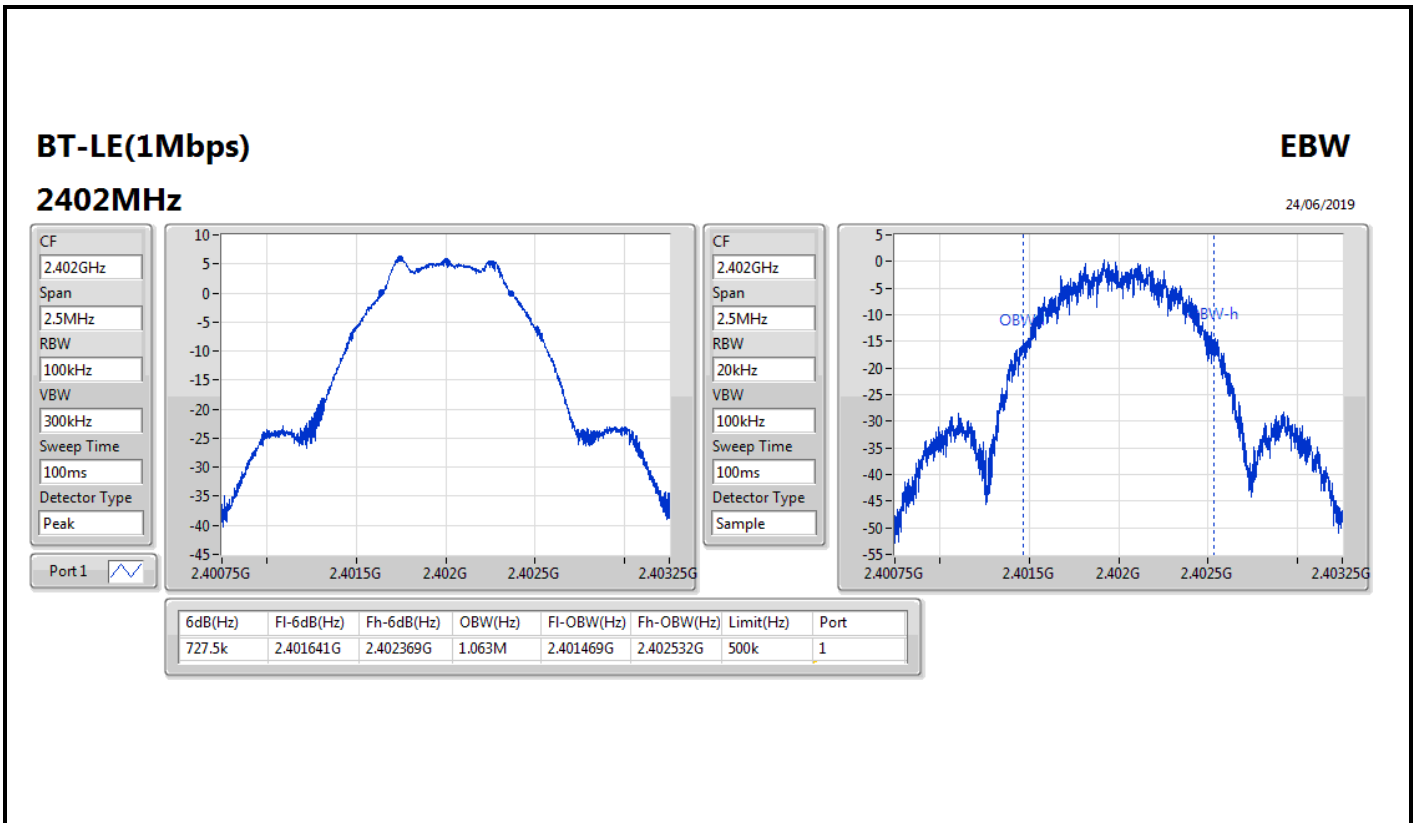

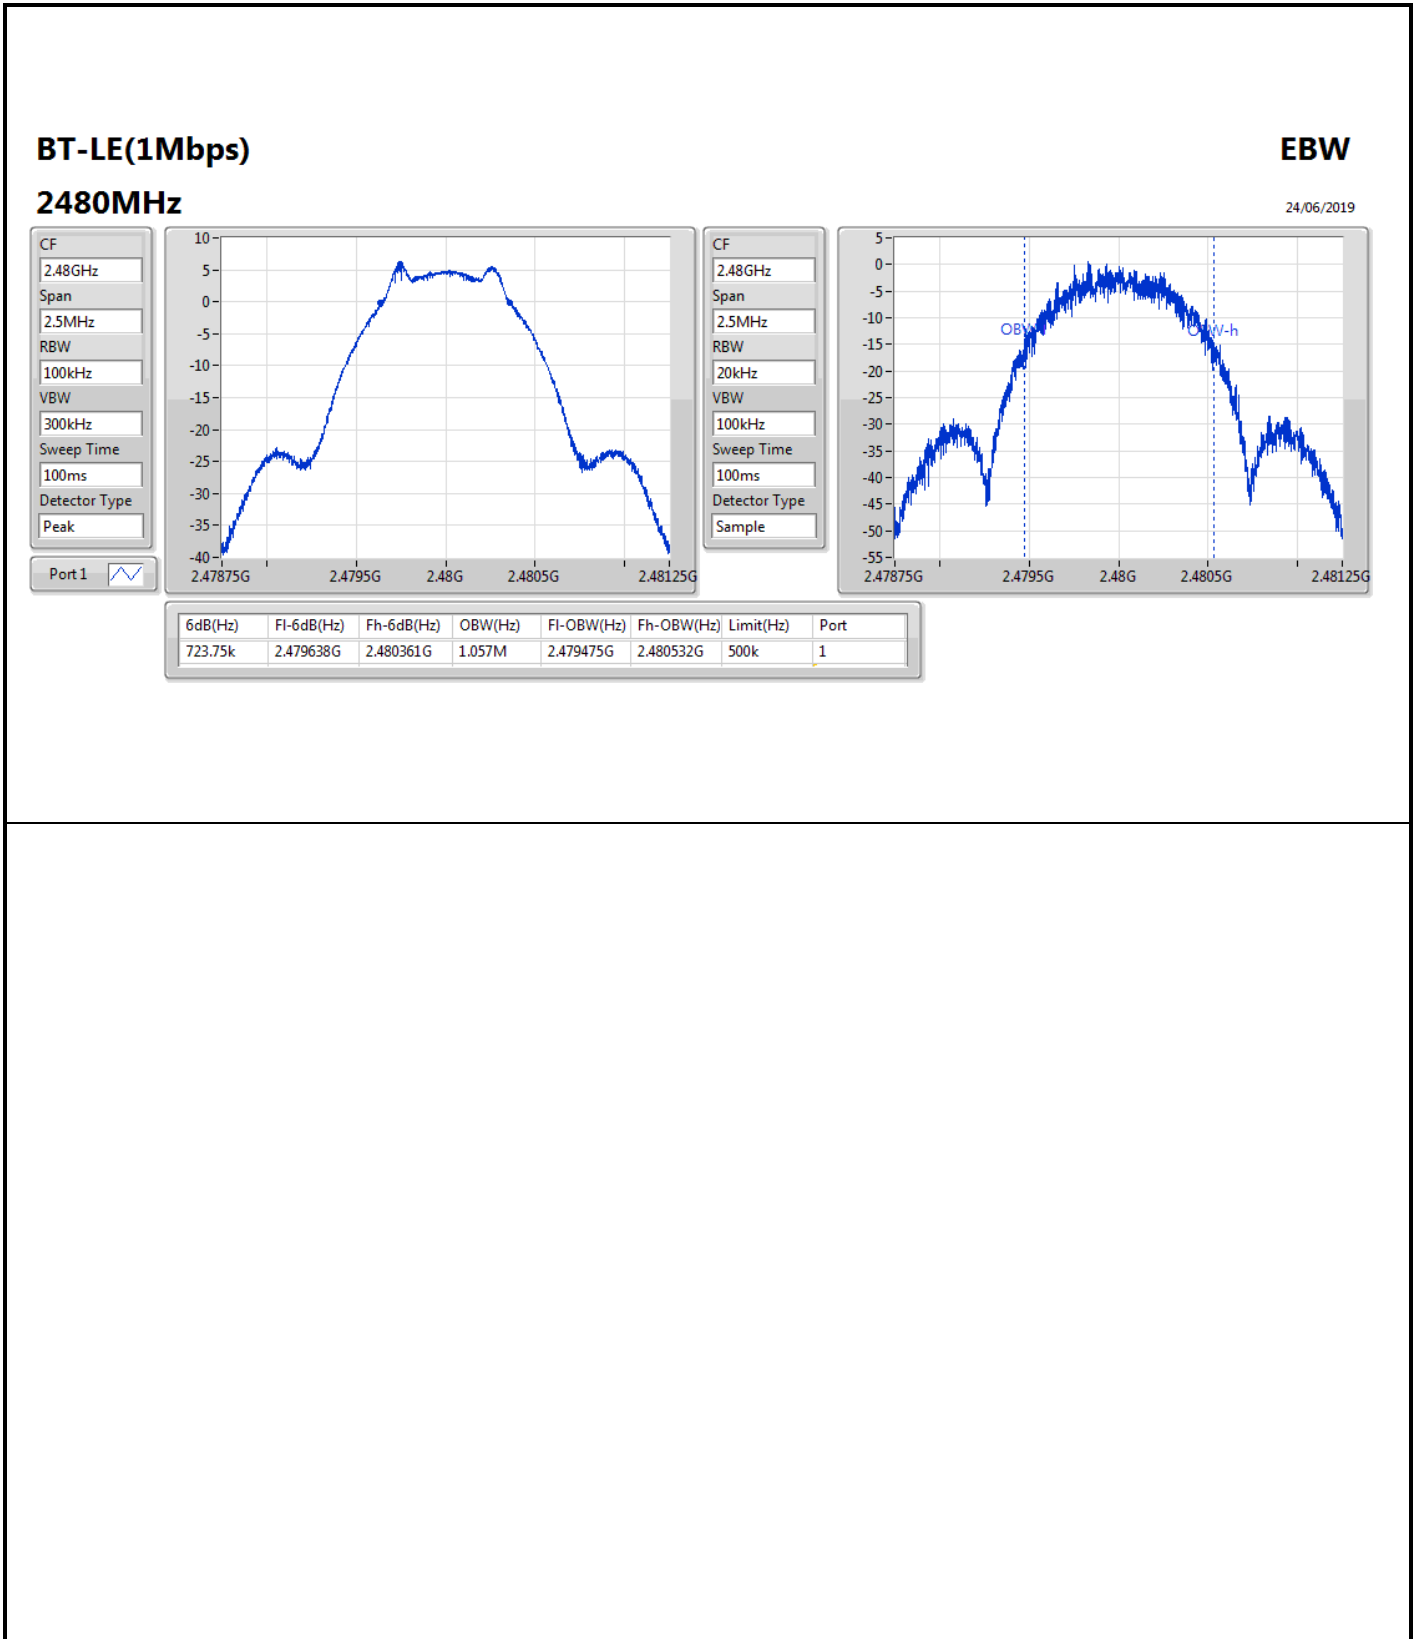





**Summary**

Mode	Power (dBm)	Power (W)
2.4-2.4835GHz	-	-
BT-LE(1Mbps)	6.78	0.00476



**Result**

Mode	Result	Gain (dBi)	Power (dBm)	Power Limit (dBm)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	1.50	6.78	30.00
2440MHz	Pass	1.50	6.54	30.00
2480MHz	Pass	1.50	6.47	30.00

**DG** = Directional Gain; **Port X** = Port X output power



Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
BT-LE(1Mbps)	-8.25

RBW=3 kHz.






Result

Mode	Result	Gain (dBi)	PD (dBm/RBW)	PD Limit (dBm/RBW)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	1.50	-8.25	8.00
2440MHz	Pass	1.50	-8.38	8.00
2480MHz	Pass	1.50	-8.30	8.00

DG = Directional Gain; RBW=3 kHz;

PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X power density;

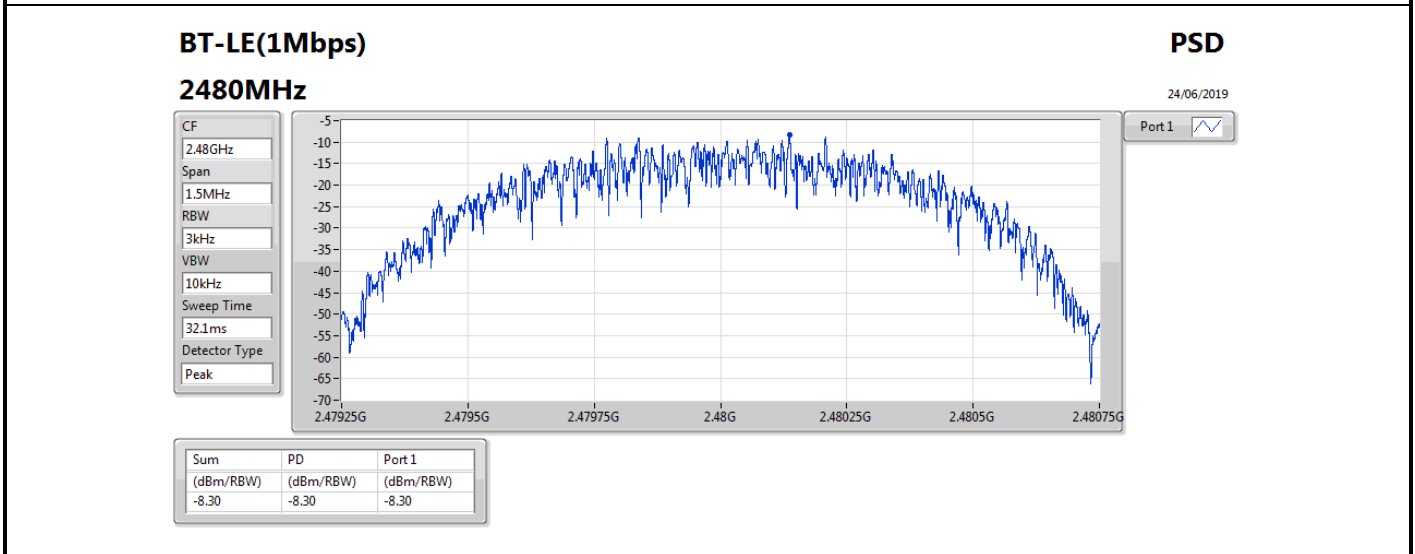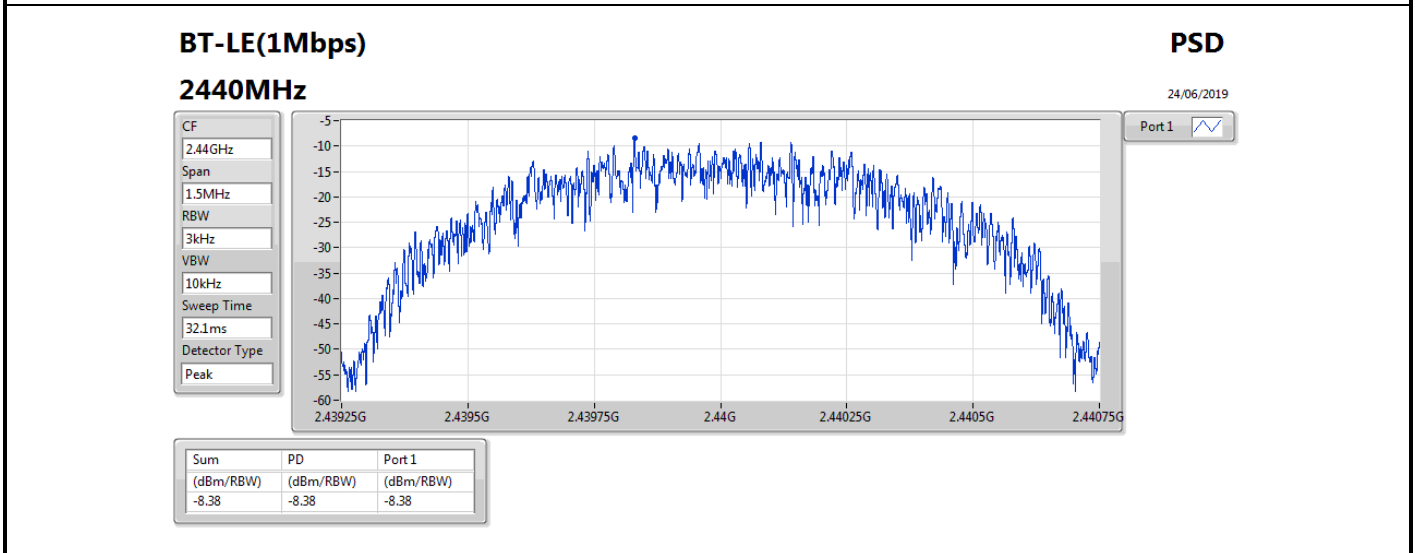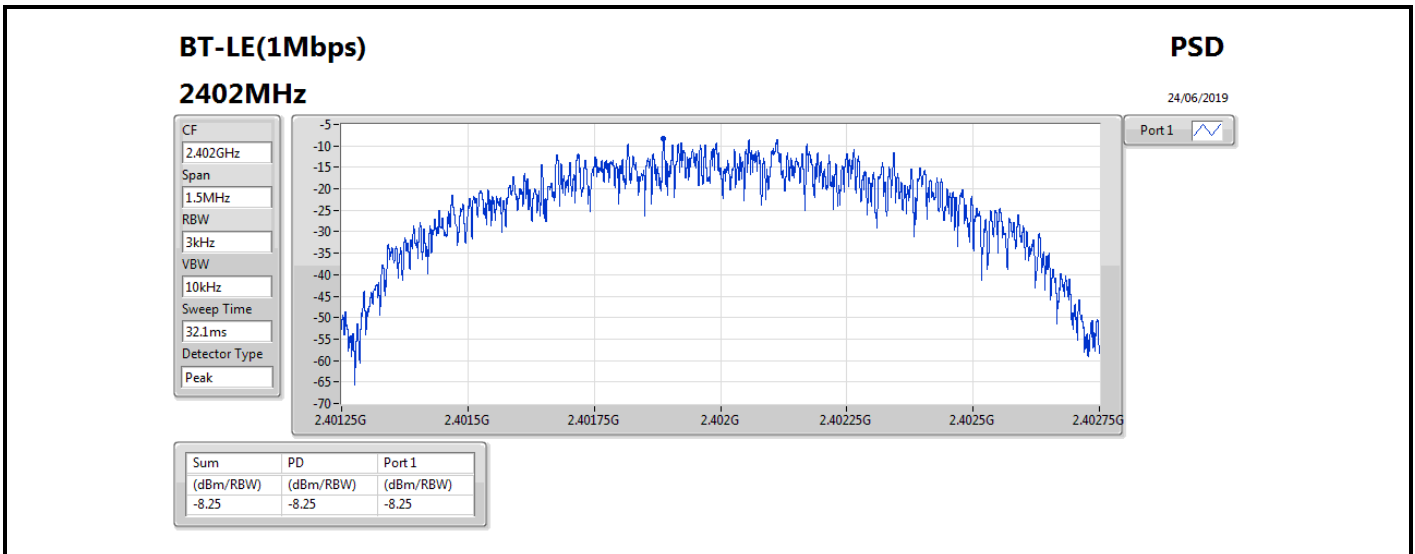





Summary

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-	-
BT-LE(1Mbps)	Pass	2.40196G	5.95	-24.05	2.3977G	-58.73	2.4G	-41.14	2.48455G	-61.24	7.2051G	-35.67	1




Result

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
BT-LE(1Mbps)	-	-	-	-	-	-	-	-	-	-	-	-	-
2402MHz	Pass	2.40196G	5.95	-24.05	2.3977G	-58.73	2.4G	-41.14	2.48455G	-61.24	7.2051G	-35.67	1
2440MHz	Pass	2.40196G	5.95	-24.05	2.39474G	-61.22	2.39987G	-61.12	2.48502G	-58.93	9.7605G	-51.28	1
2480MHz	Pass	2.40196G	5.95	-24.05	2.17896G	-63.84	2.39848G	-60.96	2.48364G	-52.45	15.27936G	-51.62	1

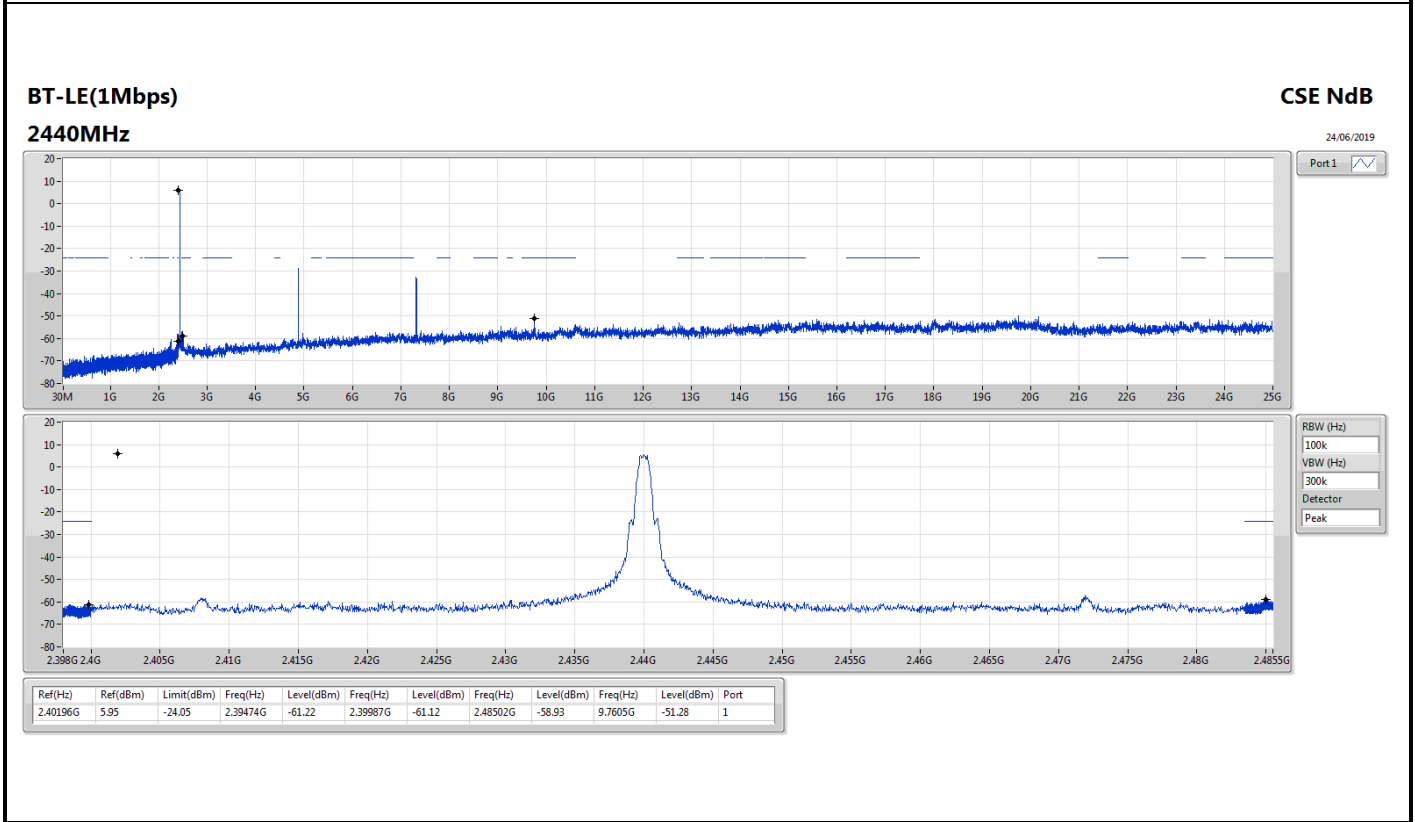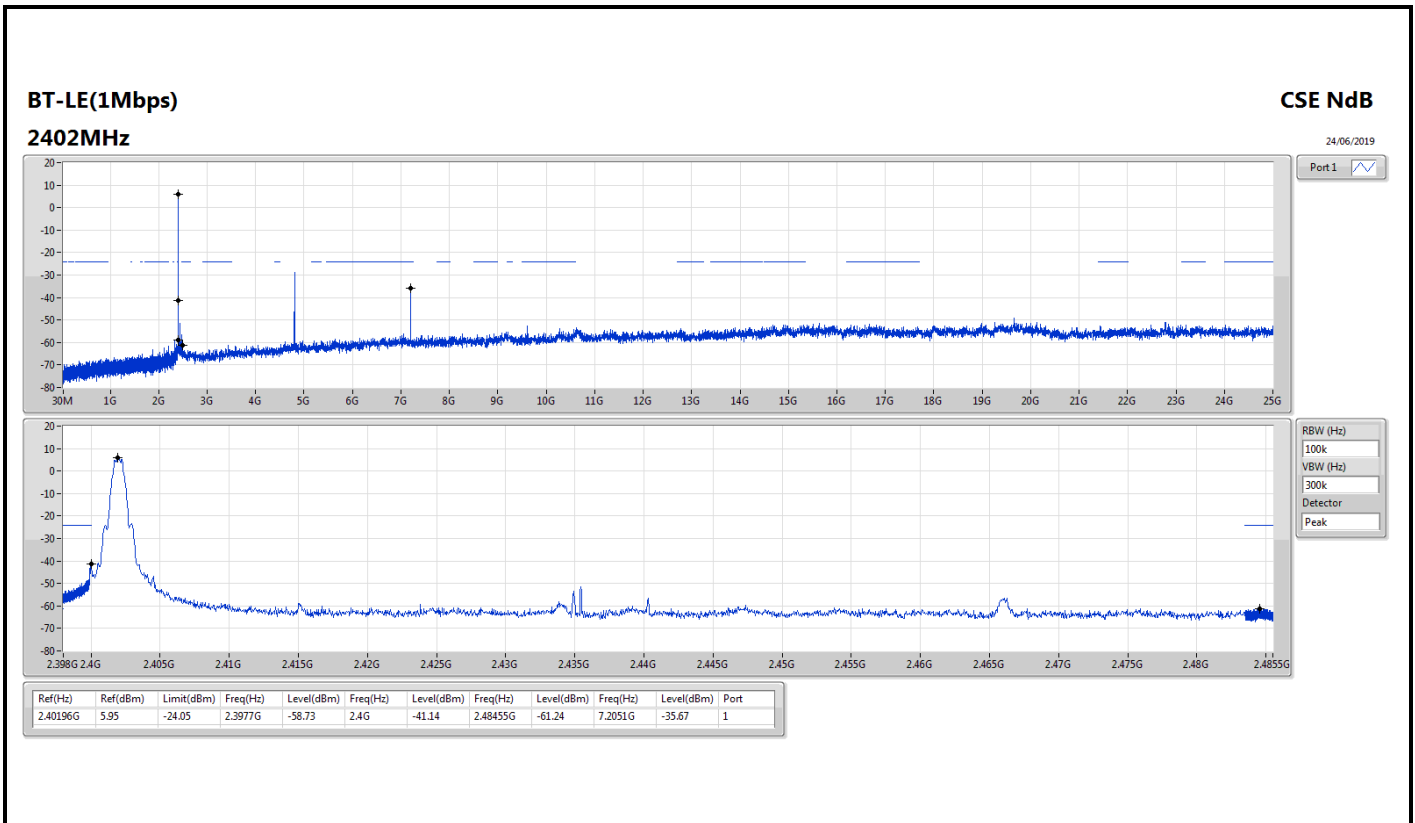



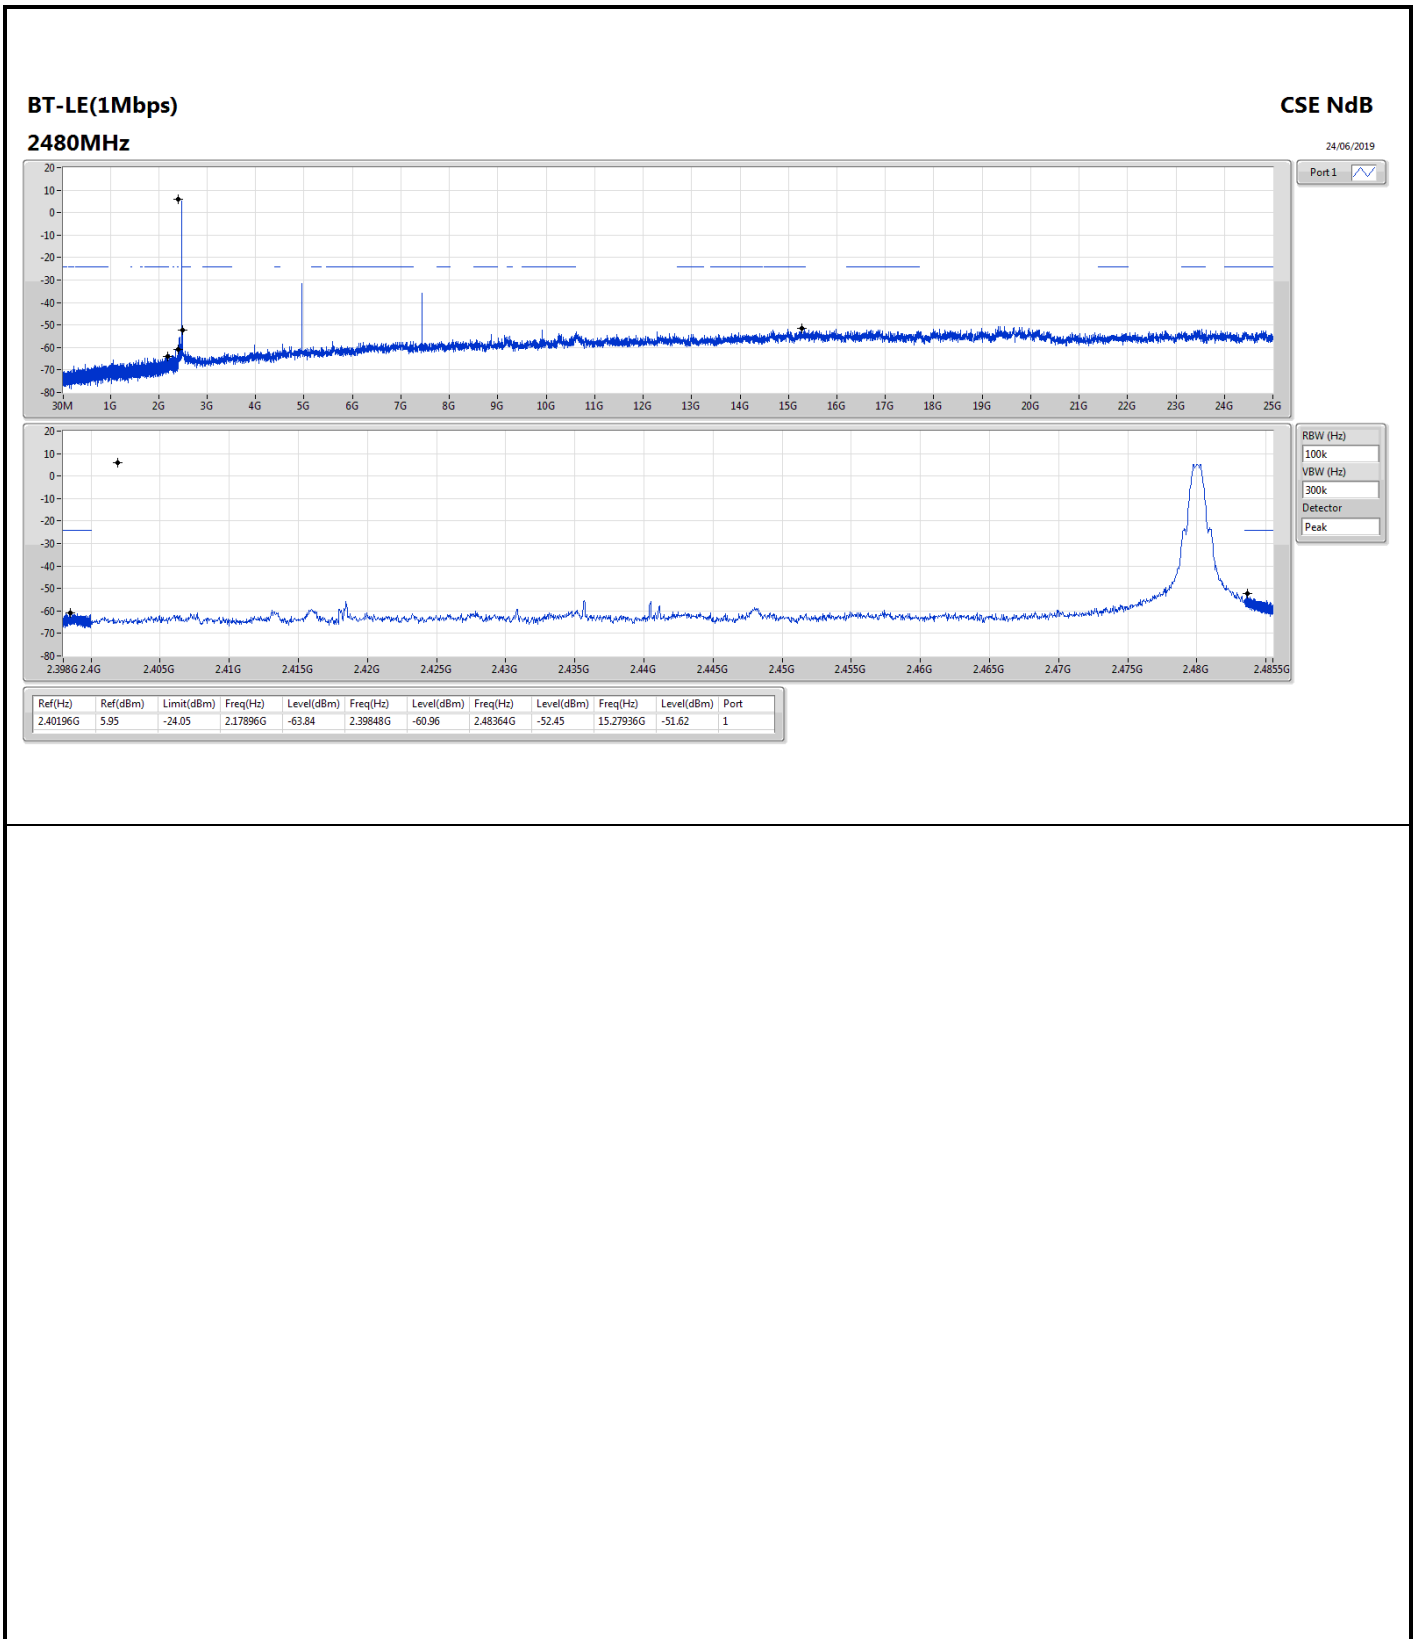



Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-
BT-LE(1Mbps)	Pass	PK	773.02M	29.35	46.00	-16.65	-7.73	3	Horizontal	0	1.00	-




Result

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
BT-LE(1Mbps)	-	-	-	-	-	-	-	-	-	-	-	-
2440MHz	Pass	PK	53.28M	21.88	40.00	-18.12	-24.39	3	Vertical	360	1.00	-
2440MHz	Pass	PK	125.06M	19.75	43.50	-23.75	-19.00	3	Vertical	360	1.00	-
2440MHz	Pass	PK	266.68M	18.90	46.00	-27.10	-16.09	3	Vertical	360	1.00	-
2440MHz	Pass	PK	454.86M	22.34	46.00	-23.66	-12.51	3	Vertical	360	1.00	-
2440MHz	Pass	PK	598.42M	24.75	46.00	-21.25	-10.45	3	Vertical	360	1.00	-
2440MHz	Pass	PK	776.9M	29.02	46.00	-16.98	-7.70	3	Vertical	360	1.00	-
2440MHz	Pass	PK	125.06M	16.49	43.50	-27.01	-19.00	3	Horizontal	0	1.00	-
2440MHz	Pass	PK	218.18M	23.30	46.00	-22.70	-20.89	3	Horizontal	0	1.00	-
2440MHz	Pass	PK	433.52M	21.12	46.00	-24.88	-12.85	3	Horizontal	0	1.00	-
2440MHz	Pass	PK	561.56M	23.66	46.00	-22.34	-9.92	3	Horizontal	0	1.00	-
2440MHz	Pass	PK	714.82M	25.66	46.00	-20.34	-8.95	3	Horizontal	0	1.00	-
2440MHz	Pass	PK	773.02M	29.35	46.00	-16.65	-7.73	3	Horizontal	0	1.00	-

### BT-LE(1Mbps)

13/06/2019

### 2440MHz\_Battery

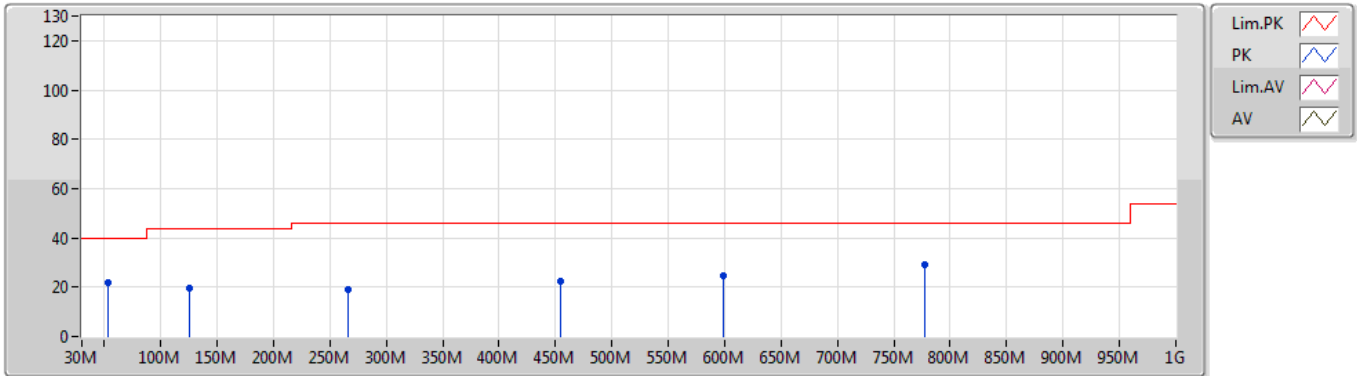


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
PK	53.28M	21.88	40.00	-18.12	-24.39	3	Vertical	360	1.00	-
PK	125.06M	19.75	43.50	-23.75	-19.00	3	Vertical	360	1.00	-
PK	266.68M	18.90	46.00	-27.10	-16.09	3	Vertical	360	1.00	-
PK	454.86M	22.34	46.00	-23.66	-12.51	3	Vertical	360	1.00	-
PK	598.42M	24.75	46.00	-21.25	-10.45	3	Vertical	360	1.00	-
PK	776.9M	29.02	46.00	-16.98	-7.70	3	Vertical	360	1.00	-

### BT-LE(1Mbps)

13/06/2019

### 2440MHz\_Battery

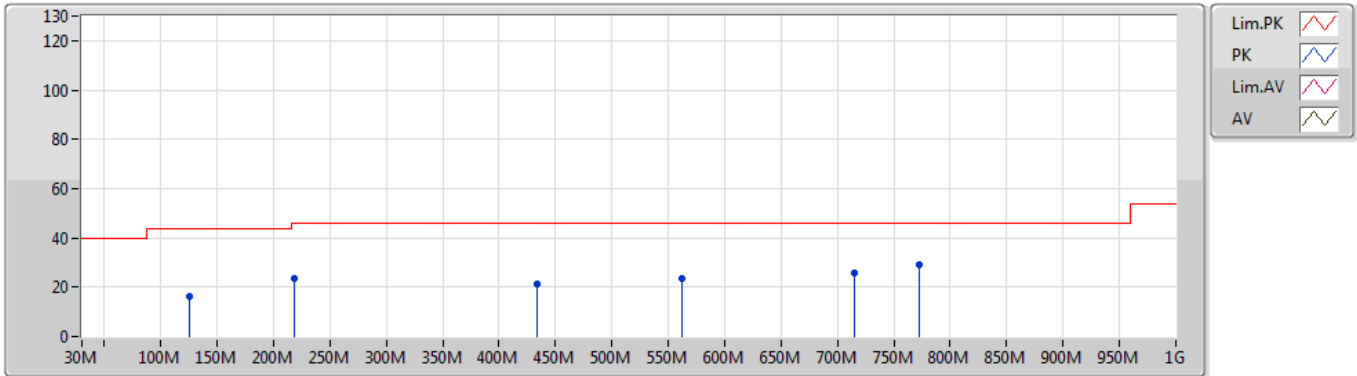

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
PK	125.06M	16.49	43.50	-27.01	-19.00	3	Horizontal	0	1.00	-
PK	218.18M	23.30	46.00	-22.70	-20.89	3	Horizontal	0	1.00	-
PK	433.52M	21.12	46.00	-24.88	-12.85	3	Horizontal	0	1.00	-
PK	561.56M	23.66	46.00	-22.34	-9.92	3	Horizontal	0	1.00	-
PK	714.82M	25.66	46.00	-20.34	-8.95	3	Horizontal	0	1.00	-
PK	773.02M	29.35	46.00	-16.65	-7.73	3	Horizontal	0	1.00	-



Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-
BT-LE(1Mbps)	Pass	AV	7.44061G	51.71	54.00	-2.29	13.51	3	Horizontal	8	1.00	-



Result

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
BT-LE(1Mbps)	-	-	-	-	-	-	-	-	-	-	-	-
2402MHz	Pass	AV	2.357G	43.57	54.00	-10.43	31.64	3	Vertical	87	2.61	-
2402MHz	Pass	AV	2.402G	85.39	Inf	-Inf	31.54	3	Vertical	87	2.61	-
2402MHz	Pass	PK	2.3802G	56.47	74.00	-17.53	31.59	3	Vertical	87	2.61	-
2402MHz	Pass	PK	2.4018G	86.52	Inf	-Inf	31.54	3	Vertical	87	2.61	-
2402MHz	Pass	AV	2.3558G	43.75	54.00	-10.25	31.65	3	Horizontal	214	2.99	-
2402MHz	Pass	AV	2.402G	99.27	Inf	-Inf	31.54	3	Horizontal	214	2.99	-
2402MHz	Pass	PK	2.3732G	57.31	74.00	-16.69	31.60	3	Horizontal	214	2.99	-
2402MHz	Pass	PK	2.4018G	100.28	Inf	-Inf	31.54	3	Horizontal	214	2.99	-
2402MHz	Pass	AV	4.80413G	37.26	54.00	-16.74	7.83	3	Vertical	204	2.37	-
2402MHz	Pass	PK	4.80343G	48.86	74.00	-25.14	7.83	3	Vertical	204	2.37	-
2402MHz	Pass	AV	4.80409G	37.13	54.00	-16.87	7.83	3	Horizontal	204	1.93	-
2402MHz	Pass	PK	4.80444G	48.65	74.00	-25.35	7.83	3	Horizontal	204	1.93	-
2440MHz	Pass	AV	2.3452G	43.65	54.00	-10.35	31.67	3	Vertical	234	2.86	-
2440MHz	Pass	AV	2.44G	90.15	Inf	-Inf	31.55	3	Vertical	234	2.86	-
2440MHz	Pass	AV	2.4968G	43.86	54.00	-10.14	31.58	3	Vertical	234	2.86	-
2440MHz	Pass	PK	2.3604G	56.19	74.00	-17.81	31.64	3	Vertical	234	2.86	-
2440MHz	Pass	PK	2.4396G	91.30	Inf	-Inf	31.55	3	Vertical	234	2.86	-
2440MHz	Pass	PK	2.492G	56.69	74.00	-17.31	31.58	3	Vertical	234	2.86	-
2440MHz	Pass	AV	2.3756G	43.80	54.00	-10.20	31.60	3	Horizontal	202	1.84	-
2440MHz	Pass	AV	2.44G	96.32	Inf	-Inf	31.55	3	Horizontal	202	1.84	-
2440MHz	Pass	AV	2.4908G	43.95	54.00	-10.05	31.58	3	Horizontal	202	1.84	-
2440MHz	Pass	PK	2.3416G	58.28	74.00	-15.72	31.68	3	Horizontal	202	1.84	-
2440MHz	Pass	PK	2.4404G	97.41	Inf	-Inf	31.55	3	Horizontal	202	1.84	-
2440MHz	Pass	PK	2.4996G	57.27	74.00	-16.73	31.58	3	Horizontal	202	1.84	-
2440MHz	Pass	AV	4.88005G	36.09	54.00	-17.91	7.90	3	Vertical	198	2.20	-
2440MHz	Pass	AV	7.32062G	49.99	54.00	-4.01	13.66	3	Vertical	259	2.24	-
2440MHz	Pass	PK	4.87979G	48.05	74.00	-25.95	7.90	3	Vertical	198	2.20	-
2440MHz	Pass	PK	7.32069G	60.03	74.00	-13.97	13.66	3	Vertical	259	2.24	-
2440MHz	Pass	AV	4.88016G	36.56	54.00	-17.44	7.90	3	Horizontal	204	1.98	-
2440MHz	Pass	AV	7.32058G	47.02	54.00	-6.98	13.66	3	Horizontal	276	2.13	-
2440MHz	Pass	PK	4.88041G	48.07	74.00	-25.93	7.90	3	Horizontal	204	1.98	-
2440MHz	Pass	PK	7.3194G	57.60	74.00	-16.40	13.66	3	Horizontal	276	2.13	-
2480MHz	Pass	AV	2.48G	90.03	Inf	-Inf	31.57	3	Vertical	301	2.83	-
2480MHz	Pass	AV	2.4844G	44.08	54.00	-9.92	31.58	3	Vertical	301	2.83	-
2480MHz	Pass	PK	2.4802G	91.17	Inf	-Inf	31.57	3	Vertical	301	2.83	-
2480MHz	Pass	PK	2.4968G	57.07	74.00	-16.93	31.58	3	Vertical	301	2.83	-
2480MHz	Pass	AV	2.48G	95.48	Inf	-Inf	31.57	3	Horizontal	211	2.80	-
2480MHz	Pass	AV	2.4835G	44.23	54.00	-9.77	31.58	3	Horizontal	211	2.80	-
2480MHz	Pass	PK	2.4802G	96.54	Inf	-Inf	31.57	3	Horizontal	211	2.80	-
2480MHz	Pass	PK	2.4914G	57.17	74.00	-16.83	31.58	3	Horizontal	211	2.80	-
2480MHz	Pass	AV	4.9602G	35.05	54.00	-18.95	7.86	3	Vertical	204	2.11	-
2480MHz	Pass	AV	7.44059G	48.90	54.00	-5.10	13.51	3	Vertical	177	1.50	-
2480MHz	Pass	PK	4.96028G	46.95	74.00	-27.05	7.86	3	Vertical	204	2.11	-
2480MHz	Pass	PK	7.44071G	58.96	74.00	-15.04	13.51	3	Vertical	177	1.50	-
2480MHz	Pass	AV	4.96015G	36.00	54.00	-18.00	7.86	3	Horizontal	205	2.12	-
2480MHz	Pass	AV	7.44061G	51.71	54.00	-2.29	13.51	3	Horizontal	8	1.00	-
2480MHz	Pass	PK	4.95929G	47.11	74.00	-26.89	7.86	3	Horizontal	205	2.12	-



## RSE TX above 1GHz

## Appendix E.2


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2480MHz	Pass	PK	7.44075G	61.82	74.00	-12.18	13.51	3	Horizontal	8	1.00	-



**BT-LE(1Mbps)**

13/06/2019

**2402MHz\_TX**

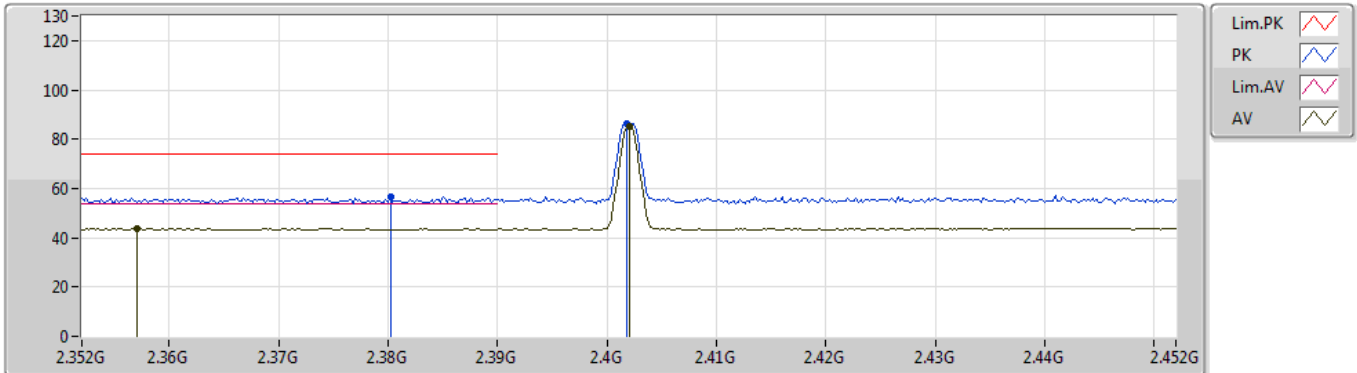


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	2.357G	43.57	54.00	-10.43	31.64	3	Vertical	87	2.61	-
AV	2.402G	85.39	Inf	-Inf	31.54	3	Vertical	87	2.61	-
PK	2.3802G	56.47	74.00	-17.53	31.59	3	Vertical	87	2.61	-
PK	2.4018G	86.52	Inf	-Inf	31.54	3	Vertical	87	2.61	-

**BT-LE(1Mbps)**

13/06/2019

**2402MHz\_TX**

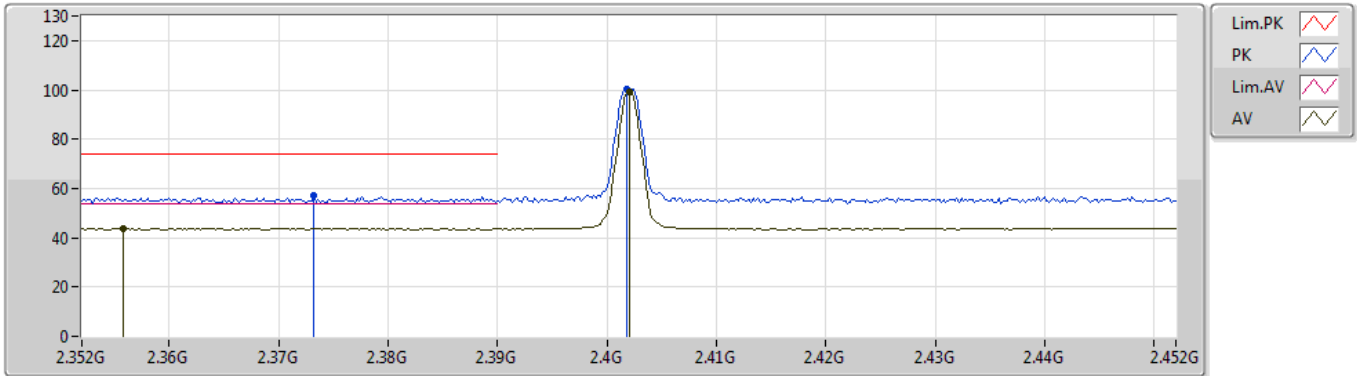


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	2.3558G	43.75	54.00	-10.25	31.65	3	Horizontal	214	2.99	-
AV	2.402G	99.27	Inf	-Inf	31.54	3	Horizontal	214	2.99	-
PK	2.3732G	57.31	74.00	-16.69	31.60	3	Horizontal	214	2.99	-
PK	2.4018G	100.28	Inf	-Inf	31.54	3	Horizontal	214	2.99	-

**BT-LE(1Mbps)**

13/06/2019

**2402MHz\_TX**

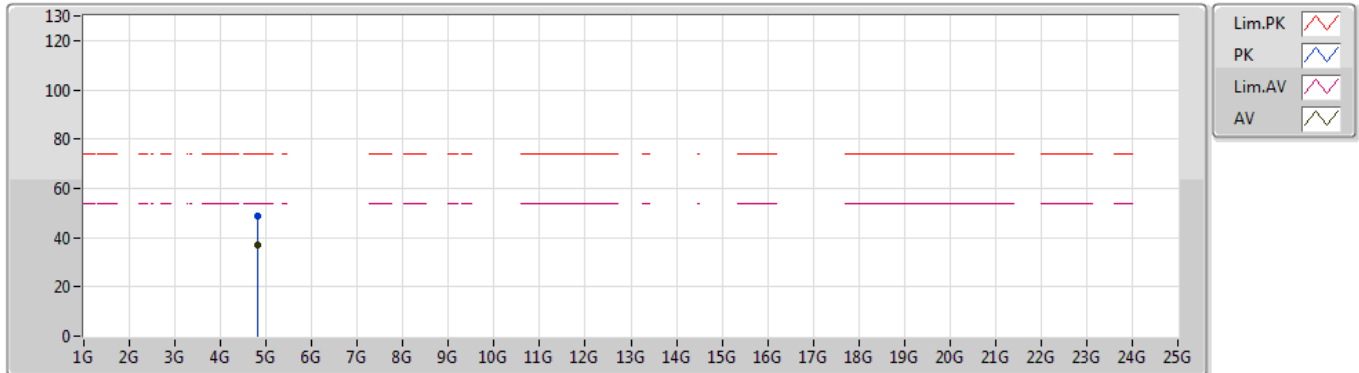


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	4.80413G	37.26	54.00	-16.74	7.83	3	Vertical	204	2.37	-
PK	4.80343G	48.86	74.00	-25.14	7.83	3	Vertical	204	2.37	-

### BT-LE(1Mbps)

13/06/2019

### 2402MHz\_TX

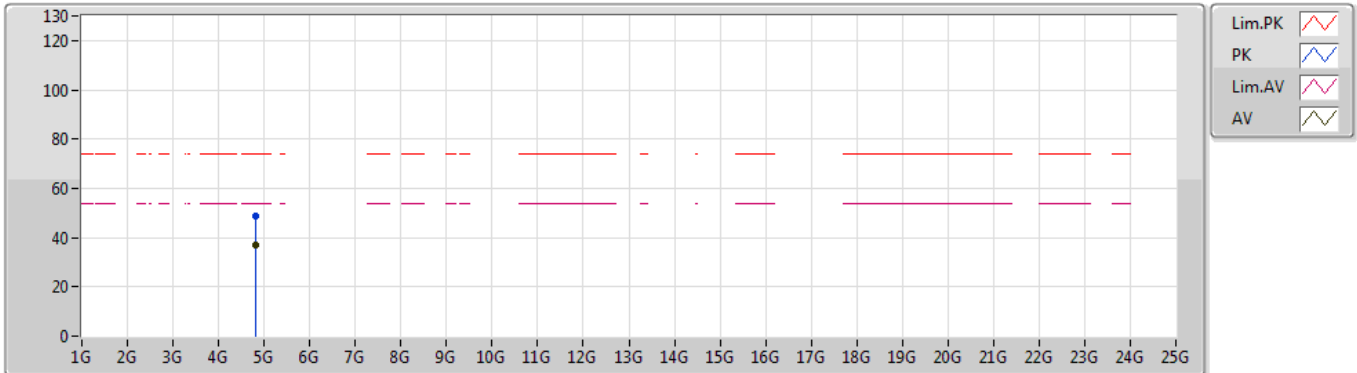


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	4.80409G	37.13	54.00	-16.87	7.83	3	Horizontal	204	1.93	-
PK	4.80444G	48.65	74.00	-25.35	7.83	3	Horizontal	204	1.93	-

**BT-LE(1Mbps)**

13/06/2019

**2440MHz\_TX**

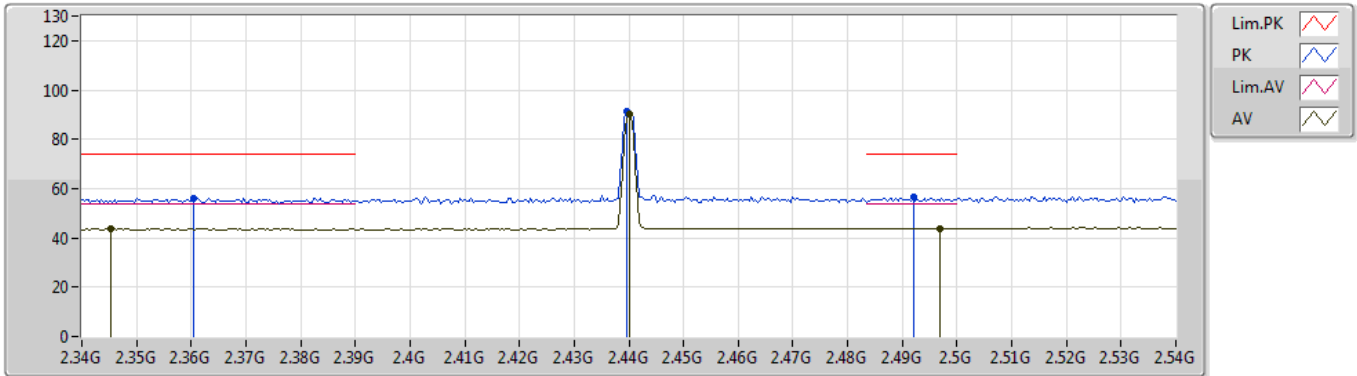


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	2.3452G	43.65	54.00	-10.35	31.67	3	Vertical	234	2.86	-
AV	2.44G	90.15	Inf	-Inf	31.55	3	Vertical	234	2.86	-
AV	2.4968G	43.86	54.00	-10.14	31.58	3	Vertical	234	2.86	-
PK	2.3604G	56.19	74.00	-17.81	31.64	3	Vertical	234	2.86	-
PK	2.4396G	91.30	Inf	-Inf	31.55	3	Vertical	234	2.86	-
PK	2.492G	56.69	74.00	-17.31	31.58	3	Vertical	234	2.86	-

**BT-LE(1Mbps)**

13/06/2019

**2440MHz\_TX**

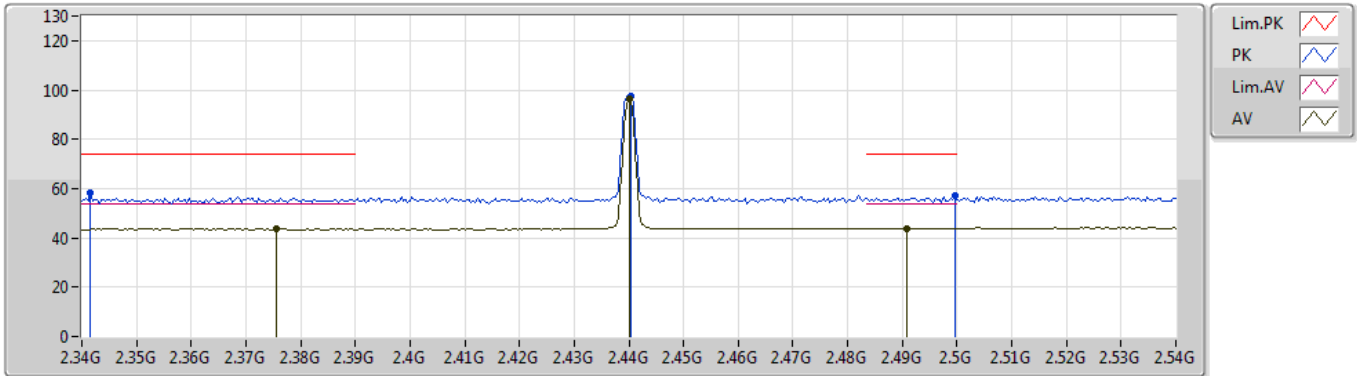


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	2.3756G	43.80	54.00	-10.20	31.60	3	Horizontal	202	1.84	-
AV	2.44G	96.32	Inf	-Inf	31.55	3	Horizontal	202	1.84	-
AV	2.4908G	43.95	54.00	-10.05	31.58	3	Horizontal	202	1.84	-
PK	2.3416G	58.28	74.00	-15.72	31.68	3	Horizontal	202	1.84	-
PK	2.4404G	97.41	Inf	-Inf	31.55	3	Horizontal	202	1.84	-
PK	2.4996G	57.27	74.00	-16.73	31.58	3	Horizontal	202	1.84	-

**BT-LE(1Mbps)**

13/06/2019

**2440MHz\_TX**

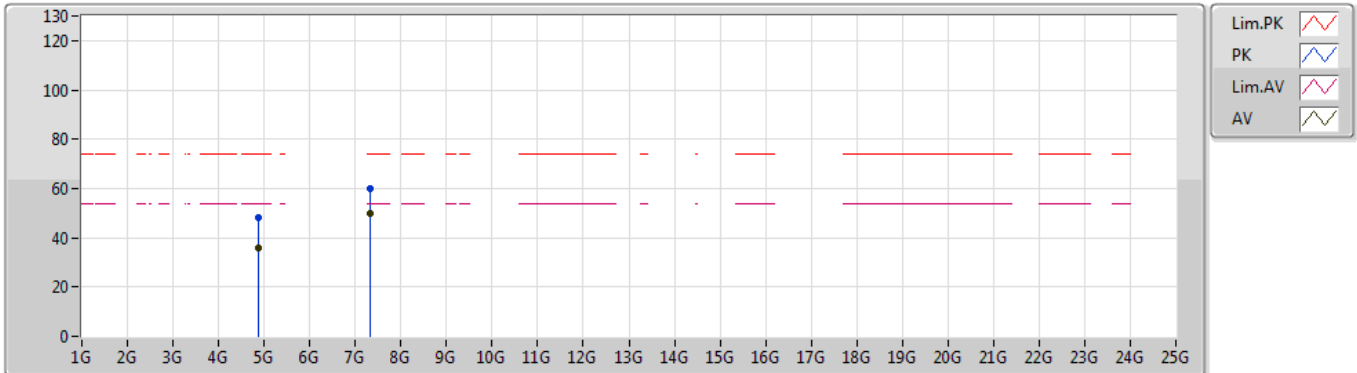


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	4.88005G	36.09	54.00	-17.91	7.90	3	Vertical	198	2.20	-
AV	7.32062G	49.99	54.00	-4.01	13.66	3	Vertical	259	2.24	-
PK	4.87979G	48.05	74.00	-25.95	7.90	3	Vertical	198	2.20	-
PK	7.32069G	60.03	74.00	-13.97	13.66	3	Vertical	259	2.24	-

**BT-LE(1Mbps)**

13/06/2019

**2440MHz\_TX**

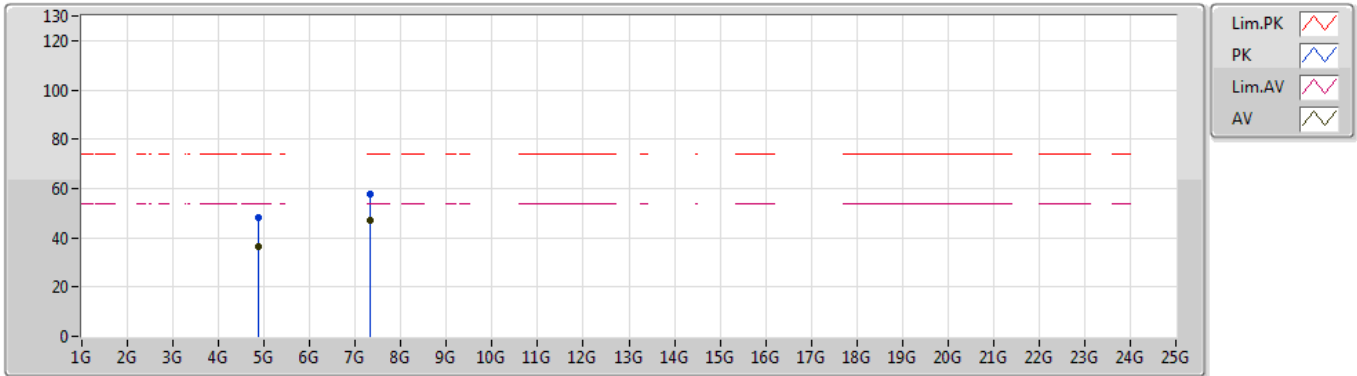


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	4.88016G	36.56	54.00	-17.44	7.90	3	Horizontal	204	1.98	-
AV	7.32058G	47.02	54.00	-6.98	13.66	3	Horizontal	276	2.13	-
PK	4.88041G	48.07	74.00	-25.93	7.90	3	Horizontal	204	1.98	-
PK	7.3194G	57.60	74.00	-16.40	13.66	3	Horizontal	276	2.13	-



**BT-LE(1Mbps)**

13/06/2019

**2480MHz\_TX**

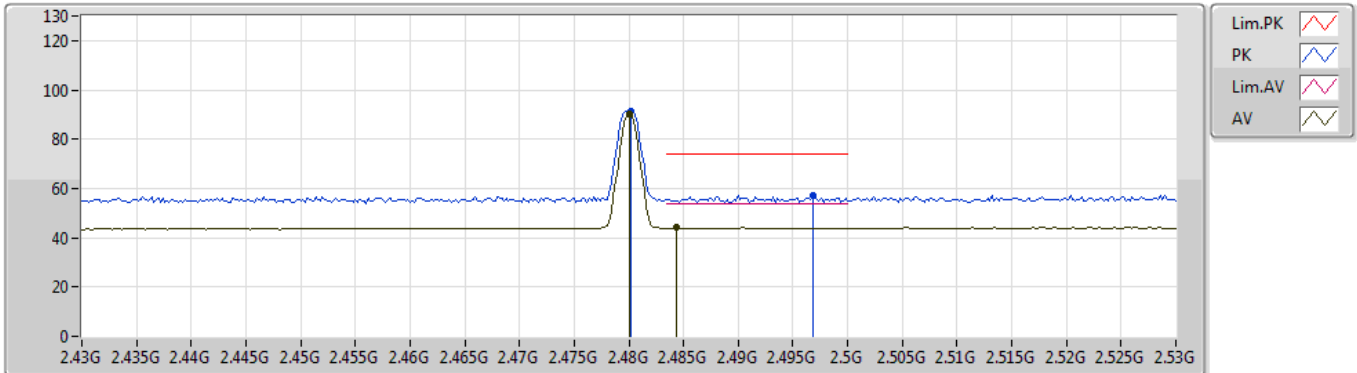


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	2.48G	90.03	Inf	-Inf	31.57	3	Vertical	301	2.83	-
AV	2.4844G	44.08	54.00	-9.92	31.58	3	Vertical	301	2.83	-
PK	2.4802G	91.17	Inf	-Inf	31.57	3	Vertical	301	2.83	-
PK	2.4968G	57.07	74.00	-16.93	31.58	3	Vertical	301	2.83	-

**BT-LE(1Mbps)**

13/06/2019

**2480MHz\_TX**

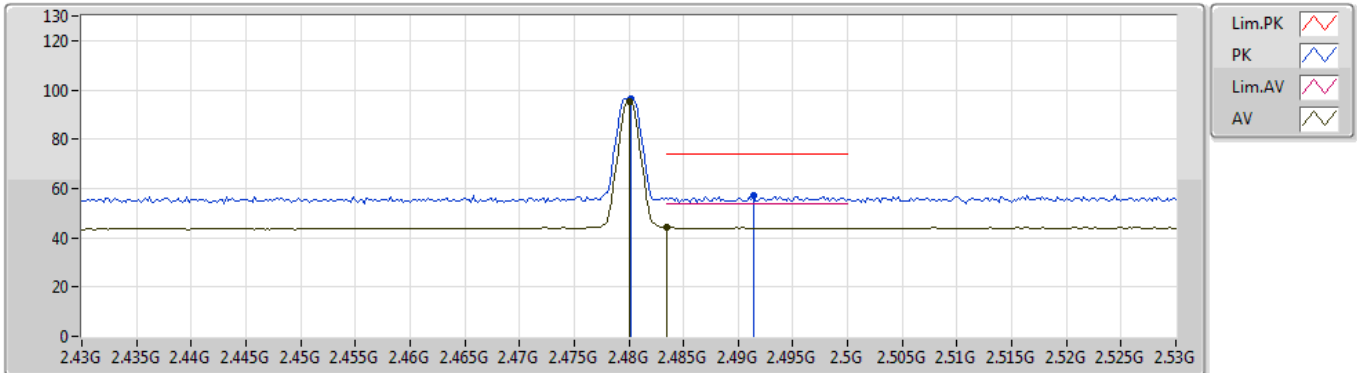


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	2.48G	95.48	Inf	-Inf	31.57	3	Horizontal	211	2.80	-
AV	2.4835G	44.23	54.00	-9.77	31.58	3	Horizontal	211	2.80	-
PK	2.4802G	96.54	Inf	-Inf	31.57	3	Horizontal	211	2.80	-
PK	2.4914G	57.17	74.00	-16.83	31.58	3	Horizontal	211	2.80	-

**BT-LE(1Mbps)**

13/06/2019

**2480MHz\_TX**

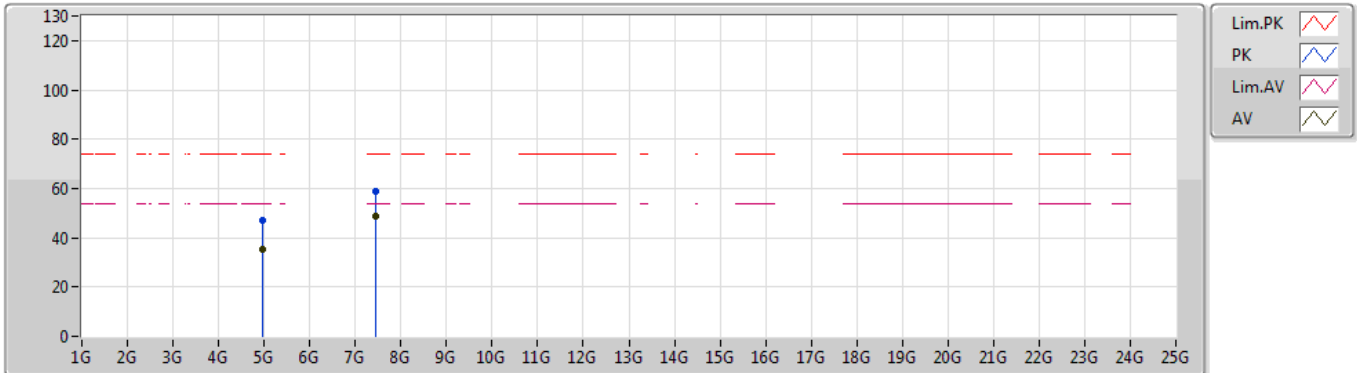


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	4.9602G	35.05	54.00	-18.95	7.86	3	Vertical	204	2.11	-
AV	7.44059G	48.90	54.00	-5.10	13.51	3	Vertical	177	1.50	-
PK	4.96028G	46.95	74.00	-27.05	7.86	3	Vertical	204	2.11	-
PK	7.44071G	58.96	74.00	-15.04	13.51	3	Vertical	177	1.50	-

**BT-LE(1Mbps)**

13/06/2019

**2480MHz\_TX**

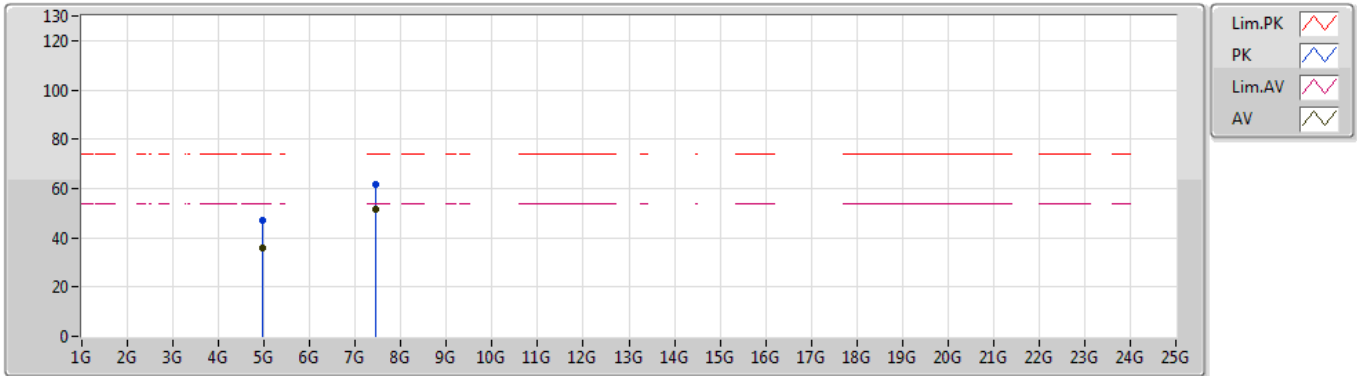

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment
AV	4.96015G	36.00	54.00	-18.00	7.86	3	Horizontal	205	2.12	-
AV	7.44061G	51.71	54.00	-2.29	13.51	3	Horizontal	8	1.00	-
PK	4.95929G	47.11	74.00	-26.89	7.86	3	Horizontal	205	2.12	-
PK	7.44075G	61.82	74.00	-12.18	13.51	3	Horizontal	8	1.00	-