



# EMI TEST REPORT

**Test report No.** : ERI-FCC-0141

**Type of equipment** : MP3 PLAYER

**Model name** : DN5128

**Applicant** : DYNE TELECOM CO., LTD.

**Test standards** : FCC Part 15 Subpart B (Class B)

**Test Procedure and Items :**

- AC Power line Conducted emissions measurement : ANSI C63.4-1992
- Radiated emissions measurement : ANSI C63.4-1992

**Test result :** Pass

This equipment has been tested to comply with the requirements of FCC rules and regulations Part 15 Subpart B unintentional radiators. The results in this report apply only to the sample tested. This test report shall not be reproduced except in full, without the written approval of ERI laboratory.

**Date of test:** 2002. 9. 7 9. 11

**Issued date:** 2002. 9. 11

**Tested by :**

SEJIN, O

**Approved by:**

SANG-KYU, LEE

---

# Contents

1. Client information
2. Laboratory information
3. Test system configuration
  - 3.1 Operation environment
  - 3.2 Measurement uncertainty
  - 3.3 Sample calculation
4. Description of EUT
  - 4.1 Product description
  - 4.2 Peripherals
  - 4.3 Used cables
  - 4.4 E.U.T. test configuration
  - 4.5 Operating conditions
5. Test results
  - 5.1 Conducted emission
    - 5.1.1 Measurement procedure
    - 5.1.2 Used equipments
    - 5.1.3 Measurement uncertainty
    - 5.1.4 Test data
    - 5.1.5 Test result

---

## 5.2 Radiated emission

- 5.2.1 Measurement procedure
- 5.2.2 Used equipments
- 5.2.3 Measurement uncertainty
- 5.2.4 Test data(Upload mode)
- 5.2.5 Test data(Download mode)
- 5.2.6 Test result

## 6. Photographs

Conducted emission test [front, rear]

Radiated emission test [front, rear]

**Attached** : Conducted emission graph

---

## 1. Client information

**Applicant/Manufacturer** : DYNE TELECOM CO., LTD.

**Address** : #3F Chungyong B/D 1123-1, Kwanyang-2dong, dongan-gu, anyang-city, Kyungki-do, Korea

**Telephone number** : 82-31-422-3481

**Facsimile number** : 82-31-422-3483

**Contact person** : HAK-REA HONG

## 2. Laboratory information

### Address

The open area test site and EMC facilities are used for these testing.

This facility was accredited by KOLAS, EK of Korea, MIC, FCC.

EMC RESEARCH INSTITUTE .

66-6, JEIL-RI, YANGJI-MYUN, YOUNGIN-CITY, KYUNGGI-DO, KOREA

Telephone Number : 82- 31- 336- 1186

Facsimile Number : 82- 31- 336 -1184

KOLAS No. : 111

EK : J

MIC : KR0030

FCC Filing No. : 302567

---

### **3. TEST SYSTEM CONFIGURATION**

#### 3.1 Operation environment

	Temperature	Humidity	Pressure
10m Chamber :	22.0 °C	57 %	-
Shielded room :	24.0 °C	58 %	998hPa

#### 3.2 Measurement Uncertainty

All measurements involve certain levels of uncertainties, specifically in field of EMC.

The factors contributing to uncertainties are test receiver, Cable loss, antenna factor calibration, Antenna directivity, antenna factor variation with height, antenna phase center variation, antenna Frequency interpolation, measurement distance variation, site imperfection, mismatch, and system repeatability.

Based on NIS 80,81, The measurement uncertainty level with a 95% confidence level were applied.

---

### 3.3 Sample calculation

#### Conducted emission

The field strength is calculated by adding the LISN factor, cable loss from the measured reading.

The sample calculation is as follows :

$$FS = MR + LF + CL$$

MR = Meter Reading

LF = LISN Factor

CL = Cable Loss

If MR is 30dB, LISN Factor 1dB, CL 1dB

The result (MR) is

$$30 + 1 + 1 = 32\text{dBuV}$$

#### Radiated emission

The field strength is calculated by adding the antenna Factor, cable loss and, Antenna pad subtracting the amplifier gain from the measured reading.

The sample calculation is as follows :

$$FS = MR + AF + CL + AT - AG$$

MR = Meter Reading

AF = Antenna Factor

CL = Cable Loss

AT = Antenna Pad

AG=Amplifier Gain

If MR is 30dB, AF 12dB, CL 5dB, AP 10dB, AG 35dB

The result (MR) is

$$30 + 12 + 5 + 10 - 35 = 22\text{dBuV/m}$$

## 4. Description of EUT

### 4.1 Product description

<b>Type of product :</b>	MP3 PLAYER
<b>Basic model No. :</b>	DN5128
<b>Serial No. :</b>	N/A
<b>Electric rating :</b>	DC 3V
<b>General description :</b>	This EUT(Equipment under test) is MP3 Player.

### 4.2 Peripherals


Description	Manufacturer	Model / Part #	Serial No
MP3 PLAYER	DYNE TELECOM CO., LTD	DN5128	N/A
NOTE PC	LG electronic Co., Ltd.	CM2080	5Y17JNZ9R892
AC/DC adaptor	Delta electronics Co., Ltd		
Keyboard	Samsung electro-machinics Co., Ltd.	SDM4510UH	4M015720
Mouse	N/A	MOSXUB	N/A
Mic&earphone	N/A	N/A	N/A
Printer	HP	C6427A	CN13V1B1SZ
Speaker	Fengshin electronics	CAMAC G7	N/A

### 4.3 Used cables

Cable type	Shield	Length (meters)	Connector	Connection point 1	Connection point 2
USB PORT	YES	1.0	USB	NOTE PC	-
Earphone	NO	1.0	P-Jack	Earphone	-

---

#### 4.4 EUT Test configuration

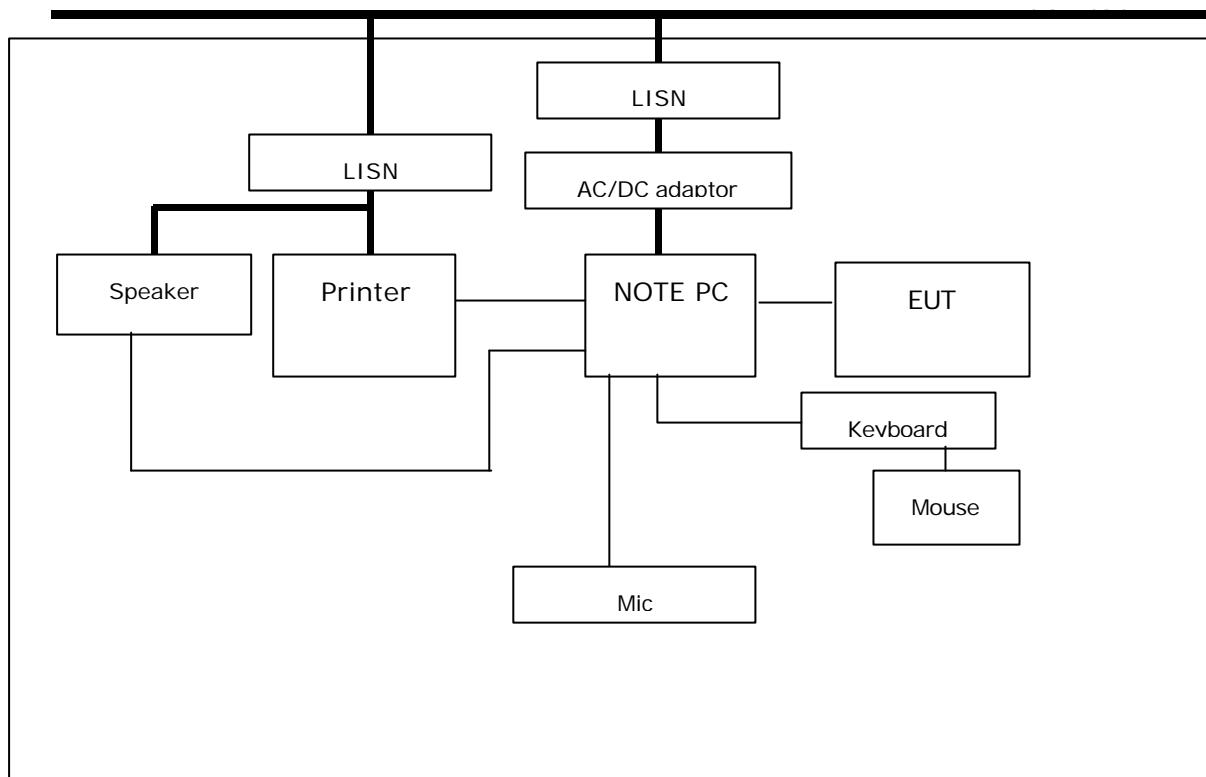**Shield room****Main power**

#### 4.5 Operating conditions

Operating : Data up&download mode

- The system was configured in typical fashion (as a customer would normally use it) for testing.
- The EUT exercise program used during radiated and conducted testing was designed to exercise the various system components in a manner similar to typical use.

## 5. TEST RESULTS

### 5.1 Conducted emission

#### 5.1.1 Measurement procedure

##### **Mains**

The measurements were performed in a shielded room.

EUT was placed on a non-metallic table height of 0.8m above the reference ground plane.

The rear of tabletop was located 0.4m to the vertical conducted plane. All other surfaces of tabletop was at least 0.8m from any other grounded conducting surface.

I/O cables and AC cables that were connected to the peripherals were bundled in center.

They were folded back and forth forming a bundle 0.3m to 0.4m long and were hanged at a 0.4m height to the ground plane.

Each EUT power lead, except ground (safety) lead, were individually connected through a LISN to input power source.

Both lines of power cord, hot and neutral, were measured.

#### 5.1.2 Used equipment

Equipment	Model	Serial No.	Makers	Next Cal.Date	Used
Test receiver	ESCS30	100022	R&S	2003. 3. 25	
L.I.S.N.	ESH3-Z5	827246/008	R&S	2003. 3. 12	
	ESH3-Z5	831887/018	R&S	2003. 3. 12	
Shield room	8 × 6 × 3.3m/H	-	Daehan shield Engineering	-	

#### 5.1.3 Measurement uncertainty

Conducted emission measurement : ± 2.4 (K=2)

### 5.1.4 Test data

Frequency	Tested	LISN	Meter		Limits	
Range	Freq.	Pol.	Reading		QP	AV
[MHz]	[MHz]		QP	AV	QP	AV
<b>0.15 - 0.5(MHz)</b>	0.207	H	44.5	34.6	63.3	53.3
	0.279	H	41.0	35.5	60.8	50.8
	0.348	H	35.5	31.2	59.0	49.0
	0.417	H	36.4	35.1	57.4	47.4
<b>0.5-5 (MHz)</b>	0.624	N	28.5	27.9	56.0	46.0
	0.765	N	30.0	29.3	56.0	46.0
	1.182	N	30.2	29.0	56.0	46.0
	1.251	N	30.3	29.1	56.0	46.0
	1.740	N	29.1	28.4	56.0	46.0
<b>5-30 (MHz)</b>	5.560	N	20.9	14.6	60.0	50.0
	9.620	H	20.7	15.6	60.0	50.0

\* <5 : mean less than 5dB

\* Loss = LISN insertion Loss + Cable Loss

Attached < Conducted emission test graph >

### 5.1.5 Test result

Pass

## 5.2 Radiated emission

### 5.2.1 Measurement procedure

A pretest was performed at 3m distance in an semi-anechoic chamber for searching correct frequency.

The final test was done at a 10m open area test site with a quasi-peak detector.

EUT was placed on a non-metallic table height of 0.8m above the reference ground plane.

Cables connected to EUT were fixed to cause maximum emission.

Test was made with the antenna positioned in both the horizontal and vertical planes of polarization.

The measurement antenna was varied in height above the conducting ground plane to obtain the maximum signal strength.

### 5.2.2 Used equipment

Equipment	Model No.	Serial No.	Makers	Next Cal Date	Used
Test receiver	ESMI	826210/007	R&S	2003. 3. 08	
	ESCS30	830986/015	R&S	2003. 3.18	
Biconnical antenna	VHA9103	1950	Schwarzbeck	2003. 4. 17	
Log-Periodic antenna	UHALP9108-A1	0393	Schwarzbeck	2003. 4. 17	
Antenna Mast	MA240	N/A	HD	-	
Turn Table	DT430S	N/A	HD	-	
Test site	10m chamber	-	Daetong	-	
	3m chamber	-	Daetong	-	

### 5.2.3 Measurement uncertainty

Radiated emission measurement

30-300MHz +3.96dB / -4.04dB

300-1000MHz +3.04dB / -3.00dB

## 5.2.4 Test data(Upload mode)

Frequency Range [MHz]	Tested Frequency [MHz]	ANT Pol.	Meter Reading [A] [dBuV/m]	Cable Loss [B] [dB]	Antenna Loss [C] [dB]	Results [A+B+C] [dBuV/m]	Margine	Limits [dBuV/m]
30 - 88	71.90	V	23.94	2.10	5.96	32.00	8.00	40
	84.00	V	23.40	2.10	7.60	33.10	6.90	
88-216	96.20	H	22.60	2.30	9.22	34.12	9.38	43.5
	108.30	H	22.44	2.40	11.00	35.84	7.66	
	131.90	H	23.12	2.60	13.86	39.58	3.92	
216-960	276.40	H	20.28	3.60	18.00	41.88	4.12	46.0
	337.00	H	20.23	3.90	13.80	37.93	8.07	
	372.00	H	19.84	3.80	14.31	37.95	8.05	
960-above								54.0

## 5.2.5 Test data(Download mode)

Frequency Range [MHz]	Tested Frequency [MHz]	ANT Pol.	Meter Reading [A] [dBuV/m]	Cable Loss [B] [dB]	Antenna Loss [C] [dB]	Results [A+B+C] [dBuV/m]	Margine	Limits [dBuV/m]
30 - 88	72.12	H	27.80	2.10	5.96	35.86	4.1	40
	84.00	H	26.30	2.10	7.60	36.00	7.5	
88-216	100.20	H	24.10	2.40	8.06	34.56	8.9	43.5
	108.25	H	25.60	2.40	11.00	39.00	4.5	
	144.24	H	22.10	2.60	14.42	39.12	4.4	
216-960	239.90	H	15.70	3.50	16.90	36.10	9.9	46.0
	339.25	H	13.40	3.90	13.80	31.10	14.9	
	375.16	H	14.20	3.80	14.31	32.31	13.7	
	433.34	H	13.00	4.10	15.87	32.97	13.0	
960-above								54.0


## 5.2.6 Test result

Pass

## 6. TEST PHOTOGRAPHS

### Conducted emission

[FRONT]

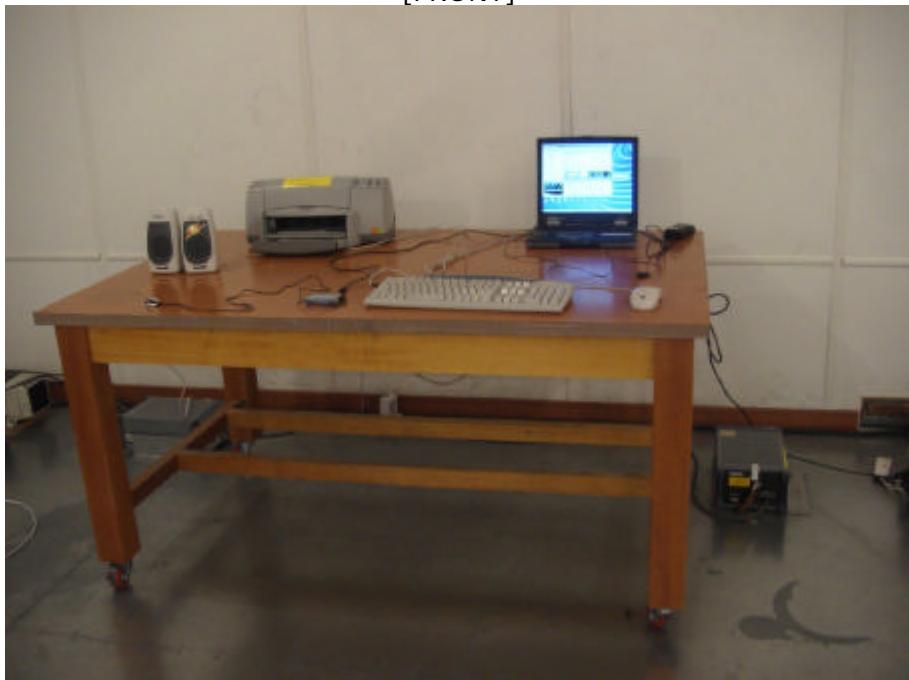


[REAR]



**Radiated emission**

[FRONT]

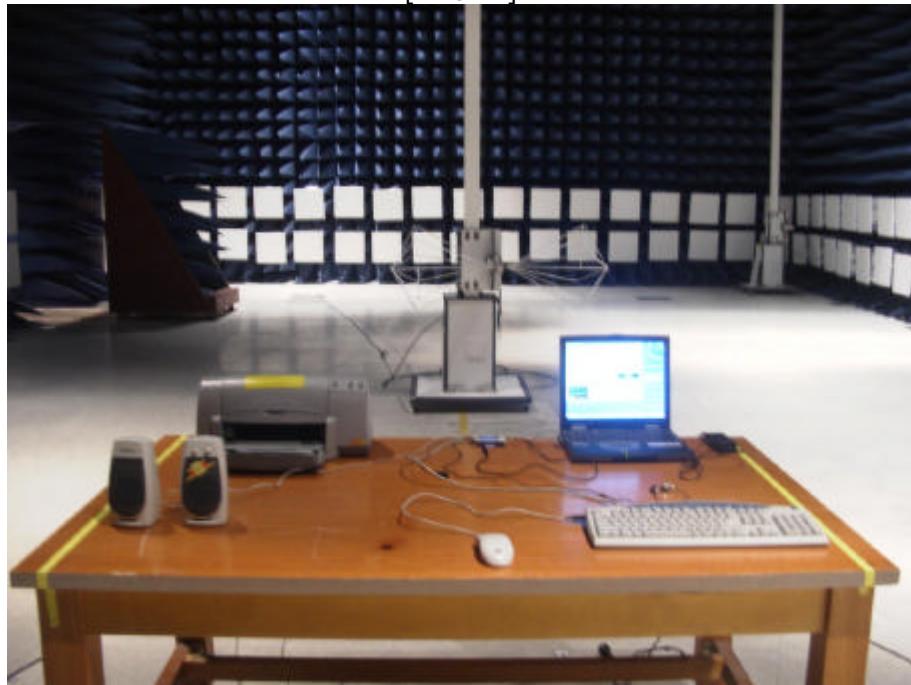

[REAR]

