

Application for FCC Certificate
On Behalf of
Fujian Joinluck Electronic Enterprise Co., Ltd.

Circline Lamp

Model No.: Circline 22W

FCC ID: N6AFJEE0214

Prepared For : Fujian Joinluck Electronic Enterprise Co., Ltd.
Cangshan Industrial Area, Cangshan District, Fuzhou,
Fujian, China

Prepared By : Audix Technology (Shanghai) Co., Ltd.
3F 34Bldg 680 Guiping Rd.,
Caohejing Hi-Tech Park,
Shanghai, China 200233

Tel : +86-21-64955500

Fax : +86-21-64955491

Report No. : ACI-F02089
Date of Test : Aug 20, 2002
Date of Report : Aug 29, 2002

TABLE OF CONTENTS

	Page
1 GENERAL INFORMATION.....	4
1.1 Description of Equipment Under Test.....	4
1.2 Description of Test Facility	4
1.3 Measurement Uncertainty	4
2 AC POWERLINE CONDUCTED EMISSION TEST	5
2.1 Test Equipment.....	5
2.2 Block Diagram of Test Setup	5
2.3 Conducted Emission Limits	5
2.4 Test Configuration.....	6
2.5 Operating Condition of EUT	6
2.6 Test Procedures	6
2.7 Test Results	7
3 FIELD STRENGTH TEST	8
3.1 Test Equipment.....	8
3.2 Block Diagram of Test Setup	8
3.3 Test Configuration.....	8
3.4 Operating Condition of EUT	8
3.5 Test Procedure	9
3.6 Test Result.....	9

TEST REPORT FOR FCC CERTIFICATE

Applicant : Fujian Joinluck Electronic Enterprise Co., Ltd.
Manufacturer : Fujian Joinluck Electronic Enterprise Co., Ltd.
EUT Description : Circline Lamp
(A) Model No.:
Circline 22W
(B) Serial No.:
E080501
(C) Power Supply: 120V/60Hz

Test Procedure Used:

*FCC RULES AND REGULATIONS PART 18 CONSUMER DEVICES (2000)
AND MP-5/1986*

The device described above is tested by Audix Technology (Shanghai) Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 18 RF Lighting Device limits both conducted emissions and field strength.

The test results are contained in this test report and Audix Technology (Shanghai) Co., Ltd. is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliant with the FCC official limits.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Audix Technology (Shanghai) Co., Ltd.

This report must not be used by the applicant to claim product endorsement by NVLAP or any agency of the U.S. Government.

Date of Test : Aug 20, 2002

Prepared by : Jean Liu 2002.9.5 Test Engineer : Lorenzo Chen 2002.9.5
JEAN LIU LORENZO CHEN
(Assistant) (Engineer)

Reviewer : Byron Kwo 08 Sep 02 Approved Signatory : Alex Chiou 2002.9.5
BYRON KWO ALEX CHIU
(Supervisor) (Assistant Manager)

1 GENERAL INFORMATION

1.1 Description of Equipment Under Test

Description : Circline Lamp

Type of EUT : ☒ Production ☐ Pre-product ☐ Pro-type

Model Number : Circline 22W

Applicant : Fujian Joinluck Electronic Enterprise Co., Ltd.
Cangshan Industrial Area, Cangshan District, Fuzhou,
Fujian, China

Manufacturer : Fujian Joinluck Electronic Enterprise Co., Ltd.
Cangshan Industrial Area, Cangshan District, Fuzhou,
Fujian, China

Test Model	Apparent Power (V • A)	Real Power (W)
Circline 22W	37.806	19.47

1.2 Description of Test Facility

Site Description : Sept. 17, 1998 file on
(Semi-Anechoic Chamber) Federal Communications Commission
FCC Engineering Laboratory
7435 Oakland Mills Road
Columbia, MD 21046, USA

Name of Firm : Audix Technology (Shanghai) Co., Ltd.

Site Location : 3F 34Bldg 680 Guiping Rd.,
Caohejing Hi-Tech Park,
Shanghai, China 200233

NVLAP Lab Code : 200371-0

1.3 Measurement Uncertainty

Conducted Emission Uncertainty : $U = \pm 2.66\text{dB}$


2 AC POWERLINE CONDUCTED EMISSION TEST

2.1 Test Equipment

The following test equipment are used during the powerline conducted emission test in a shielded room:

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESHS10	844077/007	Jun 04, 2002	1 Year
2.	Line Impedance Stabilization Network (LISN)	Kyoritsu	KNW-407	8-1280-5	May 09, 2002	1 Year

2.2 Block Diagram of Test Setup

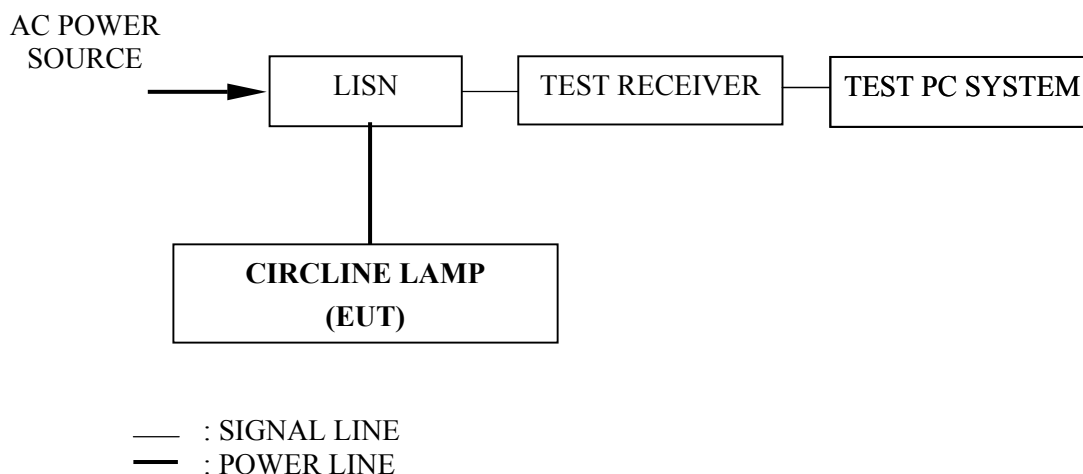

2.3 Conducted Emission Limits

Frequency (MHz)	Maximum RF Line Voltage	
	(μ V)	dB(μ V)
0.45 ~ 2.51	250	48
2.51 ~ 3	3000	70
3 ~ 30	250	48
NOTE 1 – RF Line Voltage dB (μ V) = 20 log RF Line Voltage (μ V) NOTE 2 – The tighter limits shall apply at the boundary between two frequency ranges.		

2.4 Test Configuration

The EUT (listed in Sec. 1.1) was installed as shown on Sec. 2.2 to meet FCC requirement and operating in a manner which tends to maximize its emission level in a normal application.

2.5 Operating Condition of EUT

2.5.1 Setup the EUT as shown in Sec. 2.2.

2.5.2 Turn on the power of all equipment.

2.5.3 The EUT will be operated normally.

2.6 Test Procedures

The EUT was connected to the power mains through a Line Impedance Stabilization Network (LISN). This provided a 50 ohm coupling impedance for the measuring equipment.

Both sides of AC line were checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables were changed or manipulated according to MP-5/1986 during conducted emission test.

The IF bandwidth of Test Receiver ESHS10 was set at 10 kHz.

The frequency range from 450 kHz to 30 MHz was checked.

The test mode (ON) was done on conducted test and the test results of the highest emissions are listed in Sec. 2.7.

2.7 Test Results

< PASS >

The frequency and amplitude of the highest AC powerline conducted emissions relative to the limit is reported. All emissions not reported below are too low against the prescribed limits.

EUT : Circline Lamp Temperature : 21.8°C

Model No. : Circline 22W Humidity : 53%

Test Mode : ON Date of Test : Aug 20, 2002

Test Line	Frequency (MHz)	Factor (dB)	Meter Reading dB(μV)	Emission Level dB(μV)	Limits dB(μV)	Margin (dB)
VA	0.508	0.06	41.79	41.85	48.00	6.15
	0.676	0.03	42.72	42.75	48.00	5.25
	1.013	0.05	43.62	43.67	48.00	4.33
	1.481	0.05	41.20	41.25	48.00	6.75
	2.240	0.05	45.55	45.60	48.00	2.40
	13.780	0.28	29.84.	30.12	48.00	17.80
VB	0.510	0.09	40.71	40.80	48.00	7.2
	0.845	0.08	42.44	42.52	48.00	5.48
	1.099	0.08	43.91	43.99	48.00	4.01
	2.325	0.10	45.64	45.74	48.00	2.26
	7.127	0.10	25.70	25.80	48.00	22.20
	14.919	0.31	34.26	34.57	48.00	13.43

NOTE 1 – Emission Level = Meter Reading + Factor

NOTE 2 – Factor = Insertion Loss + Cable Loss

NOTE 3 – All reading are Quasi-Peak Values.

NOTE 4 – The worst emission is detected at 2.325 MHz with corrected signal level of 45.74dB(μV) (limit is 48.00 dB(μV)), when the VB of the EUT is connected to LISN.

NOTE 5 –At the frequency 2.240MHz (VA) and 2.325MHz (VB), the measured result is below the specification limit by a margin less than the measurement uncertainty, it is not therefore possible to determine compliance at a level of confidence of 95%. However, the measured result indicates a higher probability that the product tested complies with the specification limit.

TEST ENGINEER: Lorenzo
(LORENZO CHEN)


3 FIELD STRENGTH TEST

3.1 Test Equipment

The following test equipment are used during the field strength test in a shielded room:

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Loop Antenna	Laplace	RF300	5001	Apr 22, 2002	1/2 Year
2.	Test Receiver	Rohde & Schwarz	ESHS10	844077/007	Jun 04, 2002	1 Year

3.2 Block Diagram of Test Setup

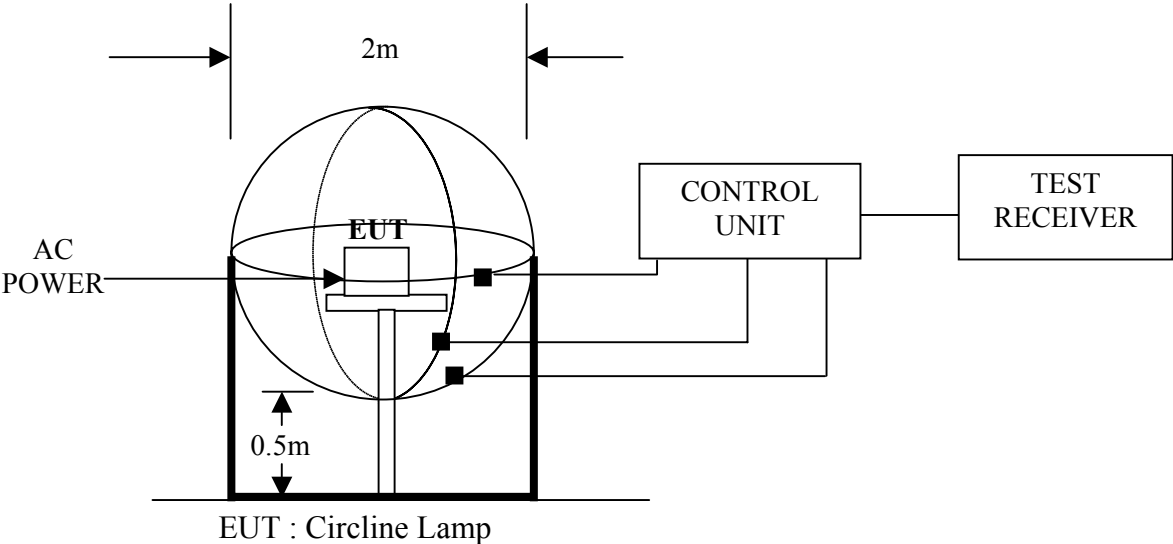

3.3 Test Configuration

The configuration of the EUT is same as those used in conducted emission test. Refer to Sec. 2.4, except the test setup replaced by Sec. 3.2.

3.4 Operating Condition of EUT

Same as conducted emission test which is listed in Sec. 2.5, except the test setup replaced by Sec. 3.2.

3.5 Test Procedure

The EUT was placed on a wooden table, which is in the center of the loop antenna. The loop antenna is 0.5 meters above the ground. Each side had one sensor. The three sensors were through the control unit to connect the Test receiver, which receiving the emission and find out the maximum emission of each side of the loop antenna.

The IF bandwidth of R&S Test Receiver ESHS10 was set at 200 Hz from 9kHz to 150kHz and 10kHz from 150 kHz to 30 MHz.

The IF frequency range from 9 kHz to 30 MHz was checked.

The test mode (ON) was done on field strength test and all the test results are listed in Sec. 3.6.

3.6 Test Result

<PASS>

Refer to the following pages.




Audix Technology (Shanghai) Co., Ltd.
敦吉電子(上海)有限公司

3F #34Bldg. No.680 GuiPing Rd.,
CaoHeJing Hi-Tech Park,
Shanghai, China
Tel:+86-21-64955500
Fax:+86-21-64955491
aciemc@audix.com

Data#: 830 File#: C:\emivm\TEST\J\joinluck.emi

Date: 2002-08-20 Time: 16:36:54

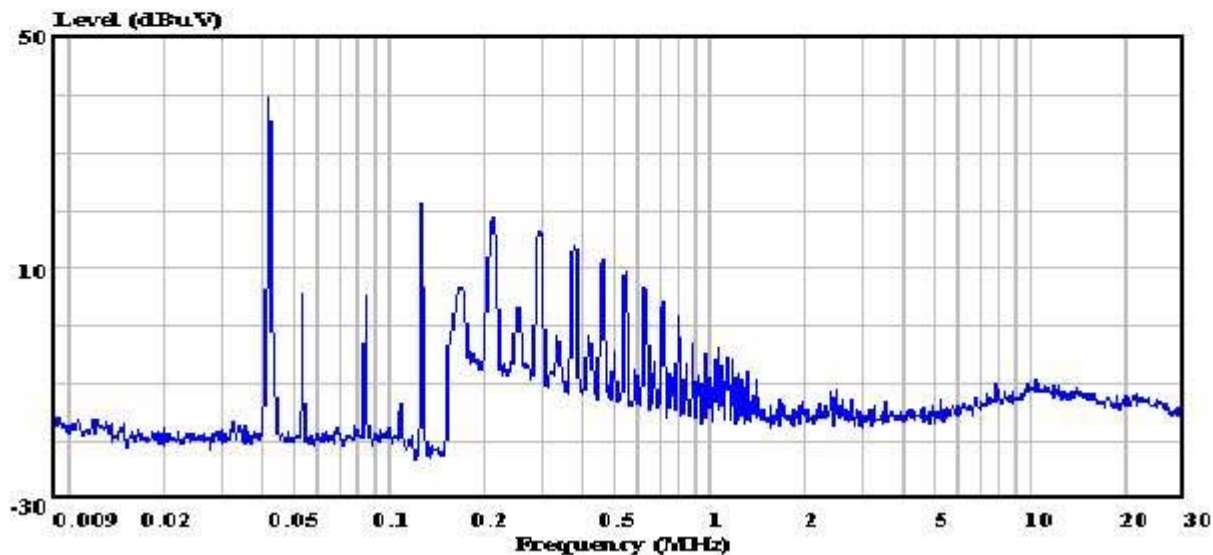

Site : audix-aci Conducted Emission
Condition :
Project No. : AOE-000123
Applicant : Fujian Joinluck Electronic Enterprise
: Co.,Ltd
EUT : Circline Lamp
M/N : Circline 22W
S/N : E080501
Power Supply : 120V/60Hz
Ambient : 21.8'C 53%
Test Line : A
Test Mode : ON
Test Engineer:

: Lorenzo .




Audix Technology (Shanghai) Co., Ltd.
敦吉電子(上海)有限公司

3F #34Bldg. No.680 GuiPing Rd.,
CaoHeJing Hi-Tech Park,
Shanghai, China
Tel:+86-21-64955500
Fax:+86-21-64955491
aciemc@audix.com

Data#: 827 File#: C:\emivm\TEST\J\joinluck.emi

Date: 2002-08-20 Time: 16:32:00

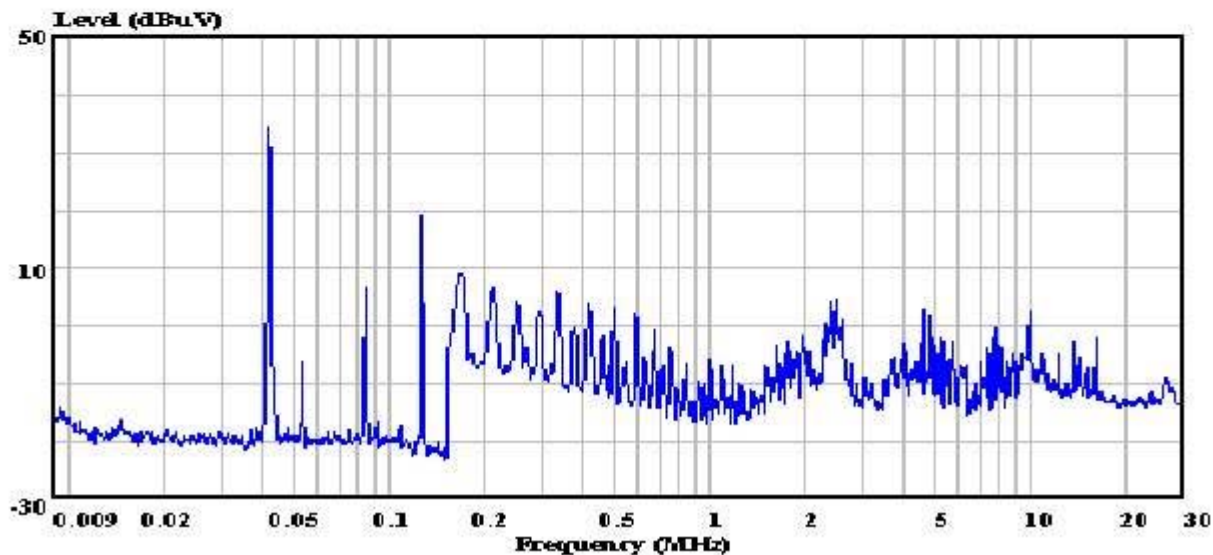

Site : audix-aci Conducted Emission
Condition :
Project No. : AOE-000123
Applicant : Fujian Joinluck Electronic Enterprise
: Co.,Ltd
EUT : Circline Lamp
M/N : Circline 22W
S/N : E080501
Power Supply : 120V/60Hz
Ambient : 21.8'C 53%
Test Line : B
Test Mode : ON
Test Engineer: *lorenzo*




Audix Technology (Shanghai) Co., Ltd.
敦吉電子(上海)有限公司

3F #34Bldg. No.680 GuiPing Rd.,
CaoHeJing Hi-Tech Park,
Shanghai, China
Tel:+86-21-64955500
Fax:+86-21-64955491
aciemc@audix.com

Data#: 824 File#: C:\emivm\TEST\J\joinluck.emi

Date: 2002-08-20 Time: 16:28:11

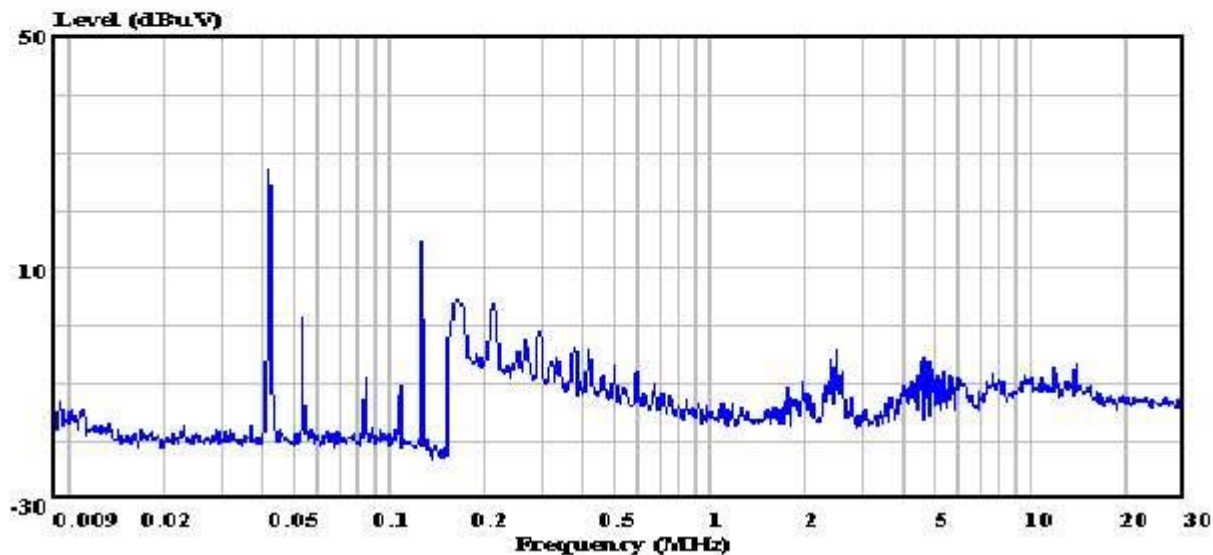

Site : audix-aci Conducted Emission
Condition :
Project No. : AOE-000123
Applicant : Fujian Joinluck Electronic Enterprise
: Co.,Ltd
EUT : Circline Lamp
M/N : Circline 22W
S/N : E080501
Power Supply : 120V/60Hz
Ambient : 21.8'C 53%
Test Line : C
Test Mode : ON
Test Engineer:

: Lorenzo .