

Page: 1 of 62

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT





Applicant: Silex Technology, Inc.

2-3-1 Hikaridai, Seika-cho, Soraku-gun, Kyoto 619-0237, Ja-

pan

Manufacturer: Silex Technology, Inc.

2-3-1 Hikaridai, Seika-cho, Soraku-gun, Kyoto 619-0237, Ja-

Embedded wireless module **Product Name:**

Brand Name: Silex Technology

Model No.: SX-PCEAX

Report Number: TERF2304001052ER

FCC ID N6C-PCEAX

IC: 4908A-PCEAX

Date of EUT Received: April 26, 2023

Date of Test: April 27, 2023~June 16, 2023

Issue Date: November 23, 2023

Approved By

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. Central RF Lab The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10:2013 and the energy emitted by the sample EUT comply with FCC rule part §15.247, ISED RSS-247.

The results of this report relate only to the sample identified in this report.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

Member of SGS Group



Page: 2 of 62

Revision History						
Report Number	Revision	Description	Issue Date	Revised By	Remark	
TERF2304001052ER	00	Original	November 03, 2023	Yami Kuo		
TERF2304001052ER	01	Revise the Firm- ware Version	November 23, 2023	Yami Kuo	*	

Note:

1 . The remark "*" indicates modification of the report upon requests from certification body.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有的用,他都是结果做新测验之样具色素,同时他接具做是例如于。木型生产概率从同事而连可,不可如必指制。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 3 of 62

Contents

1	GENERAL INFORMATION	4
2	SYSTEM TEST CONFIGURATION	7
3	SUMMARY OF TEST RESULTS	10
4	DESCRIPTION OF TEST MODES	11
5	MEASUREMENT UNCERTAINTY	13
6	MEASUREMENT EQUIPMENT USED	14
7	CONDUCTED EMISSION TEST	16
8	PEAK OUTPUT POWER MEASUREMENT	20
9	RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT	23
10	TIME OF OCCUPANCY (DWELL TIME)	58

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd. f (886-2) 2298-0488



Page: 4 of 62

GENERAL INFORMATION

Product Description 1.1

Product Name:	Embedded wireless module
Brand Name:	Silex Technology
Model No.:	SX-PCEAX
Hardware Version:	N/A
Firmware Version:	HY103710
EUT Series No.:	1CBCEC011DAC
Power Supply:	3.3Vdc
Test Software (Name/Version)	QRCT V4.0.210.0

1.2 **RF Specification**

Radio Technology:	BT BR+EDR
Channel number:	79 channels
Modulation type:	GFSK + π/4DQPSK + 8DPSK
Transmit Power:	13.11 dBm
Frequency Range:	2.402GHz – 2.480GHz
Dwell Time:	≦ 0.4s

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 5 of 62

Antenna Designation

Antenna Type	Supplier	Antenna Part No.	Freq. (MHz)	Peak Antenna Gain (dBi)
Mananala	2J antennas	2JZ74	2402 - 2480	4.9
Monopole	Taoglas	GW.05.0153	2402 - 2480	3.686

Note:

- 1. Pre-scanned was done on the above antennas, measurements were demonstrated by using the antenna with the highest gain as the worst case scenarios.
- Antenna information is provided by the applicant.
- 3. As per section F. 2). e). (ii) of FCC KDB 662911 D01 If antenna gains are not equal and each transmit antenna is driven by only one spatial stream, directional gain may be calculated by either of the following formulas.

• Directional Gain =
$$10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SSS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^{2}}{N_{ANT}} \right]$$

where

Each antenna is driven by no more than one spatial stream;

NSS = the number of independent spatial streams of data;

NANT = the total number of antennas

 $g_{i,k} = /20$ 10Gk if the kth antenna is being fed by spatial stream j, or zero if it is not; Gk is the gain in dBi of the kth antenna.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 6 of 62

1.4 Test Methodology of Applied Standards

FCC Part 15, Subpart C §15.247 FCC KDB 558074 D01 15.247 Meas. Guidance v05r02 RSS-247 issue 2 Feb. 2017 RSS-Gen, Issue 5 April 2018 ANSI C63.10:2013

1.5 Test Facility

Laboratory	Test Site Address	Test Site Name	FCC Designa- tion number	IC CAB identifier		
		SAC 1				
		SAC 2				
		SAC 3				
	No 124 Wu Kung Bood New Toingi	Conduction 1				
	No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New	Conducted 1	TW0027			
	Taipei City, Taiwan.	Conducted 2	1 440027	TW3702		
	Taiper City, Taiwan.	Conducted 3				
		Conducted 4				
		Conducted 5			identifier	
SGS Taiwan Ltd.		Conducted 6		TW3702		
Central RF Lab.		Conduction C		TW3702		
(TAF code 3702)		SAC C				
		SAC D				
	SAC G					
	No 2 Koji 1et Pd. Cujeben Dietriet	Conducted A				
	No.2, Keji 1st Rd., Guishan District, Taoyuan City, Taiwan 333	Conducted B	TW0028			
	ladydair City, Taiwair 555	Conducted C				
		Conducted D				
		Conducted E		identifier		
		Conducted F]			
		Conducted G				

Note: Test site name is remarked on the equipment list in each section of this report as an indication where measurements occurred in specific test site and address.

1.6 Special Accessories

There is no special accessory used while test was conducted.

1.7 Equipment Modifications

There was no modification incorporated into the EUT.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 7 of 62

2 SYSTEM TEST CONFIGURATION

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is a placed on a table which is 0.8 m above ground plane. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz. The CISPR Quasi-Peak and Average detector mode is employed. The two LISNs provide 50uH/50 ohm of coupling impedance for the measuring instrument. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

2.3.2 Conducted Test (RF)

The active antenna port of the unlicensed wireless device is connected to the spectrum analyzer with attenuator to protect the instrumentation. If a second antenna port is available, it is tested at one operating frequency, with other port(s) appropriately terminated, to verify it has similar output characteristics as the fully tested port.

2.3.3 Radiated Emissions

The EUT is a placed on a turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 险非只有的明,此想些结果做新测验之样具合善,同时此样里属是例如于。木型生主概未从司事高纯可,不可可以推测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 8 of 62

2.4 Measurement Results Explanation Example

2.4.1 Radiated Emission Test Sites For Measurements From 9 kHz To 30 MHz

Radiated emission below 30MHz is measured in a 9m*6m*6m semi-ane choic chamber, the measurements correspond to those obtained at an open-field test site.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

2.4.2 For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuation factor between EUT conducted port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly EUT RF output level.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有铅明,此数华红用摄影测过之样只有含,同时此样只属是例如于。大数华土德太公司隶而连可,不可如公海测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


SGS Taiwan Ltd.



Page: 9 of 62



2.5 **Test Configuration**

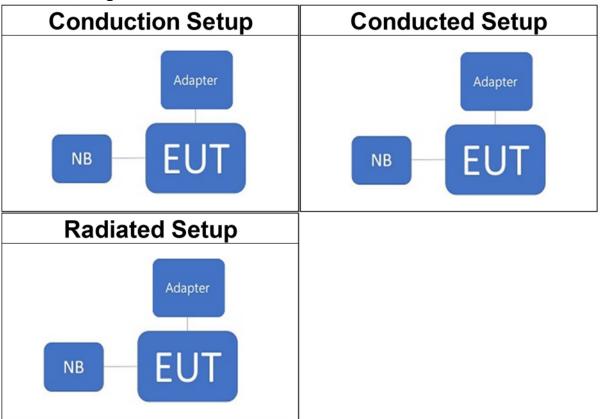

2.6 Control Unit(s)

AC Power-Line Conducted Emission Test Site: Conduction 1						
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.	
Notebook	Lenovo	L480	PF-1D07MD 19/08	N/A	N/A	
Adapter	EDAC	EA10682N-120	N/A	N/A	N/A	
	C	Conducted Emission	Test Site: Conducted	1		
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.	
Adapter	EDAC	EA10682N-120	N/A	N/A	N/A	
Notebook	Lenovo	T430S	R9-WW5EG 13/0	N/A	N/A	
	Radiated Emission Test Site: SAC 2					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.	
Notebook	Lenovo	L480	PF-1D07MD 19/08	N/A	N/A	
Adapter	EDAC	EA10682N-120	N/A	N/A	N/A	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 10 of 62

3 SUMMARY OF TEST RESULTS

FCC Rules	ISED Rules	Description Of Test	Result
§15.207(a)	RSS-Gen §8.8	AC Power Line Conducted Emission	Compliant
§15.247(b)(1)	RSS-247 §5.4 b	Peak Output Power	Compliant
§15.205 §15.209 §15.247(d)	RSS-247 §5.5 RSS-Gen §8.9 RSS-Gen §8.10	Conducted & Radiated Band Edge and Spurious Emission	Compliant
§15.247(a)(1)(iii)	RSS-247 §5.1 d	Time of Occupancy	Compliant

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有铅明,此就是结果做新加速之緣具有書,同時此樣具備是例如于。大規集主權大公司書面對可,不可可以猶剩。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 11 of 62

DESCRIPTION OF TEST MODES

4.1 Operated in 2400 ~ 2483.5MHz Band

79 channels are provided for Bluetooth

ITEM	FREQUENCY	ITEM	FREQUENCY	ITEM	FREQUENCY	ITEM	FREQUENCY
1	2402 MHz	21	2422 MHz	41	2442 MHz	61	2462 MHz
2	2403 MHz	22	2423 MHz	42	2443 MHz	62	2463 MHz
3	2404 MHz	23	2424 MHz	43	2444 MHz	63	2464 MHz
4	2405 MHz	24	2425 MHz	44	2445 MHz	64	2465 MHz
5	2406 MHz	25	2426 MHz	45	2446 MHz	65	2466 MHz
6	2407 MHz	26	2427 MHz	46	2447 MHz	66	2467 MHz
7	2408 MHz	27	2428 MHz	47	2448 MHz	67	2468 MHz
8	2409 MHz	28	2429 MHz	48	2449 MHz	68	2469 MHz
9	2410 MHz	29	2430 MHz	49	2450 MHz	69	2470 MHz
10	2411 MHz	30	2431 MHz	50	2451 MHz	70	2471 MHz
11	2412 MHz	31	2432 MHz	51	2452 MHz	71	2472 MHz
12	2413 MHz	32	2433 MHz	52	2453 MHz	72	2473 MHz
13	2414 MHz	33	2434 MHz	53	2454 MHz	73	2474 MHz
14	2415 MHz	34	2435 MHz	54	2455 MHz	74	2475 MHz
15	2416 MHz	35	2436 MHz	55	2456 MHz	75	2476 MHz
16	2417 MHz	36	2437 MHz	56	2457 MHz	76	2477 MHz
17	2418 MHz	37	2438 MHz	57	2458 MHz	77	2478 MHz
18	2419 MHz	38	2439 MHz	58	2459 MHz	78	2479 MHz
19	2420 MHz	39	2440 MHz	59	2460 MHz	79	2480 MHz
20	2421 MHz	40	2441 MHz	60	2461 MHz		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 12 of 62

The Worst Test Modes and Channel Details

- The EUT has been tested under operating condition.
- Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.
- The field strength of radiated emission was measured as the EUT positioned in different orthogonal planes (E1/E2/H) based on actual usage of the EUT to pre-scan the emissions for determining the worst case scenario.
- Investigation has been done on all the possible configurations for searching the worst case.

ANTNNA PORT CONDUCTED TEST					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	PACKET TYPE	
	Peak Output Power				
	0 to 78	0,39,78	GFSK	DH5	
Bluetooth	0 to 78	0,39,78	π/4-DQPSK	2DH5	
	0 to 78	0,39,78	8-DPSK	3DH5	
	Time	of Occupancy(Dv	vell time)		
			GFSK	DH1/DH3/DH5	
Bluetooth	0 to 78	39	π/4-DQPSK	2DH1/2DH3/2DH5	
			8-DPSK	3DH1/3DH3/3DH5	
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	PACKET TYPE	
	PADIATED	EMISSION TEST	(PELOW 1 CH-)		

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	PACKET TYPE	
RADIATED EMISSION TEST (BELOW 1 GHz)					
Bluetooth	0 to 78	39	GFSK	DH5	
	RADIATED EMISSION TEST (ABOVE 1 GHz)				
Bluetooth	0 to 78	0,39,78	GFSK/8-DPSK	DH5/3DH5	

Note: The field strength of radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for channel Low, Mid and High, the worst case position was reported.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 13 of 62

5 MEASUREMENT UNCERTAINTY

Test Items		Incertair	nty
AC Power Line Conducted Emission	+/-	2.32	dB
Output Power measurement	+/-	1	dB
Emission Bandwidth		1.53	Hz
Undesignable radiated emission measurement		1.68	dB
Frequency Separation		1.53	Hz
Number of hopping frequency		1.53	Hz
Time of Occupancy		1.53	Hz
Temperature		0.7	°C
Humidity		3	%
DC / AC Power Source		1	%

Radiated Spurious Emission Measurement Uncertainty							
	+/-	2.8	dB	9kHz~30MHz			
Polarization: Vertical	+/-	4.82	dB	30MHz - 1000MHz			
Polarization, vertical	+/-	4.37	dB	1GHz - 18GHz			
	+/-	- 4.21 dB 18GHz - 40GHz					
	+/-	2.8	dB	9kHz~30MHz			
Polarization: Horizontal	+/-	4.54	dB	30MHz - 1000MHz			
Foianzation. Honzontal	+/-	4.37	dB	1GHz - 18GHz			
	+/-	4.21	dB	18GHz - 40GHz			

Note:

- 1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 2. The conformity assessment statement in this report is based solely on the test results, measurement uncertainty is excluded.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format

documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 14 of 62

MEASUREMENT EQUIPMENT USED

6.1 **Emission from AC power line**

	iduction 1				
EQUIPMENT TYPE MFR		MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Test Software	Audix	e3	Ver. 9.210616	N.C.R	N.C.R
LISN	SCHWARZBECK	NSLK 8127	1040	08/23/2022	08/22/2023
Coaxial Cables	EMC Instruments Corp.	EMCCFD300-BM- BM-3000	161207	06/22/2022	06/21/2023
Pulse Limiter	SCHWARZBECK	VTSD 9561F-N	793	06/22/2022	06/21/2023
EMI Test Receiver	R&S	ESR 7	102525	02/18/2023	02/17/2024

6.2 **Conducted Measurement**

Conducted Emission Test Site: Conducted 1							
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.		
EXA Spectrum Analyzer	KEYSIGHT	N9010B	MY60240503	12/13/2022	12/12/2023		
Test Software	SGS	Radio Test Software	Ver. 21	N.C.R	N.C.R		
Power Meter	Anritsu	ML2496A	1242004	10/26/2022	10/25/2023		
Power Sensor	Anritsu	MA2411B	1207365	10/26/2022	10/25/2023		
DC Block	Mini-Circuits	BLK-18-S+	1	12/13/2022	12/12/2023		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 15 of 62

6.3 **Radiated Measurement**

Radiated Emission Test Site: SAC 2					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Horn Antenna	SCHWARZBECK	BBHA9170	184	12/30/2022	12/29/2023
Loop Antenna	ETS.LINDGREN	6502	148045	10/05/2022	10/04/2023
Horn Antenna	RF SPIN	DRH18-E	210303A18-ES	02/24/2023	02/23/2024
Bi-log Antenna	SCHWARZBECK	VULB9168	9168-1278	03/09/2023	03/08/2024
EXA Spectrum Analyzer	KEYSIGHT	N9010B	MY60242392	12/20/2022	12/19/2023
Test Software	Audix	e3	Ver. 9.210616	N.C.R	N.C.R
EMI Test Receiver	R&S	ESR 7	102525	02/18/2023	02/17/2024
Site Cal	SGS	SAC 2	N/A	08/31/2022	08/30/2023
Pre-Amplifier	EMCI	EMC184045B	980135	10/27/2022	10/26/2023
Pre-Amplifier	EMCI	EMC330N	980826	08/31/2022	08/30/2023
Pre-Amplifier	EMCI	EMC118A45SEE	980867	08/31/2022	08/30/2023
Attenuator	Mini-Circuit	BW-S10W2+	2	12/13/2022	12/12/2023
Bandreject Filter 2400-2483.5	EWT	EWT-14-0166	M1	12/13/2022	12/12/2023
4GHz High Pass Filter	WI	WHKX4.0/18G-10SS	WHKX4.0/18G-10SS	12/13/2022	12/12/2023
Coaxial Cable	Huber Suhner	SUCOFLEX 102	MY2630/2	12/23/2022	12/22/2023
Coaxial Cable	Huber Suhner	SUCOFLEX 102	MY22962/2	12/23/2022	12/22/2023
Coaxial Cables	EMCI	EMCCFD400-NM- NM-10000	RX Cable below 1G (220238)	08/31/2022	08/30/2023
Coaxial Cables	EMCI	EMC104-SM-SM- 600	RX Cable below 1G (220237)	08/31/2022	08/30/2023
Coaxial Cables	EMCI	EMC105-SM-SM- 2000	RX Cable below 1G (220910)	08/31/2022	08/30/2023
Coaxial Cables	EMCI	EMC104-SM-SM- 10000	RX Cable above 1G (220236)	08/31/2022	08/30/2023
Coaxial Cables	EMCI	EMC105-SM-SM- 1000	RX Cable above 1G (201211)	08/31/2022	08/30/2023
Coaxial Cables	EMCI	EMC105-SM-SM- 1500	RX Cable above 1G (220906)	08/31/2022	08/30/2023
Coaxial Cables	EMCI	EMC105-SM-SM- 2000	RX Cable above 1G (220909)	08/31/2022	08/30/2023
Coaxial Cables	EMCI	EMCCFD400-NM- NM-10000	RX Cable below 30M (220238)	08/31/2022	08/30/2023
Coaxial Cables	EMCI	EMC105-SM-SM- 2000	RX Cable below 30M (220910)	08/31/2022	08/30/2023

NOTE: N.C.R refers to Not Calibrated Required.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 16 of 62



7 CONDUCTED EMISSION TEST

7.1 Standard Applicable

Frequency within 150 kHz to 30MHz shall not exceed the limit table as below.

Frequency range		nits (uV)
MHz	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50


Note

- 1. The lower limit shall apply at the transition frequencies
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

7.2 EUT Setup:

- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.10:2013.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
- 3. The LISN was connected with 120Vac/60Hz power source.

7.3 Test Setup

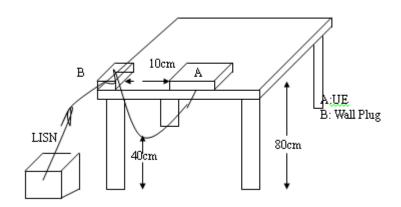

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除业只有约明,此程生处用度影响经少锋中乌害,同时此类早度原列的主,大司如公海侧。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.: 台灣檢驗科技股份有限公司 t (88



Page: 17 of 62

Measurement Procedure

- 1. The EUT was placed on a table which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all frequency measured were complete.

7.5 **Measurement Result**

Note: Refer to next page for measurement data and plots.

Note2: The * reveals the worst-case results that closest to the limit.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 18 of 62


AC POWER LINE CONDUCTED EMISSION TEST DATA

Report Number :TERF2304001052ER Test Site :Conduction 1

Operation Mode :BT Test Date :2023-06-16

Power :120V/60Hz Temp./Humi. :24.6°C/65%

Probe :L Engineer :Ricky Chen

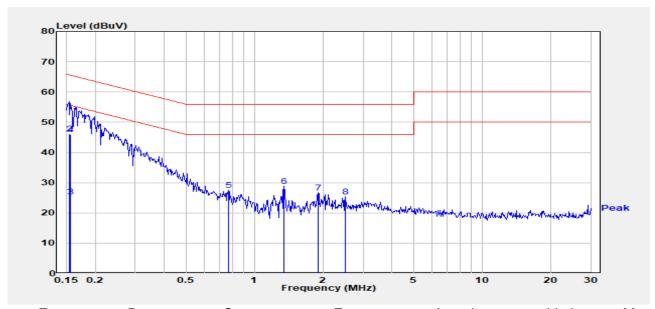

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit	Margin
MHz	PK/QP/AV	dΒμV	dB	dΒμV	dΒμV	dB
0.153	Average	15.23	10.25	25.48	55.81	-30.33
0.153	QP	35.89	10.25	46.14	65.81	-19.67
0.156	Average	15.13	10.25	25.38	55.68	-30.30
0.156	QP	35.72	10.25	45.97	65.68	-19.71
0.770	Peak	17.15	10.32	27.47	56.00	-28.53
1.349	Peak	18.27	10.67	28.94	56.00	-27.06
1.905	Peak	15.59	11.03	26.62	56.00	-29.38
2.512	Peak	14.40	10.94	25.34	56.00	-30.66

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除业只有约明,此程生处用度影响经少锋中乌害,同时此类早度原列的主,大司如公海侧。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Ro 台灣檢驗科技股份有限公司 t (886-2) 2299-3279




Page: 19 of 62

Report Number :TERF2304001052ER

Test Site :Conduction 1 Operation Mode :BT Test Date :2023-06-16

Temp./Humi. :24.6°C/65% Power :120V/60Hz

Probe :N Engineer :Ricky Chen

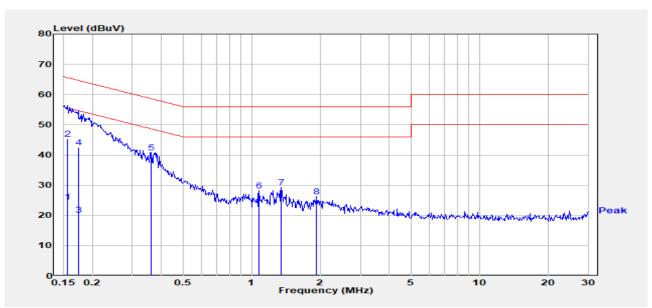

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit	Margin
MHz	PK/QP/AV	dΒμV	dB	dΒμV	dΒμV	dB
0.156	Average	14.23	10.25	24.48	55.68	-31.20
0.156	QP	35.16	10.25	45.41	65.68	-20.27
0.174	Average	9.87	10.25	20.12	54.79	-34.67
0.174	QP	32.14	10.25	42.39	64.79	-22.40
0.363	Peak	30.50	10.25	40.75	58.67	-17.91
1.079	Peak	17.69	10.44	28.13	56.00	-27.87
1.349	Peak	18.65	10.67	29.32	56.00	-26.68
1.935	Peak	15.10	11.05	26.15	56.00	-29.85

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.

www.sqs.com.tw



Page: 20 of 62


PEAK OUTPUT POWER MEASUREMENT

8.1 Standard Applicable

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, The Limit: 1Watt. For all other frequency hopping systems in the 2400 - 2483.5MHz band: The Limit: 0.125 Watts. The power limit for 1Mbps is 1watt, and 2Mbps, 3Mbps and AFH mode are 0.125 watts.

The e.i.r.p. shall not exceed 4 W.

8.2 **Test Setup**



8.3 **Measurement Procedure:**

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows ANSI C63.10 Measurement Guidelines.
- Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter or spectrum. (Max Hold, Detector = Peak, RBW >=20dB bandwidth)
- 4. Record the max. reading.
- 5. Repeat above procedures until all default test channel is completed.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 21 of 62

Peak & Average Power Measurement Result

IIII DIX IIIOGC	(i cak).				
СН	Freq. (MHz)	Power set	Peak Output Power (dBm)	Output Power (mW)	Limit (mW)
Low	2402	10	13.11	20.464	1000
Mid	2441	10	12.70	18.621	1000
High	2480	10	12.84	19.231	1000

1M BR mode (Average):

	•	O ,				
СН		Freq. (MHz)	Power set	Avg. Output Power (dBm)	Output Power (mW)	Limit (mW)
Low		2402	10	12.94	19.679	1000
Mid		2441	10	12.51	17.824	1000
High		2480	10	12.64	18.365	1000

2M EDR mode (Peak):

СН	Freq. (MHz)	Power set	Peak Output Power (dBm)	Output Power (mW)	Limit (mW)
Low	2402	10	12.50	17.783	125
Mid	2441	10	12.08	16.144	125
High	2480	10	12.08	16.144	125

2M EDR mode (Average):

	. (3 -)				
СН	Freq. (MHz)	Power set	Avg. Output Power (dBm)	Output Power (mW)	Limit (mW)
Low	2402	10	10.16	10.375	125
Mid	2441	10	9.72	9.376	125
High	2480	10	9.69	9.311	125

3M EDR mode (Peak):

СН	Freq. (MHz)	Power set	Peak Output Power (dBm)	Output Power (mW)	Limit (mW)
Low	2402	10	12.90	19.498	125
Mid	2441	10	12.51	17.824	125
High	2480	10	12.66	18.450	125

3M EDR mode (Average):

СН	Freq. (MHz)	Power set	Avg. Output Power (dBm)	Output Power (mW)	Limit (mW)
Low	2402	10	10.09	10.209	125
Mid	2441	10	9.60	9.120	125
High	2480	10	9.80	9.550	125

*Note: Max. Output include tune up tolerance Power measured by using average detector.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 22 of 62

8.5 EIRP Measurement Result

1M BR mode EIRP

Channel	Frequency (MHz)	Power set	Avg. Output Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	Limit (mW)
Low	2402	10	12.94	4.90	60.814	4000
Mid	2441	10	12.51	4.90	55.081	4000
High	2480	10	12.64	4.90	56.754	4000

2M EDR mode EIRP

Channel	Frequency (MHz)	Power set	Avg. Output Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	Limit (mW)
Low	2402	10	10.16	4.90	32.063	4000
Mid	2441	10	9.72	4.90	28.973	4000
High	2480	10	9.69	4.90	28.774	4000

3M EDR mode EIRP

Channel	Frequency (MHz)	Power set	Avg. Output Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	Limit (mW)
Low	2402	10	10.09	4.90	31.550	4000
Mid	2441	10	9.60	4.90	28.184	4000
High	2480	10	9.80	4.90	29.512	4000

* Note: EIRP = Average Power + Gain

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 23 of 62

9 RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT

9.1 Standard Applicable

9.1.1 Duty Cycle Correction Factor

According to 15. 35(c) and RSS-Gen §8.2, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value. The exact method of calculating the average field strength shall be submitted with any application for certification.

9.1.2 Spurious Emission

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands must also comply with the §15.209 and RSS-Gen §8.9 Table 5 and 6 limit as below.

And according to §15.33(a) (1) & RSS-Gen §6.13.2.a, for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

Frequency (MHz)	Field strength (microvolts/meter)	Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

1. The lower limit shall apply at the transition frequencies.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.




Page: 24 of 62




9.2 Test Setup

9.2.1 Duty Cycle Correction Factor




9.2.2 Radiated Emission

(A) Radiated Emission Test Set-Up, Frequency Below 30MHz.

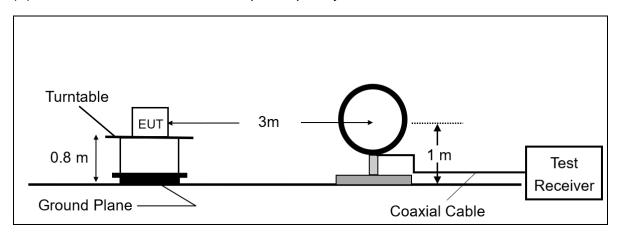

(B) Radiated Emission Test Set-Up, Frequency From 30MHz to 1000MHz.

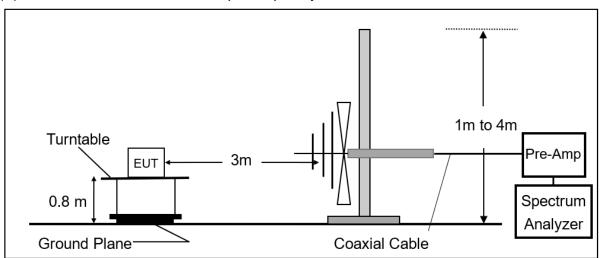

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除业只有约明,此程生处用度影响经少锋中乌害,同时此类早度原列的主,大司如公海侧。


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

oco lalwan Eta.



Page: 25 of 62

(C) Radiated Emission Test Set-Up, Frequency Above 1 GHz.

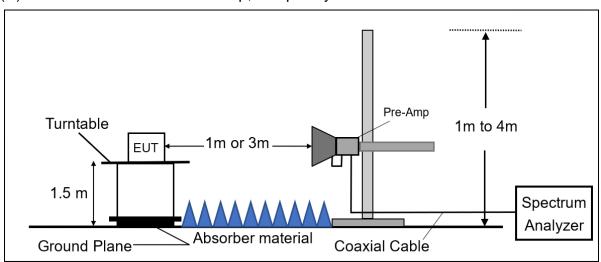

9.3 **Measurement Procedure**

9.3.1 **Duty Cycle Correction Factor**

- 1. Adjust and configure any EUT switches, controls, or input data streams to ensure that the EUT is transmitting or encoded to obtain the "worst-case" pulse ON time.
- 2. The testing follows ANSI C63.10:2013.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set center frequency of spectrum analyzer = operating frequency.
- 5. Set the spectrum analyzer as RBW, VBW=1MHz, 3MHz, Span = 0Hz, Detector = Peak, Adjust Sweep=100ms.
- 6. Repeat above procedures until all frequency of the interest measured were complete.

9.3.2 Radiated Emission

- The testing follows the Measurement Procedure of ANSI C63.10:2013.
- 2. The EUT was placed on a turn table with 0.8m for frequency< 1GHz and 1.5m for frequency> 1GHz above ground plane.
- 3. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 4. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 5. Set the spectrum analyzer as RBW=100 kHz and VBW=300 kHz for Peak Detector (PK) at frequency between 30MHz and 1 GHz.
- 6. Use receiver mode as RBW=120 kHz for Quasi-peak (QP) at frequency between 30MHz and 1 GHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

SGS Taiwan Ltd.



Page: 26 of 62

- 7. Set the spectrum analyzer as RBW=1 MHz, VBW=3 MHz for Maximum Emission Measurements at frequency above 1 GHz.
- 8. According to C63.10:2013 Section 7.5 Procedure for determining the average value of pulsed emissions with duty cycle correction factor 20 log (Ton/100ms).
- 9. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
- 10. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 11. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 12. Repeat above procedures until all default test channel measured were complete.

9.4 **Field Strength Calculation**

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where FS = Field Strength

CL = Cable Attenuation Factor (Cable Loss)

RA = Reading Amplitude

AG = Amplifier Gain

AF = Antenna Factor

The limit of the emission level is expressed in dBuV/m, which converts 20*log(uV/m)

Actual $FS(dB\mu V/m) = SPA$. Reading level(dB μV) + Factor(dB)

Factor(dB) = Antenna Factor(dBµV/m) + Cable Loss(dB) - Pre_Amplifier Gain(dB)

Average value(dBµV/m)=Peak Actual FS(dBµV/m)+ Duty Cycle Correction Factor(dB) Duty Cycle Correction Factor(dB) = 20 log (Ton/100 ms)

9.5 Test Results of Radiated Spurious Emissions form 9 kHz to 30 MHz

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit per 15.31(o) & RSS-GEN §6.13.2 was not reported.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 27 of 62




9.6 Measurement Result:

9.6.1 Duty Cycle Correction Factor

Bluetooth 1M			
Time ON of 100ms:	5.600	ms	
Duty Cycle=5.6ms / 100m	0.056	%	
Duty Cycle correction factor	r=20 LOG 0.056=	-25.04	dB
Bluetooth 3M			
Bluetooth 3M Time ON of 100ms:	5.800	ms	
		ms %	

9.6.2 Duty Cycle test plot

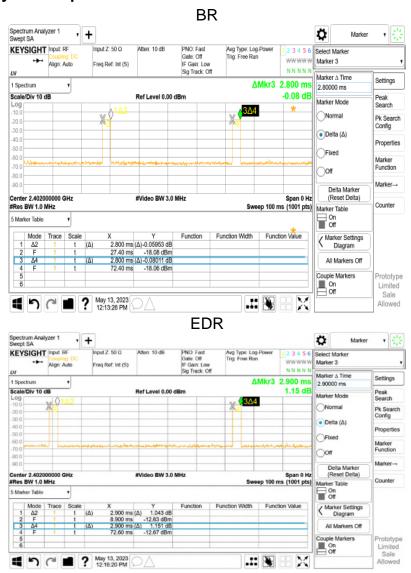

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有铅明,此起华廷田萨科斯学之锋只会考,同既此锋只萨尼阿尔兰。大起华王德大公司史语统可,不可如公特制。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. _I No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號



Page: 28 of 62



9.6.3 Bandedge Result


Report Number :TERF2304001052ER Test Site :SAC 2

Operation Mode :BR Test Date :2023-05-10

Test Frequency :2402 MHz Temp./Humi. :24.3°C/59%

Test Mode :Bandedge Antenna Pol. :Vertical

EUT Pol :H Plane Engineer :Ricky Chen

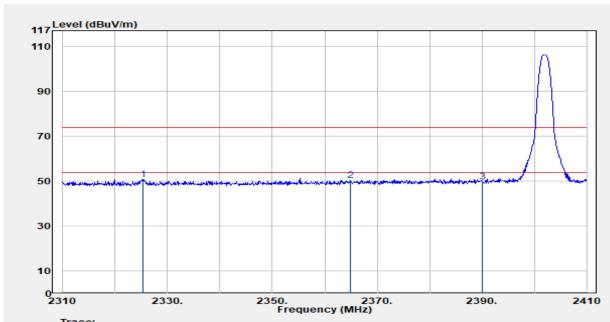

Trace:						
Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dΒμV/m	dBµV/m	dB
2325.300	Peak	55.20	-4.36	50.84	74.00	-23.16
2364.900	Peak	54.75	-4.31	50.44	74.00	-23.56
2390.000	Peak	54.04	-4.17	49.87	74.00	-24.13
Freq.	Detector	Peak Actual		Average	Average	N 4 =
rieq.	Mode	FS	Duty Cycle Factor	Value	•	Margin
MHz			Duty Cycle Factor (dB)	•	Limit@3m (dBuV/m)	(dB)
·	Mode	FS	, ,	Value	Limit@3m	•
·	Mode	FS	, ,	Value	Limit@3m	•
MHz	Mode AV	FS (dBµV/m)	(dB)	Value (dBuV/m)	Limit@3m (dBuV/m)	(dB)
MHz 2325.300	Mode AV Average	FS (dBµV/m) 50.84	-25.04	Value (dBuV/m) 25.80	Limit@3m (dBuV/m) 54.00	(dB) -28.20

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除业只有约明,此程生处用度影响经少锋中乌害,同时此类早度原列的主,大型企业等等。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

<mark>SGS Taiwan Ltd. _| N</mark>o.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號



Page: 29 of 62


Report Number **Test Site** :SAC 2 :TERF2304001052ER

Operation Mode Test Date :2023-05-10 :BR

Test Frequency :2402 MHz Temp./Humi. :24.3°C/59%

Test Mode :Bandedge Antenna Pol. :Horizontal **EUT Pol**

:H Plane Engineer :Ricky Chen

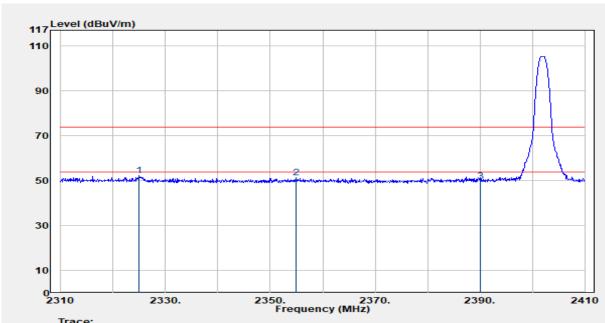

	Trace:						
	Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
_	MHz	PK/QP/AV	dBμV	dB	dBµV/m	dBµV/m	dB
	2325.000	Peak	56.67	-4.36	52.31	74.00	-21.69
	2355.000	Peak	55.61	-4.36	51.25	74.00	-22.75
	2390.000	Peak	53.85	-4.17	49.69	74.00	-24.31
	Freq.	Detector Mode	Peak Actual FS	Duty Cycle Factor	Average Value	Average Limit@3m	Margin
	Freq. MHz			Duty Cycle Factor (dB)		•	Margin (dB)
-	•	Mode	FS		Value	Limit@3m	•
-	•	Mode	FS		Value	Limit@3m	•
-	MHz	Mode AV	FS (dBµV/m)	(dB)	Value (dBuV/m)	Limit@3m (dBuV/m)	(dB)
-	MHz 2325.000	Mode AV Average	FS (dBµV/m) 52.31	-25.04	Value (dBuV/m) 27.27	Limit@3m (dBuV/m) 54.00	-26.73

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 30 of 62


Report Number **Test Site** :SAC 2 :TERF2304001052ER

Operation Mode Test Date :2023-05-10 :BR

Test Frequency :2480 MHz Temp./Humi. :24.3°C/59%

Test Mode :Bandedge Antenna Pol. :Vertical

EUT Pol :H Plane Engineer :Ricky Chen

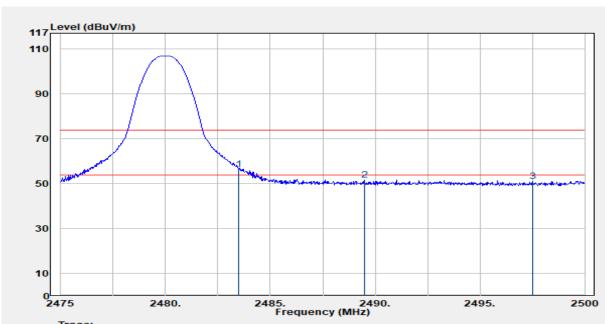

	Trace:						
	Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
	MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
	2483.500	Peak	60.78	-4.26	56.53	74.00	-17.47
	2489.475	Peak	55.81	-4.21	51.60	74.00	-22.40
	2497.500	Peak	55.29	-4.15	51.14	74.00	-22.86
	_		D A		Λ	Λ	
	Freq.	Detector Mode	Peak Actual FS	Duty Cycle Factor	Average Value	Average Limit@3m	Margin
	Freq. MHz			Duty Cycle Factor (dB)	•	•	Margin (dB)
	·	Mode	FS	-	Value	Limit@3m	•
	·	Mode	FS	-	Value	Limit@3m	•
•	MHz	Mode AV	FS (dBµV/m)	(dB)	Value (dBuV/m)	Limit@3m (dBuV/m)	(dB)
٠	MHz 2483.500	Mode AV Average	FS (dBµV/m) 56.53	-25.04	Value (dBuV/m)	Limit@3m (dBuV/m) 54.00	(dB) -22.51

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd. f (886-2) 2298-0488




Page: 31 of 62

Report Number **Test Site** :SAC 2 :TERF2304001052ER

Operation Mode Test Date :2023-05-10 :BR

Test Frequency :2480 MHz Temp./Humi. :24.3°C/59% Test Mode :Bandedge Antenna Pol. :Horizontal

EUT Pol :H Plane Engineer :Ricky Chen

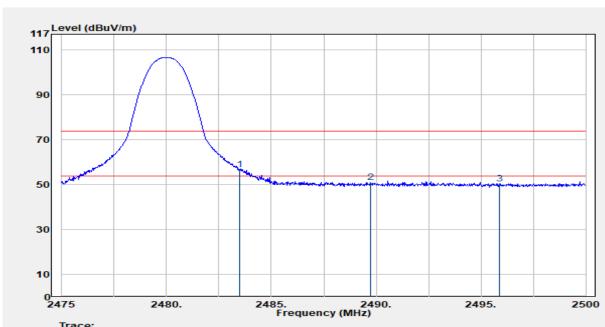

	Irace:						
	Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
	MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
	2483.500	Peak	61.04	-4.26	56.78	74.00	-17.22
	2489.725	Peak	55.29	-4.21	51.08	74.00	-22.92
	2495.875	Peak	54.68	-4.16	50.52	74.00	-23.48
	_		D 1 4 4 1		^	A	
	Freq.	Detector Mode	Peak Actual FS	Duty Cycle Factor	Average Value	Average Limit@3m	Margin
	Freq. MHz			Duty Cycle Factor (dB)	_	•	Margin (dB)
•	·	Mode	FS	, ,	Value	Limit@3m	•
	·	Mode	FS	, ,	Value	Limit@3m	•
	MHz	Mode AV	FS (dBµV/m)	(dB)	Value (dBuV/m)	Limit@3m (dBuV/m)	(dB)
•	MHz 2483.500	Mode AV Average	FS (dBµV/m) 56.78	-25.04	Value (dBuV/m)	Limit@3m (dBuV/m) 54.00	(dB) -22.26

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Page: 32 of 62

Report Number **Test Site** :SAC 2 :TERF2304001052ER

Operation Mode Test Date :2023-05-10 :EDR 3M Test Frequency :2402 MHz Temp./Humi. :24.3°C/59%

Test Mode :Bandedge Antenna Pol. :Vertical

EUT Pol :H Plane Engineer :Ricky Chen

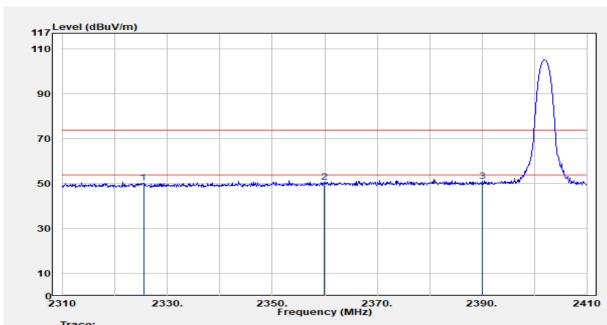

	Trace:						
	Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
	MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
	2325.400	Peak	54.72	-4.36	50.37	74.00	-23.63
	2359.900	Peak	55.10	-4.33	50.76	74.00	-23.24
	2390.000	Peak	55.23	-4.17	51.06	74.00	-22.94
	_		D 1 A 1 1		Α	Λ.	
	Freq.	Detector Mode	Peak Actual FS	Duty Cycle Factor	Average Value	Average Limit@3m	Margin
	Freq. MHz			Duty Cycle Factor (dB)	•	•	Margin (dB)
-	·	Mode	FS		Value	Limit@3m	•
	·	Mode	FS		Value	Limit@3m	•
•	MHz	Mode AV	FS (dBµV/m)	(dB)	Value (dBuV/m)	Limit@3m (dBuV/m)	(dB)
	MHz 2325.400	Mode AV Average	FS (dBµV/m) 50.37	-24.73	Value (dBuV/m) 25.64	Limit@3m (dBuV/m) 54.00	(dB) -28.36

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 33 of 62

Report Number **Test Site** :SAC 2 :TERF2304001052ER

Operation Mode Test Date :2023-05-10 :EDR 3M Test Frequency :2402 MHz Temp./Humi. :24.3°C/59% Test Mode :Bandedge Antenna Pol. :Horizontal **EUT Pol** :H Plane Engineer :Ricky Chen

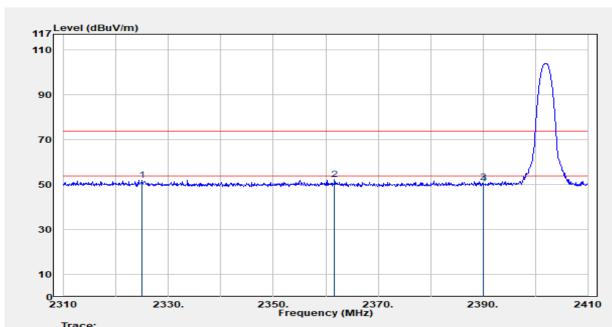

	Irace:						
	Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
	MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBμV/m	dB
	2325.000	Peak	56.32	-4.36	51.97	74.00	-22.03
	2361.700	Peak	56.54	-4.32	52.21	74.00	-21.79
	2390.000	Peak	54.61	-4.17	50.44	74.00	-23.56
	_						
	Freq.	Detector Mode	Peak Actual FS	Duty Cycle Factor	Average Value	Average Limit@3m	Margin
	Freq. MHz			Duty Cycle Factor (dB)	•	•	Margin (dB)
٠	•	Mode	FS		Value	Limit@3m	•
•	•	Mode	FS		Value	Limit@3m	•
-	MHz	Mode AV	FS (dBµV/m)	(dB)	Value (dBuV/m)	Limit@3m (dBuV/m)	(dB)
	MHz 2325.000	Mode AV Average	FS (dBµV/m) 51.97	-24.73	Value (dBuV/m) 27.24	Limit@3m (dBuV/m) 54.00	(dB) -26.76

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd. f (886-2) 2298-0488




Page: 34 of 62

Report Number **Test Site** :SAC 2 :TERF2304001052ER

Operation Mode Test Date :2023-05-10 :EDR 3M Test Frequency :2480 MHz Temp./Humi. :24.3°C/59%

Test Mode :Bandedge Antenna Pol. :Vertical

EUT Pol :H Plane Engineer :Ricky Chen

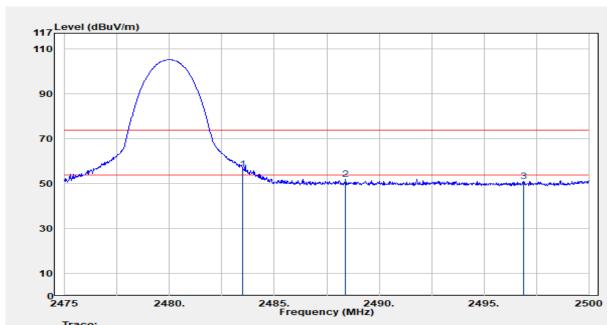

Trace:						
Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBµV/m	dBµV/m	dB
2483.500	Peak	60.58	-4.26	56.32	74.00	-17.68
2488.400	Peak	56.08	-4.22	51.86	74.00	-22.14
2496.875	Peak	55.12	-4.15	50.97	74.00	-23.03
_	_			_		
Freq.	Detector Mode	Peak Actual FS	Duty Cycle Factor	Average Value	Average Limit@3m	Margin
Freq. MHz			Duty Cycle Factor (dB)		•	Margin (dB)
·	Mode	FS		Value	Limit@3m	•
·	Mode	FS		Value	Limit@3m	•
MHz	Mode AV	FS (dBµV/m)	(dB)	Value (dBuV/m)	Limit@3m (dBuV/m)	(dB)
MHz 2483.500	Mode AV Average	FS (dBµV/m) 56.32	-24.73	Value (dBuV/m)	Limit@3m (dBuV/m) 54.00	(dB) -22.41

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 35 of 62

Report Number **Test Site** :SAC 2 :TERF2304001052ER

Operation Mode Test Date :2023-05-10 :EDR 3M Test Frequency :2480 MHz Temp./Humi. :24.3°C/59% Test Mode :Bandedge Antenna Pol. :Horizontal **EUT Pol** :H Plane Engineer :Ricky Chen

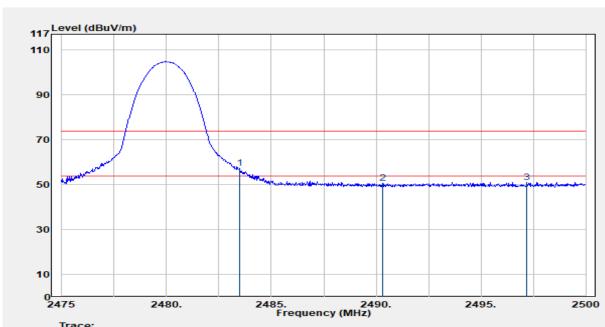

	Irace:						
	Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
	MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
	2483.500	Peak	61.57	-4.26	57.31	74.00	-16.69
	2490.325	Peak	54.86	-4.20	50.66	74.00	-23.34
	2497.200	Peak	55.34	-4.15	51.19	74.00	-22.81
	_				_	_	
	Freq.	Detector Mode	Peak Actual FS	Duty Cycle Factor	Average Value	Average Limit@3m	Margin
	Freq. MHz			Duty Cycle Factor (dB)	•	•	Margin (dB)
	·	Mode	FS		Value	Limit@3m	•
	·	Mode	FS		Value	Limit@3m	•
-	MHz	Mode AV	FS (dBµV/m)	(dB)	Value (dBuV/m)	Limit@3m (dBuV/m)	(dB)
-	MHz 2483.500	Mode AV Average	FS (dBµV/m) 57.31	-24.73	Value (dBuV/m)	Limit@3m (dBuV/m) 54.00	(dB) -21.42

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd. f (886-2) 2298-0488




Page: 36 of 62

Report Number :TERF2304001052ER Test Site :SAC 2

Operation Mode :BR Hopping Test Date :2023-05-10
Test Frequency :2402 MHz Temp./Humi. :24.3℃/59%

Test Mode :Bandedge Antenna Pol. :Vertical

EUT Pol :H Plane Engineer :Ricky Chen

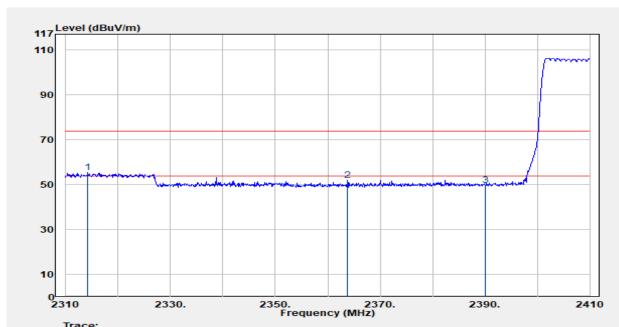

	Irace:						
	Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
	MHz	PK/QP/AV	dΒμ̈V	dB	dBµV/m	dBµV/m	dB
	2314.200	Peak	59.92	-4.34	55.58	74.00	-18.42
	2363.800	Peak	56.23	-4.31	51.92	74.00	-22.08
	2390.000	Peak	54.00	-4.17	49.83	74.00	-24.17
	Freq.	Detector Mode	Peak Actual FS	Duty Cycle Factor	Average Value	Average Limit@3m	Margin
	Freq. MHz			Duty Cycle Factor (dB)	_	_	Margin (dB)
•	·	Mode	FS	• •	Value	Limit@3m	•
·	·	Mode	FS	• •	Value	Limit@3m	•
•	MHz	Mode AV	FS (dBµV/m)	(dB)	Value (dBuV/m)	Limit@3m (dBuV/m)	(dB)
	MHz 2314.200	Mode AV Average	FS (dBµV/m) 55.58	-25.04	Value (dBuV/m)	Limit@3m (dBuV/m) 54.00	(dB) -23.46

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 险非只有的明,此想些结果做新测验之样具合善,同时此样里属是例如于。木型生主概未从司事高纯可,不可可以推测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


SGS Taiwan Ltd. _| No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號



Page: 37 of 62

Report Number **Test Site** :SAC 2 :TERF2304001052ER

Operation Mode Test Date :2023-05-10 :BR Hopping Test Frequency :2402 MHz Temp./Humi. :24.3°C/59% Test Mode :Bandedge Antenna Pol. :Horizontal **EUT Pol** :H Plane Engineer :Ricky Chen

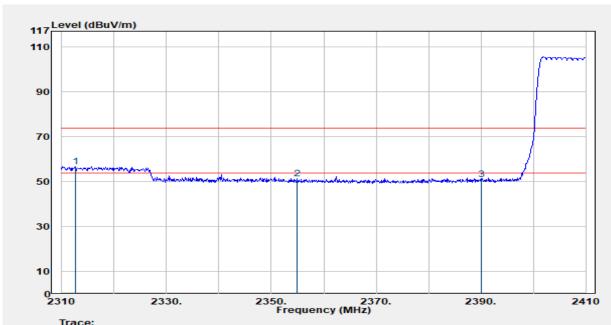

	Trace:						
	Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
	MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
	2312.600	Peak	61.00	-4.34	56.67	74.00	-17.33
	2355.000	Peak	55.61	-4.36	51.25	74.00	-22.75
	2390.000	Peak	55.32	-4.17	51.16	74.00	-22.84
	_		D A		^	Λ.	
	Freq.	Detector Mode	Peak Actual FS	Duty Cycle Factor	Average Value	Average Limit@3m	Margin
	Freq. MHz			Duty Cycle Factor (dB)	•	•	Margin (dB)
-	•	Mode	FS		Value	Limit@3m	•
	•	Mode	FS		Value	Limit@3m	•
•	MHz	Mode AV	FS (dBµV/m)	(dB)	Value (dBuV/m)	Limit@3m (dBuV/m)	(dB)
	MHz 2312.600	Mode AV Average	FS (dBµV/m) 56.67	-25.04	Value (dBuV/m)	Limit@3m (dBuV/m) 54.00	(dB) -22.37

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Page: 38 of 62

Report Number :TERF2304001052ER Test Site :SAC 2

Operation Mode :BR Hopping Test Date :2023-05-10
Test Frequency :2480 MHz Temp./Humi. :24.3°C/59%

Test Mode :Bandedge Antenna Pol. :Vertical

EUT Pol :H Plane Engineer :Ricky Chen

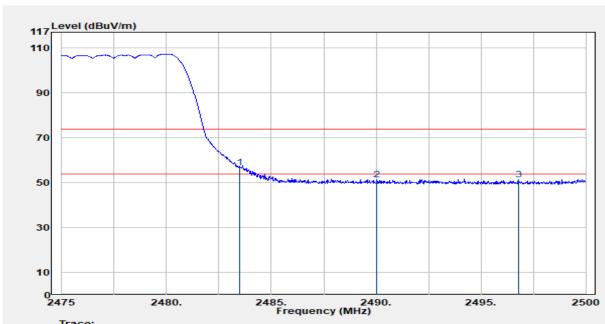

Trace:						
Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
2483.500	Peak	60.94	-4.26	56.68	74.00	-17.32
2490.025	Peak	55.42	-4.21	51.22	74.00	-22.78
2496.800	Peak	55.64	-4.15	51.49	74.00	-22.51
Freq.	Detector Mode	Peak Actual FS	Duty Cycle Factor	Average Value	Average Limit@3m	Margin
Freq. MHz			Duty Cycle Factor (dB)		•	Margin (dB)
•	Mode	FS		Value	Limit@3m	•
•	Mode	FS		Value	Limit@3m	•
MHz	Mode AV	FS (dBµV/m)	(dB)	Value (dBuV/m)	Limit@3m (dBuV/m)	(dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 险非只有的明,此想些结果做新测验之样具合善,同时此样里属是例如于。木型生主概未从司事面纯可,不可可以推测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


SGS Taiwan Ltd. _| No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號



Page: 39 of 62

Report Number **Test Site** :SAC 2 :TERF2304001052ER

Operation Mode Test Date :2023-05-10 :BR Hopping Test Frequency :2480 MHz Temp./Humi. :24.3°C/59% Test Mode :Bandedge Antenna Pol. :Horizontal **EUT Pol** :H Plane Engineer :Ricky Chen

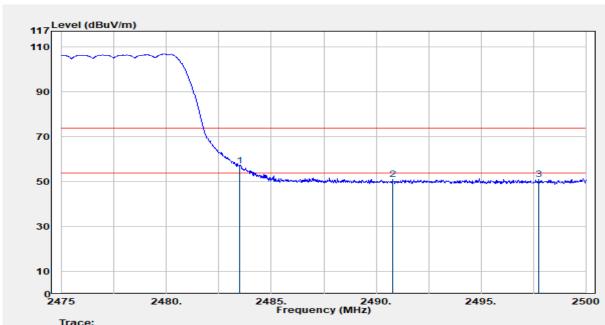

	Irace:						
	Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
	MHz	PK/QP/AV	dΒμV	dB	dΒμV/m	dBµV/m	dB
	2483.500	Peak	61.27	-4.26	57.01	74.00	-16.99
	2490.775	Peak	55.36	-4.20	51.16	74.00	-22.84
	2497.775	Peak	55.18	-4.15	51.03	74.00	-22.97
	_		D A		A	A., a. r. a. a. a.	
	Freq.	Detector Mode	Peak Actual FS	Duty Cycle Factor	Average Value	Average Limit@3m	Margin
	Freq. MHz			Duty Cycle Factor (dB)	•	•	Margin (dB)
,	·	Mode	FS	-	Value	Limit@3m	•
	·	Mode	FS	-	Value	Limit@3m	•
	MHz	Mode AV	FS (dBµV/m)	(dB)	Value (dBuV/m)	Limit@3m (dBuV/m)	(dB)
	MHz 2483.500	Mode AV Average	FS (dBµV/m) 57.01	-25.04	Value (dBuV/m)	Limit@3m (dBuV/m) 54.00	(dB) -22.03

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 40 of 62


Report Number **Test Site** :SAC 2 :TERF2304001052ER

Operation Mode Test Date :2023-05-10 :EDR 3M Hopping

Test Frequency :2402 MHz Temp./Humi. :24.3°C/59%

Test Mode :Bandedge Antenna Pol. :Vertical

EUT Pol :H Plane Engineer :Ricky Chen

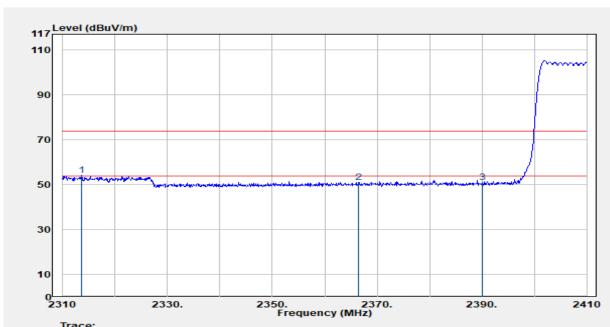

Irace:						
Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBμV/m	dBµV/m	dB
2313.500	Peak	58.50	-4.34	54.16	74.00	-19.84
2366.500	Peak	55.34	-4.30	51.05	74.00	-22.95
2390.000	Peak	55.23	-4.17	51.06	74.00	-22.94
Г**	D - 1 1	Dools Astual		Avorago	Averege	
Freq.	Detector Mode	Peak Actual FS	Duty Cycle Factor	Average Value	Average Limit@3m	Margin
Freq. MHz			Duty Cycle Factor (dB)		•	Margin (dB)
·	Mode	FS	-	Value	Limit@3m	_
·	Mode	FS	-	Value	Limit@3m	_
MHz	Mode AV	FS (dBµV/m)	(dB)	Value (dBuV/m)	Limit@3m (dBuV/m)	(dB)
MHz 2313.500	Mode AV Average	FS (dBµV/m) 54.16	-24.73	Value (dBuV/m)	Limit@3m (dBuV/m) 54.00	(dB) -24.57

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 41 of 62


Report Number **Test Site** :SAC 2 :TERF2304001052ER

Operation Mode Test Date :2023-05-10 :EDR 3M Hopping

Test Frequency :2402 MHz Temp./Humi. :24.3°C/59%

Test Mode :Bandedge Antenna Pol. :Horizontal

EUT Pol :H Plane Engineer :Ricky Chen

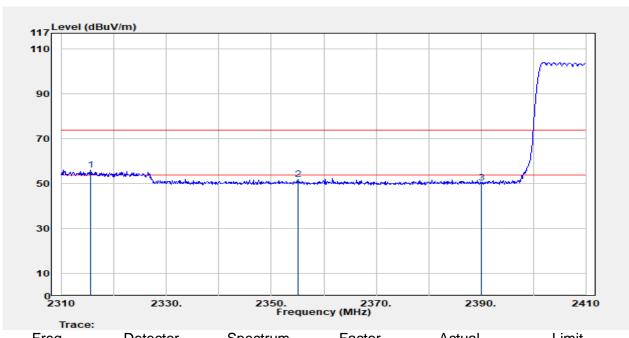

	Trace:						
	Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
	MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
	2315.500	Peak	60.33	-4.34	55.99	74.00	-18.01
	2355.100	Peak	56.44	-4.36	52.08	74.00	-21.92
	2390.000	Peak	54.61	-4.17	50.44	74.00	-23.56
	F	D - 1 1	Dools Actual		Averege	A., a. r. a. a. a.	
	Freq.	Detector Mode	Peak Actual FS	Duty Cycle Factor	Average Value	Average Limit@3m	Margin
	Freq. MHz			Duty Cycle Factor (dB)	•	•	Margin (dB)
•	·	Mode	FS		Value	Limit@3m	•
	·	Mode	FS		Value	Limit@3m	•
٠	MHz	Mode AV	FS (dBµV/m)	(dB)	Value (dBuV/m)	Limit@3m (dBuV/m)	(dB)
•	MHz 2315.500	Mode AV Average	FS (dBµV/m) 55.99	-24.73	Value (dBuV/m)	Limit@3m (dBuV/m) 54.00	(dB) -22.74

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 42 of 62


Report Number **Test Site** :SAC 2 :TERF2304001052ER

Operation Mode Test Date :2023-05-10 :EDR 3M Hopping

Temp./Humi. :24.3°C/59% Test Frequency :2480 MHz

Test Mode :Bandedge Antenna Pol. :Vertical

EUT Pol :H Plane Engineer :Ricky Chen

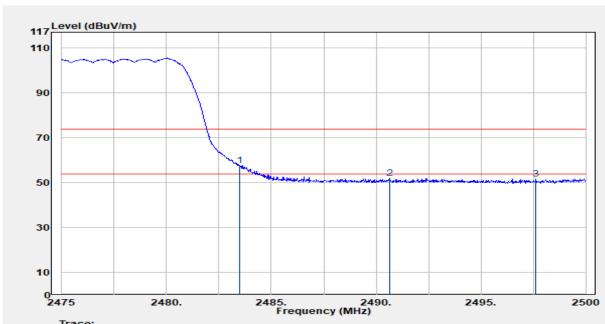

Trace:						
Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBμV	dB	dBµV/m	dBµV/m	dB
2483.500	Peak	61.90	-4.26	57.64	74.00	-16.36
2490.650	Peak	56.11	-4.20	51.91	74.00	-22.09
2497.625	Peak	55.69	-4.15	51.54	74.00	-22.46
Freq.	Detector Mode	Peak Actual FS	Duty Cycle Factor	Average Value	Average Limit@3m	Margin
Freq. MHz			Duty Cycle Factor (dB)	•	•	Margin (dB)
•	Mode	FS	, ,	Value	Limit@3m	•
•	Mode	FS	, ,	Value	Limit@3m	•
MHz	Mode AV	FS (dBµV/m)	(dB)	Value (dBuV/m)	Limit@3m (dBuV/m)	(dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 43 of 62


Report Number **Test Site** :SAC 2 :TERF2304001052ER

Operation Mode Test Date :2023-05-10 :EDR 3M Hopping

Test Frequency :2480 MHz Temp./Humi. :24.3°C/59%

Test Mode :Bandedge Antenna Pol. :Horizontal

EUT Pol :H Plane Engineer :Ricky Chen

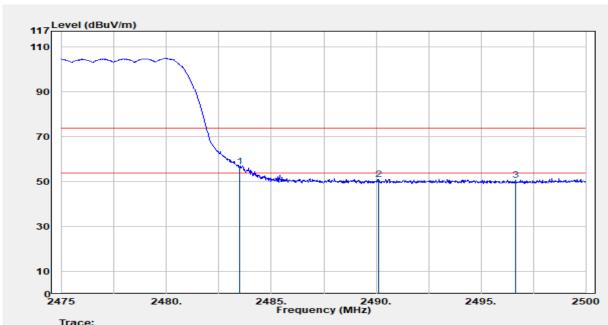

	Irace:						
	Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
	MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
	2483.500	Peak	61.02	-4.26	56.76	74.00	-17.24
	2490.125	Peak	55.30	-4.21	51.09	74.00	-22.91
	2496.650	Peak	55.00	-4.16	50.85	74.00	-23.15
	Freq.	Detector	Peak Actual FS	Duty Cycle Factor	Average Value	Average Limit@3m	Margin
		Mode	го	(-ID)			
	MHz	AV	rS (dBμV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
	MHz		_	(dB)		_	(dB)
-	MHz 2483.500		_	(dB) -24.73		_	-21.97
•		AV	(dBµV/m)	. ,	(dBuV/m)	(dBuV/m)	
	2483.500	AV	(dBµV/m) 56.76	-24.73	(dBuV/m) 32.03	(dBuV/m) 54.00	-21.97

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 44 of 62

Radiated Spurious Emission


Report Number :TERF2304001052ER Test Site :SAC 2

Operation Mode :BR **Test Date** :2023-05-10

Test Frequency :2441 MHz Temp./Humi. :24.3°C/59%

Test Mode :Tx Antenna Pol. :Vertical

EUT Pol :H Plane Engineer :Ricky Chen

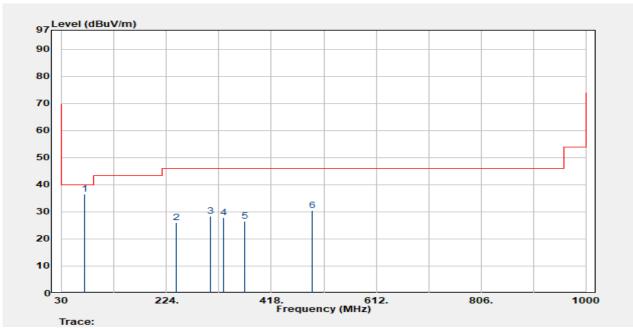

Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
QP	51.63	-15.22	36.41	40.00	-3.59
Peak	39.71	-13.78	25.92	46.00	-20.08
Peak	40.53	-12.26	28.27	46.00	-17.73
Peak	39.13	-11.29	27.83	46.00	-18.17
Peak	36.78	-10.30	26.48	46.00	-19.52
Peak	37.93	-7.53	30.41	46.00	-15.59
	Mode PK/QP/AV QP Peak Peak Peak Peak	Mode PK/QP/AV Reading Level dBµV QP 51.63 Peak 39.71 Peak 40.53 Peak 39.13 Peak 36.78	Mode PK/QP/AV Reading Level dBμV dB QP 51.63 -15.22 Peak 39.71 -13.78 Peak 40.53 -12.26 Peak 39.13 -11.29 Peak 36.78 -10.30	Mode PK/QP/AVReading Level dBμVFS dBμV/mQP51.63-15.2236.41Peak39.71-13.7825.92Peak40.53-12.2628.27Peak39.13-11.2927.83Peak36.78-10.3026.48	Mode PK/QP/AV Reading Level dBμV FS dBμV/m @3m dBμV/m QP 51.63 -15.22 36.41 40.00 Peak 39.71 -13.78 25.92 46.00 Peak 40.53 -12.26 28.27 46.00 Peak 39.13 -11.29 27.83 46.00 Peak 36.78 -10.30 26.48 46.00

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 45 of 62


:TERF2304001052ER Report Number **Test Site** :SAC 2

Operation Mode Test Date :2023-05-10 :BR

Temp./Humi. :24.3°C/59% Test Frequency :2441 MHz

Test Mode :Tx Antenna Pol. :Horizontal

EUT Pol :H Plane Engineer :Ricky Chen

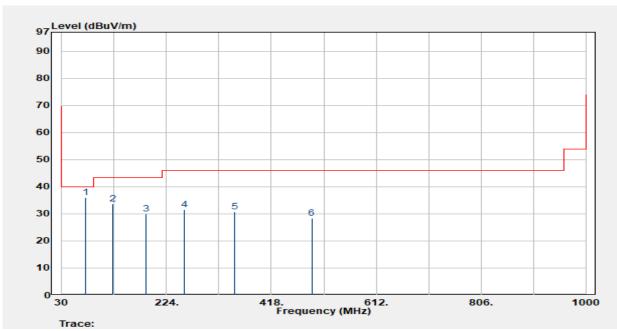

mace.						
Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
73.650	Peak	51.72	-15.64	36.08	40.00	-3.92
124.090	Peak	48.69	-14.92	33.77	43.50	-9.73
186.170	Peak	45.04	-14.95	30.09	43.50	-13.41
256.980	Peak	45.06	-13.56	31.49	46.00	-14.51
350.100	Peak	41.87	-11.14	30.73	46.00	-15.27
492.690	Peak	35.78	-7.50	28.28	46.00	-17.72

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 46 of 62


Report Number :TERF2304001052ER Test Site :SAC 2

Operation Mode :BR Test Date :2023-05-10

Test Frequency :2402 MHz Temp./Humi. :24.3°C/59%

Test Mode :Tx Antenna Pol. :Vertical

EUT Pol :H Plane Engineer :Ricky Chen

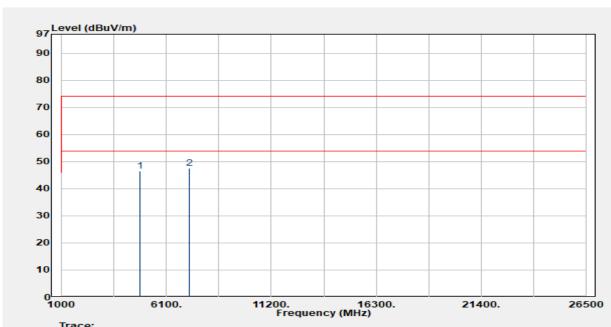

	1000	0100.	Frequ	uency (MHz)	21400. 20300			
	Trace:							
	Freq.	Detector Mode	Spectrum Reading Level	Factor I	Actual FS	Limit @3m	Margin	
	MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB	
	4804.000	Peak	44.47	2.10	46.57	74.00	-27.43	
	7206.000	Peak	39.92	7.56	47.47	74.00	-26.53	
	Freq.	Detector Mode	Peak Actual FS	Duty Cycle Factor	Average Value	Average Limit@3m	Margin	
	MHz	AV	(dBµV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
-								
	4804.000	Average	46.57	-25.04	21.53	54.00	-32.47	
	7206.000	Average	47.47	-25.04	22.43	54.00	-31.57	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除业只有约明,此程生处用度影响经少锋中乌害,同时此类早度原列的主,大司如公海侧。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. _| No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

f (886-2) 2298-0488



Page: 47 of 62


Report Number :TERF2304001052ER Test Site :SAC 2

Operation Mode :BR Test Date :2023-05-10

Test Frequency :2402 MHz Temp./Humi. :24.3°C/59%

Test Mode :Tx Antenna Pol. :Horizontal

EUT Pol :H Plane Engineer :Ricky Chen

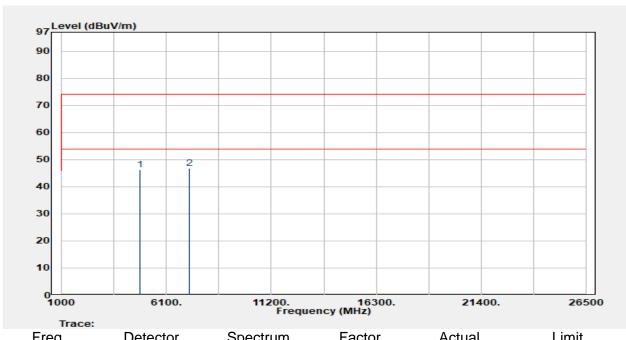

Frequency (MHz)							
Freq.	Detector Mode	Spectrum Reading Leve	Factor	Actual FS	Limit @3m	Margin	
MHz	PK/QP/AV	dBµV	dB	dBμV/m	dBµV/m	dB	
4804.000	Peak	44.18	2.10	46.28	74.00	-27.72	
7206.000	Peak	39.26	7.56	46.82	74.00	-27.18	
Freq.	Detector Mode	Peak Actual FS	Duty Cycle Factor	Average Value	Average Limit@3m	Margin	
MHz	AV	(dBµV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
4804.000	Average	46.28	-25.04	21.24	54.00	-32.76	
7206.000	Average	46.82	-25.04	21.78	54.00	-32.22	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有的用,他都是好用属對個對分換具有害,同時他幾乎區程內的子。木都些主權大公司事而強可,不可與以資剩。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,V 台灣檢驗科技股份有限公司 t (886-2)



Page: 48 of 62


Report Number **Test Site** :SAC 2 :TERF2304001052ER

Operation Mode Test Date :2023-05-10 :BR

Temp./Humi. :24.3°C/59% Test Frequency :2441 MHz

Test Mode :Tx Antenna Pol. :Vertical

Engineer **EUT Pol** :H Plane :Ricky Chen

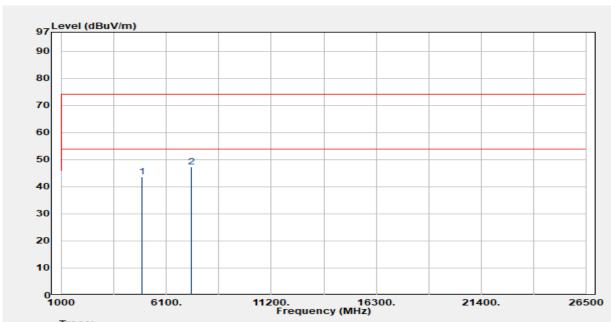

Frequency (MHz) Trace:						
Freq.	Detector Mode	Spectrum Reading Leve	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBμV	dB	dBμV/m	dBµV/m	dB
4882.000	Peak	40.87	2.66	43.52	74.00	-30.48
7323.000	Peak	39.51	7.70	47.21	74.00	-26.79
Freq.	Detector Mode	Peak Actual FS	Duty Cycle Factor	Average Value	Average Limit@3m	Margin (dB)
MHz	AV	(dBµV/m)	(dB)	(dBuV/m)	(dBuV/m)	(UD)
4882.000	Average	43.52	-25.04	18.48	54.00	-35.52
7323.000	Average	47.21	-25.04	22.17	54.00	-31.83

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 49 of 62


Report Number :TERF2304001052ER Test Site :SAC 2

Operation Mode :BR Test Date :2023-05-10

Test Frequency :2441 MHz Temp./Humi. :24.3°C/59%

Test Mode :Tx Antenna Pol. :Horizontal

EUT Pol :H Plane Engineer :Ricky Chen

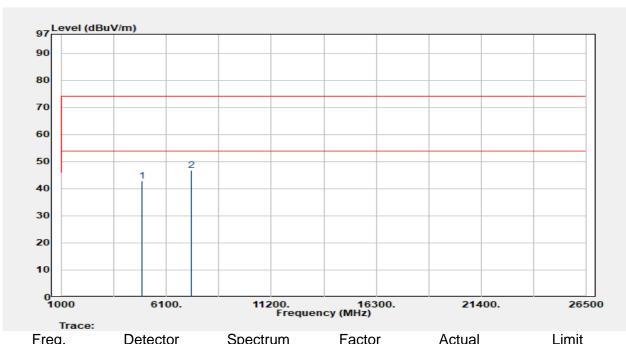

	1000	0.00.	Freq	uency (MHz)	214001	20000	
	Trace: Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Leve		FS	@3m	
_	MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
	4882.000	Peak	40.16	2.66	42.81	74.00	-31.19
	7323.000	Peak	39.06	7.70	46.76	74.00	-27.24
	Freq.	Detector	Peak Actual	Duty Cycle	Average	Average	Margin
		Mode	FS	Factor	Value	Limit@3m	(dB)
	MHz	AV	(dBµV/m)	(dB)	(dBuV/m)	(dBuV/m)	(GD)
•							
	4882.000	Average	42.81	-25.04	17.77	54.00	-36.23
	7323.000	ŭ	46.76	-25.04	21.72	54.00	-32.28
	1323.000	Average	40.76	-25.04	21.12	54.00	-32.20

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有的用,他都是好用属對個對分換具有害,同時他幾乎區程內的子。木都些主權大公司事而強可,不可與以資剩。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號



Page: 50 of 62


Test Site Report Number :TERF2304001052ER :SAC 2

Operation Mode Test Date :2023-05-10 :BR

Test Frequency :2480 MHz Temp./Humi. :24.3°C/59%

Test Mode :Tx Antenna Pol. :Vertical

EUT Pol :H Plane Engineer :Ricky Chen

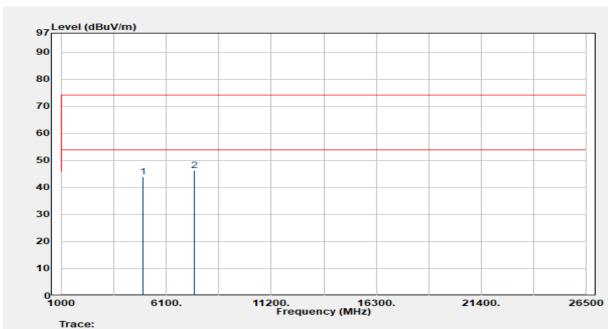

0						
1000 Trace:	6100.	11200. Freq	16300. uency (MHz)	21400.	26500	
Freq.	Detector Mode	Spectrum Reading Leve	Factor I	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBμV	dB	dBµV/m	dBµV/m	dB
4960.000	Peak	41.17	2.80	43.97	74.00	-30.03
7440.000	Peak	38.35	7.97	46.33	74.00	-27.67
Freq.	Detector	Peak Actual	Duty Cycle	Average	Average	Morgin
·	Mode	FS	Factor	Value	Limit@3m	Margin (dB)
MHz	AV	(dBµV/m)	(dB)	(dBuV/m)	(dBuV/m)	(GD)
4960.000	Average	43.97	-25.04	18.93	54.00	-35.07
	· ·					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

46.33

Average

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

-25.04

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.

7440.000

21.29

54.00

-32.71



Page: 51 of 62


Report Number **Test Site** :SAC 2 :TERF2304001052ER

Operation Mode Test Date :2023-05-10 :BR

Temp./Humi. :24.3°C/59% Test Frequency :2480 MHz

Test Mode :Tx Antenna Pol. :Horizontal

EUT Pol :H Plane Engineer :Ricky Chen

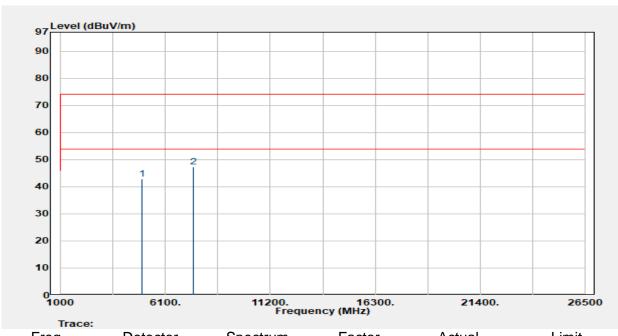

	1000	0100.	Freq	uency (MHz)	21400.	20300	
	Trace:						
	Freq.	Detector Mode	Spectrum Reading Leve	Factor I	Actual FS	Limit @3m	Margin
	MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
	4960.000	Peak	40.15	2.80	42.95	74.00	-31.05
	7440.000	Peak	39.22	7.97	47.19	74.00	-26.81
	Freq.	Detector Mode	Peak Actual FS	Duty Cycle Factor	Average Value	Average Limit@3m	Margin
	MHz	AV	(dBµV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
-					<u> </u>	<u> </u>	
	4960.000	Average	42.95	-25.04	17.91	54.00	-36.09
	7440.000	Average	47.19	-25.04	22.15	54.00	-31.85

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Page: 52 of 62

Report Number **Test Site** :SAC 2 :TERF2304001052ER

Operation Mode Test Date :2023-05-10 :EDR 3M Temp./Humi. :24.3°C/59% Test Frequency :2402 MHz

Test Mode :Tx Antenna Pol. :Vertical

EUT Pol :H Plane Engineer :Ricky Chen

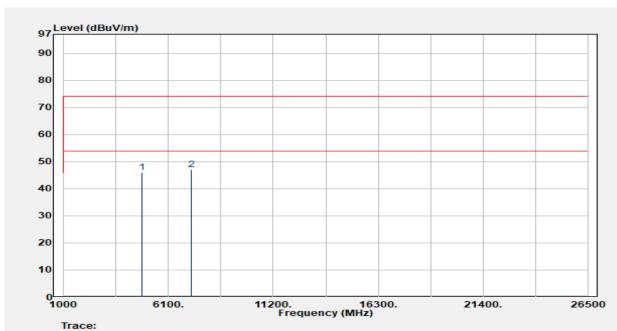

Trace:		Freq	uency (MHz)			
Freq.	Detector Mode	Spectrum Reading Leve	Factor I	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
4804.000	Peak	44.03	2.10	46.13	74.00	-27.87
7206.000	Peak	39.41	7.56	46.97	74.00	-27.03
Freq.	Detector Mode	Peak Actual FS	Duty Cycle Factor	Average Value	Average Limit@3m	Margin (dB)
MHz	AV	(dBµV/m)	(dB)	(dBuV/m)	(dBuV/m)	(ub)
4804.000	Average	46.13	-24.73	21.40	54.00	-32.60
7206.000	Average	46.97	-24.73	22.24	54.00	-31.76

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Page: 53 of 62

Report Number **Test Site** :SAC 2 :TERF2304001052ER

Operation Mode :EDR 3M **Test Date** :2023-05-10 Temp./Humi. :24.3°C/59% Test Frequency :2402 MHz

Test Mode :Tx Antenna Pol. :Horizontal

EUT Pol :H Plane Engineer :Ricky Chen

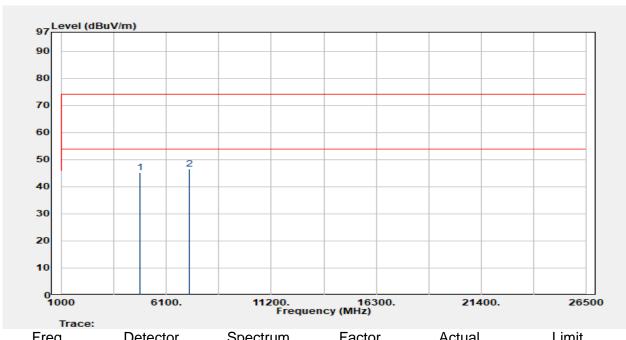

	Freq	uency (MHz)			
Detector Mode	Spectrum Reading Leve	Factor I	Actual FS	Limit @3m	Margin
PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
Peak	43.10	2.10	45.20	74.00	-28.80
Peak	39.01	7.56	46.56	74.00	-27.44
Detector Mode	Peak Actual FS	Duty Cycle Factor	Average Value	Average Limit@3m	Margin (dB)
AV	(dBµV/m)	(dB)	(dBuV/m)	(dBuV/m)	(GD)
Average	45.20	-24.73	20.47	54.00	-33.53
Average	46.56	-24.73	21.83	54.00	-32.17
	Mode PK/QP/AV Peak Peak Detector Mode AV Average	Detector Spectrum Reading Leve PK/QP/AV dBµV Peak 43.10 Peak 39.01 Detector Peak Actual Mode FS (dBµV/m) Average 45.20	Detector Mode PK/QP/AVSpectrum Reading Level dBμVFactor dBPeak Peak43.10 39.012.10 7.56Detector Mode AVPeak Actual (dBμV/m)Duty Cycle Factor (dB)Average45.20-24.73	Detector Mode PK/QP/AVSpectrum Reading Level dBμVFactor dBActual FS dBPeak Peak43.10 39.012.10 7.5645.20 46.56Detector Mode AVPeak Actual (dBμV/m)Duty Cycle Factor (dB)Average Value (dBuV/m)Average45.20-24.7320.47	Mode PK/QP/AV Reading Level dBμV FS dBμV/m @3m dBμV/m Peak Peak Peak Actual Peak 39.01 2.10 45.20 74.00 74.00 7.56 74.00 Detector Mode AV Peak Actual Peak Actual Peach Peak Actual Peach Peak Actual Peach Peak Peach Peak Peach Peak Peak Peak Peak Peak Peak Peak Peak

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Page: 54 of 62

Report Number **Test Site** :SAC 2 :TERF2304001052ER

Operation Mode Test Date :2023-05-10 :EDR 3M Temp./Humi. :24.3°C/59% Test Frequency :2441 MHz

Test Mode :Tx Antenna Pol. :Vertical

Engineer **EUT Pol** :H Plane :Ricky Chen

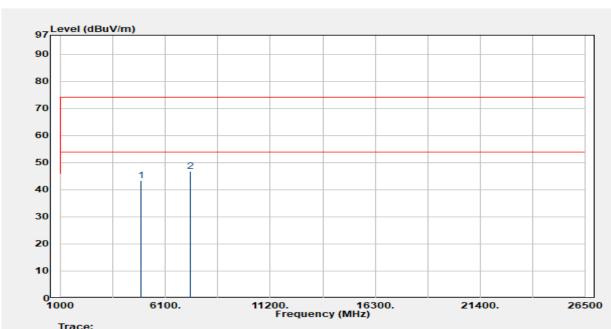

T		Fred	quency (MHz)			
Freq.	Detector Mode	Spectrum Reading Leve	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBμV	dB	dBµV/m	dBµV/m	dB
4882.000	Peak	40.83	2.66	43.48	74.00	-30.52
7323.000	Peak	39.22	7.70	46.92	74.00	-27.08
Freq.	Detector Mode	Peak Actual FS	Duty Cycle Factor	Average Value	Average Limit@3m	Margin (dB)
MHz	AV	(dBµV/m)	(dB)	(dBuV/m)	(dBuV/m)	(42)
4882.000	Average	43.48	-24.73	18.75	54.00	-35.25
7323.000	Average	46.92	-24.73	22.19	54.00	-31.81
	_					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Page: 55 of 62

Report Number **Test Site** :SAC 2 :TERF2304001052ER

Operation Mode :EDR 3M **Test Date** :2023-05-10 Temp./Humi. :24.3°C/59% Test Frequency :2441 MHz

Test Mode :Tx Antenna Pol. :Horizontal

EUT Pol :H Plane Engineer :Ricky Chen

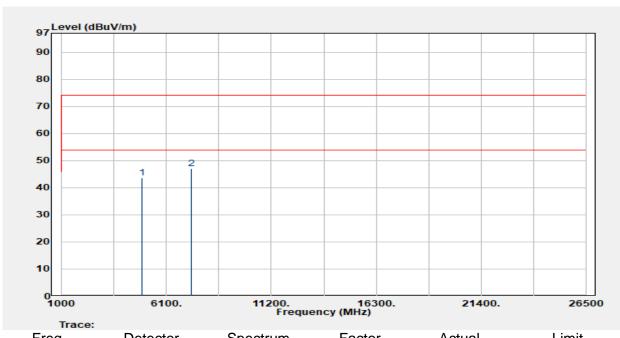

	1000	0100.	Freq	uency (MHz)	21400.	20300	
	Trace:			_			
	Freq.	Detector Mode	Spectrum Reading Leve	Factor I	Actual FS	Limit @3m	Margin
	MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
	4882.000	Peak	40.91	2.66	43.56	74.00	-30.44
	7323.000	Peak	39.47	7.70	47.17	74.00	-26.83
	Freq.	Detector Mode	Peak Actual FS	Duty Cycle Factor	Average Value	Average Limit@3m	Margin
	MHz	AV	(dBµV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
-			,	. ,	,	,	
	4882.000	Average	43.56	-24.73	18.83	54.00	-35.17
		ŭ		_			
	7323.000	Average	47.17	-24.73	22.44	54.00	-31.56

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Page: 56 of 62

Report Number :TERF2304001052ER Test Site :SAC 2

Operation Mode :EDR 3M Test Date :2023-05-10
Test Frequency :2480 MHz Temp./Humi. :24.3℃/59%

Test Mode :Tx Antenna Pol. :Vertical

EUT Pol :H Plane Engineer :Ricky Chen

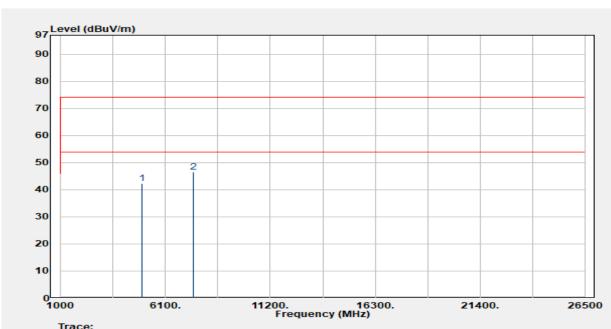

-		Fred	quency (MHz)			
Freq.	Detector Mode	Spectrum Reading Leve	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBμV	dB	dBµV/m	dBµV/m	dB
4960.000	Peak	39.55	2.80	42.35	74.00	-31.65
7440.000	Peak	38.43	7.97	46.40	74.00	-27.60
Freq.	Detector Mode	Peak Actual FS	Duty Cycle Factor	Average Value	Average Limit@3m	Margin (dB)
MHz	AV	(dBµV/m)	(dB)	(dBuV/m)	(dBuV/m)	()
4960.000	Average	42.35	-24.73	17.62	54.00	-36.38
7440.000	Average	46.40	-24.73	21.67	54.00	-32.33

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 险非只有的明,此想些结果做新测验之样具合善,同时此样里属是例如于。木型生主概未从司事面纯可,不可可以推测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. _| No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號




Page: 57 of 62

Report Number :TERF2304001052ER Test Site :SAC 2

Operation Mode :EDR 3M Test Date :2023-05-10
Test Frequency :2480 MHz Temp./Humi. :24.3°C/59%

Test Mode :Tx Antenna Pol. :Horizontal

EUT Pol :H Plane Engineer :Ricky Chen

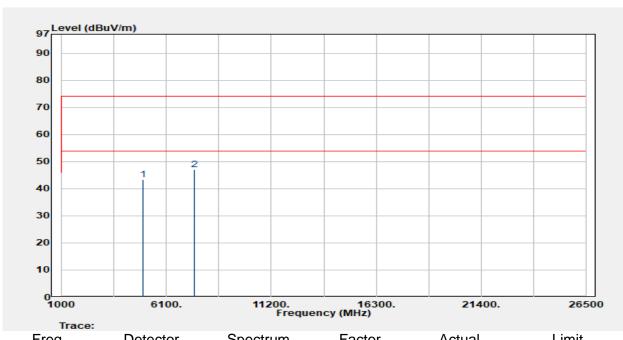

1000	0100.			21400.	20300	
Trace:	_	_	_			
Freq.	Detector Mode	-		Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
4960.000	Peak	40.53	2.80	43.33	74.00	-30.67
7440.000	Peak	38.96	7.97	46.94	74.00	-27.06
Freq.	Detector Mode	Peak Actual FS	Duty Cycle Factor	Average Value	Average Limit@3m	Margin
MHz	AV	(dBµV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
4960.000	Average	43.33	-24.73	18.60	54.00	-35.40
7440.000	Average	46.94	-24.73	22.21	54.00	-31.79
	Freq. MHz 4960.000 7440.000 Freq. MHz 4960.000	Freq. Detector Mode PK/QP/AV 4960.000 Peak Peak Freq. Detector Mode MHz MHz AV 4960.000 Average	Freq. Freq. Detector Mode Peading Leve ABμV MHz PK/QP/AV 4960.000 Peak Peak Peak Actual AV Freq. Detector Peak Actual FS (dBμV/m) MHz AV (dBμV/m)	Frequency (MHz) Freq. Detector Mode Peak PK/QP/AV Spectrum Reading Level ABμV Factor ABμV 4960.000 Peak Peak Peak Actual Peak Actual AV Duty Cycle FS Factor (dBμV/m) MHz AV (dBμV/m) (dB)	Frequency (MHz) Freq. Detector Mode PK/QP/AV Spectrum Reading Level SFS Actual PK/QP/AV Actual FS Actual ABμV/m 4960.000 Peak Peak Peak Actual Peak Actual Peak Actual Mode PS FS Factor Value (dBμV/m) Duty Cycle Average Value (dBμV/m) MHz AV (dBμV/m) (dB) (dBuV/m) 4960.000 Average	Frequency (MHz) Freq. Detector Mode Peading Level Reading Level PK/QP/AV Factor Actual PS (a 3m) Actual FS (a 3m) Limit PS (a 3m) MHz PK/QP/AV dBμV dB dBμV/m dBμV/m 4960.000 Peak Peak Actual Peak Actual PS (a 38.96) 7.97 46.94 74.00 Freq. Detector Peak Actual PS (a 3m) PS (a 3m) Factor Pack Peak Actual Pack PS (a 3m) Value Limit@3m (a 3m) MHz AV (dBμV/m) (dB) (dBuV/m) (dBuV/m) 4960.000 Average Average Average PS (a 3m) 2.80 43.33 -24.73 18.60 54.00

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除业只有约明,此程生处用度影响经少锋中乌害,同时此类早度原列的主,大司如公海侧。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.




Page: 58 of 62

10 TIME OF OCCUPANCY (DWELL TIME)

Standard Applicable 10.1

Frequency hopping systems operating in the 2400MHz-2483.5MHz. The average time of occupancy on any frequency shall not greater than 0.4 s within period of 0.4 seconds multiplied by the number of hopping channel employed.

10.2 Test Setup



10.3 **Measurement Procedure**

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows ANSI C63.10:2013.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set center frequency of spectrum analyzer = operating frequency.
- 5. Set the spectrum analyzer as RBW, VBW=1MHz, 3MHz, Span = 0Hz, Detector = Peak, Adjust Sweep = 2~8ms.
- 6. Repeat above procedures until all frequency of the interest measured were complete.

Formula Deduced: time occupancy of one time slot X Hopping rate / total slot in one channel / total channel that hops X period of working channels.

Where, standard hopping rate is 1600 hops/s, slot in one channel for DH1, DH3, and DH5 is 2, 4, and 6, respectively.

DH1 consists of single time slot of the uplink, and one slot of the downlink Total Slot: 2 DH3 consists of three time slot of the uplink, and one slot of the downlink. Total Slot: 4 DH5 consists of five time slot of the uplink, and one slot of the downlink. Total Slot: 6

Note: the result of the complete test default channel at 1Mbps is recorded on the test report, 2Mbps, and 3Mbps only records the measurement result at middle channel that reveals no much deviation.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sqs.com.tw/Terms-and-Conditions and for electronic format

documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 59 of 62

Measurement Result

GFSK (1Mbps)

Channel	PACKET TYPE	Measurement Result (ms)	Limit (ms)
	DH1	121.60	400ms
Mid	DH3	262.40	400ms
	DH5	307.20	400ms

π/4 DQPSK (2Mbps)

Channel	PACKET TYPE	Measurement Result (ms)	Limit (ms)
	2DH1	124.80	400ms
Mid	2DH3	262.40	400ms
	2DH5	307.20	400ms

8-DPSK (3Mbps)

Channel	PACKET TYPE	Measurement Result (ms)	Limit (ms)
	3DH1	123.20	400ms
Mid	3DH3	262.40	400ms
	3DH5	307.20	400ms

GFSK (1Mbps):

CH Mid	DH1 time slot	=	0.380 *	(1600/2/79)	*	31.6 =	121.60 (ms)
	DH3 time slot	=	1.640 *	(1600/4/79)	*	31.6 =	262.40 (ms)
	DH5 time slot	=	2.880 *	(1600/6/79)	*	31.6 =	307.20 (ms)

$\pi/4$ -DQPSK (2Mbps):

CH Mid	2DH1 time slot =	0.390 *	(1600/2/79)	*	31.6 =	124.80 (ms)
	2DH3 time slot =	1.640 *	(1600/4/79)	*	31.6 =	262.40 (ms)
	2DH5 time slot =	2.880 *	(1600/6/79)	*	31.6 =	307.20 (ms)

8-DPSK (3Mbps):

CH Mid	3DH1 time slot =	0.385 *	(1600/2/79)	*	31.6 =	123.20 (ms)
	3DH3 time slot =	1.640 *	(1600/4/79)	*	31.6 =	262.40 (ms)
	3DH5 time slot =	2.880 *	(1600/6/79)	*	31.6 =	307.20 (ms)

A period time = 0.4 (s) * 79 = 31.6 (s)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 60 of 62



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有說明,此報生來用屬對個對文學具有書,同時此業只屬是例の子。木都學生之權大公司書面對可,不可可以推測。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 61 of 62



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd.



Page: 62 of 62

~ End of Report ~

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

台灣檢驗科技股份有限公司