


Site: AC1	Time: 2017/07/19 - 02:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at channel 2462MHz Ant 1	

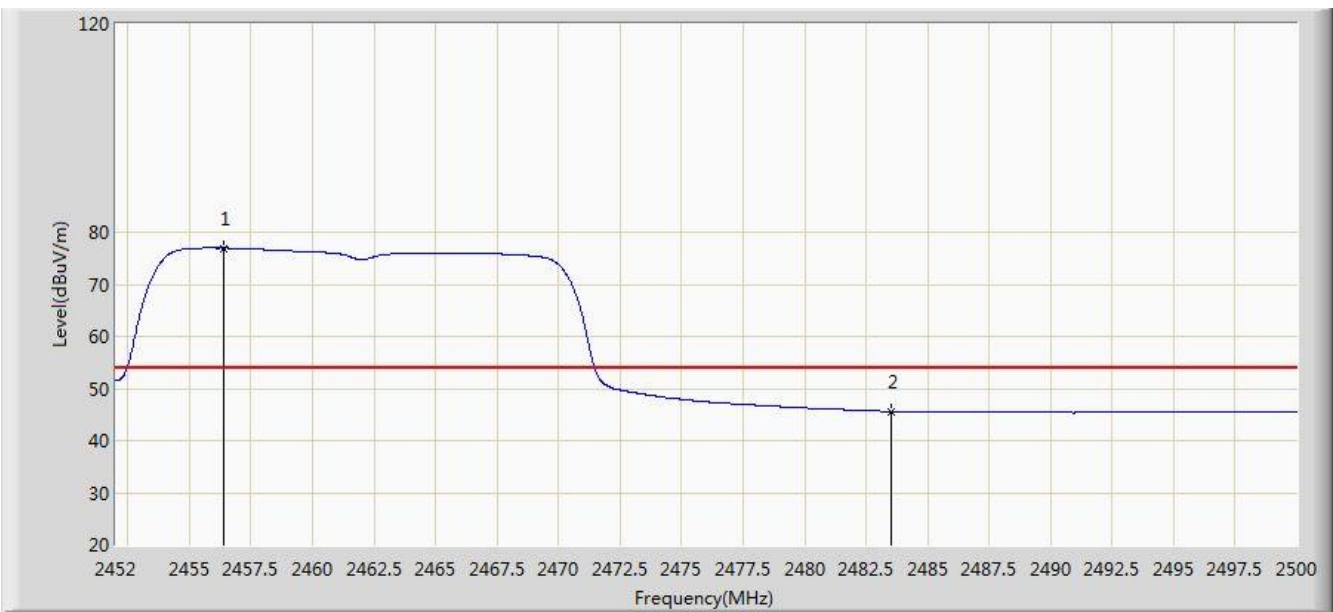


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2456.368	76.954	44.448	N/A	N/A	32.507	AV
2			2483.500	45.639	13.058	-8.361	54.000	32.580	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/07/19 - 02:55
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 2412MHz Ant 1	

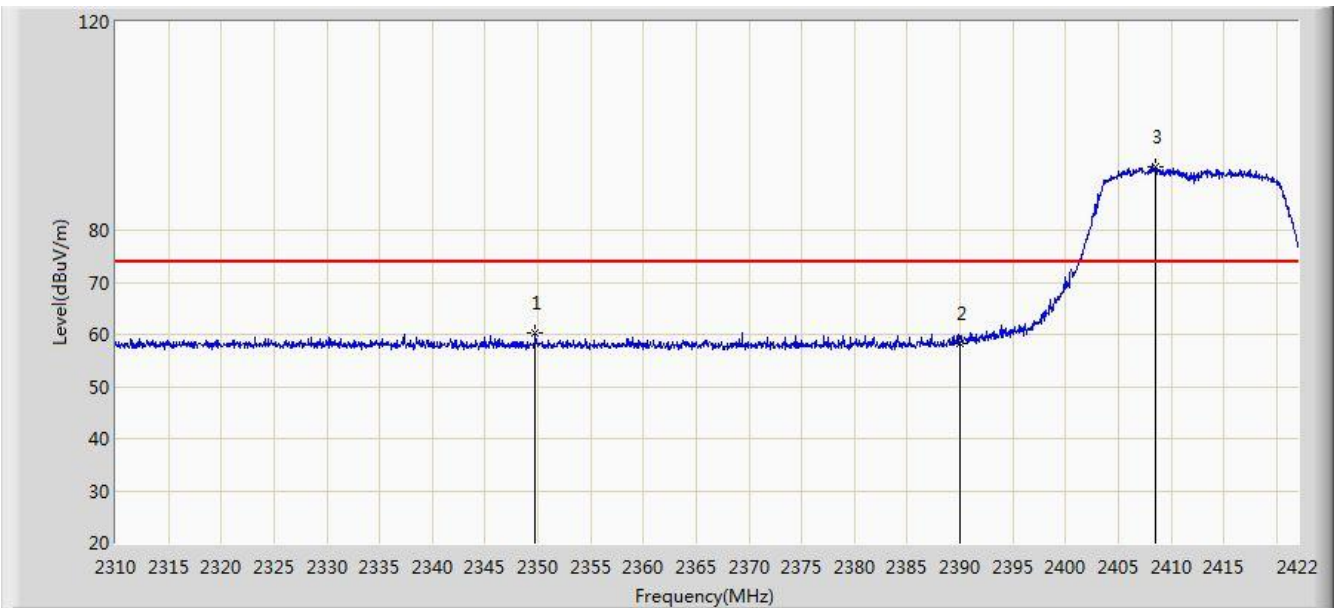


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2349.760	60.183	27.561	-13.817	74.000	32.623	PK
2			2390.000	58.343	25.789	-15.657	74.000	32.554	PK
3		*	2408.560	92.286	59.756	N/A	N/A	32.530	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/07/19 - 02:57
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 2412MHz Ant 1	

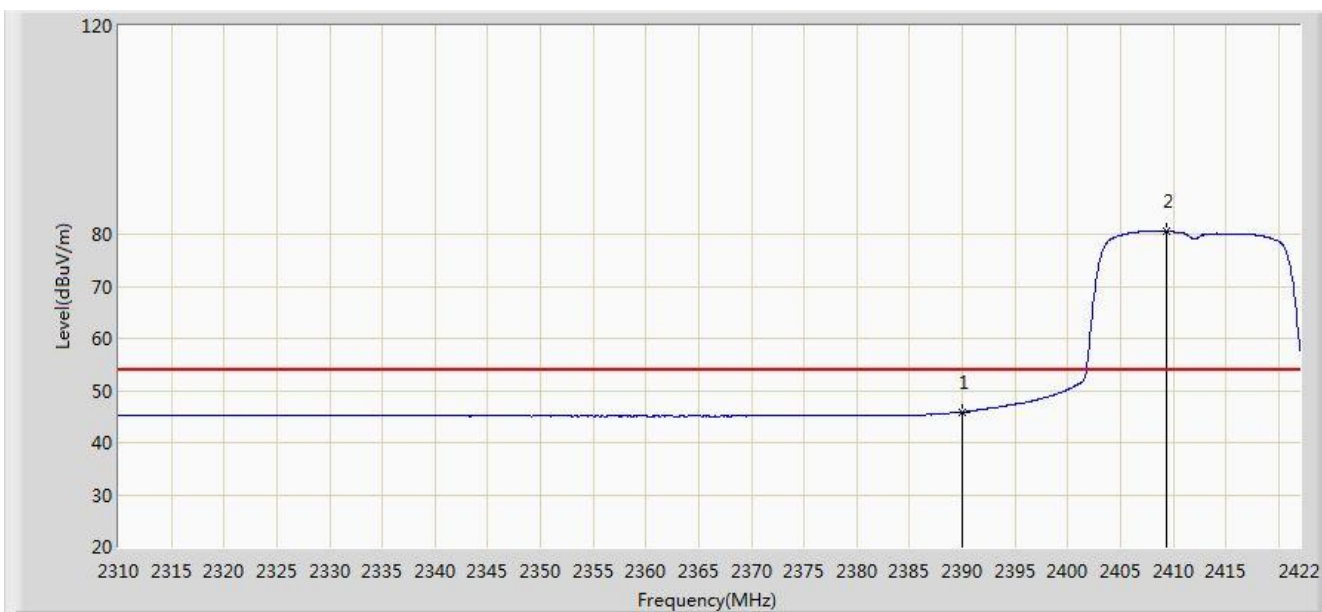


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	45.846	13.292	-8.154	54.000	32.554	AV
2		*	2409.400	80.473	47.944	N/A	N/A	32.529	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/07/19 - 02:57
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 2412MHz Ant 1	

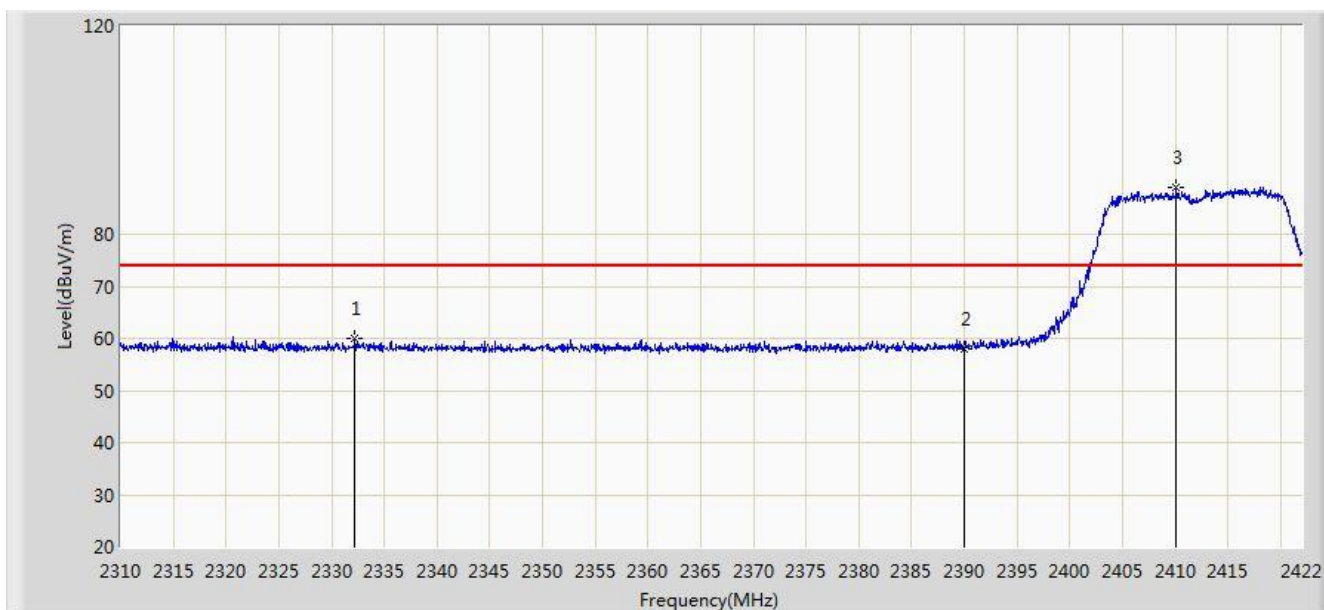


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2332.232	60.045	27.360	-13.955	74.000	32.684	PK
2			2390.000	58.042	25.488	-15.958	74.000	32.554	PK
3		*	2410.128	88.923	56.395	N/A	N/A	32.528	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/07/19 - 02:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 2412MHz Ant 1	

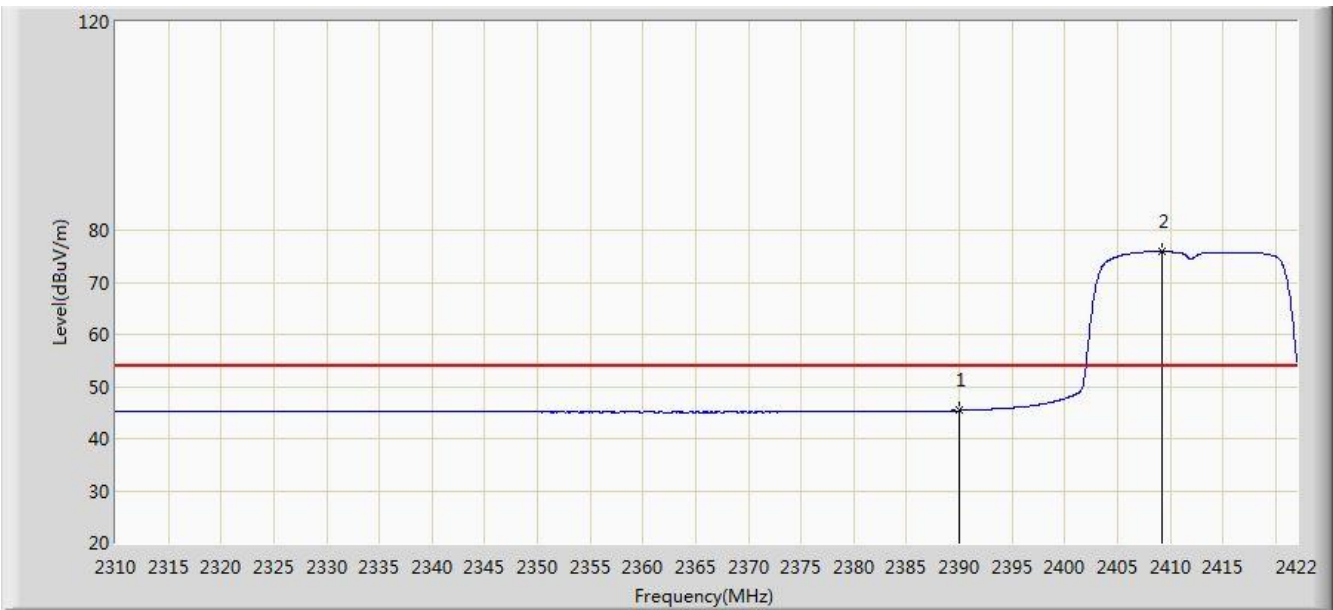


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	45.390	12.836	-8.610	54.000	32.554	AV
2		*	2409.232	75.818	43.289	N/A	N/A	32.529	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/07/19 - 03:00
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 2462MHz Ant 1	

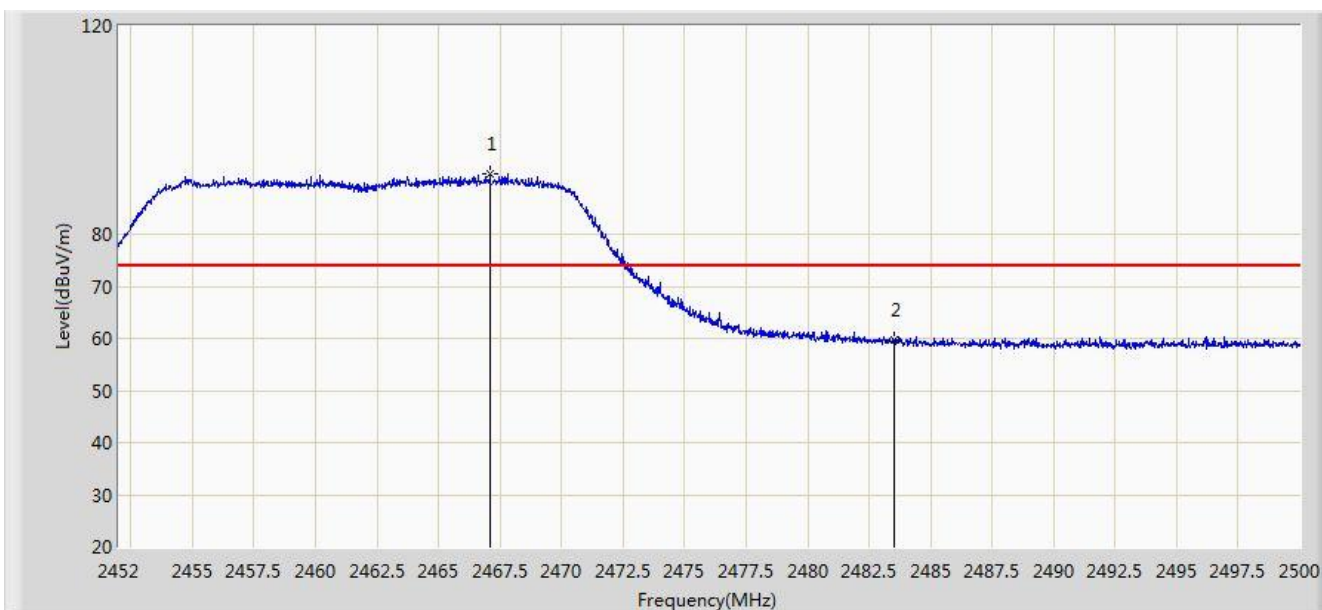


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2467.096	91.536	59.005	N/A	N/A	32.531	PK
2			2483.500	59.724	27.143	-14.276	74.000	32.580	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/07/19 - 03:04
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 2462MHz Ant 1	

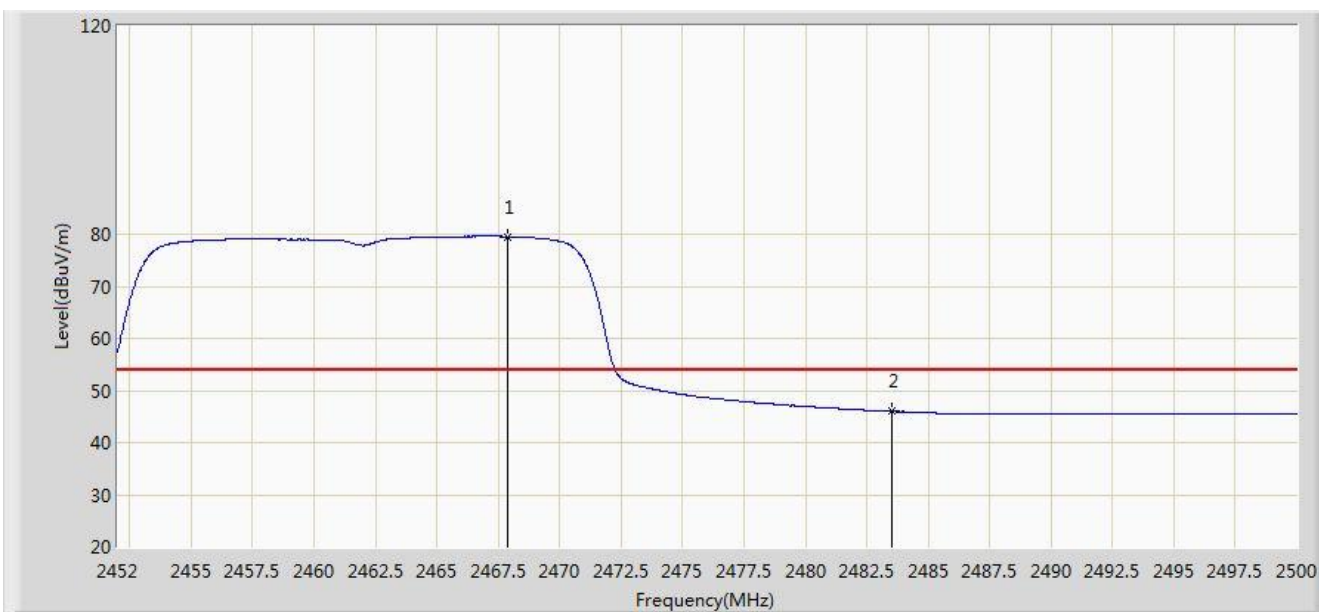


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2467.864	79.555	47.021	N/A	N/A	32.533	AV
2			2483.500	46.019	13.438	-7.981	54.000	32.580	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/07/19 - 03:04
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 2462MHz Ant 1	

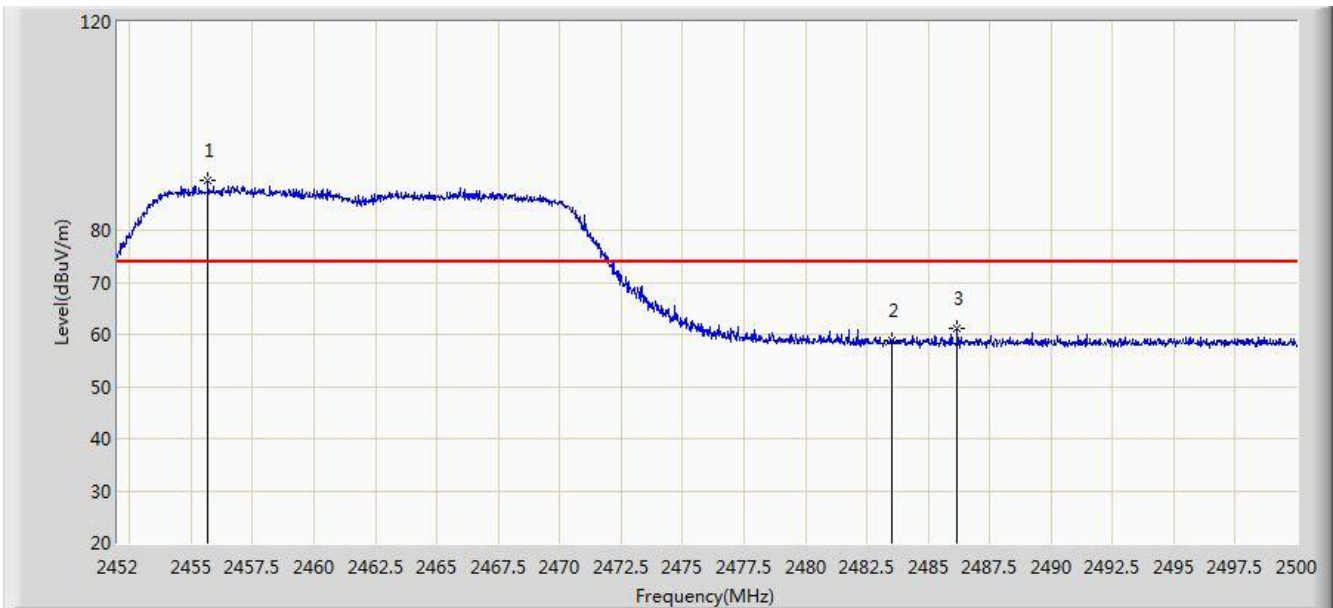

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2455.672	89.642	57.137	N/A	N/A	32.505	PK
2			2483.500	58.817	26.236	-15.183	74.000	32.580	PK
3			2486.176	61.233	28.644	-12.767	74.000	32.589	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/07/19 - 03:06
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 2462MHz Ant 1	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2456.464	77.062	44.555	N/A	N/A	32.507	AV
2			2483.500	45.647	13.066	-8.353	54.000	32.580	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

For Model: RP4D

Site: AC1	Time: 2017/07/20 - 07:22
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: FCC_Part15.209_RE(3m)	Polarity: Horizontal
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at channel 2412MHz Ant 0	

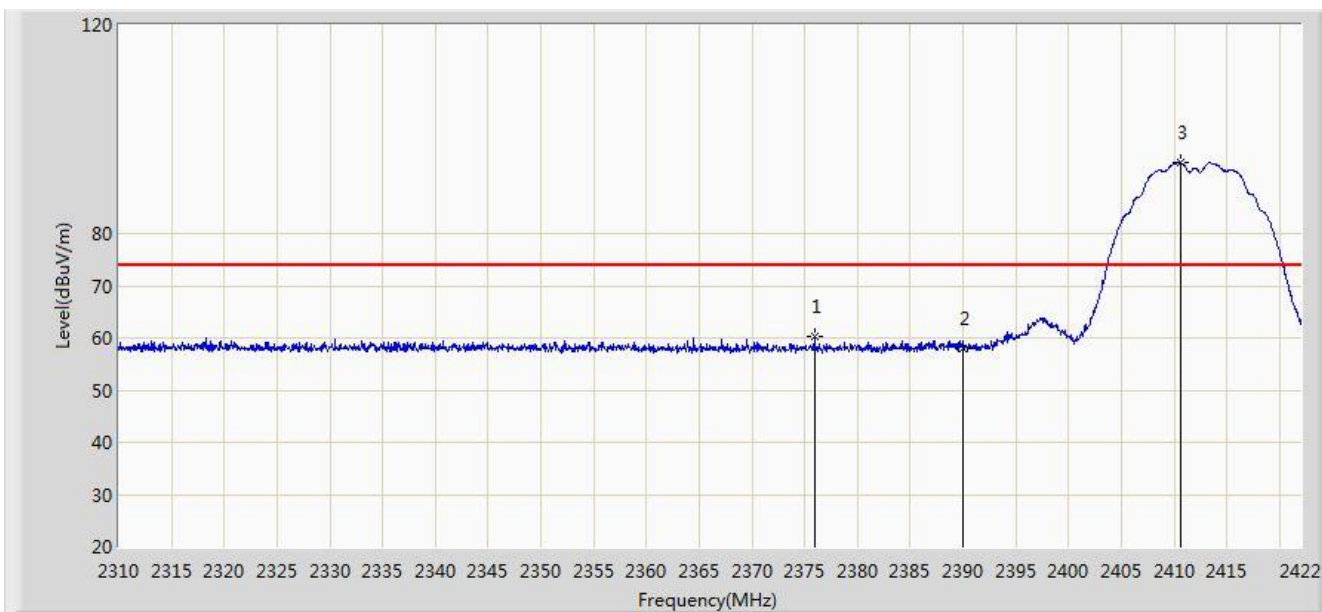


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2375.912	60.175	27.601	-13.825	74.000	32.574	PK
2			2390.000	58.001	25.447	-15.999	74.000	32.554	PK
3		*	2410.632	93.541	61.014	N/A	N/A	32.527	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/07/20 - 07:28
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: FCC_Part15.209_RE(3m)	Polarity: Horizontal
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at channel 2412MHz Ant 0	

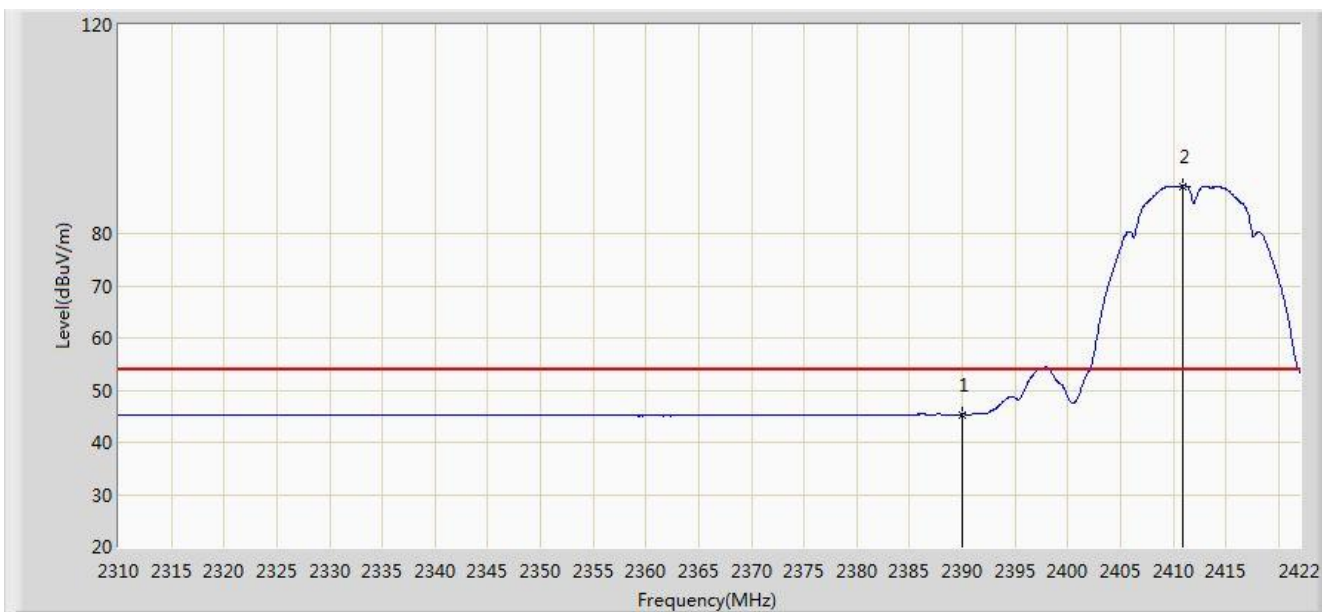


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	45.358	12.804	-8.642	54.000	32.554	AV
2		*	2410.856	89.128	56.601	N/A	N/A	32.527	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/07/20 - 07:29
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: FCC_Part15.209_RE(3m)	Polarity: Vertical
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at channel 2412MHz Ant 0	

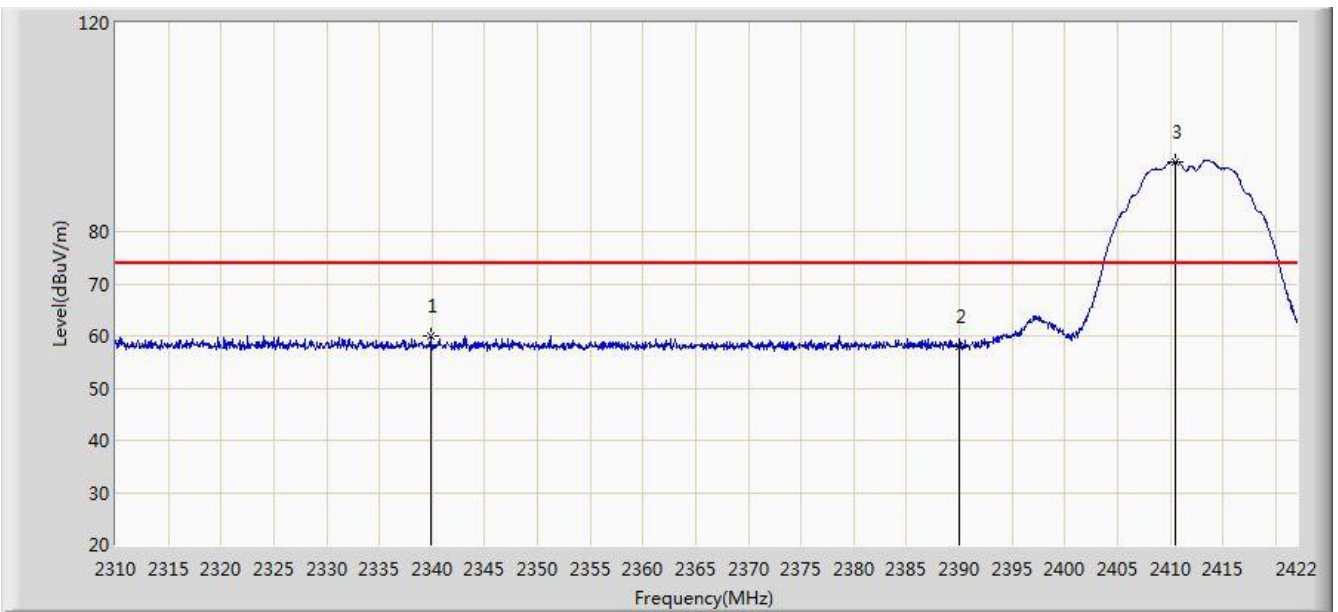


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2339.848	60.096	27.443	-13.904	74.000	32.653	PK
2			2390.000	58.030	25.476	-15.970	74.000	32.554	PK
3		*	2410.464	93.478	60.950	N/A	N/A	32.527	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/07/20 - 07:31
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: FCC_Part15.209_RE(3m)	Polarity: Vertical
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at channel 2412MHz Ant 0	

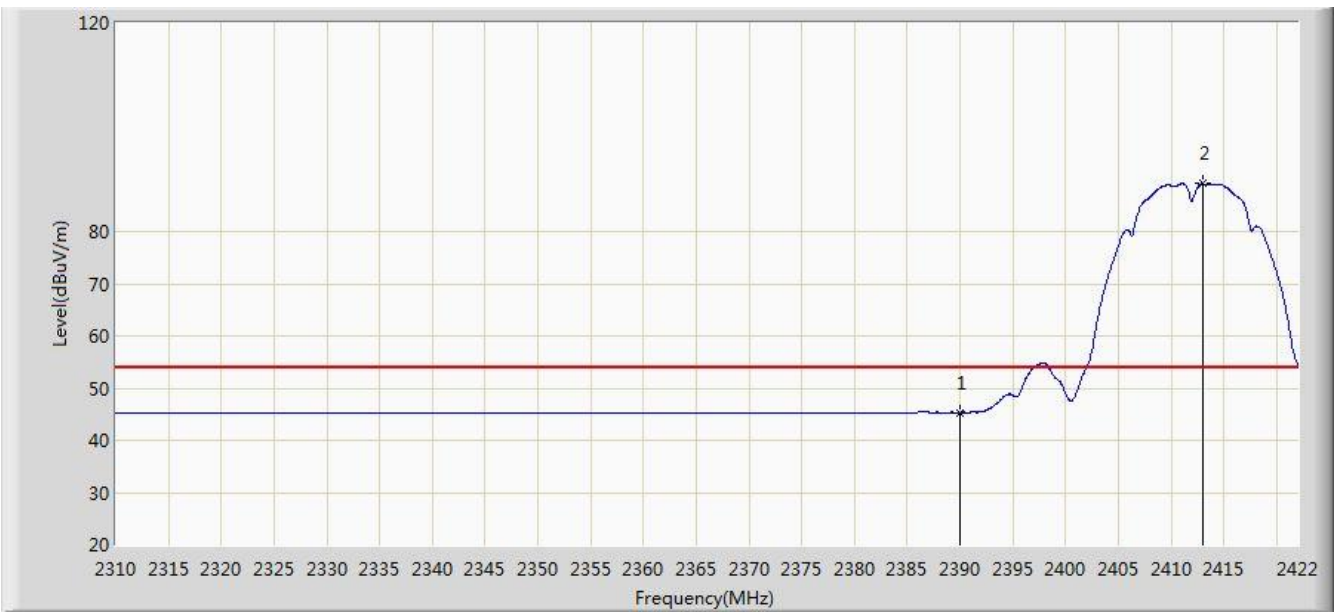

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	45.314	12.760	-8.686	54.000	32.554	AV
2		*	2413.040	89.144	56.620	N/A	N/A	32.524	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/07/20 - 07:32
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: FCC_Part15.209_RE(3m)	Polarity: Horizontal
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at channel 2462MHz Ant 0	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2460.712	96.590	64.076	N/A	N/A	32.514	PK
2			2483.500	58.751	26.170	-15.249	74.000	32.580	PK
3			2488.984	60.585	27.988	-13.415	74.000	32.597	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/07/20 - 07:34
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: FCC_Part15.209_RE(3m)	Polarity: Horizontal
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at channel 2462MHz Ant 0	

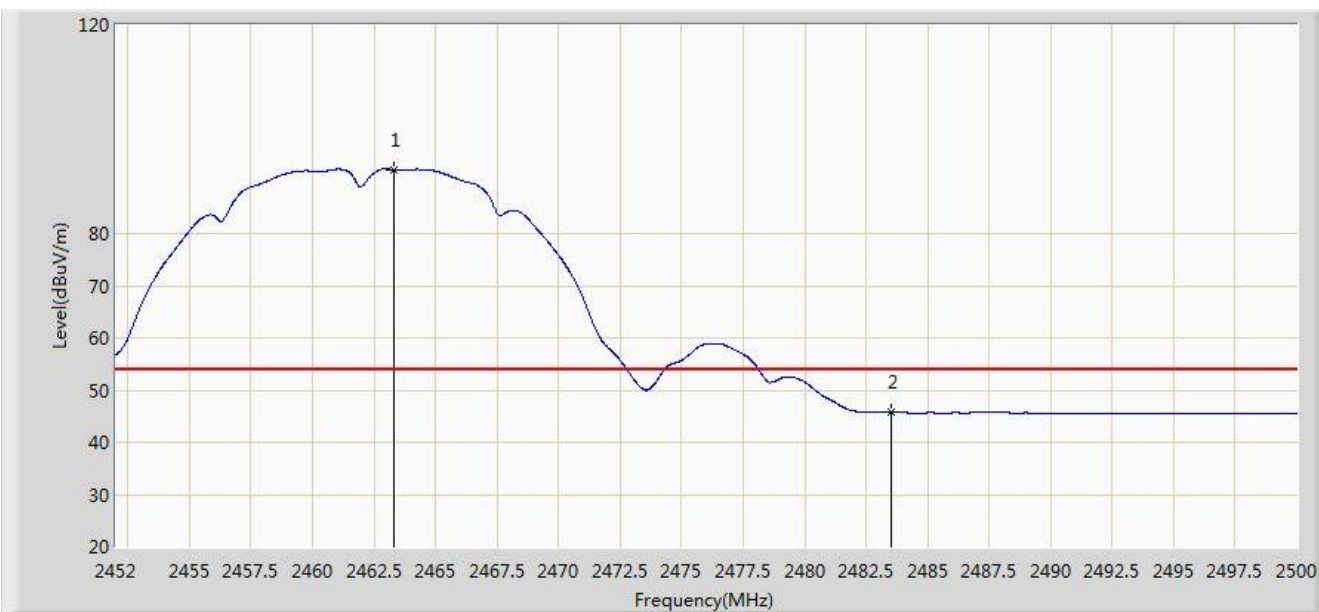


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2463.328	92.211	59.691	N/A	N/A	32.520	AV
2			2483.500	45.715	13.134	-8.285	54.000	32.580	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/07/20 - 07:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: FCC_Part15.209_RE(3m)	Polarity: Vertical
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at channel 2462MHz Ant 0	

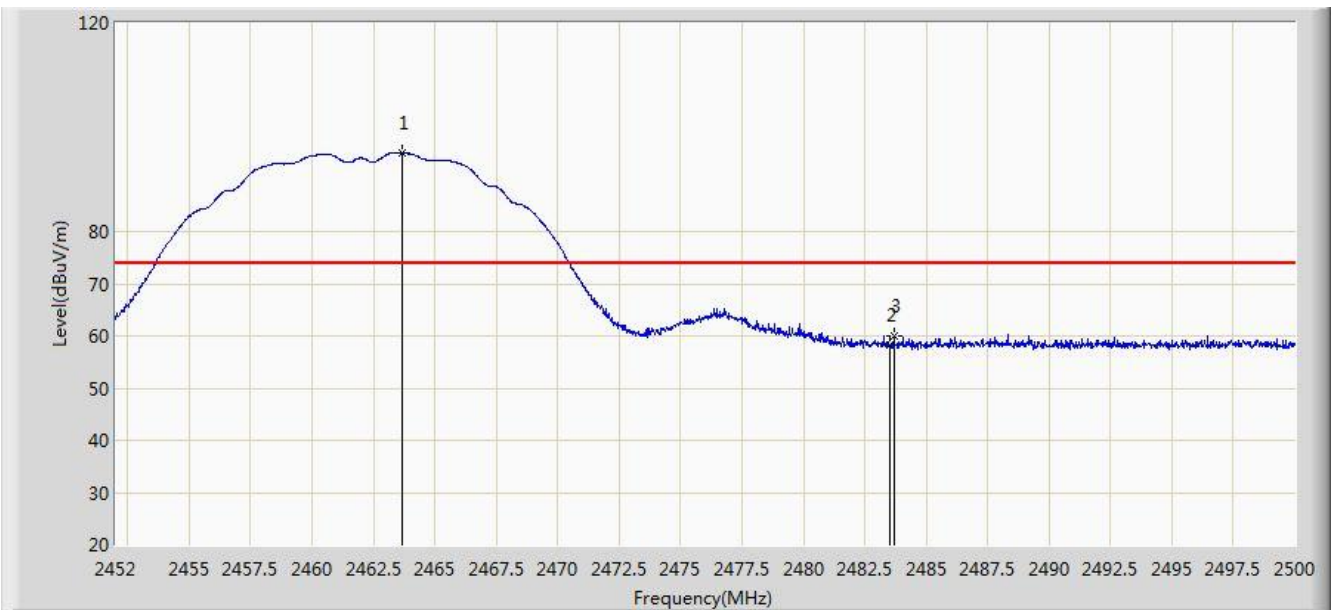


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2463.688	95.048	62.527	N/A	N/A	32.521	PK
2			2483.500	58.176	25.595	-15.824	74.000	32.580	PK
3			2483.704	60.033	27.452	-13.967	74.000	32.582	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/07/20 - 07:36
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: FCC_Part15.209_RE(3m)	Polarity: Vertical
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at channel 2462MHz Ant 0	

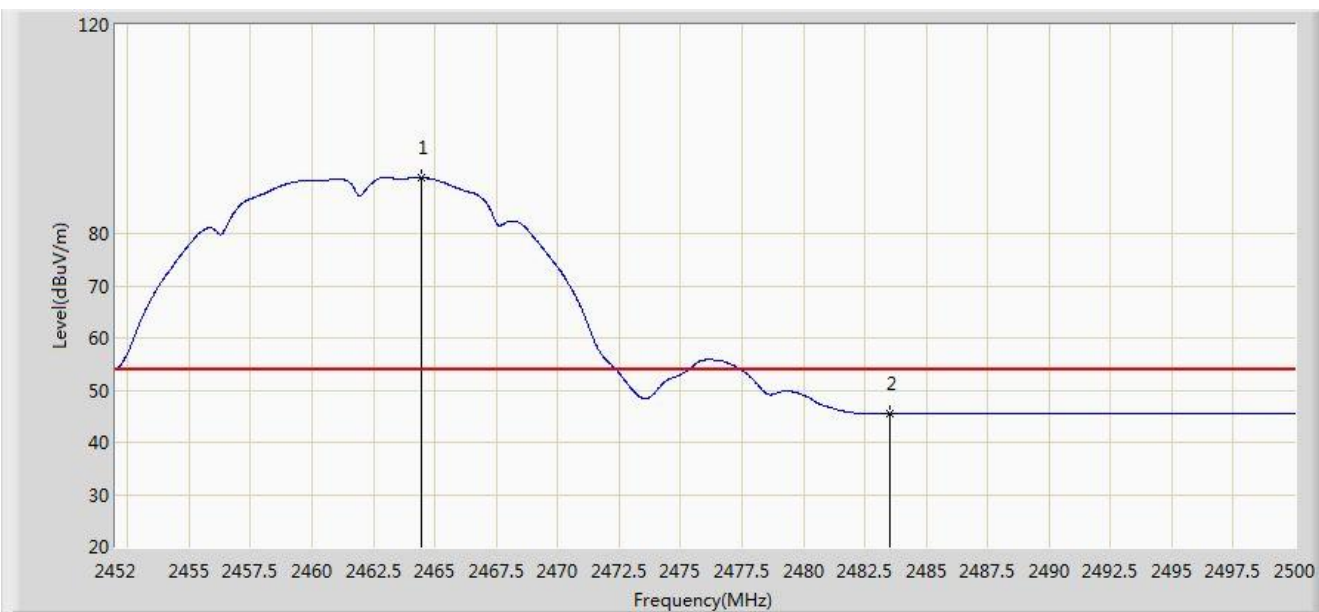


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2464.432	90.660	58.137	N/A	N/A	32.523	AV
2			2483.500	45.462	12.881	-8.538	54.000	32.580	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/07/20 - 07:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: FCC_Part15.209_RE(3m)	Polarity: Horizontal
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at channel 2412MHz Ant 0	

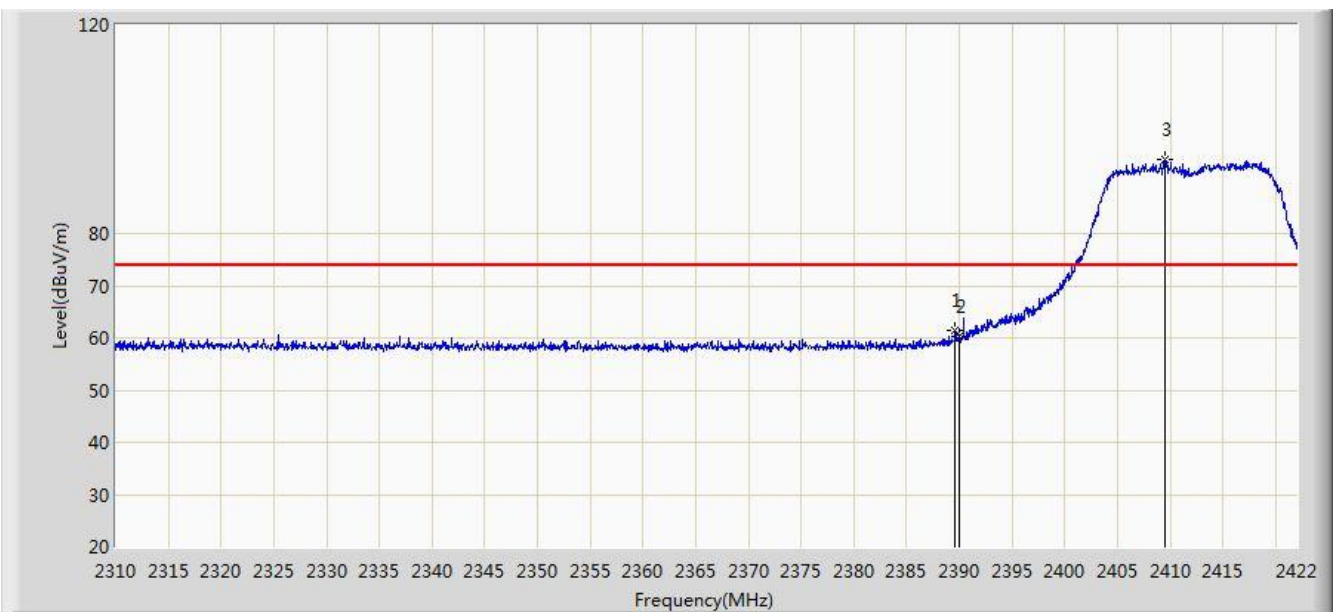


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.632	61.352	28.797	-12.648	74.000	32.555	PK
2			2390.000	60.308	27.754	-13.692	74.000	32.554	PK
3		*	2409.456	94.158	61.629	N/A	N/A	32.529	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/07/20 - 07:40
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: FCC_Part15.209_RE(3m)	Polarity: Horizontal
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at channel 2412MHz Ant 0	

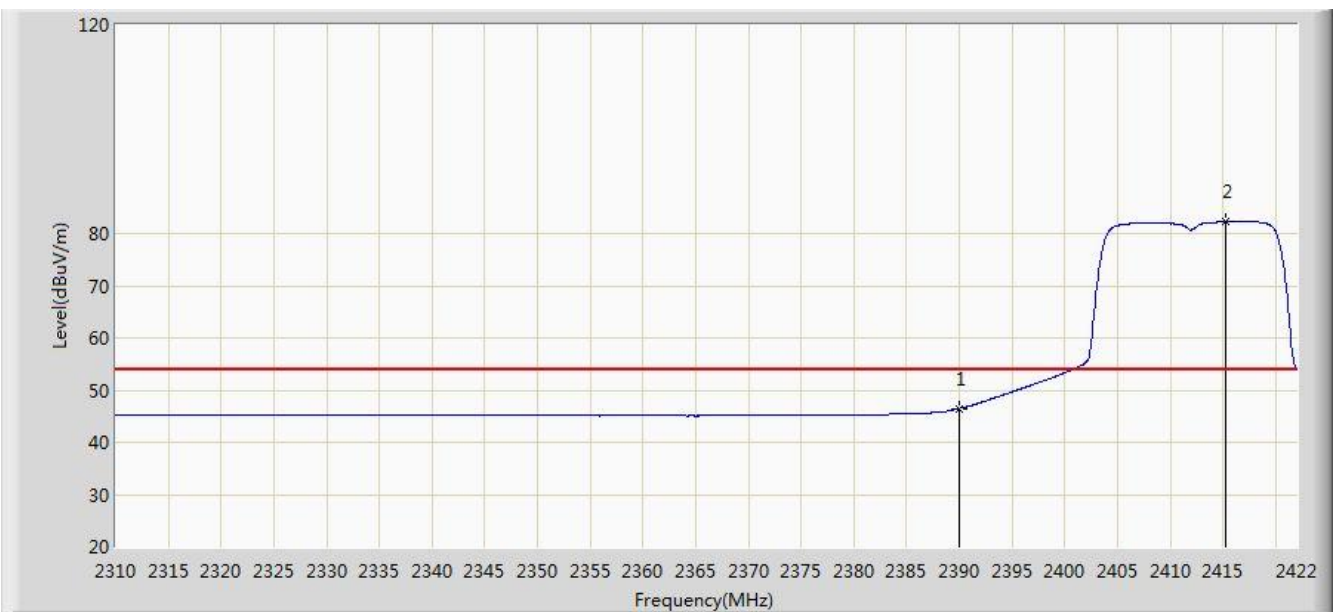


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	46.494	13.940	-7.506	54.000	32.554	AV
2		*	2415.224	82.290	49.768	N/A	N/A	32.522	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/07/20 - 07:41
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: FCC_Part15.209_RE(3m)	Polarity: Vertical
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at channel 2412MHz Ant 0	

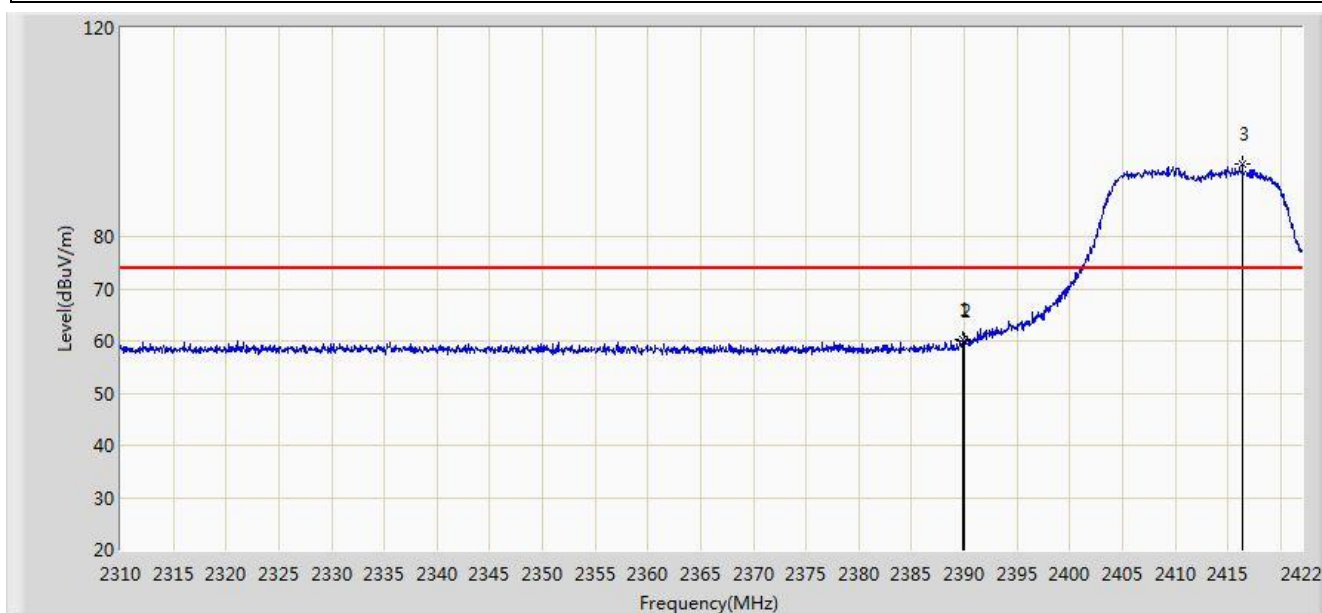


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.856	60.233	27.678	-13.767	74.000	32.555	PK
2			2390.000	59.939	27.385	-14.061	74.000	32.554	PK
3		*	2416.400	93.880	61.360	N/A	N/A	32.520	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/07/20 - 07:43
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: FCC_Part15.209_RE(3m)	Polarity: Vertical
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at channel 2412MHz Ant 0	

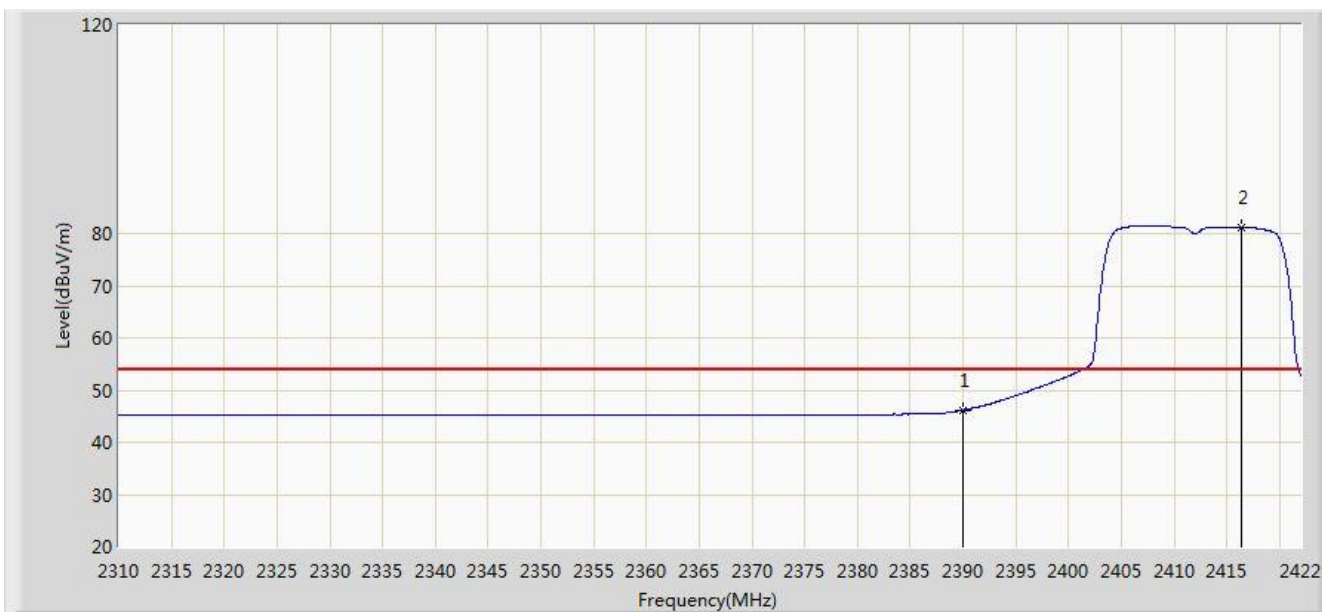


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	46.139	13.585	-7.861	54.000	32.554	AV
2		*	2416.344	81.207	48.687	N/A	N/A	32.520	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/07/20 - 07:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: FCC_Part15.209_RE(3m)	Polarity: Horizontal
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at channel 2462MHz Ant 0	

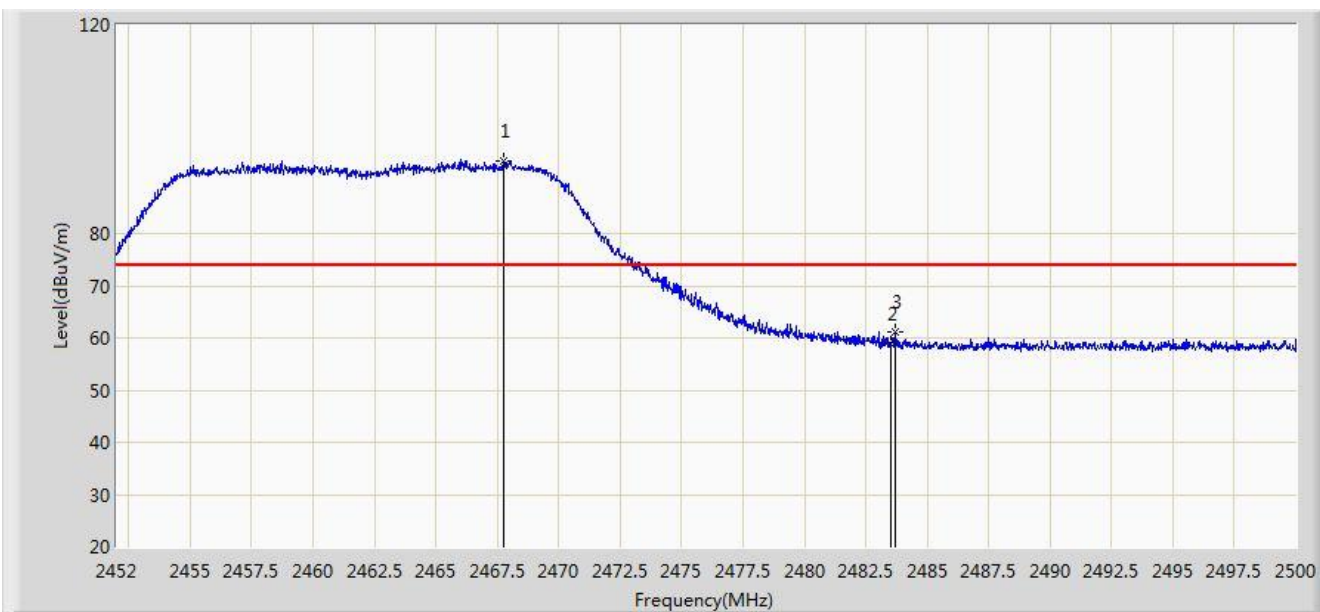


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2467.768	93.844	61.311	N/A	N/A	32.533	PK
2			2483.500	58.892	26.311	-15.108	74.000	32.580	PK
3			2483.680	61.054	28.473	-12.946	74.000	32.582	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/07/20 - 07:46
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: FCC_Part15.209_RE(3m)	Polarity: Horizontal
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at channel 2462MHz Ant 0	

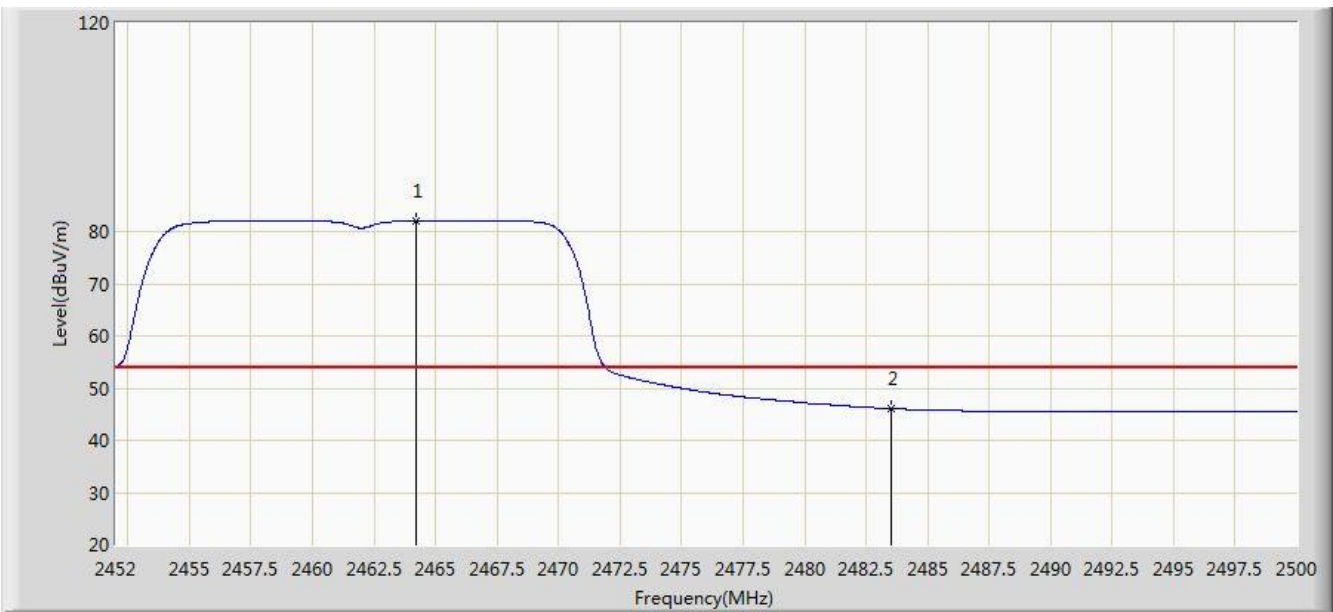


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2464.216	81.957	49.434	N/A	N/A	32.523	AV
2			2483.500	46.068	13.487	-7.932	54.000	32.580	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/07/20 - 07:47
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: FCC_Part15.209_RE(3m)	Polarity: Vertical
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at channel 2462MHz Ant 0	

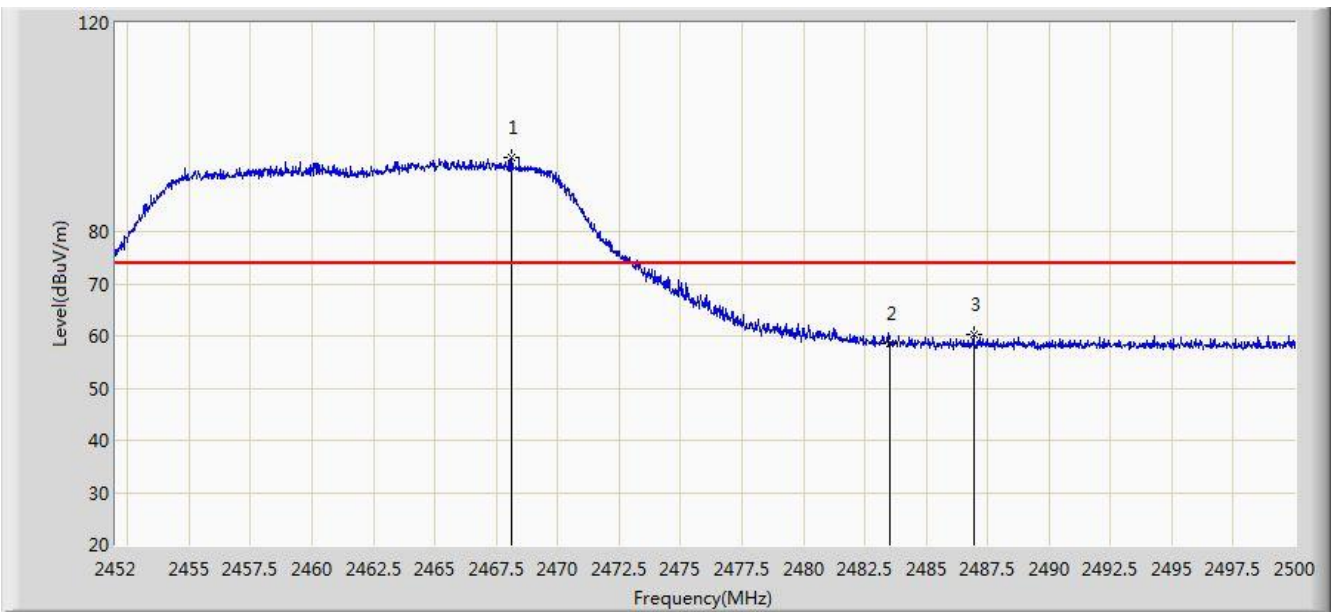


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2468.104	94.164	61.630	N/A	N/A	32.535	PK
2			2483.500	58.422	25.841	-15.578	74.000	32.580	PK
3			2486.920	60.207	27.616	-13.793	74.000	32.590	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/07/20 - 07:48
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: FCC_Part15.209_RE(3m)	Polarity: Vertical
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at channel 2462MHz Ant 0	

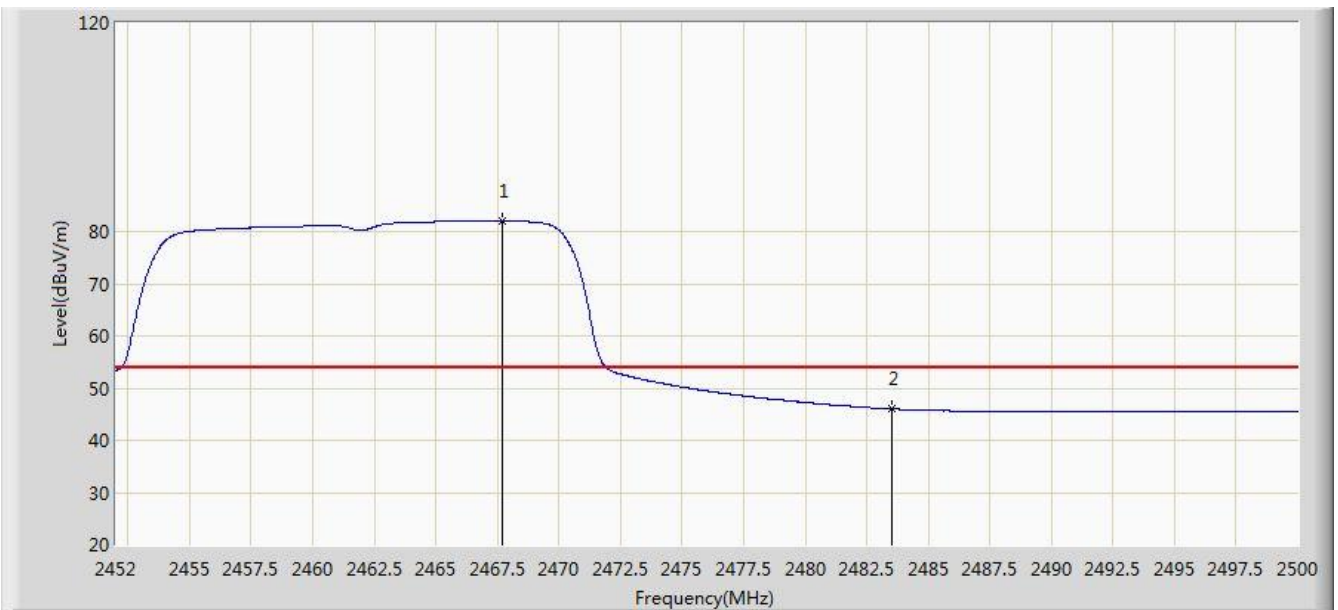


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2467.720	82.044	49.511	N/A	N/A	32.533	AV
2			2483.500	45.978	13.397	-8.022	54.000	32.580	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/07/20 - 07:51
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: FCC_Part15.209_RE(3m)	Polarity: Horizontal
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 2412MHz Ant 0	

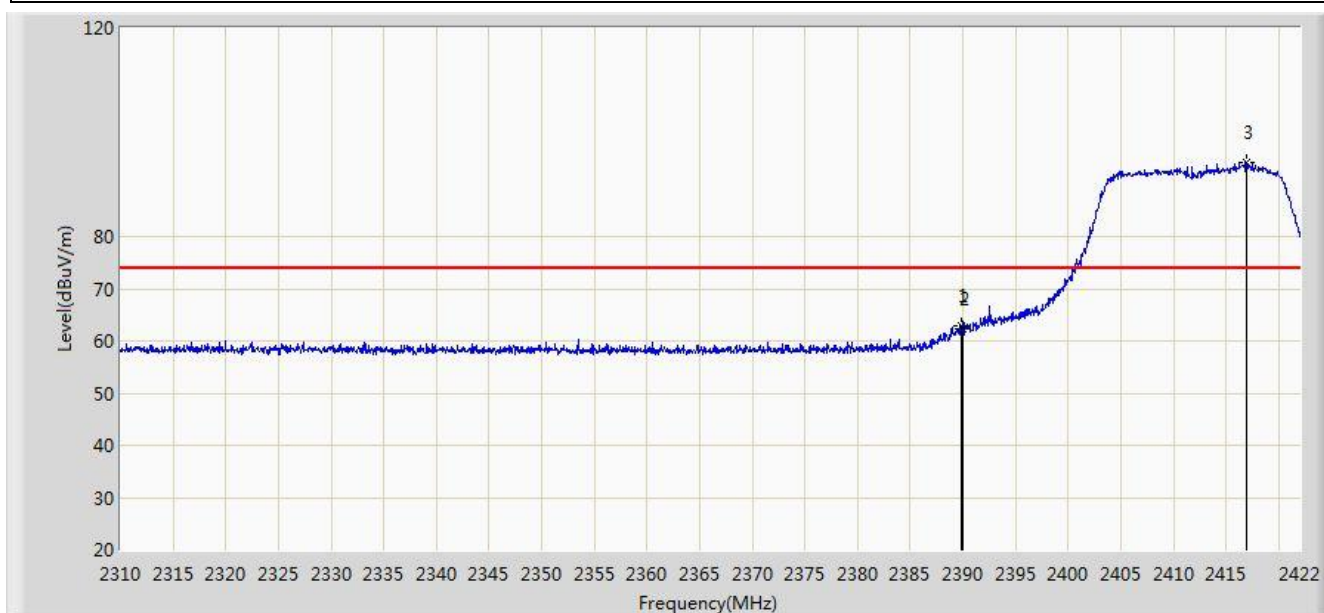


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.856	62.970	30.415	-11.030	74.000	32.555	PK
2			2390.000	62.447	29.893	-11.553	74.000	32.554	PK
3		*	2416.904	94.112	61.592	N/A	N/A	32.520	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/07/20 - 07:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: FCC_Part15.209_RE(3m)	Polarity: Horizontal
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 2412MHz Ant 0	

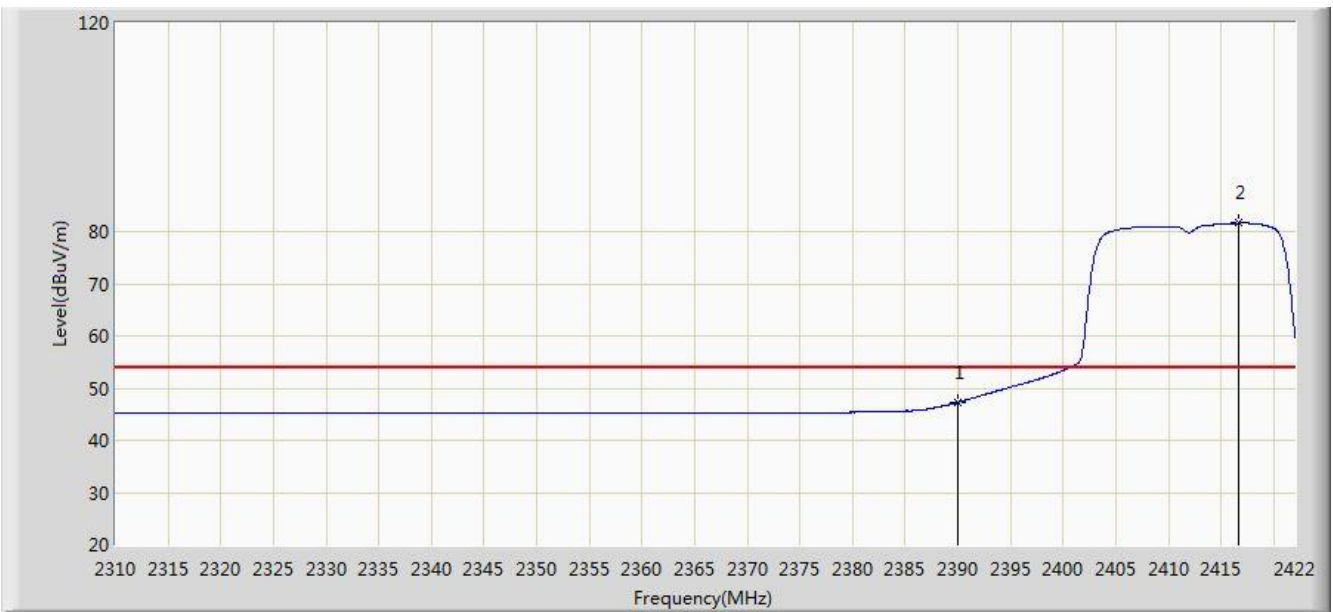


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	47.306	14.752	-6.694	54.000	32.554	AV
2		*	2416.736	81.617	49.097	N/A	N/A	32.520	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/07/20 - 07:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: FCC_Part15.209_RE(3m)	Polarity: Vertical
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 2412MHz Ant 0	

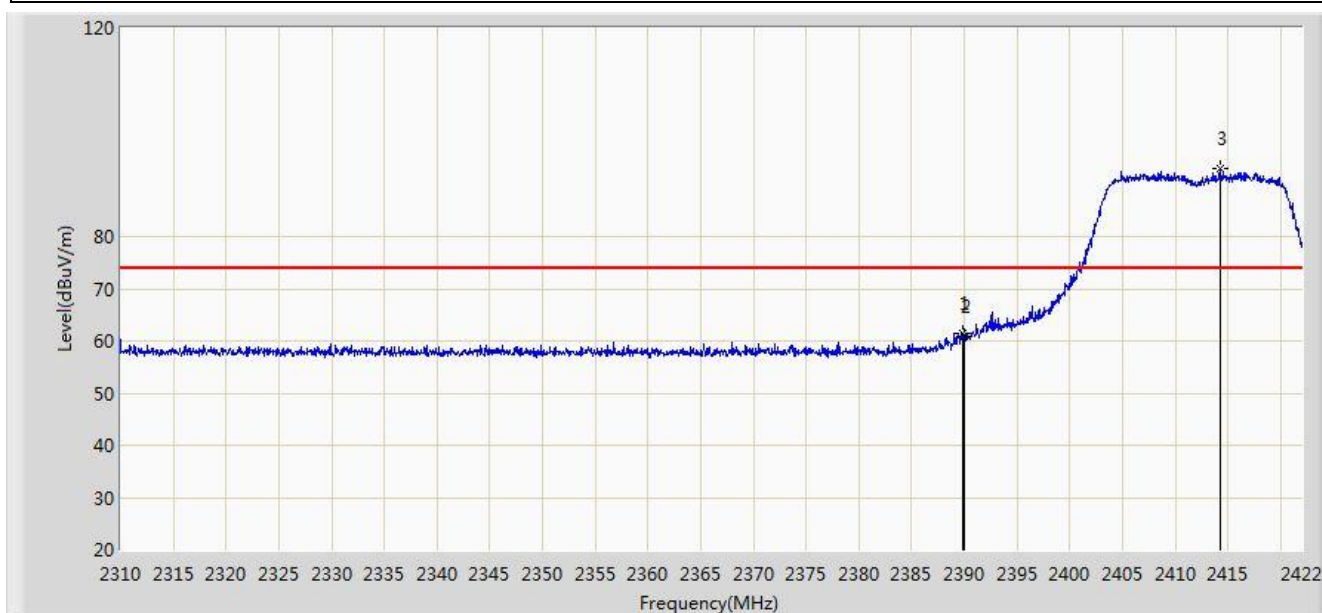


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.856	61.529	28.974	-12.471	74.000	32.555	PK
2			2390.000	60.902	28.348	-13.098	74.000	32.554	PK
3		*	2414.216	93.040	60.517	N/A	N/A	32.523	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/07/20 - 07:55
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: FCC_Part15.209_RE(3m)	Polarity: Vertical
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 2412MHz Ant 0	

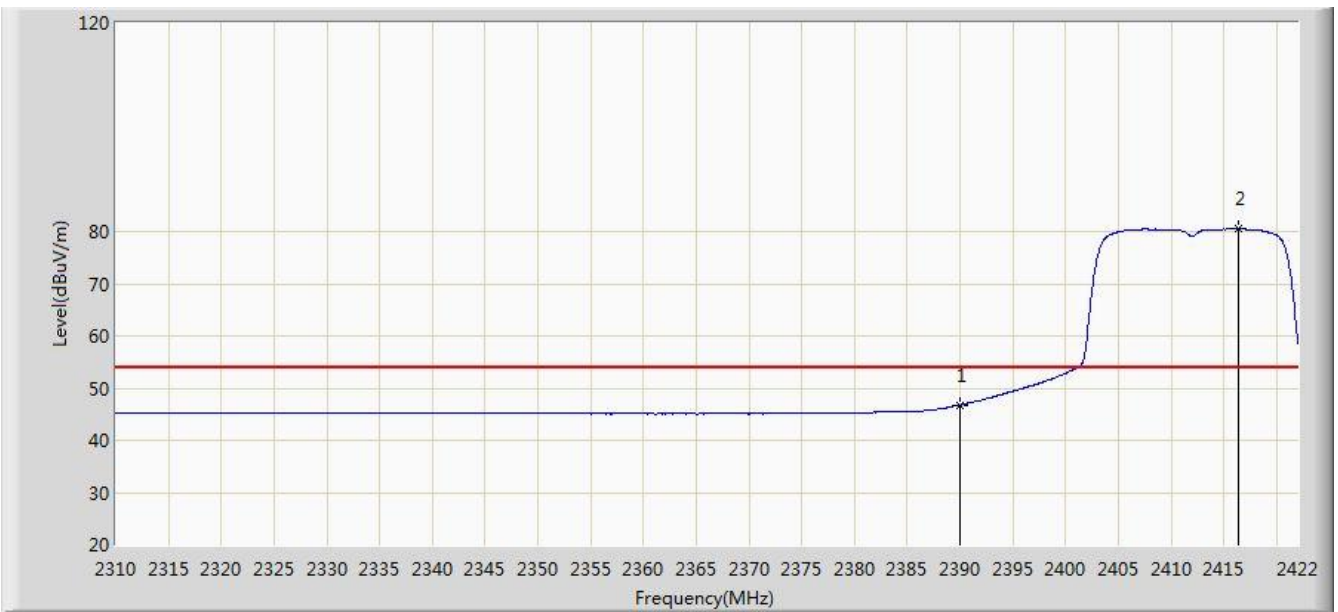


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	46.740	14.186	-7.260	54.000	32.554	AV
2		*	2416.344	80.474	47.954	N/A	N/A	32.520	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/07/20 - 07:55
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: FCC_Part15.209_RE(3m)	Polarity: Horizontal
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 2462MHz Ant 0	

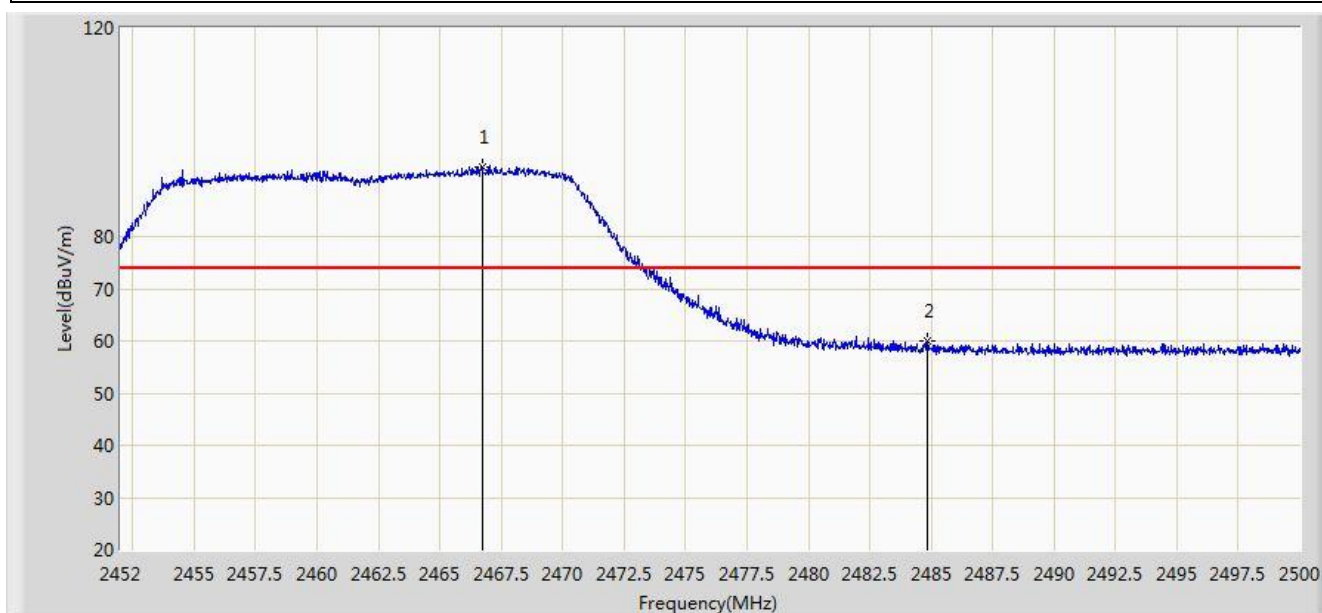


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2466.736	93.474	60.944	N/A	N/A	32.530	PK
2			2484.856	59.975	27.390	-14.025	74.000	32.585	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/07/20 - 07:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: FCC_Part15.209_RE(3m)	Polarity: Horizontal
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 2462MHz Ant 0	

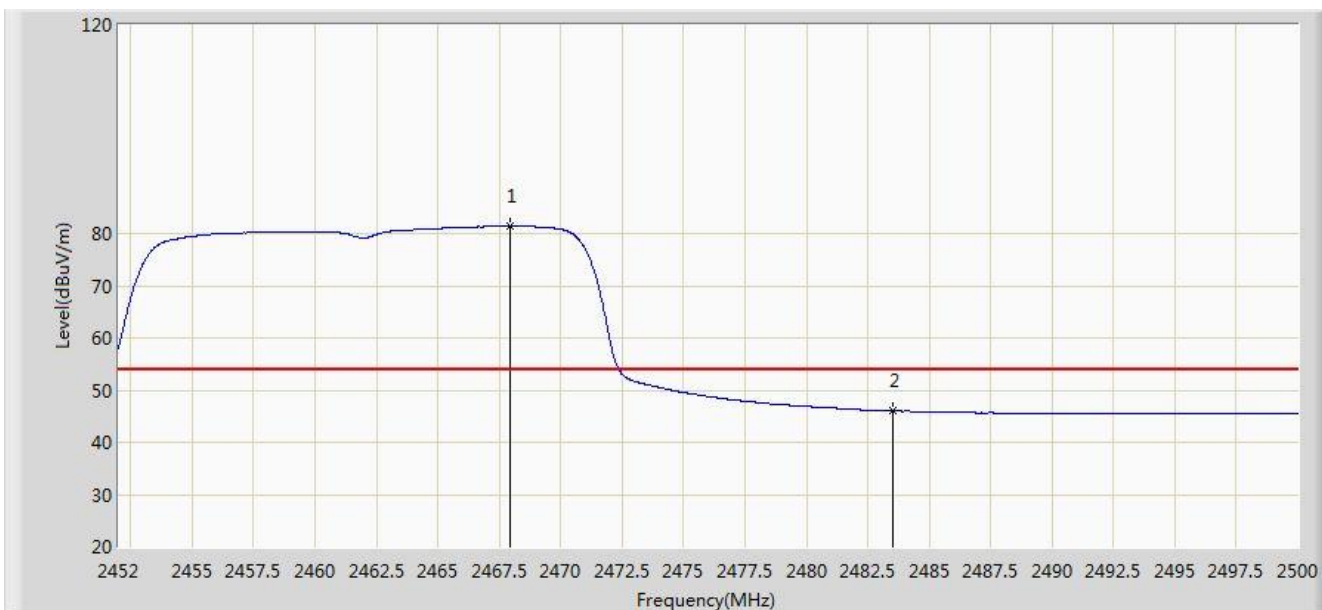


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2467.960	81.369	48.835	N/A	N/A	32.534	AV
2			2483.500	45.972	13.391	-8.028	54.000	32.580	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/07/20 - 07:57
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: FCC_Part15.209_RE(3m)	Polarity: Vertical
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 2462MHz Ant 0	

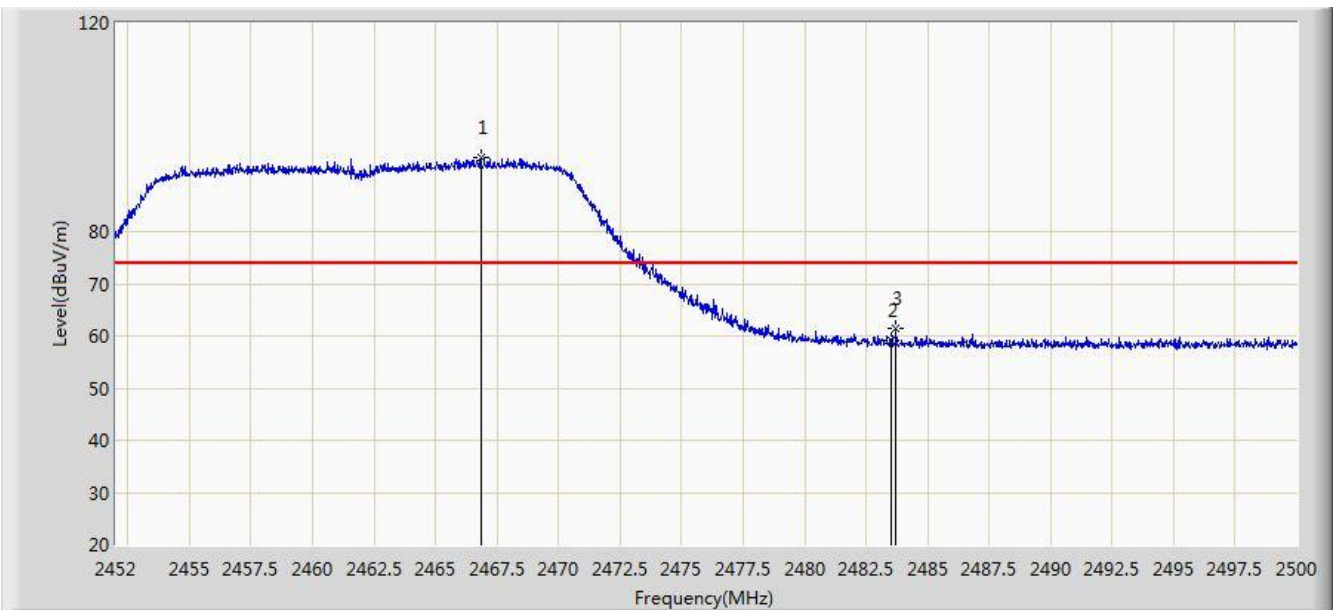


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2466.832	94.270	61.739	N/A	N/A	32.531	PK
2			2483.500	59.219	26.638	-14.781	74.000	32.580	PK
3			2483.728	61.458	28.877	-12.542	74.000	32.582	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/07/20 - 07:58
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: FCC_Part15.209_RE(3m)	Polarity: Vertical
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 2462MHz Ant 0	

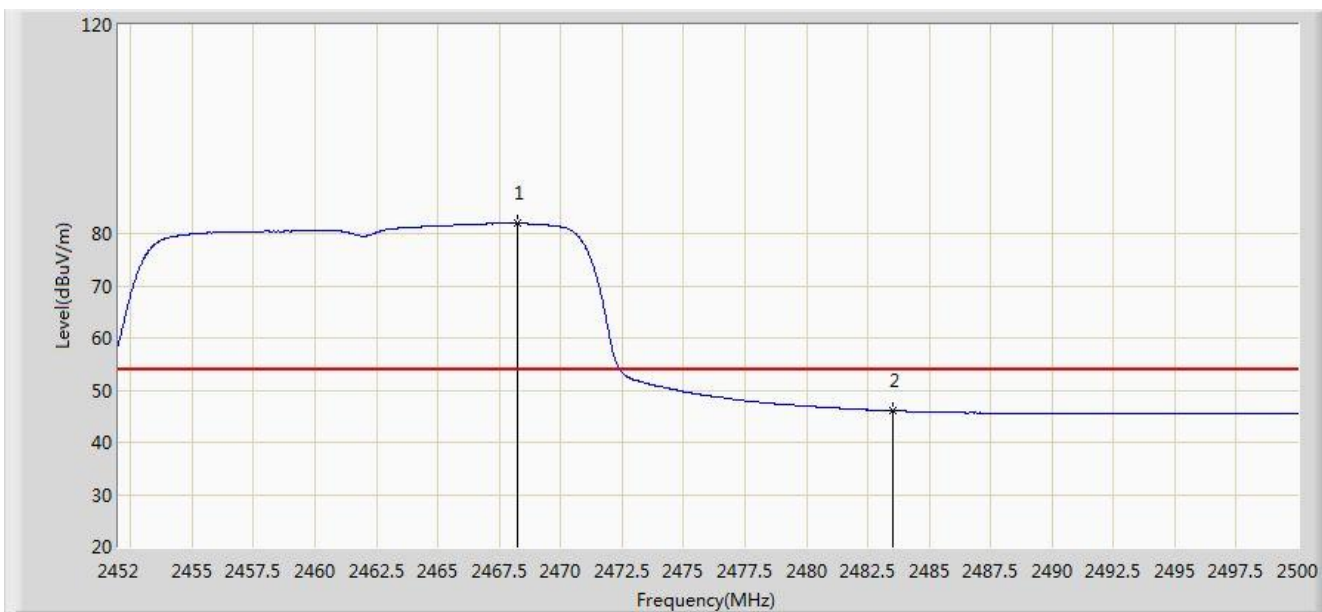


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2468.248	81.960	49.425	N/A	N/A	32.535	AV
2			2483.500	46.035	13.454	-7.965	54.000	32.580	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/07/20 - 07:58
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: FCC_Part15.209_RE(3m)	Polarity: Horizontal
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at channel 2412MHz Ant 1	

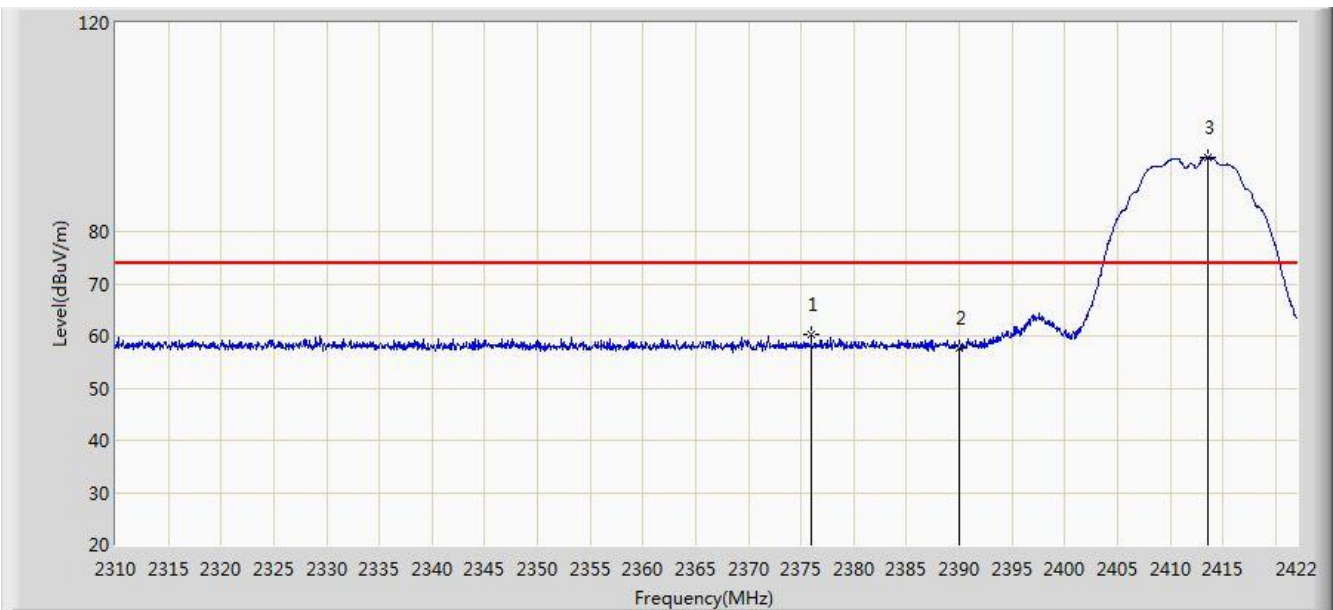


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2375.968	60.218	27.644	-13.782	74.000	32.574	PK
2			2390.000	57.702	25.148	-16.298	74.000	32.554	PK
3		*	2413.600	94.213	61.689	N/A	N/A	32.524	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/07/20 - 08:00
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: FCC_Part15.209_RE(3m)	Polarity: Horizontal
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at channel 2412MHz Ant 1	

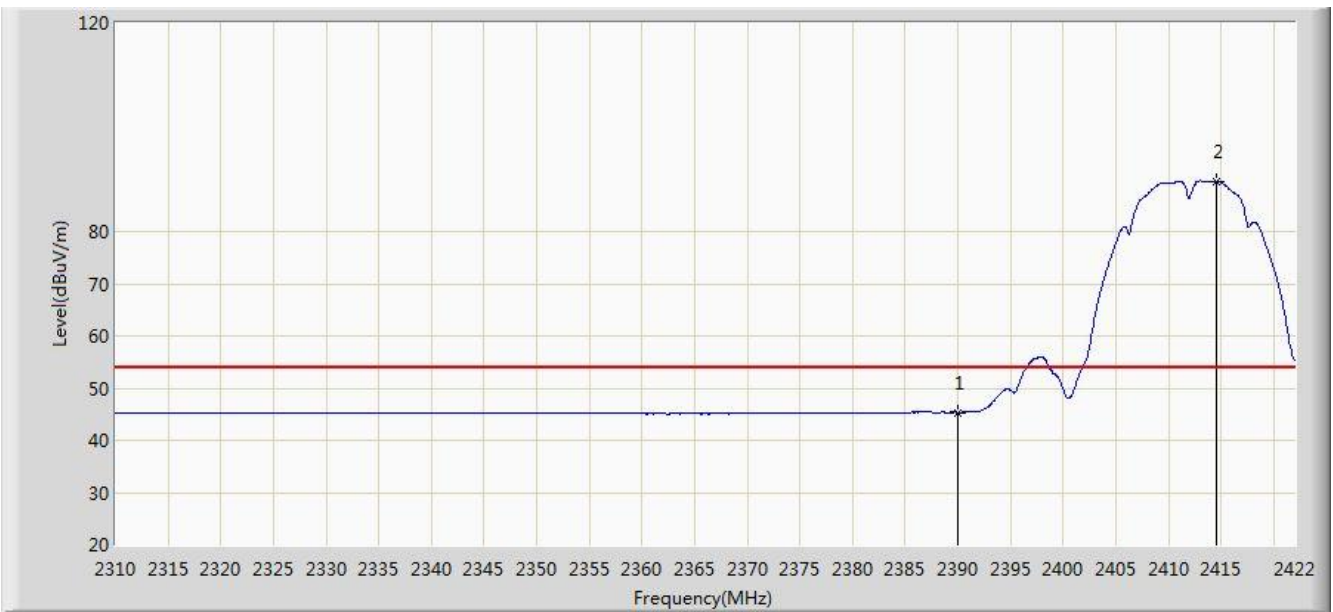


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	45.292	12.738	-8.708	54.000	32.554	AV
2		*	2414.608	89.678	57.156	N/A	N/A	32.522	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/07/20 - 08:01
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: FCC_Part15.209_RE(3m)	Polarity: Vertical
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at channel 2412MHz Ant 1	

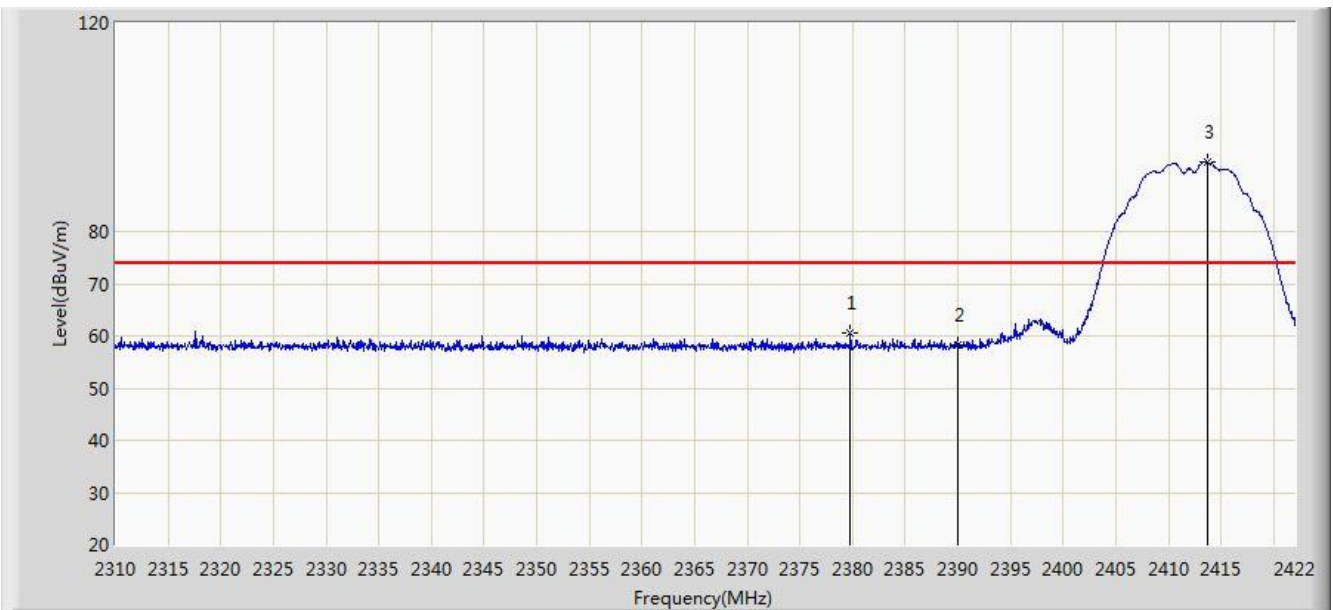


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2379.776	60.444	27.876	-13.556	74.000	32.569	PK
2			2390.000	58.331	25.777	-15.669	74.000	32.554	PK
3		*	2413.768	93.201	60.678	N/A	N/A	32.523	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/07/20 - 08:02
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: FCC_Part15.209_RE(3m)	Polarity: Vertical
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at channel 2412MHz Ant 1	

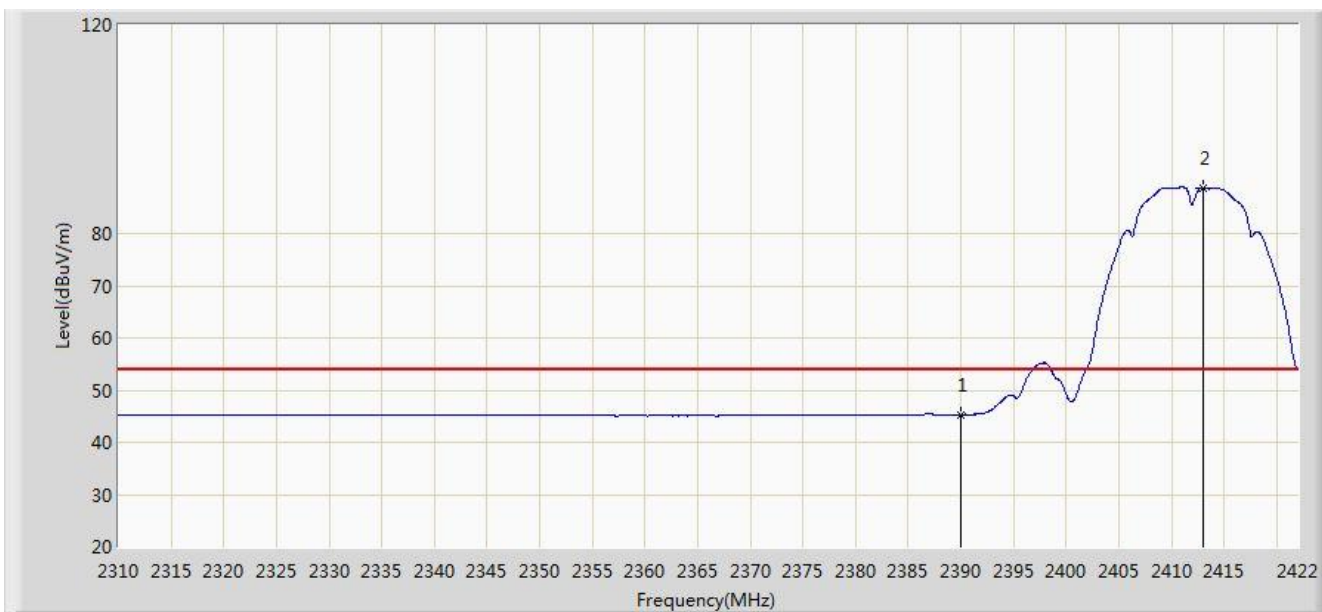


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	45.277	12.723	-8.723	54.000	32.554	AV
2		*	2413.040	88.808	56.284	N/A	N/A	32.524	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/07/20 - 08:03
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: FCC_Part15.209_RE(3m)	Polarity: Horizontal
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at channel 2462MHz Ant 1	

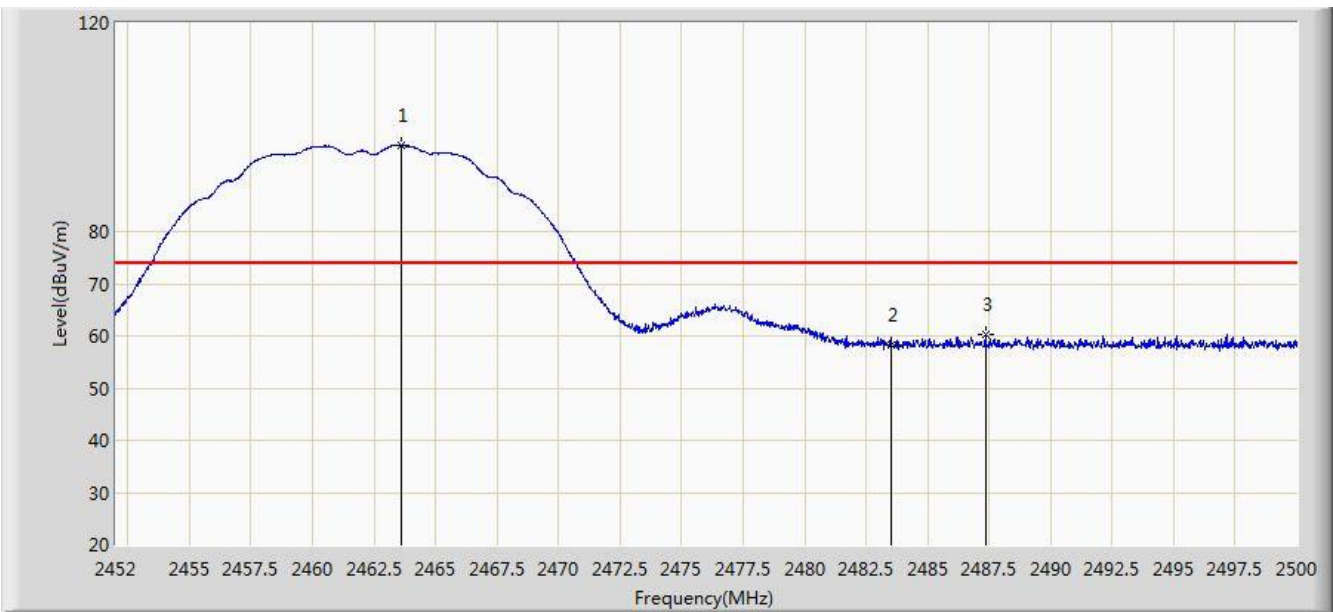


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2463.616	96.450	63.929	N/A	N/A	32.521	PK
2			2483.500	58.403	25.822	-15.597	74.000	32.580	PK
3			2487.352	60.213	27.621	-13.787	74.000	32.592	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/07/20 - 08:05
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: FCC_Part15.209_RE(3m)	Polarity: Horizontal
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at channel 2462MHz Ant 1	

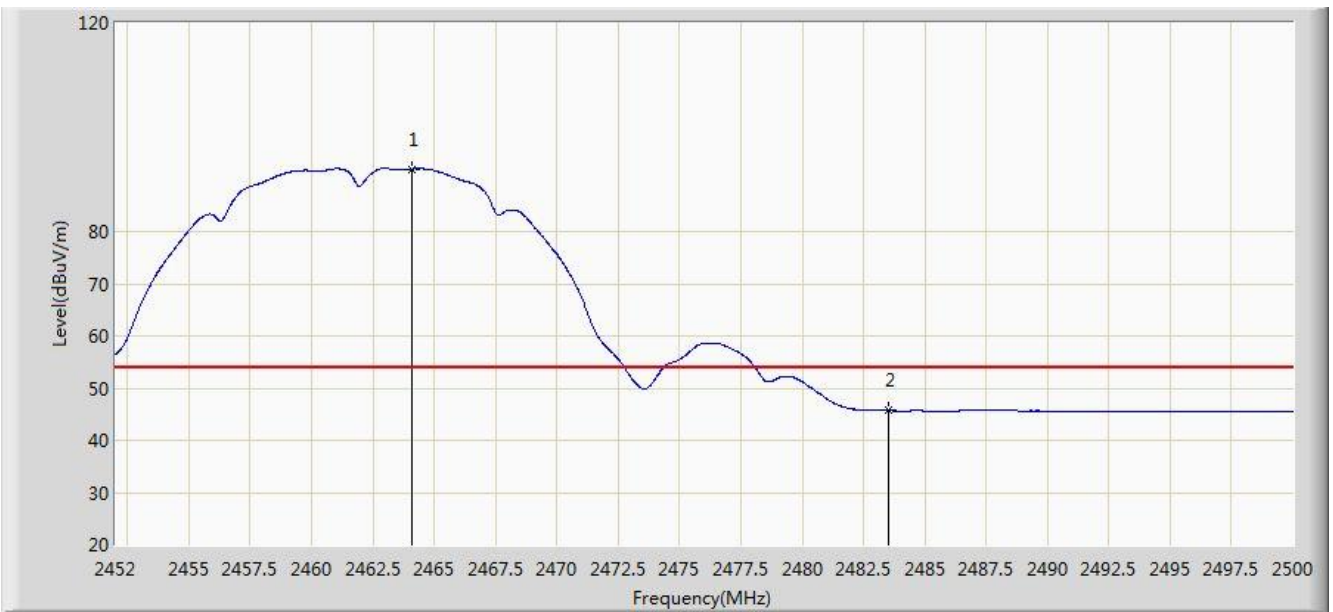


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2464.072	92.013	59.491	N/A	N/A	32.523	AV
2			2483.500	45.754	13.173	-8.246	54.000	32.580	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/07/20 - 08:05
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: FCC_Part15.209_RE(3m)	Polarity: Vertical
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at channel 2462MHz Ant 1	

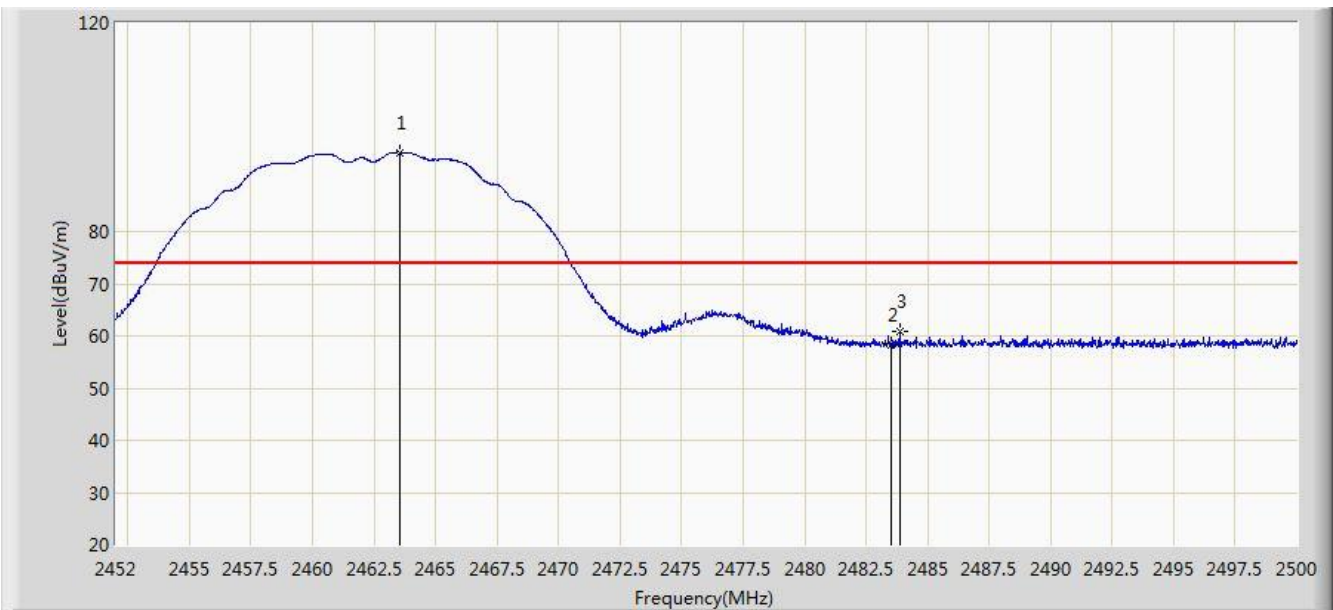


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2463.544	95.207	62.686	N/A	N/A	32.521	PK
2			2483.500	58.253	25.672	-15.747	74.000	32.580	PK
3			2483.872	60.964	28.382	-13.036	74.000	32.582	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/07/20 - 08:07
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: FCC_Part15.209_RE(3m)	Polarity: Vertical
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at channel 2462MHz Ant 1	

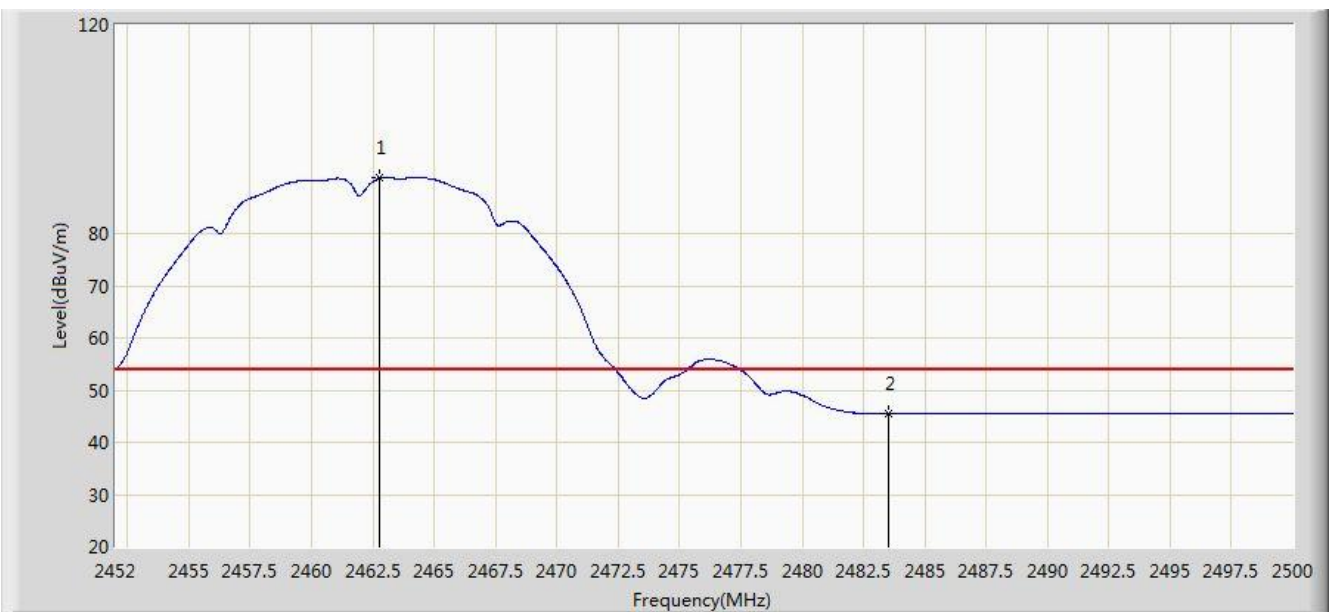


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2462.776	90.654	58.135	N/A	N/A	32.518	AV
2			2483.500	45.523	12.942	-8.477	54.000	32.580	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/07/20 - 08:07
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: FCC_Part15.209_RE(3m)	Polarity: Horizontal
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at channel 2412MHz Ant 1	

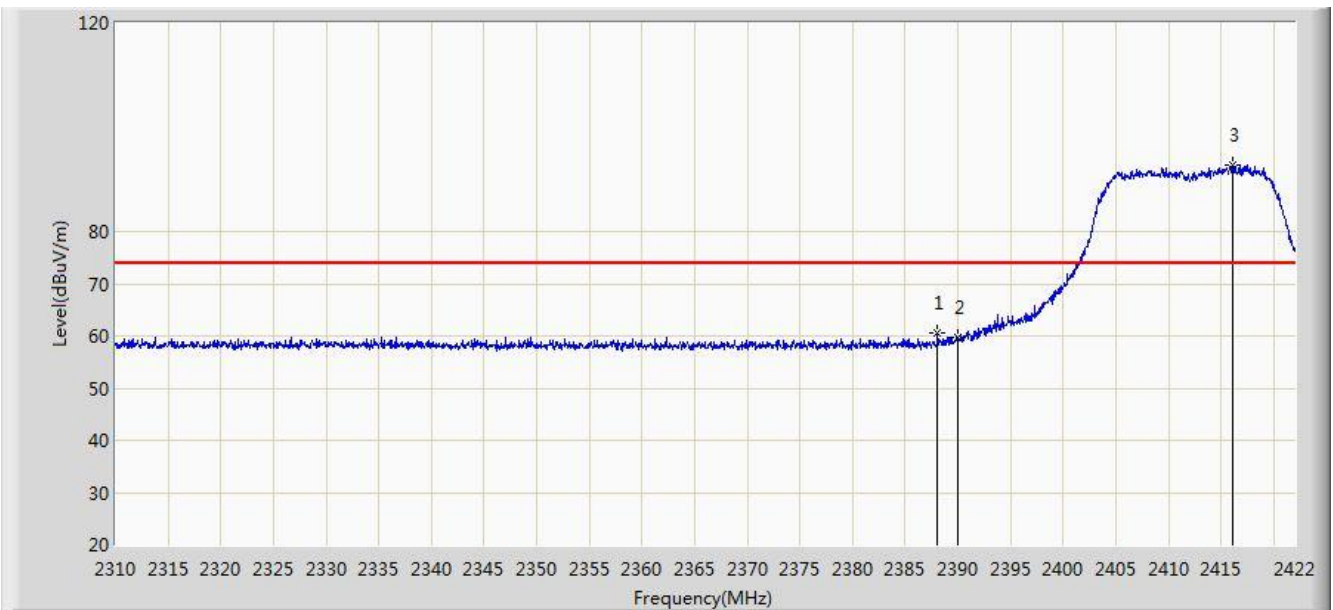


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.064	60.473	27.916	-13.527	74.000	32.557	PK
2			2390.000	59.593	27.039	-14.407	74.000	32.554	PK
3		*	2416.120	92.687	60.166	N/A	N/A	32.521	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/07/20 - 08:10
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: FCC_Part15.209_RE(3m)	Polarity: Horizontal
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at channel 2412MHz Ant 1	

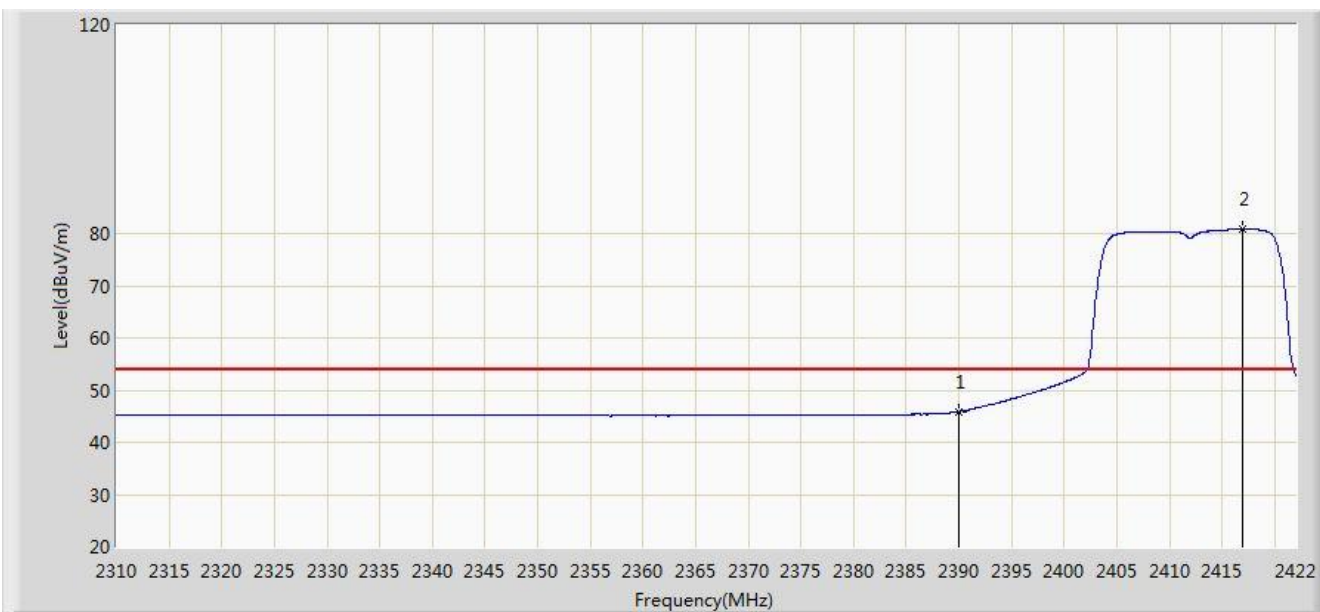


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	45.901	13.347	-8.099	54.000	32.554	AV
2		*	2416.904	80.831	48.311	N/A	N/A	32.520	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/07/20 - 08:10
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: FCC_Part15.209_RE(3m)	Polarity: Vertical
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at channel 2412MHz Ant 1	

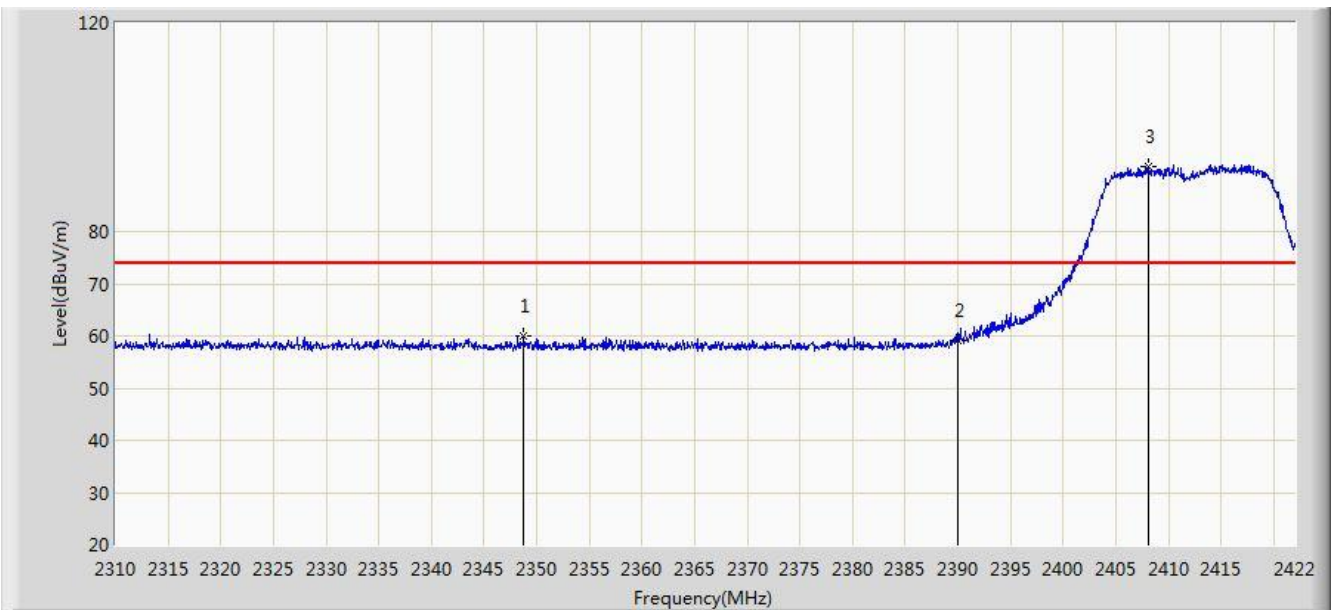


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2348.752	59.911	27.286	-14.089	74.000	32.625	PK
2			2390.000	59.017	26.463	-14.983	74.000	32.554	PK
3		*	2408.168	92.520	59.989	N/A	N/A	32.531	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/07/20 - 08:12
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: FCC_Part15.209_RE(3m)	Polarity: Vertical
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at channel 2412MHz Ant 1	

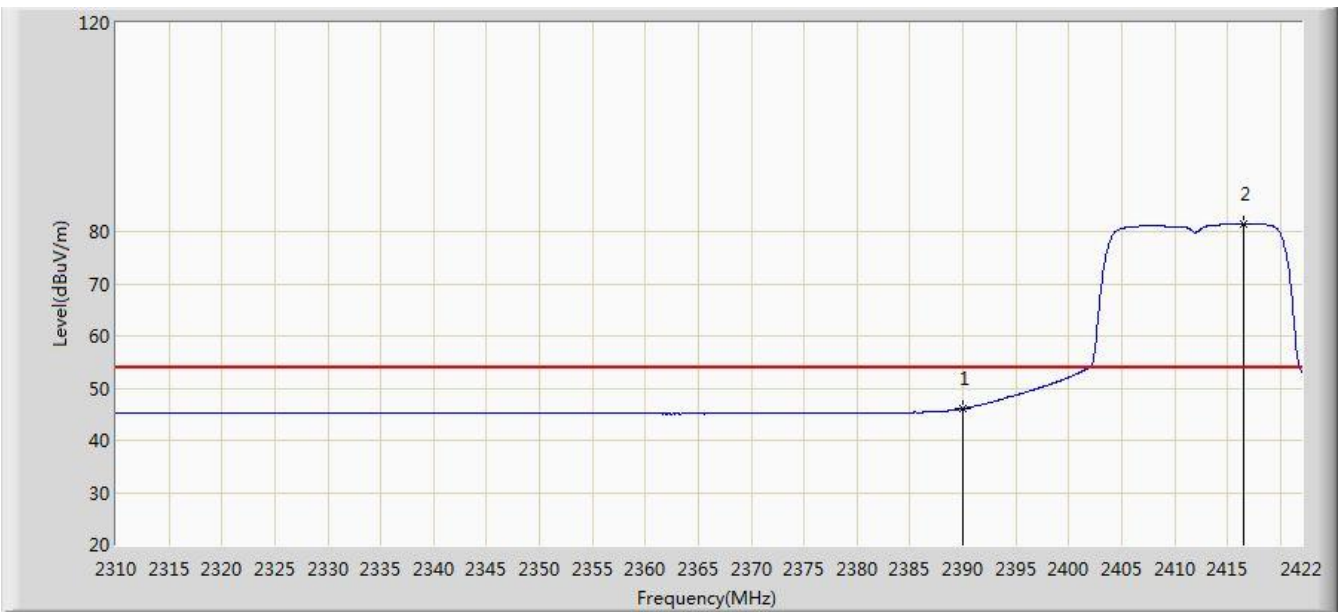


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	46.087	13.533	-7.913	54.000	32.554	AV
2		*	2416.568	81.562	49.042	N/A	N/A	32.521	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/07/20 - 08:12
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: FCC_Part15.209_RE(3m)	Polarity: Horizontal
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at channel 2462MHz Ant 1	

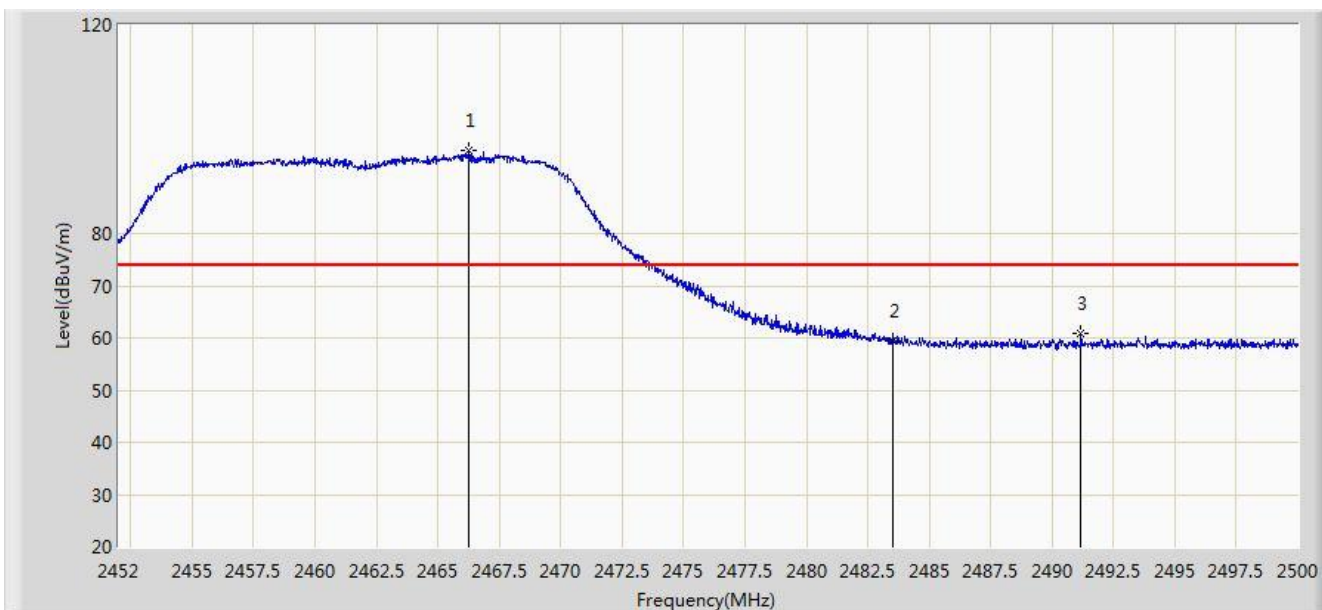


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2466.280	95.846	63.317	N/A	N/A	32.529	PK
2			2483.500	59.288	26.707	-14.712	74.000	32.580	PK
3			2491.168	60.796	28.192	-13.204	74.000	32.603	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/07/20 - 08:15
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: FCC_Part15.209_RE(3m)	Polarity: Horizontal
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at channel 2462MHz Ant 1	

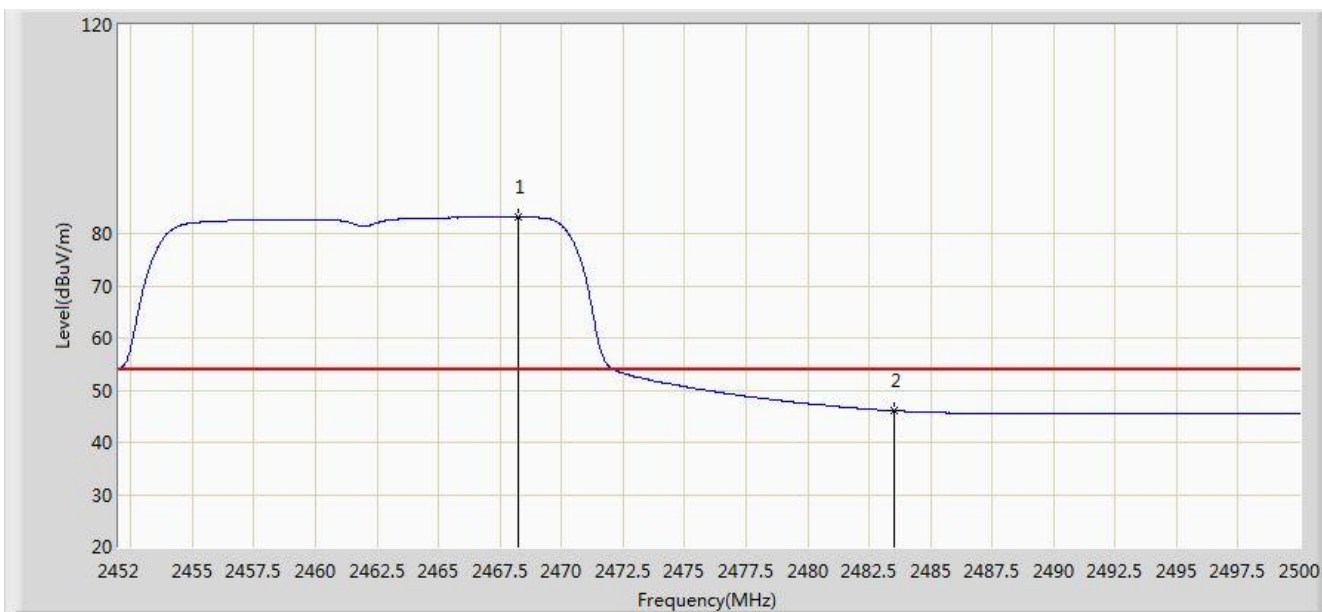


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2468.248	83.208	50.673	N/A	N/A	32.535	AV
2			2483.500	46.055	13.474	-7.945	54.000	32.580	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/07/20 - 08:15
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: FCC_Part15.209_RE(3m)	Polarity: Vertical
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at channel 2462MHz Ant 1	

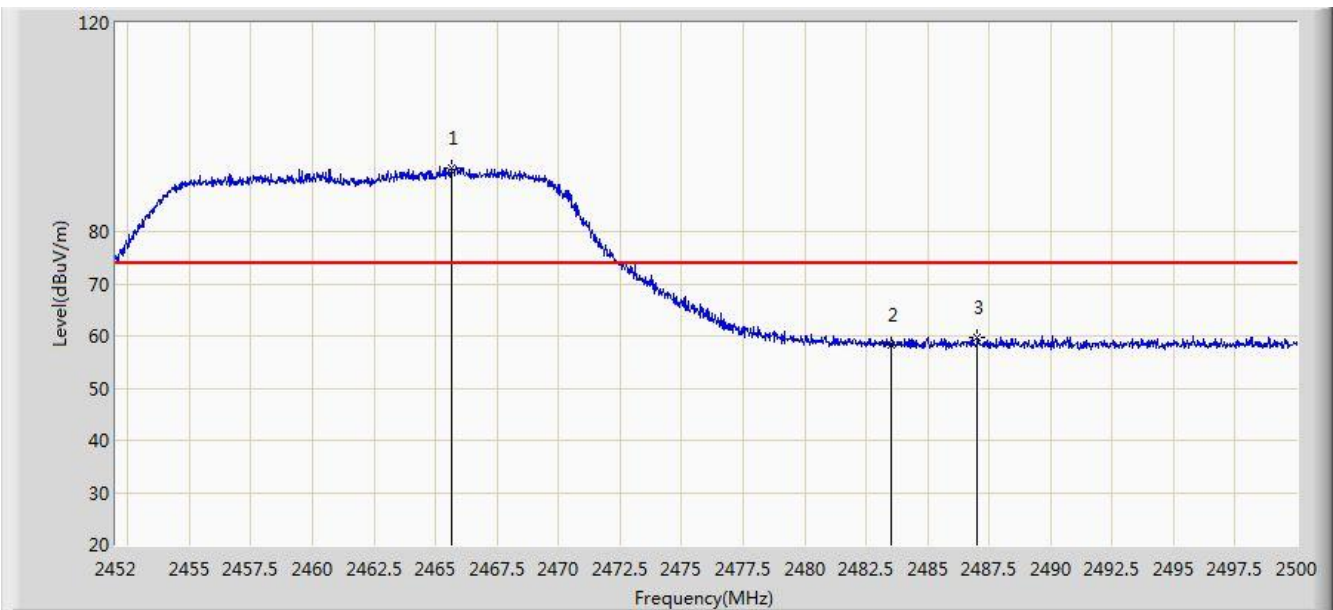


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2465.632	92.313	59.786	N/A	N/A	32.527	PK
2			2483.500	58.145	25.564	-15.855	74.000	32.580	PK
3			2487.016	59.656	27.065	-14.344	74.000	32.592	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/07/20 - 08:17
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: FCC_Part15.209_RE(3m)	Polarity: Vertical
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at channel 2462MHz Ant 1	

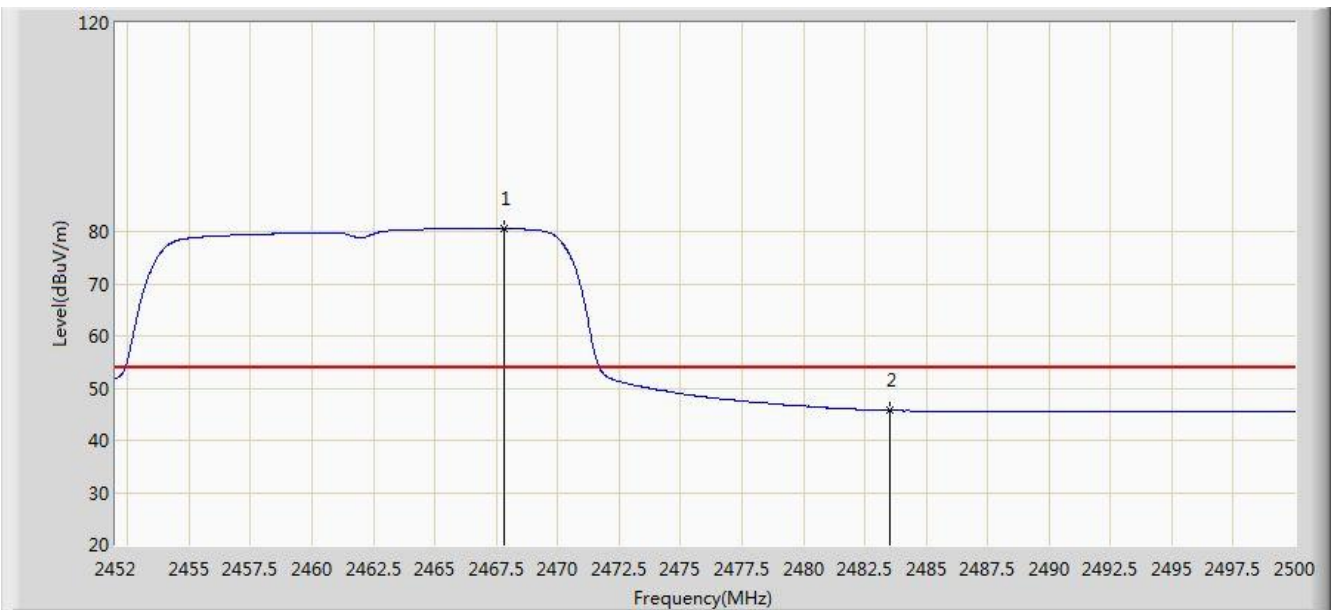


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2467.792	80.588	48.055	N/A	N/A	32.533	AV
2			2483.500	45.738	13.157	-8.262	54.000	32.580	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/07/20 - 08:18
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: FCC_Part15.209_RE(3m)	Polarity: Horizontal
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 2412MHz Ant 1	

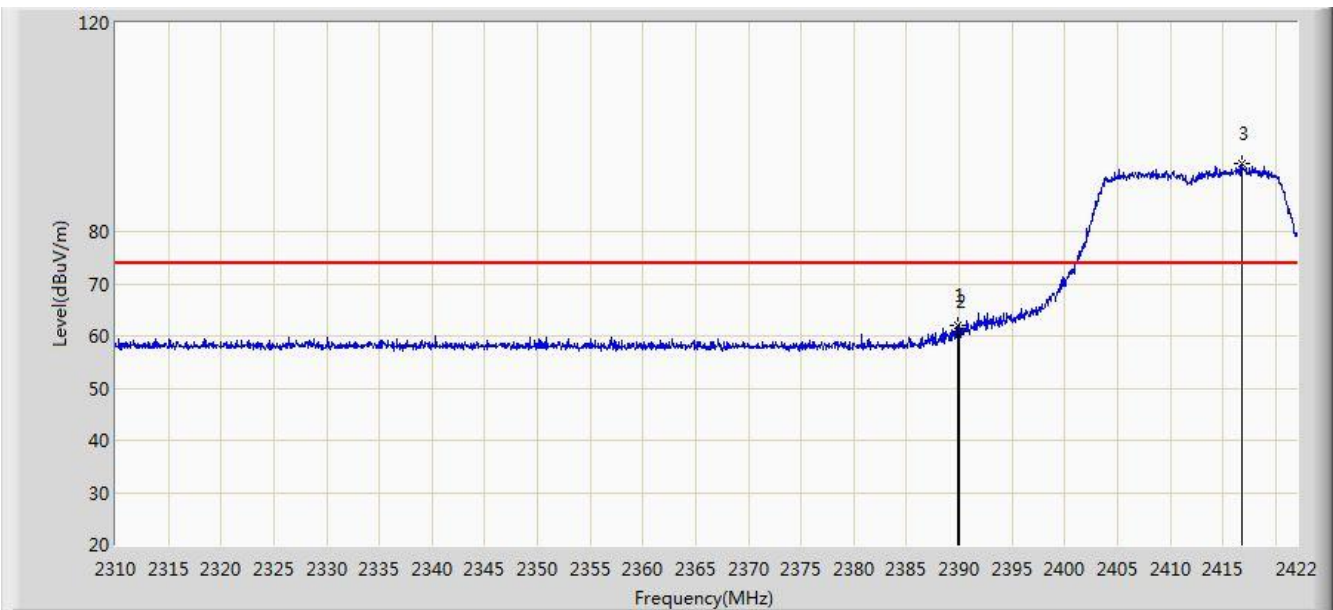


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.800	61.968	29.413	-12.032	74.000	32.555	PK
2			2390.000	60.942	28.388	-13.058	74.000	32.554	PK
3		*	2416.792	92.992	60.472	N/A	N/A	32.520	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/07/20 - 08:19
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: FCC_Part15.209_RE(3m)	Polarity: Horizontal
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 2412MHz Ant 1	

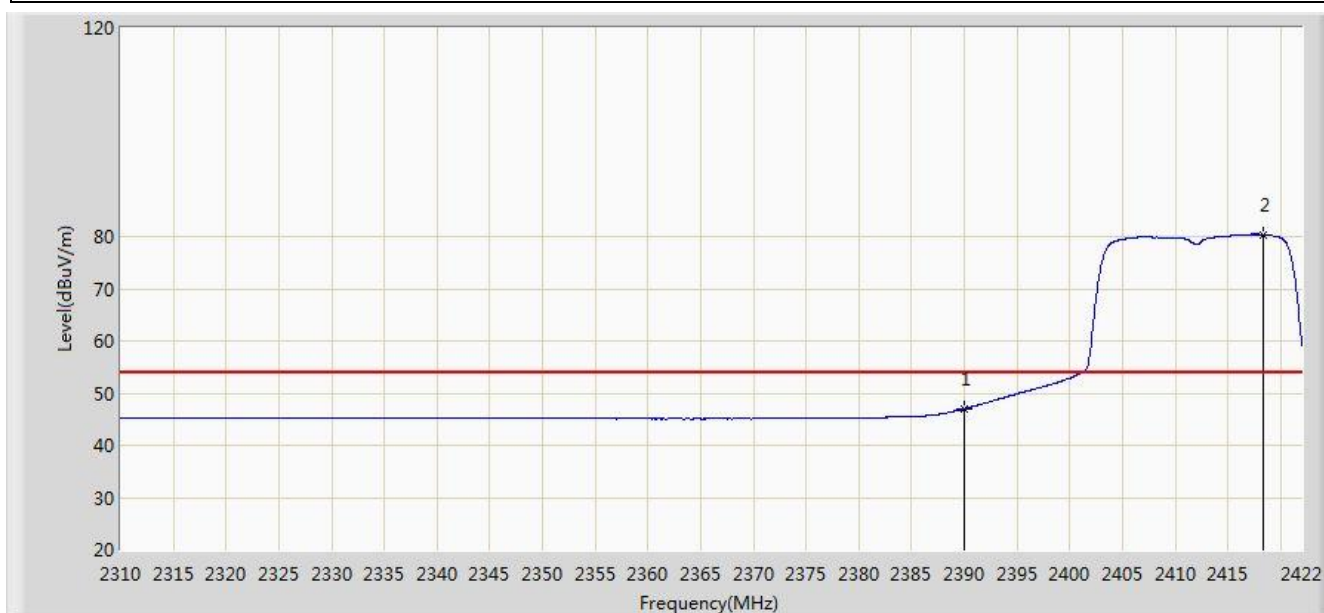


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	46.971	14.417	-7.029	54.000	32.554	AV
2		*	2418.304	80.420	47.902	N/A	N/A	32.518	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/07/20 - 08:20
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: FCC_Part15.209_RE(3m)	Polarity: Vertical
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 2412MHz Ant 1	

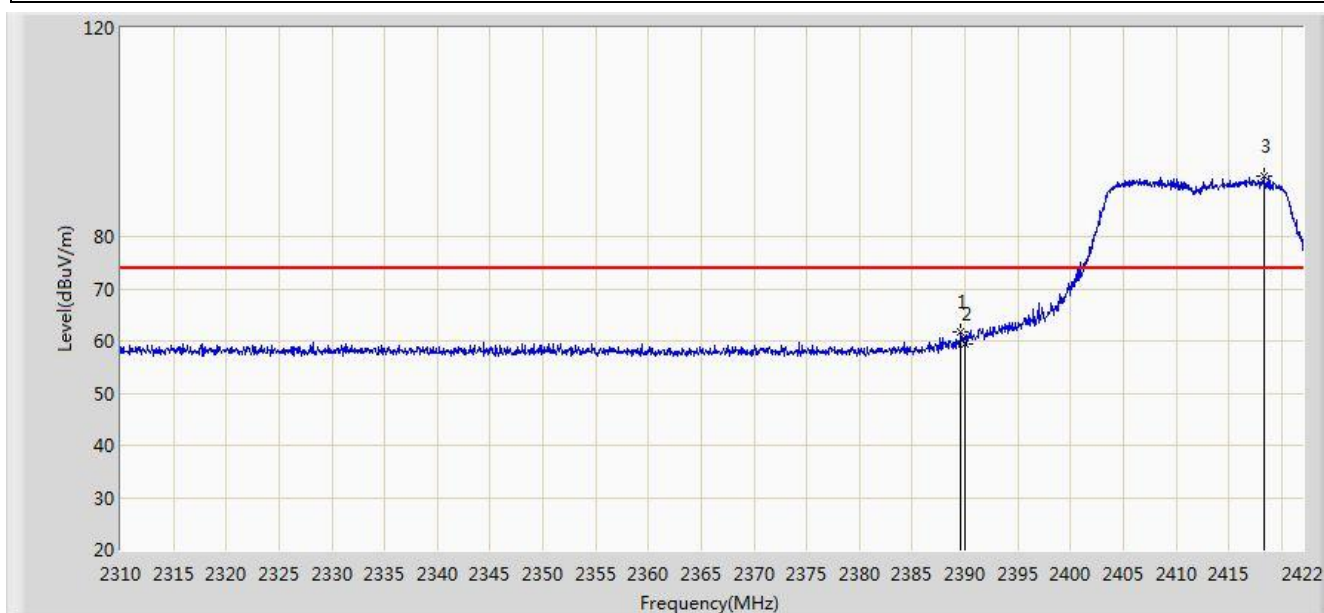


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.576	61.659	29.104	-12.341	74.000	32.555	PK
2			2390.000	59.384	26.830	-14.616	74.000	32.554	PK
3		*	2418.416	91.711	59.193	N/A	N/A	32.518	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/07/20 - 08:20
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: FCC_Part15.209_RE(3m)	Polarity: Vertical
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 2412MHz Ant 1	

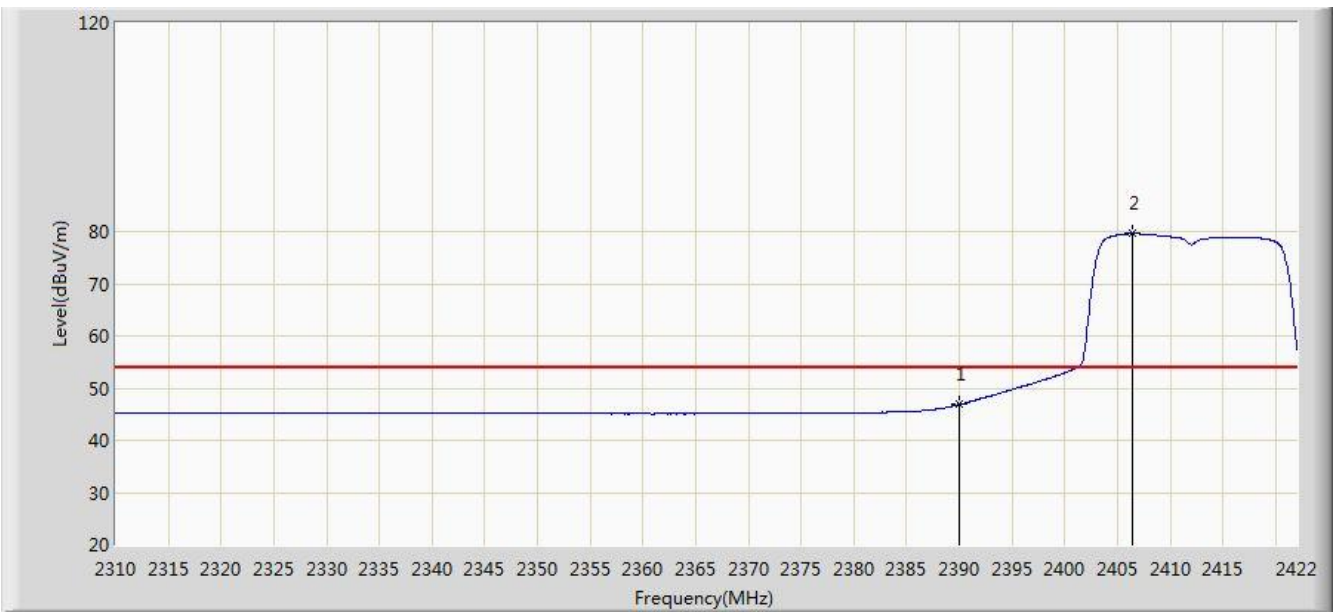


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	46.872	14.318	-7.128	54.000	32.554	AV
2		*	2406.432	79.581	47.048	N/A	N/A	32.532	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/07/20 - 08:22
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: FCC_Part15.209_RE(3m)	Polarity: Horizontal
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 2462MHz Ant 1	

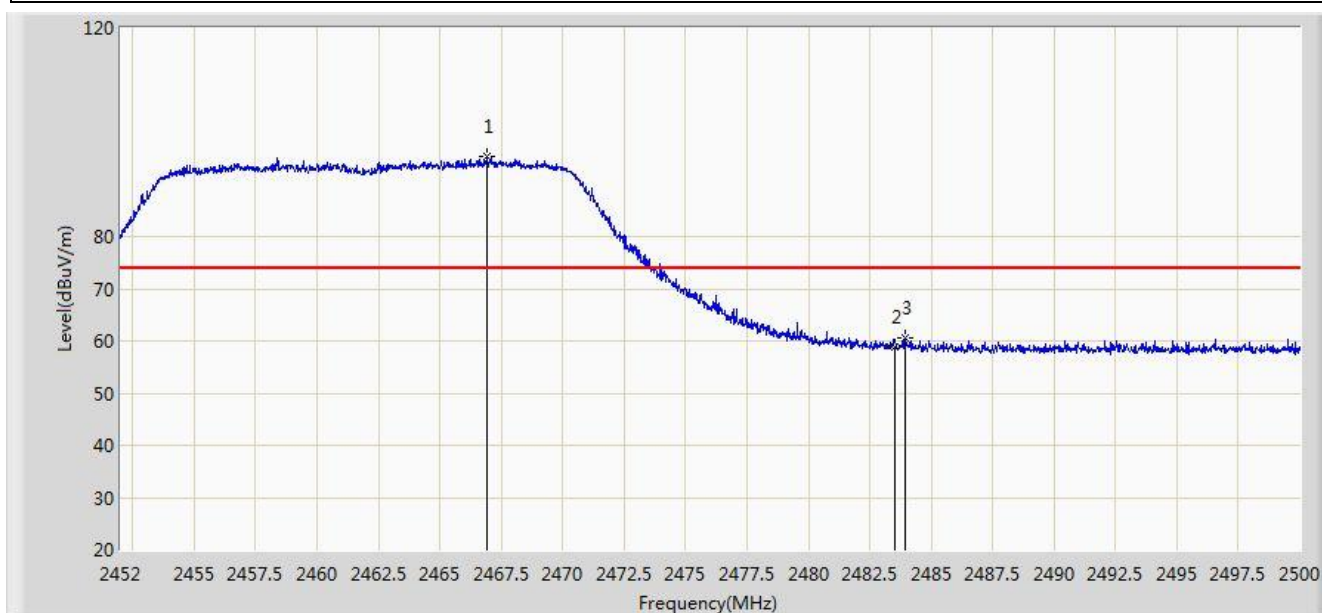


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2466.904	95.454	62.923	N/A	N/A	32.531	PK
2			2483.500	58.955	26.374	-15.045	74.000	32.580	PK
3			2483.944	60.626	28.044	-13.374	74.000	32.582	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/07/20 - 08:24
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: FCC_Part15.209_RE(3m)	Polarity: Horizontal
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 2462MHz Ant 1	

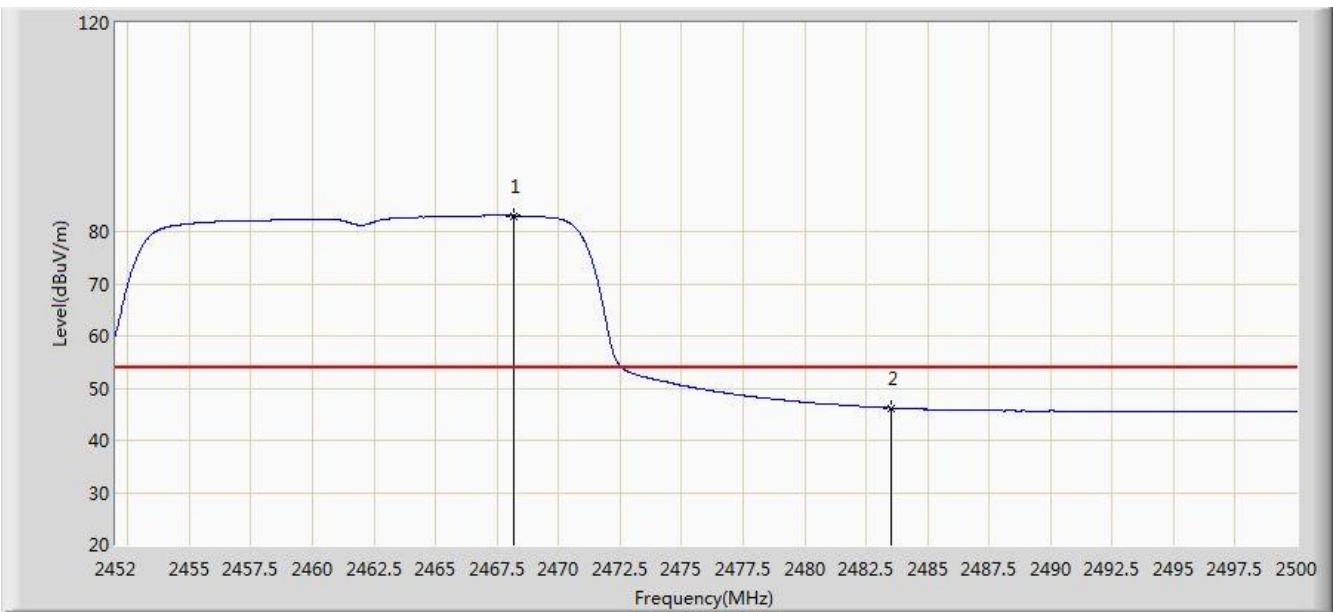


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2468.176	83.036	50.501	N/A	N/A	32.535	AV
2			2483.500	46.208	13.627	-7.792	54.000	32.580	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/07/20 - 08:24
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: FCC_Part15.209_RE(3m)	Polarity: Vertical
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 2462MHz Ant 1	

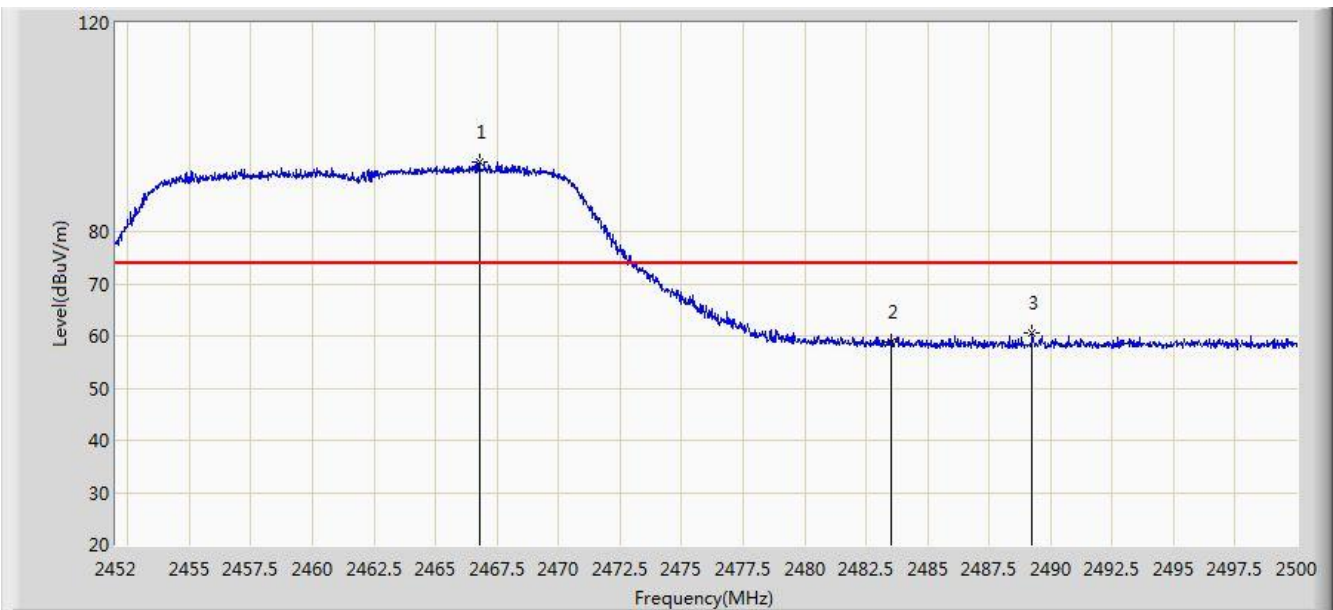


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2466.784	93.278	60.748	N/A	N/A	32.530	PK
2			2483.500	58.823	26.242	-15.177	74.000	32.580	PK
3			2489.248	60.455	27.857	-13.545	74.000	32.598	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/07/20 - 08:25
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: FCC_Part15.209_RE(3m)	Polarity: Vertical
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 2462MHz Ant 1	

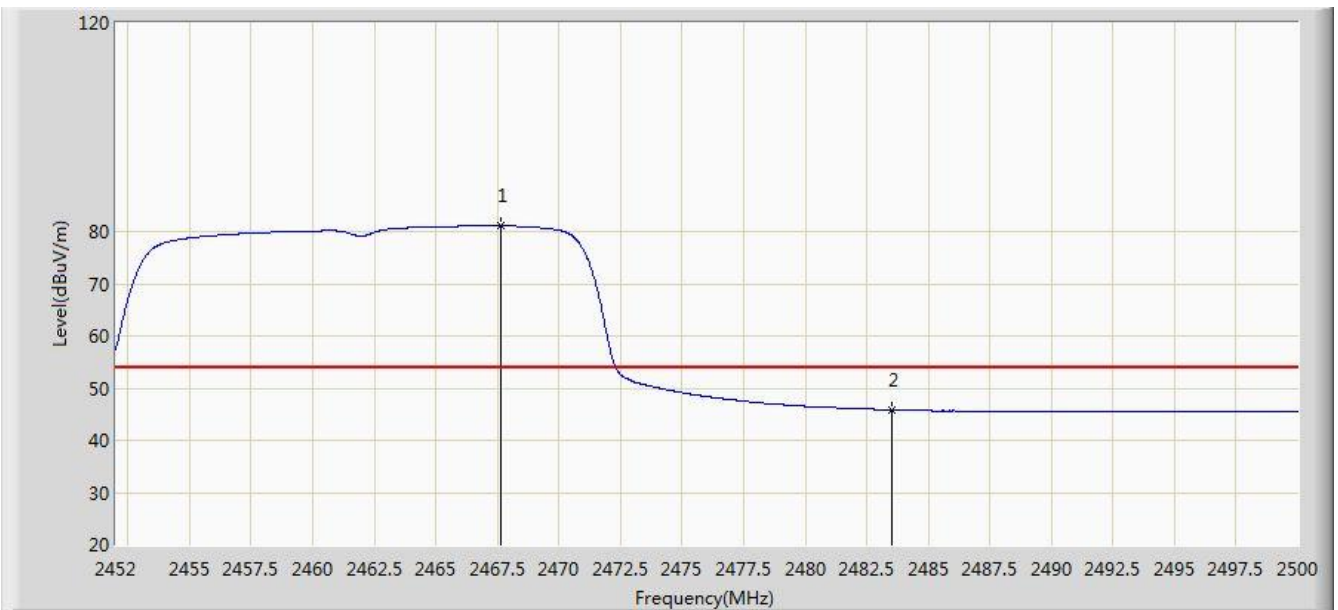

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2467.648	81.070	48.537	N/A	N/A	32.533	AV
2			2483.500	45.813	13.232	-8.187	54.000	32.580	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

7. CONCLUSION

The data collected relate only the item(s) tested and show that the **SDIO Wireless Module FCC ID: N6C-SDMAN** is in compliance with Part 15C of the FCC Rules.

————— The End —————