


Site: AC1	Time: 2017/07/21 - 07:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at channel 5180MHz Ant 1	

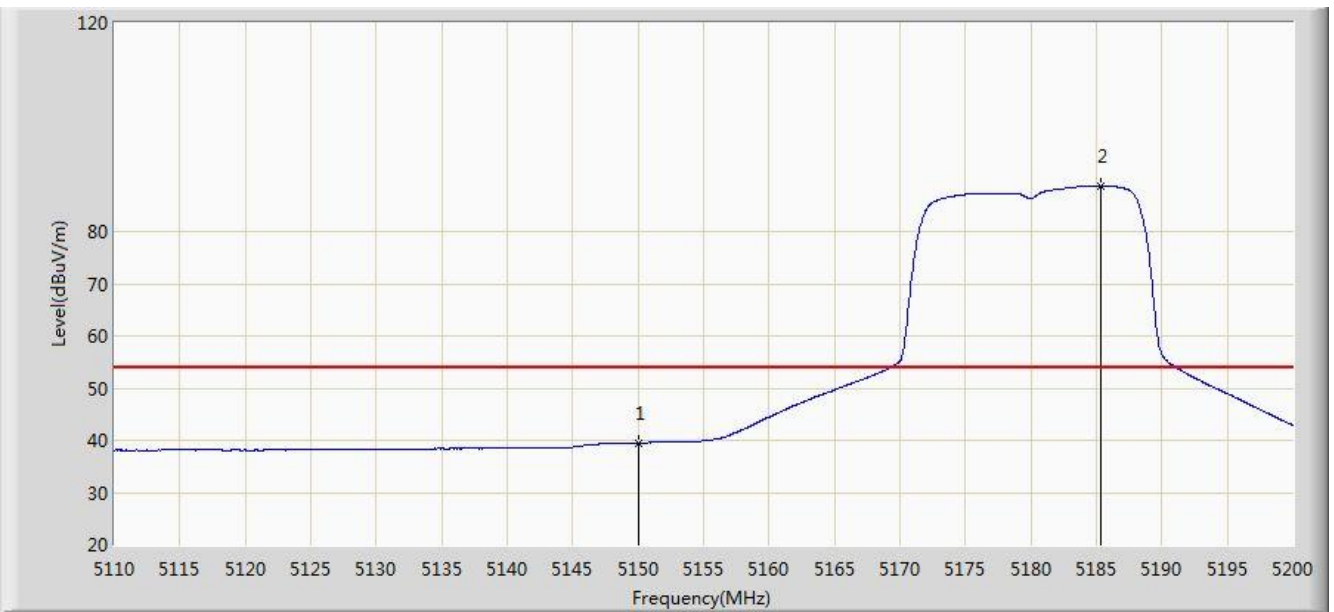


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	39.549	35.380	-14.451	54.000	4.170	AV
2		*	5185.375	88.828	84.778	N/A	N/A	4.049	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre-amplifier Factor (dB)

Site: AC1	Time: 2017/07/21 - 07:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at channel 5320MHz Ant 1	

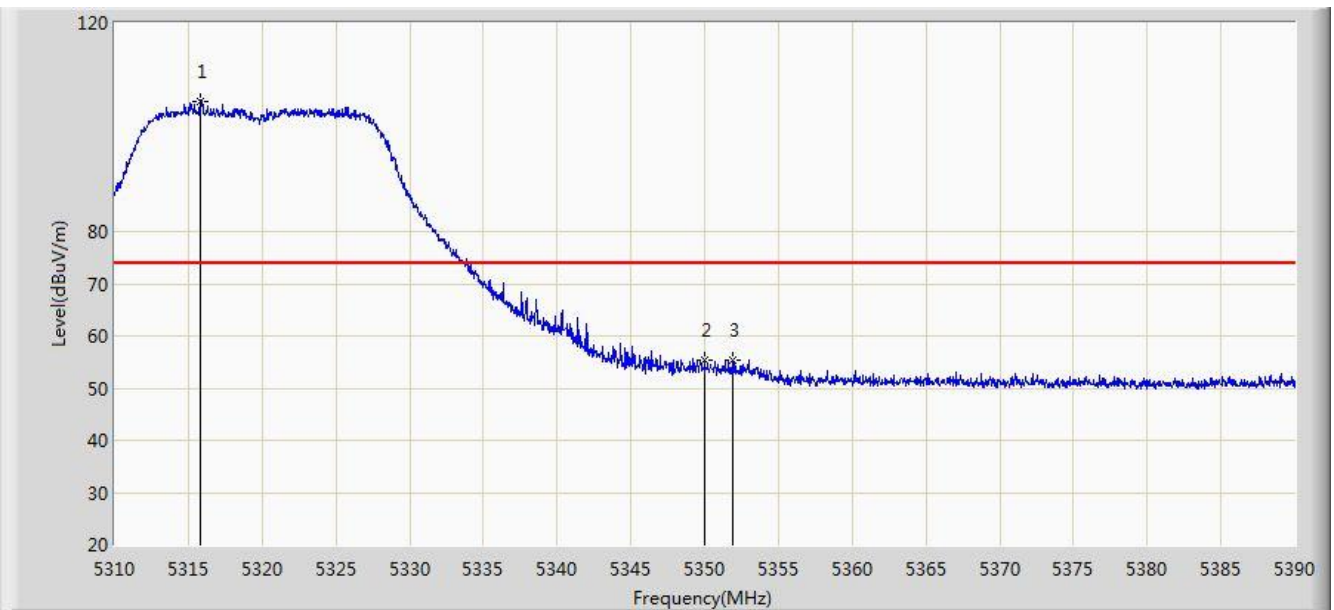


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5315.800	105.061	101.220	N/A	N/A	3.840	PK
2			5350.000	55.294	51.389	-18.706	74.000	3.904	PK
3			5351.920	55.420	51.512	-18.580	74.000	3.908	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre-amplifier Factor (dB)

Site: AC1	Time: 2017/07/21 - 07:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at channel 5320MHz Ant 1	

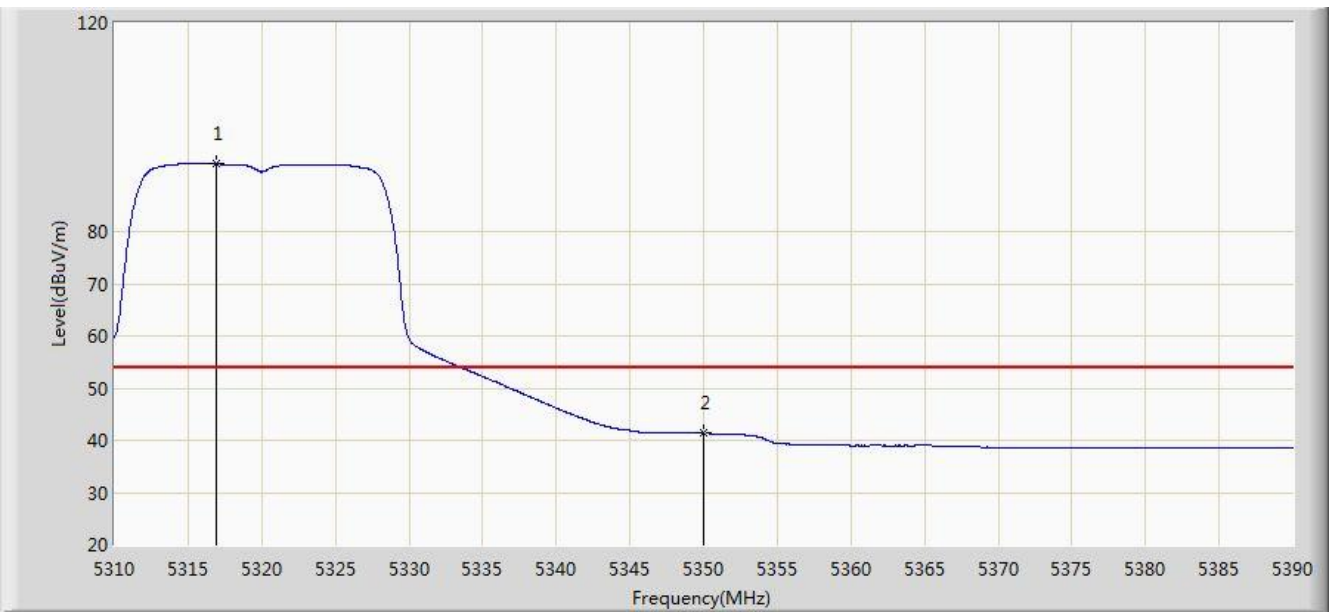


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5316.920	92.920	89.077	N/A	N/A	3.842	AV
2			5350.000	41.317	37.412	-12.683	54.000	3.904	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre-amplifier Factor (dB)

Site: AC1	Time: 2017/07/21 - 07:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at channel 5320MHz Ant 1	

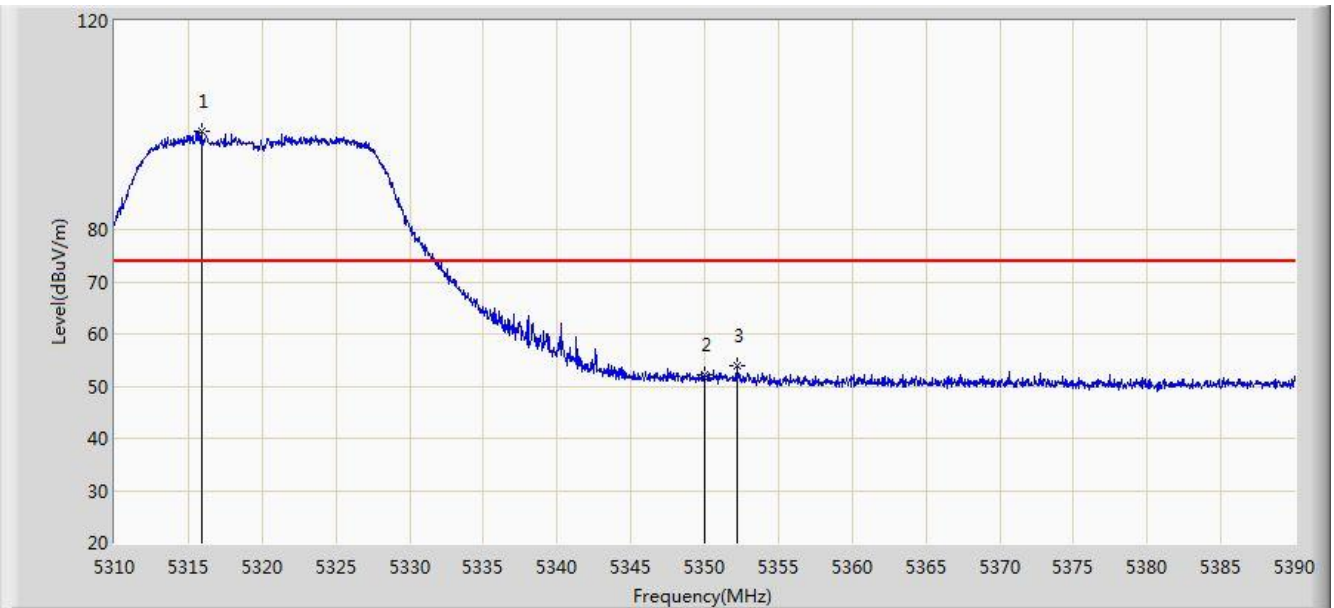


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5315.880	98.813	94.972	N/A	N/A	3.840	PK
2			5350.000	52.045	48.140	-21.955	74.000	3.904	PK
3			5352.240	53.789	49.880	-20.211	74.000	3.908	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre-amplifier Factor (dB)

Site: AC1	Time: 2017/07/21 - 07:40
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at channel 5320MHz Ant 1	

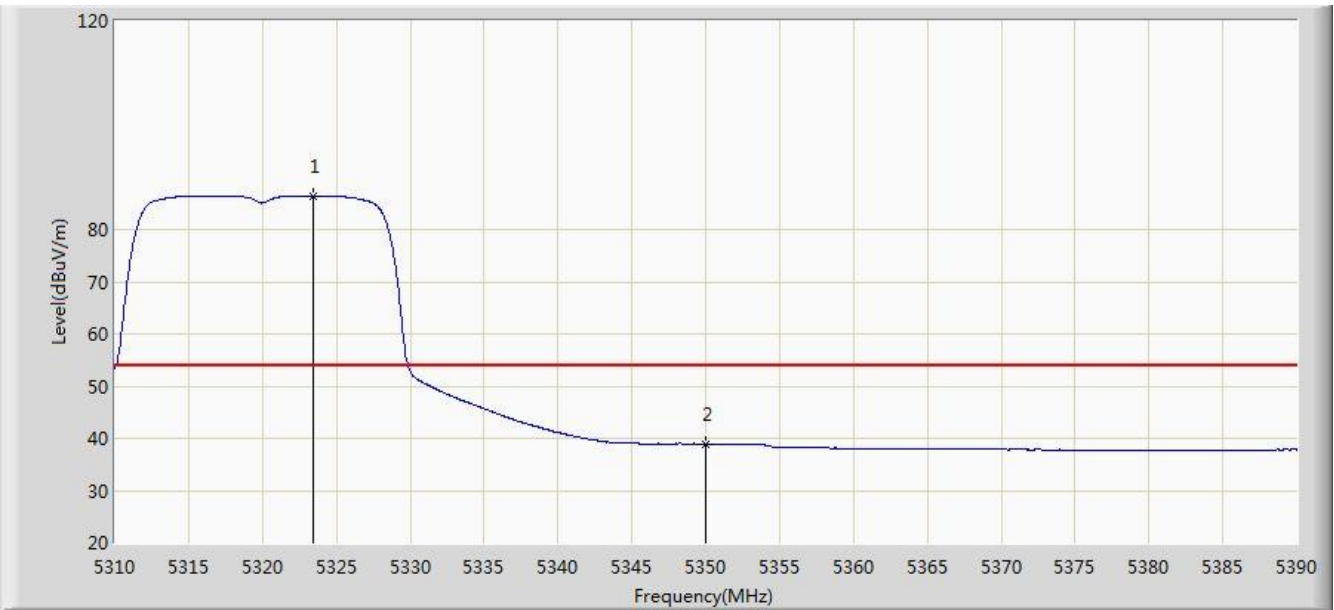


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5323.400	86.518	82.663	N/A	N/A	3.855	AV
2			5350.000	38.934	35.029	-15.066	54.000	3.904	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre-amplifier Factor (dB)

Site: AC1	Time: 2017/07/21 - 07:41
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at channel 5500MHz Ant 1	

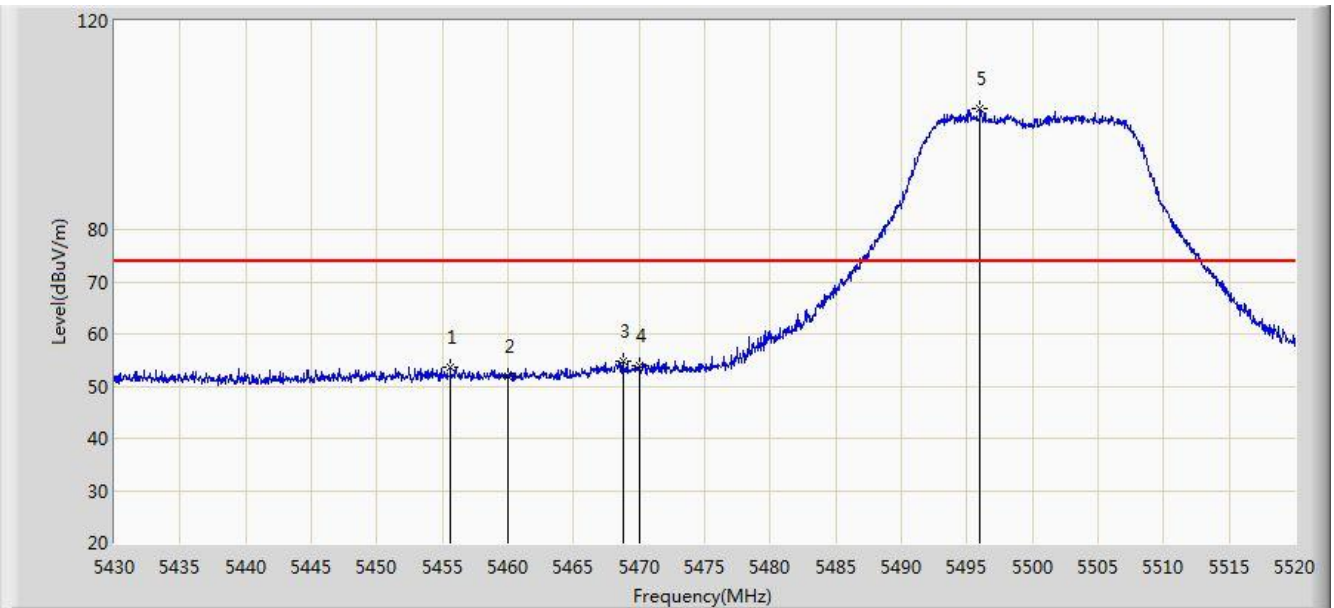


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5455.605	53.631	49.460	-20.369	74.000	4.171	PK
2			5460.000	51.901	47.721	-22.099	74.000	4.180	PK
3			5468.790	54.743	50.543	-19.257	74.000	4.200	PK
4			5470.000	53.837	49.635	-20.163	74.000	4.202	PK
5		*	5495.970	103.313	99.052	N/A	N/A	4.261	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre-amplifier Factor (dB)

Site: AC1	Time: 2017/07/21 - 07:42
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at channel 5500MHz Ant 1	

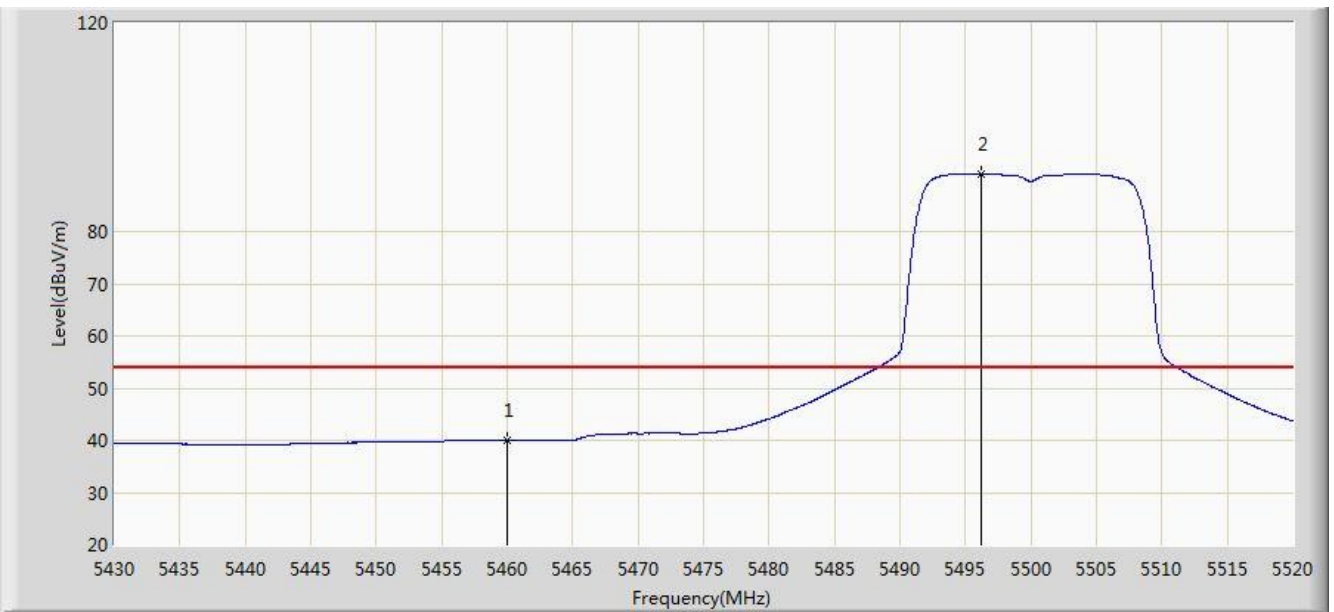


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	39.908	35.728	-14.092	54.000	4.180	AV
2		*	5496.150	91.077	86.815	N/A	N/A	4.261	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre-amplifier Factor (dB)

Site: AC1	Time: 2017/07/21 - 07:43
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at channel 5500MHz Ant 1	

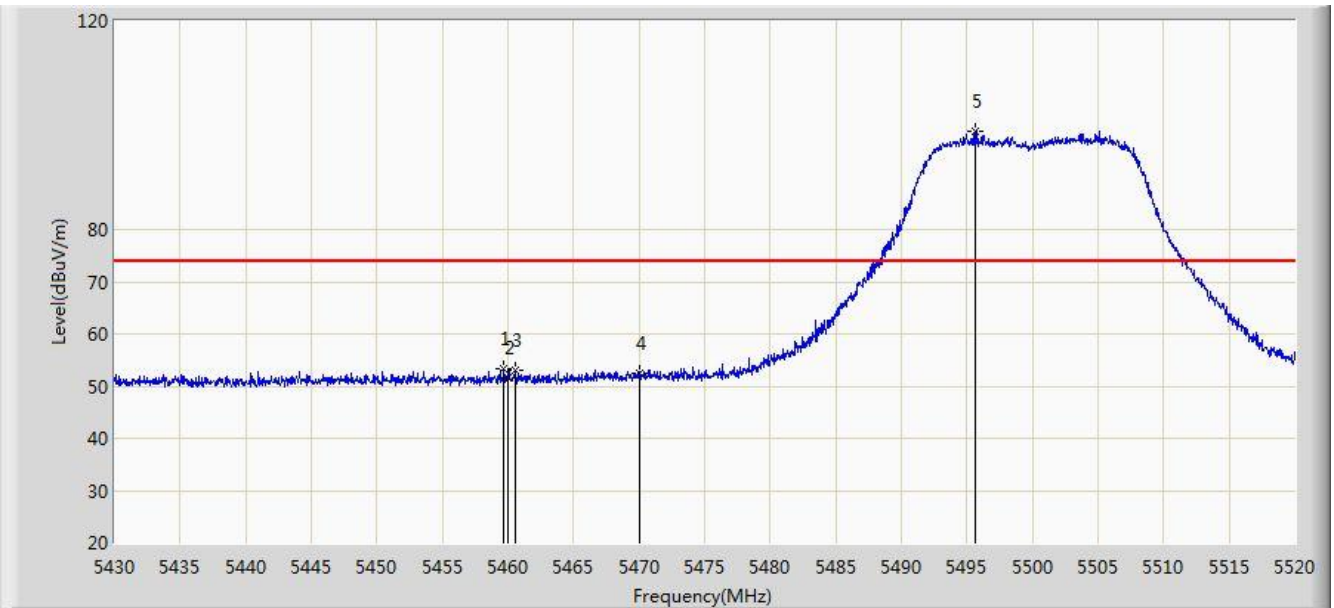


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5459.700	53.193	49.013	-20.807	74.000	4.180	PK
2			5460.000	51.700	47.520	-22.300	74.000	4.180	PK
3			5460.510	52.985	48.804	-21.015	74.000	4.181	PK
4			5470.000	52.596	48.394	-21.404	74.000	4.202	PK
5		*	5495.655	98.783	94.522	N/A	N/A	4.261	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre-amplifier Factor (dB)

Site: AC1	Time: 2017/07/21 - 07:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at channel 5500MHz Ant 1	

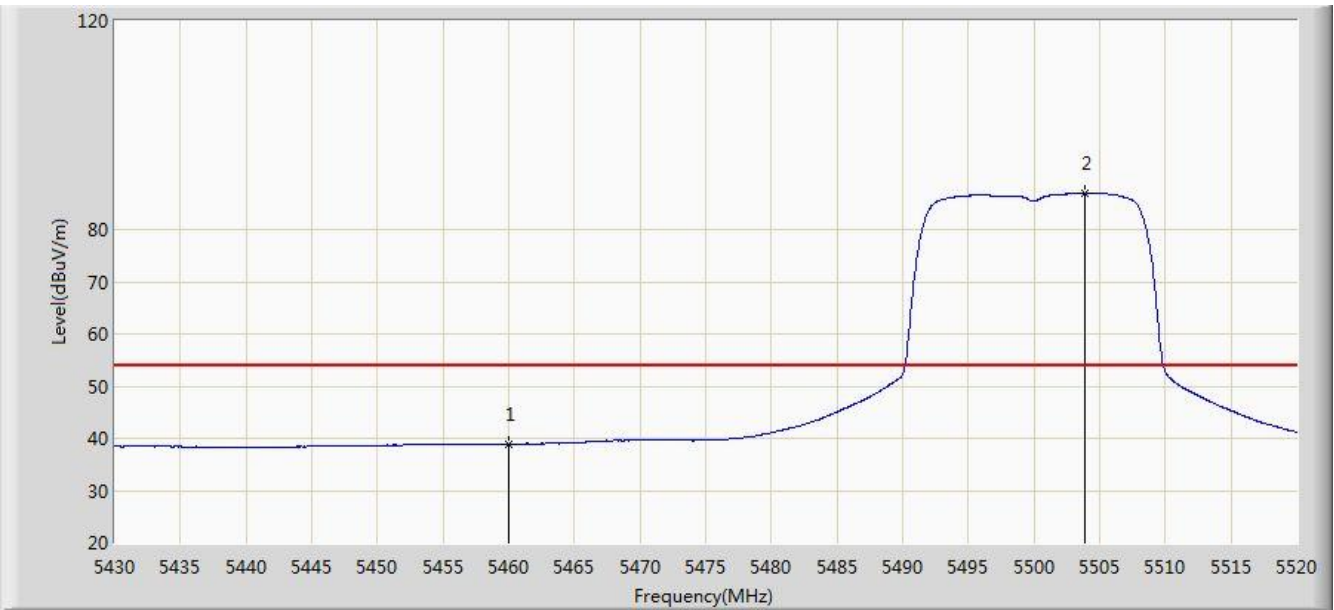


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	38.942	34.762	-15.058	54.000	4.180	AV
2		*	5503.890	86.931	82.648	N/A	N/A	4.284	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre-amplifier Factor (dB)

Site: AC1	Time: 2017/07/21 - 07:45
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at channel 5700MHz Ant 1	

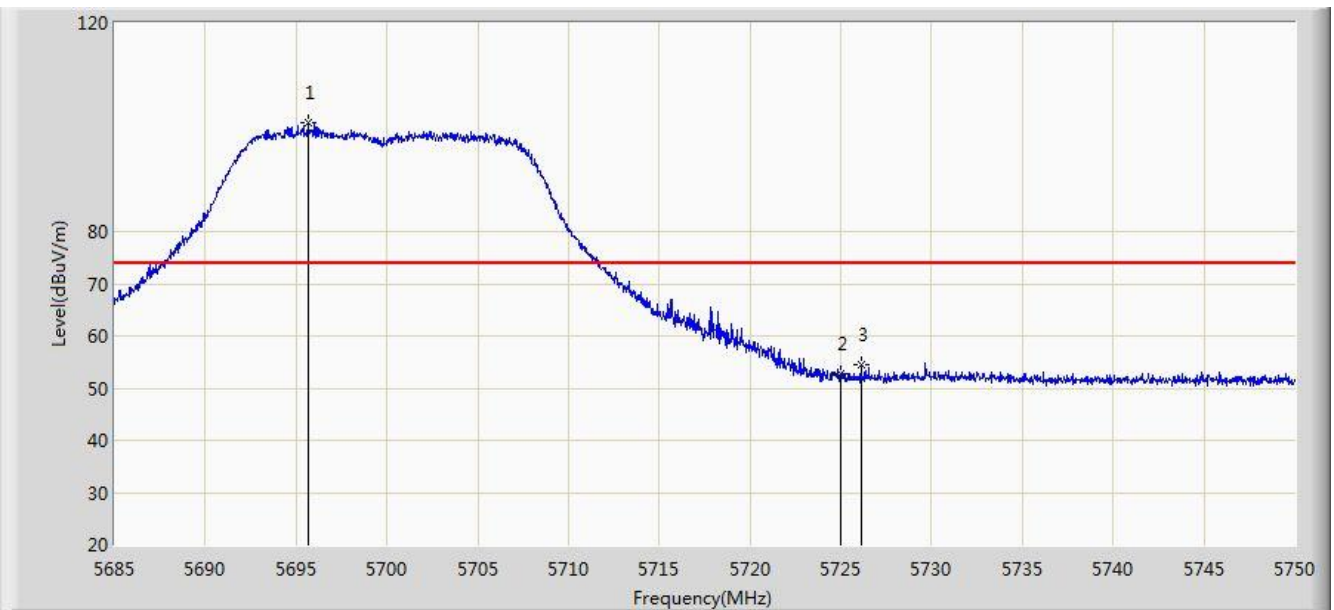


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5695.660	100.782	95.927	N/A	N/A	4.855	PK
2			5725.000	52.625	47.596	-21.375	74.000	5.029	PK
3			5726.112	54.538	49.502	-19.462	74.000	5.036	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre-amplifier Factor (dB)

Site: AC1	Time: 2017/07/21 - 07:46
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at channel 5700MHz Ant 1	

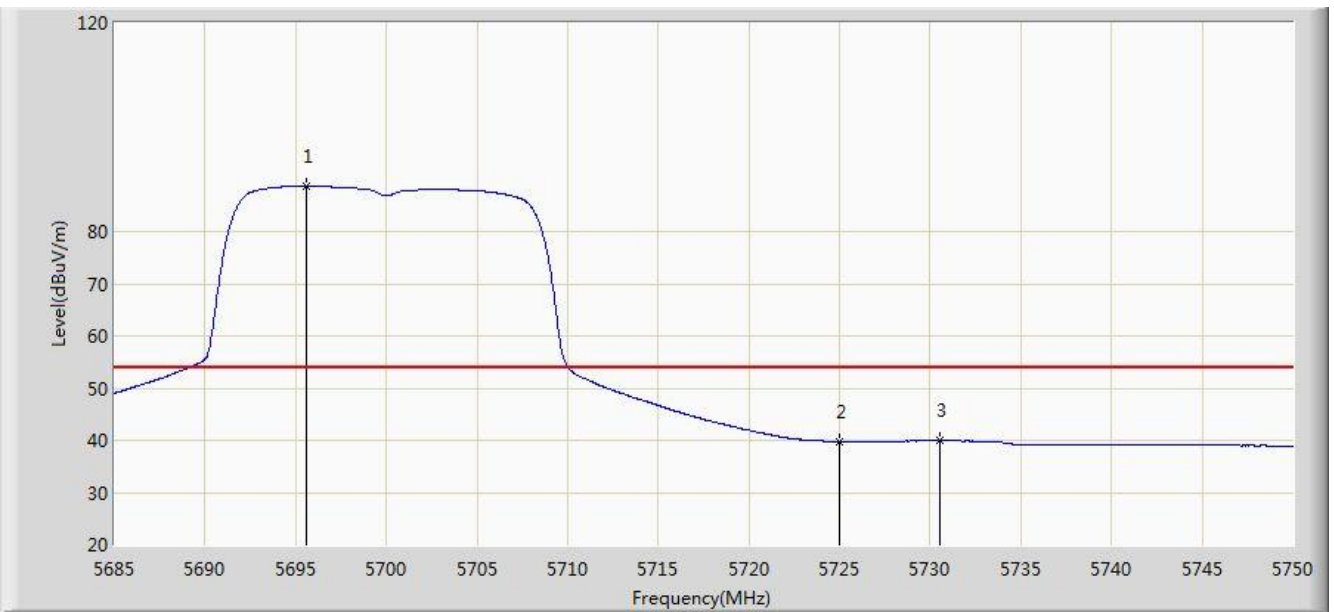


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5695.595	88.703	83.848	N/A	N/A	4.855	AV
2			5725.000	39.744	34.715	-14.256	54.000	5.029	AV
3			5730.565	39.898	34.833	-14.102	54.000	5.064	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre-amplifier Factor (dB)

Site: AC1	Time: 2017/07/21 - 07:47
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at channel 5700MHz Ant 1	

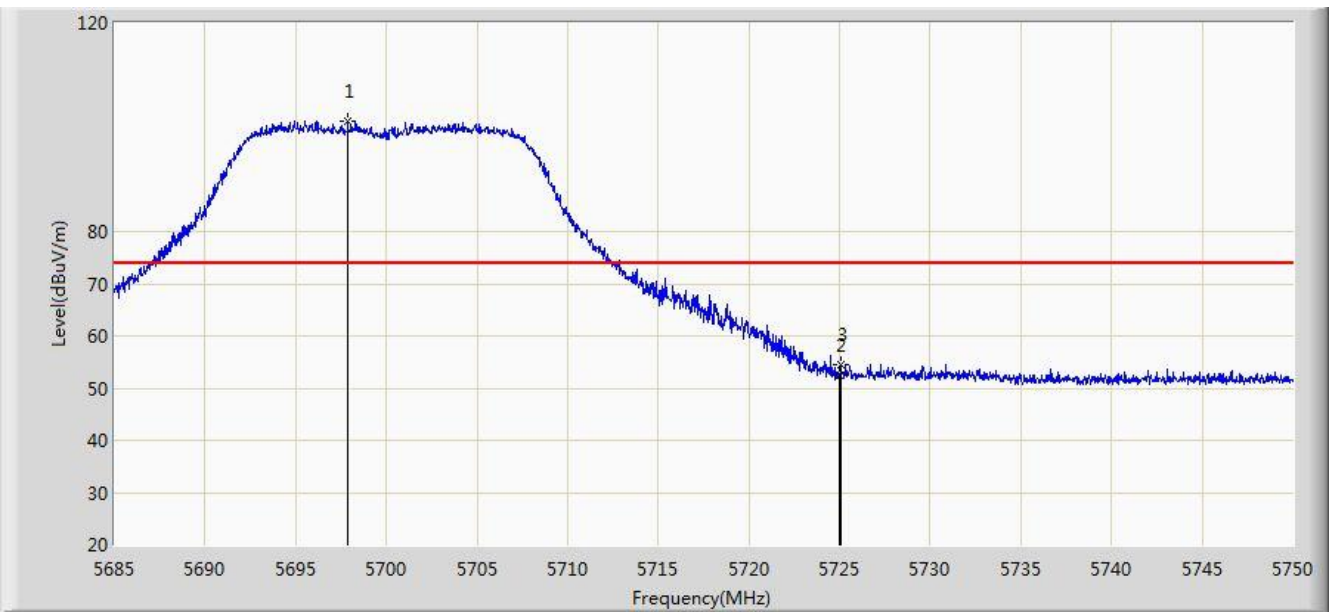


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5697.870	101.304	96.437	N/A	N/A	4.866	PK
2			5725.000	52.596	47.567	-21.404	74.000	5.029	PK
3			5725.072	54.553	49.524	-19.447	74.000	5.029	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre-amplifier Factor (dB)

Site: AC1	Time: 2017/07/21 - 07:47
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at channel 5700MHz Ant 1	

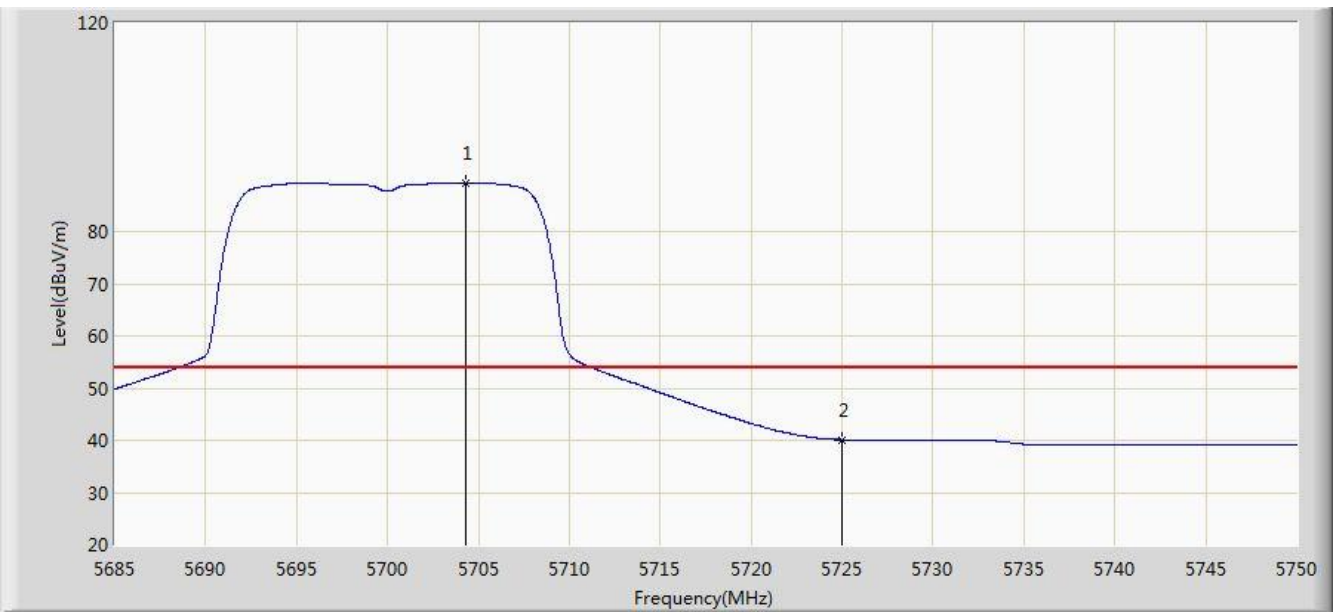


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5704.272	89.330	84.429	N/A	N/A	4.901	AV
2			5725.000	40.112	35.083	-13.888	54.000	5.029	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre-amplifier Factor (dB)

Site: AC1	Time: 2017/07/21 - 07:48
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at channel 5745MHz Ant 1	

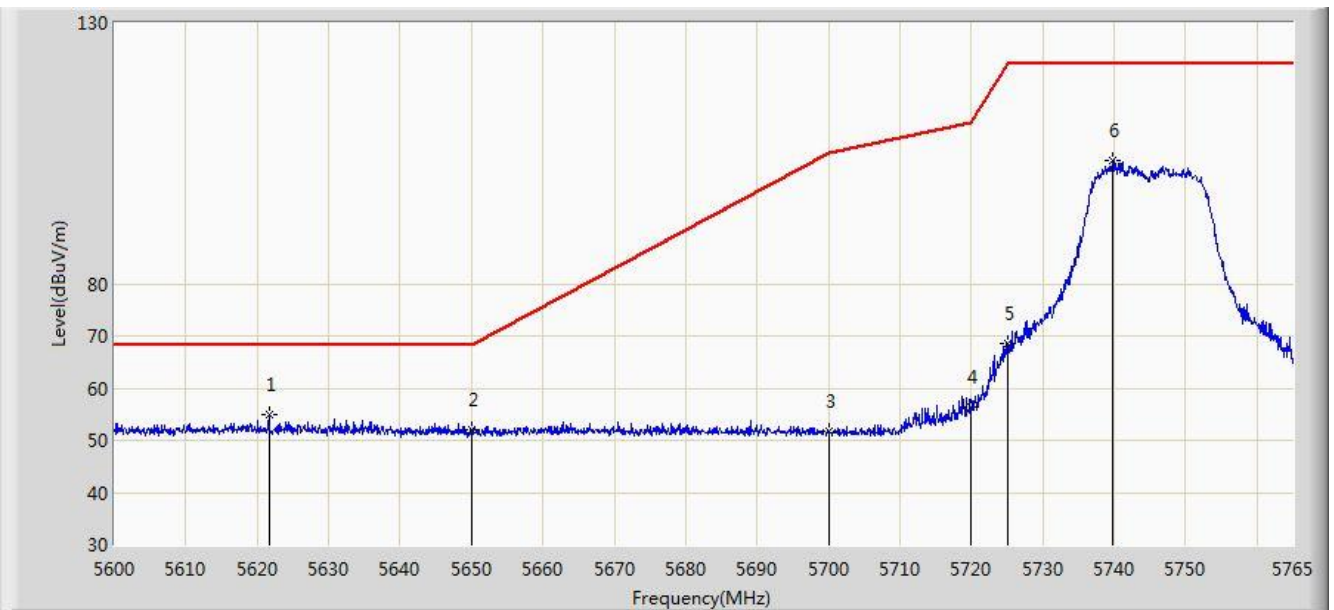


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5621.615	54.785	50.200	-13.415	68.200	4.586	PK
2			5650.000	52.111	47.440	-16.089	68.200	4.671	PK
3			5700.000	51.663	46.785	-53.537	105.200	4.878	PK
4			5720.000	56.393	51.396	-54.407	110.800	4.997	PK
5			5725.000	68.690	63.661	-53.510	122.200	5.029	PK
6			5739.837	103.516	98.392	N/A	N/A	5.123	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre-amplifier Factor (dB)

Site: AC1	Time: 2017/07/21 - 07:50
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at channel 5745MHz Ant 1	

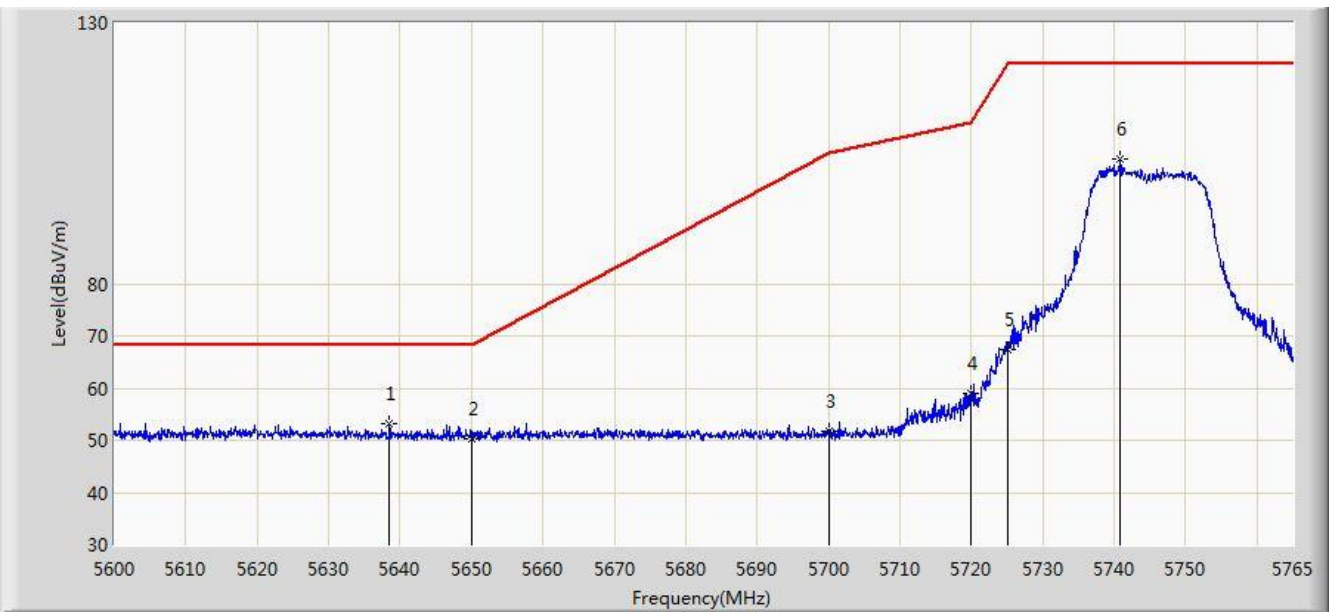


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5638.445	53.231	48.598	-14.969	68.200	4.633	PK
2			5650.000	50.240	45.569	-17.960	68.200	4.671	PK
3			5700.000	51.624	46.746	-53.576	105.200	4.878	PK
4			5720.000	58.882	53.885	-51.918	110.800	4.997	PK
5			5725.000	67.512	62.483	-54.688	122.200	5.029	PK
6			5740.910	103.865	98.735	N/A	N/A	5.130	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre-amplifier Factor (dB)

Site: AC1	Time: 2017/07/21 - 07:51
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at channel 5825MHz Ant 1	

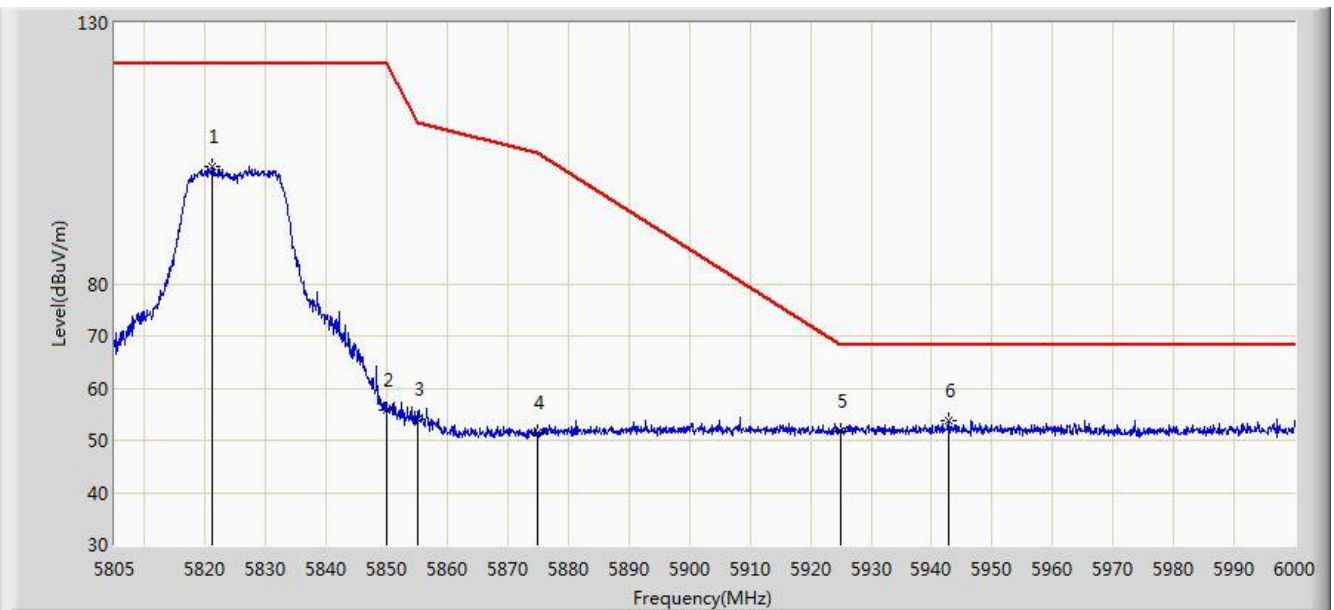


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5821.087	102.549	96.984	N/A	N/A	5.565	PK
2			5850.000	55.775	50.049	-66.425	122.200	5.726	PK
3			5855.000	54.086	48.340	-56.714	110.800	5.746	PK
4			5875.000	51.340	45.520	-53.860	105.200	5.820	PK
5			5925.000	51.603	45.637	-16.597	68.200	5.967	PK
6		*	5942.768	53.885	47.875	-14.315	68.200	6.010	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre-amplifier Factor (dB)

Site: AC1	Time: 2017/07/21 - 07:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at channel 5825MHz Ant 1	

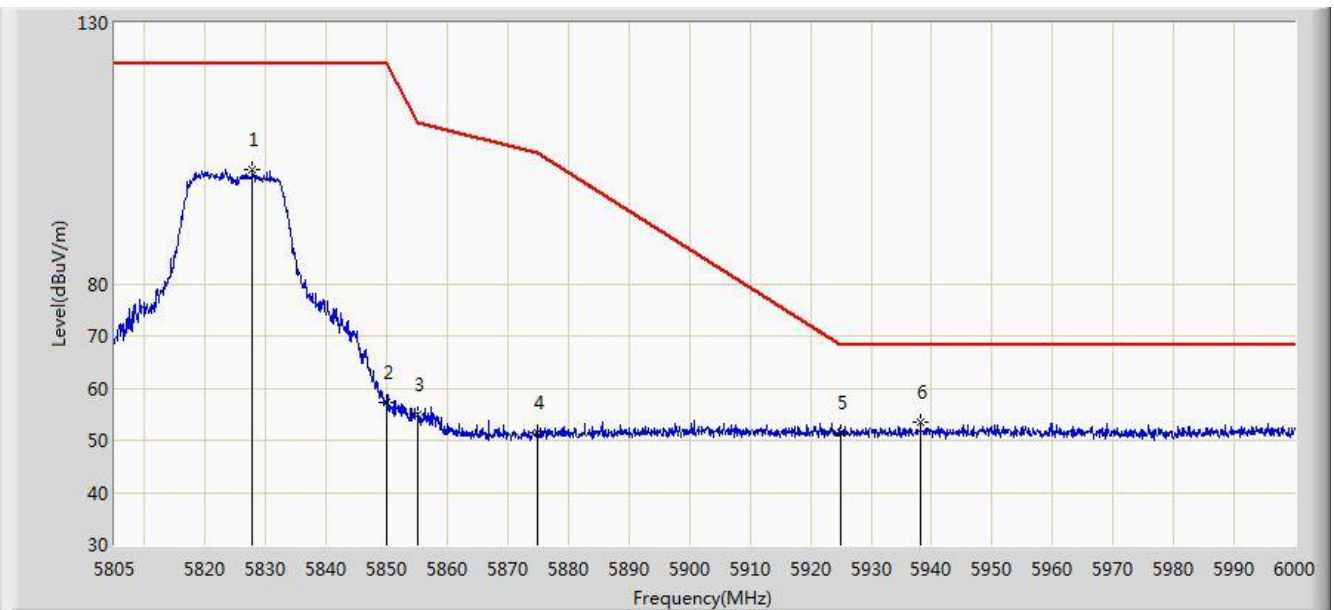


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5827.815	101.914	96.310	NA/	N/A	5.605	PK
2			5850.000	57.385	51.659	-64.815	122.200	5.726	PK
3			5855.000	54.814	49.068	-55.986	110.800	5.746	PK
4			5875.000	51.378	45.558	-53.822	105.200	5.820	PK
5			5925.000	51.585	45.619	-16.615	68.200	5.967	PK
6		*	5938.185	53.343	47.344	-14.857	68.200	5.998	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre-amplifier Factor (dB)

Site: AC1	Time: 2017/07/21 - 07:55
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 5180MHz Ant 1	

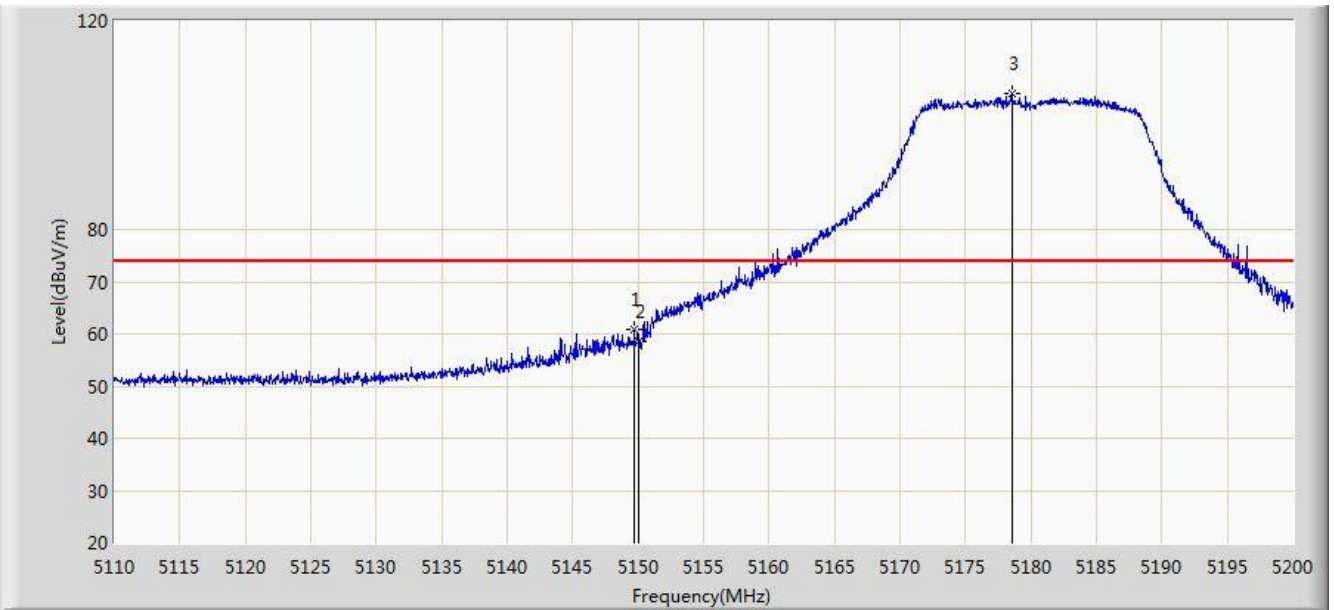


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.690	60.797	56.627	-13.203	74.000	4.170	PK
2			5150.000	58.484	54.315	-15.516	74.000	4.170	PK
3		*	5178.580	105.955	101.881	N/A	N/A	4.074	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre-amplifier Factor (dB)

Site: AC1	Time: 2017/07/21 - 07:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 5180MHz Ant 1	

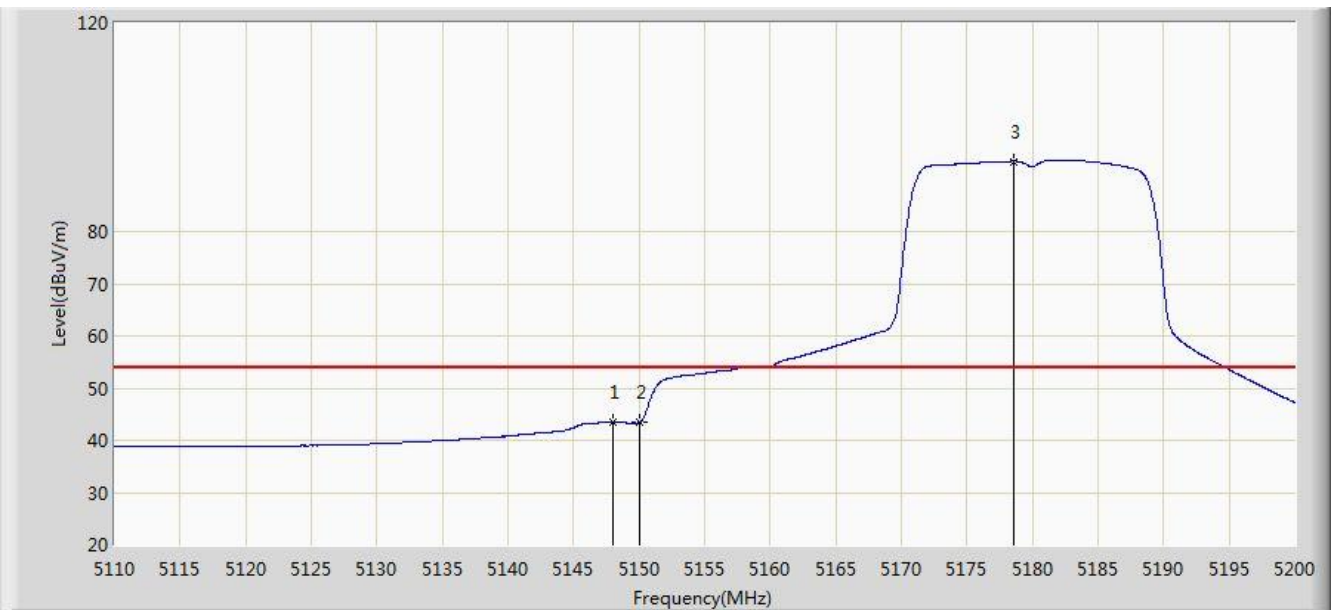


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.025	43.525	39.350	-10.475	54.000	4.176	AV
2			5150.000	43.383	39.214	-10.617	54.000	4.170	AV
3		*	5178.535	93.476	89.402	N/A	N/A	4.074	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre-amplifier Factor (dB)

Site: AC1	Time: 2017/07/21 - 07:57
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 5180MHz Ant 1	

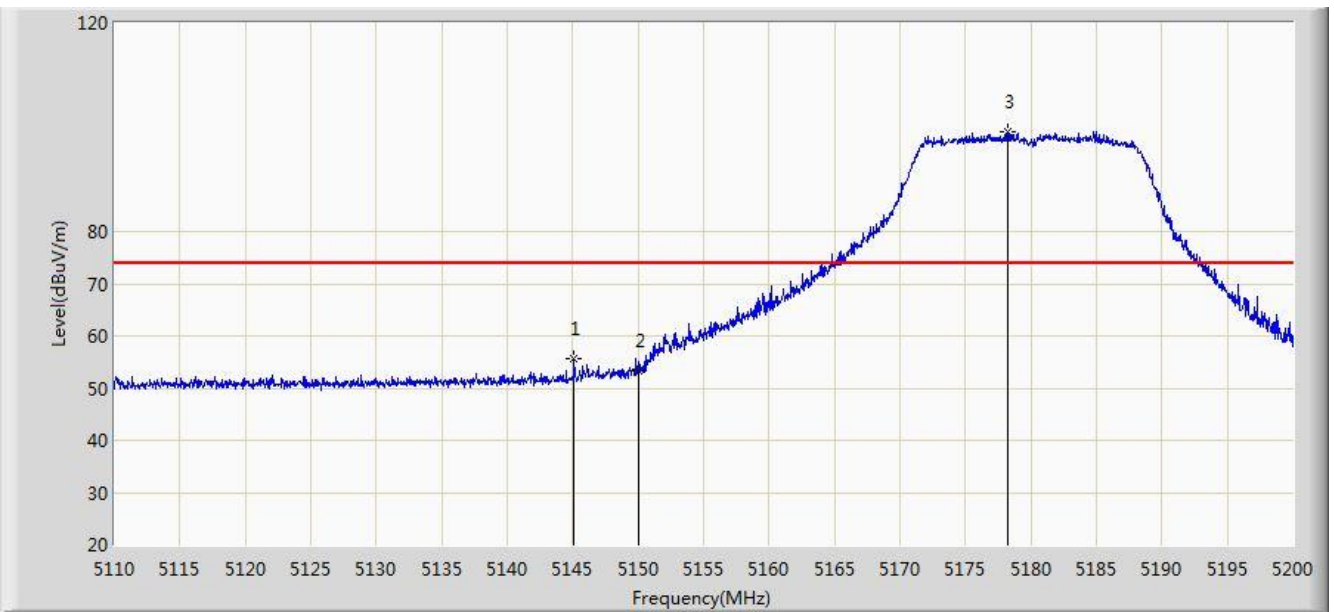

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5145.100	55.574	51.398	-18.426	74.000	4.176	PK
2			5150.000	53.319	49.150	-20.681	74.000	4.170	PK
3		*	5178.265	99.040	94.965	N/A	N/A	4.075	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre-amplifier Factor (dB)

Site: AC1	Time: 2017/07/21 - 07:58
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 5180MHz Ant 1	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.160	40.046	35.871	-13.954	54.000	4.175	AV
2			5150.000	40.012	35.843	-13.988	54.000	4.170	AV
3		*	5183.305	87.016	82.959	N/A	N/A	4.057	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre-amplifier Factor (dB)

Site: AC1	Time: 2017/07/21 - 07:58
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 5320MHz Ant 1	

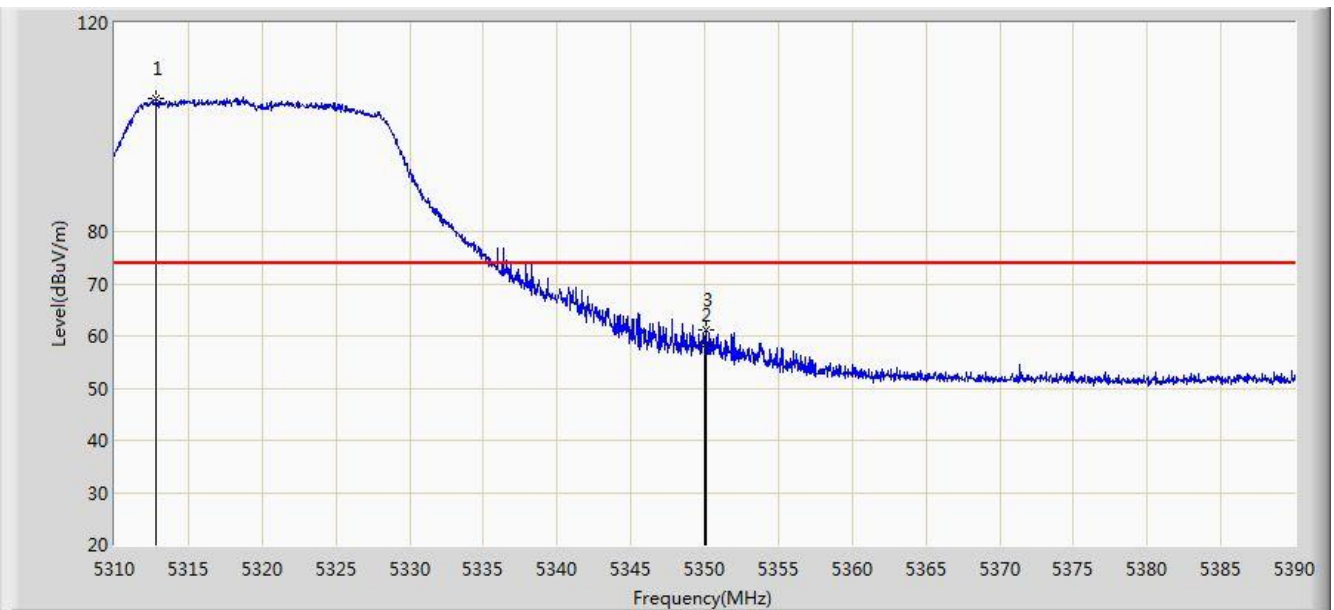


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5312.840	105.625	101.790	N/A	N/A	3.836	PK
2			5350.000	58.357	54.452	-15.643	74.000	3.904	PK
3			5350.120	61.040	57.135	-12.960	74.000	3.905	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre-amplifier Factor (dB)

Site: AC1	Time: 2017/07/21 - 08:00
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 5320MHz Ant 1	

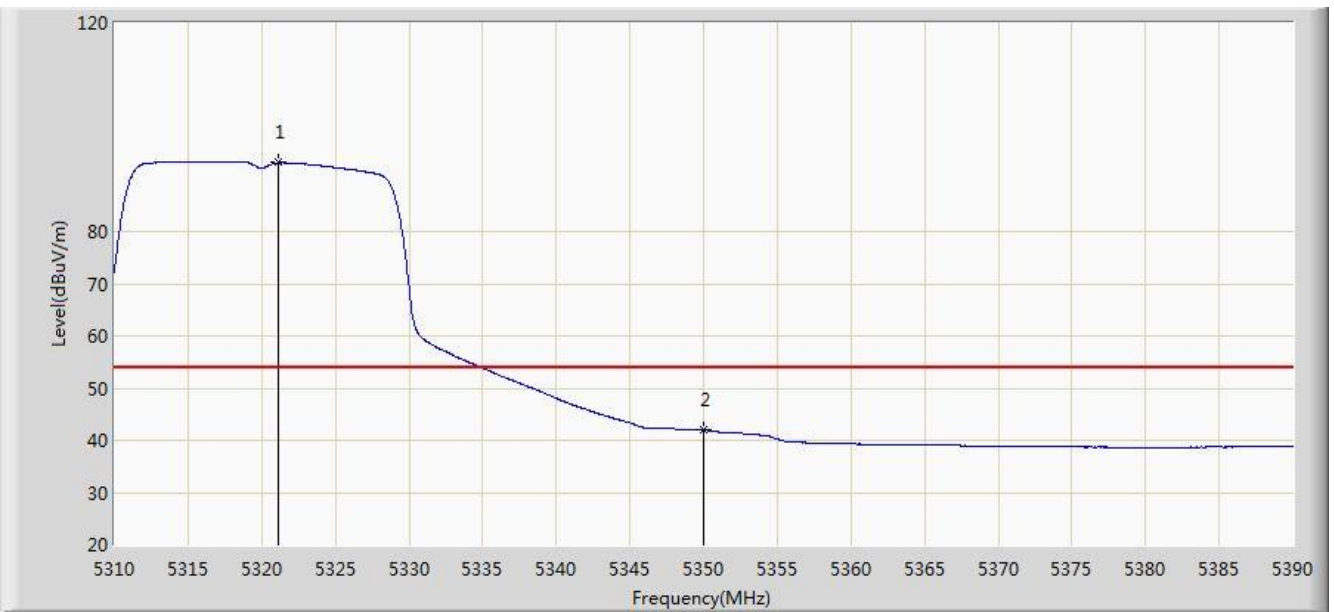


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5321.160	93.193	89.342	N/A	N/A	3.851	AV
2			5350.000	41.988	38.083	-12.012	54.000	3.904	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre-amplifier Factor (dB)

Site: AC1	Time: 2017/07/21 - 08:00
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 5320MHz Ant 1	

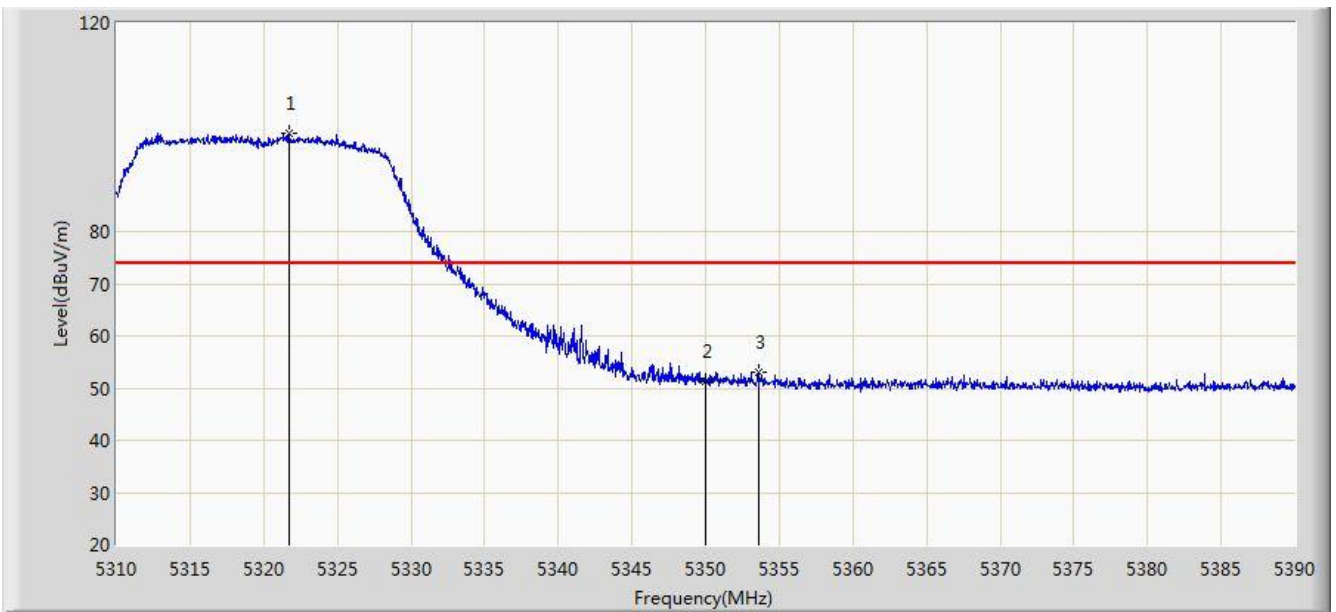


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5321.720	98.825	94.973	N/A	N/A	3.852	PK
2			5350.000	51.386	47.481	-22.614	74.000	3.904	PK
3			5353.640	53.175	49.264	-20.825	74.000	3.911	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre-amplifier Factor (dB)

Site: AC1	Time: 2017/07/21 - 08:01
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 5320MHz Ant 1	

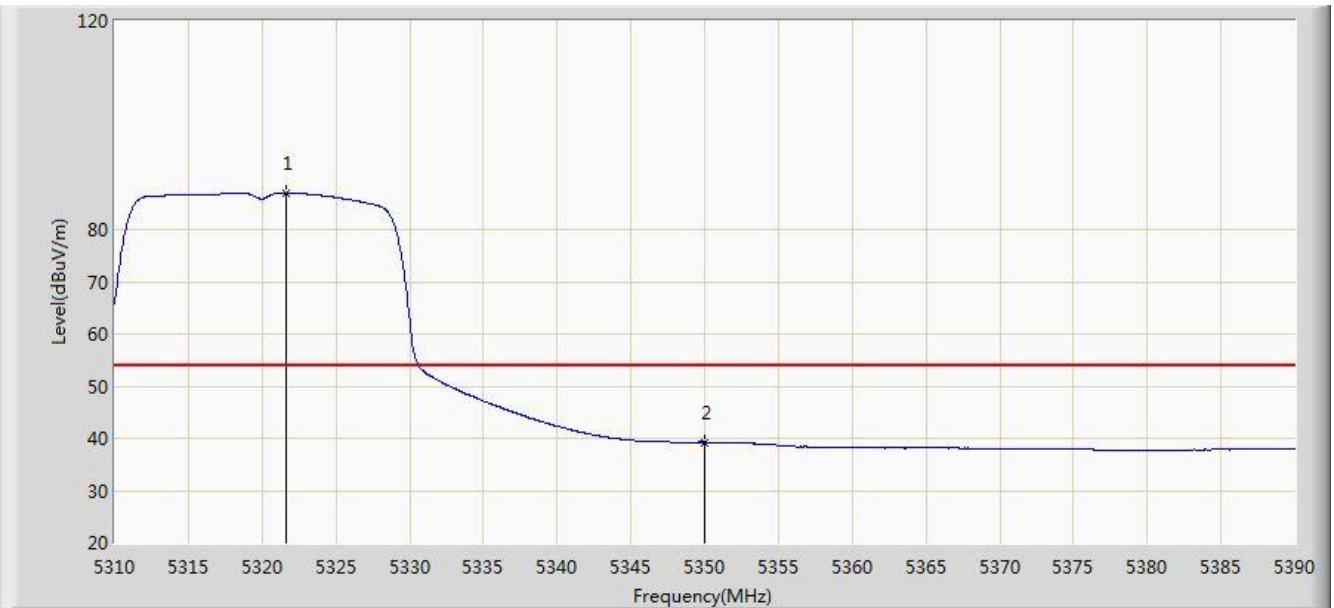


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5321.640	87.034	83.182	N/A	N/A	3.852	AV
2			5350.000	39.269	35.364	-14.731	54.000	3.904	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre-amplifier Factor (dB)

Site: AC1	Time: 2017/07/21 - 08:02
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 5500MHz Ant 1	

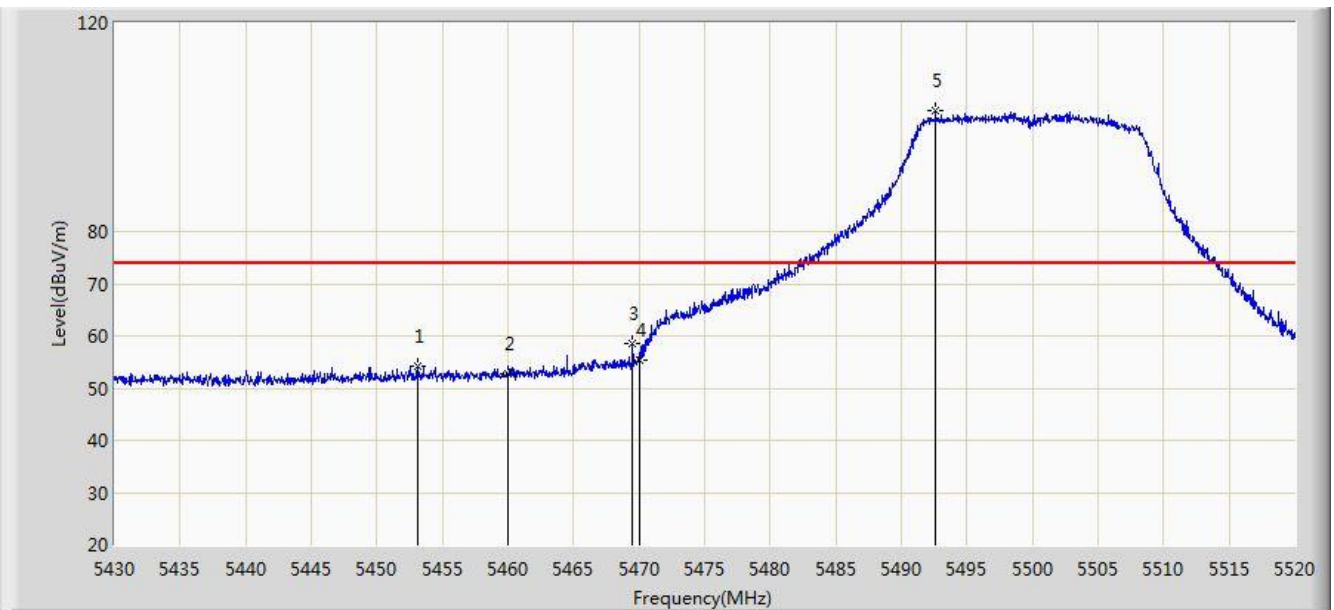

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5453.085	54.179	50.014	-19.821	74.000	4.164	PK
2			5460.000	52.724	48.544	-21.276	74.000	4.180	PK
3			5469.510	58.479	54.278	-15.521	74.000	4.202	PK
4			5470.000	55.418	51.216	-18.582	74.000	4.202	PK
5		*	5492.595	103.269	99.015	N/A	N/A	4.254	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre-amplifier Factor (dB)

Site: AC1	Time: 2017/07/21 - 08:03
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 5500MHz Ant 1	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	40.804	36.624	-13.196	54.000	4.180	AV
2		*	5498.265	92.527	88.260	N/A	N/A	4.267	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre-amplifier Factor (dB)

Site: AC1	Time: 2017/07/21 - 08:04
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 5500MHz Ant 1	

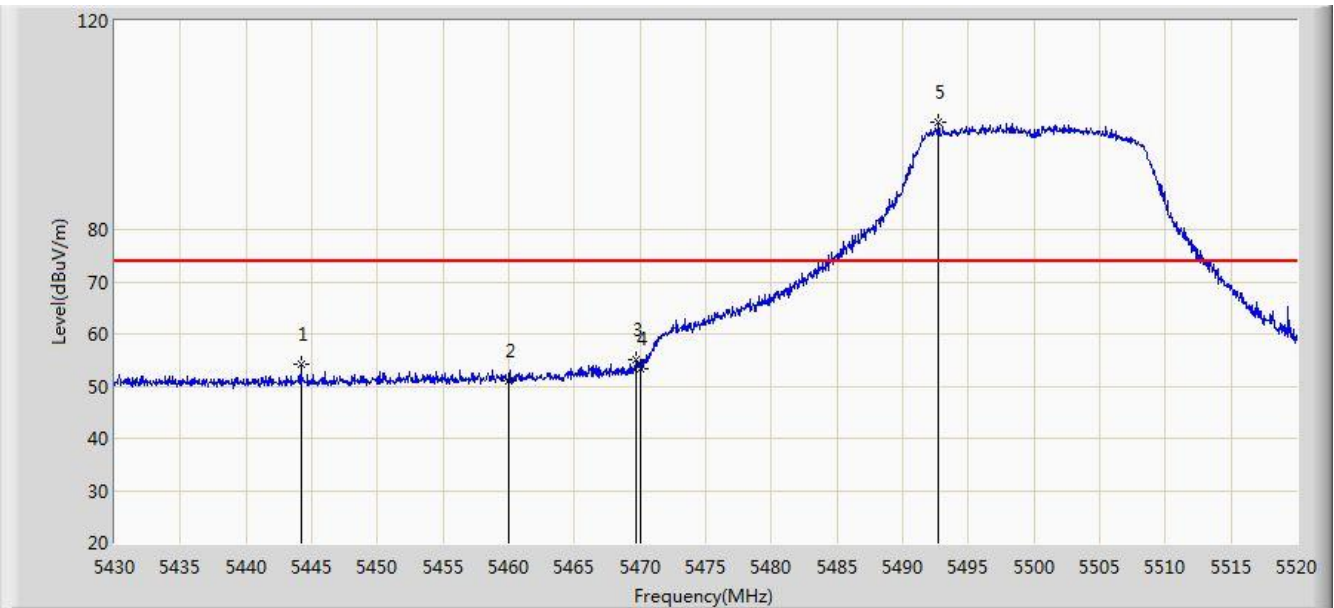


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5444.175	54.266	50.129	-19.734	74.000	4.137	PK
2			5460.000	51.108	46.928	-22.892	74.000	4.180	PK
3			5469.735	55.179	50.977	-18.821	74.000	4.202	PK
4			5470.000	53.235	49.033	-20.765	74.000	4.202	PK
5		*	5492.730	100.715	96.461	N/A	N/A	4.254	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre-amplifier Factor (dB)

Site: AC1	Time: 2017/07/21 - 08:04
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 5500MHz Ant 1	

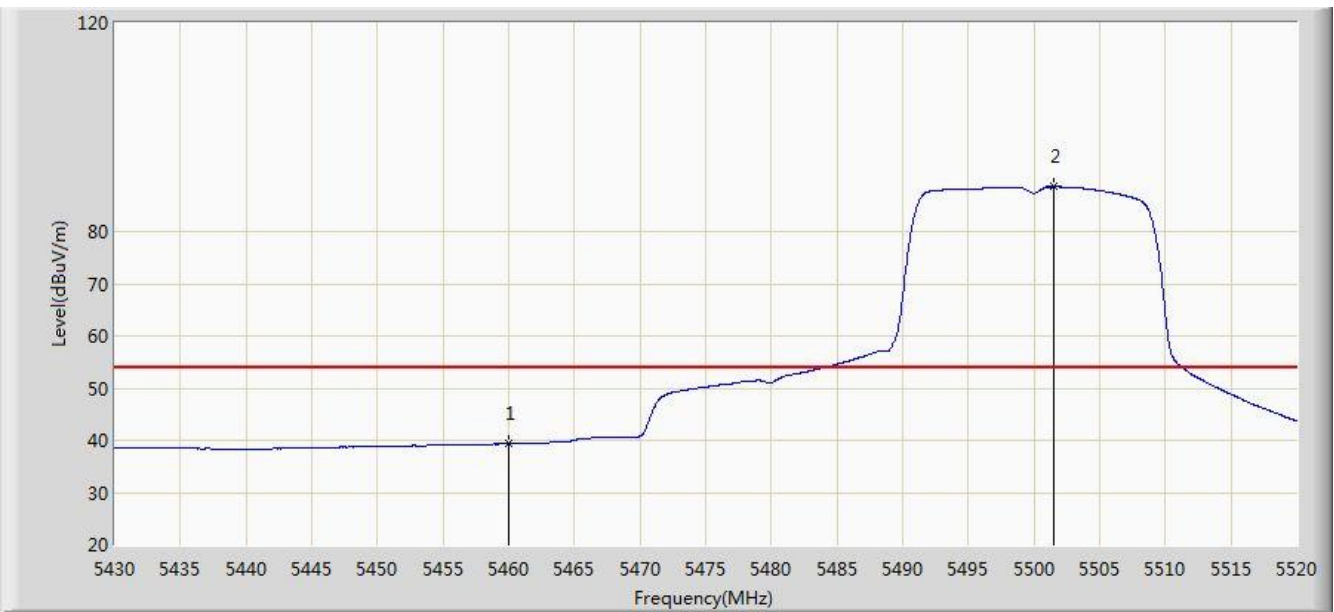


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	39.329	35.149	-14.671	54.000	4.180	AV
2		*	5501.460	88.571	84.295	N/A	N/A	4.276	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre-amplifier Factor (dB)

Site: AC1	Time: 2017/07/21 - 08:05
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 5700MHz Ant 1	

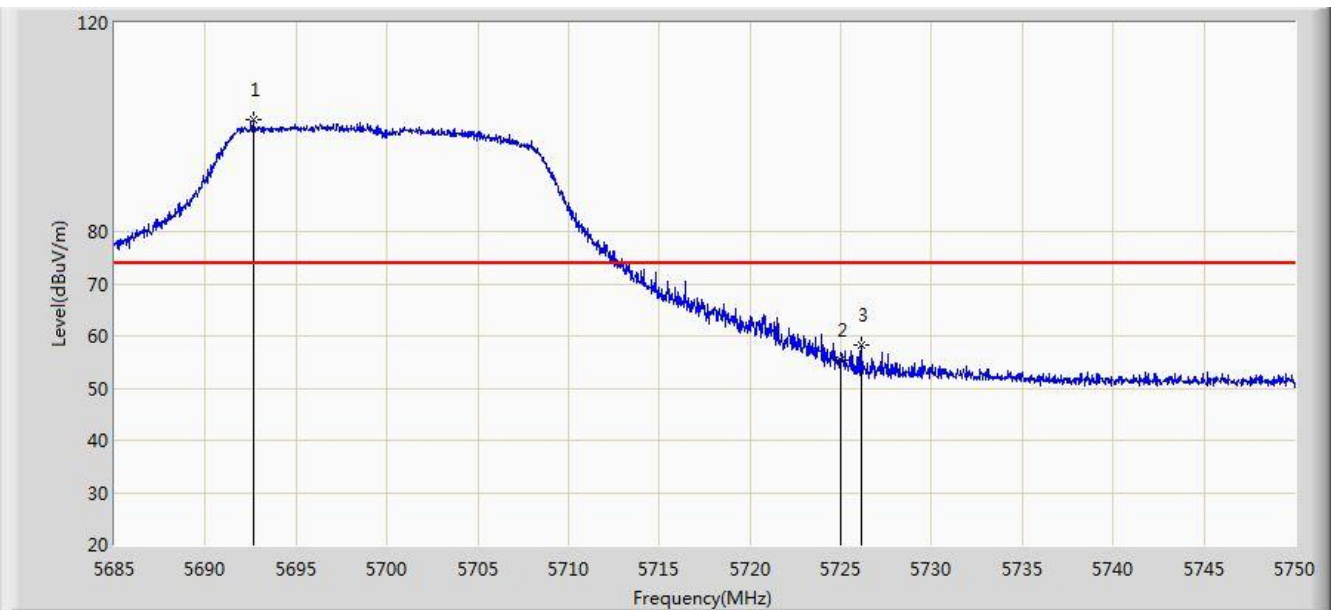


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5692.670	101.367	96.528	N/A	N/A	4.840	PK
2			5725.000	55.463	50.434	-18.537	74.000	5.029	PK
3			5726.112	58.184	53.148	-15.816	74.000	5.036	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre-amplifier Factor (dB)

Site: AC1	Time: 2017/07/21 - 08:06
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 5700MHz Ant 1	

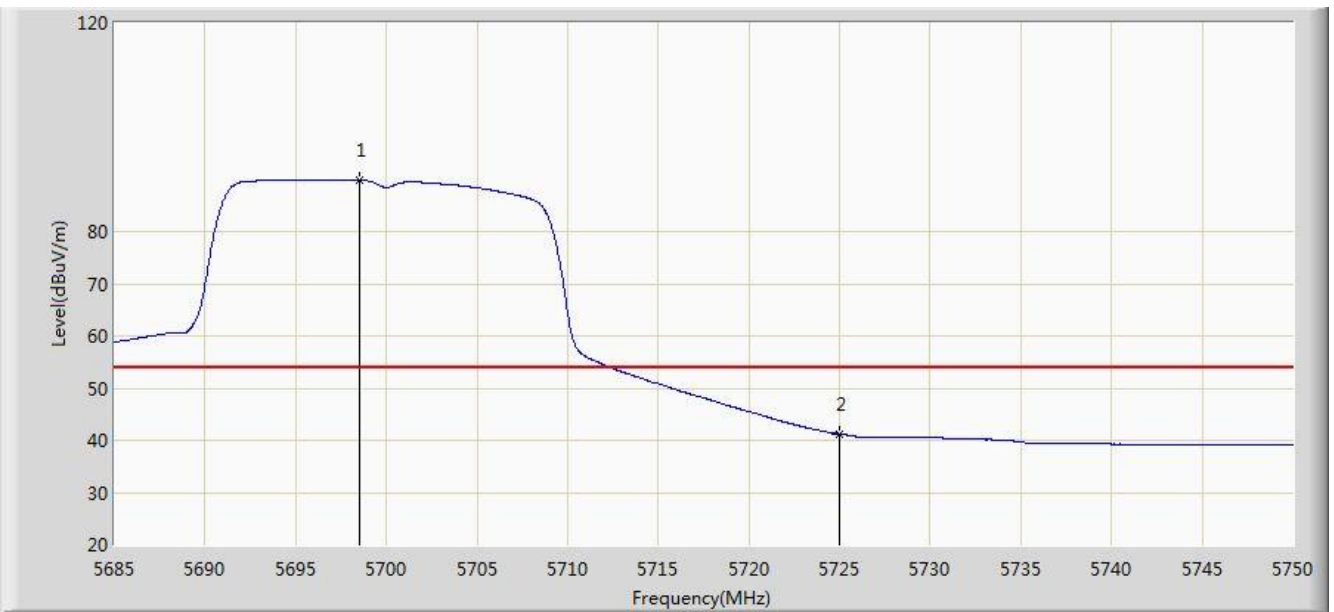


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5698.520	89.837	84.967	N/A	N/A	4.871	AV
2			5725.000	41.231	36.202	-12.769	54.000	5.029	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre-amplifier Factor (dB)

Site: AC1	Time: 2017/07/21 - 08:06
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 5700MHz Ant 1	

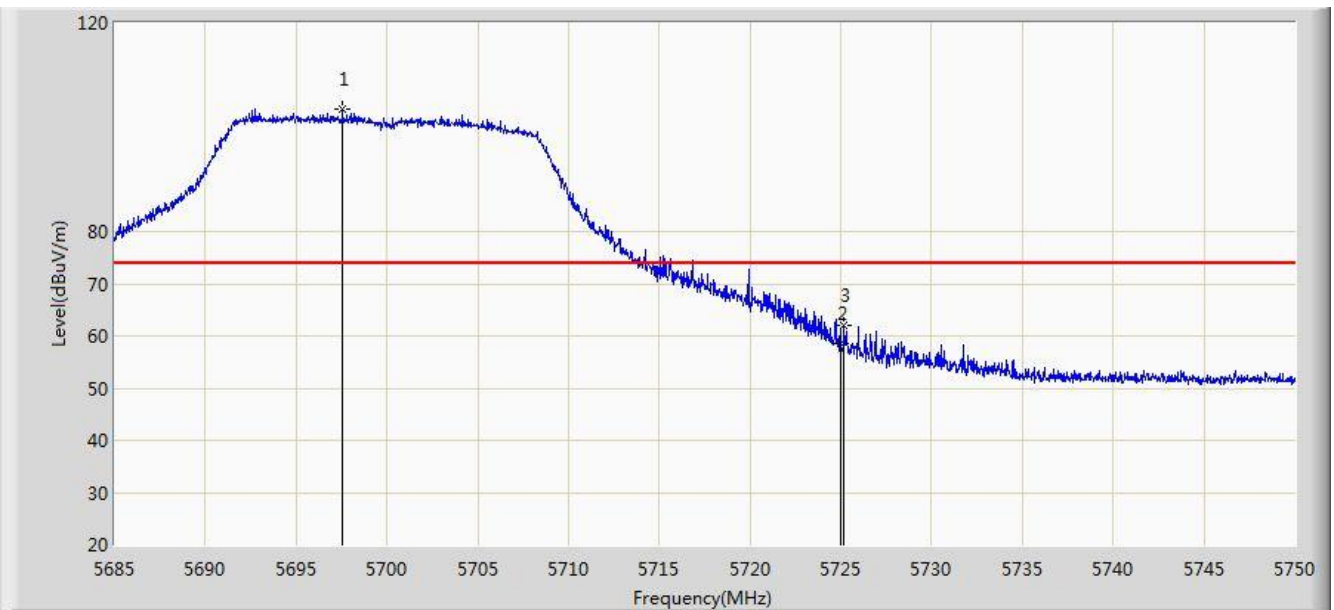


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5697.545	103.353	98.488	N/A	N/A	4.865	PK
2			5725.000	58.466	53.437	-15.534	74.000	5.029	PK
3			5725.170	61.886	56.856	-12.114	74.000	5.030	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre-amplifier Factor (dB)

Site: AC1	Time: 2017/07/21 - 08:07
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 5700MHz Ant 1	

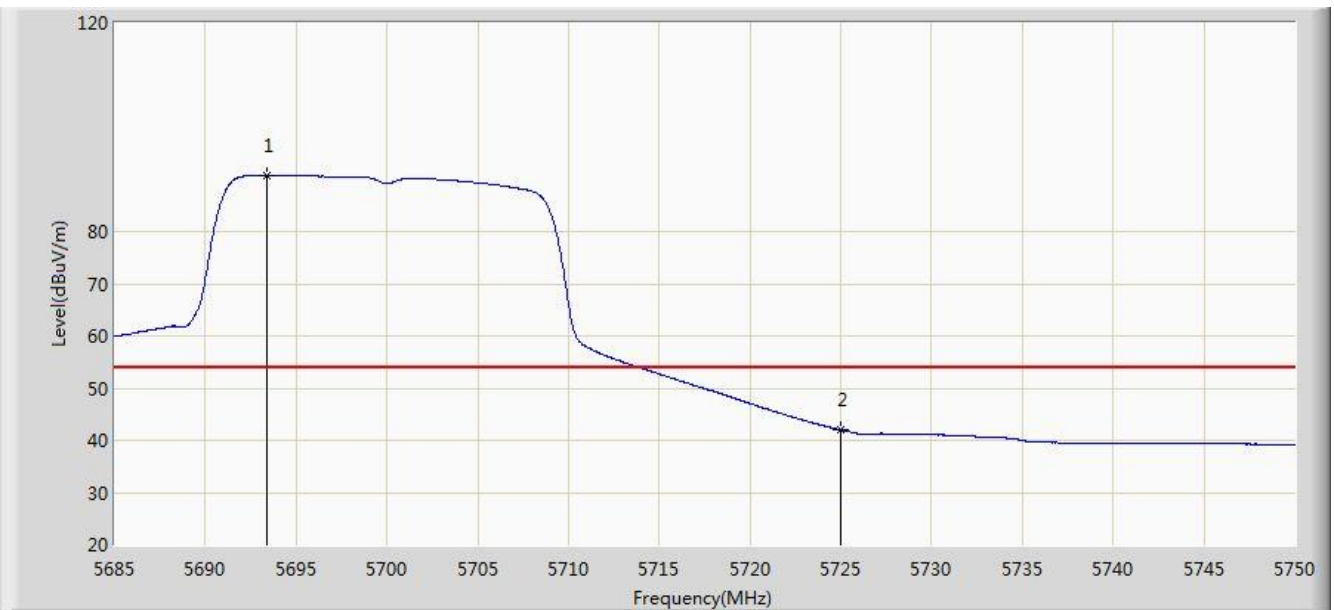


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5693.353	90.655	85.812	N/A	N/A	4.843	AV
2			5725.000	42.040	37.011	-11.960	54.000	5.029	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre-amplifier Factor (dB)

Site: AC1	Time: 2017/07/21 - 08:36
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 5745MHz Ant 1	

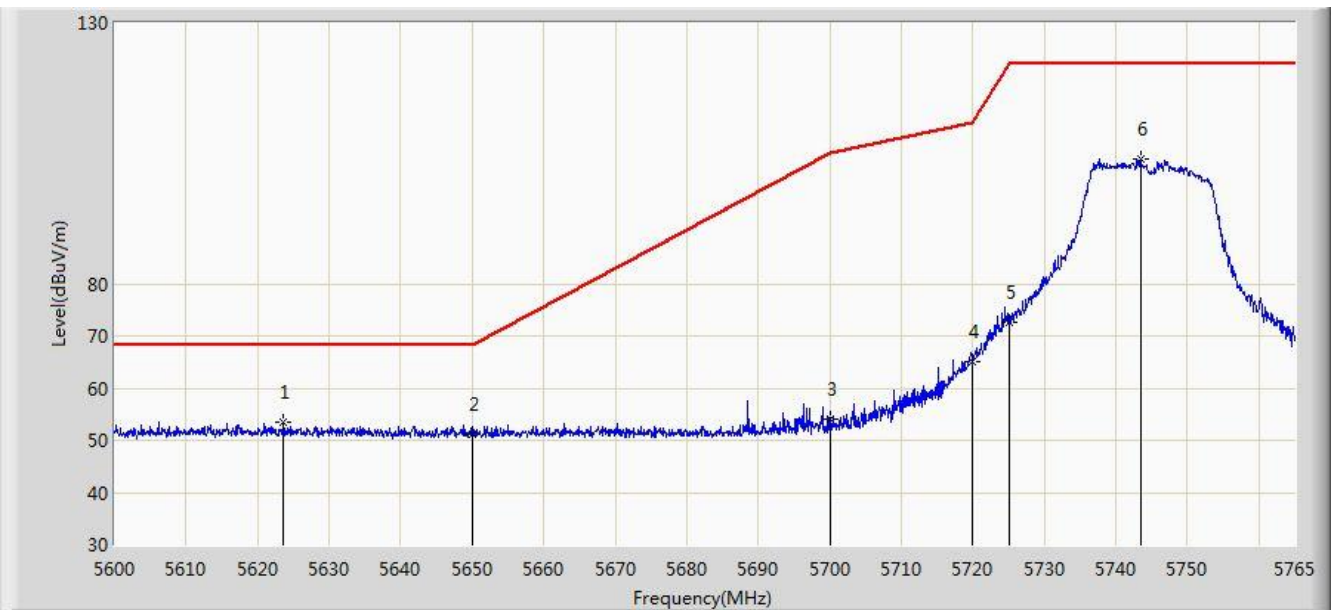


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5623.595	53.382	48.791	-14.818	68.200	4.591	PK
2			5650.000	51.292	46.621	-16.908	68.200	4.671	PK
3			5700.000	54.096	49.218	-51.104	105.200	4.878	PK
4			5720.000	65.090	60.093	-45.710	110.800	4.997	PK
5			5725.000	72.696	67.667	-49.504	122.200	5.029	PK
6			5743.467	103.799	98.653	N/A	N/A	5.147	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre-amplifier Factor (dB)

Site: AC1	Time: 2017/07/21 - 08:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 5745MHz Ant 1	

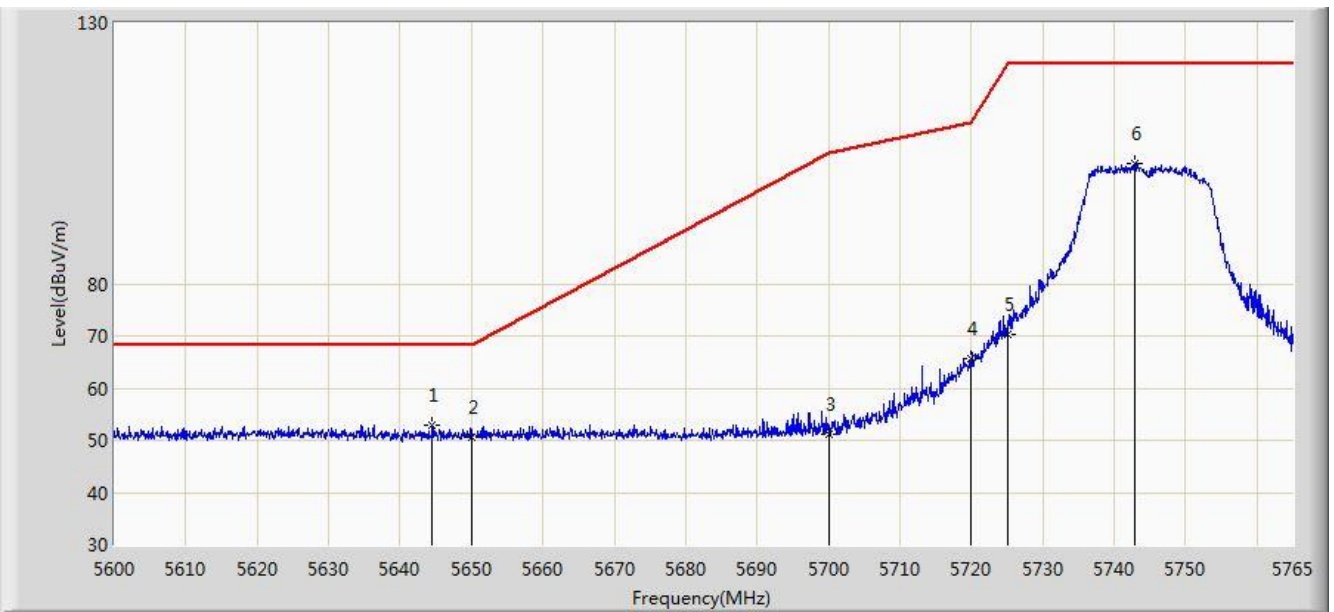


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5644.467	52.916	48.263	-15.284	68.200	4.652	PK
2			5650.000	50.686	46.015	-17.514	68.200	4.671	PK
3			5700.000	51.269	46.391	-53.931	105.200	4.878	PK
4			5720.000	65.681	60.684	-45.119	110.800	4.997	PK
5			5725.000	70.355	65.326	-51.845	122.200	5.029	PK
6			5742.890	103.144	98.001	N/A	N/A	5.144	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre-amplifier Factor (dB)

Site: AC1	Time: 2017/07/21 - 08:15
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 5825MHz Ant 1	

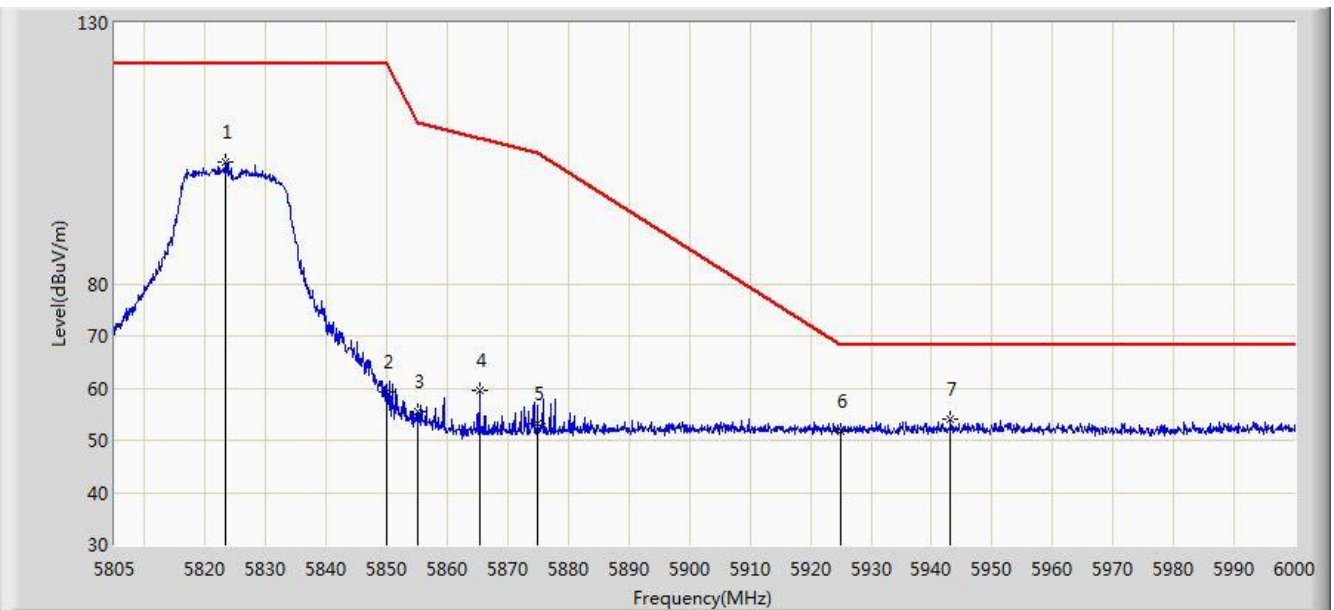


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5823.232	103.194	97.616	N/A	N/A	5.578	PK
2			5850.000	59.408	53.682	-62.792	122.200	5.726	PK
3			5855.000	55.406	49.660	-55.394	110.800	5.746	PK
4			5865.255	59.561	53.775	-48.365	107.926	5.786	PK
5			5875.000	53.055	47.235	-52.145	105.200	5.820	PK
6			5925.000	51.841	45.875	-16.359	68.200	5.967	PK
7		*	5943.060	54.019	48.008	-14.181	68.200	6.011	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre-amplifier Factor (dB)

Site: AC1	Time: 2017/07/21 - 08:16
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 5825MHz Ant 1	

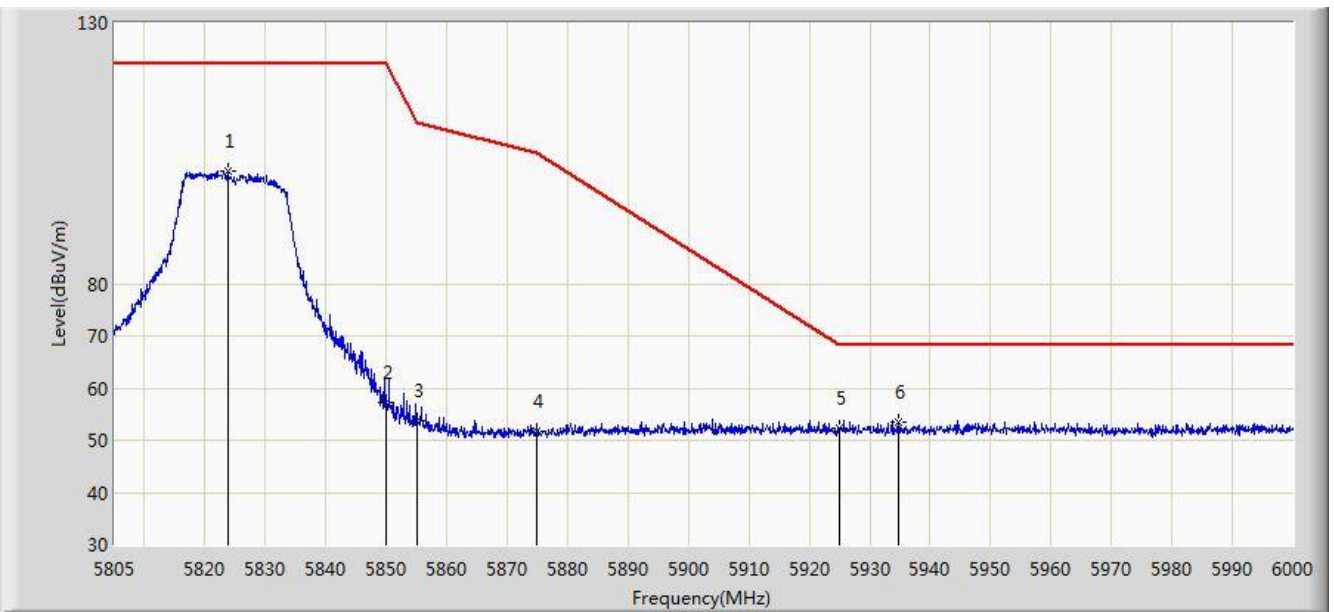


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5823.720	101.728	96.148	N/A	N/A	5.580	PK
2			5850.000	57.106	51.380	-65.094	122.200	5.726	PK
3			5855.000	53.815	48.069	-56.985	110.800	5.746	PK
4			5875.000	51.855	46.035	-53.345	105.200	5.820	PK
5			5925.000	52.188	46.222	-16.012	68.200	5.967	PK
6		*	5934.675	53.618	47.627	-14.582	68.200	5.991	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre-amplifier Factor (dB)

Site: AC1	Time: 2017/07/21 - 08:18
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 5190MHz Ant 1	

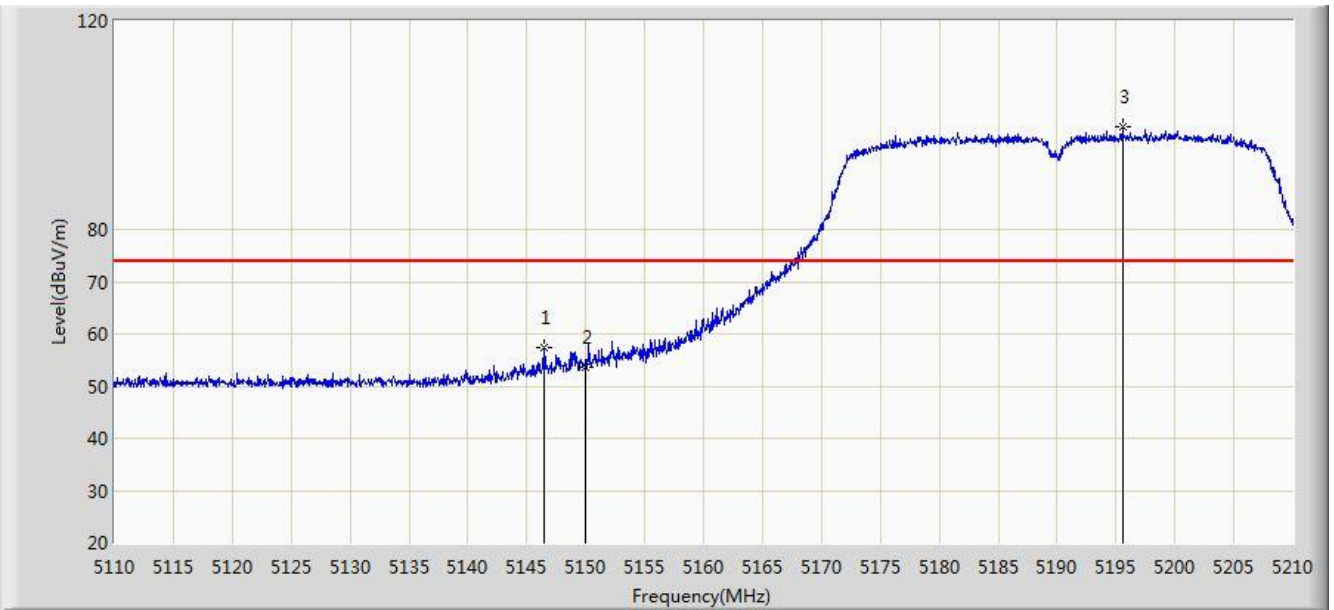


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5146.450	57.385	53.209	-16.615	74.000	4.176	PK
2			5150.000	53.553	49.384	-20.447	74.000	4.170	PK
3		*	5195.550	99.761	95.747	N/A	N/A	4.014	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre-amplifier Factor (dB)

Site: AC1	Time: 2017/07/21 - 08:19
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 5190MHz Ant 1	

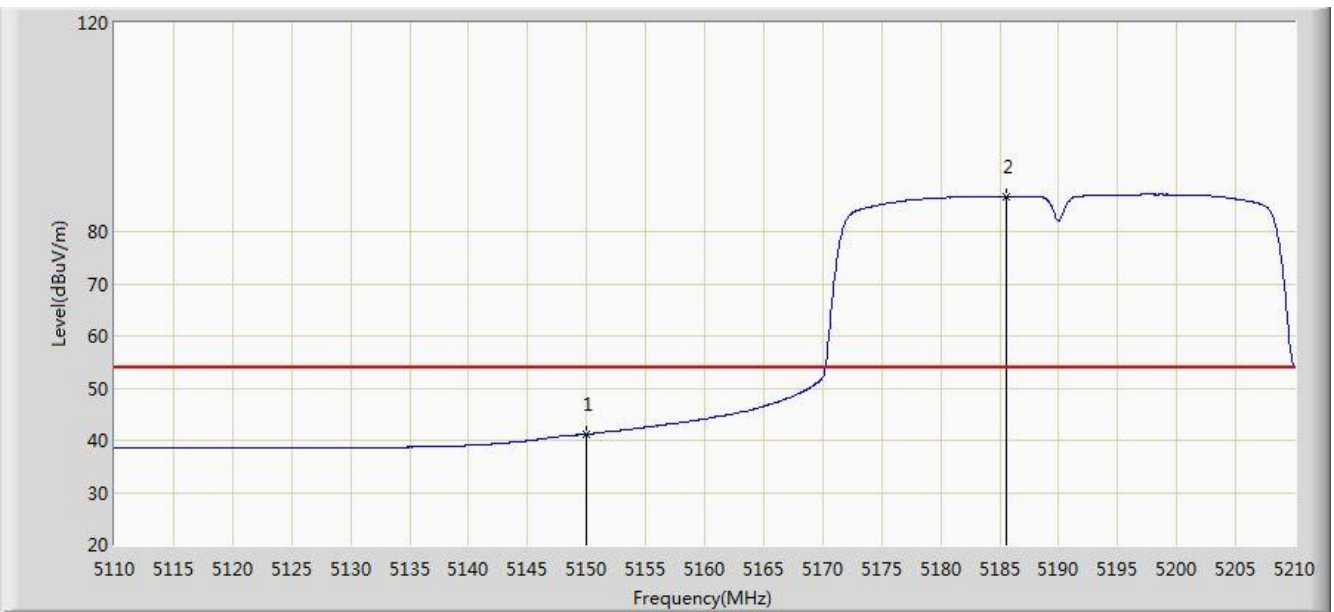


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	41.196	37.027	-12.804	54.000	4.170	AV
2		*	5185.550	86.636	82.587	N/A	N/A	4.049	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre-amplifier Factor (dB)

Site: AC1	Time: 2017/07/21 - 08:19
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 5190MHz Ant 1	

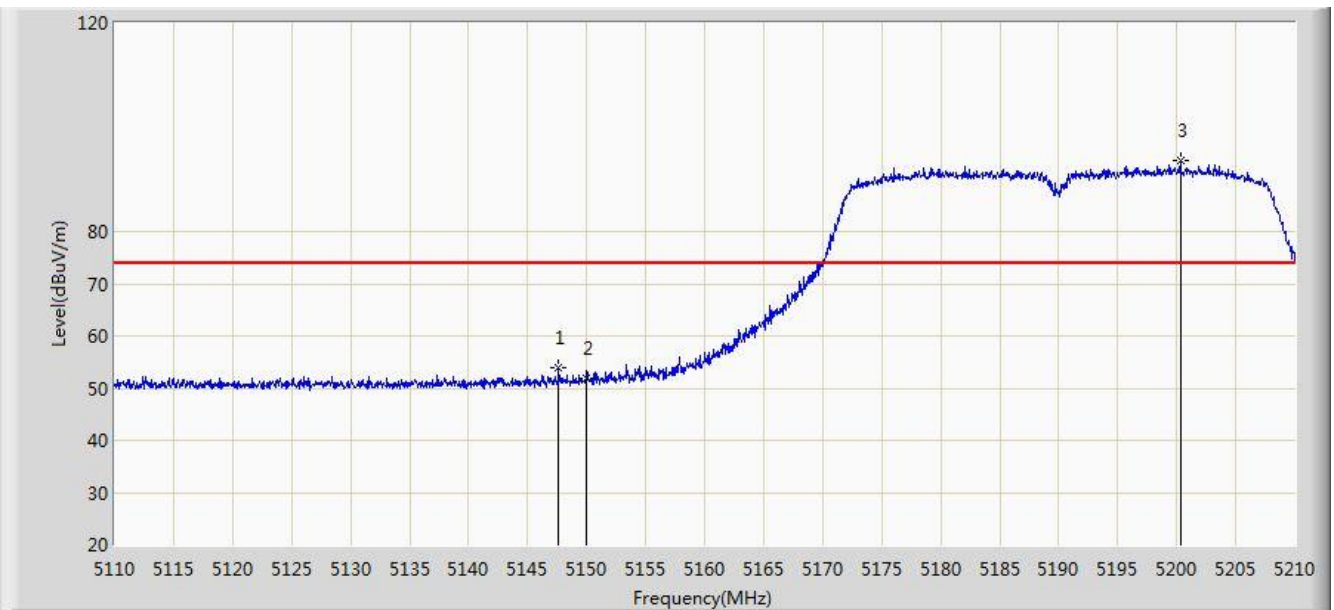


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5147.650	53.819	49.643	-20.181	74.000	4.176	PK
2			5150.000	51.810	47.641	-22.190	74.000	4.170	PK
3		*	5200.300	93.539	89.542	N/A	N/A	3.998	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre-amplifier Factor (dB)

Site: AC1	Time: 2017/07/21 - 08:20
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 5190MHz Ant 1	

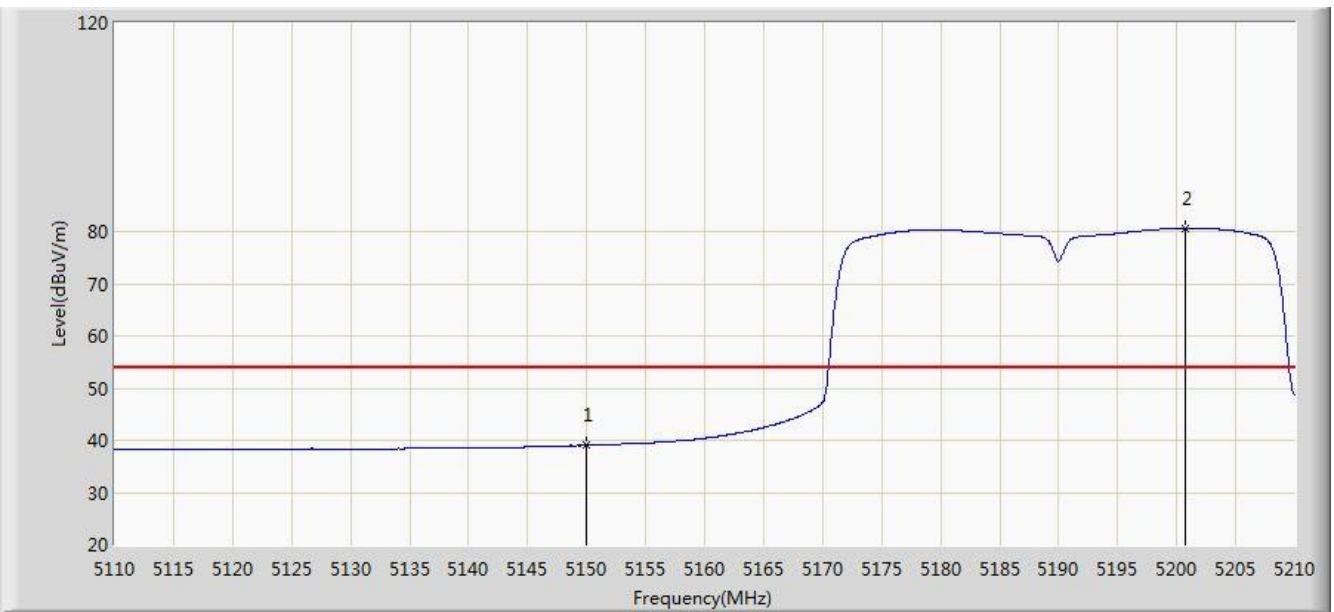


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	39.030	34.861	-14.970	54.000	4.170	AV
2		*	5200.750	80.640	76.644	N/A	N/A	3.996	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre-amplifier Factor (dB)

Site: AC1	Time: 2017/07/21 - 08:20
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 5310MHz Ant 1	

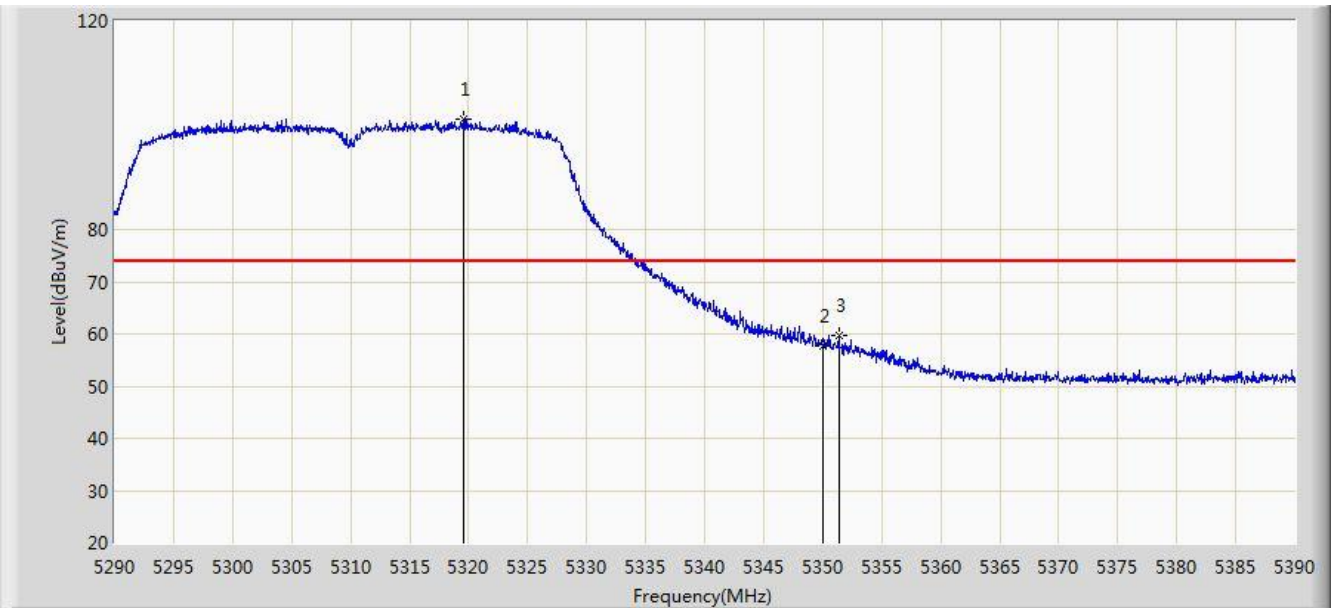


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5319.550	101.244	97.396	N/A	N/A	3.847	PK
2			5350.000	57.664	53.759	-16.336	74.000	3.904	PK
3			5351.350	59.662	55.755	-14.338	74.000	3.907	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre-amplifier Factor (dB)

Site: AC1	Time: 2017/07/21 - 08:22
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 5310MHz Ant 1	

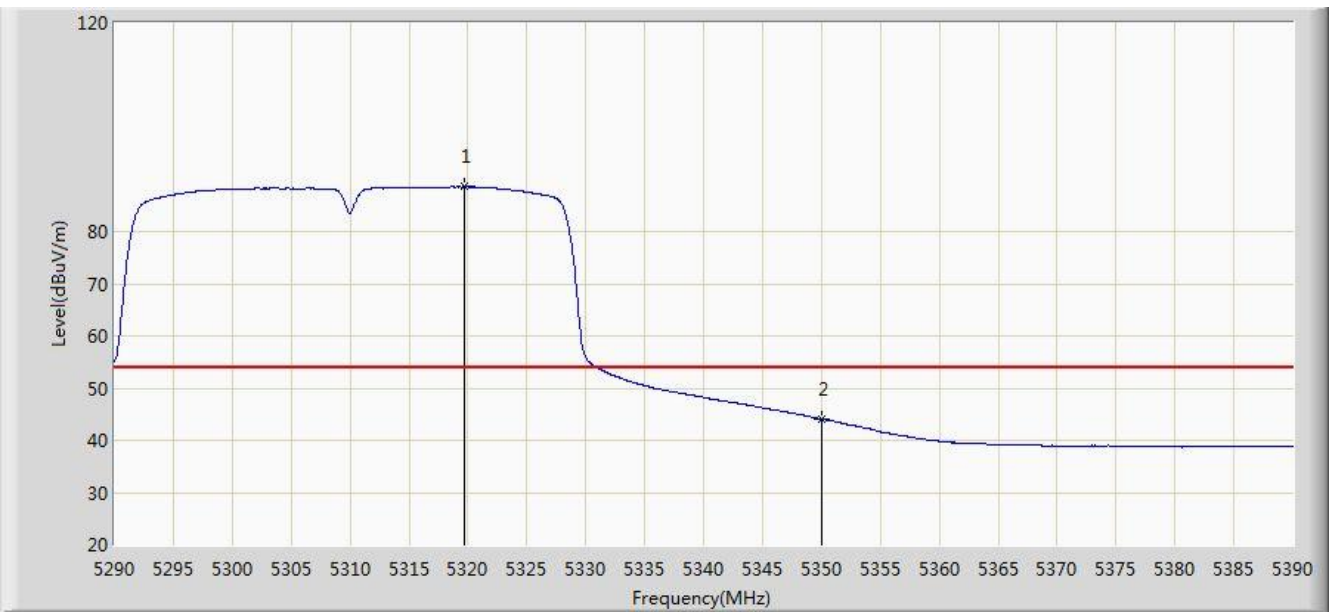


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5319.650	88.557	84.709	N/A	N/A	3.848	AV
2			5350.000	44.081	40.176	-9.919	54.000	3.904	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre-amplifier Factor (dB)

Site: AC1	Time: 2017/07/21 - 08:22
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 5310MHz Ant 1	

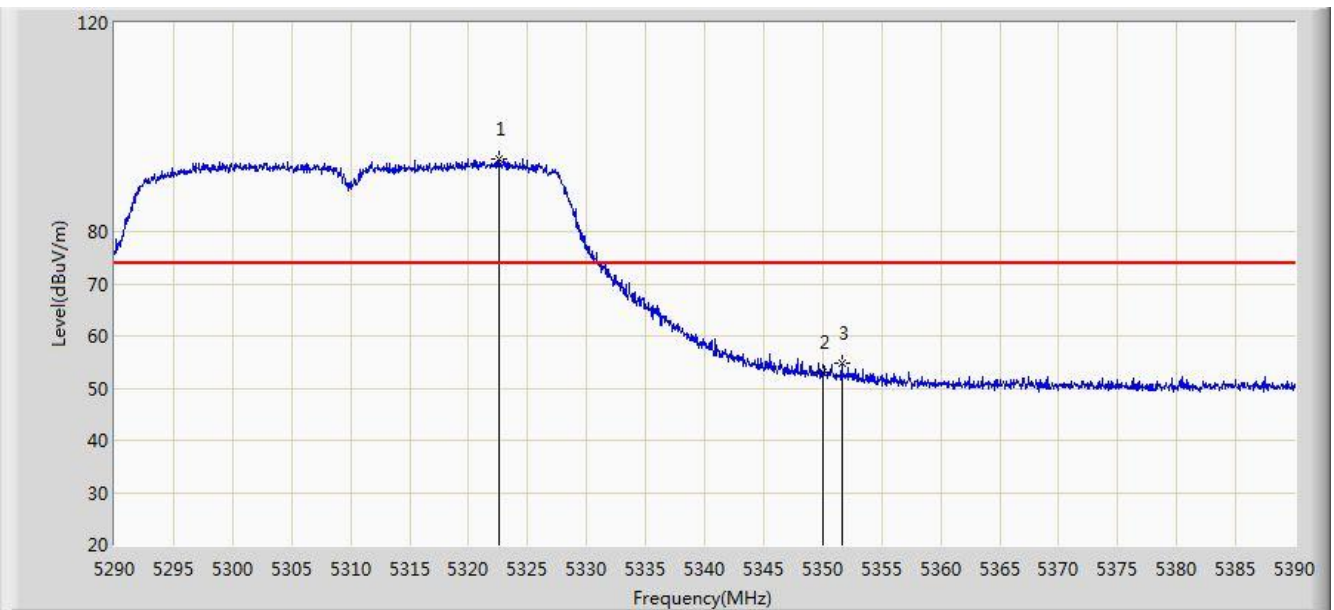


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5322.600	93.772	89.918	N/A	N/A	3.853	PK
2			5350.000	53.016	49.111	-20.984	74.000	3.904	PK
3			5351.600	54.722	50.814	-19.278	74.000	3.908	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre-amplifier Factor (dB)

Site: AC1	Time: 2017/07/21 - 08:23
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 5310MHz Ant 1	

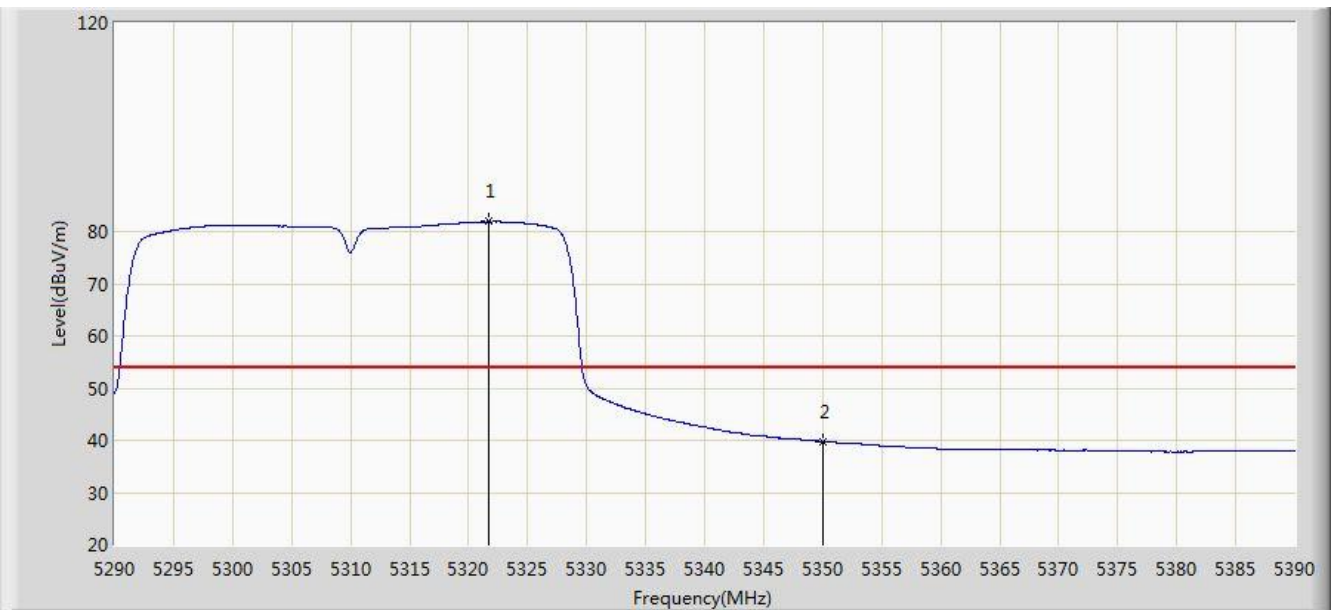


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5321.650	81.901	78.049	N/A	N/A	3.852	AV
2			5350.000	39.764	35.859	-14.236	54.000	3.904	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre-amplifier Factor (dB)

Site: AC1	Time: 2017/07/21 - 08:24
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 5510MHz Ant 1	

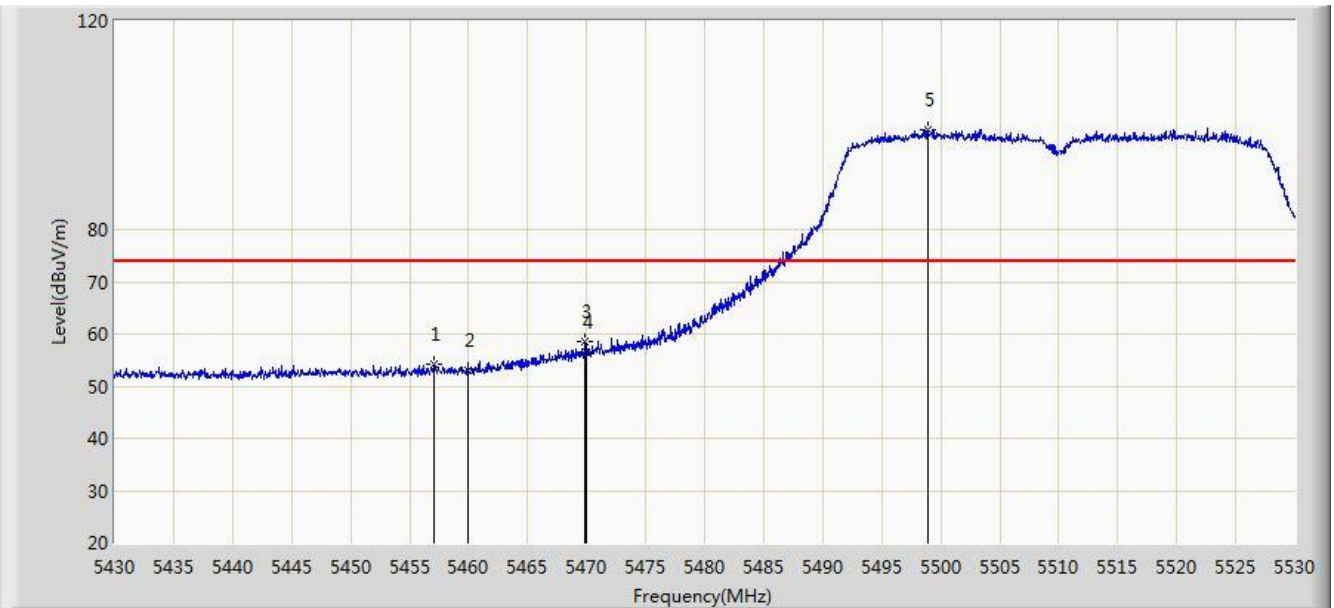


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5457.100	54.296	50.122	-19.704	74.000	4.174	PK
2			5460.000	53.035	48.855	-20.965	74.000	4.180	PK
3			5469.850	58.466	54.264	-15.534	74.000	4.202	PK
4			5470.000	56.470	52.268	-17.530	74.000	4.202	PK
5		*	5498.950	99.214	94.945	N/A	N/A	4.269	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre-amplifier Factor (dB)

Site: AC1	Time: 2017/07/21 - 08:25
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 5510MHz Ant 1	

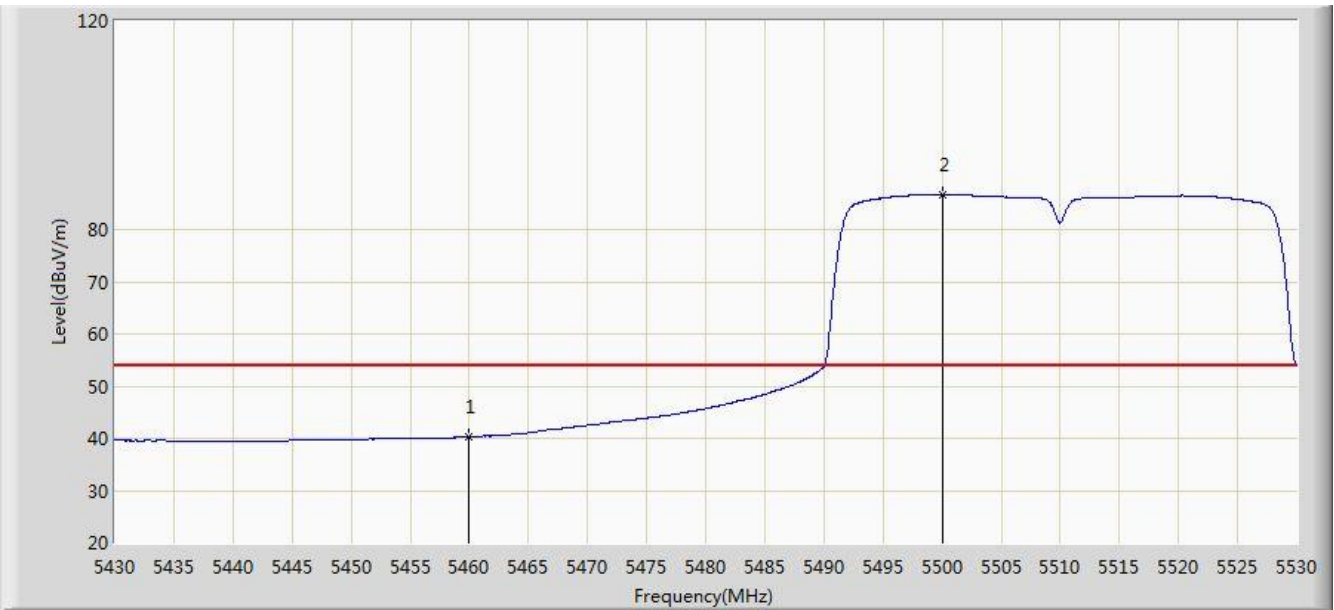


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	40.284	36.104	-13.716	54.000	4.180	AV
2		*	5500.100	86.669	82.397	N/A	N/A	4.272	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre-amplifier Factor (dB)

Site: AC1	Time: 2017/07/21 - 08:26
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 5510MHz Ant 1	

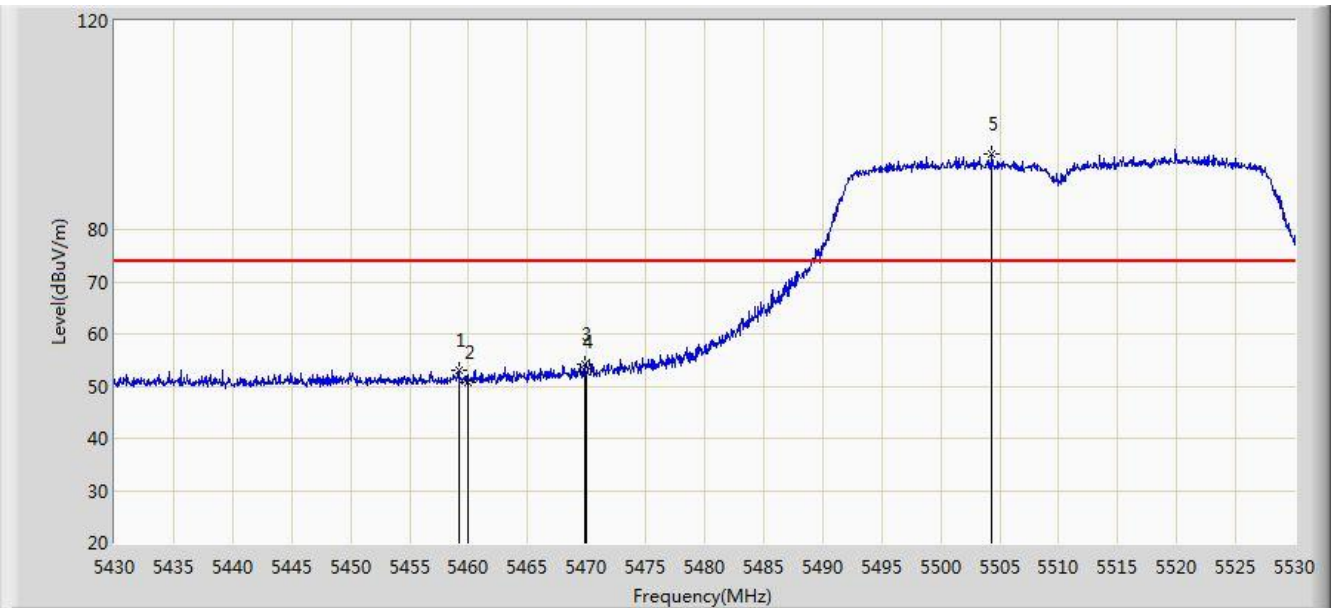


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5459.150	52.914	48.736	-21.086	74.000	4.178	PK
2			5460.000	50.869	46.689	-23.131	74.000	4.180	PK
3			5469.800	54.267	50.065	-19.733	74.000	4.202	PK
4			5470.000	52.753	48.551	-21.247	74.000	4.202	PK
5		*	5504.350	94.614	90.329	N/A	N/A	4.284	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre-amplifier Factor (dB)

Site: AC1	Time: 2017/07/21 - 08:26
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 5510MHz Ant 1	

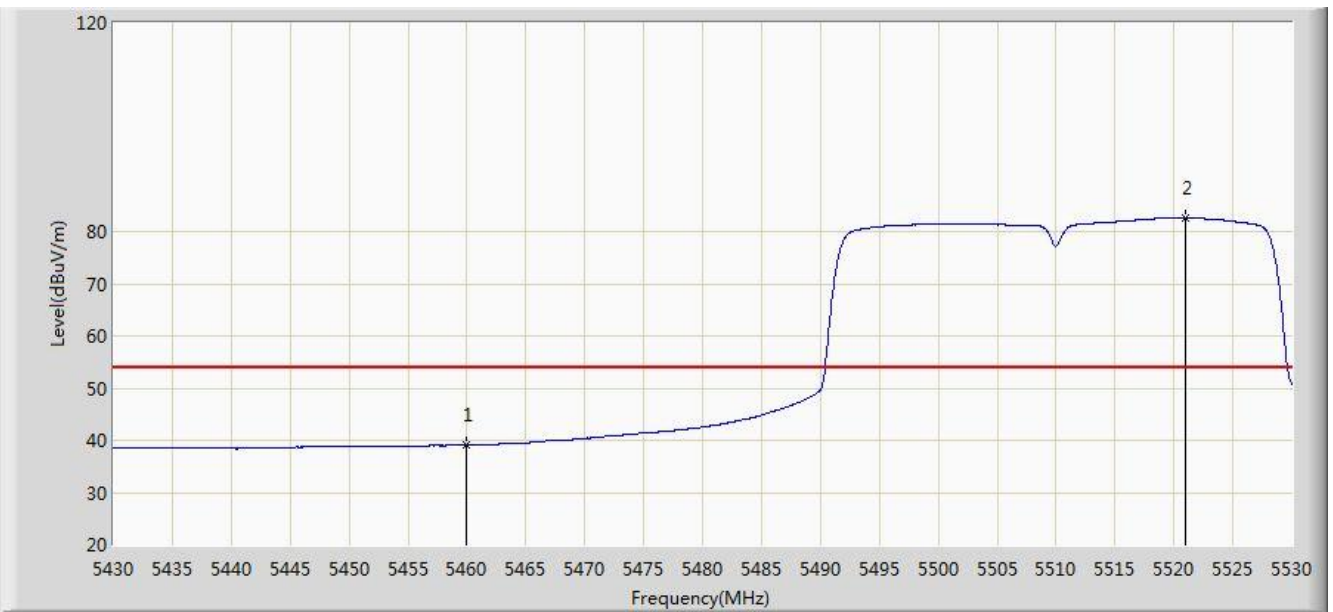


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	39.092	34.912	-14.908	54.000	4.180	AV
2		*	5520.950	82.603	78.269	N/A	N/A	4.334	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre-amplifier Factor (dB)

Site: AC1	Time: 2017/07/21 - 08:27
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 5670MHz Ant 1	

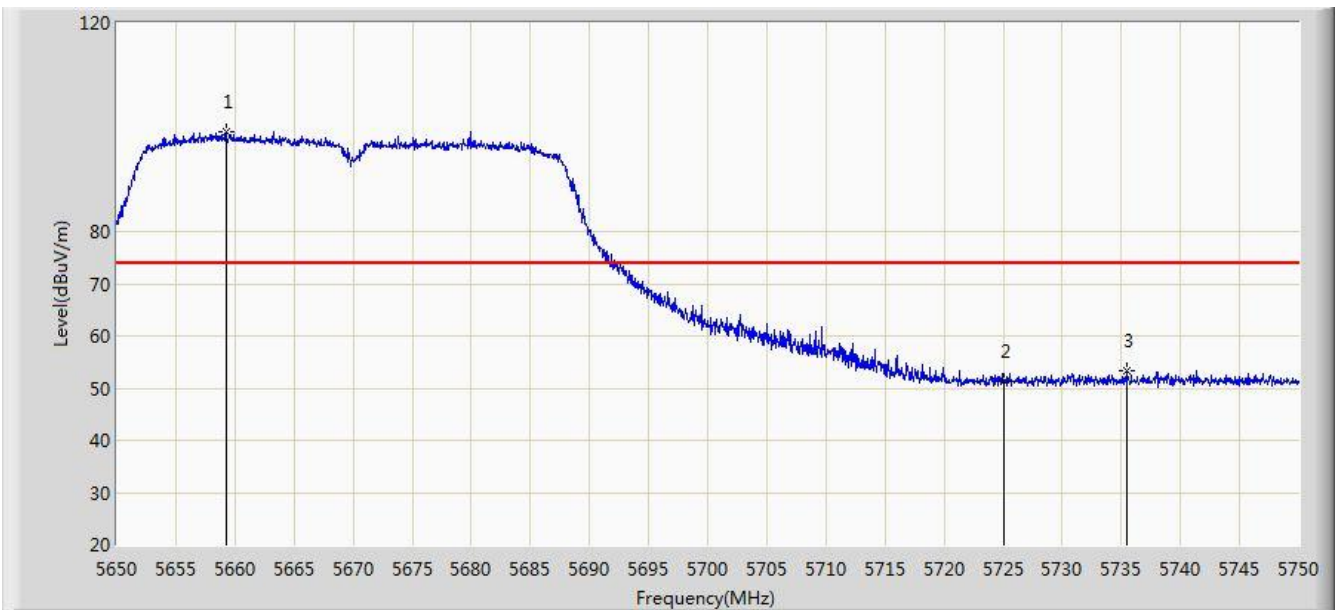


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5659.250	99.120	94.416	N/A	N/A	4.704	PK
2			5725.000	51.229	46.200	-22.771	74.000	5.029	PK
3			5735.450	53.290	48.194	-20.710	74.000	5.097	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre-amplifier Factor (dB)

Site: AC1	Time: 2017/07/21 - 08:28
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 5670MHz Ant 1	

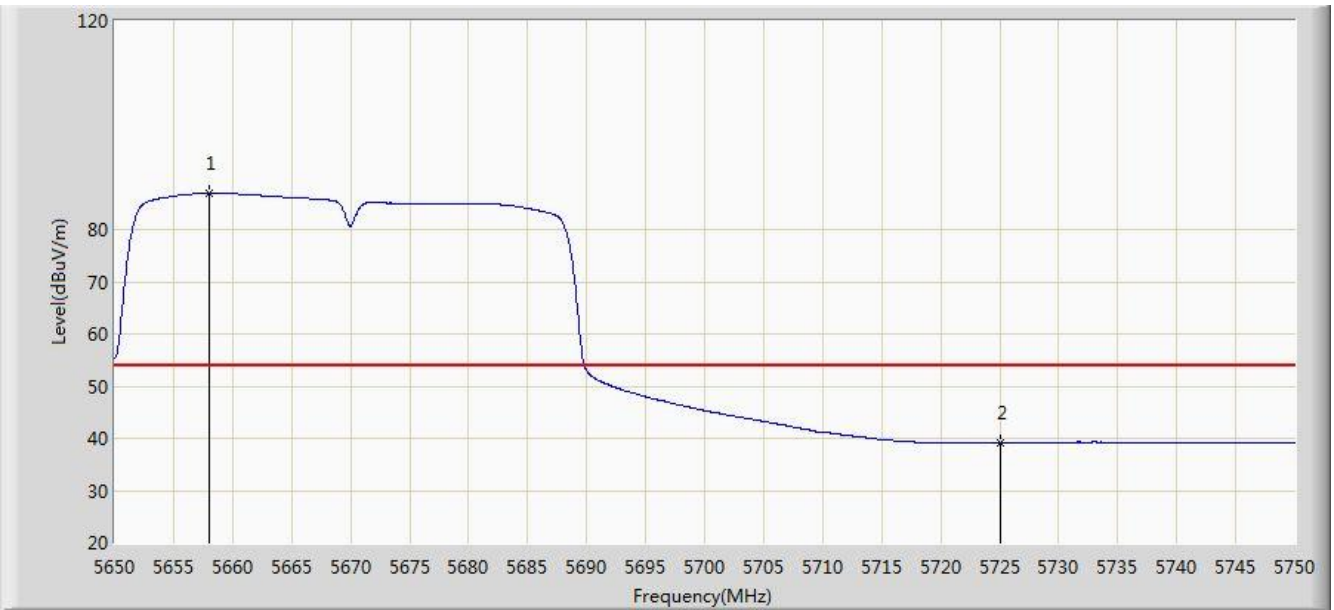


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5658.050	86.951	82.252	N/A	N/A	4.699	AV
2			5725.000	39.130	34.101	-14.870	54.000	5.029	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre-amplifier Factor (dB)

Site: AC1	Time: 2017/07/21 - 08:29
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 5670MHz Ant 1	

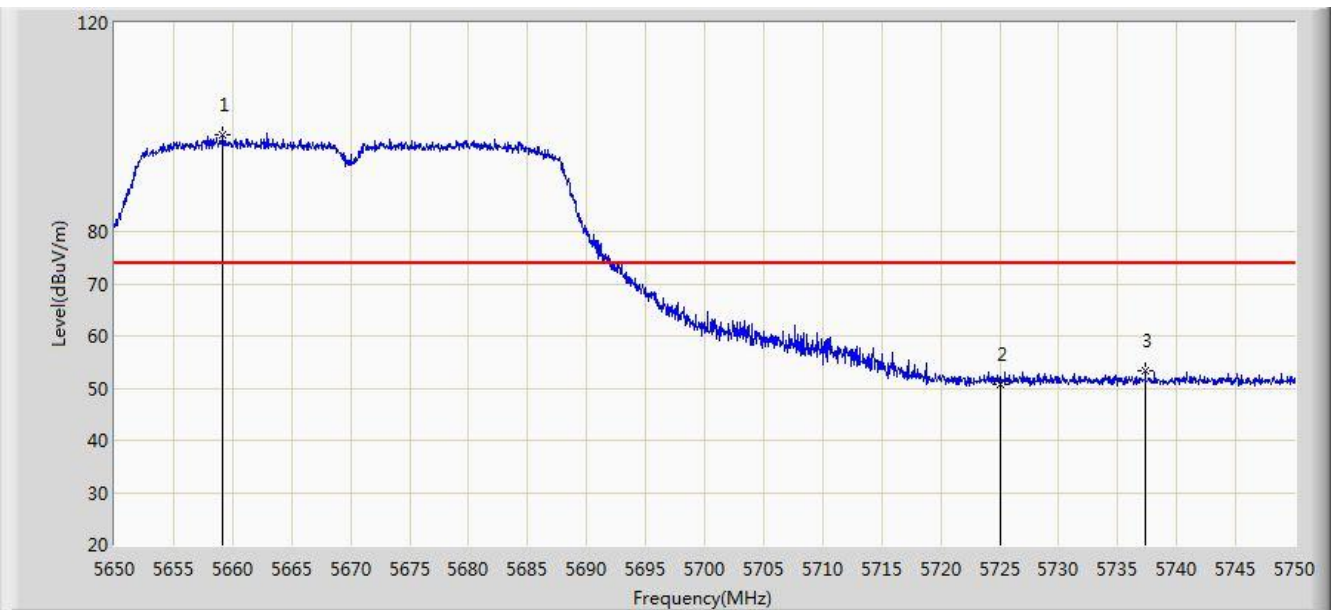


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5659.150	98.576	93.873	N/A	N/A	4.704	PK
2			5725.000	50.663	45.634	-23.337	74.000	5.029	PK
3			5737.350	53.259	48.151	-20.741	74.000	5.108	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre-amplifier Factor (dB)

Site: AC1	Time: 2017/07/21 - 08:29
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 5670MHz Ant 1	

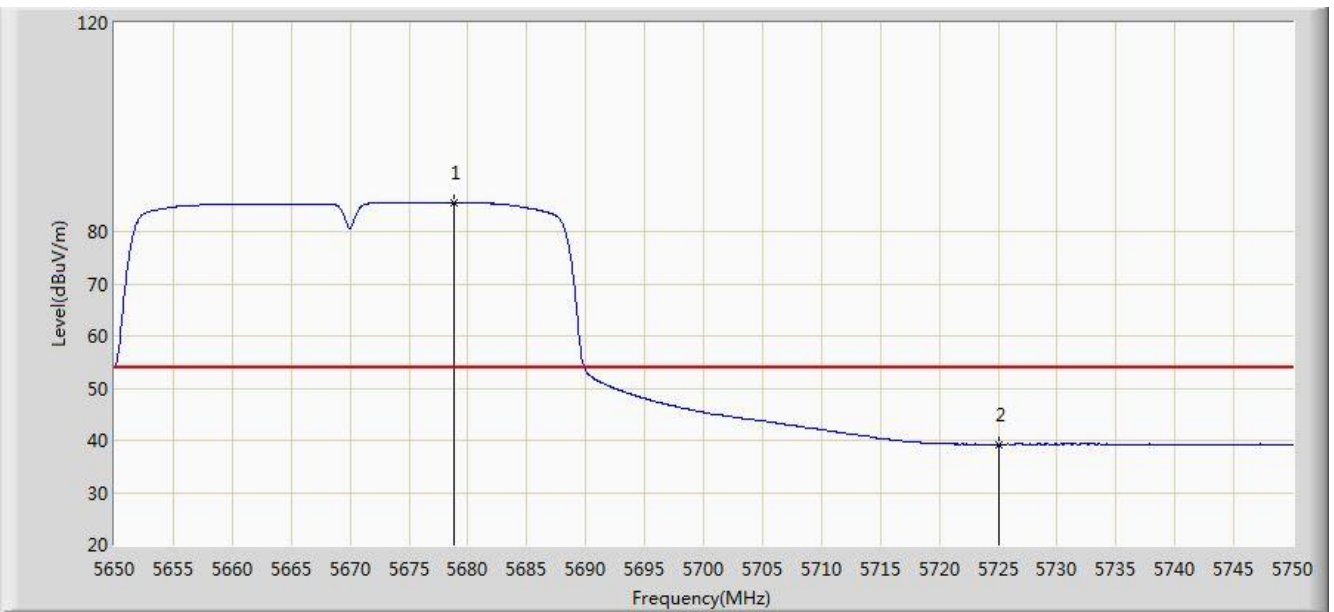


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5678.850	85.609	80.826	N/A	N/A	4.782	AV
2			5725.000	39.235	34.206	-14.765	54.000	5.029	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre-amplifier Factor (dB)

Site: AC1	Time: 2017/07/21 - 08:30
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 5755MHz Ant 1	

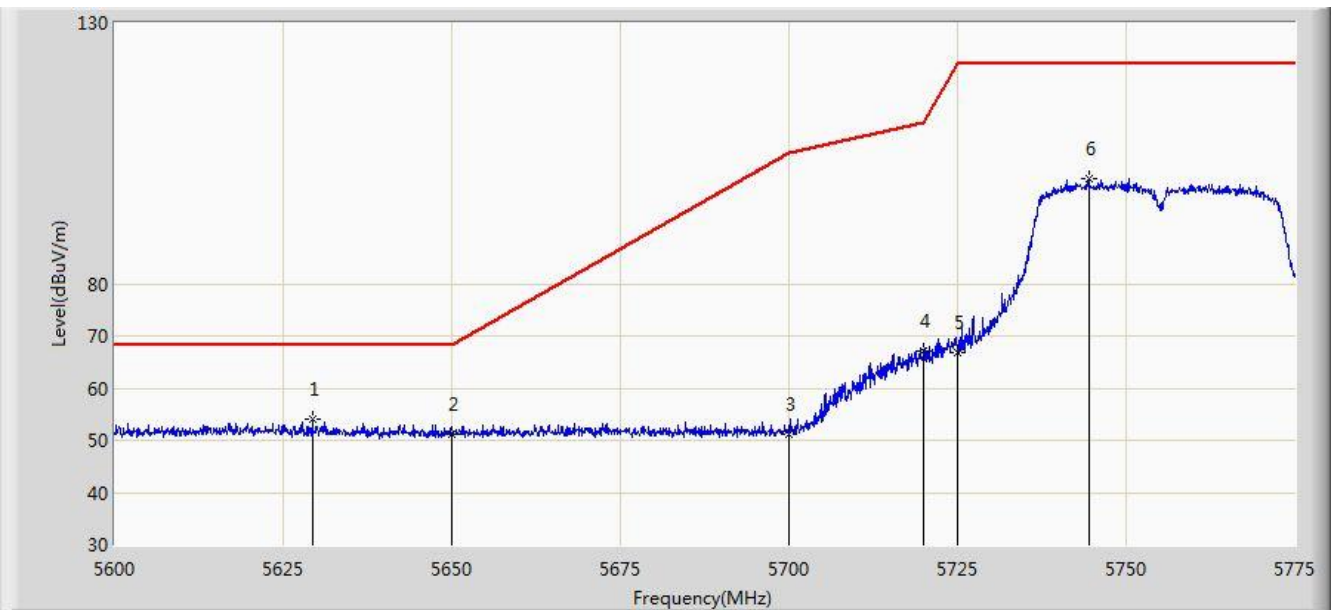


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5629.312	53.914	49.307	-14.286	68.200	4.607	PK
2			5650.000	51.213	46.542	-16.987	68.200	4.671	PK
3			5700.000	51.180	46.302	-54.020	105.200	4.878	PK
4			5720.000	66.965	61.968	-43.835	110.800	4.997	PK
5			5725.000	66.953	61.924	-55.247	122.200	5.029	PK
6			5744.462	100.224	95.072	N/A	N/A	5.152	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre-amplifier Factor (dB)

Site: AC1	Time: 2017/07/21 - 08:32
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 5755MHz Ant 1	

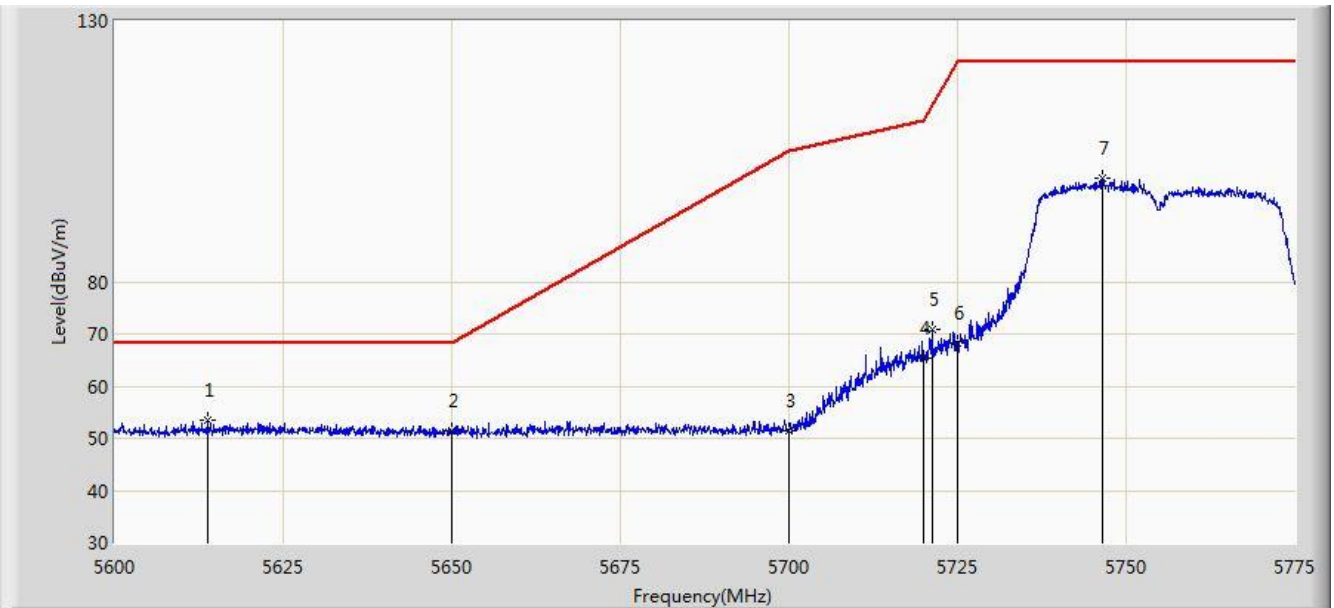


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5613.737	53.569	49.007	-14.631	68.200	4.563	PK
2			5650.000	51.364	46.693	-16.836	68.200	4.671	PK
3			5700.000	51.571	46.693	-53.629	105.200	4.878	PK
4			5720.000	65.450	60.453	-45.350	110.800	4.997	PK
5			5721.187	70.855	65.851	-42.652	113.507	5.005	PK
6			5725.000	68.261	63.232	-53.939	122.200	5.029	PK
7			5746.562	99.776	94.612	N/A	N/A	5.164	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre-amplifier Factor (dB)

Site: AC1	Time: 2017/07/21 - 08:33
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 5795MHz Ant 1	

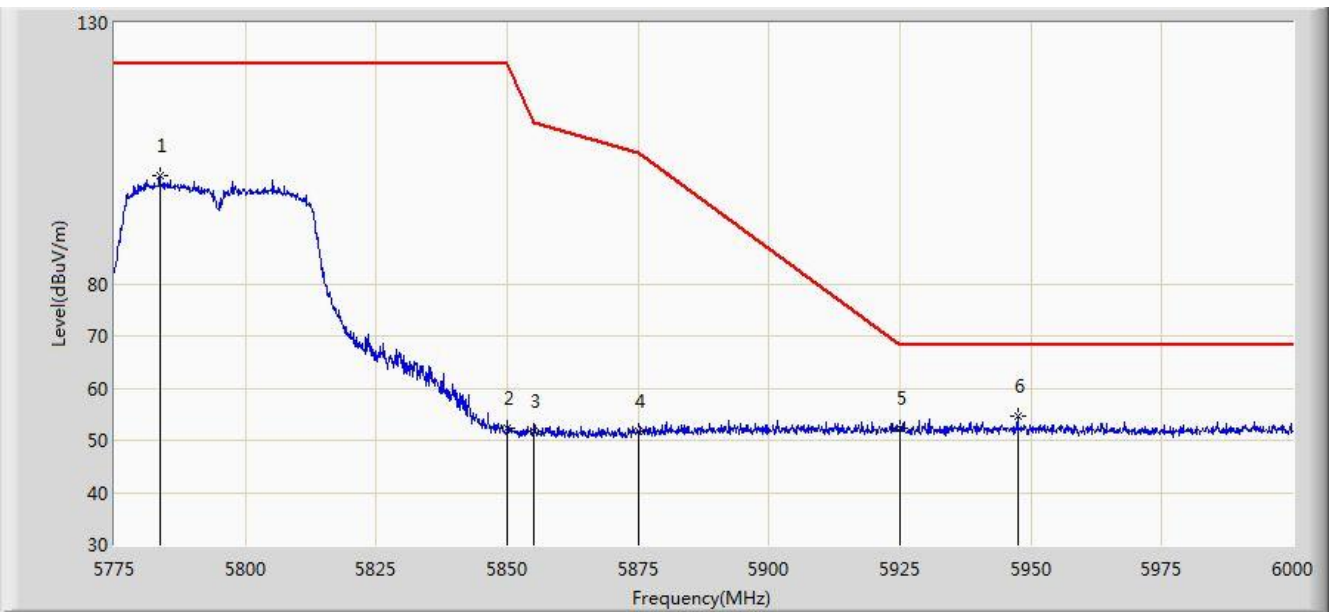


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5783.663	100.861	95.501	N/A	N/A	5.360	PK
2			5850.000	52.395	46.669	-69.805	122.200	5.726	PK
3			5855.000	51.762	46.016	-59.038	110.800	5.746	PK
4			5875.000	51.743	45.923	-53.457	105.200	5.820	PK
5			5925.000	52.250	46.284	-15.950	68.200	5.967	PK
6		*	5947.462	54.695	48.674	-13.505	68.200	6.021	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre-amplifier Factor (dB)

Site: AC1	Time: 2017/07/21 - 08:34
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Thermal Printer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 5795MHz Ant 1	

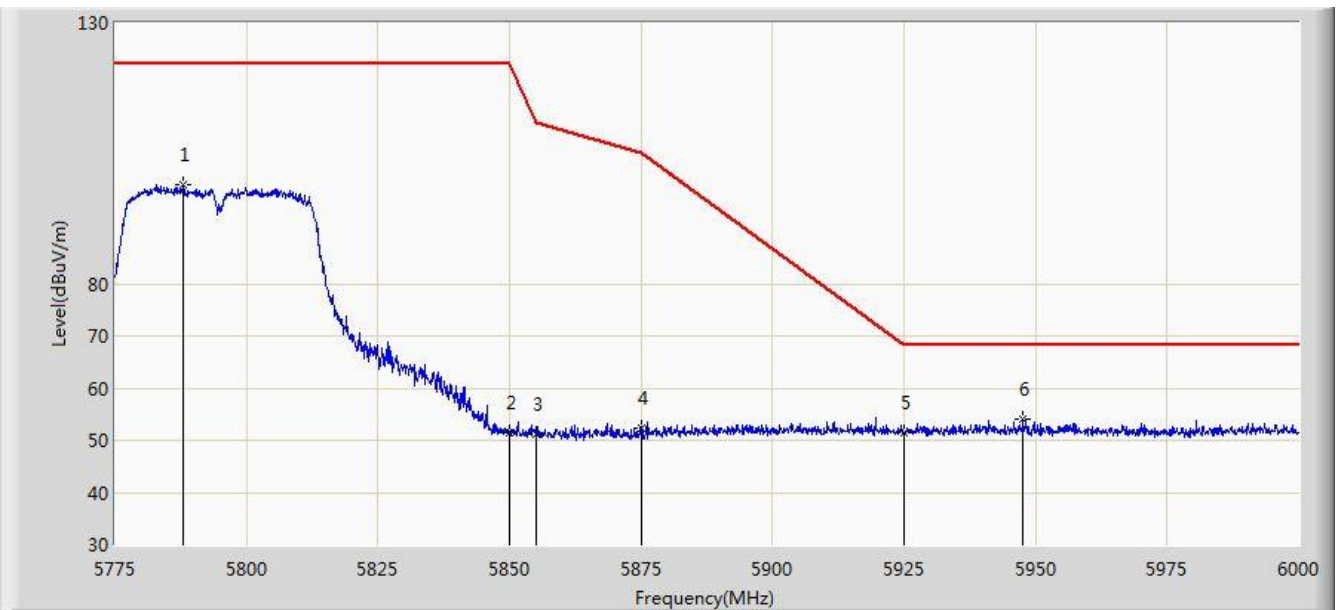

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5787.937	99.007	93.626	N/A	N/A	5.381	PK
2			5850.000	51.344	45.618	-70.856	122.200	5.726	PK
3			5855.000	51.058	45.312	-59.742	110.800	5.746	PK
4			5875.000	52.436	46.616	-52.764	105.200	5.820	PK
5			5925.000	51.497	45.531	-16.703	68.200	5.967	PK
6		*	5947.687	54.185	48.163	-14.015	68.200	6.021	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre-amplifier Factor (dB)

7. CONCLUSION

The data collected relate only the item(s) tested and show that the **SDIO Wireless Module FCC ID: N6C-SDMAN** is in compliance with Part 15E of the FCC Rules.

————— The End —————