

# RF TEST REPORT



**Report No.:** FCC\_RF\_SL15081301-SLX-017\_UNII  
**Supersede Report No.:** NONE

Applicant	:	Silex Technology, Inc.
Product Name	:	2x2 802.11abgn SDIO Module
Model No.	:	SX-SDMAN2
Test Standard	:	47 CFR 15.407
Test Method	:	ANSI C63.4: 2014 789033 D02 General UNII Test Procedures New Rules v01
FCC ID	:	N6C-SDMAN2
IC ID	:	4908A-SDMAN2
Dates of test	:	01/20/2017 – 01/23/2017
Issue Date	:	01/31/2017
Test Result	:	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail
Equipment complied with the specification <input checked="" type="checkbox"/>		
Equipment did not comply with the specification <input type="checkbox"/>		

This Test Report is Issued Under the Authority of:

<i>Gary Chou</i>	<i>Chen Ge</i>
<b>Gary Chou</b>	<b>Chen Ge</b>
<b>Test Engineer</b>	<b>Engineer Reviewer</b>
<p>This test report may be reproduced in full only            Test result presented in this test report is applicable to the tested sample only</p>	

**Issued By:**  
**SIEMIC Laboratories**  
 775 Montague Expressway, Milpitas, 95035 CA



775 Montague Expressway, Milpitas, CA 95035, USA • Phone: (+1) 408 526 1188 • Facsimile (+1) 408 526 1088

Visit us at: [www.siemic.com](http://www.siemic.com); Follow us at:    

## Laboratory Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

### Accreditations for Conformity Assessment

Country/Region	Accreditation Body	Scope
USA	FCC, A2LA	EMC, RF/Wireless, Telecom
Canada	IC, A2LA, NIST	EMC, RF/Wireless, Telecom
Taiwan	BSMI, NCC, NIST	EMC, RF, Telecom, Safety
Hong Kong	OFTA, NIST	RF/Wireless, Telecom
Australia	NATA, NIST	EMC, RF, Telecom, Safety
Korea	KCC/RRA, NIST	EMI, EMS, RF, Telecom, Safety
Japan	VCCI, JATE, TELEC, RFT	EMI, RF/Wireless, Telecom
Mexico	NOM, COFETEL, Caniety	Safety, EMC, RF/Wireless, Telecom
Europe	A2LA, NIST	EMC, RF, Telecom, Safety
Israel	MOC, NIST	EMC, RF, Telecom, Safety

### Accreditations for Product Certifications

Country	Accreditation Body	Scope
USA	FCC TCB, NIST	EMC, RF, Telecom
Canada	IC FCB, NIST	EMC, RF, Telecom
Singapore	iDA, NIST	EMC, RF, Telecom
EU	NB	EMC & R&TTE Directive
Japan	MIC (RCB 208)	RF, Telecom
Hong Kong	OFTA (US002)	RF, Telecom

**CONTENTS**

**1 REPORT REVISION HISTORY.....4**

**2 EXECUTIVE SUMMARY .....5**

**3 CUSTOMER INFORMATION .....5**

**4 TEST SITE INFORMATION.....5**

**5 MODIFICATION.....5**

**6 EUT INFORMATION.....6**

6.1 EUT Description .....6

6.2 Radio Description .....6

6.3 EUT Photos.....7

6.4 EUT Test Setup Photos.....8

**7 SUPPORTING EQUIPMENT/SOFTWARE AND CABLING DESCRIPTION .....9**

7.1 Supporting Equipment.....9

7.2 Cabling Description.....9

7.3 Test Software Description.....9

**8 TEST SUMMARY .....10**

**9 MEASUREMENT UNCERTAINTY .....11**

9.1 Conducted Emissions .....11

9.2 Radiated Emissions (30MHz to 1GHz) .....11

9.3 Radiated Emissions (1GHz to 40GHz).....12

9.4 RF conducted measurement.....12

**10 MEASUREMENTS, EXAMINATION AND DERIVED RESULTS.....13**

10.1 Radiated Emissions below 1GHz.....13

10.2 Radiated Spurious Emissions above 1GHz .....15

**ANNEX A. TEST INSTRUMENT .....25**

**ANNEX B. SIEMIC ACCREDITATION .....26**

## 1 Report Revision History

Report No.	Report Version	Description	Issue Date
FCC_RF_SL15081301-SLX-017_UNII	None	Original	01/31/2017

## 2 Executive Summary

The purpose of this test program was to demonstrate compliance of following product

Company: Silex Technology, Inc.  
Product: 2x2 802.11abgn SDIO Module  
Model: SX-SDMAN2

against the current Stipulated Standards. The specified model product stated above has demonstrated compliance with the Stipulated Standard listed on 1<sup>st</sup> page.

## 3 Customer information

Applicant Name	:	Silex Technology, Inc
Applicant Address	:	2-3-1 Hikaridai, Seika-cho, Kyoto, 619-0237 Japan
Manufacturer Name	:	Silex Technology, Inc
Manufacturer Address	:	2-3-1 Hikaridai, Seika-cho, Kyoto, 619-0237 Japan

## 4 Test site information

Lab performing tests	SIEMIC Laboratories
Lab Address	775 Montague Expressway, Milpitas, CA 95035
FCC Test Site No.	881796
IC Test Site No.	4842D-2
VCCI Test Site No.	A0133

## 5 Modification

Index	Item	Description	Note
-	-	-	-

## 6 EUT Information


### 6.1 EUT Description

Product Name	:	2x2 802.11abgn SDIO Module
Model No.	:	SX-SDMAN2
Trade Name	:	Silex
Serial No.	:	PW101980BA
Host Model No.	:	SD-320AN
Input Power	:	+3.3VDC
Power Adapter Manu/Model	:	Asian Power / WB-10E05R
Power Adapter SN	:	Y16200197310
Radio Hardware version	:	A
Radio Software version	:	3.5.99.21
Date of EUT received	:	01/23/2017
Equipment Class/ Category	:	DTS,UNII
Port/Connectors	:	U.FL

### 6.2 Radio Description


Radio Type	802.11b	802.11g	802.11a	802.11n-20M	802.11n-40M
Operating Frequency	2412-2462MHz	2412-2462MHz	5180-5240MHz 5260-5320MHz 5500-5700MHz 5745-5825MHz	2412-2462MHz 5180-5240MHz 5240-5320MHz 5500-5700MHz 5745-5825MHz	5190-5230MHz 5270-5310MHz 5510-5670MHz 5755-5795MHz
Modulation	DSSS (CCK, DQPSK, DBPSK)	OFDM-CCK (BPSK, QPSK, 16QAM, 64QAM)	OFDM (BPSK, QPSK, 16QAM, 64QAM)	OFDM (BPSK, QPSK, 16QAM, 64QAM)	OFDM (BPSK, QPSK, 16QAM, 64QAM)
Channel Spacing	5MHz	5MHz	20MHz	5MHz(2.4GHz), 20MHz (5GHz)	40MHz
Number of Channels	11	11	22	11(2.4GHz) 22 (5GHz)	10(5GHz)
Antenna Type	PIFA				
Antenna Gain (Peak)	2.4GHz : 2.5dBi, 5GHz : 3.5dBi				
Antenna Connector Type	U.FL				

**6.3 EUT Photos**

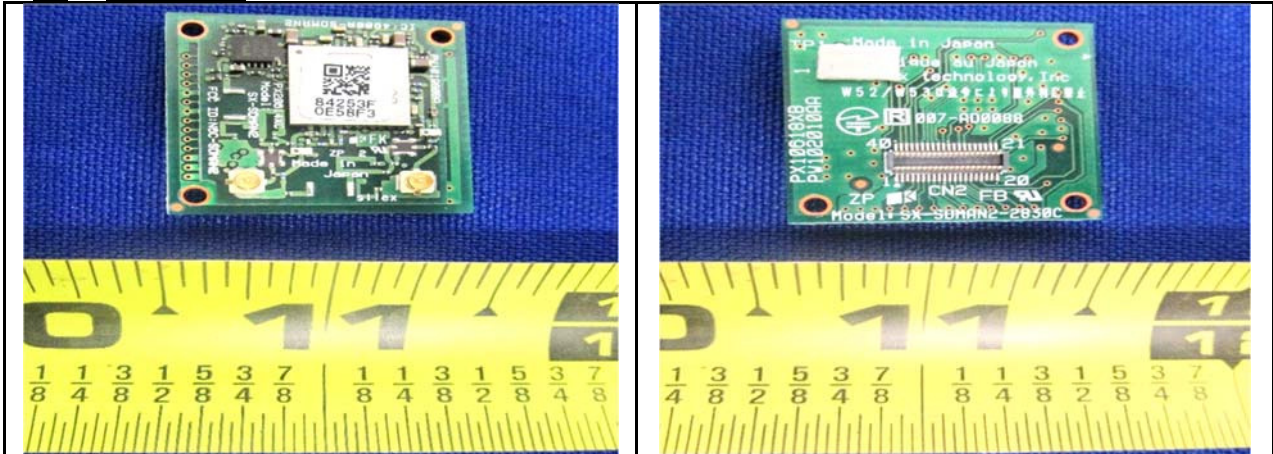

**Radio Module – Top view**

**Radio Module – Bottom view**

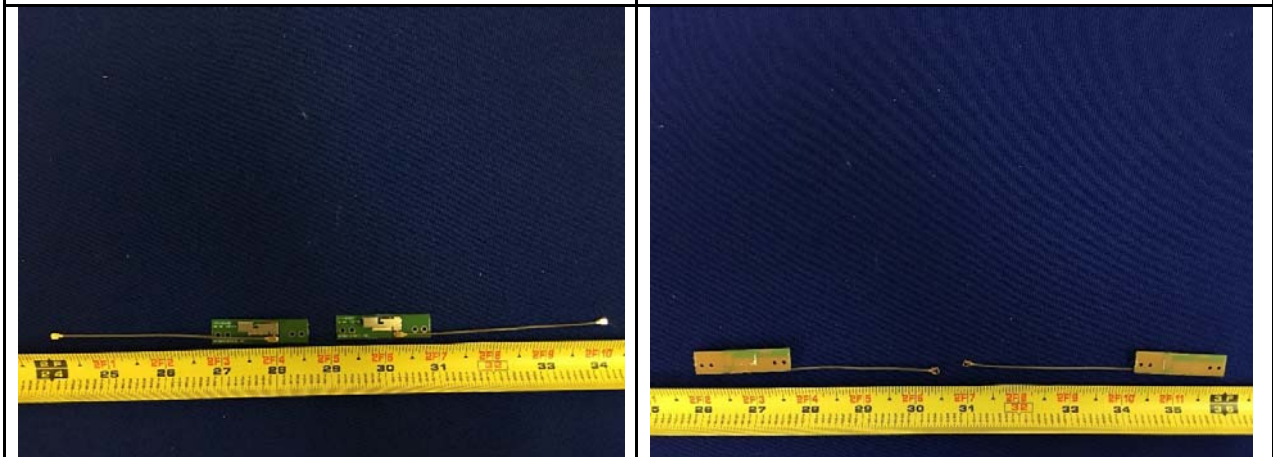

**Antenna Top View**


**Antenna Bottom View**




**6.4 EUT Test Setup Photos**




**Radiated Emissions (<1GHz) – Front View**

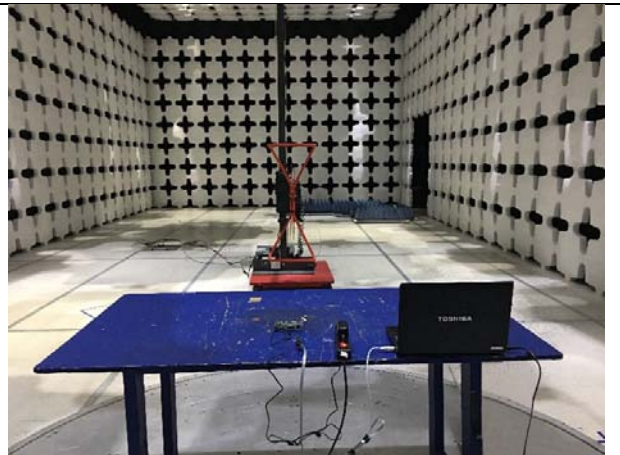

**Radiated Emissions (<1GHz) – Rear View**

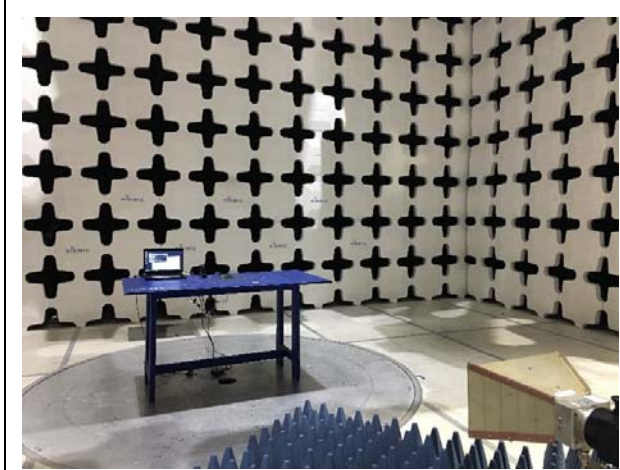

**Radiated Emissions (>1GHz) – Front View**

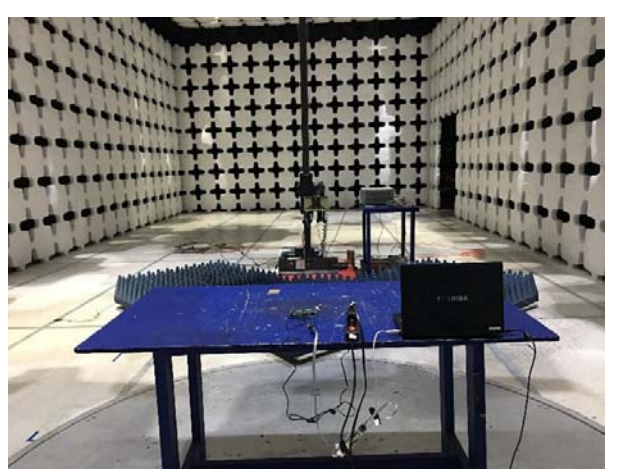

**Radiated Emissions (>1GHz) – Rear View**



## 7 Supporting Equipment/Software and cabling Description

### 7.1 Supporting Equipment

Item	Supporting Equipment Description	Model	Serial Number	Manufacturer	Note
1	Laptop	Portege	1C094689H	Toshiba	-
2	Fixture	SD-320AN	002664192	SILEX	-

### 7.2 Cabling Description

Name	Connection Start		Connection Stop		Length / shielding Info		Note
	From	I/O Port	To	I/O Port	Length (m)	Shielding	
Serial	EUT	USB	Laptop	USB	1	Unshielded	-

### 7.3 Test Software Description

Test Item	Software	Description
RF Testing	Athtestcmd	Set the EUT to transmit continuously in different test modes and channels

## 8 Test Summary

Test Item	Test standard		Test Method/Procedure	Pass / Fail
Restricted Band of Operation	FCC	15.205	ANSI C63.4 – 2014 789033 D02 General UNII Test Procedures New Rules v01	<input type="checkbox"/> Pass <input checked="" type="checkbox"/> N/A
AC Conducted Emissions Voltage	FCC	15.207(a)	ANSI C63.4 – 2014	<input type="checkbox"/> Pass <input checked="" type="checkbox"/> N/A

Test Item	Test standard		Test Method/Procedure	Pass / Fail
26 & 6 dB Emission Bandwidth	FCC	15.407 (a) (2)	789033 D02 General UNII Test Procedures New Rules v01	<input type="checkbox"/> Pass <input checked="" type="checkbox"/> N/A
Maximum conducted Output Power	FCC	15.407 (a) (2)	789033 D02 General UNII Test Procedures New Rules v01	<input type="checkbox"/> Pass <input checked="" type="checkbox"/> N/A
Power reduction (Antenna Gain > 6 dBi)	FCC	15.407 (a) (2)	-	<input type="checkbox"/> Pass <input checked="" type="checkbox"/> N/A
Band Edge and Radiated Spurious Emissions	FCC	15.407(b)(2), 15.407(b)(6)	ANSI C63.4 – 2014 789033 D02 General UNII Test Procedures New Rules v01	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> N/A
Power Spectral Density	FCC	15.407 (a) (2)	789033 D02 General UNII Test Procedures New Rules v01	<input type="checkbox"/> Pass <input checked="" type="checkbox"/> N/A
Frequency Stability	FCC	15.407 (g)	-	<input type="checkbox"/> Pass <input checked="" type="checkbox"/> N/A
Transmit Power Control (TPC)	FCC	15.407 (h)(1)	-	<input type="checkbox"/> Pass <input checked="" type="checkbox"/> N/A
User Manual	FCC	-	-	<input type="checkbox"/> Pass <input checked="" type="checkbox"/> N/A

Remark	<ol style="list-style-type: none"> <li>All measurement uncertainties are not taken into consideration for all presented test result.</li> <li>The applicant shall ensure frequency stability by showing that an emission is maintained within the band of operation under all normal operating conditions as specified in the user's manual.</li> <li>The device is operating at near 98% duty cycle.</li> </ol>
Note	Only Radiated Spurious Emission was tested for SX-SDMAN2 with PIFA antenna. Please refer to report with FCC ID: N6C-SDMAN2.

## 9 Measurement Uncertainty

### 9.1 Conducted Emissions

The test is to measure the conducted emissions to the mains port of the EUT.

Some error sources that can contribute to the total uncertainty:

- Uncertainty of the receiver
- Uncertainty of the LISN
- Uncertainty of cables
- Uncertainty due to the mismatches
- Etc, see the below table for details

Source of Uncertainty	Value (dB)	Probability Distribution	Division	Sensitivity Coefficient	Expanded Uncertainty
Receiver Reading	0.12	Rectangular	1.732	1	0.069284
Cable Insertion Loss	0.21	Normal	2	1	0.105
Filter Insertion Loss	0.25	Normal	2	1	0.125
LISN Insertion Loss	0.40	Normal	2	1	0.20
Receiver CW accuracy	0.5	Rectangular	1.732	1	0.2886836
Pulse Amplitude Response	1.5	Rectangular	1.732	1	0.86605081
PRF Response	1.5	Rectangular	1.732	1	0.86605081
Mismatch LISN - Receiver	0.25	U-Shape	1.414	1	0.1768033
LISN Impedance	2.5	Triangular	2.449	1	1.0208248
Combined Standard Uncertainty					1.928133
<b>Expanded Uncertainty (K=2)</b>					<b>3.856266</b>

The total derived measurement uncertainty is +/- 3.86 dB.

### 9.2 Radiated Emissions (30MHz to 1GHz)

The test is to measure the radiated emissions of the EUT.

Some error sources that can contribute to the total uncertainty:

- Uncertainty of the receiver
- Uncertainty of the antenna
- Uncertainty of cables
- Uncertainty due to the mismatches
- NSA Calibration
- Etc., details see the below table

Source of Uncertainty	Value (dB)	Probability Distribution	Division	Sensitivity Coefficient	Expanded Uncertainty
Receiver Reading	0.12	Rectangular	1.732	1	0.069284
Cable Insertion Loss	0.21	Normal	2	1	0.105
Filter Insertion Loss	0.25	Normal	2	1	0.125
Antenna Factor	0.65	Normal	2	1	0.325
Receiver CW accuracy	0.5	Rectangular	1.732	1	0.2886836
Pulse Amplitude Response	1.5	Rectangular	1.732	1	0.86605081
PRF Response	1.5	Rectangular	1.732	1	0.86605081
Mismatch Filter - Receiver	0.25	U-Shape	1.414	1	0.1768033
NSA Calibration	4.0	U-Shape	1.414	1	2.8288543
Combined Standard Uncertainty					3.0059131
<b>Expanded Uncertainty (K=2)</b>					<b>6.0118262</b>

The total derived measurement uncertainty is +/- 6.00 dB.

### 9.3 Radiated Emissions (1GHz to 40GHz)

The test is to measure the radiated emissions of the EUT.

Some error sources that can contribute to the total uncertainty:

- Uncertainty of the receiver
- Uncertainty of the antenna
- Uncertainty of cables
- Uncertainty due to the mismatches
- VSWR Calibration
- Etc., details see the below table

Source of Uncertainty	Value (dB)	Probability Distribution	Division	Sensitivity Coefficient	Expanded Uncertainty
Receiver Reading	0.12	Rectangular	1.732	1	0.0692840
Cable Insertion Loss	0.21	Normal	2	1	0.1050000
Filter Insertion Loss	0.25	Normal	2	1	0.1250000
Antenna Factor	0.65	Normal	2	1	0.3250000
Receiver CW accuracy	0.5	Rectangular	1.732	1	0.2886836
Pulse Amplitude Response	1.5	Rectangular	1.732	1	0.8660508
PRF Response	1.5	Rectangular	1.732	1	0.8660508
Mismatch Filter - Receiver	0.25	U-Shape	1.414	1	0.1768033
VSWR Calibration	2.0	U-Shape	1.414	1	1.4144272
Combined Standard Uncertainty					4.2363
<b>Expanded Uncertainty (K=2)</b>					<b>8.4726</b>

The total derived measurement uncertainty is +/- 8.47 dB.

### 9.4 RF conducted measurement

The test is to measure the RF output power from the EUT.

Some error sources that can contribute to the total uncertainty:

- Uncertainty of the Reference Level Uncertainty
- Uncertainty of variable attenuators
- Uncertainty of cables
- Uncertainty due to the mismatches

Source of Uncertainty	Value (dB)	Probability Distribution	Division	Sensitivity Coefficient	Expanded Uncertainty
Reference Level	0.12	Rectangular	1.732	1	0.069284
Cable Insertion Loss	0.21	Normal	2	1	0.105
Attenuator	0.25	Normal	2	1	0.125
Mismatch	0.25	U-Shape	1.414	1	0.1768033
Combined Standard Uncertainty					0.476087
<b>Expanded Uncertainty (K=2)</b>					<b>0.952174</b>

The total derived measurement uncertainty is +/- 0.95 dB.

## 10 Measurements, Examination and Derived Results

### 10.1 Radiated Emissions below 1GHz

Requirement(s):

Spec	Requirement	Applicable										
47CFR§15.407(b) 15.209 (a)	<p>Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges</p> <table border="1"> <thead> <tr> <th>Frequency range (MHz)</th> <th>Field Strength (uV/m)</th> </tr> </thead> <tbody> <tr> <td>30 – 88</td> <td>100</td> </tr> <tr> <td>88 – 216</td> <td>150</td> </tr> <tr> <td>216 960</td> <td>200</td> </tr> <tr> <td>Above 960</td> <td>500</td> </tr> </tbody> </table>	Frequency range (MHz)	Field Strength (uV/m)	30 – 88	100	88 – 216	150	216 960	200	Above 960	500	☒
Frequency range (MHz)	Field Strength (uV/m)											
30 – 88	100											
88 – 216	150											
216 960	200											
Above 960	500											
Test Setup												
Procedure	<ol style="list-style-type: none"> <li>The EUT was switched on and allowed to warm up to its normal operating condition.</li> <li>The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:               <ol style="list-style-type: none"> <li>Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen.</li> <li>The EUT was then rotated to the direction that gave the maximum emission.</li> <li>Finally, the antenna height was adjusted to the height that gave the maximum emission.</li> </ol> </li> <li>A Quasi-peak measurement was then made for that frequency point.</li> <li>Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.</li> </ol>											
Remark	The EUT was scanned up to 1GHz. Both horizontal and vertical polarities were investigated. The results show only the worst case.											
Result	☒ Pass      ☐ Fail											

Test Data    ☒ Yes (See below)      ☐ N/A


Test Plot    ☒ Yes (See below)      ☐ N/A

Test was done by Gary Chou at 10m chamber.



### Radiated Emission Test Results (Below 1GHz)

Test specification	below 1GHz		Result	Pass
Environmental Conditions:	Temp (°C):	26.1		
	Humidity (%)	47.5		
	Atmospheric (mbar):	1020		
Mains Power:	120VAC, 60Hz			
Tested by:	Gary Chou			
Test Date:	01/20/2017			
Remarks:	5GHz TX Mode 11 A- 5320MHz			

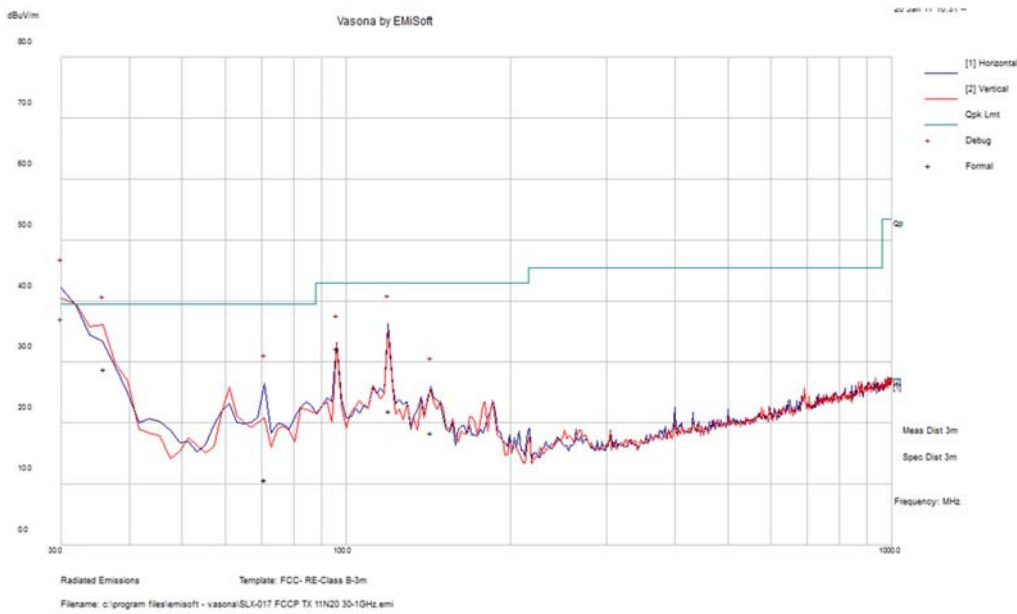

### Quasi Max Measurement

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
30.00	49.82	0.99	-13.67	37.14	Quasi Max	H	345	166	39.50	-2.36	Pass
36.05	46.40	1.10	-18.68	28.82	Quasi Max	V	367	44	39.50	-10.68	Pass
119.61	42.64	1.80	-22.46	21.99	Quasi Max	H	268	148	43.00	-21.01	Pass
95.97	57.59	1.62	-26.94	32.27	Quasi Max	H	173	264	43.00	-10.73	Pass
70.81	37.12	1.48	-27.99	10.62	Quasi Max	H	400	356	39.50	-28.88	Pass
142.96	39.69	1.92	-23.29	18.32	Quasi Max	H	145	213	43.00	-24.68	Pass


Note: Both horizontal and vertical polarities were investigated. The results above show only the worst case.

## 10.2 Radiated Spurious Emissions above 1GHz

### Requirement(s):

Spec	Item	Requirement	Applicable
47CFR§15.407(b)(2), 15.407(b)(6)	(1)	For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.	<input checked="" type="checkbox"/>
	(2)	For transmitters operating in the 5.25-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5.25-5.35 GHz band that generate emissions in the 5.15-5.25 GHz band must meet all applicable technical requirements for operation in the 5.15-5.25 GHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5.15-5.25 GHz band.	<input checked="" type="checkbox"/>
	(3)	For transmitters operating in the 5.47-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz.	<input checked="" type="checkbox"/>
	(4)	For transmitters operating in the 5.725-5.825 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an EIRP of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an EIRP of -27 dBm/MHz.	<input checked="" type="checkbox"/>
	(5)	Restricted band, emission must also comply with the radiated emission limits specified in 15.209	<input type="checkbox"/>

### Test Setup

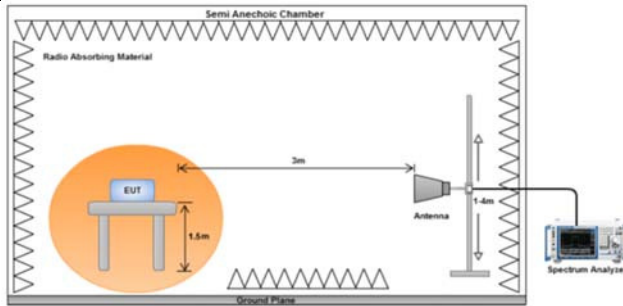

### Procedure

- The EUT was switched on and allowed to warm up to its normal operating condition.
- The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:
  - Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen.
  - The EUT was then rotated to the direction that gave the maximum emission.
  - Finally, the antenna height was adjusted to the height that gave the maximum emission.
- An average measurement was then made for that frequency point.
- Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.

### Remark

Both horizontal and vertical polarities were investigated. The results show only the worst case.

### Result

Pass       Fail

**Test Data**     Yes (See below)       N/A

**Test Plot**     Yes (See below)       N/A

**Test was done by Gary Chou at 10m chamber.**

## Radiated Spurious Emission Test Results (Above 1GHz)

### Above 1GHz – 802.11a – 5180MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
1877.97	46.18	3.14	-12.44	36.88	Peak Max	V	195	309	74	-37.12	Pass
3549.68	43.88	4.31	-7.2	40.99	Peak Max	V	109	3	74	-33.01	Pass
10359.46	40.47	7.24	0.17	47.88	Peak Max	V	181	13	74	-26.12	Pass
1877.97	34.08	3.14	-12.44	24.78	Average Max	V	195	309	54	-29.22	Pass
3549.68	31.82	4.31	-7.2	28.93	Average Max	V	109	3	54	-25.07	Pass
10359.46	28.76	7.24	0.17	36.17	Average Max	V	181	13	54	-17.83	Pass

### Above 1GHz – 802.11a – 5200MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
1873.06	46.48	3.14	-12.47	37.15	Peak Max	V	122	109	74	-36.85	Pass
3551.56	44.18	4.31	-7.2	41.29	Peak Max	V	196	55	74	-32.71	Pass
10400.74	40.77	7.24	0.14	48.15	Peak Max	V	133	243	74	-25.85	Pass
1873.06	34.38	3.14	-12.47	25.05	Average Max	V	122	109	54	-28.95	Pass
3551.56	32.12	4.31	-7.2	29.23	Average Max	V	196	55	54	-24.77	Pass
10400.74	29.06	7.24	0.14	36.44	Average Max	V	133	243	54	-17.56	Pass

### Above 1GHz – 802.11a – 5240MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
1873.74	46.48	3.14	-12.46	37.16	Peak Max	V	129	327	74	-36.84	Pass
3551.99	44.18	4.31	-7.19	41.3	Peak Max	V	179	245	74	-32.7	Pass
10481.32	40.77	7.23	0.33	48.33	Peak Max	V	199	75	74	-25.67	Pass
1873.74	34.38	3.14	-12.46	25.06	Average Max	V	129	327	54	-28.94	Pass
3551.99	32.12	4.31	-7.19	29.24	Average Max	V	179	245	54	-24.76	Pass
10481.32	29.06	7.23	0.33	36.62	Average Max	V	199	75	54	-17.38	Pass

### Above 1GHz – 802.11a – 5260MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
1874.03	46.48	3.14	-12.46	37.16	Peak Max	V	188	98	74	-36.84	Pass
3552.69	44.18	4.31	-7.19	41.3	Peak Max	V	176	69	74	-32.7	Pass
10521.06	40.77	7.27	0.34	48.38	Peak Max	V	106	310	74	-25.62	Pass
1874.03	34.38	3.14	-12.46	25.06	Average Max	V	188	98	54	-28.94	Pass
3552.69	32.12	4.31	-7.19	29.24	Average Max	V	176	69	54	-24.76	Pass
10521.06	29.06	7.27	0.34	36.67	Average Max	V	106	310	54	-17.33	Pass

**Above 1GHz – 802.11a – 5280MHz**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
1885.09	46.36	3.15	-12.39	37.12	Peak Max	V	160	208	74	-36.88	Pass
3551.34	44.6	4.31	-7.2	41.71	Peak Max	V	147	320	74	-32.29	Pass
10559.24	40.11	7.33	0.27	47.71	Peak Max	V	109	271	74	-26.29	Pass
1885.09	33.8	3.15	-12.39	24.56	Average Max	V	160	208	54	-29.44	Pass
3551.34	31.67	4.31	-7.2	28.78	Average Max	V	147	320	54	-25.22	Pass
10559.24	28.76	7.33	0.27	36.36	Average Max	V	109	271	54	-17.64	Pass

**Above 1GHz – 802.11a – 5320MHz**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
1882.58	46.03	3.15	-12.4	36.78	Peak Max	V	113	79	74	-37.22	Pass
3551.60	44.22	4.31	-7.2	41.33	Peak Max	V	175	196	74	-32.67	Pass
10640.91	41.16	7.46	0.36	48.98	Peak Max	V	159	273	74	-25.02	Pass
1882.58	33.71	3.15	-12.4	24.46	Average Max	V	113	79	54	-29.54	Pass
3551.60	32.06	4.31	-7.2	29.17	Average Max	V	175	196	54	-24.83	Pass
10640.91	29.33	7.46	0.36	37.15	Average Max	V	159	273	54	-16.85	Pass

**Above 1GHz – 802.11a – 5500MHz**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
1885.28	45.9	3.15	-12.38	36.67	Peak Max	V	164	39	74	-37.33	Pass
3550.29	43.89	4.31	-7.2	41	Peak Max	V	177	233	74	-33	Pass
11001.10	40.87	8.02	1.5	50.39	Peak Max	V	182	51	74	-23.61	Pass
1885.28	33.77	3.15	-12.38	24.54	Average Max	V	164	39	54	-29.46	Pass
3550.29	32.05	4.31	-7.2	29.16	Average Max	V	177	233	54	-24.84	Pass
11001.10	28.23	8.02	1.5	37.75	Average Max	V	182	51	54	-16.25	Pass

**Above 1GHz – 802.11a – 5580MHz**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
1885.25	45.29	3.15	-12.38	36.06	Peak Max	V	164	338	74	-37.94	Pass
3550.57	43.65	4.31	-7.2	40.76	Peak Max	V	180	72	74	-33.24	Pass
11161.20	40.14	7.88	2.1	50.12	Peak Max	V	120	72	74	-23.88	Pass
1885.25	33.78	3.15	-12.38	24.55	Average Max	V	164	338	54	-29.45	Pass
3550.57	31.84	4.31	-7.2	28.95	Average Max	V	180	72	54	-25.05	Pass
11161.20	28.59	7.88	2.1	38.57	Average Max	V	120	72	54	-15.43	Pass

**Above 1GHz – 802.11a – 5700MHz**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
1884.03	45.75	3.15	-12.39	36.51	Peak Max	V	194	283	74	-37.49	Pass
3552.64	43.56	4.31	-7.19	40.68	Peak Max	V	190	42	74	-33.32	Pass
11400.53	40.87	7.68	2.36	50.91	Peak Max	V	107	19	74	-23.09	Pass
1884.03	33.82	3.15	-12.39	24.58	Average Max	V	194	283	54	-29.42	Pass
3552.64	32.14	4.31	-7.19	29.26	Average Max	V	190	42	54	-24.74	Pass
11400.53	29.33	7.68	2.36	39.37	Average Max	V	107	19	54	-14.63	Pass

**Above 1GHz – 802.11a – 5745MHz**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
1869.92	45.47	3.13	-12.49	36.11	Peak Max	V	137	132	74	-37.89	Pass
3552.99	43.97	4.31	-7.19	41.09	Peak Max	V	126	326	74	-32.91	Pass
11488.61	41.54	7.61	1.86	51.01	Peak Max	V	171	290	74	-22.99	Pass
1869.92	33.48	3.13	-12.49	24.12	Average Max	V	137	132	54	-29.88	Pass
3552.99	31.92	4.31	-7.19	29.04	Average Max	V	126	326	54	-24.96	Pass
11488.61	29.16	7.61	1.86	38.63	Average Max	V	171	290	54	-15.37	Pass

**Above 1GHz – 802.11a – 5785MHz**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
1917.55	43.47	3.13	-12.49	34.11	Peak Max	V	192	50	74	-39.89	Pass
3550.51	43.5	4.31	-7.2	40.61	Peak Max	V	145	187	74	-33.39	Pass
11571.65	40.36	7.56	1.98	49.9	Peak Max	V	182	276	74	-24.1	Pass
1917.55	33.42	3.18	-12.19	24.41	Average Max	V	192	50	54	-29.59	Pass
3550.51	31.76	4.31	-7.2	28.87	Average Max	V	145	187	54	-25.13	Pass
11571.65	28.74	7.56	1.98	38.28	Average Max	V	182	276	54	-15.72	Pass

**Above 1GHz – 802.11a – 5825MHz**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
1915.66	45.39	3.18	-12.2	36.37	Peak Max	V	175	356	74	-37.63	Pass
3551.22	44.38	4.31	-7.2	41.49	Peak Max	V	198	296	74	-32.51	Pass
11650.66	39.52	7.52	1.88	48.92	Peak Max	V	110	126	74	-25.08	Pass
1915.66	33.47	3.18	-12.2	24.45	Average Max	V	175	356	54	-29.55	Pass
3551.22	32.22	4.31	-7.2	29.33	Average Max	V	198	296	54	-24.67	Pass
11650.66	28.09	7.52	1.88	37.49	Average Max	V	110	126	54	-16.51	Pass



**Above 1GHz – 802.11n 20– 5180MHz**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
1918.23	44.46	3.18	-12.19	35.45	Peak Max	V	115	213	74	-38.55	Pass
3533.48	44.06	4.3	-7.25	41.11	Peak Max	V	172	271	74	-32.89	Pass
10358.98	40.29	7.24	0.17	47.7	Peak Max	V	150	336	74	-26.3	Pass
1918.23	33.3	3.18	-12.19	24.29	Average Max	V	115	213	54	-29.71	Pass
3533.48	32.18	4.3	-7.25	29.23	Average Max	V	172	271	54	-24.77	Pass
10358.98	28.53	7.24	0.17	35.94	Average Max	V	150	336	54	-18.06	Pass

**Above 1GHz – 802.11n – 5200MHz**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
1896.99	45.74	3.16	-12.3	36.6	Peak Max	V	181	163	74	-37.4	Pass
3534.13	43.38	4.3	-7.25	40.43	Peak Max	V	101	94	74	-33.57	Pass
10401.83	39.94	7.24	0.14	47.32	Peak Max	V	143	351	74	-26.68	Pass
1896.99	33.94	3.16	-12.3	24.8	Average Max	V	181	163	54	-29.2	Pass
3534.13	31.83	4.3	-7.25	28.88	Average Max	V	101	94	54	-25.12	Pass
10401.83	28.77	7.24	0.14	36.15	Average Max	V	143	351	54	-17.85	Pass

**Above 1GHz – 802.11n 20– 5240MHz**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
1896.32	45.13	3.16	-12.31	35.98	Peak Max	V	100	284	74	-38.02	Pass
3542.87	43.98	4.31	-7.22	41.07	Peak Max	V	100	244	74	-32.93	Pass
10479.21	40.3	7.23	0.33	47.86	Peak Max	V	116	217	74	-26.14	Pass
1896.32	33.86	3.16	-12.31	24.71	Average Max	V	100	284	54	-29.29	Pass
3542.87	32.1	4.31	-7.22	29.19	Average Max	V	100	244	54	-24.81	Pass
10479.21	28.52	7.23	0.33	36.08	Average Max	V	116	217	54	-17.92	Pass

**Above 1GHz – 802.11n – 5260MHz**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
1894.81	45.62	3.16	-12.32	36.46	Peak Max	V	159	21	74	-37.54	Pass
3542.77	43.87	4.31	-7.22	40.96	Peak Max	V	192	30	74	-33.04	Pass
10519.86	40.34	7.27	0.34	47.95	Peak Max	V	121	33	74	-26.05	Pass
1894.81	33.97	3.16	-12.32	24.81	Average Max	V	159	21	54	-29.19	Pass
3542.77	32.36	4.31	-7.22	29.45	Average Max	V	192	30	54	-24.55	Pass
10519.86	28.71	7.27	0.34	36.32	Average Max	V	121	33	54	-17.68	Pass

**Above 1GHz – 802.11n – 5280MHz**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
1897.33	46.08	3.16	-12.3	36.94	Peak Max	V	146	272	74	-37.06	Pass
3541.70	44.67	4.3	-7.23	41.74	Peak Max	V	120	202	74	-32.26	Pass
10561.35	40.32	7.33	0.26	47.91	Peak Max	V	190	226	74	-26.09	Pass
1897.33	33.88	3.16	-12.3	24.74	Average Max	V	146	272	54	-29.26	Pass
3541.70	31.87	4.3	-7.23	28.94	Average Max	V	120	202	54	-25.06	Pass
10561.35	29.08	7.33	0.26	36.67	Average Max	V	190	226	54	-17.33	Pass

**Above 1GHz – 802.11n – 5320MHz**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
1894.44	45.96	3.16	-12.32	36.8	Peak Max	V	120	275	74	-37.2	Pass
3572.60	43.61	4.33	-7.13	40.81	Peak Max	V	108	350	74	-33.19	Pass
10639.29	40.93	7.46	0.35	48.74	Peak Max	V	164	19	74	-25.26	Pass
1894.44	33.99	3.16	-12.32	24.83	Average Max	V	120	275	54	-29.17	Pass
3572.60	31.55	4.33	-7.13	28.75	Average Max	V	108	350	54	-25.25	Pass
10639.29	29.33	7.46	0.35	37.14	Average Max	V	164	19	54	-16.86	Pass

**Above 1GHz – 802.11n – 5500MHz**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
1896.39	45.31	3.16	-12.31	36.16	Peak Max	V	135	166	74	-37.84	Pass
3573.64	44.13	4.33	-7.13	41.33	Peak Max	V	100	280	74	-32.67	Pass
11001.79	40.67	8.02	1.51	50.2	Peak Max	V	109	245	74	-23.8	Pass
1896.39	33.92	3.16	-12.31	24.77	Average Max	V	135	166	54	-29.23	Pass
3573.64	31.77	4.33	-7.13	28.97	Average Max	V	100	280	54	-25.03	Pass
11001.79	28.34	8.02	1.51	37.87	Average Max	V	109	245	54	-16.13	Pass

**Above 1GHz – 802.11n – 5580MHz**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
1911.38	45.77	3.18	-12.22	36.73	Peak Max	V	151	114	74	-37.27	Pass
3574.20	43.59	4.33	-7.12	40.8	Peak Max	V	138	71	74	-33.2	Pass
11162.13	40.25	7.88	2.1	50.23	Peak Max	V	134	190	74	-23.77	Pass
1911.38	33.74	3.18	-12.22	24.7	Average Max	V	151	114	54	-29.3	Pass
3574.20	32.05	4.33	-7.12	29.26	Average Max	V	138	71	54	-24.74	Pass
11162.13	28.81	7.88	2.1	38.79	Average Max	V	134	190	54	-15.21	Pass

**Above 1GHz – 802.11n – 5700MHz**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
1908.88	45.18	3.17	-12.24	36.11	Peak Max	V	103	93	74	-37.89	Pass
3574.12	43.6	4.33	-7.12	40.81	Peak Max	V	151	273	74	-33.19	Pass
11399.59	40.44	7.68	2.36	50.48	Peak Max	V	120	20	74	-23.52	Pass
1908.88	33.73	3.17	-12.24	24.66	Average Max	V	103	93	54	-29.34	Pass
3574.12	31.98	4.33	-7.12	29.19	Average Max	V	151	273	54	-24.81	Pass
11399.59	29.18	7.68	2.36	39.22	Average Max	V	120	20	54	-14.78	Pass

**Above 1GHz – 802.11n20 – 5745MHz**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
1910.92	46.08	3.18	-12.23	37.03	Peak Max	V	180	145	74	-36.97	Pass
3572.55	43.33	4.33	-7.13	40.53	Peak Max	V	184	4	74	-33.47	Pass
11492.59	40.89	7.6	1.84	50.33	Peak Max	V	151	295	74	-23.67	Pass
1910.92	33.78	3.18	-12.23	24.73	Average Max	V	180	145	54	-29.27	Pass
3572.55	31.91	4.33	-7.13	29.11	Average Max	V	184	4	54	-24.89	Pass
11492.59	29.16	7.6	1.84	38.6	Average Max	V	151	295	54	-15.4	Pass

**Above 1GHz – 802.11n20 – 5785MHz**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
1912.15	45.54	3.18	-12.22	36.5	Peak Max	V	179	90	74	-37.5	Pass
3574.45	43.82	4.33	-7.12	41.03	Peak Max	V	106	205	74	-32.97	Pass
11572.00	39.97	7.56	1.98	49.51	Peak Max	V	102	255	74	-24.49	Pass
1912.15	33.79	3.18	-12.22	24.75	Average Max	V	179	90	54	-29.25	Pass
3574.45	31.58	4.33	-7.12	28.79	Average Max	V	106	205	54	-25.21	Pass
11572.00	28.82	7.56	1.98	38.36	Average Max	V	102	255	54	-15.64	Pass

**Above 1GHz – 802.11n20 – 5825MHz**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
1908.91	45.61	3.17	-12.24	36.54	Peak Max	V	187	356	74	-37.46	Pass
3574.04	44.61	4.33	-7.13	41.81	Peak Max	V	131	46	74	-32.19	Pass
11651.20	40.43	7.52	1.88	49.83	Peak Max	V	135	233	74	-24.17	Pass
1908.91	33.85	3.17	-12.24	24.78	Average Max	V	187	356	54	-29.22	Pass
3574.04	31.06	4.33	-7.13	28.26	Average Max	V	131	46	54	-25.74	Pass
11651.20	28.3	7.52	1.88	37.7	Average Max	V	135	233	54	-16.3	Pass

**Above 1GHz – 802.11n40 – 5190MHz**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
1910.82	45.94	3.18	-12.23	36.89	Peak Max	V	175	199	74	-37.11	Pass
3590.28	43.95	4.34	-7.07	41.22	Peak Max	V	192	326	74	-32.78	Pass
10380.14	39.98	7.24	0.15	47.37	Peak Max	V	161	3	74	-26.63	Pass
1910.82	33.85	3.18	-12.23	24.8	Average Max	V	175	199	54	-29.2	Pass
3590.28	32.1	4.34	-7.07	29.37	Average Max	V	192	326	54	-24.63	Pass
10380.14	28.66	7.24	0.15	36.05	Average Max	V	161	3	54	-17.95	Pass

**Above 1GHz – 802.11n40 – 5230MHz**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
1911.71	45.29	3.18	-12.22	36.25	Peak Max	V	99	163	74	-37.75	Pass
3560.23	45.07	4.32	-7.17	42.22	Peak Max	V	176	159	74	-31.78	Pass
10461.64	41	7.24	0.29	48.53	Peak Max	V	119	60	74	-25.47	Pass
1911.71	33.62	3.18	-12.22	24.58	Average Max	V	99	163	54	-29.42	Pass
3560.23	32.24	4.32	-7.17	29.39	Average Max	V	176	159	54	-24.61	Pass
10461.64	28.39	7.24	0.29	35.92	Average Max	V	119	60	54	-18.08	Pass

**Above 1GHz – 802.11n40 – 5270MHz**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
1863.42	44.79	3.13	-12.54	35.38	Peak Max	V	113	280	74	-38.62	Pass
3559.36	43.4	4.32	-7.17	40.55	Peak Max	V	99	335	74	-33.45	Pass
10539.35	41.07	7.3	0.31	48.68	Peak Max	V	155	60	74	-25.32	Pass
1863.42	33.45	3.13	-12.54	24.04	Average Max	V	113	280	54	-29.96	Pass
3559.36	31.32	4.32	-7.17	28.47	Average Max	V	99	335	54	-25.53	Pass
10539.35	28.95	7.3	0.31	36.56	Average Max	V	155	60	54	-17.44	Pass

**Above 1GHz – 802.11n40 – 5310MHz**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
1857.62	45	3.12	-12.58	35.54	Peak Max	V	135	347	74	-38.46	Pass
3558.41	43.57	4.32	-7.17	40.72	Peak Max	V	100	106	74	-33.28	Pass
10618.94	41.4	7.43	0.27	49.1	Peak Max	V	152	147	74	-24.9	Pass
1857.62	33.49	3.12	-12.58	24.03	Average Max	V	135	347	54	-29.97	Pass
3558.41	31.35	4.32	-7.17	28.5	Average Max	V	100	106	54	-25.5	Pass
10618.94	29.29	7.43	0.27	36.99	Average Max	V	152	147	54	-17.01	Pass

**Above 1GHz – 802.11n40 – 5510MHz**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
1890.01	46.48	3.15	-12.35	37.28	Peak Max	V	181	93	74	-36.72	Pass
3560.45	43.77	4.32	-7.17	40.92	Peak Max	V	145	76	74	-33.08	Pass
11001.09	40.51	8.02	1.5	50.03	Peak Max	V	108	351	74	-23.97	Pass
1890.01	34.14	3.15	-12.35	24.94	Average Max	V	181	93	54	-29.06	Pass
3560.45	31.92	4.32	-7.17	29.07	Average Max	V	145	76	54	-24.93	Pass
11001.09	28.32	8.02	1.5	37.84	Average Max	V	108	351	54	-16.16	Pass

**Above 1GHz – 802.11n40 – 5550MHz**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
1890.75	45.31	3.15	-12.35	36.11	Peak Max	V	102	336	74	-37.89	Pass
3558.10	44.26	4.32	-7.18	41.4	Peak Max	V	190	237	74	-32.6	Pass
11140.97	40.28	7.9	2.04	50.22	Peak Max	V	162	106	74	-23.78	Pass
1890.75	33.88	3.15	-12.35	24.68	Average Max	V	102	336	54	-29.32	Pass
3558.10	32.25	4.32	-7.18	29.39	Average Max	V	190	237	54	-24.61	Pass
11140.97	28.44	7.9	2.04	38.38	Average Max	V	162	106	54	-15.62	Pass

**Above 1GHz – 802.11n40 – 5670MHz**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
1889.96	45.67	3.15	-12.35	36.47	Peak Max	V	155	245	74	-37.53	Pass
3560.91	43.98	4.32	-7.17	41.13	Peak Max	V	166	262	74	-32.87	Pass
11339.87	40.93	7.73	2.03	50.69	Peak Max	V	171	191	74	-23.31	Pass
1889.96	33.98	3.15	-12.35	24.78	Average Max	V	155	245	54	-29.22	Pass
3560.91	32.16	4.32	-7.17	29.31	Average Max	V	166	262	54	-24.69	Pass
11339.87	29.2	7.73	2.03	38.96	Average Max	V	171	191	54	-15.04	Pass

**Above 1GHz – 802.11n40 – 5755MHz**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
1888.63	46.14	3.15	-12.36	36.93	Peak Max	V	101	43	74	-37.07	Pass
3558.85	43.71	4.32	-7.17	40.86	Peak Max	V	173	47	74	-33.14	Pass
11508.79	40.75	7.59	1.82	50.16	Peak Max	V	162	291	74	-23.84	Pass
1888.63	33.81	3.15	-12.36	24.6	Average Max	V	101	43	54	-29.4	Pass
3558.85	32.13	4.32	-7.17	29.28	Average Max	V	173	47	54	-24.72	Pass
11508.79	29.11	7.59	1.82	38.52	Average Max	V	162	291	54	-15.48	Pass



**Above 1GHz – 802.11n40 – 5795MHz**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
1889.65	46.86	3.15	-12.35	37.66	Peak Max	V	144	141	74	-36.34	Pass
3582.64	43.83	4.34	-7.1	41.07	Peak Max	V	188	59	74	-32.93	Pass
11588.61	40.2	7.55	2.02	49.77	Peak Max	V	128	199	74	-24.23	Pass
1889.65	34.02	3.15	-12.35	24.82	Average Max	V	144	141	54	-29.18	Pass
3582.64	32.02	4.34	-7.1	29.26	Average Max	V	188	59	54	-24.74	Pass
11588.61	28.51	7.55	2.02	38.08	Average Max	V	128	199	54	-15.92	Pass

















### Annex A. TEST INSTRUMENT








Instrument	Model	Manufacturer	Serial #	Cal Date	Cal Cycle	Cal Due	In use
<b>Radiated Emissions</b>							
R & S Receiver	ESIB 40	Rohde & Schwarz	100179	06/08/2016	1 Year	06/08/2017	<input checked="" type="checkbox"/>
Spectrum Analyzer	N9010A	Keysight	10SL0219	08/06/2016	1 Year	08/06/2017	<input checked="" type="checkbox"/>
Pre-Amplifier (1-26.5GHz)	8449B	Hewlett Packard	3008A00715	03/30/2016	1 Year	03/30/2017	<input checked="" type="checkbox"/>
Preamplifier (100KHz-7GHz)	LPA-6-30	RF Bay, Inc.	11140711	02/10/2016	1 Year	02/10/2017	<input checked="" type="checkbox"/>
Bi-Log antenna (30MHz~2GHz)	JB1	Sunol Sciences	A030702	01/13/2017	1 Year	01/13/2018	<input checked="" type="checkbox"/>
Horn Antenna (1-26.5GHz)	3115	EMCO	10SL0059	08/11/2016	1 Year	08/11/2017	<input checked="" type="checkbox"/>
10 Meters SAC	10M	ETS-Lingren	N/A	07/06/2016	1 Year	07/06/2017	<input checked="" type="checkbox"/>

### Test Software Version

Test Item	Vendor	Software	Version
Radiated Emission	EMISoft	EMISoft Vasona	V5.0

## Annex B. SIEMIC Accreditation

Accreditations	Document	Scope / Remark
ISO 17025 (A2LA)		Please see the documents for the detailed scope
ISO Guide 65 (A2LA)		Please see the documents for the detailed scope
TCB Designation		<a href="#">A1</a> , <a href="#">A2</a> , <a href="#">A3</a> , <a href="#">A4</a> , <a href="#">B1</a> , <a href="#">B2</a> , <a href="#">B3</a> , <a href="#">B4</a> , C
FCC DoC Accreditation		FCC Declaration of Conformity Accreditation
FCC Site Registration		3 meter site
FCC Site Registration		10 meter site
IC Site Registration		3 meter site
IC Site Registration		10 meter site
EU NB		<b>Radio &amp; Telecommunications Terminal Equipment:</b> EN45001 – EN ISO/IEC 17025
		<b>Electromagnetic Compatibility:</b> EN45001 – EN ISO/IEC 17025
Singapore iDA CB(Certification Body)	 	<a href="#">Phase I</a> , <a href="#">Phase II</a>
Vietnam MIC CAB Accreditation		Please see the document for the detailed scope
Hong Kong OFCA		<b>(Phase II)</b> OFCA Foreign Certification Body for Radio and Telecom
		<b>(Phase I)</b> Conformity Assessment Body for Radio and Telecom
Industry Canada CAB		<b>Radio:</b> Scope A – All Radio Standard Specification in Category I
		<b>Telecom:</b> CS-03 Part I, II, V, VI, VII, VIII

Japan Recognized Certification Body Designation		<p><b>Radio:</b> A1. Terminal equipment for purpose of calling</p> <p><b>Telecom:</b> B1. Specified radio equipment specified in Article 38-2, Paragraph 1, Item 1 of the Radio Law</p>
Korea CAB Accreditation		<p><b>EMI:</b> KCC Notice 2008-39, RRL Notice 2008-3: CA Procedures for EMI KN22: Test Method for EMI</p> <p><b>EMS:</b> KCC Notice 2008-38, RRL Notice 2008-4: CA Procedures for EMS KN24, KN61000-4-2, -4-3, -4-4, -4-5, -4-6, -4-8, -4-11: Test Method for EMS</p>
		<p><b>Radio:</b> RRL Notice 2008-26, RRL Notice 2008-2, RRL Notice 2008-10, RRL Notice 2007-49, RRL Notice 2007-20, RRL Notice 2007-21, RRL Notice 2007-80, RRL Notice 2004-68</p> <p><b>Telecom:</b> President Notice 20664, RRL Notice 2007-30, RRL Notice 2008-7 with attachments 1, 3, 5, 6; President Notice 20664, RRL Notice 2008-7 with attachment 4</p>
Taiwan NCC CAB Recognition		LP0002, PSTN01, ADSL01, ID0002, IS6100, CNS14336, PLMN07, PLMN01, PLMN08
Taiwan BSMI CAB Recognition		CNS 13438
Japan VCCI		<p>R-3083: Radiation 3 meter site</p> <p>C-3421: Main Ports Conducted Interference Measurement</p> <p>T-1597: Telecommunication Ports Conducted Interference Measurement</p>
Australia CAB Recognition		<p><b>EMC:</b> AS/NZS CISPR 11, AS/NZS CISPR 14.1, AS/NZS CISPR22, AS/NZS 61000.6.3, AS/NZS 61000.6.4</p>
		<p><b>Radio communications:</b> AS/NZS 4281, AS/NZS 4268, AS/NZS 4280.1, AS/NZS 4280.2, AS/NZS 4295, AS/NZS 4582, AS/NZS 4583, AS/NZS 4769.1, AS/NZS 4769.2, AS/NZS 4770, AS/NZS 4771</p> <p><b>Telecommunications:</b> AS/ACIF S002:05, AS/ACIF S003:06, AS/ACIF S004:06 AS/ACIF S006:01, AS/ACIF S016:01, AS/ACIF S031:01, AS/ACIF S038:01, AS/ACIF S040:01, AS/ACIF S041:05, AS/ACIF S043.2:06, AS/ACIF S60950.1</p>
Australia NATA Recognition		AS/ACIF S002, AS/ACIF S003, AS/ACIF S004, AS/ACIF S006, AS/ACIF S016, AS/ACIF S031, AS/ACIF S038, AS/ACIF S040, AS/ACIF S041, AS/ACIF S043.2