

# RF TEST REPORT



Report No.: FCC\_IC RF\_SL15101901-SLX-027\_DSS Rev 1.0  
Supersede Report No.: FCC\_IC RF\_SL15101901-SLX-027\_DSS

Applicant	:	Silex Technology, Inc.
Product Name	:	802.11a/b/g/n/ac + BT4.1 module
Model No.	:	SX-SDPAC
Test Standard	:	47 CFR 15.247 RSS-247 Issue 1.0, May 2015
Test Method	:	ANSI C63.10: 2013 RSS-Gen Issue 4, Nov 2014 FCC Public Notice DA 00-705
FCC ID	:	N6C-SDPAC
IC ID	:	4908A-SDPAC
Dates of test	:	06/01/2016 to 06/30/2016
Issue Date	:	08/09/2016
Test Result	:	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail
Equipment complied with the specification [X] Equipment did not comply with the specification [ ]		

This Test Report is Issued Under the Authority of:	
<b>Gary Chou</b>	<b>Chen Ge</b>
Test Engineer	Engineer Reviewer

Issued By:  
SIEMIC Laboratories  
775 Montague Expressway, Milpitas, 95035 CA



775 Montague Expressway, Milpitas, CA 95035, USA • Phone: (+1) 408 526 1188 • Facsimile (+1) 408 526 1088

Visit us at: [www.siemic.com](http://www.siemic.com); Follow us at:

## Laboratory Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

### Accreditations for Conformity Assessment

Country/Region	Accreditation Body	Scope
USA	FCC, A2LA	EMC, RF/Wireless, Telecom
Canada	IC, A2LA, NIST	EMC, RF/Wireless, Telecom
Taiwan	BSMI, NCC, NIST	EMC, RF, Telecom, Safety
Hong Kong	OFTA, NIST	RF/Wireless, Telecom
Australia	NATA, NIST	EMC, RF, Telecom, Safety
Korea	KCC/RRR, NIST	EMI, EMS, RF, Telecom, Safety
Japan	VCCI, JATE, TELEC, RFT	EMI, RF/Wireless, Telecom
Mexico	NOM, COFETEL, Caniety	Safety, EMC, RF/Wireless, Telecom
Europe	A2LA, NIST	EMC, RF, Telecom, Safety
Israel	MOC, NIST	EMC, RF, Telecom, Safety

### Accreditations for Product Certifications

Country	Accreditation Body	Scope
USA	FCC TCB, NIST	EMC, RF, Telecom
Canada	IC FCB, NIST	EMC, RF, Telecom
Singapore	iDA, NIST	EMC, RF, Telecom
EU	NB	EMC & R&TTE Directive
Japan	MIC (RCB 208)	RF, Telecom
Hong Kong	OFTA (US002)	RF, Telecom

**CONTENTS**

**1 REPORT REVISION HISTORY .....4**

**2 EXECUTIVE SUMMARY .....4**

**3 CUSTOMER INFORMATION .....4**

**4 TEST SITE INFORMATION .....4**

**5 MODIFICATION .....4**

**6 EUT INFORMATION .....5**

6.1 EUT Description .....5

6.2 Spec for BT Radio .....5

6.3 EUT test modes/configuration Description.....5

6.4 Antenna Description .....6

6.5 EUT Photos .....7

6.6 EUT Test Setup Photos .....8

**7 SUPPORTING EQUIPMENT/SOFTWARE AND CABLING DESCRIPTION.....9**

7.1 Supporting Equipment .....9

7.2 Cabling Description .....9

7.3 Test Software Description .....9

**8 TEST SUMMARY .....10**

**9 MEASUREMENT UNCERTAINTY .....11**

**10 MEASUREMENTS, EXAMINATION AND DERIVED RESULTS .....12**

10.1 Conducted Emissions.....12

10.2 Channel Separation (Bluetooth BDR/EDR) .....15

10.3 20dB and 99% Occupied Bandwidth (Bluetooth BDR/EDR).....18

10.4 Number of Hopping Channel (Bluetooth BDR/EDR).....21

10.5 Time of Occupancy (Bluetooth BDR/EDR).....23

10.6 Peak Output Power (Bluetooth BDR/EDR).....26

10.7 Band Edge (Bluetooth BDR/EDR).....29

10.8 Transmitter Radiated Spurious Emissions Below 1GHz .....31

10.9 Transmitter Radiated Spurious Emissions > 1GHz .....33

**ANNEX A. TEST INSTRUMENT .....37**

**ANNEX B. SIEMIC ACCREDITATION .....38**

## 1 Report Revision History

Report No.	Report Version	Description	Issue Date
FCC_IC RF_SL15101901-SLX-027_DSS	None	Original	07/05/2016
FCC_IC RF_SL15101901-SLX-027_DSS Rev 1.0	1.0	Original	08/09/2016

## 2 Executive Summary

The purpose of this test program was to demonstrate compliance of following product

Company: Silex Technology, Inc.  
Product: 802.11a/b/g/n/ac + BT 4.1 module  
Model: SX-SDPAC

against the current Stipulated Standards. The specified model product stated above has demonstrated compliance with the Stipulated Standard listed on 1<sup>st</sup> page.

## 3 Customer information

Applicant Name	Silex Technology, Inc
Applicant Address	2-3-1 Hikoridai, Seika-cho, Kyoto, 619-0237 Japan
Manufacturer Name	Silex Technology, Inc
Manufacturer Address	2-3-1 Hikoridai, Seika-cho, Kyoto, 619-0237 Japan

## 4 Test site information

Lab performing tests	SIEMIC Laboratories
Lab Address	775 Montague Expressway, Milpitas, CA 95035
FCC Test Site No.	881796
IC Test Site No.	4842D-2
VCCI Test Site No.	A0133

## 5 Modification

Index	Item	Description	Note
-	-	-	-

## 6 EUT Information

### 6.1 EUT Description

Product Name	802.11a/b/g/n/ac + BT 4.1 module
Model No.	SX-SDPAC
Trade Name	Silex
Serial No.	N/A
Host Model No.	N/A
Input Power	5VDC
Power Adapter Manu/Model	N/A
Power Adapter SN	N/A
Date of EUT received	05/26/2016
Equipment Class/ Category	DTS, UNII
Clock Frequencies	N/A
Port/Connectors	PoE, Ethernet

### 6.2 Spec for BT Radio

Radio Type	Bluetooth (Ver4.0+EDR)
Operating Frequency	2402MHz-2480MHz
Modulation	FHSS (BDR, EDR)
Channel Spacing	1MHz (BDR, EDR)
Antenna Type	PCB Antenna
Antenna Gain	2.4GHz: 3.25 dBi
Antenna Connector Type	U.FL connector

#### Channel List

Type	Channel No.	Frequency (MHz)	Power Setting
Bluetooth(BRD) 2402-2480MHz	0	2402	12
	39	2441	12
	78	2480	12
Bluetooth(EDR) 2402-2480MHz	0	2402	12
	39	2441	12
	78	2480	12


### 6.3 EUT test modes/configuration Description

Mode	Note
Bluetooth	BDR (GFSK)
Bluetooth	EDR (8-DPSK)


**6.4 Antenna Description**

Vendor	Part Number	Antenna type	W24	W52	W53	W56
Molex	146153	PCB type di-pole antenna	3.2	4.75	4.75	4.75
Unictron	H2B1PC1A1C (AA258)	PCB type di-pole antenna	2.67	3.35	3.35	3.35
Unictron	H2B1PD1A1C (AA222)	PCB type di-pole antenna	2.57	3.15	3.15	3.15


**6.5 EUT Photos**

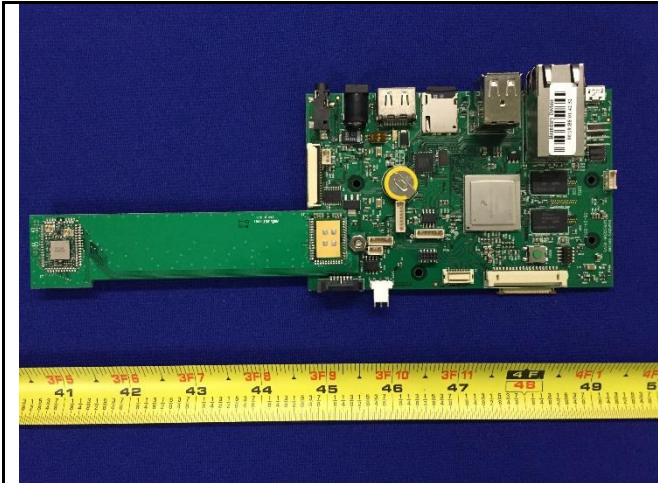


**Top View**

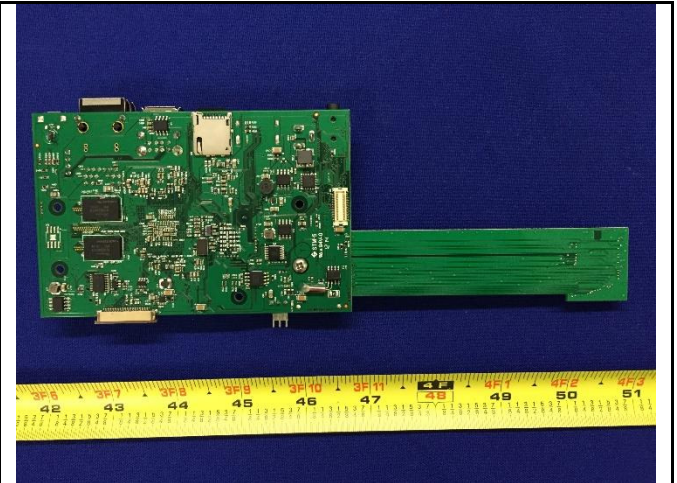

**Bottom View**

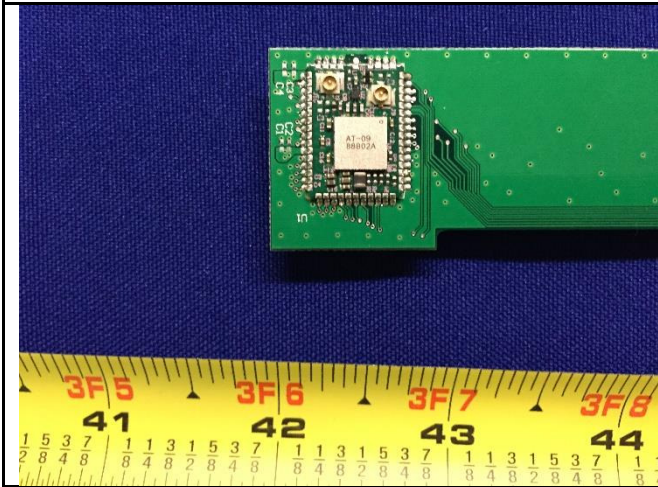

**Radio Module View**

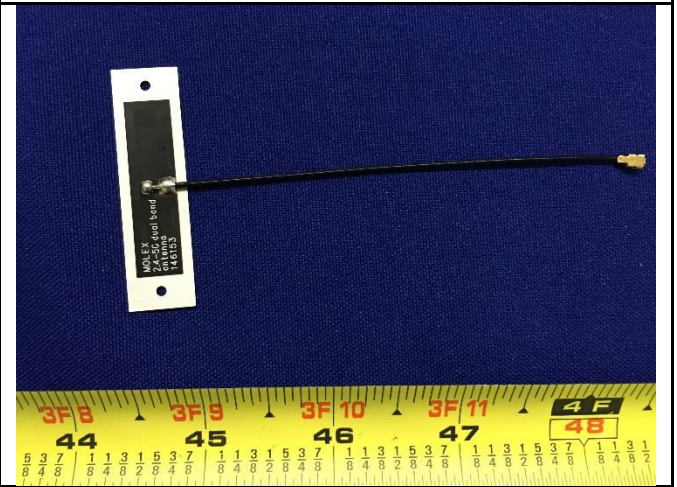


**Antenna View**


**6.6 EUT Test Setup Photos**



**AC Line Conducted Emissions – Front View**

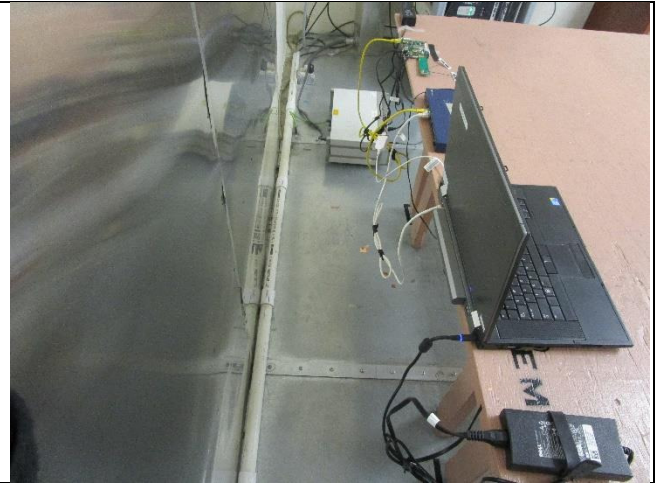

**AC Line Conducted Emissions – Rear View**

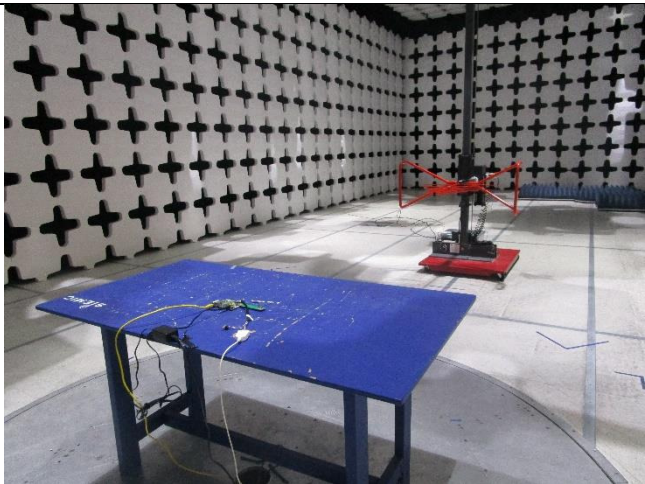

**Radiated Emissions (<1GHz) – Front View**



**Radiated Emissions (<1GHz) – Rear View**



**Radiated Emissions (>1GHz) – Front View**



**Radiated Emissions (>1GHz) – Rear View**



## 7 Supporting Equipment/Software and cabling Description

### 7.1 Supporting Equipment

Item	Supporting Equipment Description	Model	Serial Number	Manufacturer	Note
1	Laptop	Latitude E6510	N/A	Dell	-
2	Hub	DS108	N/A	NetGear	-

### 7.2 Cabling Description

Name	Connection Start		Connection Stop		Length / shielding Info		Note
	From	I/O Port	To	I/O Port	Length (m)	Shielding	
USB	EUT	Laptop	EUT	Laptop	1	Unshielded	-
RJ45	EUT	Hub	Laptop	Hub	1	Unshielded	-

### 7.3 Test Software Description

Test Item	Software	Description
RF Testing	QRCT	Set the EUT to transmit continuously in diferent test mode

## 8 Test Summary

Test Item	Test standard		Test Method/Procedure		Pass / Fail
Restricted Band of Operation	FCC	15.205	FCC	ANSI C63.10: 2013 Public Notice DA 00-705	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> N/A
	IC	RSS Gen 8.10		RSS Gen Issue 4: 2014	
AC Conducted Emissions Voltage	FCC	15.207(a)	FCC	ANSI C63.10: 2013	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> N/A
	IC	RSS Gen 8.8		RSS Gen Issue 4: 2014	

### DSS Band Requirement

Test Item	Test standard		Test Method/Procedure		Pass / Fail
Channel Separation	FCC	15.247 (a)(1)	FCC	Public Notice DA 00-705	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> N/A
	IC	RSS247 (5.1.5)	IC	-	
20dB Occupied Bandwidth	FCC	15.247(a)(1)	FCC	Public Notice DA 00-705	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> N/A
	IC	RSS247 (5.1.2)	IC	-	
99% Occupied Bandwidth	FCC	15.247(a)(2)	FCC		<input checked="" type="checkbox"/> Pass <input type="checkbox"/> N/A
	IC	RSS Gen 6.6	IC	RSS Gen Issue 4: 2014 -	
Number of Hopping Channels	FCC	15.247(a)(1)	FCC	Public Notice DA 00-705	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> N/A
	IC	RSS247 (5.1.5)	IC	-	
Band Edge and Radiated Spurious Emissions	FCC	15.247(d)	FCC	Public Notice DA 00-705	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> N/A
	IC	RSS247(5.5)	IC	-	
Time of Occupancy	FCC	15.247(a)(1)	FCC	Public Notice DA 00-705	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> N/A
	IC	RSS247 (5.1.5)	IC	-	
Output Power	FCC	15.247(b)	FCC	Public Notice DA 00-705	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> N/A
	IC	RSS247 (5.4.2)	IC	-	
Receiver Spurious Emissions	FCC	15.247(d)	FCC	-	<input type="checkbox"/> Pass <input checked="" type="checkbox"/> N/A
	IC	RSS Gen (7.1)	IC	RSS Gen (7.1)	
Antenna Gain > 6 dBi	FCC	15.247(e)	FCC	Public Notice DA 00-705	<input type="checkbox"/> Pass <input checked="" type="checkbox"/> N/A
	IC	RSS247 (5.4.6)	IC	-	
Power Spectral Density	FCC	15.247(e)	FCC	Public Notice DA 00-705	<input type="checkbox"/> Pass <input checked="" type="checkbox"/> N/A
	IC	RSS247 (5.2.2)	IC	-	
Hybrid System Requirement	FCC	15.247(f)	FCC	Public Notice DA 00-705	<input type="checkbox"/> Pass <input checked="" type="checkbox"/> N/A
	IC	RSS247 (5.3)	IC	-	
Hopping Capability	FCC	15.247(g)	FCC	Public Notice DA 00-705	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> N/A
	IC	RSS247 (5.1.5)	IC	-	
RF Exposure requirement	FCC	15.247(i)	FCC	Public Notice DA 00-705	<input type="checkbox"/> Pass <input checked="" type="checkbox"/> N/A
	IC	RSS Gen(3.2)	IC	-	

Remark	<ol style="list-style-type: none"> <li>All measurement uncertainties are not taken into consideration for all presented test result.</li> <li>The applicant shall ensure frequency stability by showing that an emission is maintained within the band of operation under all normal operating conditions as specified in the user's manual.</li> </ol>
--------	---

## 9 Measurement Uncertainty


Emissions			
Test Item	Frequency Range	Description	Uncertainty
Band Edge and Radiated Spurious Emissions	30MHz – 1GHz	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+5.6dB/-4.5dB
Band Edge and Radiated Spurious Emissions	1GHz – 40GHz	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+4.3dB/-4.1dB

## 10 Measurements, Examination and Derived Results

### 10.1 Conducted Emissions

#### Conducted Emission Limit

Frequency ranges (MHz)	Limit (dBuV)	
	QP	Average
0.15 ~ 0.5	66 – 56	56 – 46
0.5 ~ 5	56	46
5 ~ 30	60	50

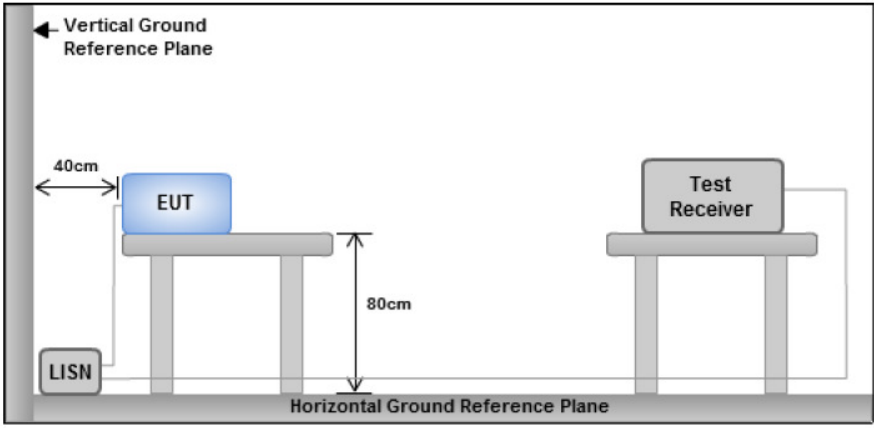Spec	Item	Requirement	Applicable
47CFR§15.207	a)	For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequency ranges.	<input checked="" type="checkbox"/>
Test Setup	 <p style="text-align: center;"><b>Note: 1. Support units were connected to second LISN.</b> <b>2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes</b></p>		
Procedure	<ul style="list-style-type: none"> <li>- The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table, as shown in Annex B.</li> <li>- The power supply for the EUT was fed through a 50<math>\Omega</math>/50<math>\mu</math>H EUT LISN, connected to filtered mains.</li> <li>- The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable.</li> <li>- All other supporting equipment was powered separately from another main supply.</li> </ul>		
Remark	EUT tested with AC 110V 60Hz		
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		


Test Data     Yes                       N/A

Test Plot     Yes (See below)               N/A

Test was done by **Chen Ge** at Conducted Emission test site.

### Conducted Emission Test Results

Test specification:	Conducted Emissions			Result:	<input checked="" type="checkbox"/> Pass  <input type="checkbox"/> Fail
Environmental Conditions:	Temp(°C):	21			
	Humidity (%):	42			
	Atmospheric(mbar):	1021			
Mains Power:	120VAC, 60Hz				
Tested by:	Chen Ge				
Test Date:	07/05/2016				
Remarks	AC Line @ Line				

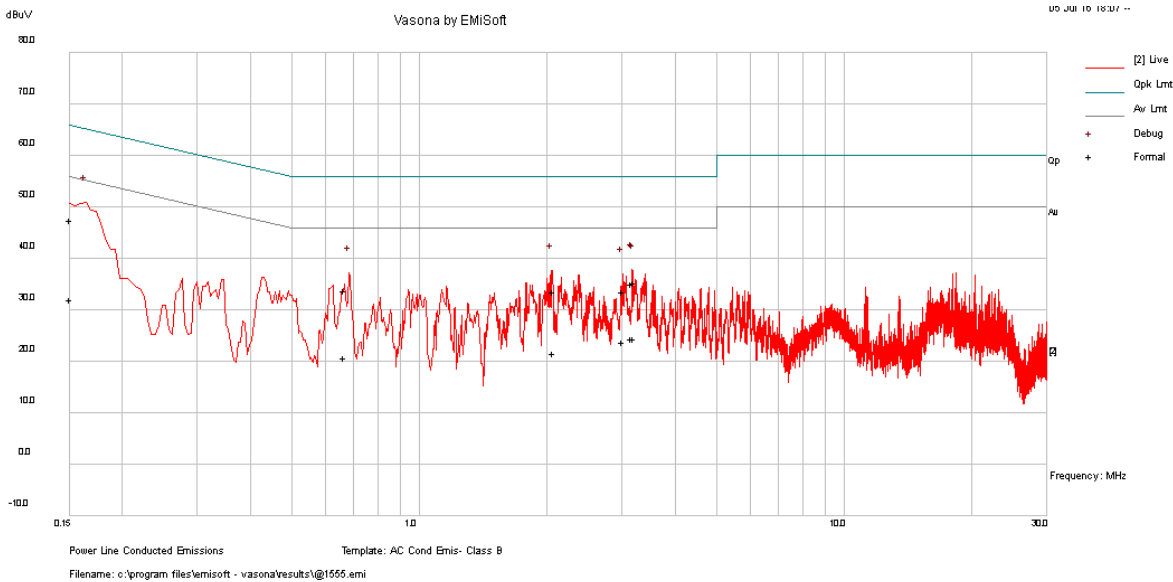


Line Plot at 120Vac, 60Hz

Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	Factors (dB)	Level (dBuV)	Measurement Type	Line	Limit (dBuV)	Margin (dB)	Pass /Fail
0.15	35.87	10	1.78	47.65	Quasi Peak	Live	65.93	-18.27	Pass
3.16	24.6	10.03	0.55	35.18	Quasi Peak	Live	56	-20.82	Pass
2.07	23.11	10.02	0.55	33.69	Quasi Peak	Live	56	-22.31	Pass
3.20	24.82	10.03	0.55	35.4	Quasi Peak	Live	56	-20.6	Pass
0.67	23.32	10.01	0.62	33.95	Quasi Peak	Live	56	-22.05	Pass
3.01	23.11	10.03	0.55	33.69	Quasi Peak	Live	56	-22.31	Pass
0.15	20.43	10	1.78	32.22	Average	Live	55.93	-23.71	Pass
3.16	13.88	10.03	0.55	24.46	Average	Live	46	-21.54	Pass
2.07	11.19	10.02	0.55	21.76	Average	Live	46	-24.24	Pass
3.20	13.85	10.03	0.55	24.43	Average	Live	46	-21.57	Pass
0.67	10.1	10.01	0.62	20.73	Average	Live	46	-25.27	Pass
3.01	13.34	10.03	0.55	23.92	Average	Live	46	-22.08	Pass

Note: The results above show only the worst case.

### Conducted Emission Test Results

Test specification:	Conducted Emissions			Result:	<input checked="" type="checkbox"/> Pass  <input type="checkbox"/> Fail
Environmental Conditions:	Temp(°C):	21			
	Humidity (%):	42			
	Atmospheric(mbar):	1021			
Mains Power:	120VAC, 60Hz				
Tested by:	Chen Ge				
Test Date:	07/05/2016				
Remarks	AC Line @ Neutral				

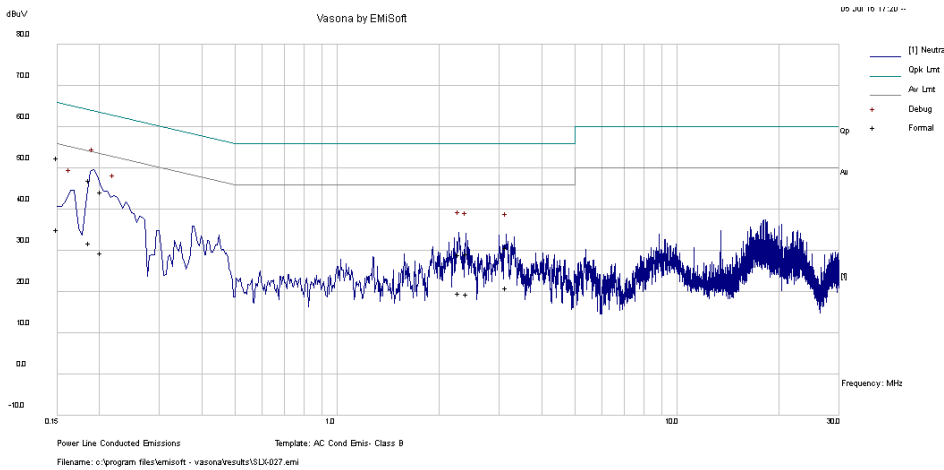


Neutral Plot at 120Vac, 60Hz

Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	Factors (dB)	Level (dBuV)	Measurement Type	Line	Limit (dBuV)	Margin (dB)	Pass /Fail
0.19	35.67	10	1.41	47.09	Quasi Peak	Neutral	64.17	-17.09	Pass
0.20	33.08	10	1.3	44.39	Quasi Peak	Neutral	63.53	-19.14	Pass
0.15	40.7	10	1.8	52.5	Quasi Peak	Neutral	66	-13.5	Pass
2.29	18.5	10.02	0.55	29.08	Quasi Peak	Neutral	56	-26.92	Pass
2.41	18.74	10.03	0.55	29.32	Quasi Peak	Neutral	56	-26.68	Pass
3.15	20.21	10.03	0.55	30.79	Quasi Peak	Neutral	56	-25.21	Pass
0.19	20.57	10	1.41	31.99	Average	Neutral	54.17	-22.19	Pass
0.20	18.21	10	1.3	29.51	Average	Neutral	53.53	-24.02	Pass
0.15	23.43	10	1.8	35.24	Average	Neutral	56	-20.76	Pass
2.29	9.26	10.02	0.55	19.84	Average	Neutral	46	-26.16	Pass
2.41	8.91	10.03	0.55	19.49	Average	Neutral	46	-26.51	Pass
3.15	10.54	10.03	0.55	21.12	Average	Neutral	46	-24.88	Pass

Note: The results above show only the worst case.

## 10.2 Channel Separation (Bluetooth BDR/EDR)

### Requirement(s):

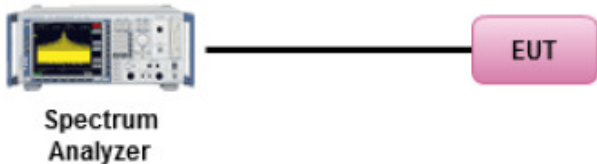Spec	Item	Requirement	Applicable
47 CFR §15.247 (e) RSS-210 (A2.6)	a)	Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater.	<input checked="" type="checkbox"/>
Test Setup			
Test Procedure	DA 00-705 Measurement Guidelines for Frequency Hopping Spread Spectrum Systems  <u>Channel Separation procedure</u> <ul style="list-style-type: none"> <li>- The EUT must have its hopping function enabled.</li> <li>- Span = wide enough to capture the peaks of two adjacent channels</li> <li>- Resolution (or IF) Bandwidth (RBW) <math>\geq</math> 1% of the span</li> <li>- Video (or Average) Bandwidth (VBW) <math>\geq</math> RBW.</li> <li>- Detector = Peak.</li> <li>- Trace mode = max hold.</li> <li>- Use the marker-delta function to determine the separation between the peaks of the adjacent channels.</li> </ul>		
Test Date	06/22/2016	Environmental condition	Temperature 21°C Relative Humidity 46% Atmospheric Pressure 1019mbar
Remark	NONE		
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

### Equipment Setting

Test	RBW	VBW	SPAN	Detector	Sweep	Trace	Notes
Channel Separation	$\geq$ 1% Span	$\geq$ RBW	-	PK	Auto	Maxhold	-

**Test Data**     Yes (See below)       N/A

**Test Plot**     Yes (See below)       N/A

**Test was done by Chen Ge at RF test site.**

**Configuration : Bluetooth Mode , BDR Mode**

Channel	Channel Frequency (MHz)	Channel Separation (kHz)	2/3 20dB Bandwidth (kHz)	Pass/Fail
Low	2402	1178	613	Pass
Mid	2441	1000	615	Pass
High	2480	992	614	Pass

**Configuration : Bluetooth Mode , EDR Mode**

Channel	Channel Frequency (MHz)	Channel Separation (kHz)	2/3 20dB Bandwidth (kHz)	Pass/Fail
Low	2402	1006	892	Pass
Mid	2441	1022	912	Pass
High	2480	943	888	Pass



**Channel Separation Test Plot (Bluetooth BDR/EDR)**




**Channel Separation-BDR 2402MHz**




**Channel Separation-EDR 2402MHz**



**Channel Separation-BDR 2441MHz**

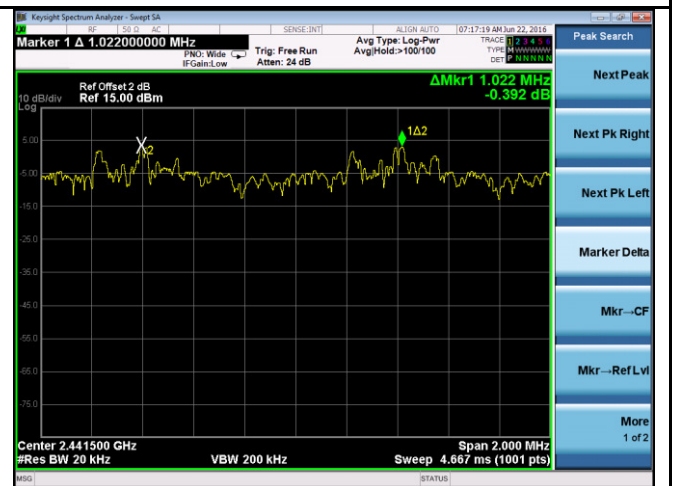

**Channel Separation-EDR 2441MHz**

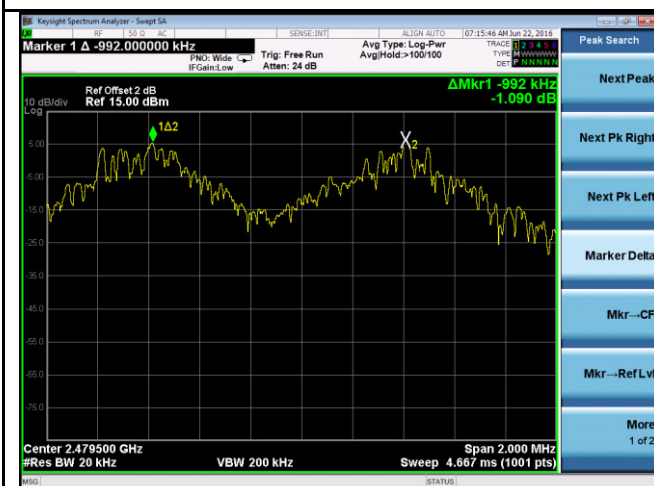


**Channel Separation-BDR 2480MHz**



**Channel Separation-EDR 2480MHz**

### 10.3 20dB and 99% Occupied Bandwidth (Bluetooth BDR/EDR)

**Requirement(s):**

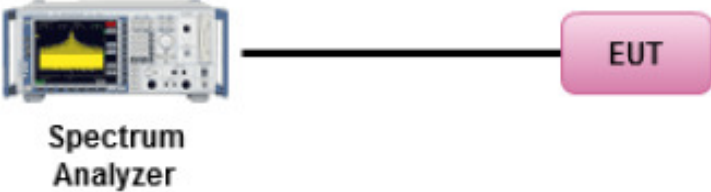Spec	Requirement	Applicable									
47 CFR §15.247	Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 2/3 of 20 dB bandwidth of the hopping channel, whichever is greater.	<input checked="" type="checkbox"/>									
RSS Gen 4.6.1	The transmitter shall be operated at its maximum carrier power measured under normal test conditions. The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used given that a peak or peak hold may produce a wider bandwidth than actual. The trace data points are recovered and directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded. The span between the two recorded frequencies is the occupied bandwidth	<input checked="" type="checkbox"/>									
Test Setup											
Procedure	<p><u>20dB Emission bandwidth measurement procedure</u></p> <ul style="list-style-type: none"> <li>- Set RBW <math>\geq</math> 1% of 20dB Bandwidth</li> <li>- Set the video bandwidth (VBW) <math>\geq</math> RBW.</li> <li>- Detector = Peak.</li> <li>- Trace mode = max hold.</li> <li>- Sweep = auto couple.</li> <li>- Allow the trace to stabilize.</li> <li>- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.</li> </ul> <p><u>99% bandwidth measurement procedure</u></p> <ol style="list-style-type: none"> <li>1. EUT was set for low , mid, high channel with modulated mode and highest RF output power.</li> <li>2. The spectrum analyzer was connected to the antenna terminal.</li> </ol>										
Test Date	06/18/2016 – 06/22/2016	<table border="1"> <tr> <td>Environmental condition</td> <td>Temperature</td> <td>23oC</td> </tr> <tr> <td></td> <td>Relative Humidity</td> <td>47%</td> </tr> <tr> <td></td> <td>Atmospheric Pressure</td> <td>1019mbar</td> </tr> </table>	Environmental condition	Temperature	23oC		Relative Humidity	47%		Atmospheric Pressure	1019mbar
Environmental condition	Temperature	23oC									
	Relative Humidity	47%									
	Atmospheric Pressure	1019mbar									
Remark	-										
Result	<input type="checkbox"/> Pass <input type="checkbox"/> Fail										

**Test Data**     Yes (See below)       N/A

**Test Plot**     Yes (See below)       N/A

**Test was done by Chen Ge at RF test site.**



**Configuration : Bluetooth mode , BDR Mode**

Channel	Channel Frequency (MHz)	OBW		2/3 20dB Bandwidth (kHz)
		99% (KHz)	20dB(KHz)	
Low	2402	901	920	613
Mid	2441	903	923	615
High	2480	900	921	614

**Configuration : Bluetooth mode , EDR mode**



Channel	Channel Frequency (MHz)	OBW		2/3 20dB Bandwidth (kHz)
		99%(kHz)	20dB(kHz)	
Low	2402	1206	1339	892
Mid	2441	1206	1369	912
High	2480	1206	1332	888

**99% & 20dB Bandwidth Test Plots( Bluetooth BDR, EDR)**

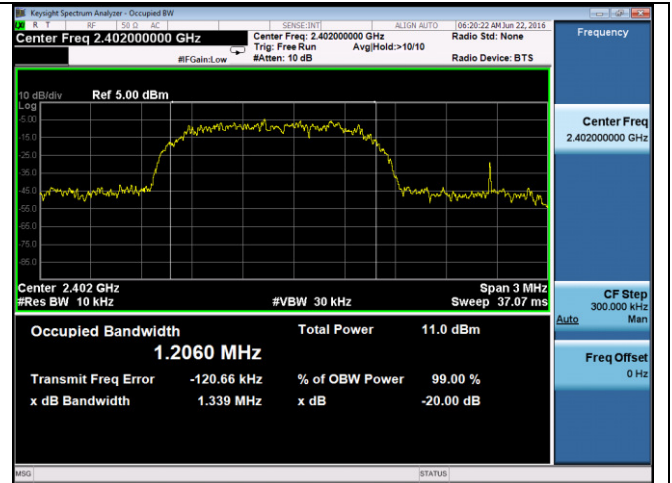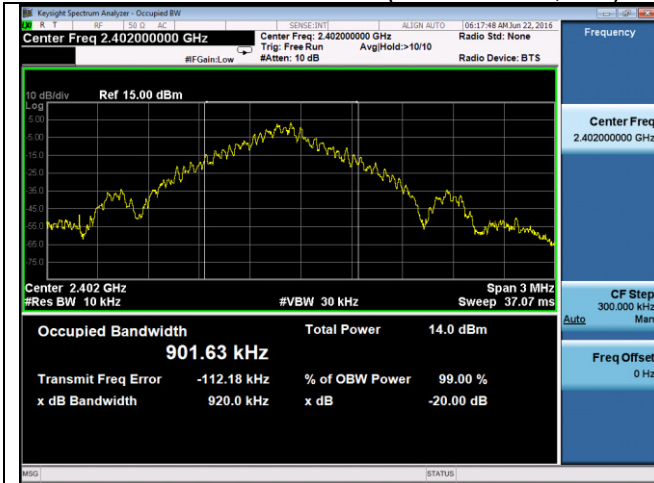


**99% and 20dB BW –Bluetooth BDR 2402MHz**

**99% and 20dB BW –Bluetooth EDR 2402MHz**

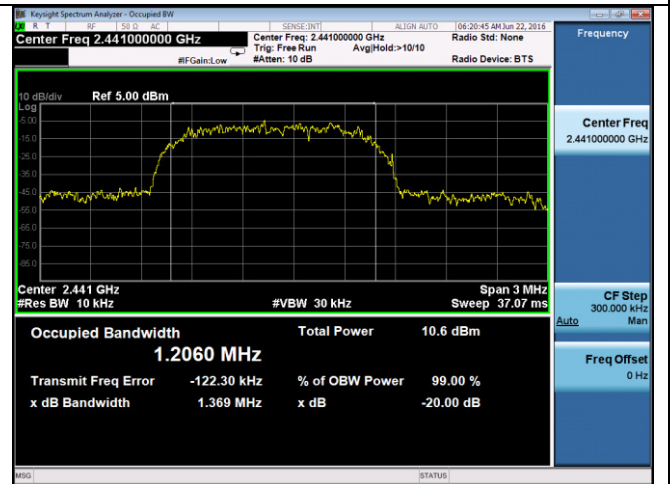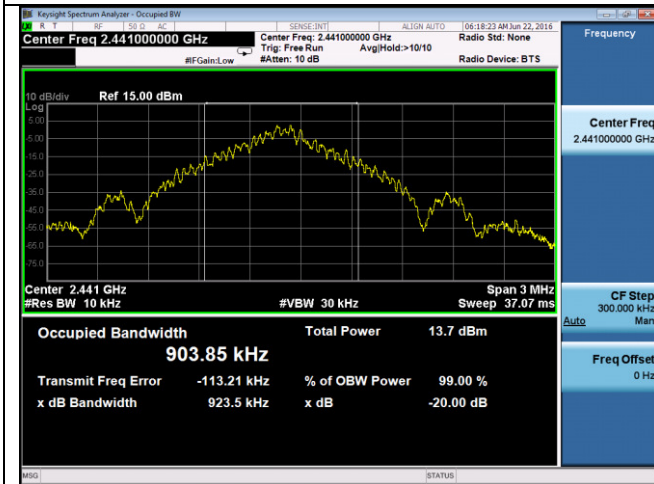

**99% and 20dB BW –Bluetooth BDR 2441MHz**

**99% and 20dB BW –Bluetooth EDR 2441MHz**

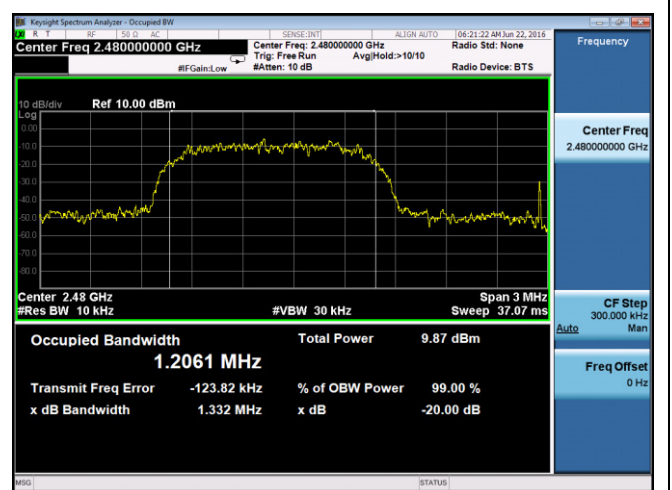


**99% and 20dB BW –Bluetooth BDR 2480MHz**

**99% and 20dB BW –Bluetooth EDR 2480MHz**

### 10.4 Number of Hopping Channel (Bluetooth BDR/EDR)

**Requirement(s):**

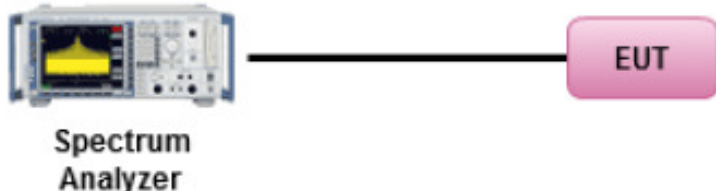
Spec	Requirement	Applicable									
47 CFR §15.247 RSS247 (5.1.5)	For frequency hopping systems in the 2400-2483.5MHz band employing at least 75 hopping channels, and all frequency hopping systems in the 5725-5850MHz band: below 1 Watt (inclusive).	<input checked="" type="checkbox"/>									
Test Setup	 <p><b>Spectrum Analyzer</b></p>										
Procedure	<p><u>Number of hopping frequencies procedure</u></p> <ol style="list-style-type: none"> <li>1. The EUT must have its hopping function enabled</li> <li>2. Span = the frequency band of operation.</li> <li>3. Resolution (or IF) Bandwidth (RBW) ≥ 1% of the span.</li> <li>4. Video (or Average) Bandwidth (VBW) ≥ RBW.</li> <li>5. Detector = peak.</li> <li>6. Sweep time = auto couple.</li> <li>7. Trace mode = max hold.</li> <li>8. Allow trace to fully stabilize.</li> <li>9. Save the plot</li> </ol>										
Test Date	06/18/2016 – 06/22/2016	<table border="0"> <tr> <td>Environmental condition</td> <td>Temperature</td> <td>23oC</td> </tr> <tr> <td></td> <td>Relative Humidity</td> <td>47%</td> </tr> <tr> <td></td> <td>Atmospheric Pressure</td> <td>1019mbar</td> </tr> </table>	Environmental condition	Temperature	23oC		Relative Humidity	47%		Atmospheric Pressure	1019mbar
Environmental condition	Temperature	23oC									
	Relative Humidity	47%									
	Atmospheric Pressure	1019mbar									
Remark	-										
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail										

Test Data     Yes (See below)       N/A  
 Test Plot     Yes (See below)       N/A


**Test was done by Chen Ge at RF test site.**

Channel Number	Limit	Pass/Fail
79	>15	Pass

**Hopping Channel Test Plots( Bluetooth BDR, EDR)**

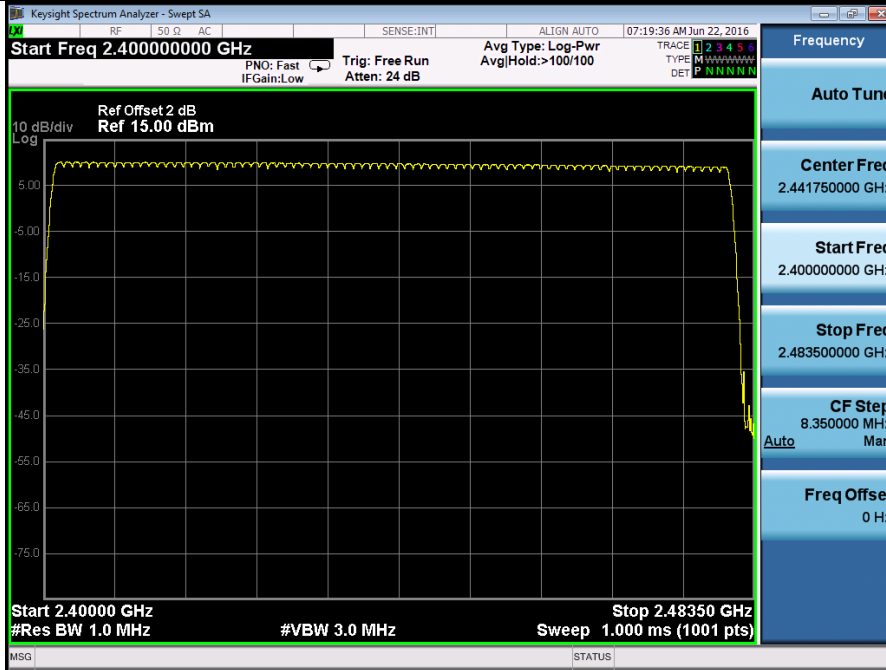


**BDR – 79 Channels**

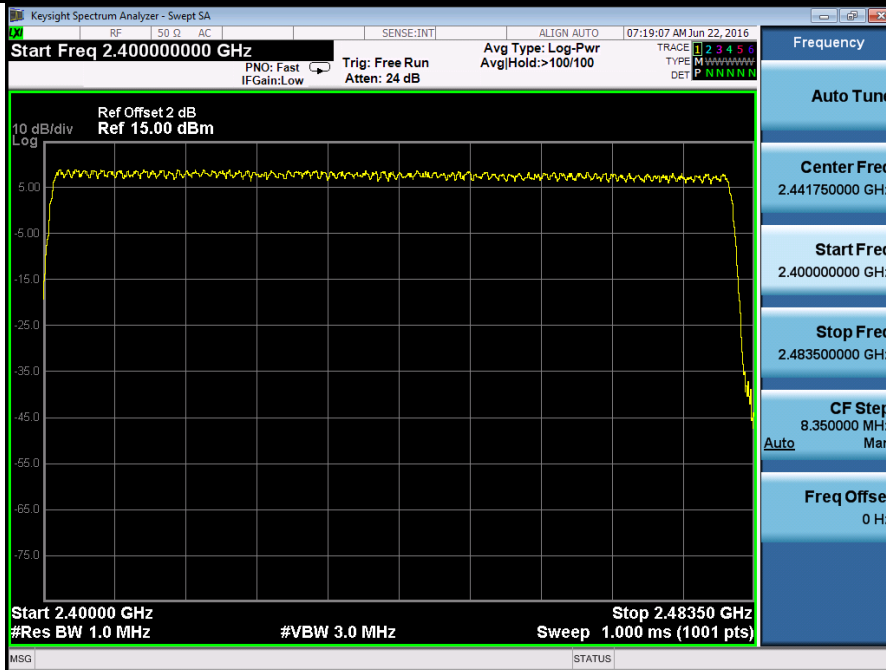

**EDR – 79 Channels**

### 10.5 Time of Occupancy (Bluetooth BDR/EDR)

**Requirement(s):**

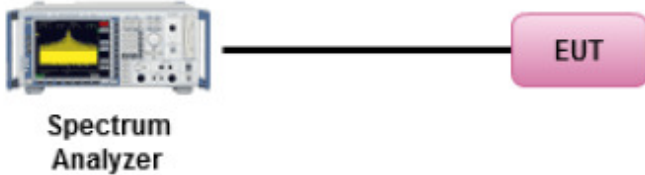Spec	Requirement	Applicable									
47 CFR §15.247 RSS247 (5.1.5)	Frequency hopping systems in the 2400-2483.5MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems which use fewer than 75 hopping frequencies may employ intelligent hopping techniques to avoid interference to other transmissions.	<input checked="" type="checkbox"/>									
Test Setup	 <p style="text-align: center;"><b>Spectrum Analyzer</b></p>										
Test Procedure	<p>DA 00-705 Measurement Guidelines for Frequency Hopping Spread Spectrum Systems</p> <p><u>Channel Separation procedure</u></p> <ul style="list-style-type: none"> <li>- The EUT must have its hopping function enabled.</li> <li>- Span = zero span</li> <li>- centered on a hopping channel</li> <li>- RBW = 1 MHz; VBW ≥ RBW</li> <li>- Sweep = as necessary to capture the entire dwell time per hopping channel.</li> <li>- Detector = Peak.</li> <li>- Trace mode = max hold.</li> <li>- If possible, use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation.</li> </ul>										
Test Date	06/18/2016 – 06/22/2016	<table border="0"> <tr> <td>Environmental condition</td> <td>Temperature</td> <td>21°C</td> </tr> <tr> <td></td> <td>Relative Humidity</td> <td>46%</td> </tr> <tr> <td></td> <td>Atmospheric Pressure</td> <td>1019mbar</td> </tr> </table>	Environmental condition	Temperature	21°C		Relative Humidity	46%		Atmospheric Pressure	1019mbar
Environmental condition	Temperature	21°C									
	Relative Humidity	46%									
	Atmospheric Pressure	1019mbar									
Remark	DH5 is the worst case Dwell Time=Pulse time*(1600/6/79)*31.6s										
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail										

**Test Data**     Yes (See below)       N/A

**Test Plot**     Yes (See below)       N/A

**Test was done by Chen Ge at RF test site.**

**Bluetooth BDR Test Mode**


Channel	Channel Frequency (MHz)	On Time (mSec)	Dwell Time (Sec)	Limit (Sec)
Low	2402	2.90	0.30	0.4
Mid	2441	2.90	0.30	0.4
High	2480	2.90	0.30	0.4

**Bluetooth EDR Test Mode**

Channel	Channel Frequency (MHz)	On Time (mSec)	Dwell Time (Sec)	Limit (Sec)
Low	2402	2.89	0.30	0.4
Mid	2441	2.90	0.30	0.4
High	2480	2.90	0.30	0.4




**Time of Occupancy Test Plot (Bluetooth BDR/EDR)**

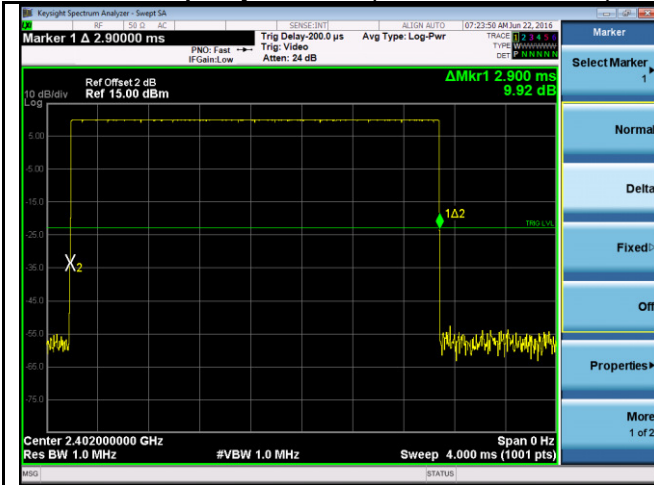


**BDR Low Channel (On-Time)**




**EDR Low Channel (On-Time)**

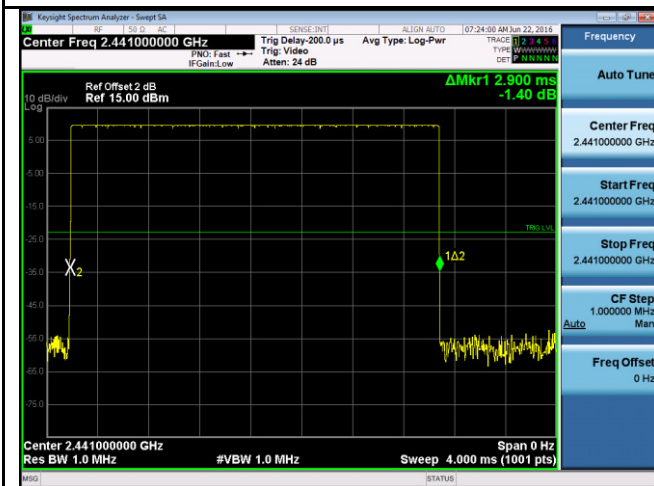


**BDR Middle Channel (On-Time)**

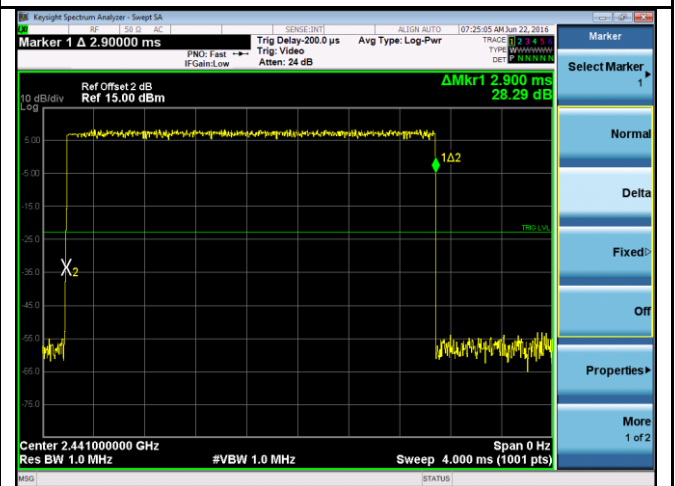

**EDR Middle Channel (On-Time)**

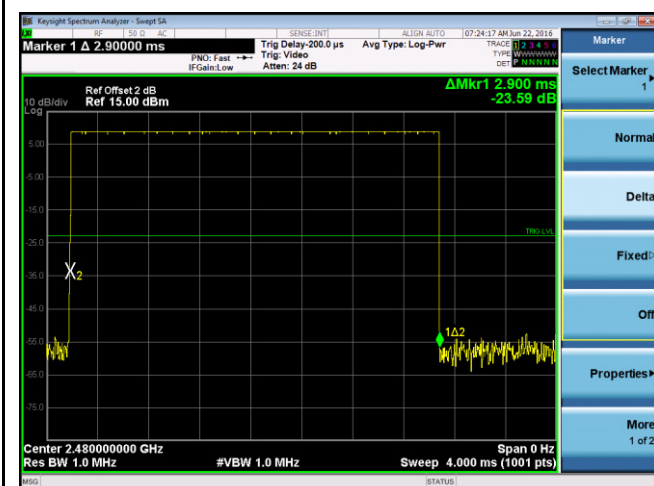


**BDR High Channel (On-Time)**

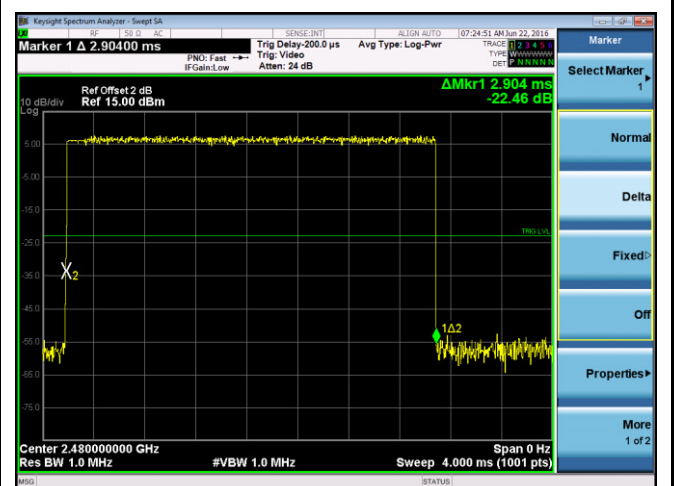

**EDR High Channel (On-Time)**

**10.6 Peak Output Power (Bluetooth BDR/EDR)**

Requirement(s):

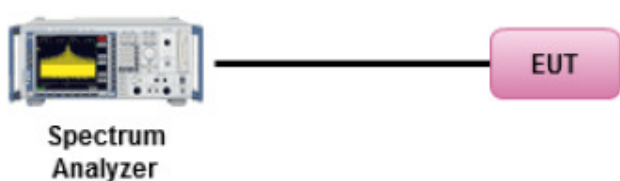Spec	Item	Requirement	Applicable
§ 15.247	a)	For frequency hopping systems in the 2400-2483.5MHz band employing at least 75 hopping channels, and all frequency hopping systems in the 5725-5850MHz band: below 1 Watt (inclusive).	<input checked="" type="checkbox"/>
	b)	Power reduction (antenna gain > 6dBi)	<input type="checkbox"/>
§ 15.247		Frequency hopping systems operated in 2400-2483.5MHz with output power not greater than 125mW, the intervals of hopping channel carrier frequencies shall not be less than 25kHz or two thirds of the 20dB bandwidth of the hopping channel, whichever is greater.	<input type="checkbox"/>
Test Setup	 <p style="text-align: center;">Spectrum Analyzer ————— EUT</p>		
Test Procedure	<p><u>Maximum output power measurement procedure</u></p> <ul style="list-style-type: none"> <li>- Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel.</li> <li>- RBW &gt; 20 dB bandwidth of the emission being measured;</li> <li>- VBW ≥ RBW.</li> <li>- Detector = peak.</li> <li>- Sweep time = auto couple.</li> <li>- Trace mode = max hold.</li> <li>- Allow trace to fully stabilize.</li> <li>- Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power.</li> </ul>		
Test Date	06/18/2016 – 06/22/2016	Environmental condition	Temperature 21°C Relative Humidity 46% Atmospheric Pressure 1019mbar
Remark	NONE		
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data     Yes                       N/A


Test Plot     Yes                       N/A

Test was done by **Chen Ge** at RF test site.

**Output Power measurement results**

Type	Freq (MHz)	Test mode	CH	Conducted Power (dBm)	Limit (dBm)	Result
Output power	2402	Bluetooth BDR	Low	9.24	≤30	Pass
	2441		Mid	8.84	≤30	Pass
	2480		High	8.15	≤30	Pass
	2402	Bluetooth EDR	Low	9.24	≤30	Pass
	2441		Mid	8.84	≤30	Pass
	2480		High	8.15	≤30	Pass


**Peak Output Power Test Plot (Bluetooth BDR/EDR)**

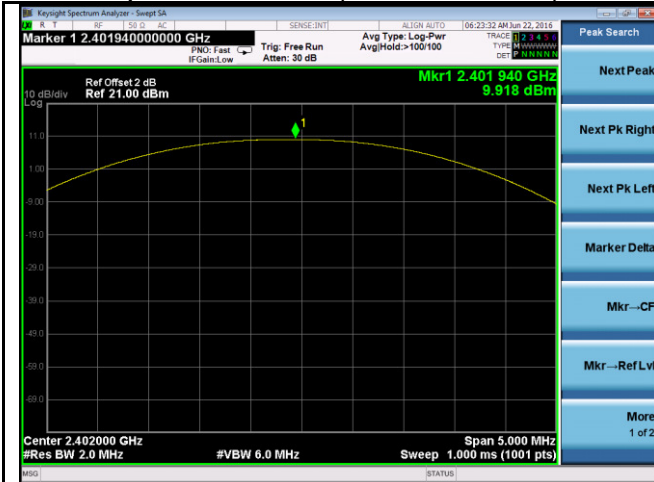


**Output power - BDR 2402MHz**




**Output power - EDR 2402MHz**

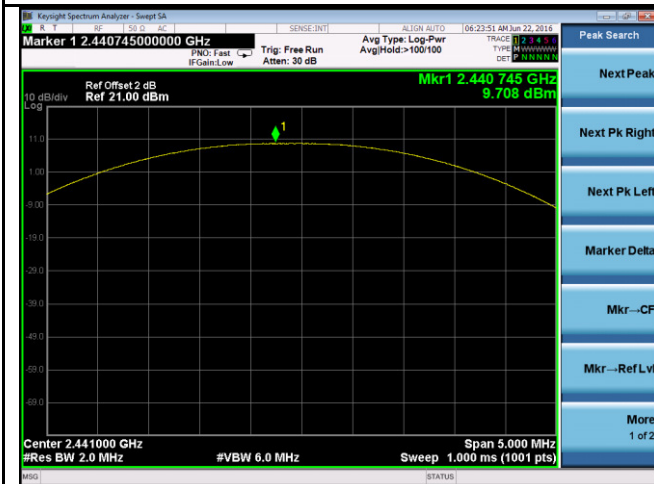

**Output power - BDR 244MHz**

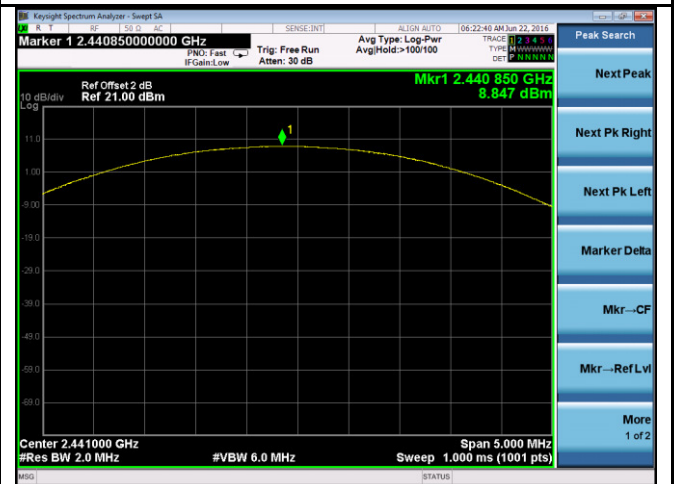

**Output power - EDR 2441MHz**

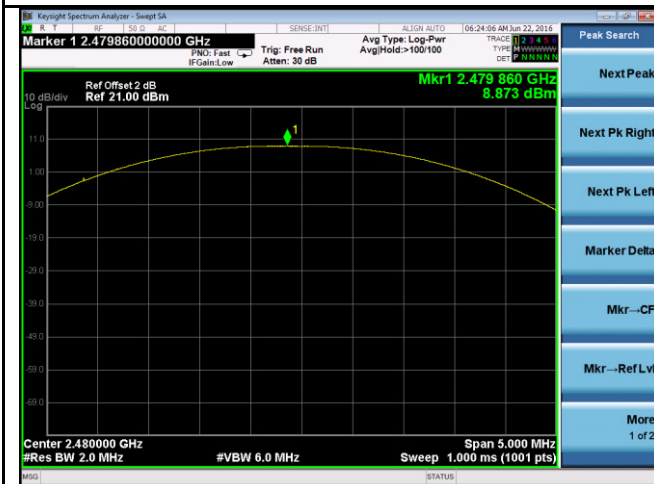


**Output power - BDR 2480MHz**



**Output power - EDR 2480MHz**

### 10.7 Band Edge (Bluetooth BDR/EDR)

**Requirement(s):**

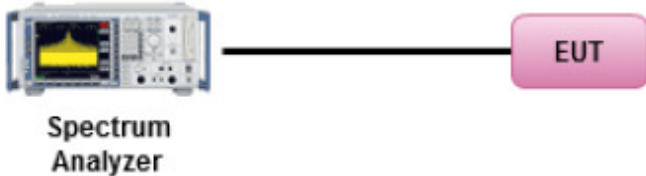
Spec	Item	Requirement	Applicable
§ 15.247	d)	For non-restricted band, In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB or 30dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, determined by the measurement method on output power to be used. Attenuation below the general limits specified in § 15.209 (a) is not required  <input checked="" type="checkbox"/> 20 dB down <input type="checkbox"/> 30 dB down	☒
Test Setup	 <p style="text-align: center;"><b>Spectrum Analyzer</b>      <b>EUT</b></p>		
Test Procedure	<u>Band Edge measurement procedure</u>  1. Set the EUT to maximum power setting and enable the EUT transmit continuously. 2. Band edge emissions must be at least 30 dB down from the highest emission level within the authorized band as a measured. The attenuation shall be 30 dB instead of 20 dB when Peak conducted output power procedure is used. 3. Change modulation and channel bandwidth then repeat step 1 to 2. 4. Measured and record the results in the test report.		
Test Date	09/09/2015	Environmental condition	Temperature      22°C Relative Humidity      46% Atmospheric Pressure      1020mbar
Remark	-		
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

**Test Data**     Yes                                       N/A

**Test Plot**     Yes (See below)                                       N/A

**Test was done by Chen Ge at RF test site.**


**Band Edge Sinlge Test Plots (Bluetooth)**

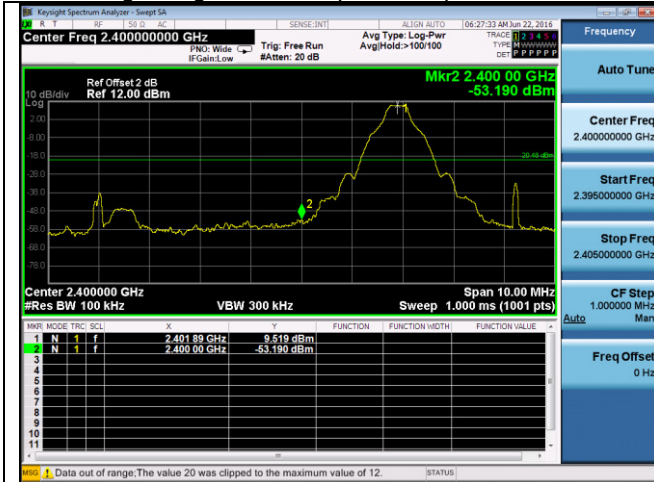

**Band Edge-Sinlge-BDR 2402MHz**



**Band Edge-Sinlge-BDR 2480MHz**

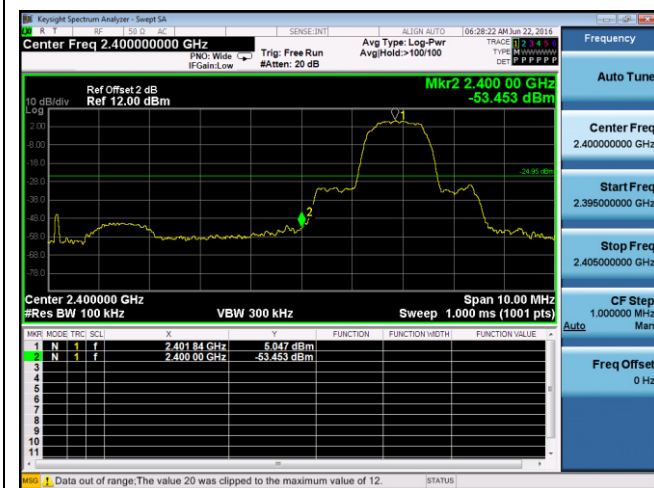

**Band Edge-Sinlge-EDR 2402MHz**



**Band Edge-Sinlge-EDR 2480MHz**

### 10.8 Transmitter Radiated Spurious Emissions Below 1GHz

**Requirement(s):**


Spec	Item	Requirement	Applicable										
47CFR§15.247(d), RSS247(5.5)	a)	<p>Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges</p> <table border="1"> <thead> <tr> <th>Frequency range (MHz)</th> <th>Field Strength (uV/m)</th> </tr> </thead> <tbody> <tr> <td>30 – 88</td> <td>100</td> </tr> <tr> <td>88 – 216</td> <td>150</td> </tr> <tr> <td>216 960</td> <td>200</td> </tr> <tr> <td>Above 960</td> <td>500</td> </tr> </tbody> </table>	Frequency range (MHz)	Field Strength (uV/m)	30 – 88	100	88 – 216	150	216 960	200	Above 960	500	☒
Frequency range (MHz)	Field Strength (uV/m)												
30 – 88	100												
88 – 216	150												
216 960	200												
Above 960	500												
Test Setup													
Procedure		<ol style="list-style-type: none"> <li>The EUT was switched on and allowed to warm up to its normal operating condition.</li> <li>The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: <ol style="list-style-type: none"> <li>Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen.</li> <li>The EUT was then rotated to the direction that gave the maximum emission.</li> <li>Finally, the antenna height was adjusted to the height that gave the maximum emission.</li> </ol> </li> <li>A Quasi-peak measurement was then made for that frequency point.</li> <li>Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.</li> </ol>											
Remark		The EUT was scanned up to 1GHz. Both horizontal and vertical polarities were investigated. The results show only the worst case.											
Result		☒ Pass      ☐ Fail											

**Test Data**    ☒ Yes (See below)      ☐ N/A

**Test Plot**    ☒ Yes (See below)      ☐ N/A

### Radiated Emission Test Results (Below 1GHz) (Omnidirectional Antenna)

Test specification:	Radiated Spurious Emissions (30MHz – 1000MHz)			Result : <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail
Environmental Conditions:	Temp(°C):	22		
	Humidity (%):	37		
	Atmospheric(mbar):	1021		
Mains Power:	120VAC, 60Hz			
Tested by:	Chen Ge			
Test Date:	06/28/2016			
Remarks:	BDR 2441MHz			

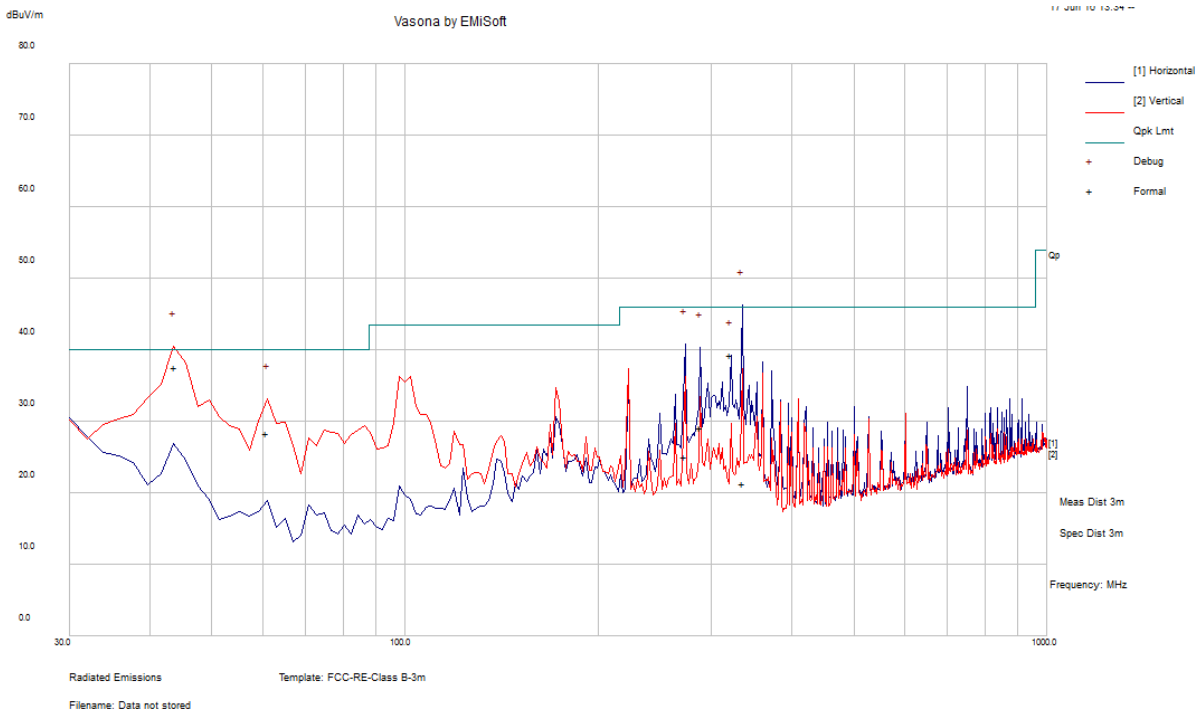


### Quasi Max Measurement

Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	AF (dB)	Level (dBuV/m)	Measurement Type	Pol (V/H)	Hgt (cm)	Azt (Deg)	Limit (dBuV/m)	Margin (dB)	Pass /Fail
43.78	62.91	0.99	-26.35	37.55	Quasi Max	V	103	273	40	-2.45	Pass
335.28	43.6	2.79	-25.15	21.25	Quasi Max	H	154	144	46.02	-24.77	Pass
273.10	48.76	2.53	-26.31	24.99	Quasi Max	H	102	251	46.02	-21.03	Pass
288.78	52.82	2.58	-26.32	29.08	Quasi Max	H	104	62	46.02	-16.94	Pass
321.76	61.79	2.73	-25.25	39.27	Quasi Max	H	100	348	46.02	-6.75	Pass
60.86	58.23	1.21	-31.15	28.28	Quasi Max	V	107	147	40	-11.72	Pass



### 10.9 Transmitter Radiated Spurious Emissions > 1GHz

#### Requirement(s):

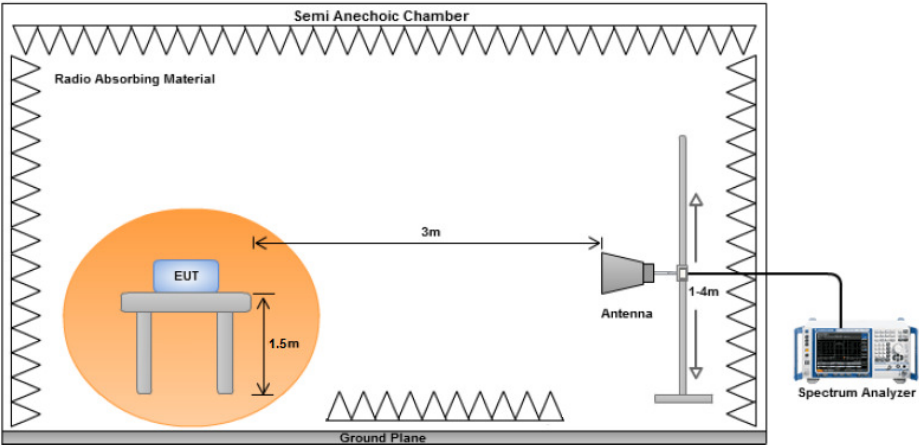Spec	Item	Requirement	Applicable
47CFR§15.247(d), RSS247(5.5)	a)	For non-restricted band, In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB or 30dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, determined by the measurement method on output power to be used. Attenuation below the general limits specified in § 15.209(a) is not required  <input checked="" type="checkbox"/> 20 dB down <input type="checkbox"/> 30 dB down	<input checked="" type="checkbox"/>
	b)	or restricted band, emission must also comply with the radiated emission limits specified in 15.209	<input checked="" type="checkbox"/>
Test Setup			
Procedure	<ol style="list-style-type: none"> <li>1. The EUT was switched on and allowed to warm up to its normal operating condition.</li> <li>2. The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: <ol style="list-style-type: none"> <li>a. Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen.</li> <li>b. The EUT was then rotated to the direction that gave the maximum emission.</li> <li>c. Finally, the antenna height was adjusted to the height that gave the maximum emission.</li> </ol> </li> <li>3. An average measurement was then made for that frequency point.</li> <li>4. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.</li> </ol>		
Remark	The EUT was scanned up to 26GHz. Both horizontal and vertical polarities were investigated. The results show only the worst case.		
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data     Yes (See below)     N/A

Test Plot     Yes (See below)     N/A

Test was done by Chen Ge at 3m and 10m chamber.

## Radiated Emission Test Results

### Bluetooth BDR – 2402MHz

Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	AF (dB)	Level (dBuV/m)	Measurement Type	Pol (V/H)	Hgt (cm)	Azt (Deg)	Limit (dBuV/m)	Margin (dB)	Pass /Fail
7202.74	40.13	7.36	-11.59	35.9	Peak Max	V	202	267	74	-38.1	Pass
9607.57	39.81	7.89	-10.42	37.28	Peak Max	H	163	227	74	-36.72	Pass
4803.41	39.97	7.04	-17.29	29.71	Peak Max	H	190	0	74	-44.29	Pass
7202.74	27.76	7.36	-11.59	23.54	Average Max	V	202	267	54	-30.46	Pass
9607.57	28.19	7.89	-10.42	25.66	Average Max	H	163	227	54	-28.34	Pass
4803.41	27.47	7.04	-17.29	17.21	Average Max	H	190	0	54	-36.79	Pass

### Bluetooth BDR – 2441MHz

Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	AF (dB)	Level (dBuV/m)	Measurement Type	Pol (V/H)	Hgt (cm)	Azt (Deg)	Limit (dBuV/m)	Margin (dB)	Pass /Fail
7324.23	39.86	7.34	-11.53	35.66	Peak Max	V	161	146	74	-38.34	Pass
9766.40	39.58	7.95	-10.3	37.24	Peak Max	V	99	210	74	-36.76	Pass
4881.08	40.34	7.06	-17.07	30.33	Peak Max	H	167	248	74	-43.67	Pass
7324.23	27.6	7.34	-11.53	23.4	Average Max	V	161	146	54	-30.6	Pass
9766.40	27.19	7.95	-10.3	24.85	Average Max	V	99	210	54	-29.16	Pass
4881.08	27.74	7.06	-17.07	17.72	Average Max	H	167	248	54	-36.28	Pass

### Bluetooth BDR – 2480MHz

Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	AF (dB)	Level (dBuV/m)	Measurement Type	Pol (V/H)	Hgt (cm)	Azt (Deg)	Limit (dBuV/m)	Margin (dB)	Pass /Fail
7440.37	39.88	7.32	-11.44	35.76	Peak Max	H	217	81	74	-38.24	Pass
9922.34	39.84	8.02	-10.16	37.7	Peak Max	V	102	177	74	-36.3	Pass
4959.89	39.74	7.08	-16.89	29.93	Peak Max	H	182	145	74	-44.07	Pass
7440.37	27.64	7.32	-11.44	23.51	Average Max	H	217	81	54	-30.49	Pass
9922.34	27.66	8.02	-10.16	25.52	Average Max	H	178	8	54	-28.48	Pass
4959.89	27.99	7.08	-16.89	18.18	Average Max	H	182	145	54	-35.82	Pass

**EDR – 2402MHz**

Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	AF (dB)	Level (dBuV/m)	Measurement Type	Pol (V/H)	Hgt (cm)	Azt (Deg)	Limit (dBuV/m)	Margin (dB)	Pass /Fail
9606.07	39.27	7.89	-10.42	36.73	Peak Max	H	101	194	74	-37.27	Pass
7203.22	39.34	7.36	-11.59	35.11	Peak Max	V	210	164	74	-38.89	Pass
4803.48	39.39	7.04	-17.29	29.13	Peak Max	H	165	274	74	-44.87	Pass
9606.07	27.78	7.89	-10.42	25.24	Average Max	H	101	194	54	-28.76	Pass
7203.22	27.61	7.36	-11.59	23.39	Average Max	V	210	164	54	-30.61	Pass
4803.48	27.23	7.04	-17.29	16.97	Average Max	H	165	274	54	-37.03	Pass


**EDR – 2441MHz**

Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	AF (dB)	Level (dBuV/m)	Measurement Type	Pol (V/H)	Hgt (cm)	Azt (Deg)	Limit (dBuV/m)	Margin (dB)	Pass /Fail
9766.80	39.7	7.95	-10.3	37.36	Peak Max	V	167	290	74	-36.64	Pass
7322.86	39.31	7.34	-11.53	35.12	Peak Max	V	156	124	74	-38.88	Pass
4881.92	40.31	7.06	-17.07	30.29	Peak Max	H	203	105	74	-43.71	Pass
9766.80	27.42	7.95	-10.3	25.08	Average Max	V	167	290	54	-28.92	Pass
7322.86	27.54	7.34	-11.53	23.35	Average Max	V	156	124	54	-30.65	Pass
4881.92	27.71	7.06	-17.07	17.7	Average Max	H	203	105	54	-36.3	Pass


**EDR – 2480MHz**

Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	AF (dB)	Level (dBuV/m)	Measurement Type	Pol (V/H)	Hgt (cm)	Azt (Deg)	Limit (dBuV/m)	Margin (dB)	Pass /Fail
9921.94	39.67	8.02	-10.16	37.53	Peak Max	V	196	260	74	-36.47	Pass
7440.64	39.24	7.32	-11.44	35.12	Peak Max	H	178	290	74	-38.88	Pass
4958.64	38.7	7.08	-16.89	28.89	Peak Max	H	244	177	74	-45.11	Pass
9921.94	27.67	8.02	-10.16	25.53	Average Max	V	196	260	54	-28.47	Pass
7440.64	27.53	7.32	-11.44	23.41	Average Max	H	178	290	54	-30.59	Pass
4958.64	26.47	7.08	-16.89	16.66	Average Max	H	244	177	54	-37.35	Pass


**Restricted Band Test plot (Bluetooth BDR/EDR)**

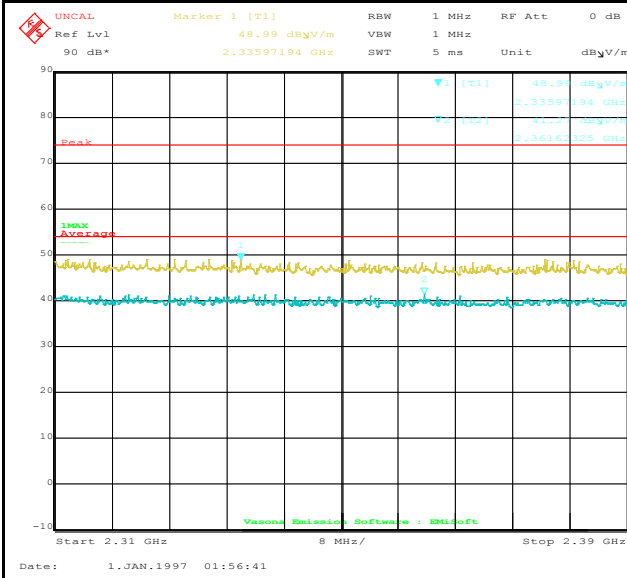


**Restricted Band BDR 2402MHz**

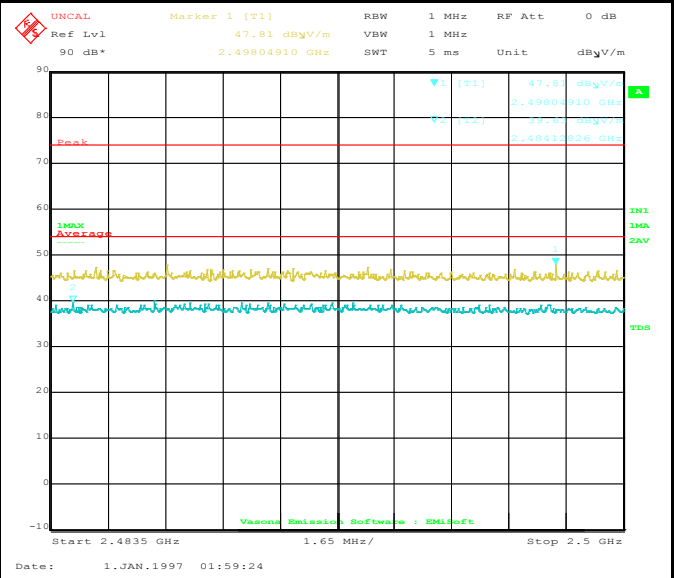

**Restricted Band BDR 2480MHz**

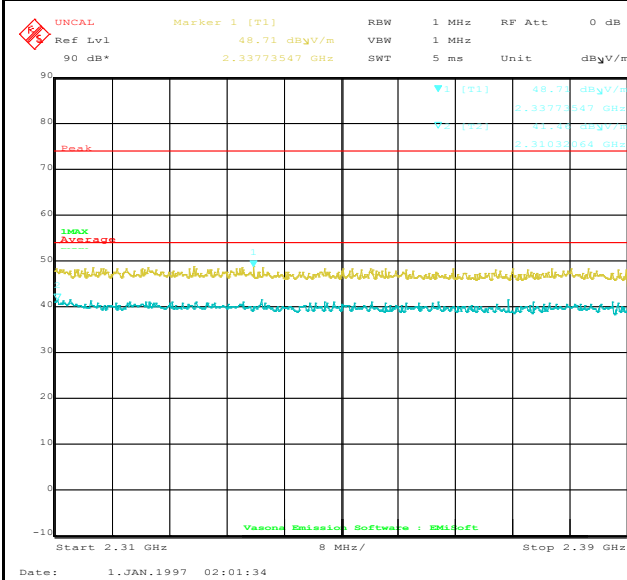

**Restricted Band EDR 2402MHz**

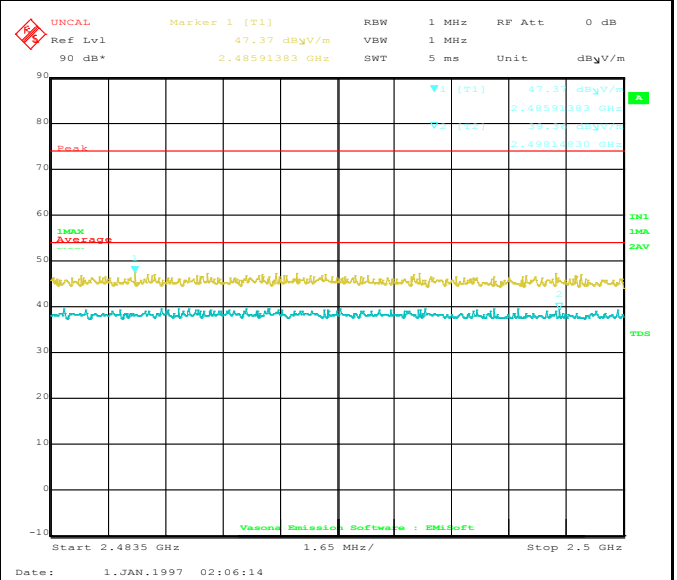
























**Restricted Band EDR 2480MHz**

### Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Cycle	Cal Due	In use
<b>Conducted Emissions</b>						
R & S Receiver	ESIB 40	100179	06/08/2016	1 Year	06/08/2017	<input checked="" type="checkbox"/>
CHASE LISN	MN2050B	1018	08/07/2015	1 Year	08/07/2016	<input checked="" type="checkbox"/>
<b>Radiated Emissions</b>						
R & S Receiver	ESIB 40	1018	08/07/2015	1 Year	08/07/2016	<input checked="" type="checkbox"/>
Bi-Log antenna (30MHz~2GHz)	JB1	A030702	08/12/2015	1 Year	08/12/2016	<input checked="" type="checkbox"/>
Horn Antenna (1GHz~26GHz)	3115	100059	08/25/2015	1 Year	08/25/2016	<input checked="" type="checkbox"/>
Pre-Amplifier	LPA-6-30	11140711	02/10/2016	1 Year	02/10/2017	<input checked="" type="checkbox"/>
3 Meters SAC	3M	N/A	08/08/2015	1 Year	08/08/2016	<input checked="" type="checkbox"/>
10 Meters SAC	10M	N/A	09/05/2015	1 Year	09/05/2016	<input checked="" type="checkbox"/>
<b>RF Conducted Measurement</b>						
Spectrum Analyzer	N9010A	10SL0219	08/20/2015	1 Year	08/20/2016	<input checked="" type="checkbox"/>
R & S Receiver	ESIB 40	100179	06/08/2016	1 Year	06/08/2017	<input checked="" type="checkbox"/>
ETS-Lingren USB RF Power Sensor	7002-006	10SL0190	09/03/2015	1 Year	09/03/2016	<input checked="" type="checkbox"/>

## Annex B. SIEMIC Accreditation

Accreditations	Document	Scope / Remark
ISO 17025 (A2LA)		Please see the documents for the detailed scope
ISO Guide 65 (A2LA)		Please see the documents for the detailed scope
TCB Designation		<a href="#">A1</a> , <a href="#">A2</a> , <a href="#">A3</a> , <a href="#">A4</a> , <a href="#">B1</a> , <a href="#">B2</a> , <a href="#">B3</a> , <a href="#">B4</a> , C
FCC DoC Accreditation		FCC Declaration of Conformity Accreditation
FCC Site Registration		3 meter site
FCC Site Registration		10 meter site
IC Site Registration		3 meter site
IC Site Registration		10 meter site
EU NB		<b>Radio &amp; Telecommunications Terminal Equipment:</b> EN45001 – EN ISO/IEC 17025
		<b>Electromagnetic Compatibility:</b> EN45001 – EN ISO/IEC 17025
Singapore iDA CB(Certification Body)	 	<a href="#">Phase I</a> , <a href="#">Phase II</a>
Vietnam MIC CAB Accreditation		Please see the document for the detailed scope
Hong Kong OFCA		<b>(Phase II)</b> OFCA Foreign Certification Body for Radio and Telecom
		<b>(Phase I)</b> Conformity Assessment Body for Radio and Telecom
Industry Canada CAB		<b>Radio:</b> Scope A – All Radio Standard Specification in Category I
		<b>Telecom:</b> CS-03 Part I, II, V, VI, VII, VIII

Japan Recognized Certification Body Designation		<p><b>Radio:</b> A1. Terminal equipment for purpose of calling</p> <p><b>Telecom:</b> B1. Specified radio equipment specified in Article 38-2, Paragraph 1, Item 1 of the Radio Law</p>
Korea CAB Accreditation		<p><b>EMI:</b> KCC Notice 2008-39, RRL Notice 2008-3: CA Procedures for EMI KN22: Test Method for EMI</p> <p><b>EMS:</b> KCC Notice 2008-38, RRL Notice 2008-4: CA Procedures for EMS KN24, KN61000-4-2, -4-3, -4-4, -4-5, -4-6, -4-8, -4-11: Test Method for EMS</p>
		<p><b>Radio:</b> RRL Notice 2008-26, RRL Notice 2008-2, RRL Notice 2008-10, RRL Notice 2007-49, RRL Notice 2007-20, RRL Notice 2007-21, RRL Notice 2007-80, RRL Notice 2004-68</p> <p><b>Telecom:</b> President Notice 20664, RRL Notice 2007-30, RRL Notice 2008-7 with attachments 1, 3, 5, 6; President Notice 20664, RRL Notice 2008-7 with attachment 4</p>
Taiwan NCC CAB Recognition		LP0002, PSTN01, ADSL01, ID0002, IS6100, CNS14336, PLMN07, PLMN01, PLMN08
Taiwan BSMI CAB Recognition		CNS 13438
Japan VCCI		<p>R-3083: Radiation 3 meter site</p> <p>C-3421: Main Ports Conducted Interference Measurement</p> <p>T-1597: Telecommunication Ports Conducted Interference Measurement</p>
Australia CAB Recognition		<p><b>EMC:</b> AS/NZS CISPR 11, AS/NZS CISPR 14.1, AS/NZS CISPR22, AS/NZS 61000.6.3, AS/NZS 61000.6.4</p>
		<p><b>Radio communications:</b> AS/NZS 4281, AS/NZS 4268, AS/NZS 4280.1, AS/NZS 4280.2, AS/NZS 4295, AS/NZS 4582, AS/NZS 4583, AS/NZS 4769.1, AS/NZS 4769.2, AS/NZS 4770, AS/NZS 4771</p> <p><b>Telecommunications:</b> AS/ACIF S002:05, AS/ACIF S003:06, AS/ACIF S004:06 AS/ACIF S006:01, AS/ACIF S016:01, AS/ACIF S031:01, AS/ACIF S038:01, AS/ACIF S040:01, AS/ACIF S041:05, AS/ACIF S043.2:06, AS/ACIF S60950.1</p>
Australia NATA Recognition		AS/ACIF S002, AS/ACIF S003, AS/ACIF S004, AS/ACIF S006, AS/ACIF S016, AS/ACIF S031, AS/ACIF S038, AS/ACIF S040, AS/ACIF S041, AS/ACIF S043.2