



RADIO TEST REPORT

Test Report No. : 10382549H-A


Applicant : silex technology, Inc.
Type of Equipment : PCI Express mini card WLAN module
Model No. : SX-PCEAC
FCC ID : N6C-SXPCEAC
Test regulation : FCC Part 15 Subpart E: 2015
(Class II permissive change)
* Radiated Spurious Emission test only
Test Result : Complied

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the above regulation.
4. The test results in this report are traceable to the national or international standards.
5. This test report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.
6. This test report covers Radio technical requirements. It does not cover administrative issues such as Manual or non-Radio test related Requirements. (if applicable)

Date of test: August 23 to 27, 2015

Representative test engineer: S. Matsuyama
Satofumi Matsuyama
Engineer
Consumer Technology Division

Approved by: T. Hataheda
Takahiro Hataheda
Leader
Consumer Technology Division

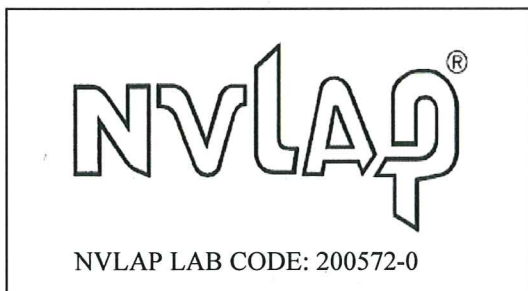

This laboratory is accredited by the NVLAP LAB CODE 200572-0, U.S.A. The tests reported herein have been performed in accordance with its terms of accreditation.
*As for the range of Accreditation in NVLAP, you may refer to the WEB address,
http://japan.ul.com/resources/emc_accredited/

REVISION HISTORY

Original Test Report No.: 10382549H-A

Revision	Test report No.	Date	Page revised	Contents
- (Original)	10382549H-A	April 19, 2016	-	-

CONTENTS	PAGE
SECTION 1: Customer information.....	4
SECTION 2: Equipment under test (E.U.T.).....	4
SECTION 3: Test specification, procedures & results.....	5
SECTION 4: Operation of E.U.T. during testing.....	8
SECTION 5: Radiated Spurious Emission and Band Edge Compliance.....	11
APPENDIX 1: Data of EMI test.....	13
Radiated Spurious Emission	13
Duty cycle.....	53
APPENDIX 2: Test instruments	55
APPENDIX 3: Photographs of test setup.....	56
Radiated Spurious Emission	56
Worst Case Position	57

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

SECTION 1: Customer information

Company Name : silex technology, Inc.
Address : 2-3-1 Hikaridai, Seika-cho, Kyoto 619-0237, Japan
Telephone Number : +81-774-98-3878
Facsimile Number : +81-774-98-3758
Contact Person : Toshiro Kometani

SECTION 2: Equipment under test (E.U.T.)

2.1 Identification of E.U.T.

Type of Equipment : PCI Express mini card WLAN module
Model No. : SX-PCEAC
Serial No. : Refer to Clause 4.2
Rating : DC 3.3 V
Receipt Date of Sample : May 27, 2015
Country of Mass-production : Japan
Condition of EUT : Engineering prototype
(Not for Sale: This sample is equivalent to mass-produced items.)
Modification of EUT : No Modification by the test lab

2.2 Product Description

Model: SX-PCEAC (referred to as the EUT in this report) is a PCI Express mini card WLAN module.

General Specification

Clock frequency(ies) in the system : 40 MHz
Operating Temperature : 0 deg. C - +60 deg. C

Radio Specification

Radio Type : Transceiver
Method of Frequency Generation : Synthesizer
Power Supply (inner) : DC 1.2 V

Type of radio	IEEE802.11a/n/ac (20 M band)	IEEE802.11n/ac (40 M band)	IEEE802.11ac (80 M band)
Frequency of operation	5180 MHz - 5240 MHz 5260 MHz - 5320 MHz 5500 MHz - 5700 MHz 5745 MHz - 5825 MHz	5190 MHz - 5230 MHz 5270 MHz - 5310 MHz 5510 MHz - 5670 MHz 5755 MHz - 5795 MHz	5210 MHz 5290 MHz 5530 MHz - 5610 MHz 5775 MHz
Type of modulation	11a/n: OFDM (64QAM, 16QAM, QPSK, BPSK) 11ac: OFDM (64QAM, 16QAM, QPSK, BPSK, 256QAM)		
Channel spacing	20 MHz	40 MHz	80 MHz
Antenna type	External Antenna		
Antenna connector type	U.FL Alternative connector		
Antenna Gain	2.1dBi		

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

SECTION 3: Test specification, procedures & results

3.1 Test Specification

Test Specification : FCC Part 15 Subpart E: 2015, final revised on November 23, 2015
*Some parts are effective on and after December 17, 2015 or December 23, 2015. The revision does not affect the test specification applied to the EUT.

Title : FCC 47CFR Part15 Radio Frequency Device Subpart E
Unlicensed National Information Infrastructure Devices
Section 15.407 General technical requirements

3.2 Procedures and results

Item	Test Procedure	Specification	Worst margin	Results	Remarks
Spurious Emission Restricted Band Edge	FCC: ANSI C63.10-2013 KDB Publication Number 789033	FCC: 15.407 (b), 15.205 and 15.209	2.0 dB 5350.000 MHz, AV, Vert./Hori. 5354.058 MHz, AV, Vert.	Complied	Radiated (> 30 MHz) *1)
	IC: -	IC: RSS-247 6.2.1 (2) 6.2.2 (2) 6.2.3 (2) 6.2.4 (2)	11570.000 MHz, AV, Hori. 11650.000 MHz, AV, Vert. 11590.000 MHz, AV, Hori. 5715.000 MHz, PK, Hori.		

Note: UL Japan, Inc.'s EMI Work Procedures No. 13-EM-W0420 and 13-EM-W0422.

*1) Radiated test was selected over 30 MHz based on section FCC 15.407 (b) and KDB 789033 D02 G.3.b).

* In case any questions arise about test procedure, ANSI C63.10: 2013 is also referred.

FCC Part 15.31 (e)

This EUT provides stable voltage (DC 1.2 V) constantly to RF Module regardless of input voltage. Therefore, this EUT complies with the requirement.

FCC Part 15.203/212 Antenna requirement

The EUT has a unique coupling/antenna connector (U.FL Alternative connector). Therefore the equipment complies with the requirement of 15.203/212.

3.3 Addition to standard

No addition, exclusion nor deviation has been made from the standard.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

3.4 Uncertainty

EMI

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor $k=2$.
Ise EMC Lab.

Test distance	Radiated emission (±dB) 9 kHz - 30 MHz
3m	3.8 dB
10m	3.7 dB

Polarity	Radiated emission (Below 1GHz)			
	(3 m*)(±dB)		(10 m*)(±dB)	
	30 – 300 MHz	300 – 1000MHz	30 – 300 MHz	300 – 1000MHz
Horizontal	4.8 dB	5.2 dB	4.8 dB	5.0 dB
Vertical	4.5 dB	5.9 dB	4.8 dB	5.1 dB

Radiated emission				
	(3 m*)(±dB)	(1 m*)(±dB)	(0.5 m*)(±dB)	(10 m*)(±dB)
1 – 6GHz	6 – 18GHz	10 – 26.5 GHz	26.5 – 40GHz	1 -18 GHz
5.1 dB	5.3 dB	5.1 dB	5.1 dB	5.3 dB

*Measurement distance

Radiated emission test

The data listed in this report meets the limits unless the uncertainty is taken into consideration.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

3.5 Test Location

UL Japan, Inc. Ise EMC Lab. *NVLAP Lab. code: 200572-0
4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN
Telephone: +81 596 24 8999, Facsimile: +81 596 24 8124

Test site	IC Registration Number	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms	Maximum measurement distance
No.1 semi-anechoic chamber	2973C-1	19.2 x 11.2 x 7.7	7.0 x 6.0	No.1 Power source room	10 m
No.2 semi-anechoic chamber	2973C-2	7.5 x 5.8 x 5.2	4.0 x 4.0	-	3 m
No.3 semi-anechoic chamber	2973C-3	12.0 x 8.5 x 5.9	6.8 x 5.75	No.3 Preparation room	3 m
No.3 shielded room	-	4.0 x 6.0 x 2.7	N/A	-	-
No.4 semi-anechoic chamber	2973C-4	12.0 x 8.5 x 5.9	6.8 x 5.75	No.4 Preparation room	3 m
No.4 shielded room	-	4.0 x 6.0 x 2.7	N/A	-	-
No.5 semi-anechoic chamber	-	6.0 x 6.0 x 3.9	6.0 x 6.0	-	-
No.6 shielded room	-	4.0 x 4.5 x 2.7	4.0 x 4.5	-	-
No.6 measurement room	-	4.75 x 5.4 x 3.0	4.75 x 4.15	-	-
No.7 shielded room	-	4.7 x 7.5 x 2.7	4.7 x 7.5	-	-
No.8 measurement room	-	3.1 x 5.0 x 2.7	N/A	-	-
No.9 measurement room	-	8.8 x 4.6 x 2.8	2.4 x 2.4	-	-
No.11 measurement room	-	6.2 x 4.7 x 3.0	4.8 x 4.6	-	-

* Size of vertical conducting plane (for Conducted Emission test) : 2.0 x 2.0 m for No.1, No.2, No.3, and No.4 semi-anechoic chambers and No.3 and No.4 shielded rooms.

3.6 Data of EMI, Test instruments, and Test set up

Refer to APPENDIX.

UL Japan, Inc. Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN
Telephone : +81 596 24 8999
Facsimile : +81 596 24 8124

SECTION 4: Operation of E.U.T. during testing

4.1 Operating Modes

Test operating mode was determined as follows according to “Section 1 of 6 802.11 a/b/g/n testing - Managing Complex Regulatory Approvals - ” of TCB Council Workshop October 2009 and also was judged the necessity of 802.11ac mode by the pre-test.

Mode	Remarks*
IEEE 802.11a (11a)	6Mbps, PN9
IEEE 802.11n MIMO 20MHz BW (11n-20)	MCS 19(3 stream), PN9
IEEE 802.11n MIMO 40MHz BW (11n-40)	MCS 16(3 stream), PN9
IEEE 802.11ac MIMO 20MHz BW (11ac-20)	MCS 3(3 stream), PN9
IEEE 802.11ac MIMO 40MHz BW (11ac-40)	MCS 0(3 stream), PN9
IEEE 802.11ac MIMO 80MHz BW (11ac-80)	MCS 6(3 stream), PN9

*The worst antenna and condition was determined based on the test result of Maximum Conducted Output Power in original Test Report No.10852538H-A.

*EUT has the power settings by the software as follows;

Power settings:

Power Setting				Power Setting			Power Setting	
	11a	11n-20	11ac-20		11n-40	11ac-40		11ac-80
5180MHz	14.0	14.0	14.0	5190MHz	14.5	14.5	5210MHz	8.0
5220MHz	14.0	14.0	14.0	5230MHz	16.0	16.0	5290MHz	5.0
5240MHz	14.0	14.0	14.0	5270MHz	16.0	16.0	5530MHz	8.0
5260MHz	14.0	14.0	14.0	5310MHz	14.0	14.0	5610MHz	13.0
5300MHz	14.0	14.0	14.0	5510MHz	13.5	13.5	5775MHz	9.5
5320MHz	14.0	14.0	14.0	5550MHz	16.0	16.0		
5500MHz	12.0	12.0	12.0	5670MHz	11.0	11.0		
5580MHz	12.0	12.0	12.0	5755MHz	9.0	9.0		
5700MHz	8.0	8.0	8.0	5795MHz	9.0	9.0		
5745MHz	7.0	7.0	7.0					
5785MHz	7.0	7.0	7.0					
5825MHz	7.0	7.0	7.0					

Software: ART2_ver_4_9_802_1

*This setting of software is the worst case.

Any conditions under the normal use do not exceed the condition of setting.

In addition, end users cannot change the settings of the output power of the product.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

*The details of Operating mode(s)

Test Item	Operating Mode	Tested Antenna Port *3)	Tested Frequency			
			Low Band	Middle Band	Additional Band	Upper Band
Radiated Spurious Emission (Below 1GHz)	11ac-40 Tx *1)	0+1+2	-	5270MHz *1)	-	-
Radiated Spurious Emission (Above 1GHz)	11ac-20 Tx *2)	0+1+2	5180MHz	5260MHz 5320MHz	5500MHz 5580MHz 5700MHz	5745MHz 5785MHz 5825MHz
Band Edge confirmation (Radiated)	11ac-40 Tx *2)	0+1+2	5190MHz	5270MHz 5310MHz	5510MHz 5550MHz 5670MHz	5755MHz 5795MHz
	11ac-80 Tx	0+1+2	5210MHz	5290MHz	5530MHz 5610MHz	5775MHz

*1) The operating mode and tested frequency were tested as a representative, because it had the highest power at antenna terminal test.

*2) The operating mode was tested as a representative, because it had the highest power at antenna terminal test.

UL Japan, Inc.


Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

4.2 Configuration and peripherals

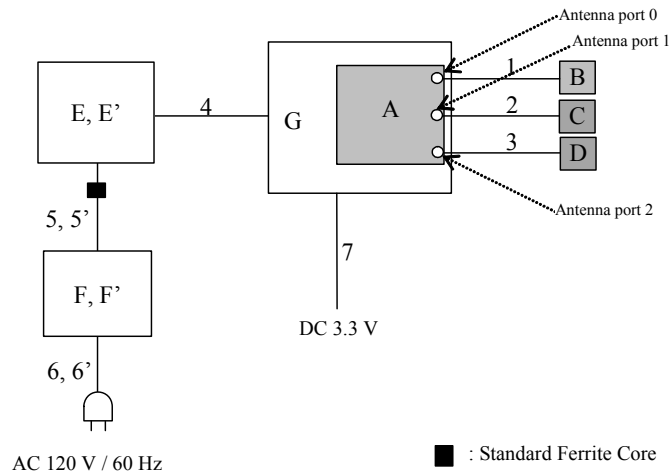

* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.

Description of EUT and Support equipment

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	PCI Express mini card WLAN module	SX-PCEAC	84253F010749	silex technology, Inc.	EUT
B	External antenna	ANTDC-081A	001	Sansei Denki	EUT
C	External antenna	ANTDC-081A	002	Sansei Denki	EUT
D	External antenna	ANTDC-081A	003	Sansei Denki	EUT
E	Laptop PC	Com paq 67306	CNU0092TPJ	HP	-
E'	Laptop PC	E6510	CN-02K3Y4-12961-04P-024E-A00	DELL	*1)
F	AC Adapter	PPP014H-S	F3-0711065670C	HP	-
F'	AC Adapter	LA90PE0-01	CN-03T6XF-71615-1AK-0927-A01	DELL	*1)
G	Jig Board	-	-	silex technology, Inc.	-

*1) Used for Radiated emission (Below 1GHz) test only

List of cables used

No.	Name	Length (m)	Shield		Remarks
			Cable	Connector	
1	Antenna Cable	0.15	Unshielded	Unshielded	-
2	Antenna Cable	0.15	Unshielded	Unshielded	-
3	Antenna Cable	0.15	Unshielded	Unshielded	-
4	Mini PCI Cable	1.00	Shielded	Shielded	-
5	DC Cable	1.80	Unshielded	Unshielded	-
5'	DC Cable	1.80	Unshielded	Unshielded	*1)
6	AC Cable	1.80	Unshielded	Unshielded	-
6'	AC Cable	0.90	Unshielded	Unshielded	*1)
7	DC Cable	2.00	Unshielded	Unshielded	-

*1) Used for Radiated emission (Below 1GHz) test only

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

SECTION 5: Radiated Spurious Emission and Band Edge Compliance

Test Procedure

< Below 1GHz >

EUT was placed on a urethane platform of nominal size, 0.5 m by 1.0 m, raised 0.8 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with a ground plane.

< Above 1GHz >

EUT was placed on a urethane platform of nominal size, 0.5 m by 0.5 m, raised 1.5 m above the conducting ground plane.

The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with absorbent materials lined on a ground plane.

The height of the measuring antenna varied between 1 and 4 m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field strength.

The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer.

The measurements were made with the following detector function of the test receiver and the Spectrum analyzer (in linear mode).

The test was made with the detector (RBW/VBW) in the following table.

When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

< Below 1GHz >

The result also satisfied with the general limits specified in section 15.209 (a).

< Above 1GHz >

Inside of restricted bands (Section 15.205):

Apply to limit in the Section 15.209 (a).

Outside of the restricted bands:

Apply to limit 68.2 dBuV/m, 3 m (-27 dBm e.i.r.p.*) in the Section 15.407 (b) (1) (2) (3).

Apply to limit 68.2 dBuV/m, 3 m (-27 dBm e.i.r.p.*) or

78.2 dBuV/m, 3 m (-17 dBm e.i.r.p.*) in the Section 15.407 (b).

Restricted band edge:

Apply to limit in the Section 15.209 (a).

Since this limit is severer than the limit of the inside of restricted bands.

*Electric field strength to e.i.r.p. conversion:

$$E = \frac{1000000\sqrt{30P}}{3} \text{ (uV/m)} \quad ; P \text{ is the e.i.r.p. (Watts)}$$

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Test Antennas are used as below;

Frequency	30 MHz to 300 MHz	300 MHz to 1 GHz	Above 1 GHz
Antenna Type	Biconical	Logperiodic	Horn

Frequency	Below 1 GHz	Above 1 GHz	
Instrument used	Test Receiver	Spectrum Analyzer	
Detector	QP	Peak	Average
IF Bandwidth	BW: 120 kHz	RBW: 1 MHz VBW: 3 MHz	Method AD *1) RBW: 1 MHz VBW: 3 MHz Detector: Power Averaging (RMS) Trace: ≥ 100 traces Duty factor was added to the results.
Test Distance	3 m	3 m (below 1 GHz), 4.45 m*2) (1 GHz – 10GHz), 1 m*3) (10 GHz – 26.5 GHz), 0.5 m*4) (26.5 GHz – 40 GHz)	

*1) The test method was also referred to KDB 789033 D02 General UNII Test Procedures New Rules v01r01 "Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E (Issued on January 8, 2016)".

*2) Distance Factor: $20 \times \log(4.45 \text{ m}/3.0 \text{ m}) = 3.4 \text{ dB}$

*3) Distance Factor: $20 \times \log(1.0 \text{ m}/3.0 \text{ m}) = -9.5 \text{ dB}$

*4) Distance Factor: $20 \times \log(0.5 \text{ m}/3.0 \text{ m}) = -15.6 \text{ dB}$

- The carrier level and noise levels were confirmed at each position of X, Y and Z axes of EUT (Module and antenna) to see the position of maximum noise, and the test was made at the position that has the maximum noise.

The test results and limit are rounded off to one decimal place, so some differences might be observed.

Measurement range : 30 MHz-40 GHz
Test data : APPENDIX
Test result : Pass

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

APPENDIX 1: Data of EMI test

Radiated Spurious Emission

Test place Ise EMC Lab. No.3 Anechoic Chamber
Report No. 10382549H
Date 08/23/2015 08/25/2015 08/26/2015
Temperature/ Humidity 23deg. C / 53% RH 24deg. C / 67% RH 24deg. C / 58% RH
Engineer Tomoki Matsui Satofumi Matsuyama Satofumi Matsuyama
(1-10GHz) (10-18GHz) (18-40GHz)
Mode 11ac-20BW Tx 5180MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Inside or Outside of Restricted Bands	Remark
Hori	1095.314	PK	58.9	23.8	5.2	34.3	-	53.6	73.9	20.3	Inside	
Hori	2498.927	PK	50.7	26.9	6.1	31.9	-	51.8	73.9	22.1	Inside	
Hori	5150.000	PK	49.2	32.2	7.3	31.2	-	57.5	68.2	10.7	Bandedge	
Hori	5350.000	PK	52.9	32.2	7.4	31.2	-	61.3	68.2	6.9	Bandedge	
Hori	6906.597	PK	49.1	35.7	8.0	31.9	-	60.9	68.2	7.3	Outside	
Hori	10360.000	PK	48.8	38.7	-1.9	32.7	-	52.9	68.2	15.3	Outside	
Hori	15540.000	PK	43.2	39.8	-0.6	32.0	-	50.4	73.9	23.5	Inside	Floor noise
Hori	1095.314	AV	46.7	23.8	5.2	34.3	-	41.4	53.9	12.5	Inside	
Hori	2498.927	AV	33.0	26.9	6.1	31.9	-	34.1	53.9	19.8	Inside	
Hori	5150.000	AV	37.7	32.2	7.3	31.2	0.7	46.7	53.9	7.2	Bandedge	*1)
Hori	5350.000	AV	37.3	32.2	7.4	31.2	0.7	46.4	53.9	7.5	Bandedge	*1)
Hori	15540.000	AV	35.0	39.8	-0.6	32.0	0.7	42.9	53.9	11.0	Inside	Floor noise
Vert	2498.069	PK	52.5	26.9	6.1	31.9	-	53.6	73.9	20.3	Inside	
Vert	5150.000	PK	51.3	32.2	7.3	31.2	-	59.6	68.2	8.6	Bandedge	
Vert	5350.000	PK	51.2	32.2	7.4	31.2	-	59.6	68.2	8.6	Bandedge	
Vert	6906.646	PK	48.0	35.7	8.0	31.9	-	59.8	68.2	8.4	Outside	
Vert	10360.000	PK	51.0	38.7	-1.9	32.7	-	55.1	68.2	13.1	Outside	
Vert	15540.000	PK	43.7	39.8	-0.6	32.0	-	50.9	73.9	23.0	Inside	Floor noise
Vert	2498.069	AV	44.3	26.9	6.1	31.9	-	45.4	53.9	8.5	Inside	
Vert	5150.000	AV	40.7	32.2	7.3	31.2	0.7	49.7	53.9	4.2	Bandedge	*1)
Vert	5350.000	AV	42.0	32.2	7.4	31.2	0.7	51.1	53.9	2.8	Bandedge	*1)
Vert	15540.000	AV	35.0	39.8	-0.6	32.0	0.7	42.9	53.9	11.0	Inside	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

*The 10th harmonic was not seen so the result was its base noise level.

*1) Not Out of Band emission(Leakage Power)

Distance factor: 1 GHz - 10 GHz 20log (4.45 m / 3.0 m) = 3.4 dB
10 GHz - 26.5 GHz 20log (1.0 m / 3.0 m) = -9.5 dB
26.5 GHz - 40 GHz 20log (0.5 m / 3.0 m) = -15.6 dB

UL Japan, Inc.

Ise EMC Lab.



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Test place Ise EMC Lab. No.3 Semi Anechoic Chamber
Report No. 10382549H
Date 08/23/2015
Temperature / Humidity 23deg. C / 53% RH
Engineer Tomoki Matsui
Mode 11ac-20BW Tx 5180MHz

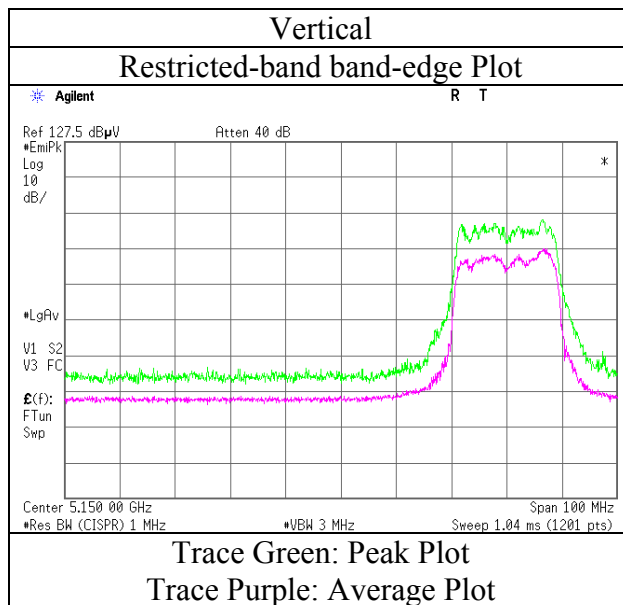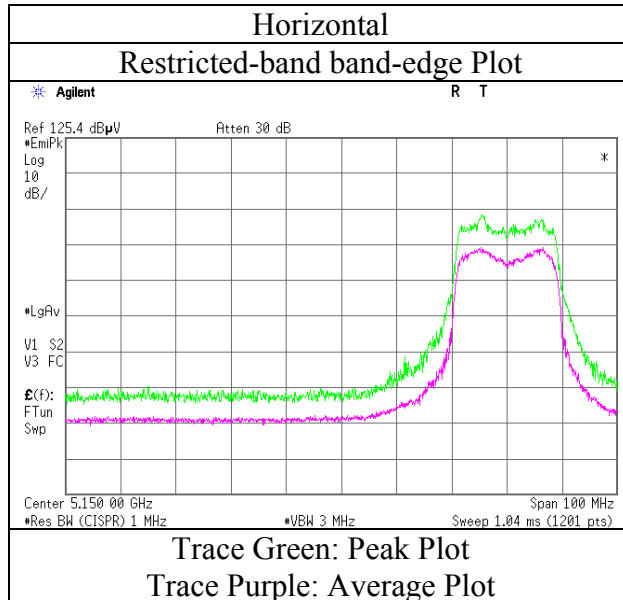

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Test place	Ise EMC Lab. No.3 Anechoic Chamber		
Report No.	10382549H		
Date	08/23/2015	08/25/2015	08/26/2015
Temperature/ Humidity	23deg. C / 53% RH	24deg. C / 67% RH	24deg. C / 58% RH
Engineer	Tomoki Matsui	Satofumi Matsuyama	Satofumi Matsuyama
	(1-10GHz)	(10-18GHz)	(18-40GHz)
Mode	11ac-20BW Tx 5260MHz		

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Inside or Outside of Restricted Bands	Remark
Hori	1095.417	PK	58.9	23.8	5.2	34.3	-	53.6	73.9	20.3	Inside	
Hori	2498.807	PK	48.6	26.9	6.1	31.9	-	49.7	73.9	24.2	Inside	
Hori	5350.000	PK	52.6	32.2	7.4	31.2	-	61.0	68.2	7.2	Bandedge	
Hori	7013.136	PK	44.3	35.9	8.0	32.0	-	56.2	68.2	12.0	Outside	
Hori	10520.000	PK	48.8	38.9	-1.8	32.8	-	53.1	68.2	15.1	Outside	
Hori	15780.000	PK	43.5	39.6	-0.6	32.3	-	50.2	73.9	23.7	Inside	Floor noise
Hori	1095.417	AV	54.4	23.8	1.8	34.3	-	45.7	53.9	8.2	Inside	
Hori	2498.807	AV	39.8	26.9	6.1	31.9	0.7	41.6	53.9	12.3	Inside	
Hori	5350.000	AV	41.9	32.2	7.4	31.2	0.7	51.0	53.9	2.9	Bandedge	
Hori	15780.000	AV	35.0	39.6	-0.6	32.3	-	41.7	53.9	12.2	Inside	Floor noise
Vert	2498.255	PK	53.8	26.9	6.1	31.9	-	54.9	73.9	19.0	Inside	
Vert	5350.000	PK	52.6	32.2	7.4	31.2	-	61.0	68.2	7.2	Bandedge	
Vert	7013.518	PK	42.9	35.9	8.0	32.0	-	54.8	68.2	13.4	Outside	
Vert	10520.000	PK	51.3	38.9	-1.8	32.8	-	55.6	68.2	12.6	Outside	
Vert	15780.000	PK	44.2	39.6	-0.6	32.3	-	50.9	73.9	23.0	Inside	Floor noise
Vert	2498.255	AV	45.1	26.9	6.1	31.9	0.7	46.9	53.9	7.0	Inside	
Vert	5350.000	AV	42.6	32.2	7.4	31.2	0.7	51.7	53.9	2.2	Bandedge	
Vert	15780.000	AV	35.0	39.6	-0.6	32.3	-	41.7	53.9	12.2	Inside	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

*The 10th harmonic was not seen so the result was its base noise level.

Distance factor:
1 GHz - 10 GHz 20log (4.45 m / 3.0 m) = 3.4 dB
10 GHz - 26.5 GHz 20log (1.0 m / 3.0 m) = -9.5 dB
26.5 GHz - 40 GHz 20log (0.5 m / 3.0 m) = -15.6 dB

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Test place Ise EMC Lab. No.3 Anechoic Chamber
Report No. 10382549H
Date 08/23/2015 08/25/2015 08/26/2015
Temperature/ Humidity 23deg. C / 53% RH 24deg. C / 67% RH 24deg. C / 58% RH
Engineer Tomoki Matsui Satofumi Matsuyama Satofumi Matsuyama
(1-10GHz) (10-18GHz) (18-40GHz)
Mode 11ac-20BW Tx 5320MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Inside or Outside of Restricted Bands	Remark
Hori	1095.417	PK	57.9	23.8	5.2	34.3	-	52.6	73.9	21.3	Inside	
Hori	2498.807	PK	48.7	26.9	6.1	31.9	-	49.8	73.9	24.1	Inside	
Hori	5350.000	PK	54.1	32.2	7.4	31.2	-	62.5	68.2	5.7	Bandedge	
Hori	10640.000	PK	51.2	39.1	-1.8	32.9	-	55.6	73.9	18.3	Inside	
Hori	15960.000	PK	44.1	39.4	-0.5	32.5	-	50.5	73.9	23.4	Inside	Floor noise
Hori	1095.417	AV	50.8	23.8	5.2	34.3	-	45.5	53.9	8.4	Inside	
Hori	2498.807	AV	39.0	26.9	6.1	31.9	0.7	40.8	53.9	13.1	Inside	
Hori	5350.000	AV	42.4	32.2	7.4	31.2	0.7	51.5	53.9	2.4	Bandedge	*1)
Hori	10640.000	AV	41.8	39.1	-1.8	32.9	0.7	46.9	53.9	7.0	Inside	
Hori	15960.000	AV	35.1	39.4	-0.5	32.5	-	41.5	53.9	12.4	Inside	Floor noise
Vert	2498.255	PK	53.6	26.9	6.1	31.9	-	54.7	73.9	19.2	Inside	
Vert	5350.000	PK	53.7	32.2	7.4	31.2	-	62.1	68.2	6.1	Bandedge	
Vert	10640.000	PK	55.1	39.1	-1.8	32.9	-	59.5	73.9	14.4	Inside	
Vert	15960.000	PK	44.3	39.4	-0.5	32.5	-	50.7	73.9	23.2	Inside	Floor noise
Vert	2498.255	AV	44.8	26.9	6.1	31.9	0.7	46.6	53.9	7.3	Inside	
Vert	5350.000	AV	42.6	32.2	7.4	31.2	0.7	51.7	53.9	2.2	Bandedge	*1)
Vert	10640.000	AV	45.9	39.1	-1.8	32.9	0.7	51.0	53.9	2.9	Inside	
Vert	15960.000	AV	35.1	39.4	-0.5	32.5	-	41.5	53.9	12.4	Inside	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

*The 10th harmonic was not seen so the result was its base noise level.

*1) Not Out of Band emission(Leakage Power)

Distance factor: 1 GHz - 10 GHz 20log(4.45 m / 3.0 m) = 3.4 dB
10 GHz - 26.5 GHz 20log(1.0 m / 3.0 m) = -9.5 dB
26.5 GHz - 40 GHz 20log(0.5 m / 3.0 m) = -15.6 dB

UL Japan, Inc.

Ise EMC Lab.



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Test place	Ise EMC Lab. No.3 Semi Anechoic Chamber
Report No.	10382549H
Date	08/23/2015
Temperature / Humidity	23deg. C / 53% RH
Engineer	Tomoki Matsui
Mode	11ac-20BW Tx 5320MHz

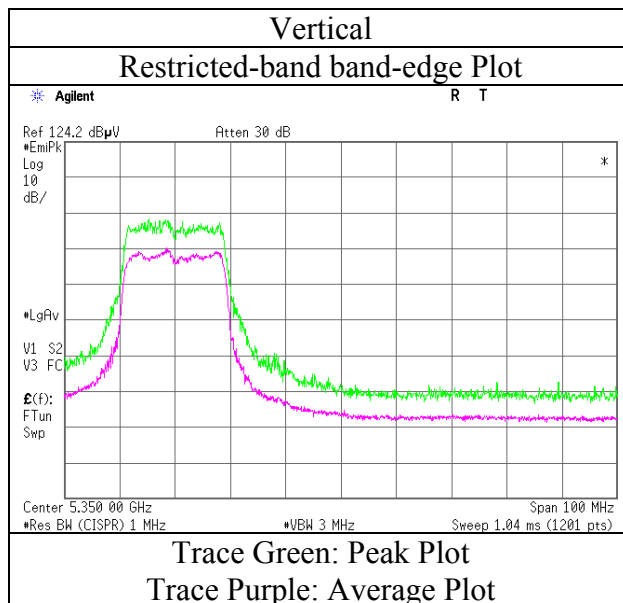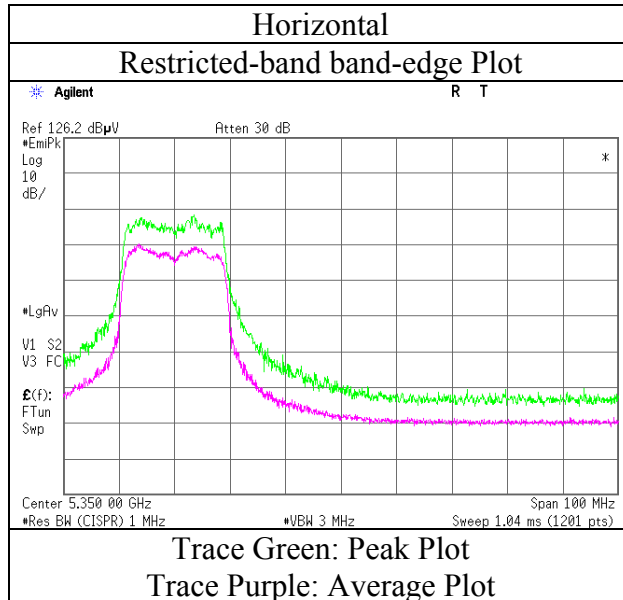

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Test place Ise EMC Lab. No.3 Anechoic Chamber
Report No. 10382549H
Date 08/24/2015 08/25/2015 08/26/2015
Temperature/ Humidity 25deg. C / 57% RH 24deg. C / 67% RH 24deg. C / 58% RH
Engineer Shinichi Miyazono Satofumi Matsuyama Satofumi Matsuyama
(1-10GHz) (10-18GHz) (18-40GHz)
Mode 11ac-20BW Tx 5500MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Inside or Outside of Restricted Bands	Remark
Hori	1095.432	PK	57.6	23.8	5.2	34.3	-	52.3	73.9	21.6	Inside	
Hori	2498.790	PK	47.7	26.9	6.1	31.9	-	48.8	73.9	25.1	Inside	
Hori	3666.668	PK	43.5	29.4	6.7	31.5	-	48.1	73.9	25.8	Inside	
Hori	4959.817	PK	48.1	32.1	7.2	31.2	-	56.2	73.9	17.7	Inside	
Hori	5150.000	PK	48.8	32.2	7.3	31.2	-	57.1	73.9	16.8	Inside	
Hori	5280.170	PK	47.1	32.2	7.4	31.2	-	55.5	68.2	12.7	Outside	
Hori	5350.000	PK	52.0	32.2	7.4	31.2	-	60.4	73.9	13.5	Inside	
Hori	5359.971	PK	54.3	32.2	7.4	31.2	-	62.7	73.9	11.2	Inside	
Hori	5460.000	PK	50.1	32.2	7.4	31.2	-	58.5	73.9	15.4	Inside	
Hori	5470.000	PK	52.2	32.2	7.4	31.2	-	60.6	68.2	7.6	Outside	
Hori	11000.000	PK	48.9	39.9	-1.7	33.0	-	54.1	73.9	19.8	Inside	
Hori	16500.000	PK	43.6	40.4	-0.2	32.2	-	51.6	68.2	16.6	Outside	Floor noise
Hori	1095.432	AV	50.6	23.8	5.2	34.3	0.7	46.0	53.9	7.9	Inside	
Hori	2498.790	AV	38.9	26.9	6.1	31.9	0.7	40.7	53.9	13.2	Inside	
Hori	3666.668	AV	38.4	29.4	6.7	31.5	0.7	43.7	53.9	10.2	Inside	
Hori	4959.817	AV	40.0	32.1	7.2	31.2	0.7	48.8	53.9	5.1	Inside	
Hori	5150.000	AV	38.1	32.2	7.3	31.2	0.7	47.1	53.9	6.8	Inside	
Hori	5350.000	AV	41.1	32.2	7.4	31.2	0.7	50.2	53.9	3.7	Inside	
Hori	5359.971	AV	40.4	32.2	7.4	31.2	0.7	49.5	53.9	4.4	Inside	
Hori	5460.000	AV	41.2	32.2	7.4	31.2	0.7	50.3	53.9	3.6	Inside	
Hori	11000.000	AV	39.0	39.9	-1.7	33.0	0.7	44.9	53.9	9.0	Inside	
Vert	2498.255	PK	53.1	26.9	6.1	31.9	-	54.2	73.9	19.7	Inside	
Vert	3666.813	PK	44.7	29.4	6.7	31.5	-	49.3	73.9	24.6	Inside	
Vert	4959.998	PK	48.0	32.1	7.2	31.2	-	56.1	73.9	17.8	Inside	
Vert	5150.000	PK	48.2	32.2	7.3	31.2	-	56.5	73.9	17.4	Inside	
Vert	5279.888	PK	53.3	32.2	7.4	31.2	-	61.7	68.2	6.5	Outside	
Vert	5350.000	PK	54.4	32.2	7.4	31.2	-	62.8	73.9	11.1	Inside	
Vert	5354.058	PK	55.2	32.2	7.4	31.2	-	63.6	73.9	10.3	Inside	
Vert	5460.000	PK	51.4	32.2	7.4	31.2	-	59.8	73.9	14.1	Inside	
Vert	5470.000	PK	47.7	32.2	7.4	31.2	-	56.1	68.2	12.1	Outside	
Vert	11000.000	PK	51.6	39.9	-1.7	33.0	-	56.8	73.9	17.1	Inside	
Vert	16500.000	PK	43.5	40.4	-0.2	32.2	-	51.5	68.2	16.7	Outside	Floor noise
Vert	2498.255	AV	44.5	26.9	6.1	31.9	0.7	46.3	53.9	7.6	Inside	
Vert	3666.813	AV	39.3	29.4	6.7	31.5	0.7	44.6	53.9	9.3	Inside	
Vert	4959.998	AV	39.8	32.1	7.2	31.2	0.7	48.6	53.9	5.3	Inside	
Vert	5150.000	AV	39.0	32.2	7.3	31.2	0.7	48.0	53.9	5.9	Inside	
Vert	5350.000	AV	42.8	32.2	7.4	31.2	0.7	51.9	53.9	2.0	Inside	
Vert	5354.058	AV	42.8	32.2	7.4	31.2	0.7	51.9	53.9	2.0	Inside	
Vert	5460.000	AV	39.3	32.2	7.4	31.2	0.7	48.4	53.9	5.5	Inside	
Vert	11000.000	AV	45.4	39.9	-1.7	33.0	0.7	51.3	53.9	2.6	Inside	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

*The 10th harmonic was not seen so the result was its base noise level.

Distance factor: 1 GHz - 10 GHz 20log (4.45 m / 3.0 m) = 3.4 dB
10 GHz - 26.5 GHz 20log (1.0 m / 3.0 m) = -9.5 dB
26.5 GHz - 40 GHz 20log (0.5 m / 3.0 m) = -15.6 dB

UL Japan, Inc.

Ise EMC Lab.



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Test place : Ise EMC Lab. No.3 Semi Anechoic Chamber
Report No. : 10382549H
Date : 08/24/2015
Temperature / Humidity : 25deg. C / 57% RH
Engineer : Shinichi Miyazono
Mode : 11ac-20BW Tx 5500MHz

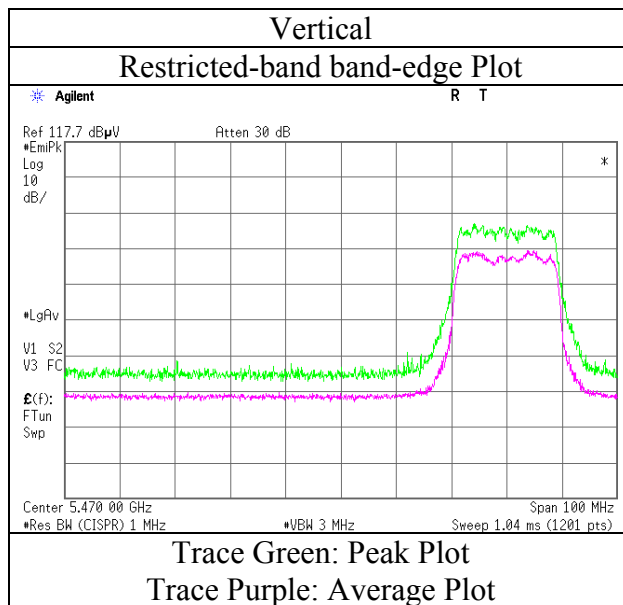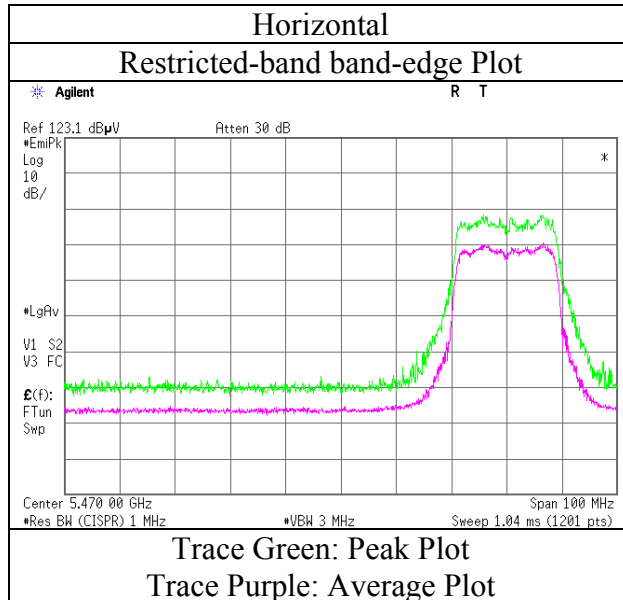

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Test place Ise EMC Lab. No.3 Anechoic Chamber
Report No. 10382549H
Date 08/24/2015 08/25/2015 08/26/2015
Temperature/ Humidity 25deg. C / 57% RH 24deg. C / 67% RH 24deg. C / 58% RH
Engineer Shinichi Miyazono Satofumi Matsuyama Satofumi Matsuyama
(1-10GHz) (10-18GHz) (18-40GHz)
Mode 11ac-20BW Tx 5580MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Inside or Outside of Restricted Bands	Remark
Hori	1095.325	PK	56.8	23.8	5.2	34.3	-	51.5	73.9	22.4	Inside	
Hori	2498.200	PK	47.6	26.9	6.1	31.9	-	48.7	73.9	25.2	Inside	
Hori	3720.073	PK	45.5	29.5	6.7	31.5	-	50.2	73.9	23.7	Inside	
Hori	5150.000	PK	50.1	32.2	7.3	31.2	-	58.4	73.9	15.5	Inside	
Hori	5279.971	PK	54.5	32.2	7.4	31.2	-	62.9	68.2	5.3	Outside	
Hori	5350.000	PK	49.2	32.2	7.4	31.2	-	57.6	73.9	16.3	Inside	
Hori	5460.000	PK	51.1	32.2	7.4	31.2	-	59.5	73.9	14.4	Inside	
Hori	5470.000	PK	49.3	32.2	7.4	31.2	-	57.7	68.2	10.5	Outside	
Hori	11160.000	PK	49.4	40.3	-1.6	32.9	-	55.2	73.9	18.7	Inside	
Hori	16740.000	PK	43.1	40.9	-0.1	32.1	-	51.8	68.2	16.4	Outside	Floor noise
Hori	1095.325	AV	50.1	23.8	5.2	34.3	0.7	45.5	53.9	8.4	Inside	
Hori	2498.200	AV	38.7	26.9	6.1	31.9	0.7	40.5	53.9	13.4	Inside	
Hori	3720.073	AV	41.4	29.5	6.7	31.5	0.7	46.8	53.9	7.1	Inside	
Hori	5150.000	AV	38.5	32.2	7.3	31.2	0.7	47.5	53.9	6.4	Inside	
Hori	5350.000	AV	39.4	32.2	7.4	31.2	0.7	48.5	53.9	5.4	Inside	
Hori	5460.000	AV	38.6	32.2	7.4	31.2	0.7	47.7	53.9	6.2	Inside	
Hori	11160.000	AV	40.7	40.3	-1.6	32.9	0.7	47.2	53.9	6.7	Inside	
Vert	2498.320	PK	51.9	26.9	6.1	31.9	-	53.0	73.9	20.9	Inside	
Vert	3719.933	PK	46.3	29.5	6.7	31.5	-	51.0	73.9	22.9	Inside	
Vert	4960.018	PK	49.5	32.1	7.2	31.2	-	57.6	73.9	16.3	Inside	
Vert	5150.000	PK	53.3	32.2	7.3	31.2	-	61.6	73.9	12.3	Inside	
Vert	5350.000	PK	55.1	32.2	7.4	31.2	-	63.5	73.9	10.4	Inside	
Vert	5460.000	PK	48.7	32.2	7.4	31.2	-	57.1	73.9	16.8	Inside	
Vert	5470.000	PK	47.8	32.2	7.4	31.2	-	56.2	68.2	12.0	Outside	
Vert	11160.000	PK	50.7	40.3	-1.6	32.9	-	56.5	73.9	17.4	Inside	
Vert	16740.000	PK	42.8	40.9	-0.1	32.1	-	51.5	68.2	16.7	Outside	Floor noise
Vert	2498.320	AV	43.9	26.9	6.1	31.9	0.7	45.7	53.9	8.2	Inside	
Vert	3719.933	AV	41.7	29.5	6.7	31.5	0.7	47.1	53.9	6.8	Inside	
Vert	4960.018	AV	38.6	32.1	7.2	31.2	0.7	47.4	53.9	6.5	Inside	
Vert	5150.000	AV	42.0	32.2	7.3	31.2	0.7	51.0	53.9	2.9	Inside	
Vert	5350.000	AV	42.8	32.2	7.4	31.2	0.7	51.9	53.9	2.0	Inside	
Vert	5460.000	AV	36.3	32.2	7.4	31.2	0.7	45.4	53.9	8.5	Inside	
Vert	11160.000	AV	40.2	40.3	-1.6	32.9	0.7	46.7	53.9	7.2	Inside	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

*The 10th harmonic was not seen so the result was its base noise level.

Distance factor: 1 GHz - 10 GHz 20log (4.45 m / 3.0 m) = 3.4 dB
10 GHz - 26.5 GHz 20log (1.0 m / 3.0 m) = -9.5 dB
26.5 GHz - 40 GHz 20log (0.5 m / 3.0 m) = -15.6 dB

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Test place	Ise EMC Lab. No.3 Anechoic Chamber		
Report No.	10382549H		
Date	08/24/2015	08/25/2015	08/26/2015
Temperature/ Humidity	25deg. C / 57% RH	24deg. C / 67% RH	24deg. C / 58% RH
Engineer	Shinichi Miyazono	Satofumi Matsuyama	Satofumi Matsuyama
	(1-10GHz)	(10-18GHz)	(18-40GHz)
Mode	11ac-20BW Tx 5700MHz		

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Inside or Outside of Restricted Bands	Remark
Hori	1095.325	PK	57.9	23.8	5.2	34.3	-	52.6	73.9	21.3	Inside	
Hori	2498.200	PK	49.2	26.9	6.1	31.9	-	50.3	73.9	23.6	Inside	
Hori	3799.961	PK	45.7	29.6	6.8	31.5	-	50.6	73.9	23.3	Inside	
Hori	4960.053	PK	48.2	32.1	7.2	31.2	-	56.3	73.9	17.6	Inside	
Hori	5279.971	PK	54.0	32.2	7.4	31.2	-	62.4	68.2	5.8	Outside	
Hori	5350.000	PK	52.5	32.2	7.4	31.2	-	60.9	73.9	13.0	Inside	
Hori	5460.000	PK	48.2	32.2	7.4	31.2	-	56.6	73.9	17.3	Inside	
Hori	5470.000	PK	47.8	32.2	7.4	31.2	-	56.2	68.2	12.0	Outside	
Hori	11400.000	PK	51.5	40.8	-1.4	32.7	-	58.2	73.9	15.7	Inside	
Hori	17100.000	PK	43.3	41.8	0.1	31.9	-	53.3	68.2	14.9	Outside	Floor noise
Hori	1095.325	AV	49.3	23.8	5.2	34.3	0.7	44.7	53.9	9.2	Inside	
Hori	2498.200	AV	40.2	26.9	6.1	31.9	0.7	42.0	53.9	11.9	Inside	
Hori	3799.961	AV	41.2	29.6	6.8	31.5	0.7	46.8	53.9	7.1	Inside	
Hori	4960.053	AV	40.7	32.1	7.2	31.2	0.7	49.5	53.9	4.4	Inside	
Hori	5350.000	AV	42.7	32.2	7.4	31.2	0.7	51.8	53.9	2.1	Inside	
Hori	5460.000	AV	39.3	32.2	7.4	31.2	0.7	48.4	53.9	5.5	Inside	
Hori	11400.000	AV	42.8	40.8	-1.4	32.7	0.7	50.2	53.9	3.7	Inside	
Vert	1696.829	PK	50.1	25.9	5.7	33.0	-	48.7	73.9	25.2	Inside	
Vert	2498.460	PK	50.0	26.9	6.1	31.9	-	51.1	73.9	22.8	Inside	
Vert	3799.683	PK	47.1	29.6	6.8	31.5	-	52.0	73.9	21.9	Inside	
Vert	4959.972	PK	50.8	32.1	7.2	31.2	-	58.9	73.9	15.0	Inside	
Vert	5340.500	PK	53.0	32.2	7.4	31.2	-	61.4	68.2	6.8	Outside	
Vert	5350.000	PK	53.4	32.2	7.4	31.2	-	61.8	73.9	12.1	Inside	
Vert	5460.000	PK	47.9	32.2	7.4	31.2	-	56.3	73.9	17.6	Inside	
Vert	5470.000	PK	48.0	32.2	7.4	31.2	-	56.4	68.2	11.8	Outside	
Vert	11400.000	PK	52.6	40.8	-1.4	32.7	-	59.3	73.9	14.6	Inside	
Vert	17100.000	PK	43.6	41.8	0.1	31.9	-	53.6	68.2	14.6	Outside	Floor noise
Vert	2498.460	AV	40.0	26.9	6.1	31.9	0.7	41.8	53.9	12.1	Inside	
Vert	3799.683	AV	42.8	29.6	6.8	31.5	0.7	48.4	53.9	5.5	Inside	
Vert	4959.972	AV	42.5	32.1	7.2	31.2	0.7	51.3	53.9	2.6	Inside	
Vert	5350.000	AV	42.1	32.2	7.4	31.2	0.7	51.2	53.9	2.7	Inside	
Vert	5460.000	AV	36.3	32.2	7.4	31.2	0.7	45.4	53.9	8.5	Inside	
Vert	11400.000	AV	41.5	40.8	-1.4	32.7	0.7	48.9	53.9	5.0	Inside	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

*The 10th harmonic was not seen so the result was its base noise level.

Distance factor: 1 GHz - 10 GHz 20log (4.45 m / 3.0 m) = 3.4 dB
10 GHz - 26.5 GHz 20log (1.0 m / 3.0 m) = -9.5 dB
26.5 GHz - 40 GHz 20log (0.5 m / 3.0 m) = -15.6 dB

UL Japan, Inc.

Ise EMC Lab.



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Test place	Ise EMC Lab. No.3 Semi Anechoic Chamber
Report No.	10382549H
Date	08/24/2015
Temperature / Humidity	25deg. C / 57% RH
Engineer	Shinichi Miyazono
Mode	11ac-20BW Tx 5700MHz

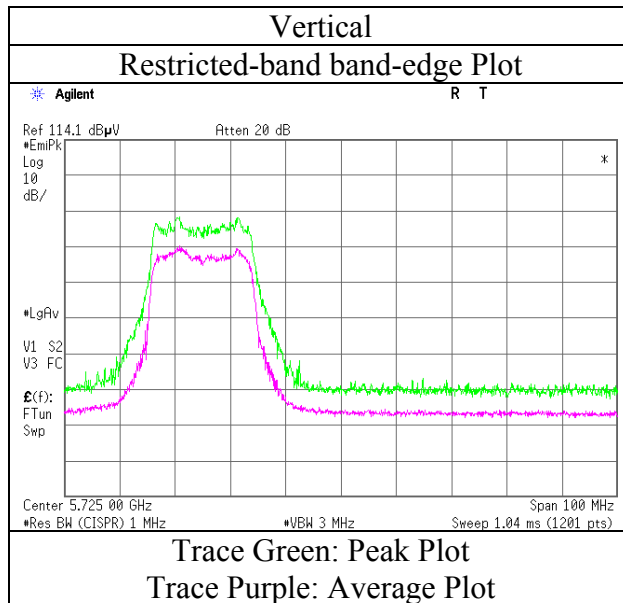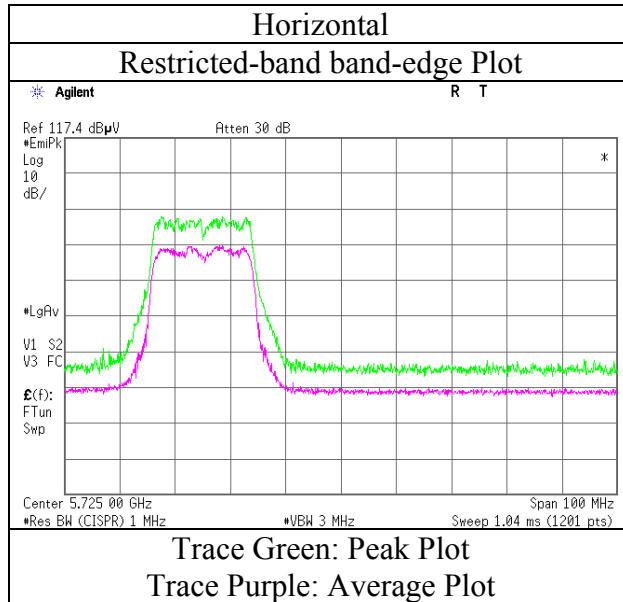

Radiated Spurious Emission

Test place Ise EMC Lab. No.3 Anechoic Chamber
Report No. 10382549H
Date 08/24/2015 08/25/2015 08/26/2015
Temperature/ Humidity 24deg. C / 60% RH 24deg. C / 67% RH 24deg. C / 58% RH
Engineer Satofumi Matsuyama Satofumi Matsuyama Satofumi Matsuyama
(1-10GHz) (10-18GHz) (18-40GHz)
Mode 11ac-20BW Tx 5745MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Inside or Outside of Restricted Bands	Remark
Hori	2498.499	PK	52.6	26.9	6.1	31.9	-	53.7	73.9	20.2	Inside	
Hori	3829.996	PK	44.4	29.7	6.8	31.5	-	49.4	73.9	24.5	Inside	
Hori	4960.008	PK	50.2	32.1	7.2	31.2	-	58.3	73.9	15.6	Inside	
Hori	5279.996	PK	53.1	32.2	7.4	31.2	-	61.5	68.2	6.7	Outside	
Hori	5330.958	PK	56.2	32.2	7.4	31.2	-	64.6	68.2	3.6	Outside	
Hori	5350.000	PK	55.1	32.2	7.4	31.2	-	63.5	73.9	10.4	Inside	
Hori	5715.000	PK	44.8	32.6	7.5	31.2	-	53.7	68.2	14.5	Outside	
Hori	5725.000	PK	48.4	32.6	7.6	31.2	-	57.4	78.2	20.8	Outside	
Hori	11490.000	PK	52.8	41.0	-1.3	32.7	-	59.8	73.9	14.1	Inside	
Hori	17235.000	PK	43.3	42.4	0.2	31.9	-	54.0	68.2	14.2	Outside	Floor noise
Hori	2498.499	AV	44.5	26.9	6.1	31.9	0.7	46.3	53.9	7.6	Inside	
Hori	3829.996	AV	39.2	29.7	6.8	31.5	0.7	44.9	53.9	9.0	Inside	
Hori	4960.008	AV	41.5	32.1	7.2	31.2	0.7	50.3	53.9	3.6	Inside	
Hori	5350.000	AV	42.8	32.2	7.4	31.2	0.7	51.9	53.9	2.0	Inside	
Hori	11490.000	AV	43.0	41.0	-1.3	32.7	0.7	50.7	53.9	3.2	Inside	
Vert	2498.499	PK	50.9	26.9	6.1	31.9	-	52.0	73.9	21.9	Inside	
Vert	3829.996	PK	44.6	29.7	6.8	31.5	-	49.6	73.9	24.3	Inside	
Vert	4960.008	PK	47.6	32.1	7.2	31.2	-	55.7	73.9	18.2	Inside	
Vert	5279.996	PK	54.2	32.2	7.4	31.2	-	62.6	68.2	5.6	Outside	
Vert	5330.958	PK	56.1	32.2	7.4	31.2	-	64.5	68.2	3.7	Outside	
Vert	5350.000	PK	54.2	32.2	7.4	31.2	-	62.6	73.9	11.3	Inside	
Vert	5715.000	PK	40.4	32.6	7.5	31.2	-	49.3	68.2	18.9	Outside	
Vert	5725.000	PK	43.8	32.6	7.6	31.2	-	52.8	78.2	25.4	Outside	
Vert	11490.000	PK	52.1	41.0	-1.3	32.7	-	59.1	73.9	14.8	Inside	
Vert	17235.000	PK	43.4	42.4	0.2	31.9	-	54.1	68.2	14.1	Outside	Floor noise
Vert	2498.499	AV	42.0	26.9	6.1	31.9	0.7	43.8	53.9	10.1	Inside	
Vert	3829.996	AV	39.3	29.7	6.8	31.5	0.7	45.0	53.9	8.9	Inside	
Vert	4960.008	AV	39.7	32.1	7.2	31.2	0.7	48.5	53.9	5.4	Inside	
Vert	5350.000	AV	42.6	32.2	7.4	31.2	0.7	51.7	53.9	2.2	Inside	
Vert	11490.000	AV	42.3	41.0	-1.3	32.7	0.7	50.0	53.9	3.9	Inside	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

*The 10th harmonic was not seen so the result was its base noise level.

Distance factor: 1 GHz - 10 GHz 20log (4.45 m / 3.0 m) = 3.4 dB
10 GHz - 26.5 GHz 20log (1.0 m / 3.0 m) = -9.5 dB
26.5 GHz - 40 GHz 20log (0.5 m / 3.0 m) = -15.6 dB

UL Japan, Inc.

Ise EMC Lab.



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Test place	Ise EMC Lab. No.3 Semi Anechoic Chamber
Report No.	10382549H
Date	08/24/2015
Temperature / Humidity	24deg. C / 60% RH
Engineer	Satofumi Matsuyama
Mode	11ac-20BW Tx 5745MHz

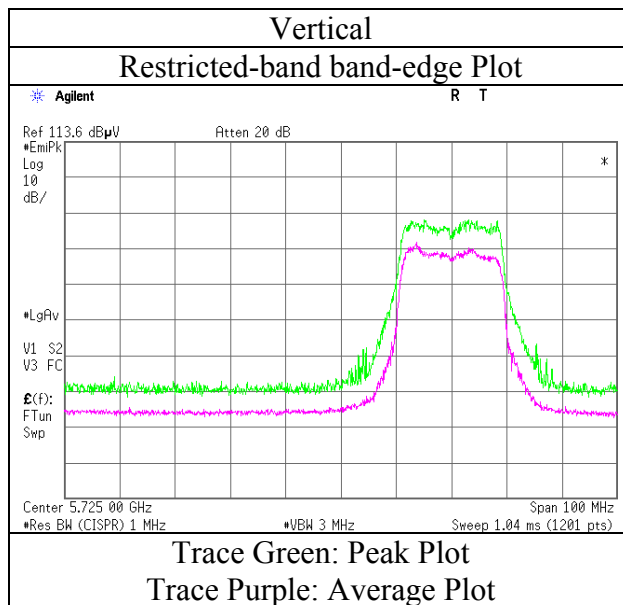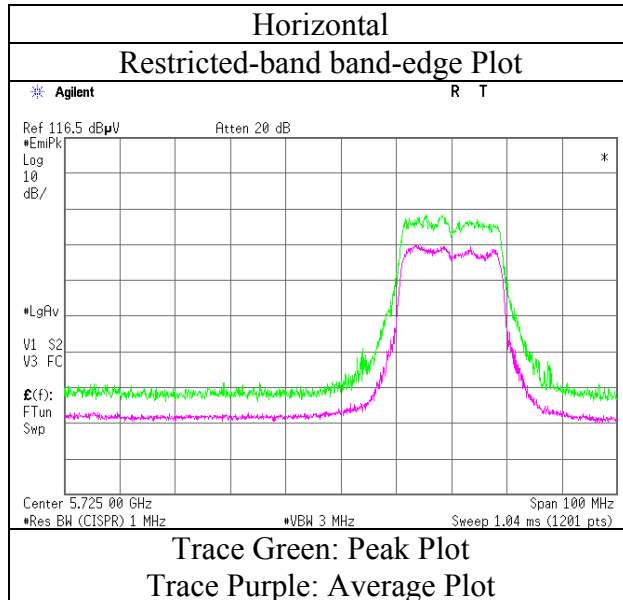

Radiated Spurious Emission

Test place Ise EMC Lab. No.3 Anechoic Chamber
Report No. 10382549H
Date 08/24/2015 08/25/2015 08/26/2015
Temperature/ Humidity 24deg. C / 60% RH 24deg. C / 67% RH 24deg. C / 58% RH
Engineer Satofumi Matsuyama Satofumi Matsuyama Satofumi Matsuyama
(1-10GHz) (10-18GHz) (18-40GHz)
Mode 11ac-20BW Tx 5785MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Inside or Outside of Restricted Bands	Remark
Hori	2488.750	PK	51.9	26.9	6.1	32.0	-	52.9	73.9	21.0	Inside	
Hori	3856.668	PK	44.0	29.7	6.8	31.5	-	49.0	73.9	24.9	Inside	
Hori	5280.002	PK	50.7	32.2	7.4	31.2	-	59.1	68.2	9.1	Outside	
Hori	5340.167	PK	55.3	32.2	7.4	31.2	-	63.7	68.2	4.5	Outside	
Hori	5350.000	PK	54.0	32.2	7.4	31.2	-	62.4	73.9	11.5	Inside	
Hori	11570.000	PK	54.4	40.9	-1.2	32.6	-	61.5	73.9	12.4	Inside	
Hori	17355.000	PK	43.2	42.9	0.2	31.9	-	54.4	68.2	13.8	Outside	Floor noise
Hori	2488.750	AV	42.9	26.9	6.1	32.0	0.7	44.6	53.9	9.3	Inside	
Hori	3856.668	AV	38.1	29.7	6.8	31.5	0.7	43.8	53.9	10.1	Inside	
Hori	5350.000	AV	42.7	32.2	7.4	31.2	0.7	51.8	53.9	2.1	Inside	
Hori	11570.000	AV	44.1	40.9	-1.2	32.6	0.7	51.9	53.9	2.0	Inside	
Vert	2488.750	PK	50.8	26.9	6.1	32.0	-	51.8	73.9	22.1	Inside	
Vert	3856.668	PK	44.6	29.7	6.8	31.5	-	49.6	73.9	24.3	Inside	
Vert	5280.002	PK	52.5	32.2	7.4	31.2	-	60.9	68.2	7.3	Outside	
Vert	5340.167	PK	54.6	32.2	7.4	31.2	-	63.0	68.2	5.2	Outside	
Vert	5350.000	PK	53.5	32.2	7.4	31.2	-	61.9	73.9	12.0	Inside	
Vert	11570.000	PK	53.1	40.9	-1.2	32.6	-	60.2	73.9	13.7	Inside	
Vert	17355.000	PK	43.7	42.9	0.2	31.9	-	54.9	68.2	13.3	Outside	Floor noise
Vert	2488.750	AV	41.1	26.9	6.1	32.0	0.7	42.8	53.9	11.1	Inside	
Vert	3856.668	AV	38.8	29.7	6.8	31.5	0.7	44.5	53.9	9.4	Inside	
Vert	5350.000	AV	42.1	32.2	7.4	31.2	0.7	51.2	53.9	2.7	Inside	
Vert	11570.000	AV	43.4	40.9	-1.2	32.6	0.7	51.2	53.9	2.7	Inside	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

*The 10th harmonic was not seen so the result was its base noise level.

Distance factor: 1 GHz - 10 GHz 20log(4.45 m / 3.0 m) = 3.4 dB
10 GHz - 26.5 GHz 20log(1.0 m / 3.0 m) = -9.5 dB
26.5 GHz - 40 GHz 20log(0.5 m / 3.0 m) = -15.6 dB

UL Japan, Inc.
Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Test place Ise EMC Lab. No.3 Anechoic Chamber
Report No. 10382549H
Date 08/24/2015 08/25/2015 08/26/2015
Temperature/ Humidity 24deg. C / 60% RH 24deg. C / 67% RH 24deg. C / 58% RH
Engineer Satofumi Matsuyama Satofumi Matsuyama Satofumi Matsuyama
(1-10GHz) (10-18GHz) (18-40GHz)
Mode 11ac-20BW Tx 5825MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Inside or Outside of Restricted Bands	Remark
Hori	2498.820	PK	52.2	26.9	6.1	31.9	-	53.3	73.9	20.6	Inside	
Hori	3883.320	PK	45.7	29.8	6.8	31.5	-	50.8	73.9	23.1	Inside	
Hori	5279.998	PK	52.6	32.2	7.4	31.2	-	61.0	68.2	7.2	Outside	
Hori	5344.717	PK	54.8	32.2	7.4	31.2	-	63.2	68.2	5.0	Outside	
Hori	5350.000	PK	54.5	32.2	7.4	31.2	-	62.9	73.9	11.0	Inside	
Hori	5850.000	PK	43.5	32.8	7.6	31.2	-	52.7	78.2	25.5	Outside	
Hori	5860.000	PK	41.8	32.8	7.6	31.2	-	51.0	68.2	17.2	Outside	
Hori	11650.000	PK	53.7	40.8	-1.1	32.6	-	60.8	73.9	13.1	Inside	
Hori	17475.000	PK	43.1	43.4	0.3	31.8	-	55.0	68.2	13.2	Outside	Floor noise
Hori	2498.820	AV	42.8	26.9	6.1	31.9	0.7	44.6	53.9	9.3	Inside	
Hori	3883.320	AV	40.9	29.8	6.8	31.5	0.7	46.7	53.9	7.2	Inside	
Hori	5350.000	AV	42.7	32.2	7.4	31.2	0.7	51.8	53.9	2.1	Inside	
Hori	11650.000	AV	43.7	40.8	-1.1	32.6	0.7	51.5	53.9	2.4	Inside	
Vert	2498.820	PK	50.5	26.9	6.1	31.9	-	51.6	73.9	22.3	Inside	
Vert	3883.320	PK	45.2	29.8	6.8	31.5	-	50.3	73.9	23.6	Inside	
Vert	5279.998	PK	53.6	32.2	7.4	31.2	-	62.0	68.2	6.2	Outside	
Vert	5344.717	PK	54.2	32.2	7.4	31.2	-	62.6	68.2	5.6	Outside	
Vert	5350.000	PK	53.4	32.2	7.4	31.2	-	61.8	73.9	12.1	Inside	
Vert	5850.000	PK	44.7	32.8	7.6	31.2	-	53.9	78.2	24.3	Outside	
Vert	5860.000	PK	42.7	32.8	7.6	31.2	-	51.9	68.2	16.3	Outside	
Vert	11650.000	PK	55.0	40.8	-1.1	32.6	-	62.1	73.9	11.8	Inside	
Vert	17475.000	PK	42.8	43.4	0.3	31.8	-	54.7	68.2	13.5	Outside	Floor noise
Vert	2498.820	AV	41.2	26.9	6.1	31.9	0.7	43.0	53.9	10.9	Inside	
Vert	3883.320	AV	39.5	29.8	6.8	31.5	0.7	45.3	53.9	8.6	Inside	
Vert	5350.000	AV	42.7	32.2	7.4	31.2	0.7	51.8	53.9	2.1	Inside	
Vert	11650.000	AV	44.1	40.8	-1.1	32.6	0.7	51.9	53.9	2.0	Inside	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

*The 10th harmonic was not seen so the result was its base noise level.

Distance factor: 1 GHz - 10 GHz 20log (4.45 m / 3.0 m) = 3.4 dB
10 GHz - 26.5 GHz 20log (1.0 m / 3.0 m) = -9.5 dB
26.5 GHz - 40 GHz 20log (0.5 m / 3.0 m) = -15.6 dB

UL Japan, Inc.

Ise EMC Lab.



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Test place	Ise EMC Lab. No.3 Semi Anechoic Chamber
Report No.	10382549H
Date	08/24/2015
Temperature / Humidity	24deg. C / 60% RH
Engineer	Satofumi Matsuyama
Mode	11ac-20BW Tx 5825MHz

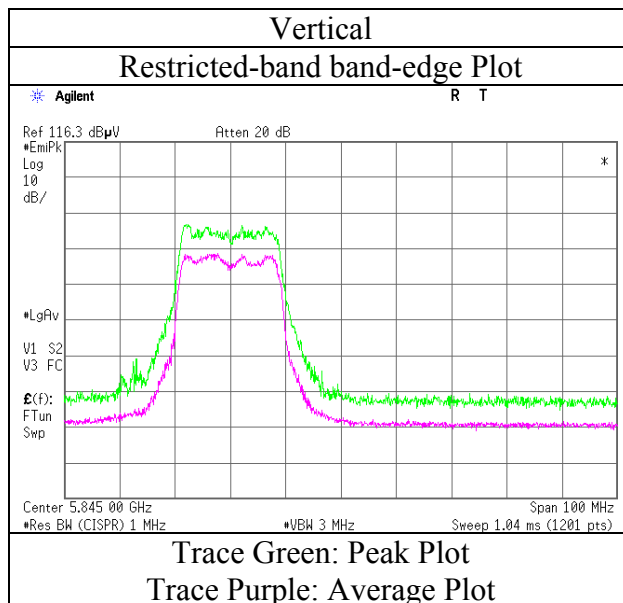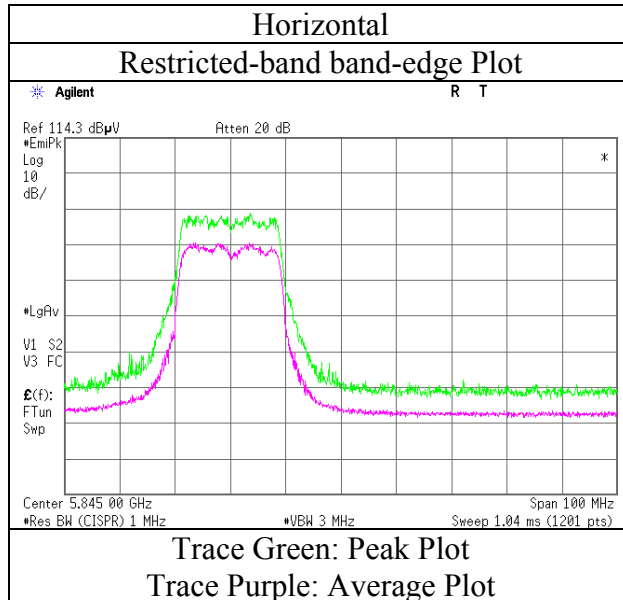

Radiated Spurious Emission

Test place : Ise EMC Lab. No.3 Anechoic Chamber
Report No. : 10382549H
Date : 08/24/2015 08/25/2015 08/26/2015
Temperature/ Humidity : 24deg. C / 60% RH 24deg. C / 67% RH 24deg. C / 58% RH
Engineer : Satofumi Matsuyama Satofumi Matsuyama Satofumi Matsuyama
(1-10GHz) (10-18GHz) (18-40GHz)
Mode : 11ac-40BW Tx 5190MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Inside or Outside of Restricted Bands	Remark
Hori	2488.570	PK	51.9	26.9	6.1	32.0	-	52.9	73.9	21.0	Inside	
Hori	5150.000	PK	52.5	32.2	7.3	31.2	-	60.8	73.9	13.1	Bandedge	
Hori	6919.997	PK	44.7	35.7	8.0	31.9	-	56.5	68.2	11.7	Outside	
Hori	10380.000	PK	47.1	38.7	-1.9	32.7	-	51.2	68.2	17.0	Outside	
Hori	15570.000	PK	42.2	39.8	-0.6	32.0	-	49.4	73.9	24.5	Inside	Floor noise
Hori	2488.570	AV	43.3	26.9	6.1	32.0	1.0	45.3	53.9	8.6	Inside	
Hori	5150.000	AV	39.4	32.2	7.3	31.2	1.0	48.7	53.9	5.2	Bandedge	*1)
Hori	15570.000	AV	34.8	39.8	-0.6	32.0	-	42.0	53.9	11.9	Inside	Floor noise
Vert	2488.570	PK	49.3	26.9	6.1	32.0	-	50.3	73.9	23.6	Inside	
Vert	5150.000	PK	52.9	32.2	7.3	31.2	-	61.2	73.9	12.7	Bandedge	
Vert	6919.997	PK	44.5	35.7	8.0	31.9	-	56.3	68.2	11.9	Outside	
Vert	10380.000	PK	50.2	38.7	-1.9	32.7	-	54.3	68.2	13.9	Outside	
Vert	15570.000	PK	42.9	39.8	-0.6	32.0	-	50.1	73.9	23.8	Inside	Floor noise
Vert	2488.570	AV	40.9	26.9	6.1	32.0	1.0	42.9	53.9	11.0	Inside	
Vert	5150.000	AV	40.2	32.2	7.3	31.2	1.0	49.5	53.9	4.4	Bandedge	*1)
Vert	15570.000	AV	34.8	39.8	-0.6	32.0	-	42.0	53.9	11.9	Inside	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

*The 10th harmonic was not seen so the result was its base noise level.

*1) Not Out of Band emission(Leakage Power)

Distance factor: 1 GHz - 10 GHz 20log (4.45 m / 3.0 m) = 3.4 dB
10 GHz - 26.5 GHz 20log (1.0 m / 3.0 m) = -9.5 dB
26.5 GHz - 40 GHz 20log (0.5 m / 3.0 m) = -15.6 dB

UL Japan, Inc.

Ise EMC Lab.



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Test place	Ise EMC Lab. No.3 Semi Anechoic Chamber
Report No.	10382549H
Date	08/24/2015
Temperature / Humidity	24deg. C / 60% RH
Engineer	Satofumi Matsuyama
Mode	11ac-40BW Tx 5190MHz

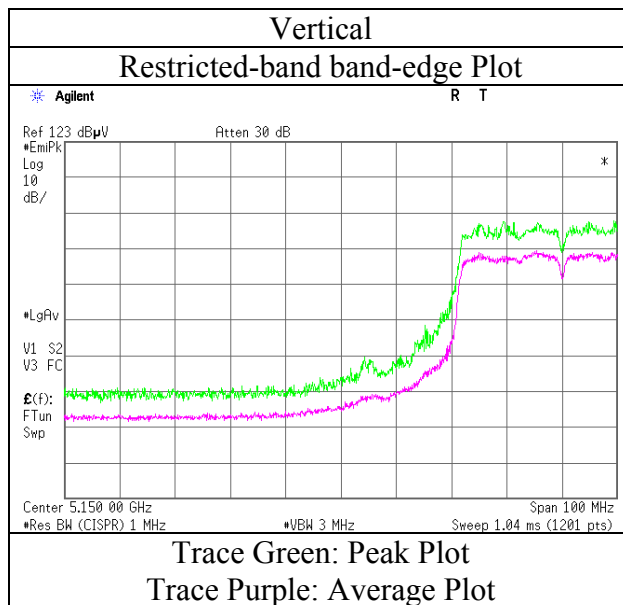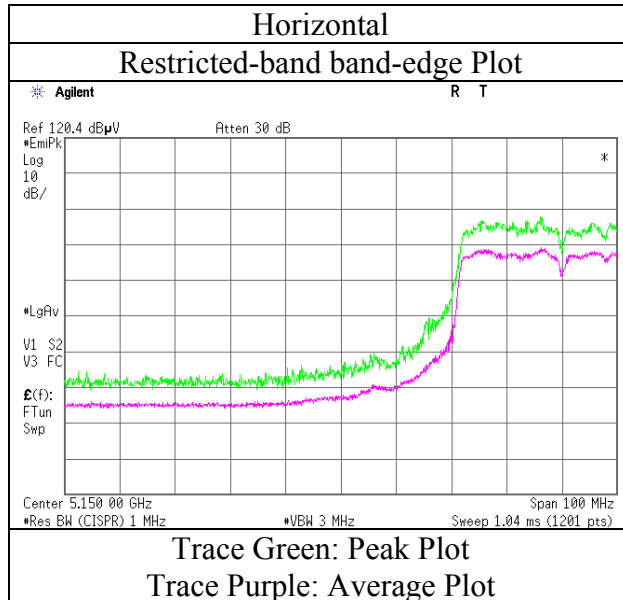

Radiated Spurious Emission

Test place : Ise EMC Lab. No.3 Anechoic Chamber
 Report No. : 10382549H
 Date : 08/24/2015 08/25/2015 08/26/2015 08/27/2015
 Temperature/ Humidity : 24deg. C / 60% RH 24deg. C / 67% RH 24deg. C / 58% RH 20deg. C / 61% RH
 Engineer : Satofumi Matsuyama Satofumi Matsuyama Satofumi Matsuyama Satofumi Matsuyama
 (1-10GHz) (10-18GHz) (18-40GHz) (Below 1GHz)
 Mode : 11ac-40BW Tx 5270MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dBm]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Inside or Outside of Restricted Bands	Remark
Hori	119.995	QP	36.1	12.7	7.6	28.2	-	28.2	43.5	15.3	Inside	
Hori	298.740	QP	40.8	19.5	8.8	27.4	-	41.7	46.0	4.3	Outside	
Hori	499.644	QP	43.8	18.6	9.7	28.5	-	43.6	46.0	2.4	Outside	
Hori	637.546	QP	33.0	20.1	10.4	28.3	-	35.2	46.0	10.8	Outside	
Hori	696.947	QP	34.7	20.6	10.6	28.1	-	37.8	46.0	8.2	Outside	
Hori	896.040	QP	34.9	22.5	11.3	27.2	-	41.5	46.0	4.5	Outside	
Hori	2489.970	PK	52.4	26.9	6.1	32.0	-	53.4	73.9	20.5	Inside	
Hori	5150.000	PK	45.9	32.2	7.3	31.2	-	54.2	73.9	19.7	Bandedge	
Hori	5350.000	PK	45.6	32.2	7.4	31.2	-	54.0	73.9	19.9	Bandedge	
Hori	10540.000	PK	48.5	38.9	-1.8	32.8	-	52.8	68.2	15.4	Outside	
Hori	15810.000	PK	43.6	39.5	-0.6	32.3	-	50.2	73.9	23.7	Inside	Floor noise
Hori	2489.970	AV	43.7	26.9	6.1	32.0	1.0	45.7	53.9	8.2	Inside	
Hori	5150.000	AV	33.5	32.2	7.3	31.2	1.0	42.8	53.9	11.1	Bandedge	*1)
Hori	5350.000	AV	34.4	32.2	7.4	31.2	1.0	43.8	53.9	10.1	Bandedge	*1)
Hori	15810.000	AV	34.9	39.5	-0.6	32.3	-	41.5	53.9	12.4	Inside	Floor noise
Vert	99.622	QP	44.2	10.1	7.4	28.2	-	33.5	43.5	10.0	Outside	
Vert	119.996	QP	40.1	12.7	7.6	28.2	-	32.2	43.5	11.3	Inside	
Vert	167.997	QP	36.3	15.8	8.0	28.0	-	32.1	43.5	11.4	Inside	
Vert	191.995	QP	35.8	16.4	8.1	27.9	-	32.4	43.5	11.1	Outside	
Vert	216.009	QP	33.6	16.7	8.3	27.8	-	30.8	46.0	15.2	Outside	
Vert	239.999	QP	34.4	17.0	8.4	27.6	-	32.2	46.0	13.8	Outside	
Vert	298.737	QP	39.5	19.5	8.8	27.4	-	40.4	46.0	5.6	Outside	
Vert	499.652	QP	43.3	18.6	9.7	28.5	-	43.1	46.0	2.9	Outside	
Vert	696.964	QP	32.7	20.6	10.6	28.1	-	35.8	46.0	10.2	Outside	
Vert	896.042	QP	31.5	22.5	11.3	27.2	-	38.1	46.0	7.9	Outside	
Vert	2489.970	PK	50.4	26.9	6.1	32.0	-	51.4	73.9	22.5	Inside	
Vert	5150.000	PK	45.9	32.2	7.3	31.2	-	54.2	73.9	19.7	Bandedge	
Vert	5350.000	PK	47.6	32.2	7.4	31.2	-	56.0	73.9	17.9	Bandedge	
Vert	10540.000	PK	52.6	38.9	-1.8	32.8	-	56.9	68.2	11.3	Outside	
Vert	15810.000	PK	43.5	39.5	-0.6	32.3	-	50.1	73.9	23.8	Inside	Floor noise
Vert	2489.970	AV	40.6	26.9	6.1	32.0	1.0	42.6	53.9	11.3	Inside	
Vert	5150.000	AV	34.1	32.2	7.3	31.2	1.0	43.4	53.9	10.5	Bandedge	*1)
Vert	5350.000	AV	35.5	32.2	7.4	31.2	1.0	44.9	53.9	9.0	Bandedge	*1)
Vert	15810.000	AV	34.9	39.5	-0.6	32.3	-	41.5	53.9	12.4	Inside	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).



*The 10th harmonic was not seen so the result was its base noise level.

*1) Not Out of Band emission(Leakage Power)

Distance factor: 1 GHz - 10 GHz 20log (4.45 m / 3.0 m) = 3.4 dB
 10 GHz - 26.5 GHz 20log (1.0 m / 3.0 m) = -9.5 dB
 26.5 GHz - 40 GHz 20log (0.5 m / 3.0 m) = -15.6 dB

Radiated Spurious Emission
(Plot data, Worst case)

Test place	Ise EMC Lab. No.3 Anechoic Chamber			
Report No.	10382549H			
Date	08/24/2015	08/25/2015	08/26/2015	08/27/2015
Temperature/ Humidity	24deg. C / 60% RH	24deg. C / 67% RH	24deg. C / 58% RH	20deg. C / 61% RH
Engineer	Satofumi Matsuyama	Satofumi Matsuyama	Satofumi Matsuyama	Satofumi Matsuyama
Mode	(1-10GHz)	(10-18GHz)	(18-40GHz)	(Below 1GHz)
	11ac-40BW Tx 5270MHz			

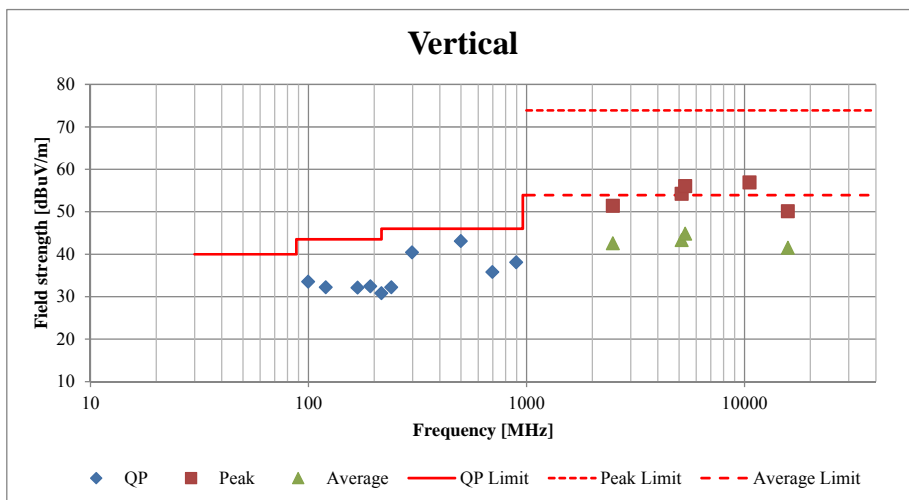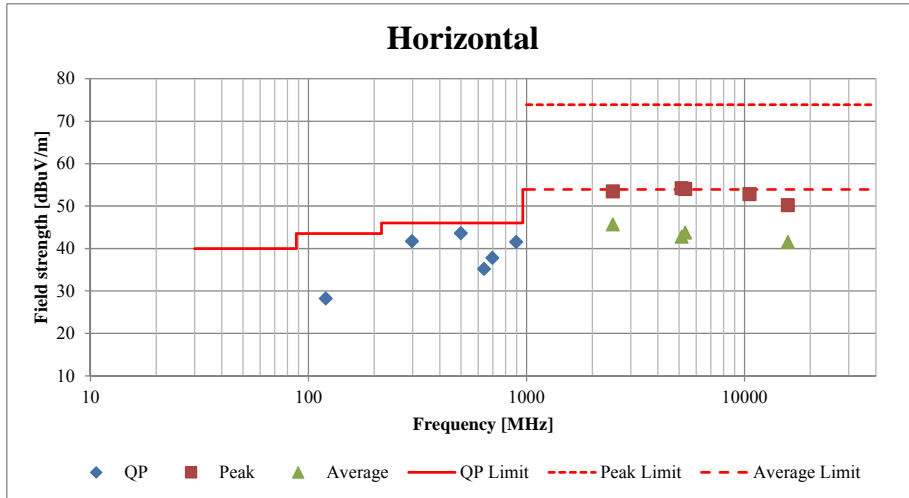

*These plots data contains sufficient number to show the trend of characteristic features for EUT.

Radiated Spurious Emission

Test place Ise EMC Lab. No.3 Anechoic Chamber
Report No. 10382549H
Date 08/24/2015 08/25/2015 08/26/2015
Temperature/ Humidity 24deg. C / 60% RH 24deg. C / 67% RH 24deg. C / 58% RH
Engineer Satofumi Matsuyama Satofumi Matsuyama Satofumi Matsuyama
(1-10GHz) (10-18GHz) (18-40GHz)
Mode 11ac-40BW Tx 5310MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Inside or Outside of Restricted Bands	Remark
Hori	2497.170	PK	52.1	26.9	6.1	31.9	-	53.2	73.9	20.7	Inside	
Hori	5350.000	PK	51.8	32.2	7.4	31.2	-	60.2	73.9	13.7	Bandedge	
Hori	10620.000	PK	46.2	39.1	-1.8	32.8	-	50.7	73.9	23.2	Inside	
Hori	15930.000	PK	42.5	39.4	-0.5	32.4	-	49.0	73.9	24.9	Inside	Floor noise
Hori	2497.170	AV	42.6	26.9	6.1	31.9	1.0	44.7	53.9	9.2	Inside	
Hori	5350.000	AV	37.8	32.2	7.4	31.2	1.0	47.2	53.9	6.7	Bandedge	*1)
Hori	10620.000	AV	36.5	39.1	-1.8	32.8	1.0	42.0	53.9	11.9	Inside	
Hori	15930.000	AV	35.1	39.4	-0.5	32.4	-	41.6	53.9	12.3	Inside	Floor noise
Vert	2497.170	PK	49.6	26.9	6.1	31.9	-	50.7	73.9	23.2	Inside	
Vert	5350.000	PK	57.3	32.2	7.4	31.2	-	65.7	73.9	8.2	Bandedge	
Vert	10620.000	PK	53.1	39.1	-1.8	32.8	-	57.6	73.9	16.3	Inside	
Vert	15930.000	PK	42.6	39.4	-0.5	32.4	-	49.1	73.9	24.8	Inside	Floor noise
Vert	2497.170	AV	40.0	26.9	6.1	31.9	1.0	42.1	53.9	11.8	Inside	
Vert	5350.000	AV	42.4	32.2	7.4	31.2	1.0	51.8	53.9	2.1	Bandedge	*1)
Vert	10620.000	AV	41.9	39.1	-1.8	32.8	1.0	47.4	53.9	6.5	Inside	
Vert	15930.000	AV	35.1	39.4	-0.5	32.4	-	41.6	53.9	12.3	Inside	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

*The 10th harmonic was not seen so the result was its base noise level.

*1) Not Out of Band emission(Leakage Power)

Distance factor: 1 GHz - 10 GHz 20log (4.45 m / 3.0 m) = 3.4 dB
10 GHz - 26.5 GHz 20log (1.0 m / 3.0 m) = -9.5 dB
26.5 GHz - 40 GHz 20log (0.5 m / 3.0 m) = -15.6 dB

UL Japan, Inc.

Ise EMC Lab.



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Test place	Ise EMC Lab. No.3 Semi Anechoic Chamber
Report No.	10382549H
Date	08/24/2015
Temperature / Humidity	24deg. C / 60% RH
Engineer	Satofumi Matsuyama
Mode	11ac-40BW Tx 5310MHz

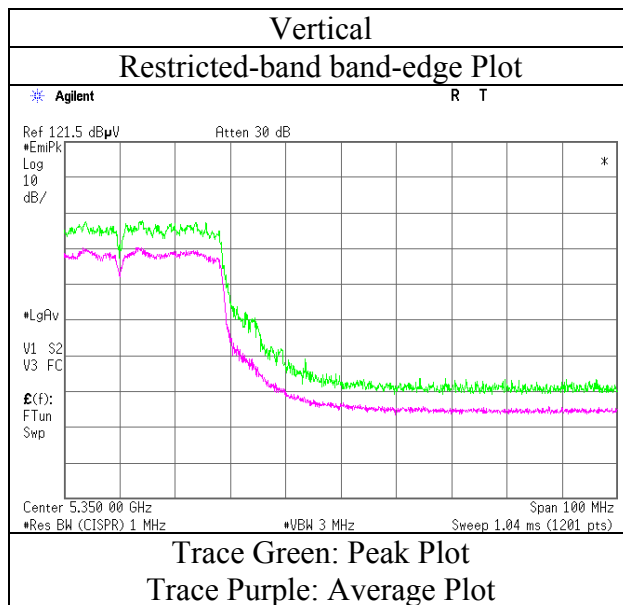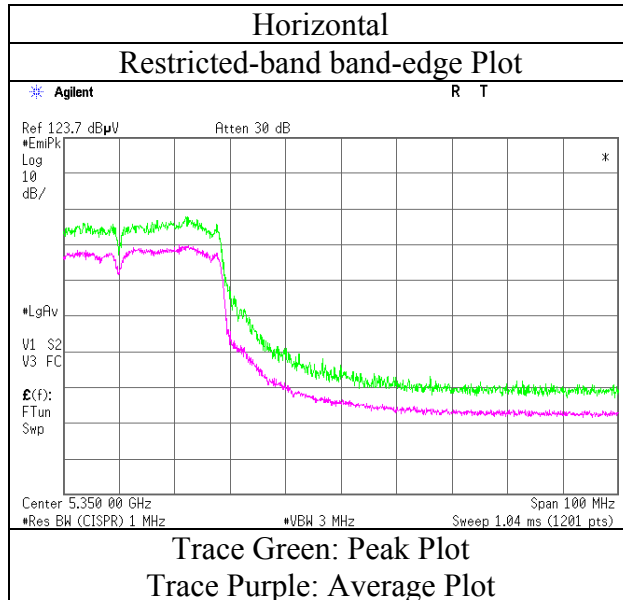

Radiated Spurious Emission

Test place	Ise EMC Lab. No.3 Anechoic Chamber		
Report No.	10382549H		
Date	08/24/2015	08/25/2015	08/26/2015
Temperature/ Humidity	24deg. C / 60% RH	24deg. C / 67% RH	24deg. C / 58% RH
Engineer	Satofumi Matsuyama	Satofumi Matsuyama	Satofumi Matsuyama
	(1-10GHz)	(10-18GHz)	(18-40GHz)
Mode	11ac-40BW Tx 5510MHz		

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Inside or Outside of Restricted Bands	Remark
Hori	2489.570	PK	52.1	26.9	6.1	32.0	-	53.1	73.9	20.8	Inside	
Hori	3673.317	PK	46.1	29.5	6.7	31.5	-	50.8	73.9	23.1	Inside	
Hori	5350.000	PK	50.4	32.2	7.4	31.2	-	58.8	73.9	15.1	Inside	
Hori	5460.000	PK	48.4	32.2	7.4	31.2	-	56.8	73.9	17.1	Inside	
Hori	5470.000	PK	51.5	32.2	7.4	31.2	-	59.9	68.2	8.3	Outside	
Hori	11020.000	PK	48.7	39.9	-1.7	33.0	-	53.9	73.9	20.0	Inside	
Hori	16530.000	PK	44.0	40.5	-0.2	32.2	-	52.1	68.2	16.1	Outside	Floor noise
Hori	2489.570	AV	42.7	26.9	6.1	32.0	1.0	44.7	53.9	9.2	Inside	
Hori	3673.317	AV	40.1	29.5	6.7	31.5	1.0	45.8	53.9	8.1	Inside	
Hori	5350.000	AV	38.6	32.2	7.4	31.2	1.0	48.0	53.9	5.9	Inside	
Hori	5460.000	AV	38.3	32.2	7.4	31.2	1.0	47.7	53.9	6.2	Inside	
Hori	11020.000	AV	38.0	39.9	-1.7	33.0	1.0	44.2	53.9	9.7	Inside	
Vert	2489.570	PK	50.1	26.9	6.1	32.0	-	51.1	73.9	22.8	Inside	
Vert	3673.317	PK	43.9	29.5	6.7	31.5	-	48.6	73.9	25.3	Inside	
Vert	5350.000	PK	51.5	32.2	7.4	31.2	-	59.9	73.9	14.0	Inside	
Vert	5460.000	PK	47.6	32.2	7.4	31.2	-	56.0	73.9	17.9	Inside	
Vert	5470.000	PK	49.6	32.2	7.4	31.2	-	58.0	68.2	10.2	Outside	
Vert	11020.000	PK	52.0	39.9	-1.7	33.0	-	57.2	73.9	16.7	Inside	
Vert	16530.000	PK	43.6	40.5	-0.2	32.2	-	51.7	68.2	16.5	Outside	Floor noise
Vert	2489.570	AV	40.2	26.9	6.1	32.0	1.0	42.2	53.9	11.7	Inside	
Vert	3673.317	AV	37.2	29.5	6.7	31.5	1.0	42.9	53.9	11.0	Inside	
Vert	5350.000	AV	38.6	32.2	7.4	31.2	1.0	48.0	53.9	5.9	Inside	
Vert	5460.000	AV	36.7	32.2	7.4	31.2	1.0	46.1	53.9	7.8	Inside	
Vert	11020.000	AV	39.5	39.9	-1.7	33.0	1.0	45.7	53.9	8.2	Inside	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

*The 10th harmonic was not seen so the result was its base noise level.

Distance factor: 1 GHz - 10 GHz 20log (4.45 m / 3.0 m) = 3.4 dB
 10 GHz - 26.5 GHz 20log (1.0 m / 3.0 m) = -9.5 dB
 26.5 GHz - 40 GHz 20log (0.5 m / 3.0 m) = -15.6 dB

UL Japan, Inc.

Ise EMC Lab.



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Test place	Ise EMC Lab. No.3 Semi Anechoic Chamber
Report No.	10382549H
Date	08/24/2015
Temperature / Humidity	24deg. C / 60% RH
Engineer	Satofumi Matsuyama
Mode	11ac-40BW Tx 5510MHz

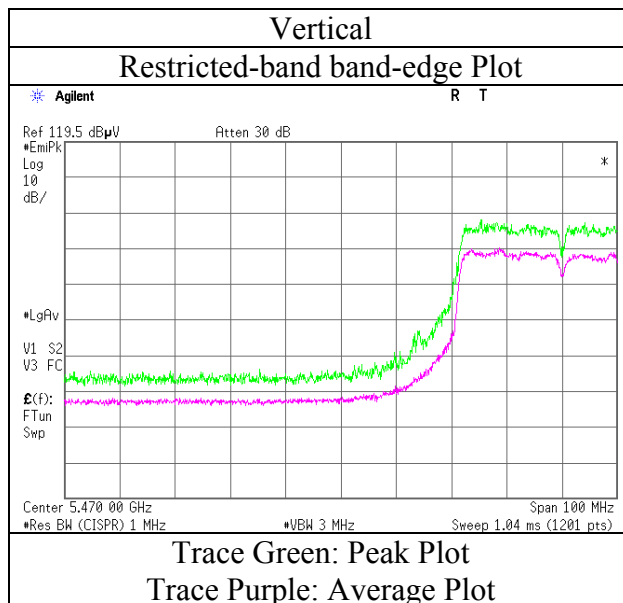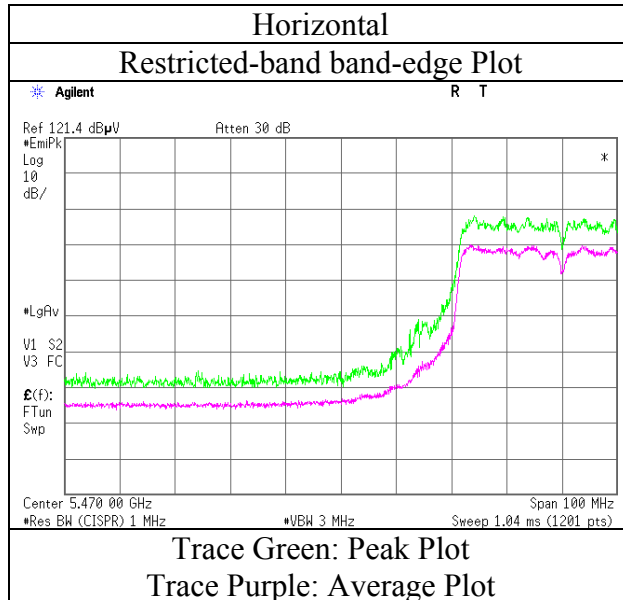

Radiated Spurious Emission

Test place	Ise EMC Lab. No.3 Anechoic Chamber		
Report No.	10382549H		
Date	08/24/2015	08/25/2015	08/26/2015
Temperature/ Humidity	24deg. C / 60% RH	24deg. C / 67% RH	24deg. C / 58% RH
Engineer	Satofumi Matsuyama	Satofumi Matsuyama	Satofumi Matsuyama
	(1-10GHz)	(10-18GHz)	(18-40GHz)
Mode	11ac-40BW Tx 5550MHz		

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Inside or Outside of Restricted Bands	Remark
Hori	2499.040	PK	51.9	26.9	6.1	31.9	-	53.0	73.9	20.9	Inside	
Hori	3699.983	PK	45.5	29.5	6.7	31.5	-	50.2	73.9	23.7	Inside	
Hori	5350.000	PK	52.1	32.2	7.4	31.2	-	60.5	73.9	13.4	Inside	
Hori	5460.000	PK	46.9	32.2	7.4	31.2	-	55.3	73.9	18.6	Inside	
Hori	5470.000	PK	46.5	32.2	7.4	31.2	-	54.9	68.2	13.3	Outside	
Hori	5725.000	PK	41.9	32.6	7.6	31.2	-	50.9	68.2	17.3	Outside	
Hori	11100.000	PK	49.5	40.1	-1.6	33.0	-	55.0	73.9	18.9	Inside	
Hori	16650.000	PK	43.8	40.7	-0.1	32.2	-	52.2	68.2	16.0	Outside	Floor noise
Hori	2499.040	AV	42.7	26.9	6.1	31.9	1.0	44.8	53.9	9.1	Inside	
Hori	3699.983	AV	39.4	29.5	6.7	31.5	1.0	45.1	53.9	8.8	Inside	
Hori	5350.000	AV	39.8	32.2	7.4	31.2	1.0	49.2	53.9	4.7	Inside	
Hori	5460.000	AV	36.8	32.2	7.4	31.2	1.0	46.2	53.9	7.7	Inside	
Hori	11100.000	AV	38.9	40.1	-1.6	33.0	1.0	45.4	53.9	8.5	Inside	
Vert	2499.040	PK	49.8	26.9	6.1	31.9	-	50.9	73.9	23.0	Inside	
Vert	3699.983	PK	44.0	29.5	6.7	31.5	-	48.7	73.9	25.2	Inside	
Vert	5350.000	PK	51.7	32.2	7.4	31.2	-	60.1	73.9	13.8	Inside	
Vert	5460.000	PK	46.8	32.2	7.4	31.2	-	55.2	73.9	18.7	Inside	
Vert	5470.000	PK	46.5	32.2	7.4	31.2	-	54.9	68.2	13.3	Outside	
Vert	5725.000	PK	41.2	32.6	7.6	31.2	-	50.2	68.2	18.0	Outside	
Vert	11100.000	PK	52.1	40.1	-1.6	33.0	-	57.6	73.9	16.3	Inside	
Vert	16650.000	PK	44.3	40.7	-0.1	32.2	-	52.7	68.2	15.5	Outside	Floor noise
Vert	2499.040	AV	40.3	26.9	6.1	31.9	1.0	42.4	53.9	11.5	Inside	
Vert	3699.983	AV	37.5	29.5	6.7	31.5	1.0	43.2	53.9	10.7	Inside	
Vert	5350.000	AV	39.6	32.2	7.4	31.2	1.0	49.0	53.9	4.9	Inside	
Vert	5460.000	AV	35.4	32.2	7.4	31.2	1.0	44.8	53.9	9.1	Inside	
Vert	11100.000	AV	40.7	40.1	-1.6	33.0	1.0	47.2	53.9	6.7	Inside	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

*The 10th harmonic was not seen so the result was its base noise level.

Distance factor:
1 GHz - 10 GHz 20log (4.45 m / 3.0 m) = 3.4 dB
10 GHz - 26.5 GHz 20log (1.0 m / 3.0 m) = -9.5 dB
26.5 GHz - 40 GHz 20log (0.5 m / 3.0 m) = -15.6 dB

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Test place	Ise EMC Lab. No.3 Anechoic Chamber		
Report No.	10382549H		
Date	08/24/2015	08/25/2015	08/26/2015
Temperature/ Humidity	24deg. C / 60% RH	24deg. C / 67% RH	24deg. C / 58% RH
Engineer	Satofumi Matsuyama	Satofumi Matsuyama	Satofumi Matsuyama
	(1-10GHz)	(10-18GHz)	(18-40GHz)
Mode	11ac-40BW Tx 5670MHz		

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Inside or Outside of Restricted Bands	Remark
Hori	2498.602	PK	52.7	26.9	6.1	31.9	-	53.8	73.9	20.1	Inside	
Hori	3779.975	PK	45.3	29.6	6.8	31.5	-	50.2	73.9	23.7	Inside	
Hori	5350.000	PK	53.2	32.2	7.4	31.2	-	61.6	73.9	12.3	Inside	
Hori	5725.000	PK	43.6	32.6	7.6	31.2	-	52.6	68.2	15.6	Outside	
Hori	11340.000	PK	51.4	40.7	-1.4	32.8	-	57.9	73.9	16.0	Inside	
Hori	17010.000	PK	43.0	41.5	0.1	32.0	-	52.6	68.2	15.6	Outside	Floor noise
Hori	2498.602	AV	42.9	26.9	6.1	31.9	1.0	45.0	53.9	8.9	Inside	
Hori	3779.975	AV	40.0	29.6	6.8	31.5	1.0	45.9	53.9	8.0	Inside	
Hori	5350.000	AV	41.0	32.2	7.4	31.2	1.0	50.4	53.9	3.5	Inside	
Hori	11340.000	AV	41.2	40.7	-1.4	32.8	1.0	48.7	53.9	5.2	Inside	
Vert	2498.602	PK	50.1	26.9	6.1	31.9	-	51.2	73.9	22.7	Inside	
Vert	3779.975	PK	45.2	29.6	6.8	31.5	-	50.1	73.9	23.8	Inside	
Vert	5350.000	PK	53.6	32.2	7.4	31.2	-	62.0	73.9	11.9	Inside	
Vert	5725.000	PK	42.5	32.6	7.6	31.2	-	51.5	68.2	16.7	Outside	
Vert	11340.000	PK	53.5	40.7	-1.4	32.8	-	60.0	73.9	13.9	Inside	
Vert	17010.000	PK	43.5	41.5	0.1	32.0	-	53.1	68.2	15.1	Outside	Floor noise
Vert	2498.602	AV	40.7	26.9	6.1	31.9	1.0	42.8	53.9	11.1	Inside	
Vert	3779.975	AV	39.5	29.6	6.8	31.5	1.0	45.4	53.9	8.5	Inside	
Vert	5350.000	AV	41.5	32.2	7.4	31.2	1.0	50.9	53.9	3.0	Inside	
Vert	11340.000	AV	41.9	40.7	-1.4	32.8	1.0	49.4	53.9	4.5	Inside	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

*The 10th harmonic was not seen so the result was its base noise level.

Distance factor: 1 GHz - 10 GHz 20log (4.45 m / 3.0 m) = 3.4 dB
10 GHz - 26.5 GHz 20log (1.0 m / 3.0 m) = -9.5 dB
26.5 GHz - 40 GHz 20log (0.5 m / 3.0 m) = -15.6 dB

UL Japan, Inc.

Ise EMC Lab.



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Test place	Ise EMC Lab. No3 Semi Anechoic Chamber
Report No.	10382549H
Date	08/24/2015
Temperature / Humidity	24deg. C / 60% RH
Engineer	Satofumi Matsuyama
Mode	11ac-40BW Tx 5670MHz

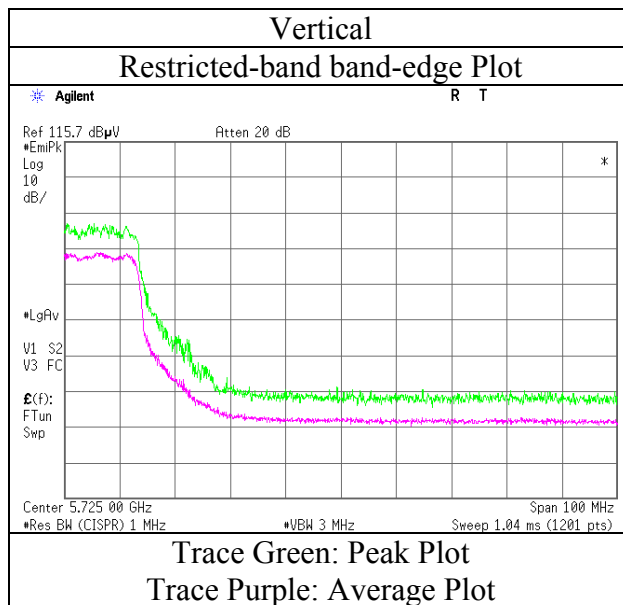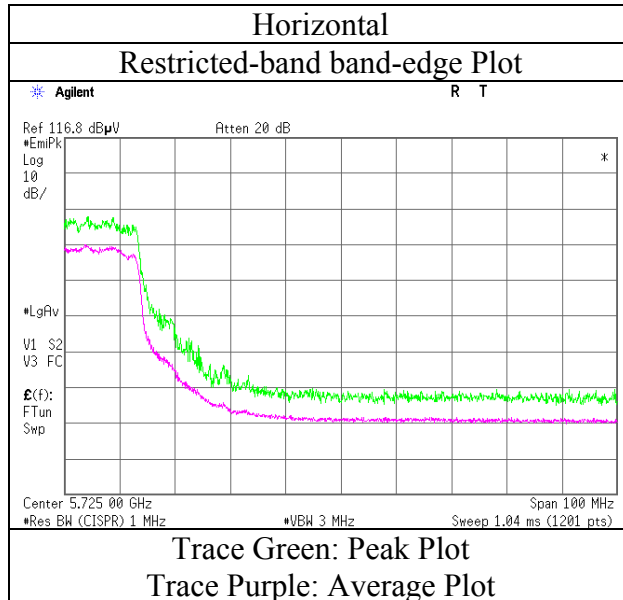

Radiated Spurious Emission

Test place	Ise EMC Lab. No.3 Anechoic Chamber		
Report No.	10382549H		
Date	08/24/2015	08/25/2015	08/26/2015
Temperature/ Humidity	24deg. C / 60% RH	24deg. C / 67% RH	24deg. C / 58% RH
Engineer	Satofumi Matsuyama	Satofumi Matsuyama	Satofumi Matsuyama
	(1-10GHz)	(10-18GHz)	(18-40GHz)
Mode	11ac-40BW Tx 5755MHz		

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Inside or Outside of Restricted Bands	Remark
Hori	2498.360	PK	52.2	26.9	6.1	31.9	-	53.3	73.9	20.6	Inside	
Hori	3836.567	PK	43.7	29.7	6.8	31.5	-	48.7	73.9	25.2	Inside	
Hori	5350.000	PK	51.9	32.2	7.4	31.2	-	60.3	73.9	13.6	Inside	
Hori	5715.000	PK	48.0	32.6	7.5	31.2	-	56.9	68.2	11.3	Outside	
Hori	5725.000	PK	53.8	32.6	7.6	31.2	-	62.8	78.2	15.4	Outside	
Hori	11510.000	PK	54.2	41.0	-1.2	32.7	-	61.3	73.9	12.6	Inside	
Hori	17265.000	PK	44.1	42.5	0.2	31.9	-	54.9	68.2	13.3	Outside	Floor noise
Hori	2498.360	AV	43.0	26.9	6.1	31.9	1.0	45.1	53.9	8.8	Inside	
Hori	3836.567	AV	37.6	29.7	6.8	31.5	1.0	43.6	53.9	10.3	Inside	
Hori	5350.000	AV	41.8	32.2	7.4	31.2	1.0	51.2	53.9	2.7	Inside	
Hori	11510.000	AV	43.6	41.0	-1.2	32.7	1.0	51.7	53.9	2.2	Inside	
Vert	2498.360	PK	50.1	26.9	6.1	31.9	-	51.2	73.9	22.7	Inside	
Vert	3836.567	PK	44.4	29.7	6.8	31.5	-	49.4	73.9	24.5	Inside	
Vert	5350.000	PK	53.6	32.2	7.4	31.2	-	62.0	73.9	11.9	Inside	
Vert	5715.000	PK	45.0	32.6	7.5	31.2	-	53.9	68.2	14.3	Outside	
Vert	5725.000	PK	52.5	32.6	7.6	31.2	-	61.5	78.2	16.7	Outside	
Vert	11510.000	PK	51.6	41.0	-1.2	32.7	-	58.7	73.9	15.2	Inside	
Vert	17265.000	PK	43.5	42.5	0.2	31.9	-	54.3	68.2	13.9	Outside	Floor noise
Vert	2498.360	AV	40.1	26.9	6.1	31.9	1.0	42.2	53.9	11.7	Inside	
Vert	3836.567	AV	38.3	29.7	6.8	31.5	1.0	44.3	53.9	9.6	Inside	
Vert	5350.000	AV	42.2	32.2	7.4	31.2	1.0	51.6	53.9	2.3	Inside	
Vert	11510.000	AV	42.2	41.0	-1.2	32.7	1.0	50.3	53.9	3.6	Inside	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

*The 10th harmonic was not seen so the result was its base noise level.

Distance factor: 1 GHz - 10 GHz 20log (4.45 m / 3.0 m) = 3.4 dB
10 GHz - 26.5 GHz 20log (1.0 m / 3.0 m) = -9.5 dB
26.5 GHz - 40 GHz 20log (0.5 m / 3.0 m) = -15.6 dB

UL Japan, Inc.
Ise EMC Lab.



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Test place	Ise EMC Lab. No.3 Semi Anechoic Chamber
Report No.	10382549H
Date	08/24/2015
Temperature / Humidity	24deg. C / 60% RH
Engineer	Satofumi Matsuyama
Mode	11ac-40BW Tx 5755MHz

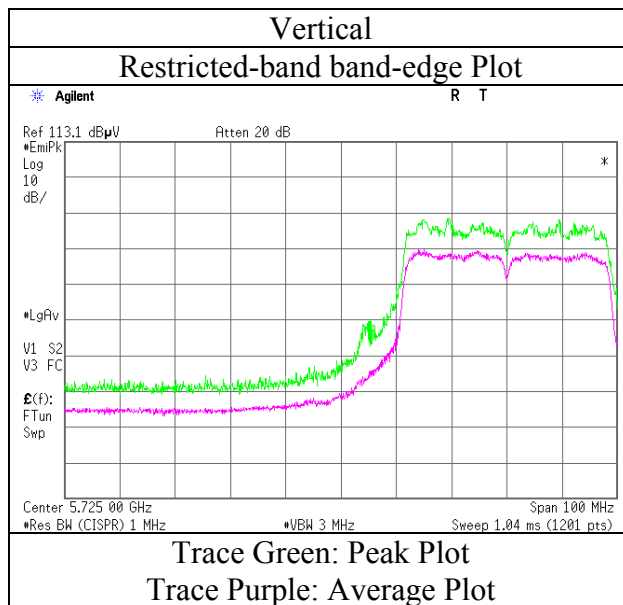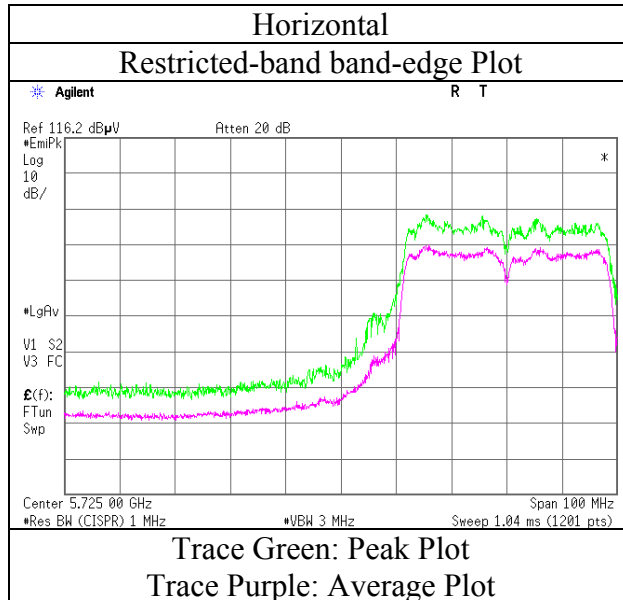

Radiated Spurious Emission

Test place	Ise EMC Lab. No.3 Anechoic Chamber		
Report No.	10382549H		
Date	08/24/2015	08/25/2015	08/26/2015
Temperature/ Humidity	24deg. C / 60% RH	24deg. C / 67% RH	24deg. C / 58% RH
Engineer	Satofumi Matsuyama	Satofumi Matsuyama	Satofumi Matsuyama
	(1-10GHz)	(10-18GHz)	(18-40GHz)
Mode	11ac-40BW Tx 5795MHz		

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Inside or Outside of Restricted Bands	Remark
Hori	2498.254	PK	52.3	26.9	6.1	31.9	-	53.4	73.9	20.5	Inside	
Hori	3863.333	PK	44.5	29.7	6.8	31.5	-	49.5	73.9	24.4	Inside	
Hori	5350.000	PK	53.6	32.2	7.4	31.2	-	62.0	73.9	11.9	Inside	
Hori	5850.000	PK	41.6	32.8	7.6	31.2	-	50.8	78.2	27.4	Outside	
Hori	5860.000	PK	41.2	32.8	7.6	31.2	-	50.4	68.2	17.8	Outside	
Hori	11590.000	PK	55.5	40.9	-1.1	32.6	-	62.7	73.9	11.2	Inside	
Hori	17385.000	PK	42.9	43.0	0.3	31.8	-	54.4	68.2	13.8	Outside	Floor noise
Hori	2498.254	AV	43.1	26.9	6.1	31.9	1.0	45.2	53.9	8.7	Inside	
Hori	3863.333	AV	38.3	29.7	6.8	31.5	1.0	44.3	53.9	9.6	Inside	
Hori	5350.000	AV	42.0	32.2	7.4	31.2	1.0	51.4	53.9	2.5	Inside	
Hori	11590.000	AV	43.7	40.9	-1.1	32.6	1.0	51.9	53.9	2.0	Inside	
Vert	2498.254	PK	50.2	26.9	6.1	31.9	-	51.3	73.9	22.6	Inside	
Vert	3863.333	PK	43.9	29.7	6.8	31.5	-	48.9	73.9	25.0	Inside	
Vert	5350.000	PK	54.6	32.2	7.4	31.2	-	63.0	73.9	10.9	Inside	
Vert	5850.000	PK	42.1	32.8	7.6	31.2	-	51.3	78.2	26.9	Outside	
Vert	5860.000	PK	40.3	32.8	7.6	31.2	-	49.5	68.2	18.7	Outside	
Vert	11590.000	PK	55.2	40.9	-1.1	32.6	-	62.4	73.9	11.5	Inside	
Vert	17385.000	PK	43.1	43.0	0.3	31.8	-	54.6	68.2	13.6	Outside	Floor noise
Vert	2498.254	AV	40.5	26.9	6.1	31.9	1.0	42.6	53.9	11.3	Inside	
Vert	3863.333	AV	38.0	29.7	6.8	31.5	1.0	44.0	53.9	9.9	Inside	
Vert	5350.000	AV	42.5	32.2	7.4	31.2	1.0	51.9	53.9	2.0	Inside	
Vert	11590.000	AV	43.5	40.9	-1.1	32.6	1.0	51.7	53.9	2.2	Inside	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

*The 10th harmonic was not seen so the result was its base noise level.

Distance factor: 1 GHz - 10 GHz 20log(4.45 m / 3.0 m) = 3.4 dB
10 GHz - 26.5 GHz 20log(1.0 m / 3.0 m) = -9.5 dB
26.5 GHz - 40 GHz 20log(0.5 m / 3.0 m) = -15.6 dB

UL Japan, Inc.
Ise EMC Lab.



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Test place	Ise EMC Lab. No.3 Semi Anechoic Chamber
Report No.	10382549H
Date	08/24/2015
Temperature / Humidity	24deg. C / 60% RH
Engineer	Satofumi Matsuyama
Mode	11ac-40BW Tx 5795MHz

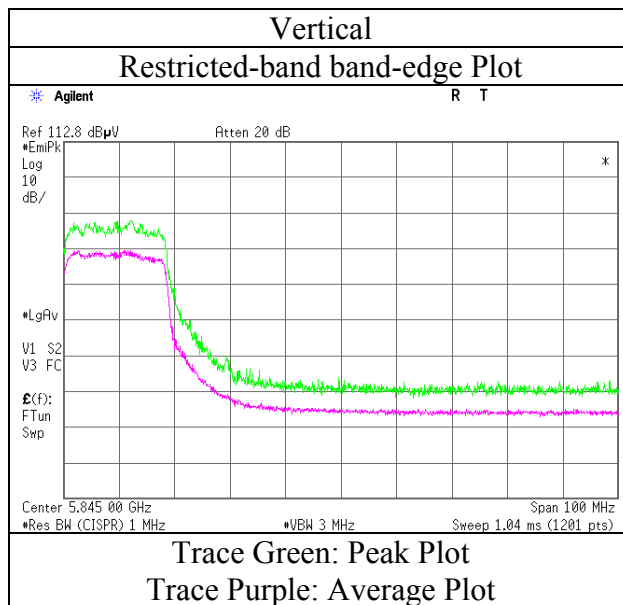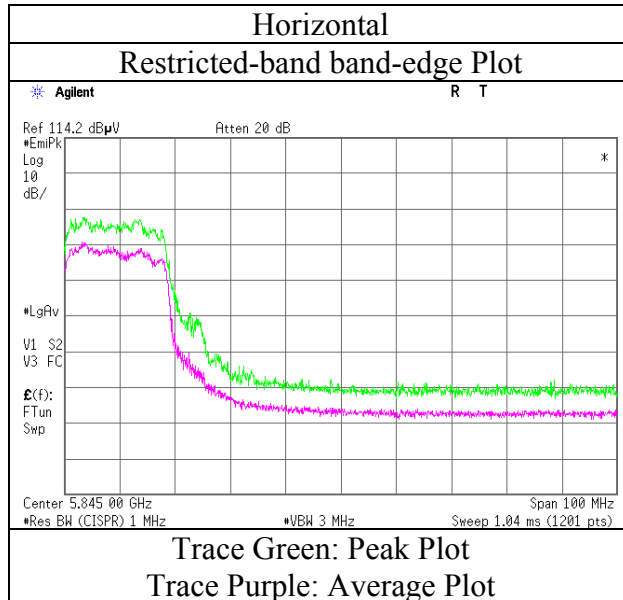

Radiated Spurious Emission

Test place	Ise EMC Lab. No.3 Anechoic Chamber		
Report No.	10382549H		
Date	08/25/2015	08/26/2015(Night)	08/26/2015
Temperature/ Humidity	24deg. C / 65% RH	25deg. C / 70% RH	24deg. C / 58% RH
Engineer	Keisuke Kawamura	Keisuke Kawamura	Satofumi Matsuyama
	(1-10GHz)	(10-18GHz)	(18-40GHz)
Mode	11ac-80BW Tx 5210MHz		

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Inside or Outside of Restricted Bands	Remark
Hori	1095.233	PK	57.9	23.8	5.2	34.3	-	52.6	73.9	21.3	Inside	
Hori	1295.998	PK	54.0	24.6	5.4	33.8	-	50.2	68.2	18.0	Outside	
Hori	2495.958	PK	51.6	26.9	6.1	31.9	-	52.7	73.9	21.2	Inside	
Hori	5143.750	PK	51.8	32.2	7.3	31.2	-	60.1	73.9	13.8	Inside	
Hori	5150.000	PK	48.9	32.2	7.3	31.2	-	57.2	73.9	16.7	Bandedge	
Hori	5350.000	PK	46.3	32.2	7.4	31.2	-	54.7	73.9	19.2	Bandedge	
Hori	6943.708	PK	39.8	35.8	8.0	31.9	-	51.7	68.2	16.5	Outside	
Hori	10420.000	PK	44.4	38.7	-1.9	32.7	-	48.5	68.2	19.7	Outside	
Hori	15630.000	PK	44.3	39.7	-0.6	32.1	-	51.3	73.9	22.6	Inside	Floor noise
Hori	1095.233	AV	48.5	23.8	5.2	34.3	2.6	45.8	53.9	8.1	Inside	
Hori	2495.958	AV	41.1	26.9	6.1	31.9	2.6	44.8	53.9	9.1	Inside	
Hori	5143.750	AV	36.0	32.2	7.3	31.2	2.6	46.9	53.9	7.0	Inside	
Hori	5150.000	AV	35.2	32.2	7.3	31.2	2.6	46.1	53.9	7.8	Bandedge	*1)
Hori	5350.000	AV	35.4	32.2	7.4	31.2	2.6	46.4	53.9	7.5	Bandedge	*1)
Hori	15630.000	AV	34.3	39.7	-0.6	32.1	-	41.3	53.9	12.6	Inside	Floor noise
Vert	2498.467	PK	50.8	26.9	6.1	31.9	-	51.9	73.9	22.0	Inside	
Vert	5146.258	PK	52.3	32.2	7.3	31.2	-	60.6	73.9	13.3	Inside	
Vert	5150.000	PK	51.1	32.2	7.3	31.2	-	59.4	73.9	14.5	Bandedge	
Vert	5350.000	PK	45.3	32.2	7.4	31.2	-	53.7	73.9	20.2	Bandedge	
Vert	10420.000	PK	45.6	38.7	-1.9	32.7	-	49.7	68.2	18.5	Outside	
Vert	15630.000	PK	44.7	39.7	-0.6	32.1	-	51.7	73.9	22.2	Inside	Floor noise
Vert	2498.467	AV	41.3	26.9	6.1	31.9	2.6	45.0	53.9	8.9	Inside	
Vert	5146.258	AV	36.7	32.2	7.3	31.2	2.6	47.6	53.9	6.3	Inside	
Vert	5150.000	AV	35.6	32.2	7.3	31.2	2.6	46.5	53.9	7.4	Bandedge	*1)
Vert	5350.000	AV	33.4	32.2	7.4	31.2	2.6	44.4	53.9	9.5	Bandedge	*1)
Vert	15630.000	AV	34.3	39.7	-0.6	32.1	-	41.3	53.9	12.6	Inside	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

*The 10th harmonic was not seen so the result was its base noise level.

*1) Not Out of Band emission(Leakage Power)

Distance factor: 1 GHz - 10 GHz 20log (4.45 m / 3.0 m) = 3.4 dB
 10 GHz - 26.5 GHz 20log (1.0 m / 3.0 m) = -9.5 dB
 26.5 GHz - 40 GHz 20log (0.5 m / 3.0 m) = -15.6 dB

UL Japan, Inc.

Ise EMC Lab.



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Test place	Ise EMC Lab. No.3 Semi Anechoic Chamber
Report No.	10382549H
Date	08/25/2015
Temperature / Humidity	24deg. C / 65% RH
Engineer	Keisuke Kawamura
Mode	11ac-80BW Tx 5210MHz

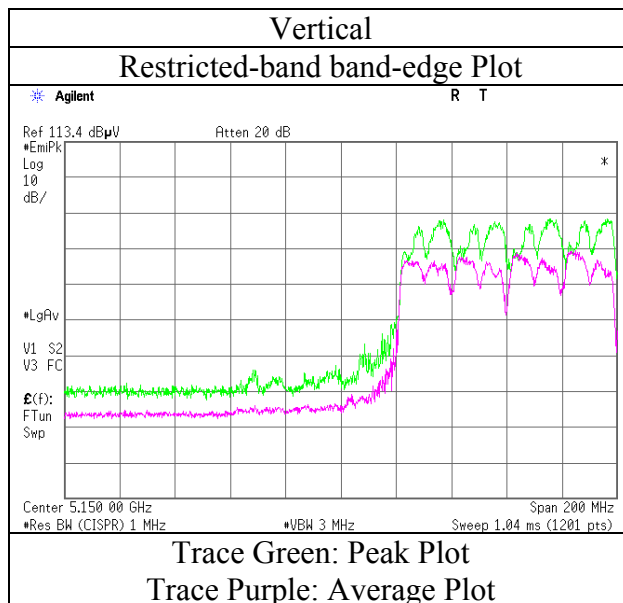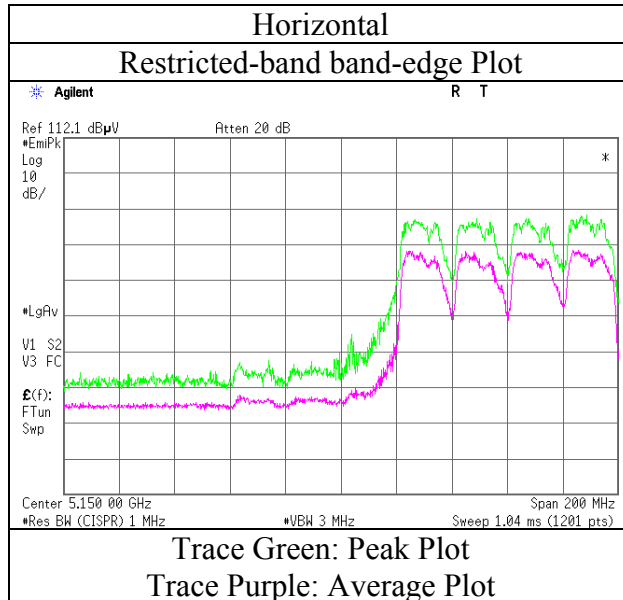

Radiated Spurious Emission

Test place Ise EMC Lab. No.3 Anechoic Chamber
Report No. 10382549H
Date 08/25/2015 08/26/2015(Night) 08/26/2015
Temperature/ Humidity 24deg. C / 65% RH 25deg. C / 70% RH 24deg. C / 58% RH
Engineer Keisuke Kawamura Keisuke Kawamura Satofumi Matsuyama
(1-10GHz) (10-18GHz) (18-40GHz)
Mode 11ac-80BW Tx 5290MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Inside or Outside of Restricted Bands	Remark
Hori	1095.125	PK	58.0	23.8	5.2	34.3	-	52.7	73.9	21.2	Inside	
Hori	1295.998	PK	54.8	24.6	5.4	33.8	-	51.0	68.2	17.2	Outside	
Hori	2488.750	PK	51.5	26.9	6.1	32.0	-	52.5	73.9	21.4	Inside	
Hori	5150.000	PK	40.4	32.2	7.3	31.2	-	48.7	73.9	25.2	Bandedge	
Hori	5350.000	PK	41.6	32.2	7.4	31.2	-	50.0	73.9	23.9	Bandedge	
Hori	10580.000	PK	44.6	39.0	-1.8	32.8	-	49.0	68.2	19.2	Outside	
Hori	15870.000	PK	44.8	39.5	-0.5	32.4	-	51.4	73.9	22.5	Inside	Floor noise
Hori	1095.125	AV	49.4	23.8	5.2	34.3	2.6	46.7	53.9	7.2	Inside	
Hori	2488.750	AV	41.9	26.9	6.1	32.0	2.6	45.5	53.9	8.4	Inside	
Hori	5150.000	AV	30.1	32.2	7.3	31.2	2.6	41.0	53.9	12.9	Bandedge	*1)
Hori	5350.000	AV	31.8	32.2	7.4	31.2	2.6	42.8	53.9	11.1	Bandedge	*1)
Hori	15870.000	AV	35.4	39.5	-0.5	32.4	-	42.0	53.9	11.9	Inside	Floor noise
Vert	1699.060	PK	53.3	25.9	2.3	33.0	-	48.5	73.9	25.4	Inside	
Vert	2488.750	PK	51.5	26.9	6.1	32.0	-	52.5	73.9	21.4	Inside	
Vert	5150.000	PK	40.1	32.2	7.3	31.2	-	48.4	73.9	25.5	Bandedge	
Vert	5350.000	PK	40.2	32.2	7.4	31.2	-	48.6	73.9	25.3	Bandedge	
Vert	7721.056	PK	41.6	36.4	8.3	32.1	-	54.2	73.9	19.7	Inside	
Vert	10580.000	PK	45.3	39.0	-1.8	32.8	-	49.7	68.2	18.5	Outside	
Vert	15870.000	PK	44.5	39.5	-0.5	32.4	-	51.1	73.9	22.8	Inside	Floor noise
Vert	1699.060	AV	45.0	25.9	2.3	33.0	2.6	42.8	53.9	11.1	Inside	
Vert	2488.750	AV	41.9	26.9	6.1	32.0	2.6	45.5	53.9	8.4	Inside	
Vert	5150.000	AV	30.9	32.2	7.3	31.2	2.6	41.8	53.9	12.1	Bandedge	*1)
Vert	5350.000	AV	31.1	32.2	7.4	31.2	2.6	42.1	53.9	11.8	Bandedge	*1)
Vert	15870.000	AV	35.4	39.5	-0.5	32.4	-	42.0	53.9	11.9	Inside	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).



*The 10th harmonic was not seen so the result was its base noise level.

*1) Not Out of Band emission(Leakage Power)

Distance factor: 1 GHz - 10 GHz 20log (4.45 m / 3.0 m) = 3.4 dB
10 GHz - 26.5 GHz 20log (1.0 m / 3.0 m) = -9.5 dB
26.5 GHz - 40 GHz 20log (0.5 m / 3.0 m) = -15.6 dB

Radiated Spurious Emission

Test place Ise EMC Lab. No.3 Semi Anechoic Chamber
Report No. 10382549H
Date 08/25/2015
Temperature / Humidity 24deg. C / 65% RH
Engineer Keisuke Kawamura
Mode 11ac-80BW Tx 5290MHz

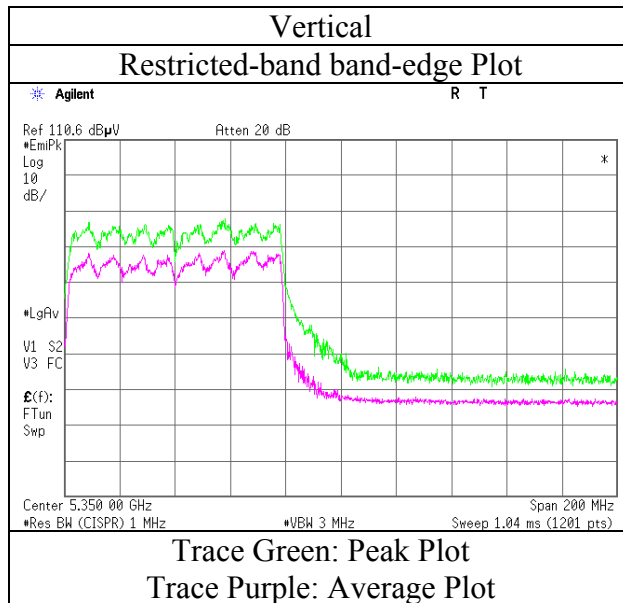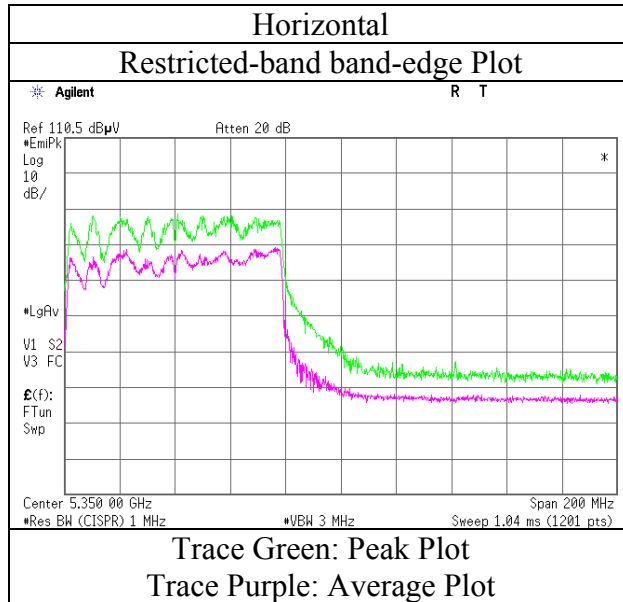

Radiated Spurious Emission

Test place	Ise EMC Lab. No.3 Anechoic Chamber		
Report No.	10382549H		
Date	08/25/2015	08/26/2015 (Night)	08/26/2015 (Day)
Temperature/ Humidity	24deg. C / 65% RH	25deg. C / 70% RH	24deg. C / 58% RH
Engineer	Keisuke Kawamura	Keisuke Kawamura	Satofumi Matsuyama
	(1-10GHz)	(10-18GHz)	(18-40GHz)
Mode	11ac-80BW Tx 5530MHz		

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Inside or Outside of Restricted Bands	Remark
Hori	1095.238	PK	58.0	23.8	5.2	34.3	-	52.7	73.9	21.2	Inside	
Hori	1295.830	PK	54.0	24.6	5.4	33.8	-	50.2	68.2	18.0	Outside	
Hori	2498.130	PK	51.5	26.9	6.1	31.9	-	52.6	73.9	21.3	Inside	
Hori	3686.666	PK	47.0	29.5	6.7	31.5	-	51.7	73.9	22.2	Inside	
Hori	5150.000	PK	41.9	32.2	7.3	31.2	-	50.2	73.9	23.7	Inside	
Hori	5333.120	PK	47.8	32.2	7.4	31.2	-	56.2	68.2	12.0	Outside	
Hori	5350.000	PK	47.5	32.2	7.4	31.2	-	55.9	73.9	18.0	Inside	
Hori	5460.000	PK	49.7	32.2	7.4	31.2	-	58.1	73.9	15.8	Inside	
Hori	5470.000	PK	52.3	32.2	7.4	31.2	-	60.7	68.2	7.5	Outside	
Hori	5725.000	PK	38.7	32.6	7.6	31.2	-	47.7	68.2	20.5	Outside	
Hori	7129.211	PK	39.3	36.0	8.1	32.0	-	51.4	68.2	16.8	Outside	
Hori	11060.000	PK	45.2	40.0	-1.7	33.0	-	50.5	73.9	23.4	Inside	
Hori	16590.000	PK	45.4	40.6	-0.2	32.2	-	53.6	68.2	14.6	Outside	Floor noise
Hori	1095.238	AV	52.4	23.8	1.8	34.3	2.6	46.3	53.9	7.6	Inside	
Hori	2498.130	AV	42.1	26.9	6.1	31.9	2.6	45.8	53.9	8.1	Inside	
Hori	3686.666	AV	41.5	29.5	6.7	31.5	2.6	48.8	53.9	5.1	Inside	
Hori	5150.000	AV	32.6	32.2	7.3	31.2	2.6	43.5	53.9	10.4	Inside	
Hori	5350.000	AV	37.1	32.2	7.4	31.2	2.6	48.1	53.9	5.8	Inside	
Hori	5460.000	AV	35.8	32.2	7.4	31.2	2.6	46.8	53.9	7.1	Inside	
Hori	11060.000	AV	34.8	40.0	-1.7	33.0	2.6	42.7	53.9	11.2	Inside	
Vert	2498.130	PK	52.1	26.9	6.1	31.9	-	53.2	73.9	20.7	Inside	
Vert	3688.682	PK	45.8	29.5	6.7	31.5	-	50.5	73.9	23.4	Inside	
Vert	5150.000	PK	42.0	32.2	7.3	31.2	-	50.3	73.9	23.6	Inside	
Vert	5340.940	PK	49.0	32.2	7.4	31.2	-	57.4	68.2	10.8	Outside	
Vert	5350.000	PK	46.8	32.2	7.4	31.2	-	55.2	73.9	18.7	Inside	
Vert	5460.000	PK	48.5	32.2	7.4	31.2	-	56.9	73.9	17.0	Inside	
Vert	5470.000	PK	53.6	32.2	7.4	31.2	-	62.0	68.2	6.2	Outside	
Vert	5725.000	PK	39.5	32.6	7.6	31.2	-	48.5	68.2	19.7	Outside	
Vert	11060.000	PK	45.9	40.0	-1.7	33.0	-	51.2	73.9	22.7	Inside	
Vert	16590.000	PK	45.6	40.6	-0.2	32.2	-	53.8	68.2	14.4	Outside	Floor noise
Vert	2498.130	AV	42.9	26.9	6.1	31.9	2.6	46.6	53.9	7.3	Inside	
Vert	3686.666	AV	39.7	29.5	6.7	31.5	2.6	47.0	53.9	6.9	Inside	
Vert	5150.000	AV	32.4	32.2	7.3	31.2	2.6	43.3	53.9	10.6	Inside	
Vert	5350.000	AV	35.3	32.2	7.4	31.2	2.6	46.3	53.9	7.6	Inside	
Vert	5460.000	AV	35.5	32.2	7.4	31.2	2.6	46.5	53.9	7.4	Inside	
Vert	11060.000	AV	40.2	40.0	-1.7	33.0	2.6	48.1	53.9	5.8	Inside	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

*The 10th harmonic was not seen so the result was its base noise level.

Distance factor: 1 GHz - 10 GHz 20log (4.45 m / 3.0 m) = 3.4 dB
 10 GHz - 26.5 GHz 20log (1.0 m / 3.0 m) = -9.5 dB
 26.5 GHz - 40 GHz 20log (0.5 m / 3.0 m) = -15.6 dB

UL Japan, Inc.

Ise EMC Lab.



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Test place Ise EMC Lab. No.3 Semi Anechoic Chamber
Report No. 10382549H
Date 08/25/2015
Temperature / Humidity 24deg. C / 65% RH
Engineer Keisuke Kawamura
Mode 11ac-80BW Tx 5530MHz

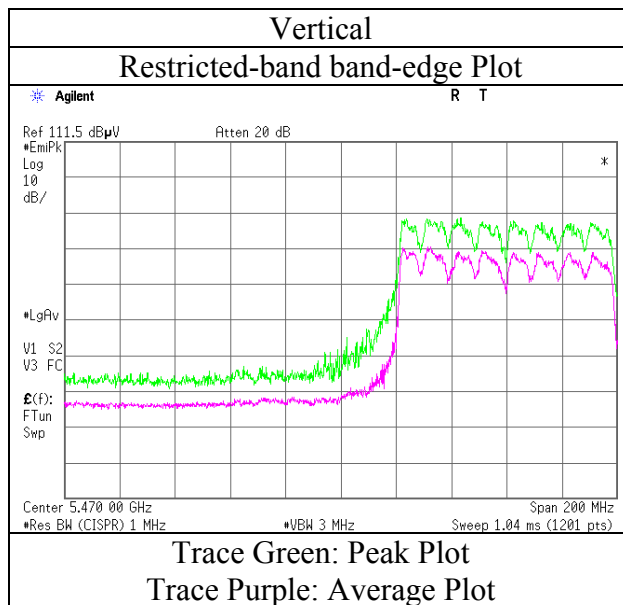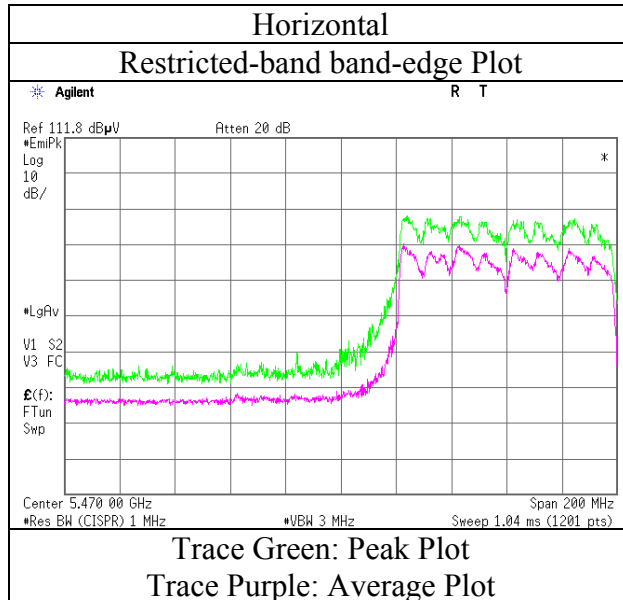

Radiated Spurious Emission

Test place	Ise EMC Lab. No.3 Anechoic Chamber		
Report No.	10382549H		
Date	08/25/2015	08/26/2015 (Night)	08/26/2015 (Day)
Temperature/ Humidity	24deg. C / 65% RH	25deg. C / 70% RH	24deg. C / 58% RH
Engineer	Keisuke Kawamura	Keisuke Kawamura	Satofumi Matsuyama
	(1-10GHz)	(10-18GHz)	(18-40GHz)
Mode	11ac-80BW Tx 5610MHz		

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Inside or Outside of Restricted Bands	Remark
Hori	1095.200	PK	57.4	23.8	5.2	34.3	-	52.1	73.9	21.8	Inside	
Hori	1299.142	PK	54.4	24.6	5.4	33.8	-	50.6	68.2	17.6	Outside	
Hori	2498.460	PK	50.4	26.9	6.1	31.9	-	51.5	73.9	22.4	Inside	
Hori	3739.983	PK	45.6	29.6	6.7	31.5	-	50.4	73.9	23.5	Inside	
Hori	5150.000	PK	45.6	32.2	7.3	31.2	-	53.9	73.9	20.0	Inside	
Hori	5339.375	PK	52.7	32.2	7.4	31.2	-	61.1	68.2	7.1	Outside	
Hori	5350.000	PK	52.6	32.2	7.4	31.2	-	61.0	73.9	12.9	Inside	
Hori	5460.000	PK	47.9	32.2	7.4	31.2	-	56.3	73.9	17.6	Inside	
Hori	5470.000	PK	47.6	32.2	7.4	31.2	-	56.0	68.2	12.2	Outside	
Hori	5725.000	PK	42.3	32.6	7.6	31.2	-	51.3	68.2	16.9	Outside	
Hori	11220.000	PK	50.3	40.5	-1.5	32.9	-	56.4	73.9	17.5	Inside	
Hori	16830.000	PK	44.3	41.1	-0.1	32.1	-	53.2	68.2	15.0	Outside	Floor noise
Hori	1095.200	AV	52.1	23.8	1.8	34.3	2.6	46.0	53.9	7.9	Inside	
Hori	2498.460	AV	40.8	26.9	6.1	31.9	2.6	44.5	53.9	9.4	Inside	
Hori	3739.983	AV	39.5	29.6	6.7	31.5	2.6	46.9	53.9	7.0	Inside	
Hori	5150.000	AV	35.0	32.2	7.3	31.2	2.6	45.9	53.9	8.0	Inside	
Hori	5350.000	AV	40.7	32.2	7.4	31.2	2.6	51.7	53.9	2.2	Inside	
Hori	5460.000	AV	37.2	32.2	7.4	31.2	2.6	48.2	53.9	5.7	Inside	
Hori	11220.000	AV	38.3	40.5	-1.5	32.9	2.6	47.0	53.9	6.9	Inside	
Vert	2498.460	PK	51.6	26.9	6.1	31.9	-	52.7	73.9	21.2	Inside	
Vert	3739.983	PK	46.5	29.6	6.7	31.5	-	51.3	73.9	22.6	Inside	
Vert	5279.990	PK	49.8	32.2	7.4	31.2	-	58.2	68.2	10.0	Outside	
Vert	5339.375	PK	53.2	32.2	7.4	31.2	-	61.6	68.2	6.6	Outside	
Vert	5350.000	PK	51.9	32.2	7.4	31.2	-	60.3	73.9	13.6	Inside	
Vert	5460.000	PK	45.3	32.2	7.4	31.2	-	53.7	73.9	20.2	Inside	
Vert	5470.000	PK	45.8	32.2	7.4	31.2	-	54.2	68.2	14.0	Outside	
Vert	5725.000	PK	41.5	32.6	7.6	31.2	-	50.5	68.2	17.7	Outside	
Vert	11220.000	PK	51.2	40.5	-1.5	32.9	-	57.3	73.9	16.6	Inside	
Vert	16830.000	PK	44.6	41.1	-0.1	32.1	-	53.5	68.2	14.7	Outside	Floor noise
Vert	2498.460	AV	41.7	26.9	6.1	31.9	2.6	45.4	53.9	8.5	Inside	
Vert	3739.983	AV	40.6	29.6	6.7	31.5	2.6	48.0	53.9	5.9	Inside	
Vert	5350.000	AV	40.8	32.2	7.4	31.2	2.6	51.8	53.9	2.1	Inside	
Vert	5460.000	AV	35.4	32.2	7.4	31.2	2.6	46.4	53.9	7.5	Inside	
Vert	11220.000	AV	37.5	40.5	-1.5	32.9	2.6	46.2	53.9	7.7	Inside	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

*The 10th harmonic was not seen so the result was its base noise level.

Distance factor: 1 GHz - 10 GHz 20log (4.45 m / 3.0 m) = 3.4 dB
10 GHz - 26.5 GHz 20log (1.0 m / 3.0 m) = -9.5 dB
26.5 GHz - 40 GHz 20log (0.5 m / 3.0 m) = -15.6 dB

UL Japan, Inc.

Ise EMC Lab.



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Test place	Ise EMC Lab. No.3 Semi Anechoic Chamber
Report No.	10382549H
Date	08/25/2015
Temperature / Humidity	24deg. C / 65% RH
Engineer	Keisuke Kawamura
Mode	11ac-80BW Tx 5610MHz

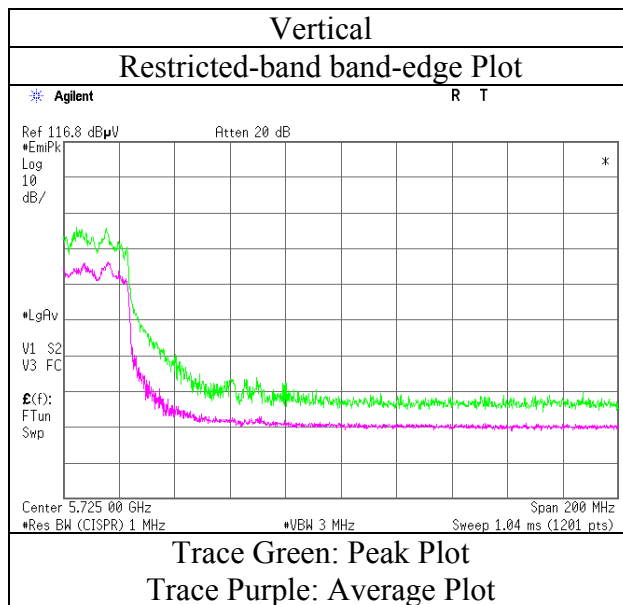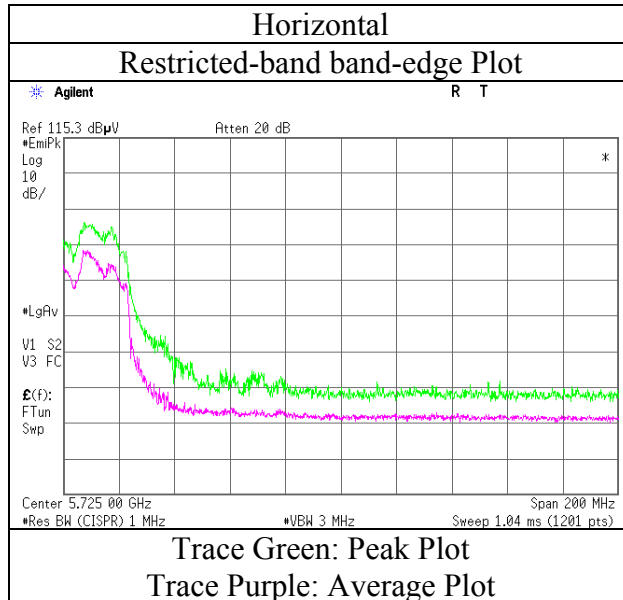

Radiated Spurious Emission

Test place	Ise EMC Lab. No.3 Anechoic Chamber		
Report No.	10382549H		
Date	08/25/2015	08/26/2015 (Night)	08/26/2015 (Day)
Temperature/ Humidity	24deg. C / 65% RH	25deg. C / 70% RH	24deg. C / 58% RH
Engineer	Keisuke Kawamura	Keisuke Kawamura	Satofumi Matsuyama
	(1-10GHz)	(10-18GHz)	(18-40GHz)
Mode	11ac-80BW Tx 5775MHz		

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Inside or Outside of Restricted Bands	Remark
Hori	1095.700	PK	57.5	23.8	5.2	34.3	-	52.2	73.9	21.7	Inside	
Hori	1299.142	PK	53.4	24.6	5.4	33.8	-	49.6	68.2	18.6	Outside	
Hori	2498.538	PK	51.7	26.9	6.1	31.9	-	52.8	73.9	21.1	Inside	
Hori	3849.971	PK	44.5	29.7	6.8	31.5	-	49.5	73.9	24.4	Inside	
Hori	5348.510	PK	51.8	32.2	7.4	31.2	-	60.2	68.2	8.0	Outside	
Hori	5350.000	PK	52.8	32.2	7.4	31.2	-	61.2	73.9	12.7	Inside	
Hori	5460.000	PK	47.7	32.2	7.4	31.2	-	56.1	73.9	17.8	Inside	
Hori	5715.000	PK	57.3	32.6	7.5	31.2	-	66.2	68.2	2.0	Outside	
Hori	5725.000	PK	60.7	32.6	7.6	31.2	-	69.7	78.2	8.5	Outside	
Hori	5850.000	PK	44.6	32.8	7.6	31.2	-	53.8	78.2	24.4	Outside	
Hori	5860.000	PK	43.9	32.8	7.6	31.2	-	53.1	68.2	15.1	Outside	
Hori	11550.000	PK	53.0	40.9	-1.2	32.6	-	60.1	73.9	13.8	Inside	
Hori	17325.000	PK	44.7	42.8	0.2	31.9	-	55.8	68.2	12.4	Outside	Floor noise
Hori	1095.200	AV	52.1	23.8	1.8	34.3	2.6	46.0	53.9	7.9	Inside	
Hori	2498.538	AV	43.3	26.9	6.1	31.9	2.6	47.0	53.9	6.9	Inside	
Hori	3849.971	AV	37.3	29.7	6.8	31.5	2.6	44.9	53.9	9.0	Inside	
Hori	5350.000	AV	40.8	32.2	7.4	31.2	2.6	51.8	53.9	2.1	Inside	
Hori	5460.000	AV	37.4	32.2	7.4	31.2	2.6	48.4	53.9	5.5	Inside	
Hori	11550.000	AV	42.2	40.9	-1.2	32.6	2.6	51.9	53.9	2.0	Inside	
Vert	2498.538	PK	52.1	26.9	6.1	31.9	-	53.2	73.9	20.7	Inside	
Vert	3849.971	PK	44.4	29.7	6.8	31.5	-	49.4	73.9	24.5	Inside	
Vert	5345.450	PK	54.1	32.2	7.4	31.2	-	62.5	68.2	5.7	Outside	
Vert	5350.000	PK	53.8	32.2	7.4	31.2	-	62.2	73.9	11.7	Inside	
Vert	5460.000	PK	48.4	32.2	7.4	31.2	-	56.8	73.9	17.1	Inside	
Vert	5715.000	PK	57.2	32.6	7.5	31.2	-	66.1	68.2	2.1	Outside	
Vert	5725.000	PK	61.9	32.6	7.6	31.2	-	70.9	78.2	7.3	Outside	
Vert	5850.000	PK	44.4	32.8	7.6	31.2	-	53.6	78.2	24.6	Outside	
Vert	5860.000	PK	40.3	32.8	7.6	31.2	-	49.5	68.2	18.7	Outside	
Vert	11550.000	PK	49.9	40.9	-1.2	32.6	-	57.0	73.9	16.9	Inside	
Vert	17325.000	PK	44.8	42.8	0.2	31.9	-	55.9	68.2	12.3	Outside	Floor noise
Vert	2498.538	AV	42.7	26.9	6.1	31.9	2.6	46.4	53.9	7.5	Inside	
Vert	3849.971	AV	37.3	29.7	6.8	31.5	2.6	44.9	53.9	9.0	Inside	
Vert	5350.000	AV	40.9	32.2	7.4	31.2	2.6	51.9	53.9	2.0	Inside	
Vert	5460.000	AV	37.5	32.2	7.4	31.2	2.6	48.5	53.9	5.4	Inside	
Vert	11550.000	AV	41.9	40.9	-1.2	32.6	2.6	51.6	53.9	2.3	Inside	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or have enough margin (more than 20dB).

*The 10th harmonic was not seen so the result was its base noise level.

Distance factor: 1 GHz - 10 GHz 20log (4.45 m / 3.0 m) = 3.4 dB
10 GHz - 26.5 GHz 20log (1.0 m / 3.0 m) = -9.5 dB
26.5 GHz - 40 GHz 20log (0.5 m / 3.0 m) = -15.6 dB

UL Japan, Inc.

Ise EMC Lab.



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124


Radiated Spurious Emission

Test place	Ise EMC Lab. No.3 Semi Anechoic Chamber
Report No.	10382549H
Date	08/25/2015
Temperature / Humidity	24deg. C / 65% RH
Engineer	Keisuke Kawamura
Mode	11ac-80BW Tx 5775MHz

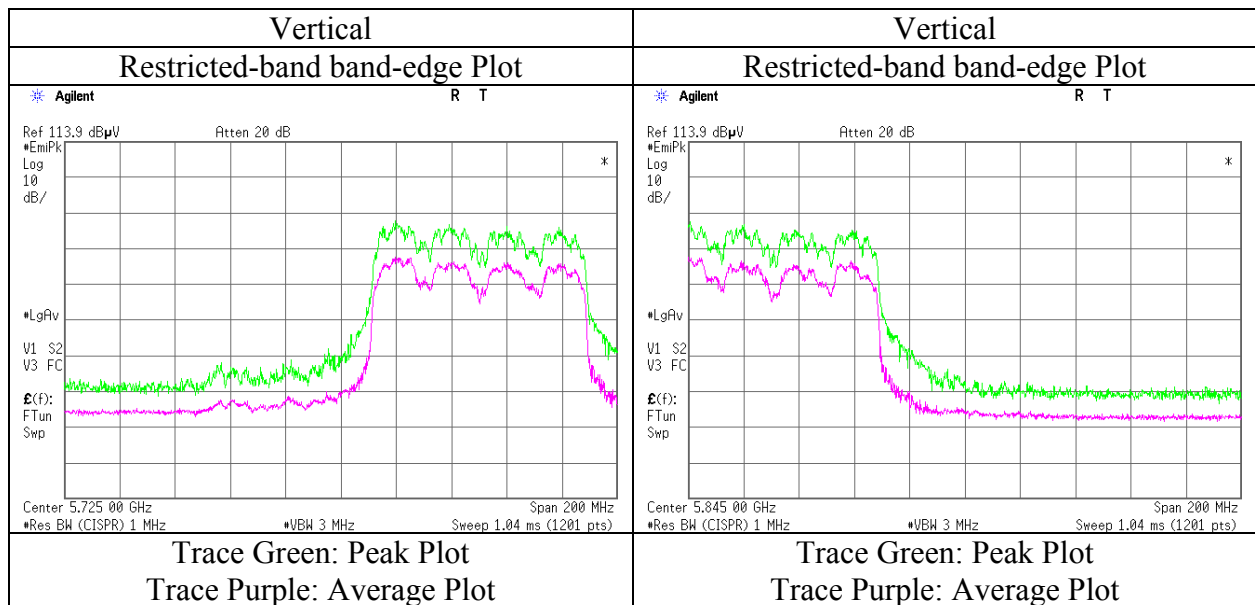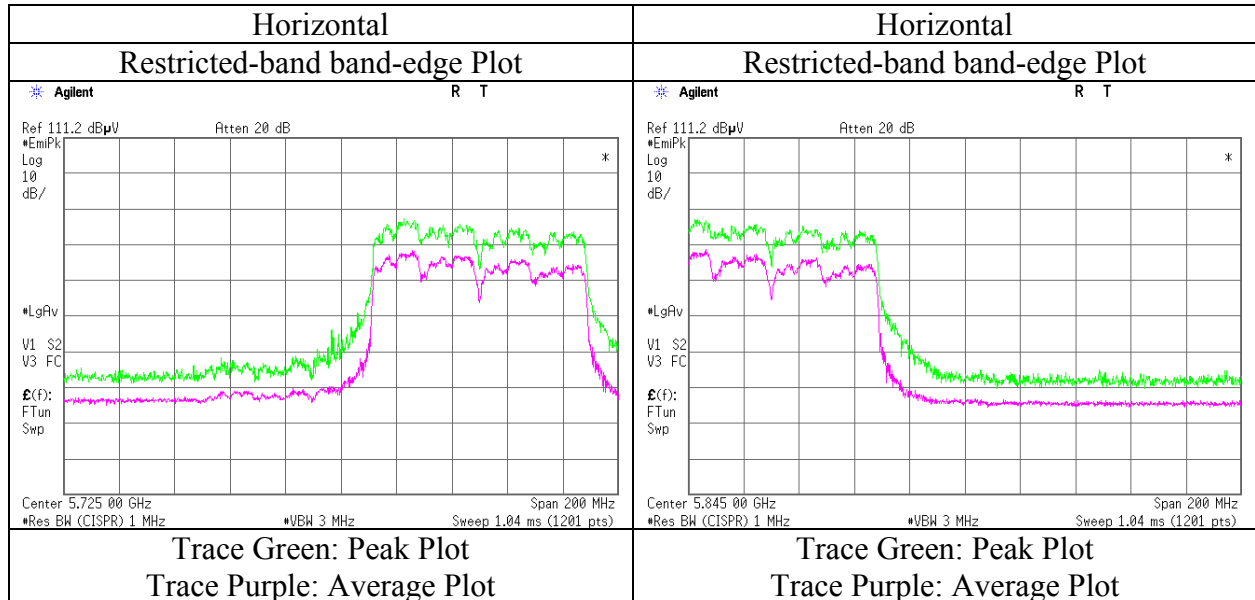


Duty cycle

Test place	Ise EMC Lab. No.11 Measurement Room
Report No.	10382549H
Date	06/10/2015
Temperature/ Humidity	26deg. C / 56% RH
Engineer	Yutaka Yoshida
Mode	11a / 11n20 / 11n40

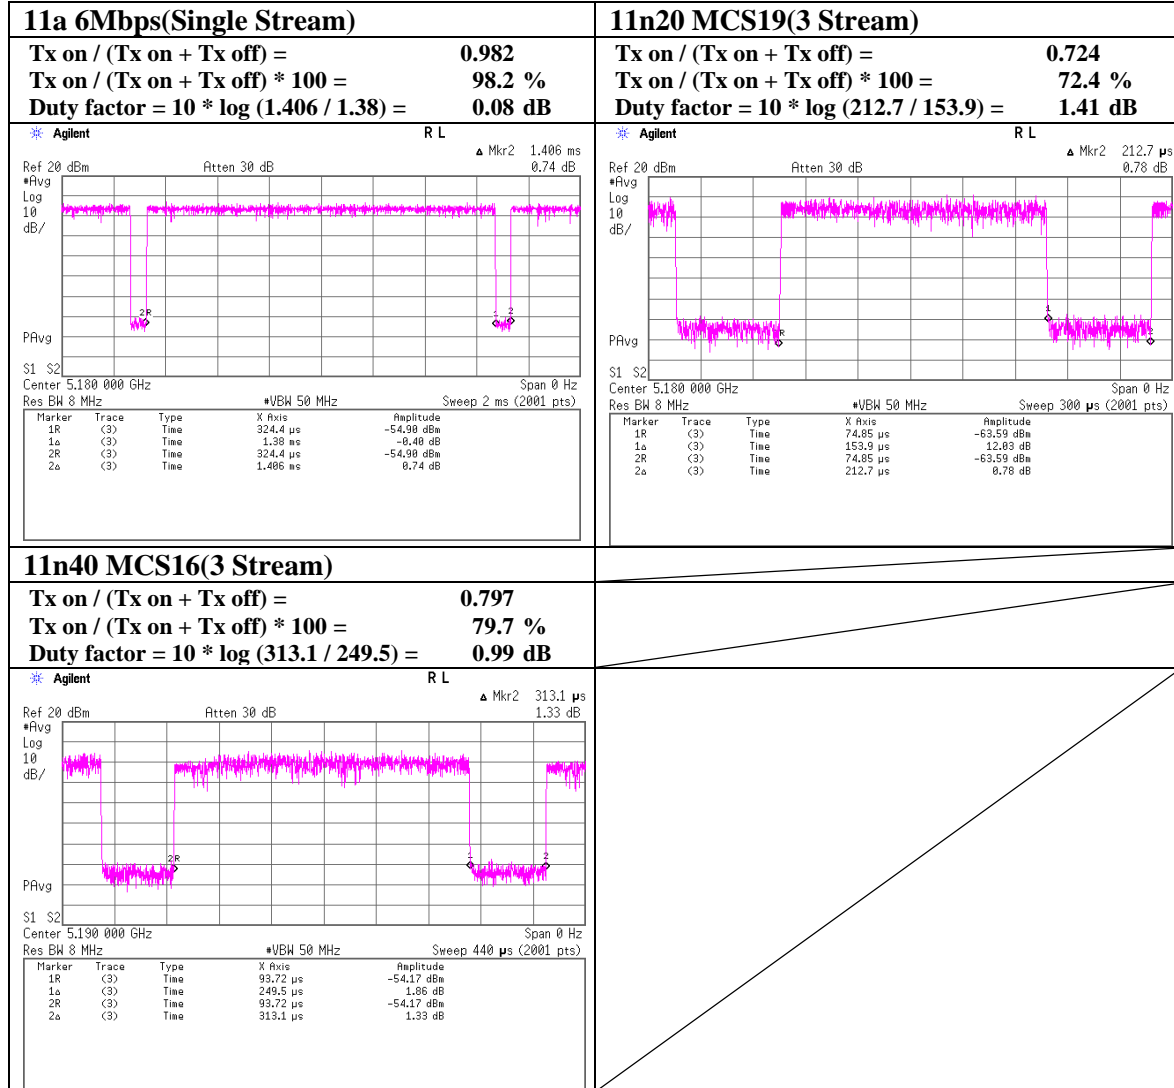

Duty cycle

Test place	Ise EMC Lab. No.11 Measurement Room
Report No.	10382549H
Date	06/10/2015
Temperature/ Humidity	26deg. C / 56% RH
Engineer	Yutaka Yoshida
Mode	11ac20 / 11ac20 / 11ac80

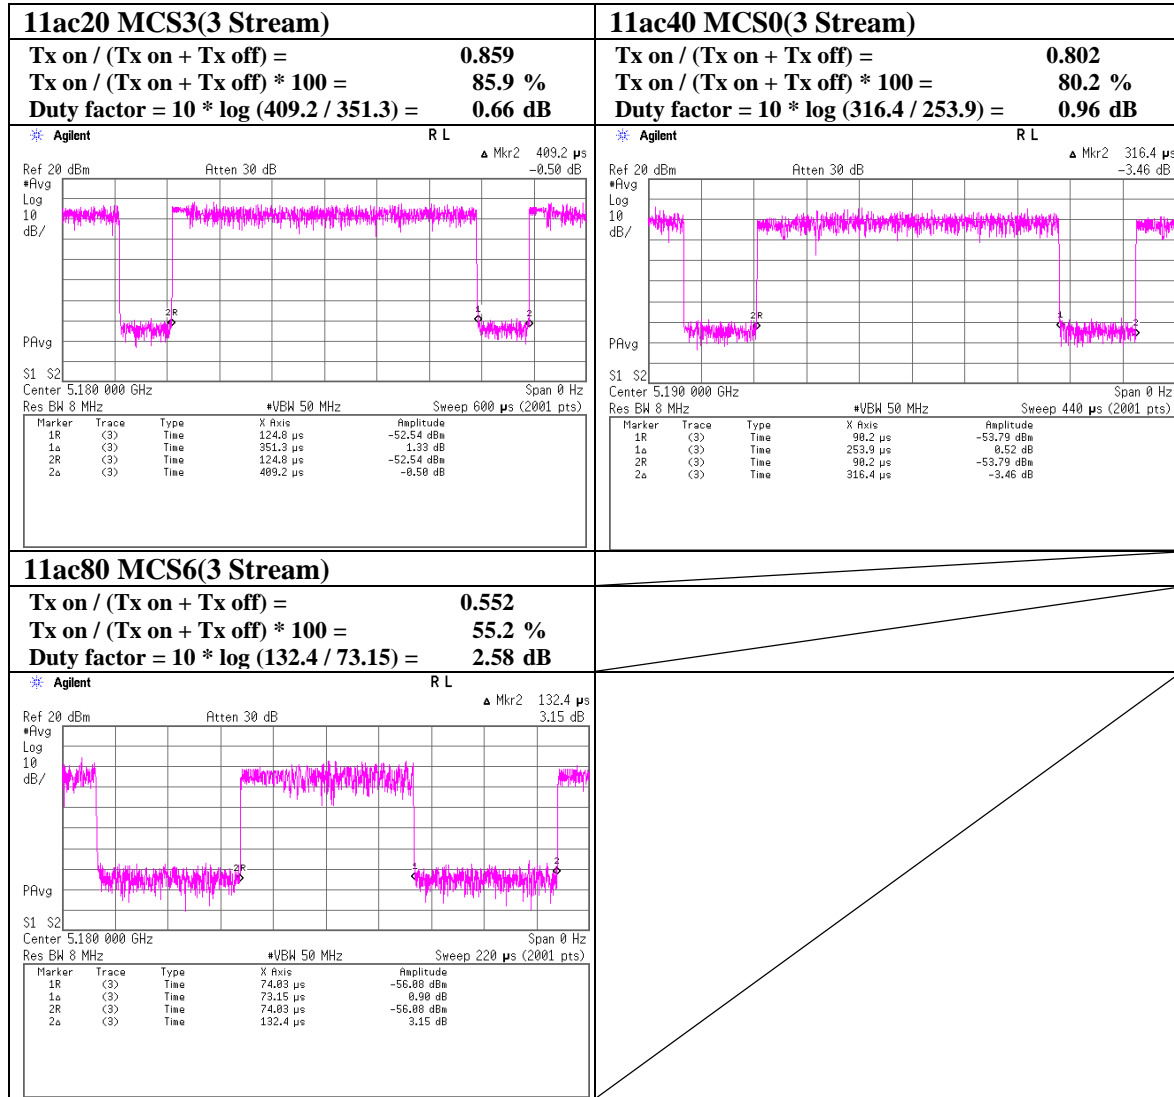

APPENDIX 2: Test instruments

EMI test equipment

Control No.	Instrument	Manufacturer	Model No	Serial No	Test Item	Calibration Date * Interval(month)
MAEC-03	Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 3m	DA-10005	RE	2015/02/19 * 12
MOS-13	Thermo-Hygrometer	Custom	CTH-180	1301	RE	2015/01/13 * 12
MJM-16	Measure	KOMELON	KMC-36	-	RE	-
COTS-MEMI	EMI measurement program	TSJ	TEPTO-DV	-	RE	
MSA-10	Spectrum Analyzer	Agilent	E4448A	MY46180655	RE	2015/02/26 * 12
MHA-20	Horn Antenna 1-18GHz	Schwarzbeck	BBHA9120D	258	RE	2015/05/18 * 12
MCC-167	Microwave Cable	Junkosha	MWX221	1404S374(1m) / 1405S074(5m)	RE	2015/05/21 * 12
MPA-11	MicroWave System Amplifier	Agilent	83017A	MY39500779	RE	2015/03/19 * 12
MMM-08	DIGITAL HiTESTER	Hioki	3805	051201197	RE	2015/01/16 * 12
MHF-22	High Pass Filter 7-20GHz	TOKIMEC	TF37NCCB	602	RE	2015/01/27 * 12
MCC-177	Microwave Cable	Junkosha	MMX221-00500DMSDMS	1502S304	RE	2015/03/27 * 12
MHA-16	Horn Antenna 15-40GHz	Schwarzbeck	BBHA9170	BBHA9170306	RE	2015/05/19 * 12
MHA-29	Horn Antenna 26.5-40GHz	ETS LINDGREN	3160-10	00152399	RE	2014/09/02 * 12
MPA-22	Pre Amplifier	MITEQ, Inc	AMF-6F-2600400-33-8P / AMF-4F-2600400-33-8P	1871355 /1871328	RE	2014/09/11 * 12
MCC-54	Microwave Cable	Suhner	SUCOFLEX101	2873(1m) / 2876(5m)	RE	2015/03/09 * 12
MAEC-02	Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 3m	DA-06902	RE	2015/07/01 * 12
MOS-22	Thermo-Hygrometer	Custom	CTH-201	0003	RE	2015/01/13 * 12
MJM-14	Measure	KOMELON	KMC-36	-	RE	-
MTR-03	Test Receiver	Rohde & Schwarz	ESCI	100300	RE	2015/06/08 * 12
MSA-13	Spectrum Analyzer	Agilent	E4440A	MY46185823	RE	2015/06/02 * 12
MBA-02	Biconical Antenna	Schwarzbeck	BBA9106	VHA91032008	RE	2014/10/18 * 12
MLA-02	Logperiodic Antenna	Schwarzbeck	USLP9143	201	RE	2014/10/18 * 12
MCC-12	Coaxial Cable	Fujikura/Agilent	-	-	RE	2015/02/06 * 12
MAT-07	Attenuator(6dB)	Weinschel Corp	2	BK7970	RE	2014/11/11 * 12
MPA-09	Pre Amplifier	Agilent	8447D	2944A10845	RE	2014/09/26 * 12

The expiration date of the calibration is the end of the expired month.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

Test Item: RE: Radiated Emission

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124