

**APPENDIX 2: Data of EMI test**

**Conducted Emission**


**DATA OF CONDUCTED EMISSION TEST**

UL Japan, Inc. Head Office EMC Lab. No.4 Semi Anechoic Chamber  
Date : 2011/08/30

Report No. : 32AE0138-HO-01  
Temp./Humi. : 25deg. C / 64% RH  
Engineer : Takumi Shimada

Mode / Remarks : Tx 11n-40 MCS8 2437MHz Antenna 0+1

LIMIT : FCC15.207 QP  
FCC15.207 AV

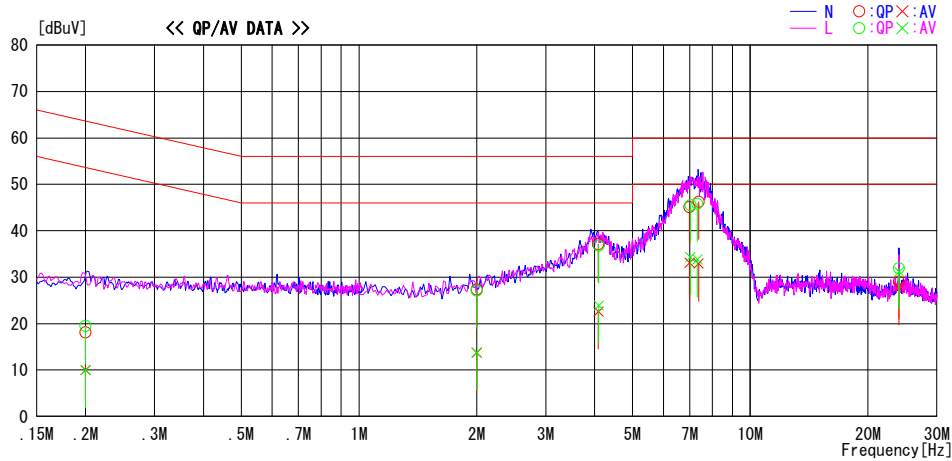

Frequency [MHz]	Reading Level		Corr. Factor	Results		Limit		Margin		Phase	Comment
	QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dB]	AV [dB]		
0.20000	4.8	-3.3	13.3	18.1	10.0	63.6	53.6	45.5	43.6	N	
2.00000	13.9	0.3	13.4	27.3	13.7	56.0	46.0	28.7	32.3	N	
4.09240	23.5	9.0	13.6	37.1	22.6	56.0	46.0	18.9	23.4	N	
6.99680	31.3	19.3	13.8	45.1	33.1	60.0	50.0	14.9	16.9	N	
7.37945	32.3	19.0	13.9	46.2	32.9	60.0	50.0	13.8	17.1	N	
24.00352	14.2	13.0	14.8	29.0	27.8	60.0	50.0	31.0	22.2	N	
0.20000	6.2	-3.3	13.3	19.5	10.0	63.6	53.6	44.1	43.6	L	
2.00000	13.7	0.4	13.4	27.1	13.8	56.0	46.0	28.9	32.2	L	
4.09800	23.2	10.3	13.6	36.8	23.9	56.0	46.0	19.2	22.1	L	
7.03198	31.7	20.5	13.8	45.5	34.3	60.0	50.0	14.5	15.7	L	
7.32521	31.9	19.9	13.9	45.8	33.8	60.0	50.0	14.2	16.2	L	
24.00164	17.1	16.4	14.8	31.9	31.2	60.0	50.0	28.1	18.8	L	

CHART: WITH FACTOR, Peak hold data. CALCULATION: RESULT[dBuV]=READING[dBuV]+C.F[dB] (LISN LOSS+CABLE LOSS)  
Except for the above table : adequate margin data below the limits.

## Conducted Emission

### DATA OF CONDUCTED EMISSION TEST


UL Japan, Inc. Head Office EMC Lab. No. 4 Semi Anechoic Chamber  
Date : 2011/08/30

Report No. : 32AE0138-HO-01

Temp./Humi. : 25deg. C / 64% RH  
Engineer : Takumi Shimada

Mode / Remarks : Rx 2437MHz Antenna 0

LIMIT : FCC15. 207 QP  
FCC15. 207 AV

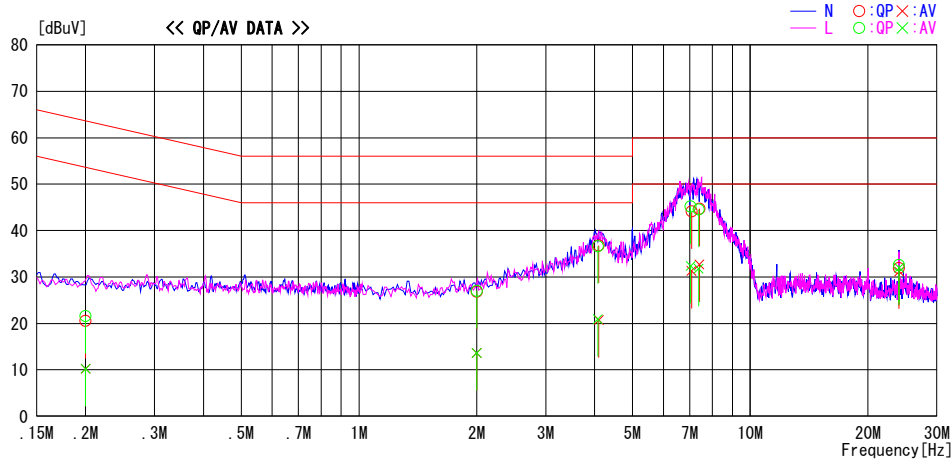

Frequency [MHz]	Reading Level		Corr. Factor [dB]	Results		Limit		Margin		Phase	Comment
	QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dB]	AV [dB]		
0.20000	7.2	-3.1	13.3	20.5	10.2	63.6	53.6	43.1	43.4	N	
2.00000	13.4	0.2	13.4	26.8	13.6	56.0	46.0	29.2	32.4	N	
4.10112	23.2	7.1	13.6	36.8	20.7	56.0	46.0	19.2	25.3	N	
7.08320	30.3	17.5	13.8	44.1	31.3	60.0	50.0	15.9	18.7	N	
7.41481	30.8	18.8	13.9	44.7	32.7	60.0	50.0	15.3	17.3	N	
24.00184	17.1	16.4	14.8	31.9	31.2	60.0	50.0	28.1	18.8	N	
0.20000	8.3	-3.1	13.3	21.6	10.2	63.6	53.6	42.0	43.4	L	
2.00000	13.6	0.2	13.4	27.0	13.6	56.0	46.0	29.0	32.4	L	
4.07534	23.0	7.3	13.6	36.6	20.9	56.0	46.0	19.4	25.1	L	
7.03784	31.4	18.6	13.8	45.2	32.4	60.0	50.0	14.8	17.6	L	
7.38520	30.6	17.9	13.9	44.5	31.8	60.0	50.0	15.5	18.2	L	
24.00060	17.8	17.2	14.8	32.6	32.0	60.0	50.0	27.4	18.0	L	

CHART: WITH FACTOR, Peak hold data. CALCULATION: RESULT[dBuV]=READING[dBuV]+C. F[dB] (LISN LOSS+CABLE LOSS)  
Except for the above table : adequate margin data below the limits.

## 6dB Bandwidth

Test place	Head Office EMC Lab. No.7 Shielded Room
Report No.	32AE0138-HO-01
Date	05/20/2011
Temperature/ Humidity	24 deg.C / 40% RH
Engineer	Takumi Shimada
Mode	Tx

11b, Antenna 0

Frequency [MHz]	6dB Bandwidth [MHz]	Limit [kHz]
2412	9.635	>500
2437	11.099	>500
2462	9.456	>500

11g, Antenna 0

Frequency [MHz]	6dB Bandwidth [MHz]	Limit [kHz]
2412	16.377	>500
2437	16.384	>500
2462	16.384	>500

11n-20

Antenna	Frequency [MHz]	6dB Bandwidth [MHz]	Limit [kHz]
0	2412	17.723	>500
	2437	17.730	>500
	2462	17.777	>500
1	2412	17.770	>500
	2437	17.749	>500
	2462	17.779	>500


11n-40

Antenna	Frequency [MHz]	6dB Bandwidth [MHz]	Limit [kHz]
0	2422	36.261	>500
	2437	35.924	>500
	2452	36.086	>500
1	2422	36.355	>500
	2437	36.407	>500
	2452	36.329	>500


### 6dB Bandwidth

**11b, Antenna 0, 11Mbps(Long)**

**11g, Antenna 0, 9Mbps**

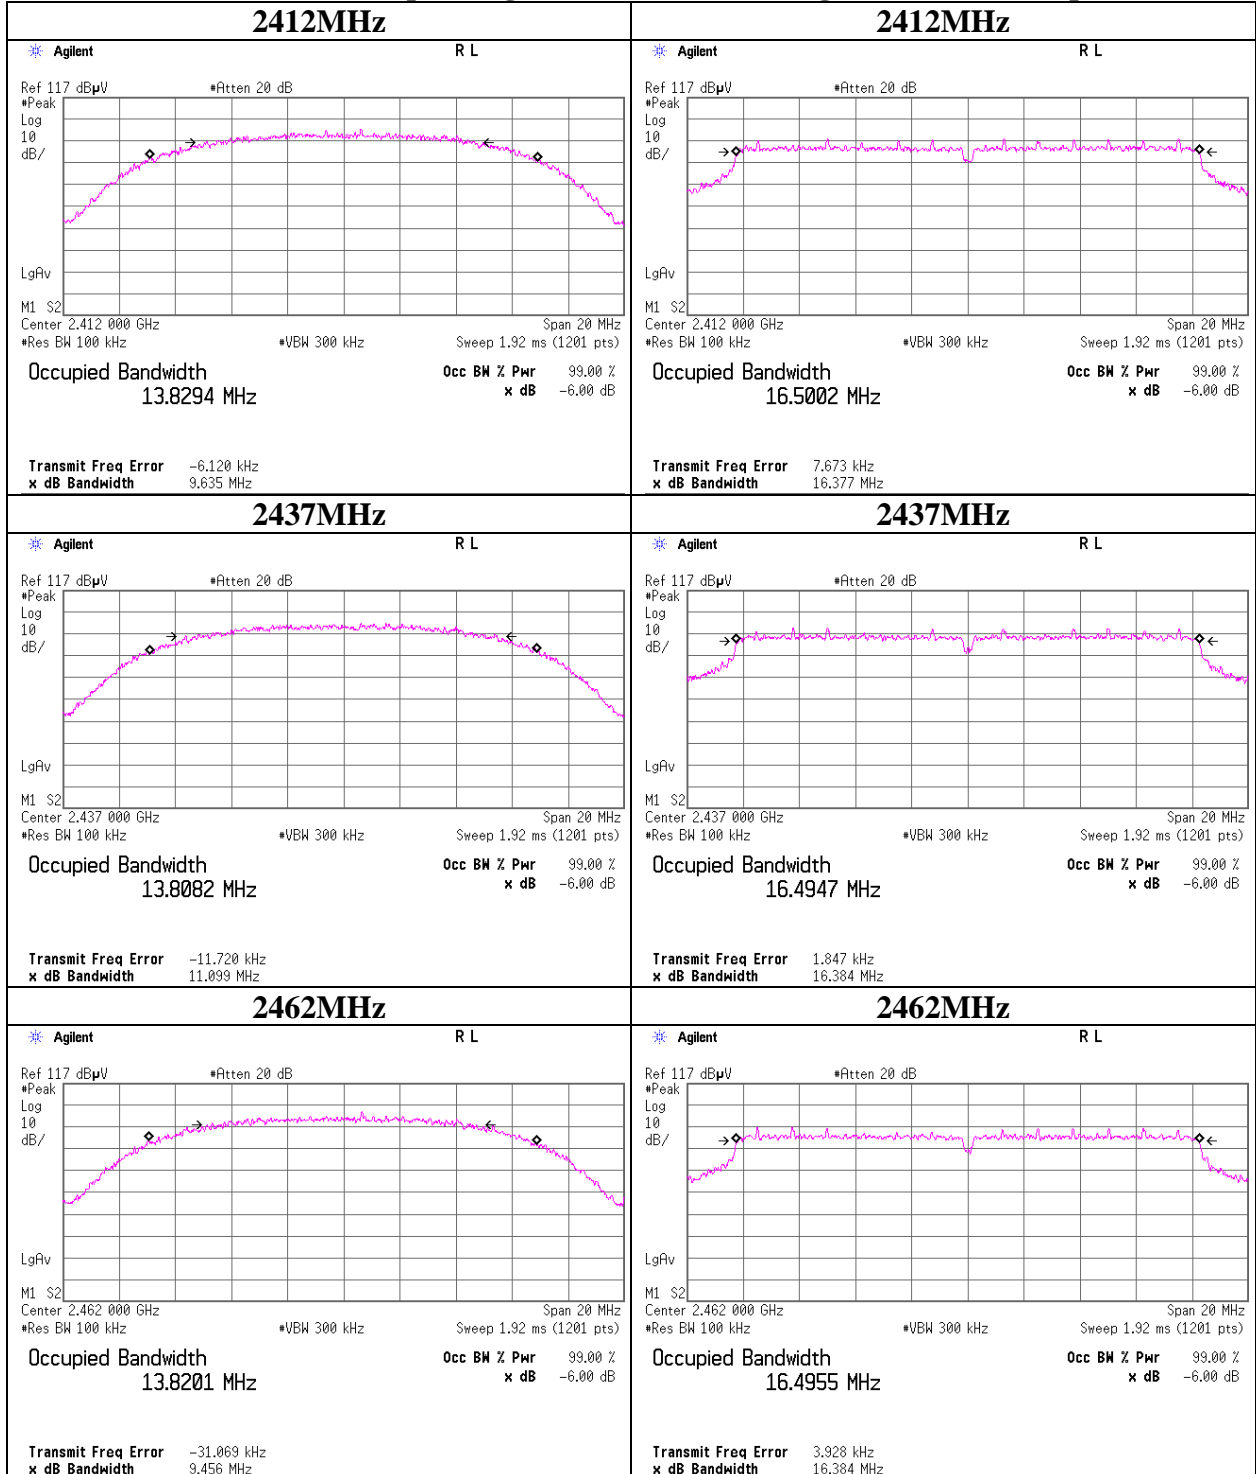

**6dB Bandwidth**

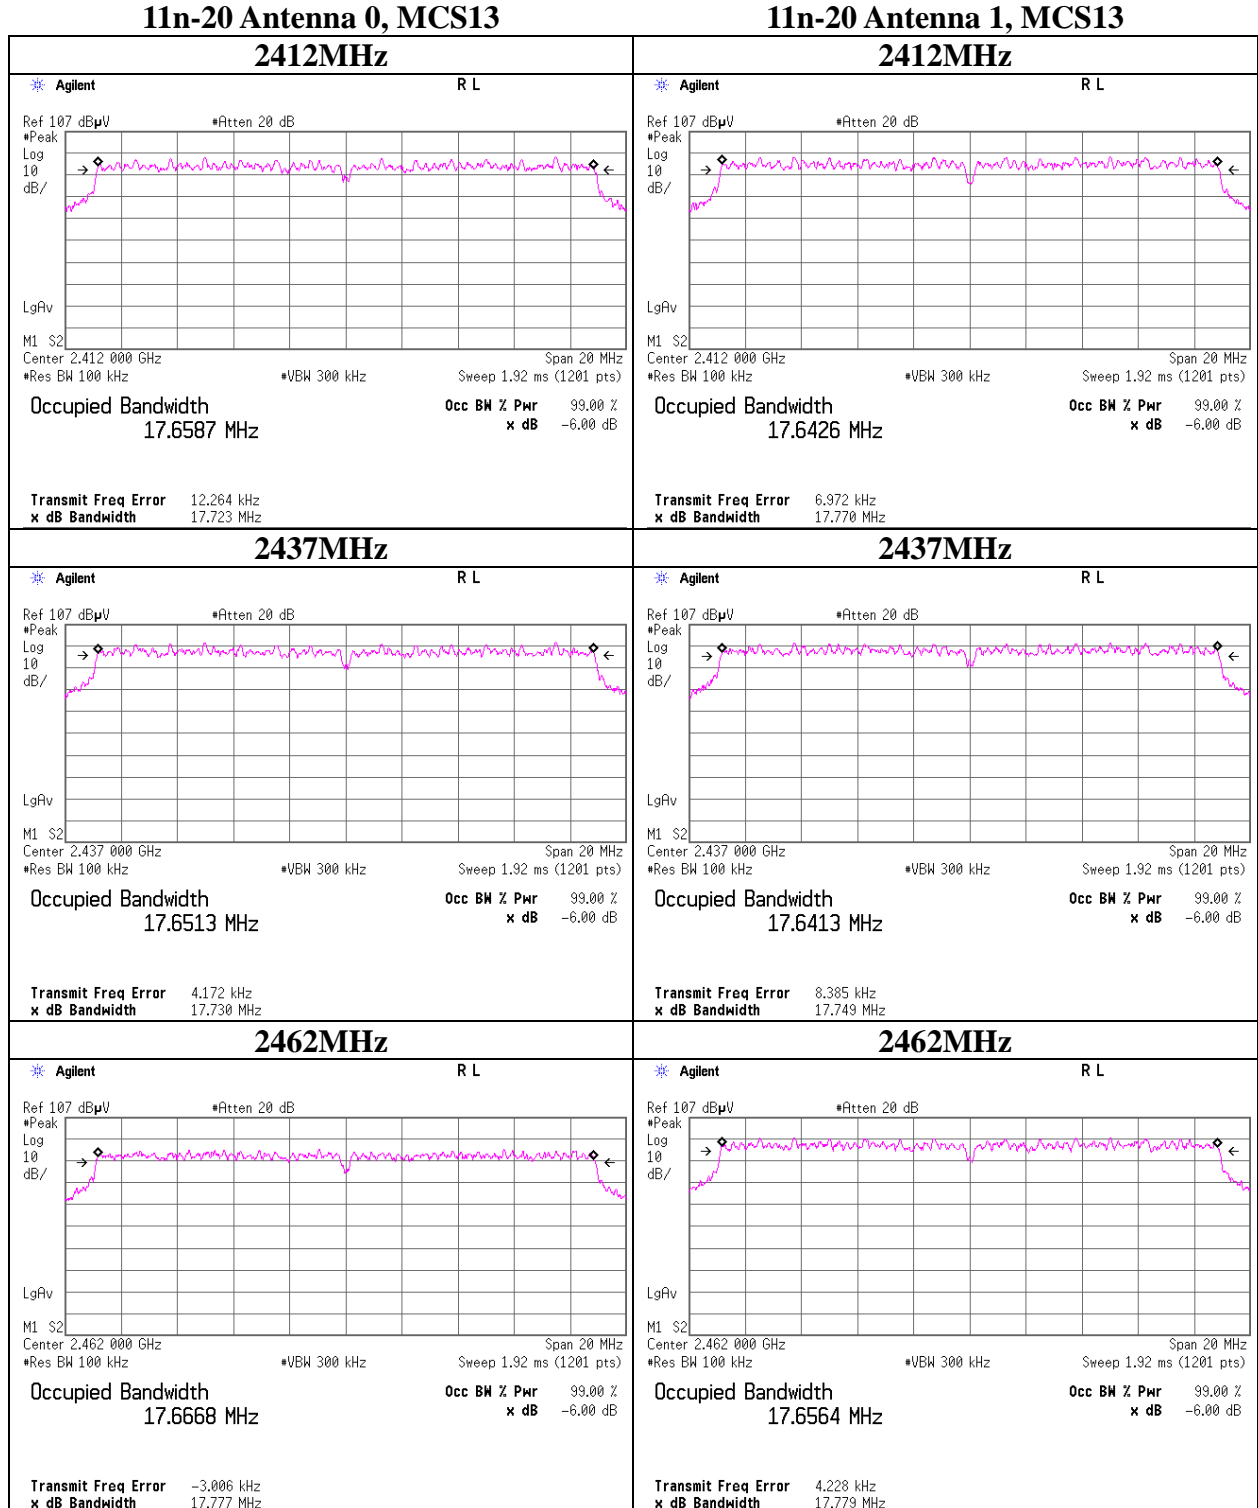

### 6dB Bandwidth

**11n-40 Antenna 0, MCS8**

**11n-40 Antenna 1, MCS8**



### Maximum Peak Output Power

Test place	Head Office EMC Lab. No.6 and 11 Measurement Room	
Report No.	32AE0138-HO-01	
Date	04/21/2011	05/10/2011
Temperature/ Humidity	22 deg.C / 31% RH	23 deg.C / 37% RH
Engineer	Yutaka Yoshida	Takumi Shimada
Mode	11b Tx	

Antenna 0, 11Mbps(Long)

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result		Limit		Margin [dB]
				[dBm]	[mW]	[dBm]	[mW]	
2412	6.02	0.79	10.07	16.88	48.75	30.00	1000	13.12
2437	6.43	0.80	10.07	17.30	53.70	30.00	1000	12.70
2462	6.76	0.80	10.07	17.63	57.94	30.00	1000	12.37

Antenna 1, 2Mbps(Short)

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result		Limit		Margin [dB]
				[dBm]	[mW]	[dBm]	[mW]	
2412	5.93	0.79	10.07	16.79	47.75	30.00	1000	13.21
2437	6.32	0.80	10.07	17.19	52.36	30.00	1000	12.81
2462	6.37	0.80	10.07	17.24	52.97	30.00	1000	12.76

Sample Calculation:

Result = Reading + Cable Loss + Attenuator

Antenna 0, 2437MHz

Rate [Mbps]	Reading [dBm]	Remark
1(long)	6.36	
2(Long)	6.34	
2(Short)	6.32	
5.5(long)	6.35	
5.5(Short)	6.31	
11(Long)	6.43	*
11(Short)	6.41	

Antenna 1, 2437MHz

Rate [Mbps]	Reading [dBm]	Remark
1(long)	6.00	
2(Long)	6.31	
2(Short)	6.32	*
5.5(long)	6.08	
5.5(Short)	6.06	
11(Long)	6.13	
11(Short)	6.20	

\*: Worst Rate

All comparizon were carried out on same frequency and measurement factors.

**UL Japan, Inc.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

### Maximum Peak Output Power

Test place	Head Office EMC Lab. No.7 and 11 Measurement Room	
Report No.	32AE0138-HO-01	
Date	04/21/2011	05/20/2011
Temperature/ Humidity	22 deg.C / 31% RH	24 deg.C / 40% RH
Engineer	Yutaka Yoshida	Takumi Shimada
Mode	11g Tx	

Antenna 0, 9Mbps

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result		Limit		Margin [dB]
				[dBm]	[mW]	[dBm]	[mW]	
2412	10.98	0.79	10.07	21.84	152.76	30.00	1000	8.16
2437	13.23	0.80	10.07	24.10	257.04	30.00	1000	5.90
2462	10.96	0.80	10.07	21.83	152.41	30.00	1000	8.17

Antenna 1, 9Mbps

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result		Limit		Margin [dB]
				[dBm]	[mW]	[dBm]	[mW]	
2412	10.63	0.79	10.07	21.49	140.93	30.00	1000	8.51
2437	12.97	0.80	10.07	23.84	242.10	30.00	1000	6.16
2462	10.22	0.80	10.07	21.09	128.53	30.00	1000	8.91

Sample Calculation:

Result = Reading + Cable Loss + Attenuator

Antenna 0, 2437MHz

Rate [Mbps]	Reading [dBm]	Remark
6	12.63	
9	13.23	*
12	12.55	
18	12.75	
24	12.81	
36	12.45	
48	10.82	
54	10.17	

Antenna 1, 2437MHz

Rate [Mbps]	Reading [dBm]	Remark
6	12.22	
9	12.97	*
12	12.28	
18	12.44	
24	12.24	
36	11.82	
48	10.08	
54	10.06	

\*: Worst Rate

All comparison were carried out on same frequency and measurement factors.



## Maximum Peak Output Power

Test place : Head Office EMC Lab. No.7 and 11 Measurement Room  
Report No. : 32AE0138-HO-01  
Date : 04/21/2011 05/20/2011  
Temperature/ Humidity : 22 deg.C / 31% RH 24 deg.C / 40% RH  
Engineer : Yutaka Yoshida Takumi Shimada  
Mode : 11n-20 Tx

Antenna 0 + 1, MCS13

Freq. [MHz]	Antenna 0 Result [mW]	Antenna 1 Result [mW]	Result		Limit		Margin [dB]
			[dBm]	[mW]	[dBm]	[mW]	
2412	91.83	92.90	22.67	184.73	30.00	1000	7.33
2437	169.43	167.88	25.28	337.31	30.00	1000	4.72
2462	135.52	139.00	24.39	274.51	30.00	1000	5.61

Sample Calculation:

Result = Antenna 0 + 1

Antenna 0, MCS13

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result		Limit		Margin [dB]
				[dBm]	[mW]	[dBm]	[mW]	
2412	8.77	0.79	10.07	19.63	91.83	30.00	1000	10.37
2437	11.42	0.80	10.07	22.29	169.43	30.00	1000	7.71
2462	10.45	0.80	10.07	21.32	135.52	30.00	1000	8.68

Sample Calculation:

Result = Reading + Cable Loss + Attenuator

Antenna 1, MCS13

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result		Limit		Margin [dB]
				[dBm]	[mW]	[dBm]	[mW]	
2412	8.82	0.79	10.07	19.68	92.90	30.00	1000	10.32
2437	11.38	0.80	10.07	22.25	167.88	30.00	1000	7.75
2462	10.56	0.80	10.07	21.43	139.00	30.00	1000	8.57

Sample Calculation:

Result = Reading + Cable Loss + Attenuator

### Maximum Peak Output Power

Test place	Head Office EMC Lab. No.7 and 11 Measurement Room	
Report No.	32AE0138-HO-01	
Date	04/21/2011	05/20/2011
Temperature/ Humidity	22 deg.C / 31 % RH	24 deg.C / 40% RH
Engineer	Yutaka Yoshida	Takumi Shimada
Mode	11n-20 Tx	

Antenna 0, 2437MHz

MCS Number	Antenna 0 Reading		Remark
	[dBm]	[mW]	
0	10.75	11.89	
1	10.38	10.91	
2	10.82	12.08	
3	10.76	11.91	
4	10.98	12.53	
5	10.88	12.25	
6	9.73	9.40	
7	9.14	8.20	

Antenna 1, 2437MHz

MCS Number	Antenna 0 Reading		Remark
	[dBm]	[mW]	
0	10.10	10.23	
1	9.36	8.63	
2	9.58	9.08	
3	9.69	9.31	
4	9.61	9.14	
5	9.54	8.99	
6	8.64	7.31	
7	8.21	6.62	

Antenna 0 + 1 , 2437MHz

MCS Number	Antenna 0 Reading		Antenna 1 Reading		Total Reading Power		Remark
	[dBm]	[mW]	[dBm]	[mW]	[dBm]	[mW]	
8	11.11	12.91	11.65	14.62	14.40	27.53	
9	10.90	12.30	11.37	13.71	14.15	26.01	
10	11.12	12.94	11.30	13.49	14.22	26.43	
11	10.96	12.47	11.32	13.55	14.15	26.03	
12	11.21	13.21	11.50	14.13	14.37	27.34	
13	11.42	13.87	11.38	13.74	14.41	27.61	*
14	10.12	10.28	10.51	11.25	13.33	21.53	
15	9.30	8.51	10.16	10.38	12.76	18.89	

\* Worst Rate

Total Reading Power = Antenna 0 Reading + Antenna 1 Reading

All comparison were carried out on same frequency and measurement factors.

## Maximum Peak Output Power

Test place	Head Office EMC Lab. No.7 and 11 Measurement Room	
Report No.	32AE0138-HO-01	
Date	04/21/2011	05/20/2011
Temperature/ Humidity	22 deg.C / 31% RH	24 deg.C / 40% RH
Engineer	Yutaka Yoshida	Takumi Shimada
Mode	11n-40 Tx	

### Antenna 0 + 1, MCS8

Freq. [MHz]	Antenna 0 Result [mW]	Antenna 1 Result [mW]	Result		Limit		Margin [dB]
			[dBm]	[mW]	[dBm]	[mW]	
2422	78.52	80.91	22.03	159.43	30.00	1000	7.97
2437	179.89	258.23	26.42	438.11	30.00	1000	3.58
2452	79.43	85.31	22.17	164.74	30.00	1000	7.83

Sample Calculation:

Result = Antenna 0 + 1

### Antenna 0, MCS8

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result		Limit		Margin [dB]
				[dBm]	[mW]	[dBm]	[mW]	
2422	8.09	0.79	10.07	18.95	78.52	30.00	1000	11.05
2437	11.68	0.80	10.07	22.55	179.89	30.00	1000	7.45
2452	8.13	0.80	10.07	19.00	79.43	30.00	1000	11.00

Sample Calculation:

Result = Reading + Cable Loss + Attenuator

### Antenna 1, MCS8

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result		Limit		Margin [dB]
				[dBm]	[mW]	[dBm]	[mW]	
2422	8.22	0.79	10.07	19.08	80.91	30.00	1000	10.92
2437	13.25	0.80	10.07	24.12	258.23	30.00	1000	5.88
2452	8.44	0.80	10.07	19.31	85.31	30.00	1000	10.69

Sample Calculation:

Result = Reading + Cable Loss + Attenuator

### Maximum Peak Output Power

Test place : Head Office EMC Lab. No.7 and 11 Measurement Room  
Report No. : 32AE0138-HO-01  
Date : 04/21/2011 05/20/2011  
Temperature/ Humidity : 22 deg.C / 31 % RH 24 deg.C / 40% RH  
Engineer : Yutaka Yoshida Takumi Shimada  
Mode : 11n-40 Tx

Antenna 0, 2437MHz

MCS Number	Reading		Remark
	[dBm]	[mW]	
0	12.39	17.34	
1	11.15	13.03	
2	10.94	12.42	
3	11.13	12.97	
4	11.27	13.40	
5	11.39	13.77	
6	9.42	8.75	
7	8.73	7.46	

Antenna 1, 2437MHz

MCS Number	Reading		Remark
	[dBm]	[mW]	
0	10.53	11.30	
1	9.25	8.41	
2	9.26	8.43	
3	9.35	8.61	
4	9.38	8.67	
5	9.83	9.62	
6	7.28	5.35	
7	7.03	5.05	

Antenna 0 + 1 , 2437MHz

MCS Number	Antenna 0 Reading		Antenna 1 Reading		Total Reading Power		Remark [dB]
	[dBm]	[mW]	[dBm]	[mW]	[dBm]	[mW]	
8	11.68	14.72	13.25	21.13	15.55	35.86	*
9	11.43	13.90	12.08	16.14	14.78	30.04	
10	11.32	13.55	11.91	15.52	14.64	29.08	
11	11.19	13.15	11.92	15.56	14.58	28.71	
12	11.55	14.29	12.09	16.18	14.84	30.47	
13	10.95	12.45	11.65	14.62	14.32	27.07	
14	9.22	8.36	9.83	9.62	12.55	17.97	
15	8.99	7.93	9.59	9.10	12.31	17.02	

\*Worst Rate

Total Reading Power = Antenna 0 Reading + Antenna 1 Reading

All comparison were carried out on same frequency and measurement factors.

## Radiated Spurious Emission

Test place Head Office EMC Lab. No.3 Semi Anechoic Chamber  
Report No. 32AE0138-HO-01  
Date 08/23/2011  
Temperature/ Humidity 23 deg.C / 58% RH  
Engineer Takumi Shimada  
(1-26.5GHz)  
Mode 11b Tx 2412MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	2390.000	PK	52.1	26.4	2.5	32.6	48.4	73.9	25.5	
Hori	2398.625	PK	72.4	26.4	2.5	32.6	68.7	-	-	See 20dBc Data Sheet
Hori	2400.000	PK	71.2	26.4	2.5	32.6	67.5	-	-	See 20dBc Data Sheet
Hori	3215.966	PK	47.9	28.1	2.9	32.2	46.7	73.9	27.2	
Hori	4824.000	PK	44.2	30.4	5.2	31.9	47.9	73.9	26.0	
Hori	7236.000	PK	41.5	35.2	6.2	32.4	50.5	73.9	23.5	
Hori	9648.000	PK	42.3	38.1	6.8	32.9	54.3	73.9	19.6	
Hori	24120.000	PK	44.5	38.6	-0.9	31.6	50.6	73.9	23.3	
Hori	2390.000	AV	39.6	26.4	2.5	32.6	35.9	53.9	18.0	
Hori	2398.625	AV	63.8	26.4	2.5	32.6	60.1	-	-	See 20dBc Data Sheet
Hori	2400.000	AV	61.3	26.4	2.5	32.6	57.6	-	-	See 20dBc Data Sheet
Hori	3215.966	AV	42.8	28.1	2.9	32.2	41.6	53.9	12.3	
Hori	4824.000	AV	31.9	30.4	5.2	31.9	35.6	53.9	18.3	
Hori	7236.000	AV	29.1	35.2	6.2	32.4	38.1	53.9	15.8	
Hori	9648.000	AV	30.0	38.1	6.8	32.9	42.0	53.9	11.9	
Hori	24120.000	AV	32.2	38.6	-0.9	31.6	38.3	53.9	15.6	
Vert	2390.000	PK	53.3	26.4	2.5	32.6	49.6	73.9	24.3	
Vert	2398.625	PK	73.2	26.4	2.5	32.6	69.5	-	-	See 20dBc Data Sheet
Vert	2400.000	PK	72.4	26.4	2.5	32.6	68.7	-	-	See 20dBc Data Sheet
Vert	3216.008	PK	47.8	28.1	2.9	32.2	46.6	73.9	27.3	
Vert	4824.000	PK	45.0	30.4	5.2	31.9	48.7	73.9	25.2	
Vert	7236.000	PK	41.0	35.2	6.2	32.4	50.0	73.9	23.9	
Vert	9648.000	PK	42.7	38.1	6.8	32.9	54.7	73.9	19.2	
Vert	24120.000	PK	44.5	38.6	-0.9	31.6	50.6	73.9	23.3	
Vert	2390.000	AV	41.0	26.4	2.5	32.6	37.3	53.9	16.6	
Vert	2398.625	AV	65.1	26.4	2.5	32.6	61.4	-	-	See 20dBc Data Sheet
Vert	2400.000	AV	62.4	26.4	2.5	32.6	58.7	-	-	See 20dBc Data Sheet
Vert	3216.008	AV	43.3	28.1	2.9	32.2	42.1	53.9	11.8	
Vert	4824.000	AV	32.4	30.4	5.2	31.9	36.1	53.9	17.8	
Vert	7236.000	AV	29.1	35.2	6.2	32.4	38.1	53.9	15.8	
Vert	9648.000	AV	30.0	38.1	6.8	32.9	42.0	53.9	11.9	
Vert	24120.000	AV	32.2	38.6	-0.9	31.6	38.3	53.9	15.6	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).

\*The 10th harmonic was not seen so the result was its base noise level.

Distance factor: 10GHz-26.5GHz  $20\log(3.0m/1.0m) = 9.5dB$

### 20dBc Data Sheet

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	2412.000	PK	105.3	26.4	2.5	32.6	101.6	-	-	Carrier
Hori	2398.625	PK	65.1	26.4	2.5	32.6	61.4	81.6	20.2	
Hori	2400.000	PK	63.0	26.4	2.5	32.6	59.3	81.6	22.3	
Vert	2412.000	PK	105.9	26.4	2.5	32.6	102.2	-	-	Carrier
Vert	2398.625	PK	67.1	26.4	2.5	32.6	63.4	82.2	18.8	
Vert	2400.000	PK	64.0	26.4	2.5	32.6	60.3	82.2	21.9	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)



















## Radiated Spurious Emission

Test place : Head Office EMC Lab. No.3 Semi Anechoic Chamber  
Report No. : 32AE0138-HO-01  
Date : 08/23/2011  
Temperature/ Humidity : 23 deg.C / 58% RH  
Engineer : Takumi Shimada  
(1-26.5GHz)  
Mode : 11n-40 Tx 2422MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	2390.000	PK	69.4	26.4	2.5	32.6	65.7	73.9	8.2	
Hori	2399.750	PK	84.5	26.4	2.5	32.6	80.8	-	-	See 20dBc Data Sheet
Hori	2400.000	PK	85.0	26.4	2.5	32.6	81.3	-	-	See 20dBc Data Sheet
Hori	3229.350	PK	52.0	28.1	3.0	32.2	50.9	73.9	23.0	
Hori	4844.000	PK	40.6	30.4	5.2	31.9	44.3	73.9	29.6	
Hori	7266.000	PK	41.3	35.2	6.3	32.4	50.4	73.9	23.6	
Hori	9688.000	PK	42.0	38.2	6.9	32.9	54.2	73.9	19.7	
Hori	24220.000	PK	44.9	38.7	-0.9	31.5	51.2	73.9	22.7	
Hori	2390.000	AV	54.2	26.4	2.5	32.6	50.5	53.9	3.4	
Hori	2399.750	AV	64.0	26.4	2.5	32.6	60.3	-	-	See 20dBc Data Sheet
Hori	2400.000	AV	64.4	26.4	2.5	32.6	60.7	-	-	See 20dBc Data Sheet
Hori	3229.350	AV	48.9	28.1	3.0	32.2	47.8	53.9	6.1	
Hori	4844.000	AV	28.4	30.4	5.2	31.9	32.1	53.9	21.8	
Hori	7266.000	AV	29.5	35.2	6.3	32.4	38.6	53.9	15.3	
Hori	9688.000	AV	29.9	38.2	6.9	32.9	42.1	53.9	11.8	
Hori	24220.000	AV	32.3	38.7	-0.9	31.5	38.6	53.9	15.3	
Vert	2390.000	PK	72.5	26.4	2.5	32.6	68.8	73.9	5.1	
Vert	2399.750	PK	86.7	26.4	2.5	32.6	83.0	-	-	See 20dBc Data Sheet
Vert	2400.000	PK	87.1	26.4	2.5	32.6	83.4	-	-	See 20dBc Data Sheet
Vert	3229.333	PK	51.4	28.1	3.0	32.2	50.3	73.9	23.6	
Vert	4844.000	PK	40.3	30.4	5.2	31.9	44.0	73.9	29.9	
Vert	7266.000	PK	41.8	35.2	6.3	32.4	50.9	73.9	23.0	
Vert	9688.000	PK	42.1	38.2	6.9	32.9	54.3	73.9	19.6	
Vert	24220.000	PK	44.9	38.7	-0.9	31.5	51.2	73.9	22.7	
Vert	2390.000	AV	55.5	26.4	2.5	32.6	51.8	53.9	2.1	
Vert	2399.750	AV	65.0	26.4	2.5	32.6	61.3	-	-	See 20dBc Data Sheet
Vert	2400.000	AV	65.3	26.4	2.5	32.6	61.6	-	-	See 20dBc Data Sheet
Vert	3229.333	AV	48.2	28.1	3.0	32.2	47.1	53.9	6.8	
Vert	4844.000	AV	28.3	30.4	5.2	31.9	32.0	53.9	21.9	
Vert	7266.000	AV	29.6	35.2	6.3	32.4	38.7	53.9	15.3	
Vert	9688.000	AV	29.8	38.2	6.9	32.9	42.0	53.9	11.9	
Vert	24220.000	AV	32.3	38.7	-0.9	31.5	38.6	53.9	15.3	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).

\*The 10th harmonic was not seen so the result was its base noise level.

Distance factor: 10GHz-26.5GHz 20log(3.0m/1.0m)= 9.5dB

### 20dBc Data Sheet

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	2422.000	PK	101.2	26.4	2.5	32.6	97.5	-	-	Carrier
Hori	2399.750	PK	69.5	26.4	2.5	32.6	65.8	77.5	11.7	
Hori	2400.000	PK	70.1	26.4	2.5	32.6	66.4	77.5	11.1	
Vert	2422.000	PK	101.7	26.4	2.5	32.6	98.0	-	-	Carrier
Vert	2399.750	PK	70.5	26.4	2.5	32.6	66.8	78.0	11.2	
Vert	2400.000	PK	70.6	26.4	2.5	32.6	66.9	78.0	11.1	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)



## Radiated Spurious Emission

Test place : Head Office EMC Lab. No.3 Semi Anechoic Chamber  
Report No. : 32AE0138-HO-01  
Date : 08/23/2011  
Temperature/ Humidity : 23 deg.C / 58% RH  
Engineer : Takumi Shimada  
(1-26.5GHz)  
Mode : 11n-40 Tx 2452MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	2483.500	AV	56.7	26.5	2.6	32.6	53.2	53.9	0.7	
Hori	2489.500	AV	53.6	26.5	2.6	32.6	50.1	53.9	3.8	
Hori	3269.342	AV	46.0	28.2	3.0	32.2	45.0	53.9	8.9	
Hori	4904.000	AV	28.5	30.5	5.1	31.9	32.2	53.9	21.7	
Hori	7356.000	AV	29.7	35.2	6.3	32.4	38.8	53.9	15.1	
Hori	9808.000	AV	29.6	38.4	6.9	32.9	42.0	53.9	11.9	
Hori	24520.000	AV	33.2	38.9	-0.9	31.3	39.9	53.9	14.0	
Hori	2483.500	PK	74.6	26.5	2.6	32.6	71.1	73.9	2.8	
Hori	2489.500	PK	73.8	26.5	2.6	32.6	70.3	73.9	3.6	
Hori	3269.342	PK	49.9	28.2	3.0	32.2	48.9	73.9	25.0	
Hori	4904.000	PK	41.0	30.5	5.1	31.9	44.7	73.9	29.2	
Hori	7356.000	PK	41.4	35.2	6.3	32.4	50.5	73.9	23.4	
Hori	9808.000	PK	41.8	38.4	6.9	32.9	54.2	73.9	19.7	
Hori	24520.000	PK	46.1	38.9	-0.9	31.3	52.8	73.9	21.1	
Vert	2483.500	AV	53.6	26.5	2.6	32.6	50.1	53.9	3.8	
Vert	2489.500	AV	50.3	26.5	2.6	32.6	46.8	53.9	7.1	
Vert	3269.341	AV	45.8	28.2	3.0	32.2	44.8	53.9	9.1	
Vert	4904.000	AV	28.6	30.5	5.1	31.9	32.3	53.9	21.6	
Vert	7356.000	AV	29.9	35.2	6.3	32.4	39.0	53.9	14.9	
Vert	9808.000	AV	29.9	38.4	6.9	32.9	42.3	53.9	11.6	
Vert	24520.000	AV	33.3	38.9	-0.9	31.3	40.0	53.9	14.0	
Vert	2483.500	PK	70.8	26.5	2.6	32.6	67.3	73.9	6.6	
Vert	2489.500	PK	67.0	26.5	2.6	32.6	63.5	73.9	10.4	
Vert	3269.341	PK	49.4	28.2	3.0	32.2	48.4	73.9	25.5	
Vert	4904.000	PK	42.1	30.5	5.1	31.9	45.8	73.9	28.1	
Vert	7356.000	PK	41.3	35.2	6.3	32.4	50.4	73.9	23.5	
Vert	9808.000	PK	42.4	38.4	6.9	32.9	54.8	73.9	19.1	
Vert	24520.000	PK	45.3	38.9	-0.9	31.3	52.0	73.9	21.9	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).


\*The 10th harmonic was not seen so the result was its base noise level.

Distance factor: 10GHz-26.5GHz 20log(3.0m/1.0m)= 9.5dB






**The tested burst timing**

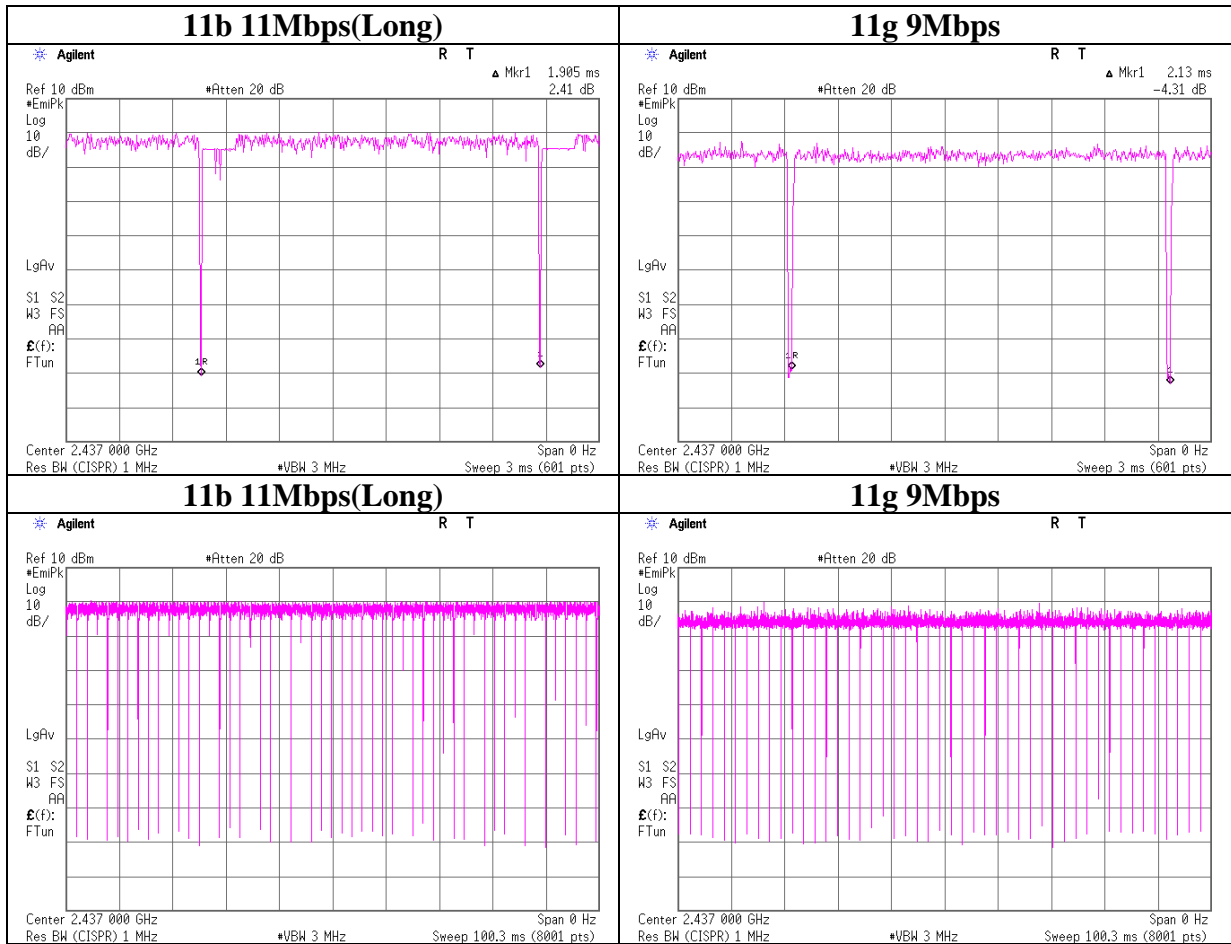


**The tested burst timing**

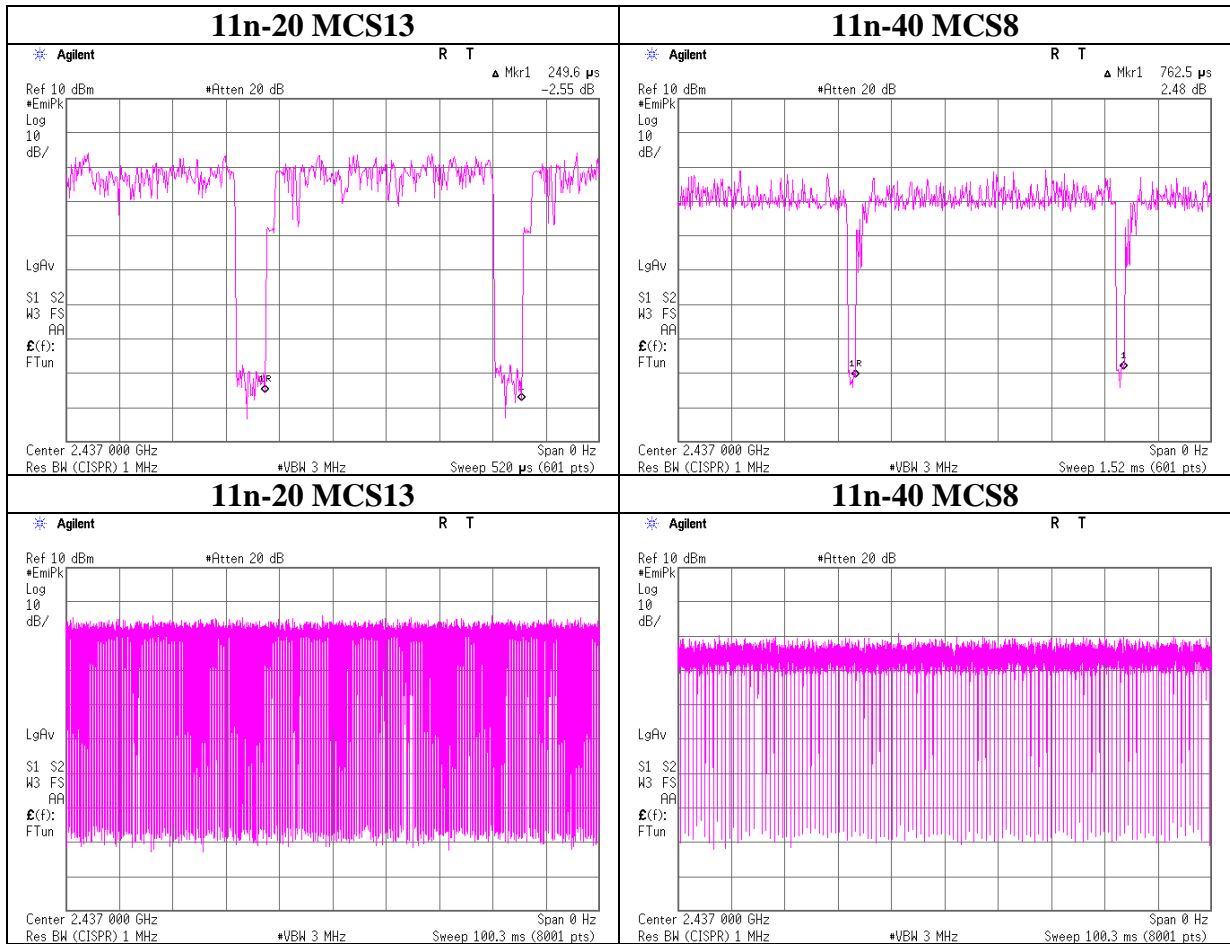


## Conducted Spurious Emission

### 11b Tx 2412MHz, Antenna 0, 11Mbps(Long)

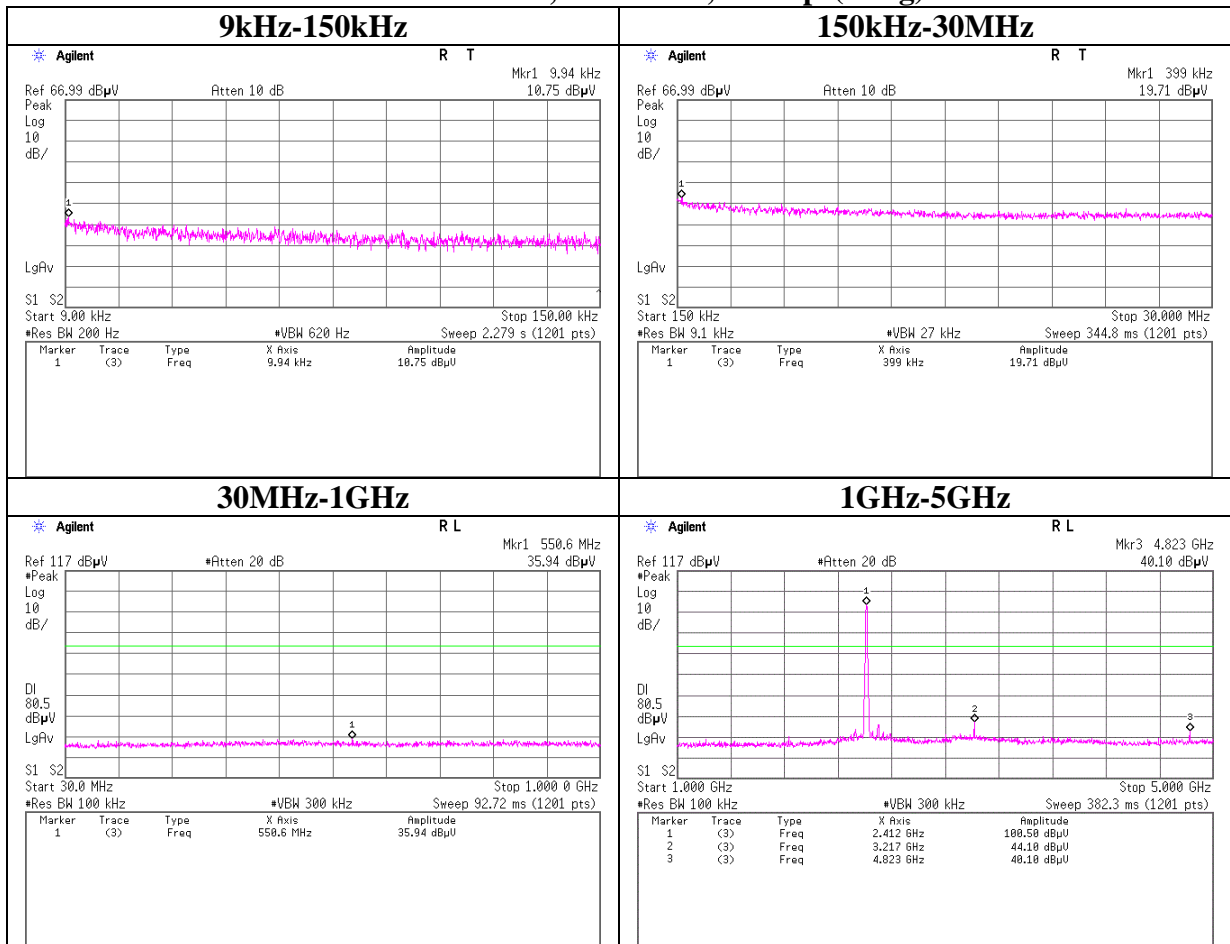


## Conducted Spurious Emission

### 11b Tx 2412MHz, Antenna 0, 11Mbps(Long)

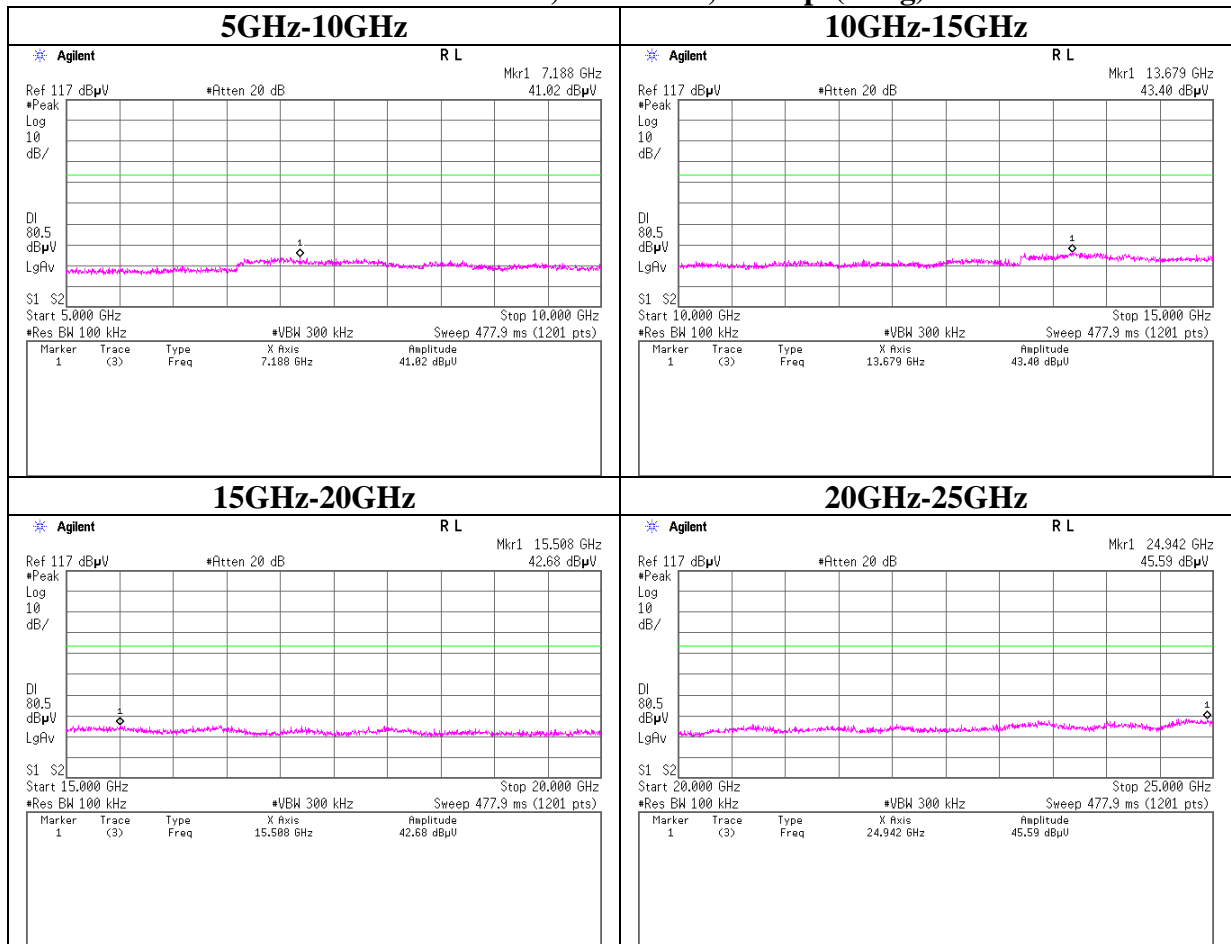


## Conducted Spurious Emission

### 11b Tx 2437MHz, Antenna 0, 11Mbps(Long)

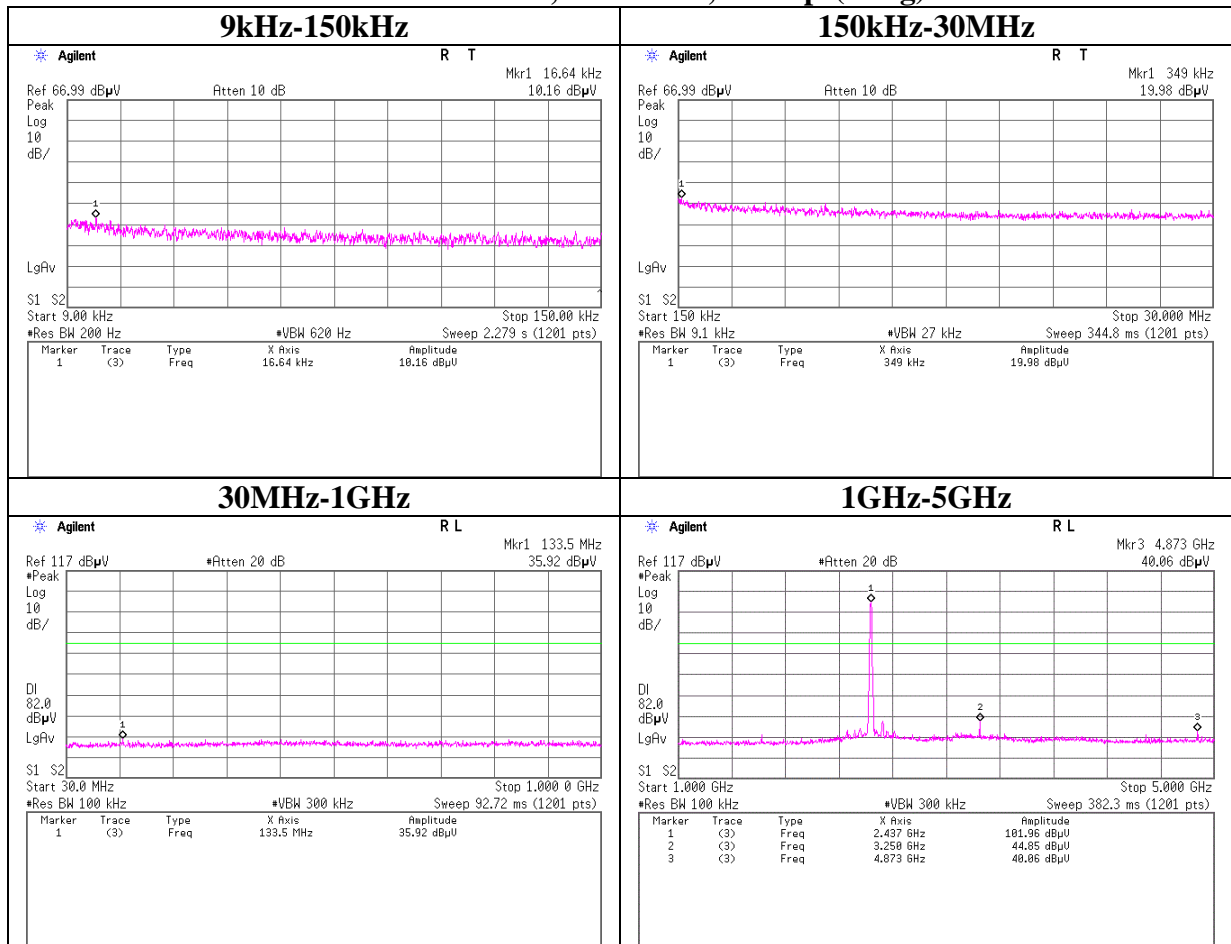


### Conducted Spurious Emission

#### 11b Tx 2437MHz, Antenna 0, 11Mbps(Long)

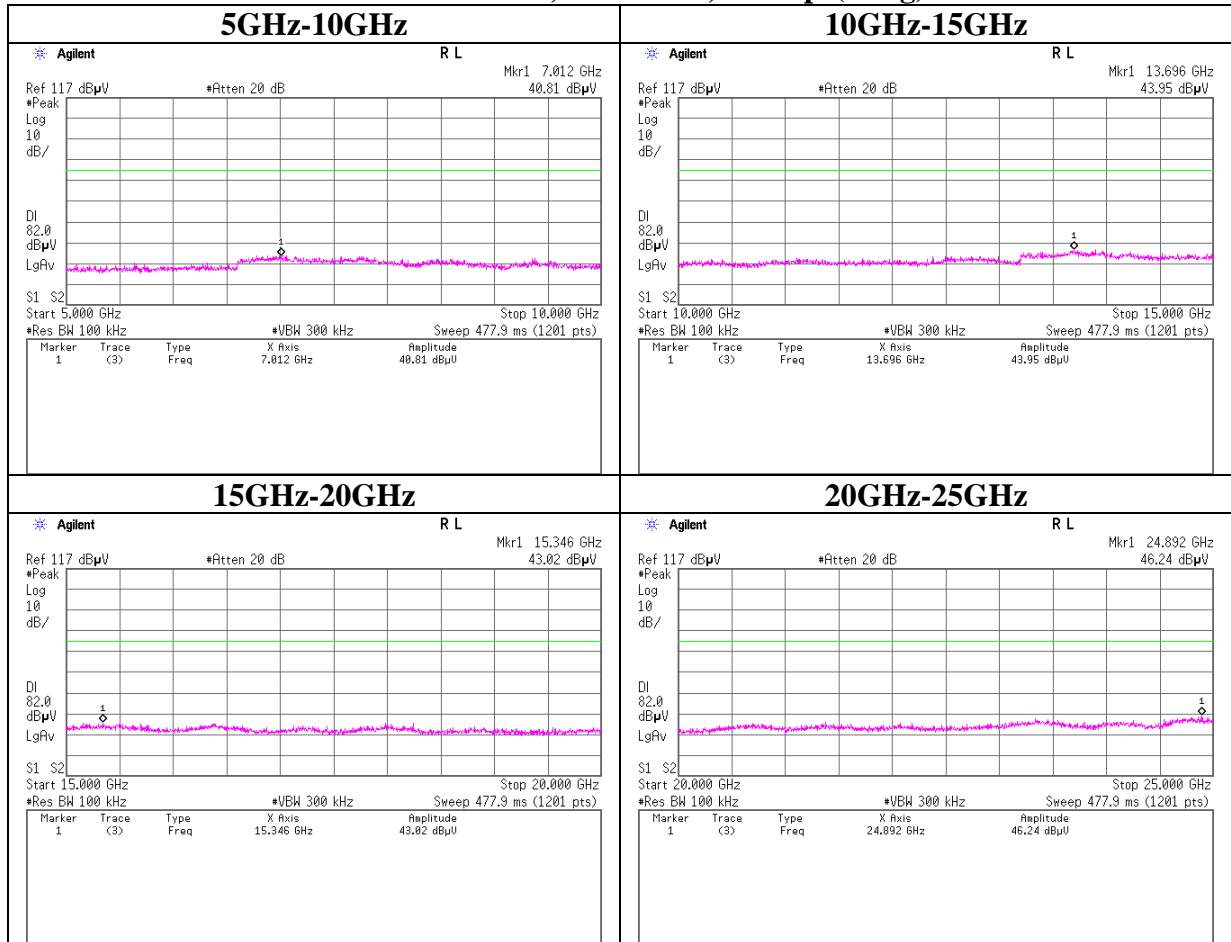

## Conducted Spurious Emission


### 11b Tx 2462MHz, Antenna 0, 11Mbps(Long)

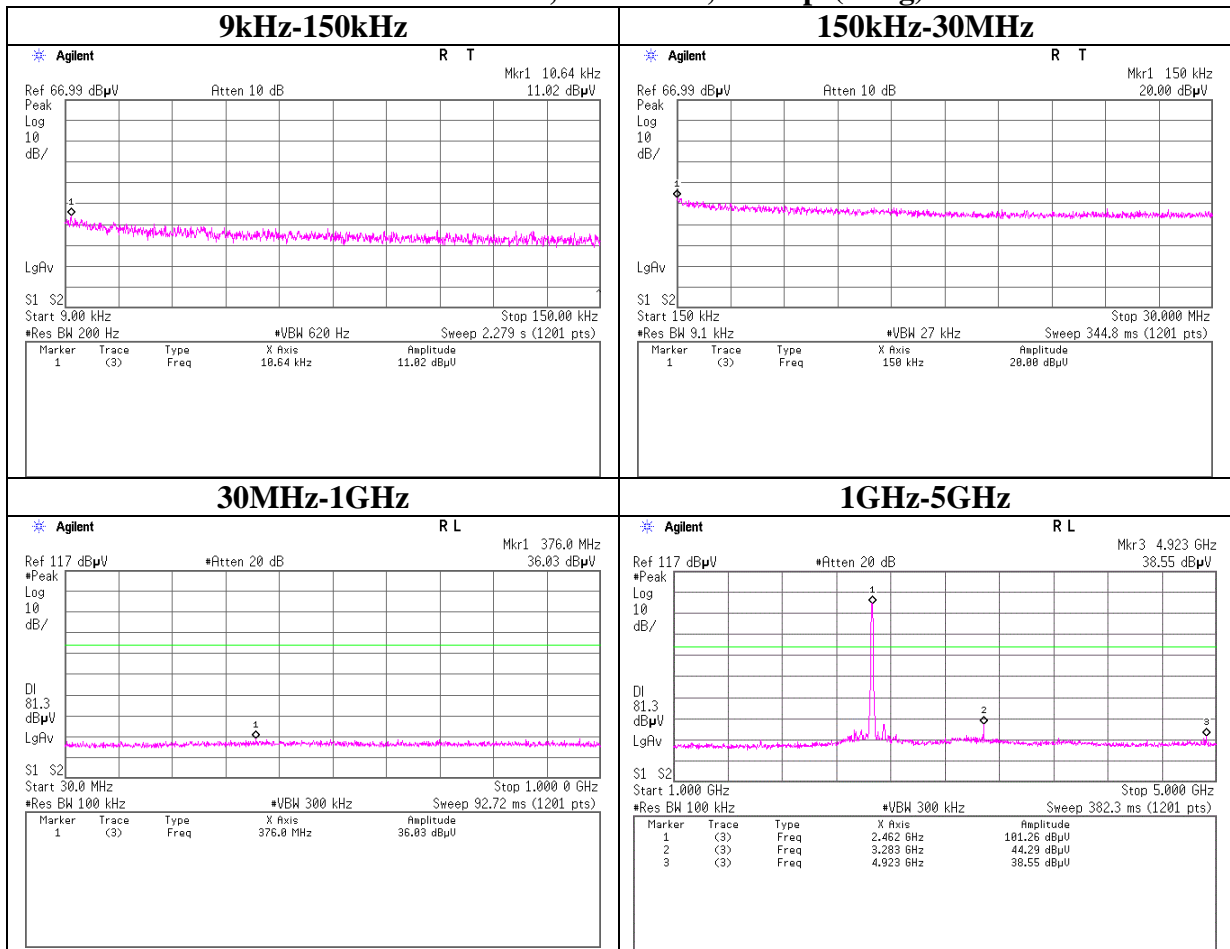




## Conducted Spurious Emission

### 11b Tx 2462MHz, Antenna 0, 11Mbps(Long)

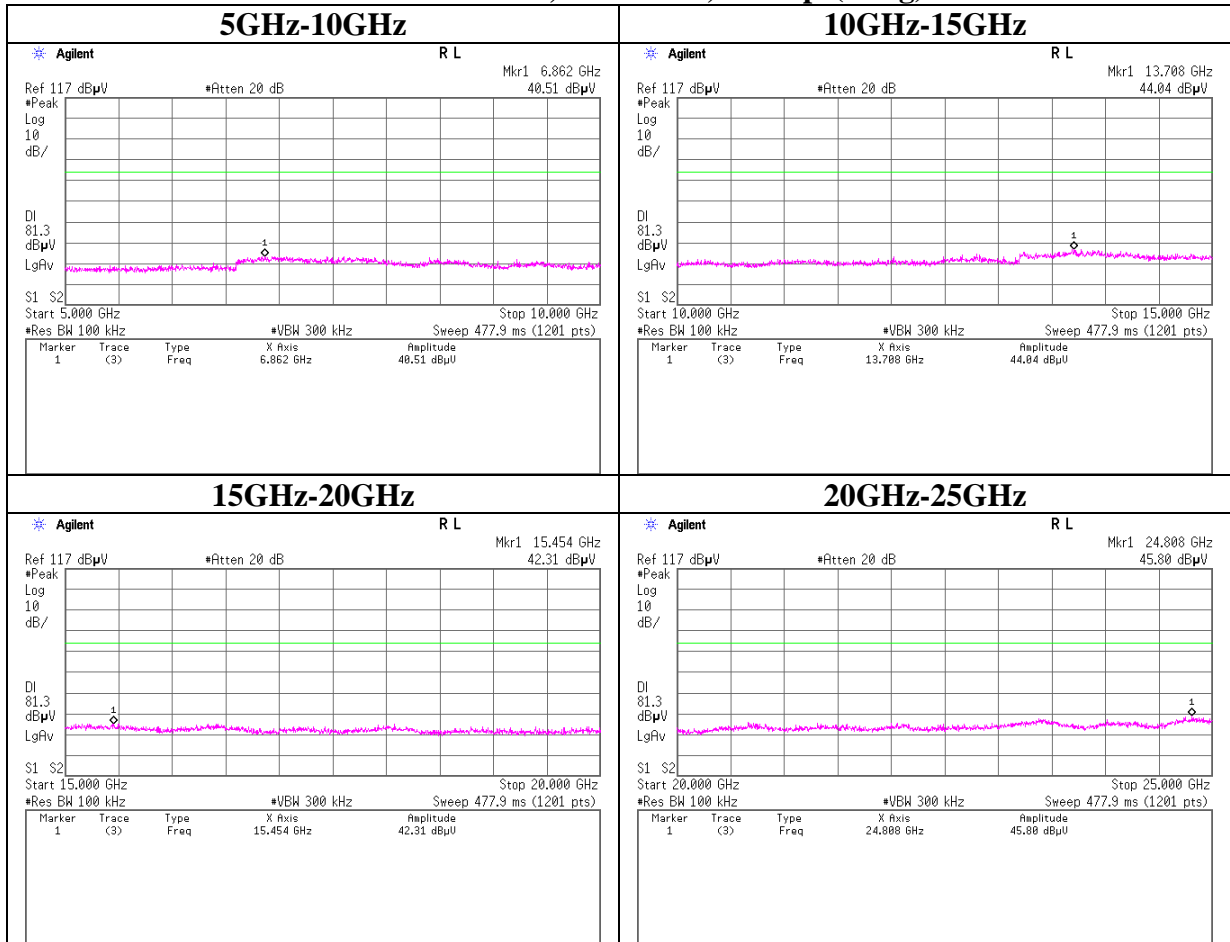


## Conducted Spurious Emission

### 11g Tx 2412MHz, Antenna 0, 9Mbps

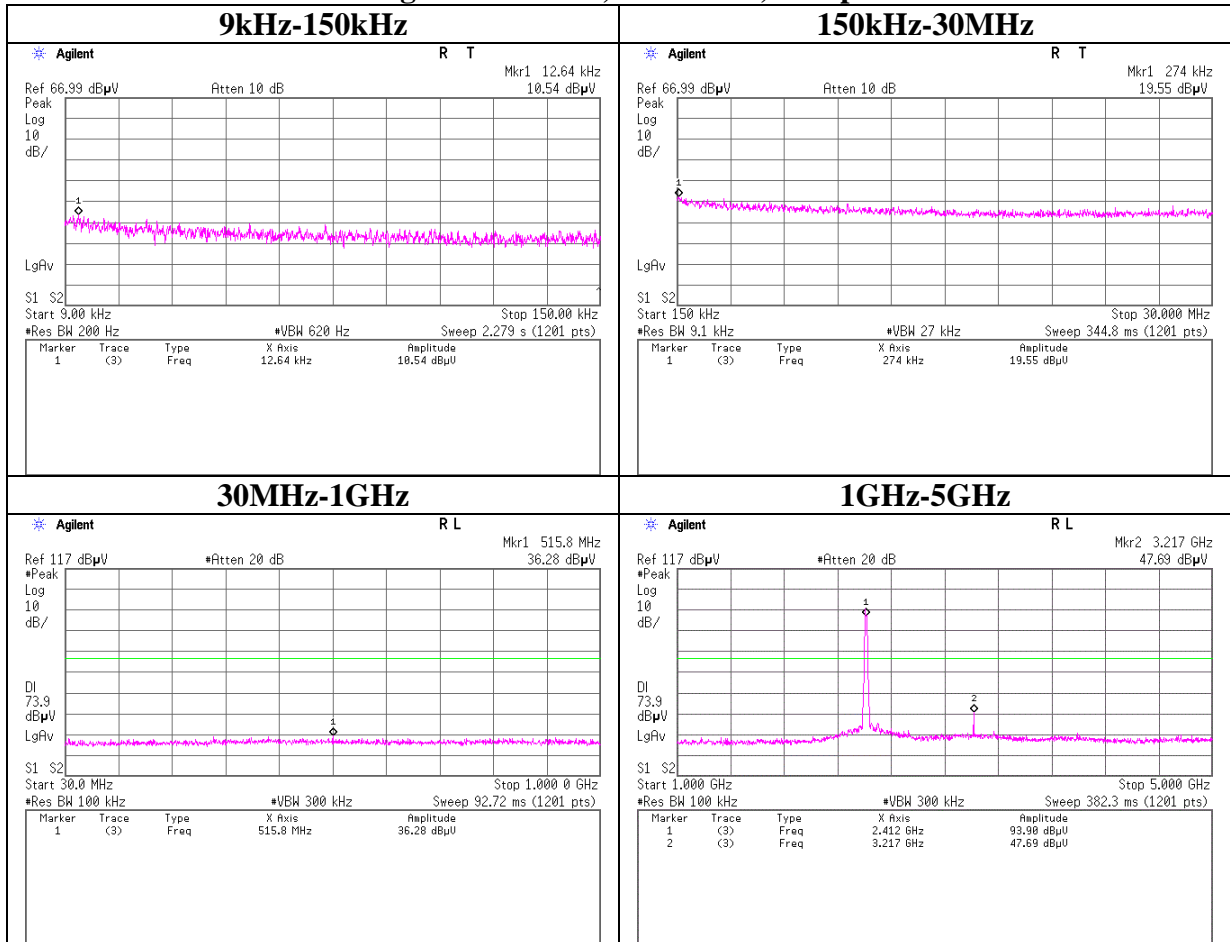


## Conducted Spurious Emission

### 11g Tx 2412MHz, Antenna 0, 9Mbps

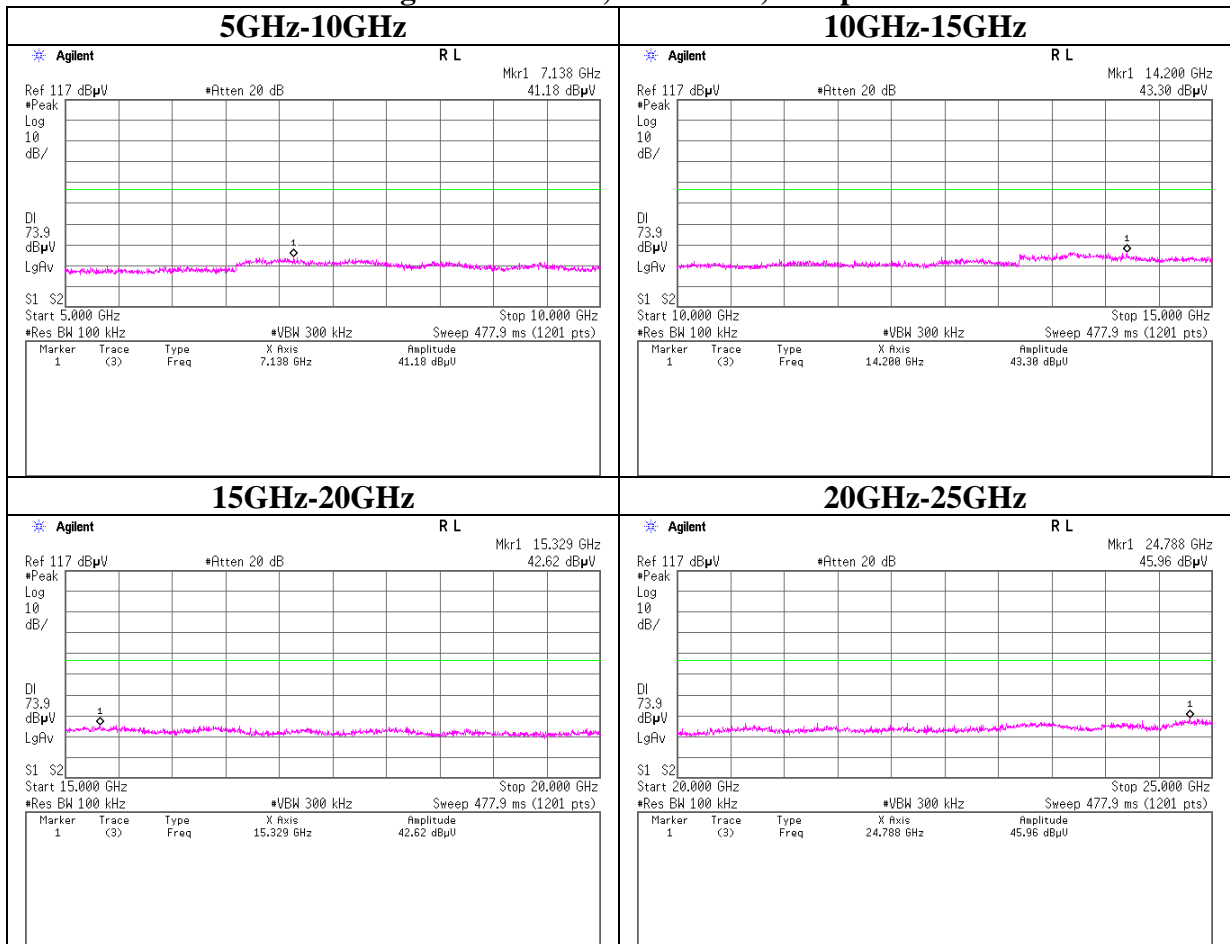


## Conducted Spurious Emission

### 11g Tx 2437MHz, Antenna 0, 9Mbps

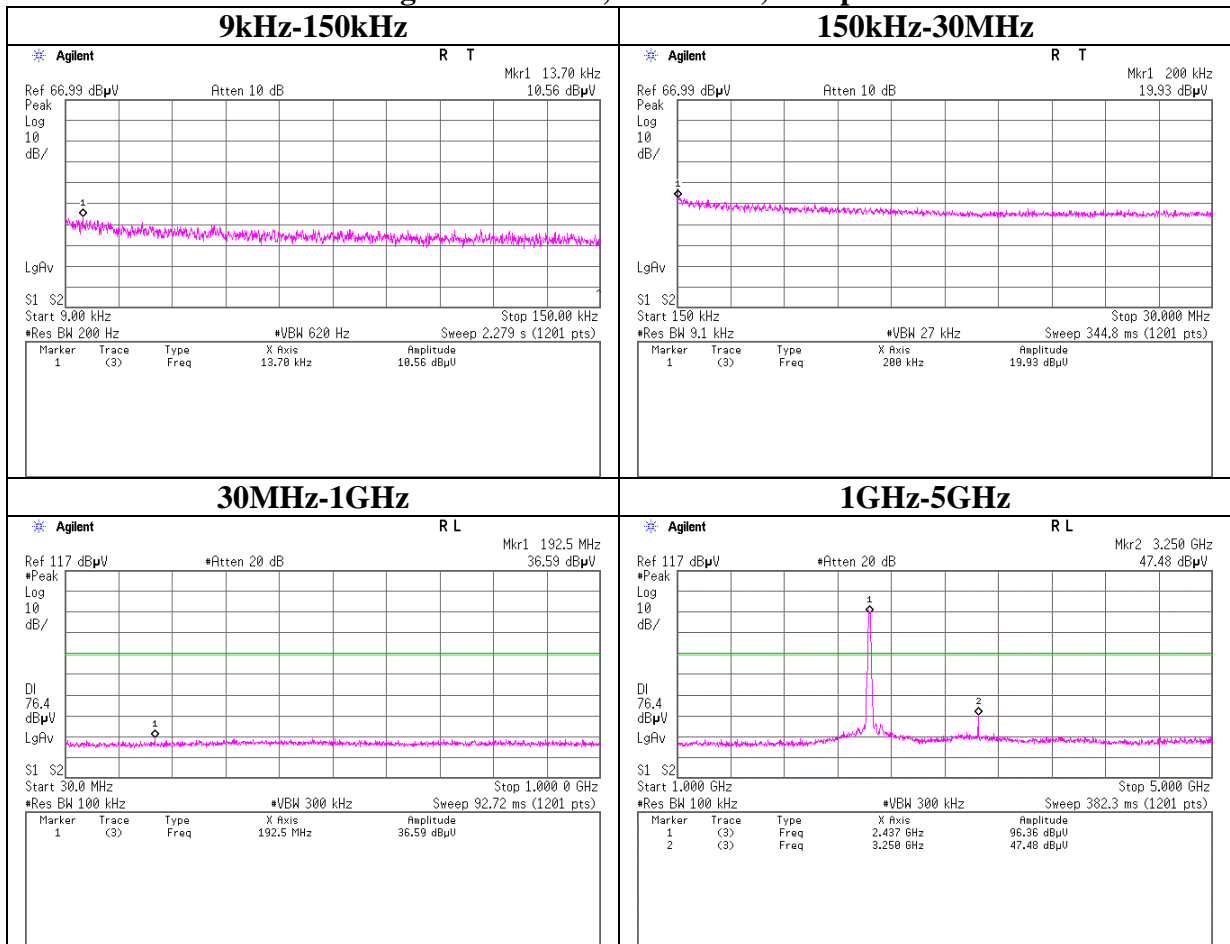


## Conducted Spurious Emission

### 11g Tx 2437MHz, Antenna 0, 9Mbps

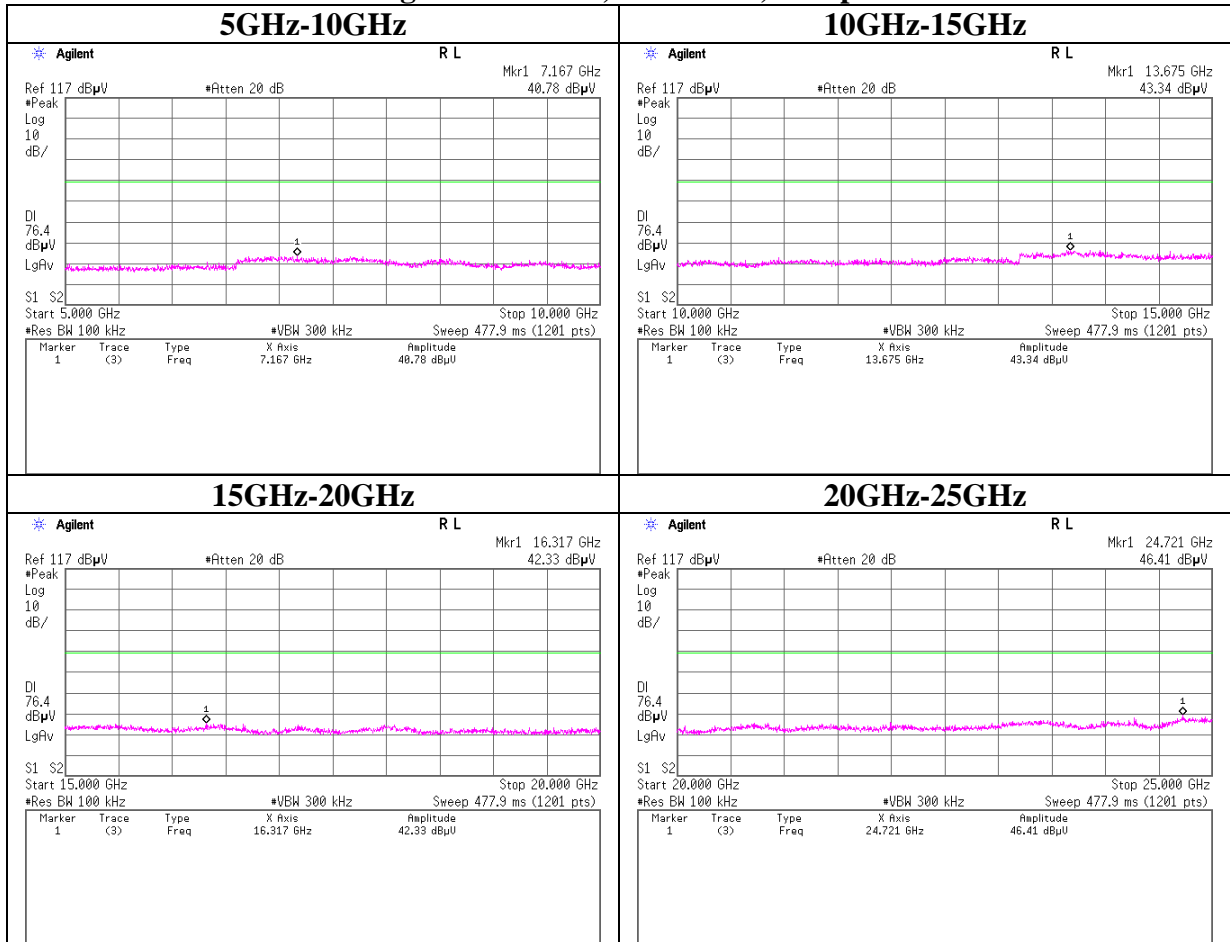


## Conducted Spurious Emission

### 11g Tx 2462MHz, Antenna 0, 9Mbps

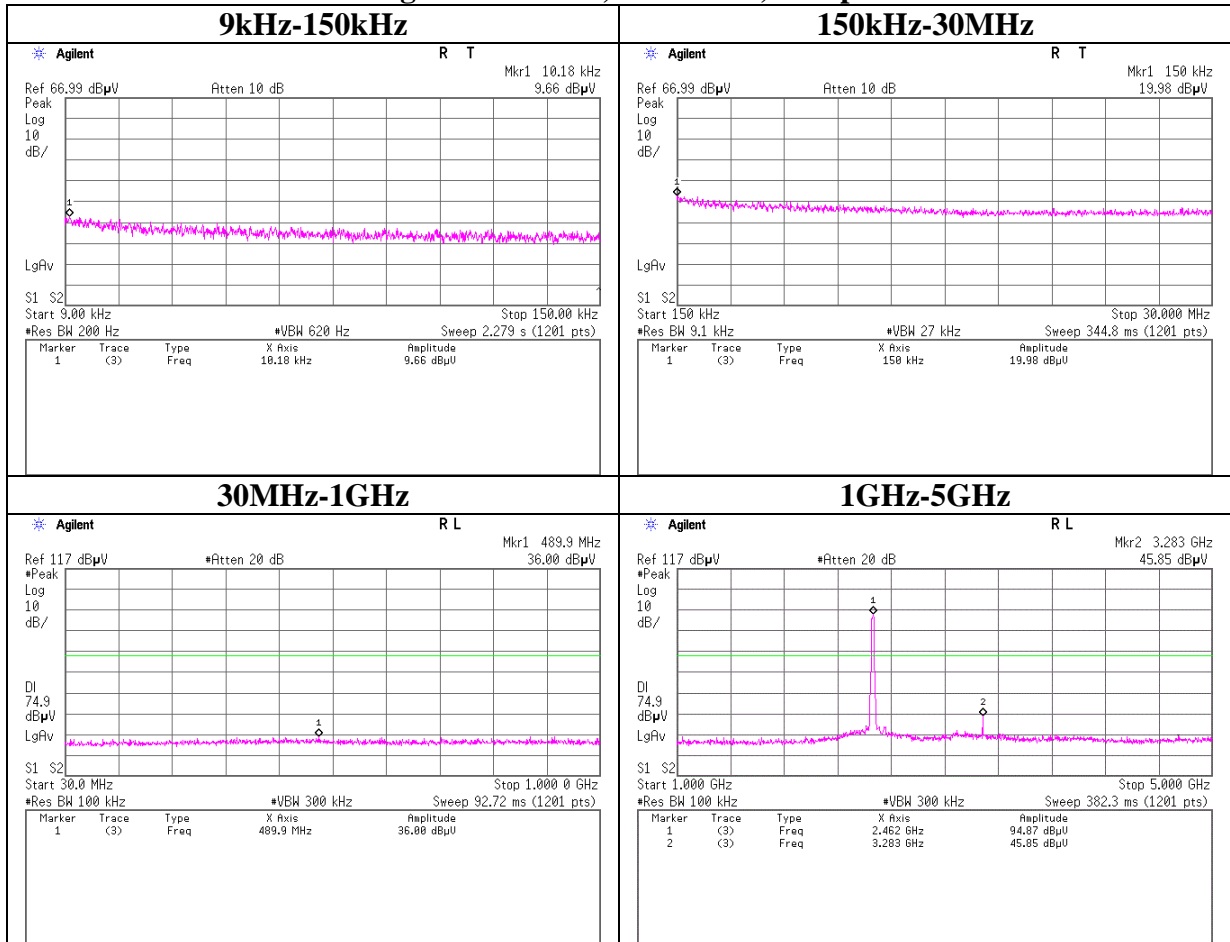


## Conducted Spurious Emission

### 11g Tx 2462MHz, Antenna 0, 9Mbps

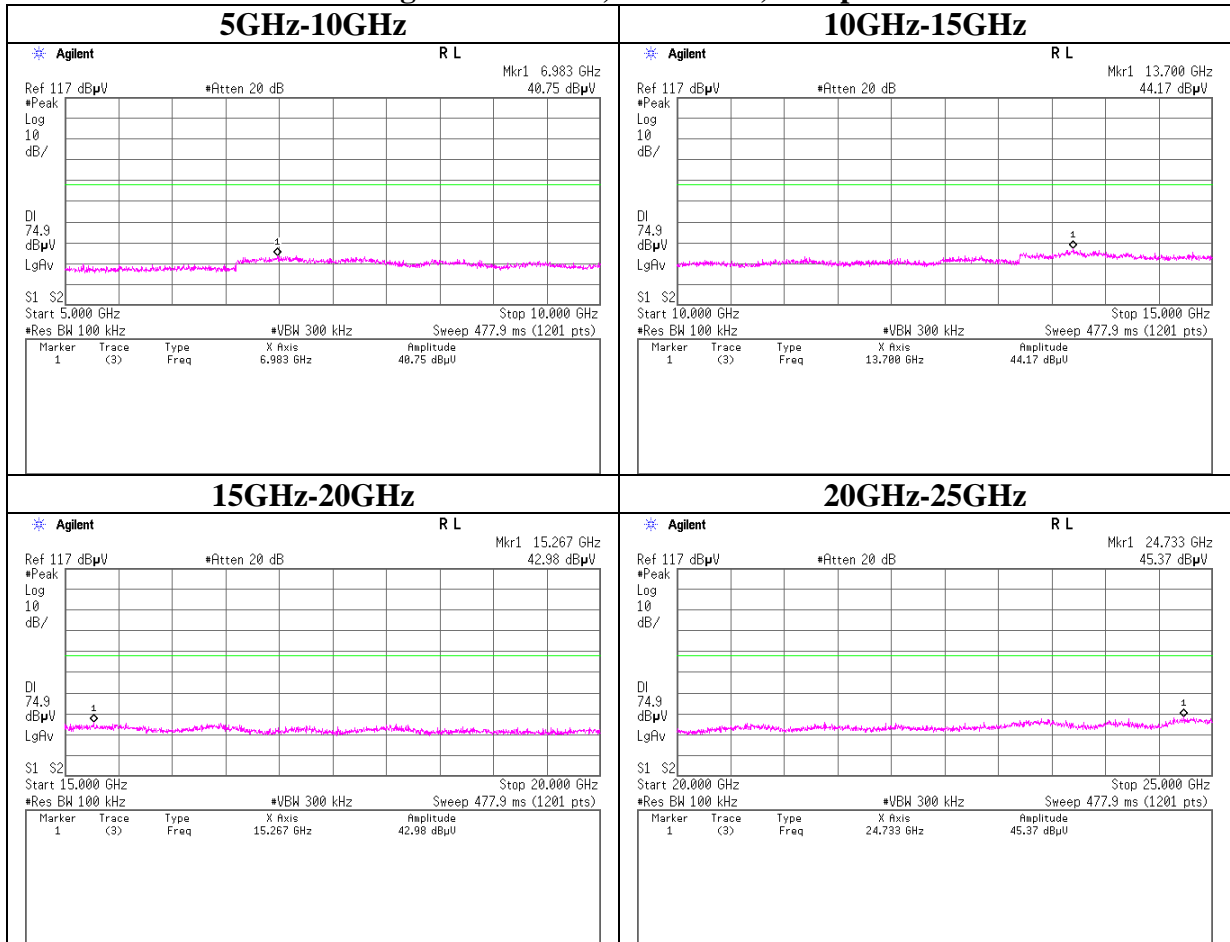

## Conducted Spurious Emission


### 11n-20 Tx 2412MHz, MCS13

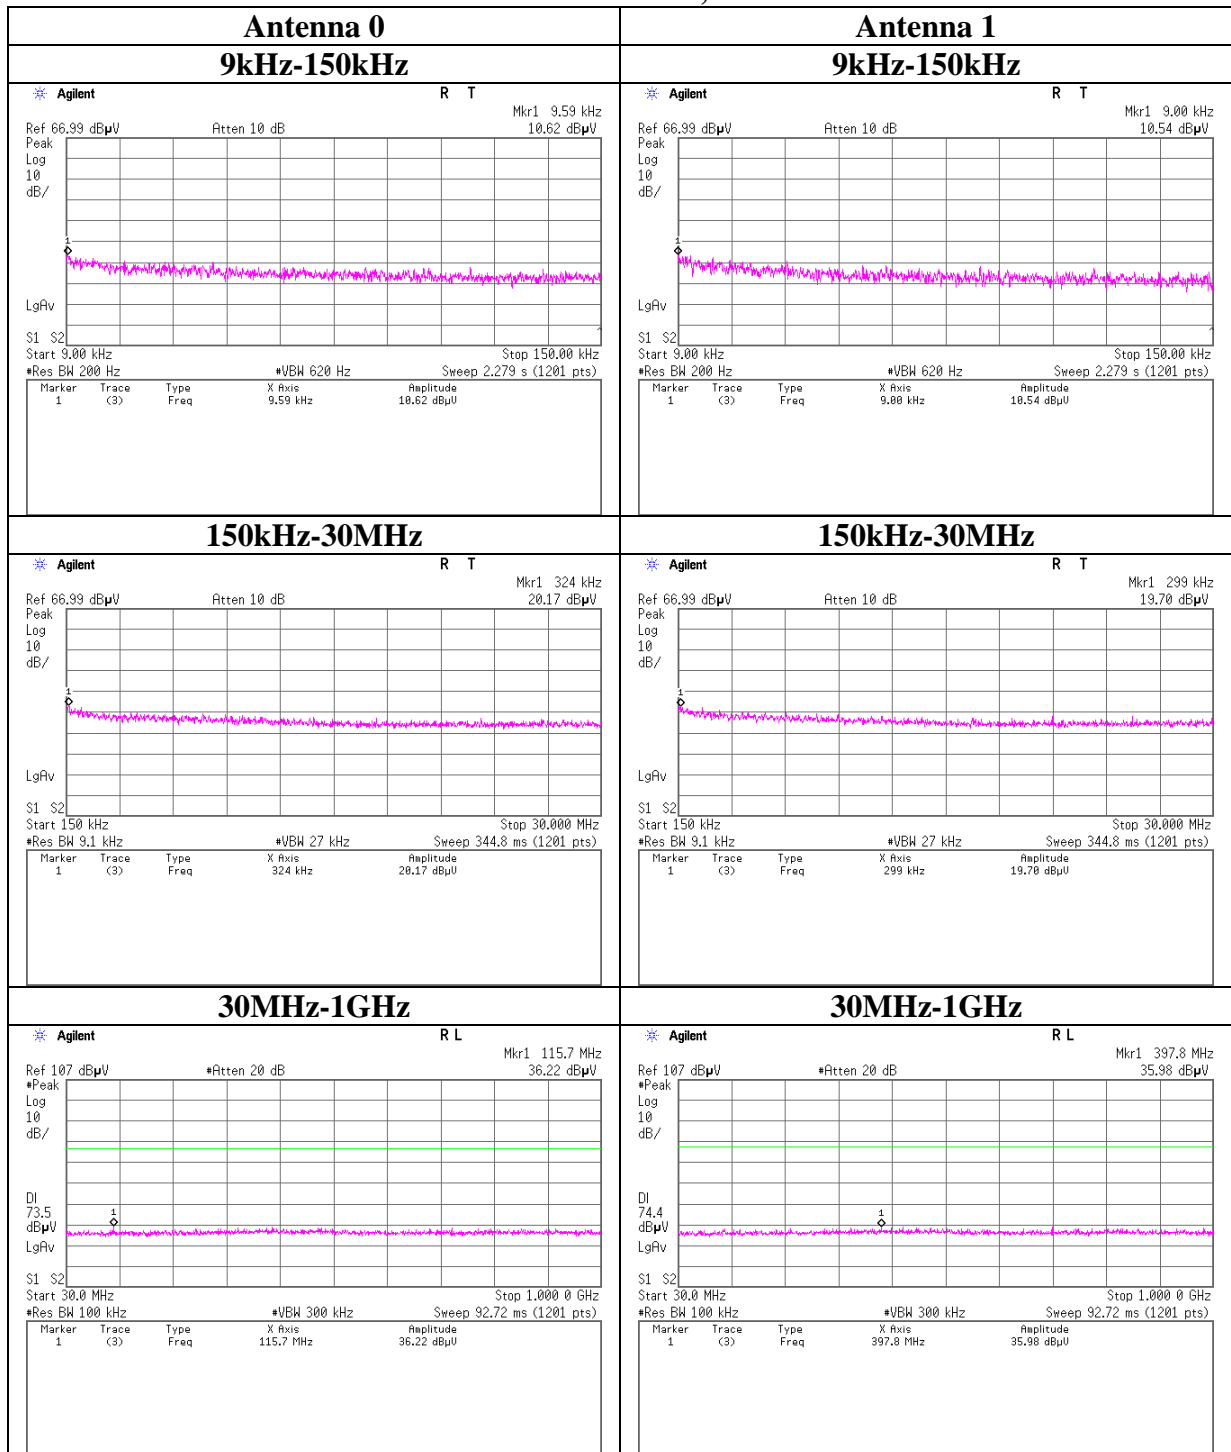




## Conducted Spurious Emission

### 11n-20 Tx 2412MHz, MCS13

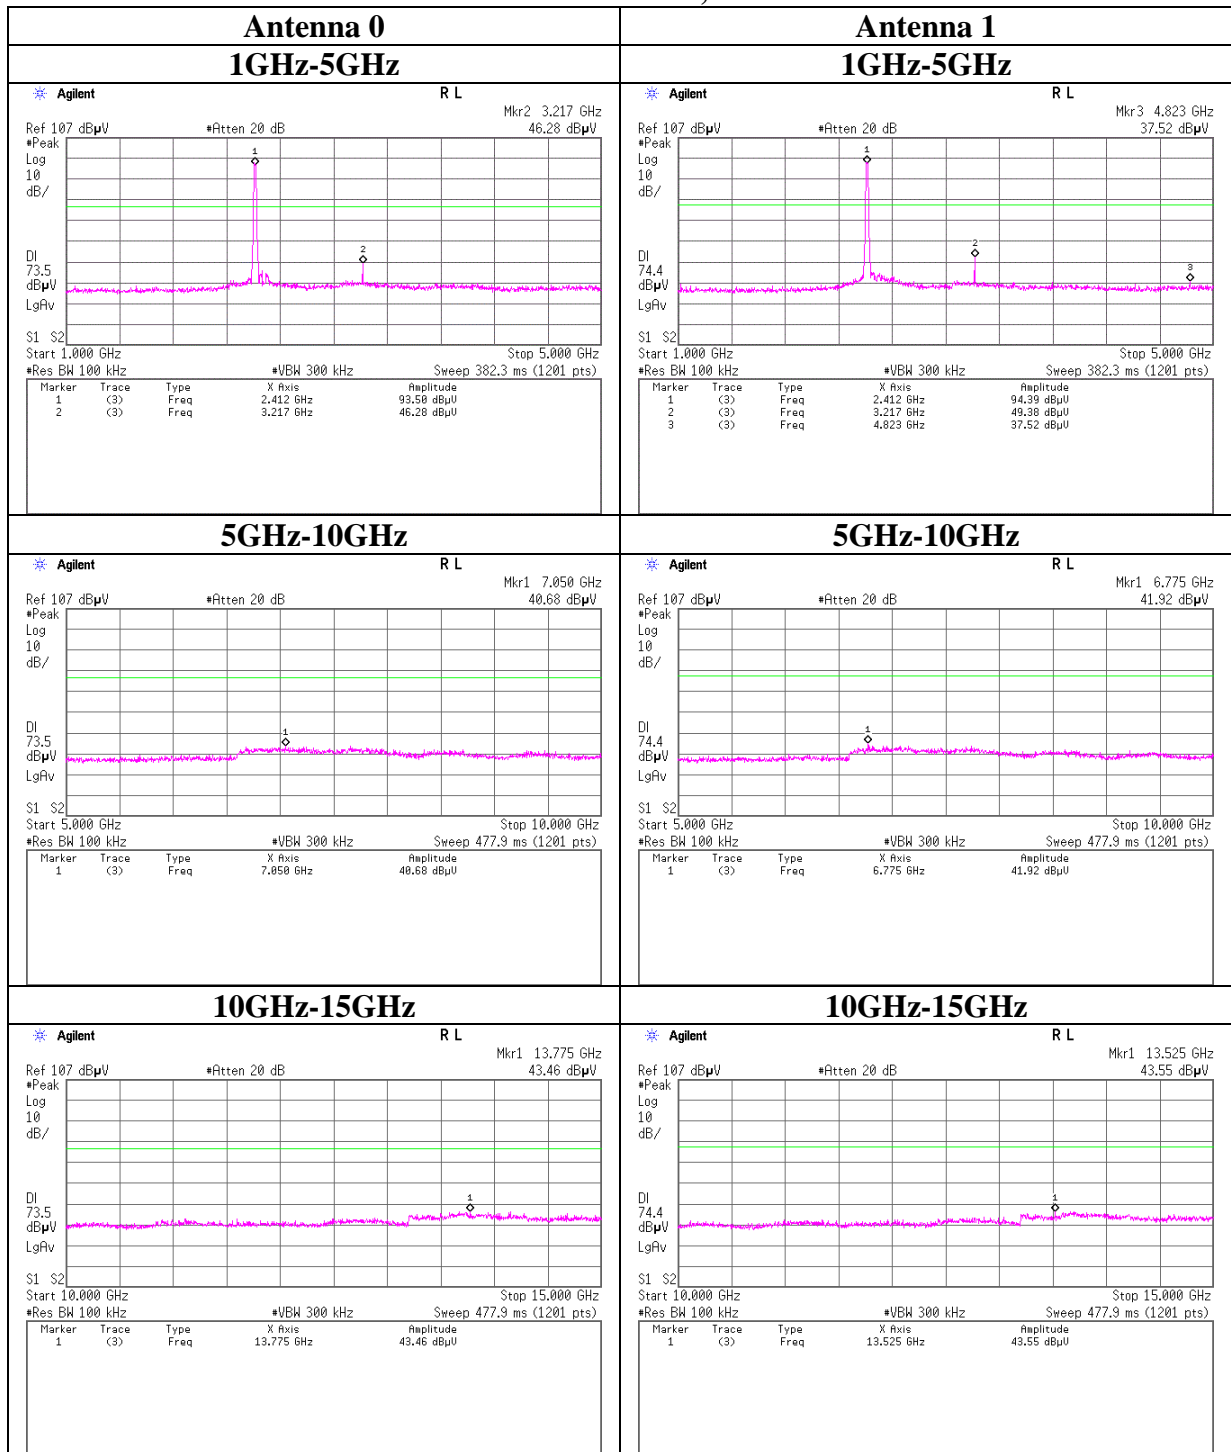


## Conducted Spurious Emission

### 11n-20 Tx 2412MHz, MCS13

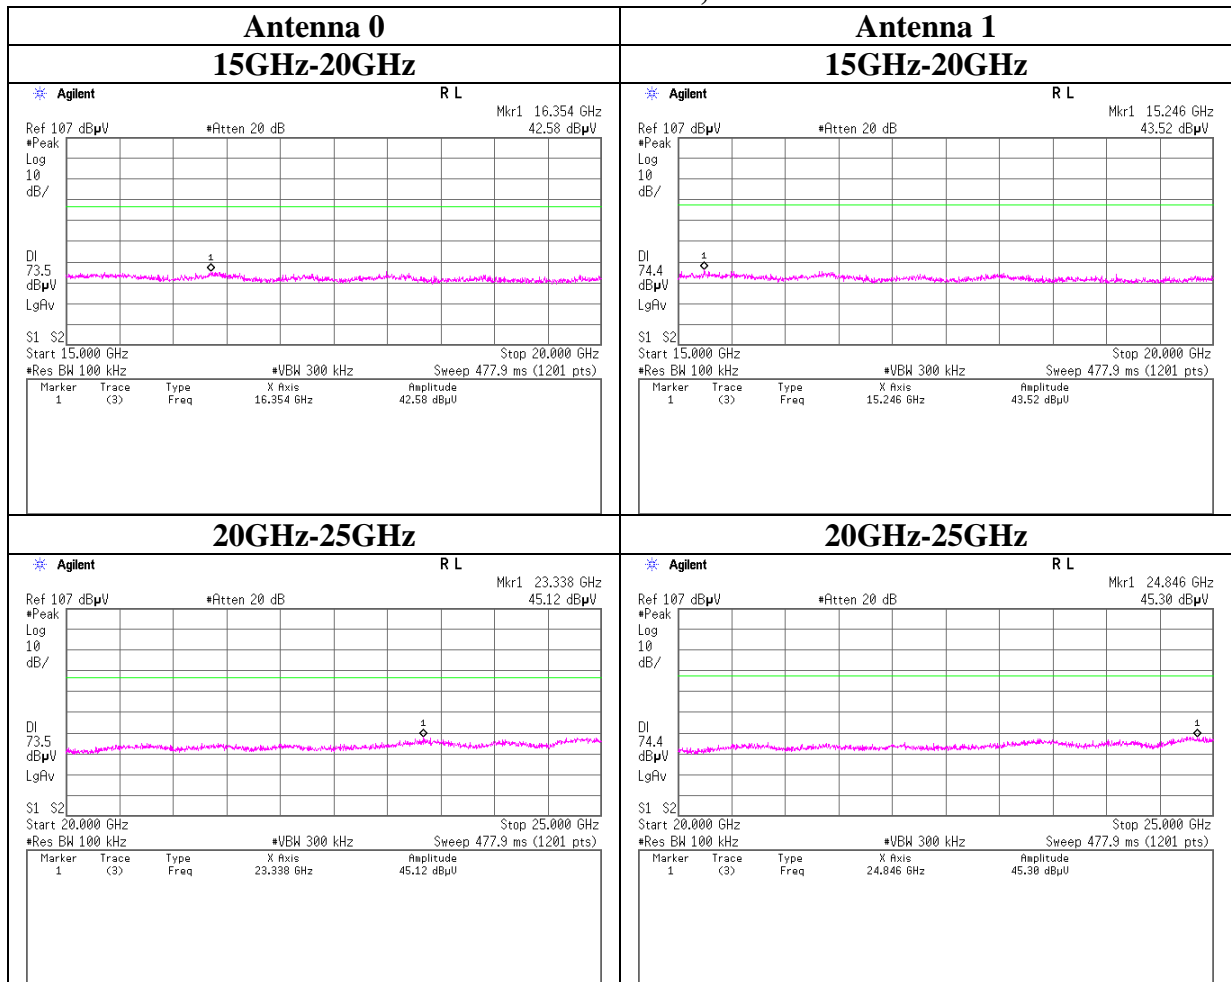


## Conducted Spurious Emission

### 11n-20 Tx 2437MHz, MCS13

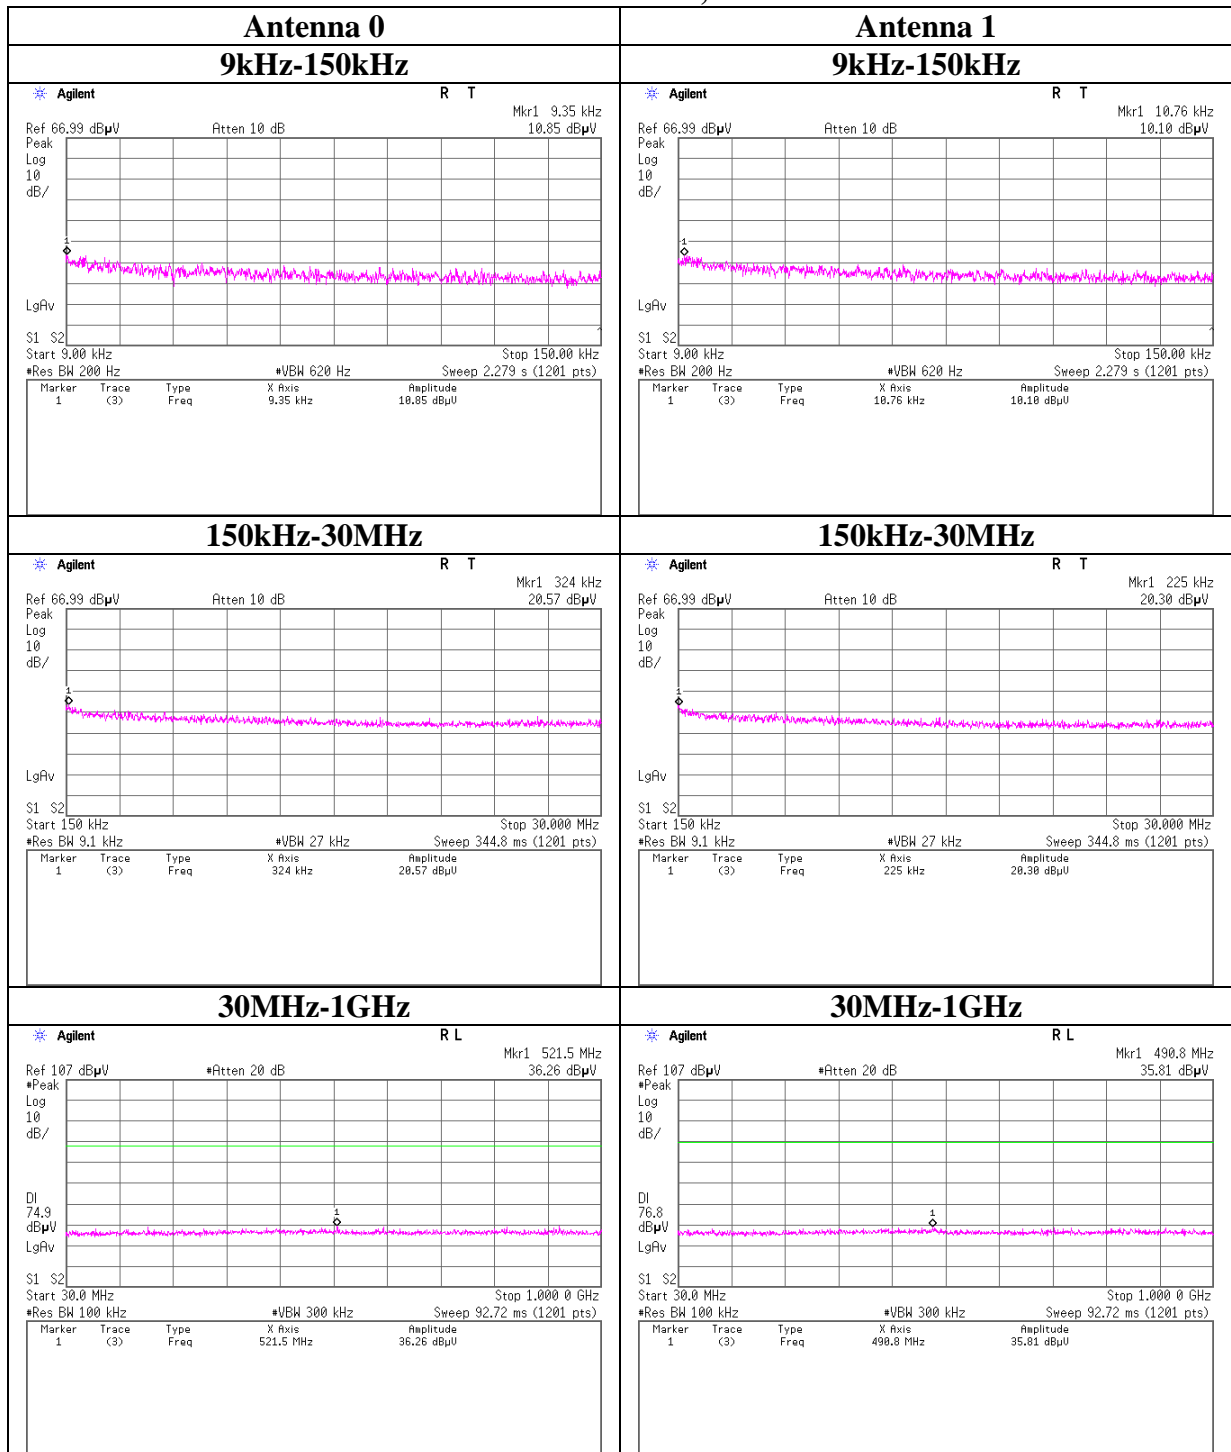


## Conducted Spurious Emission

### 11n-20 Tx 2437MHz, MCS13

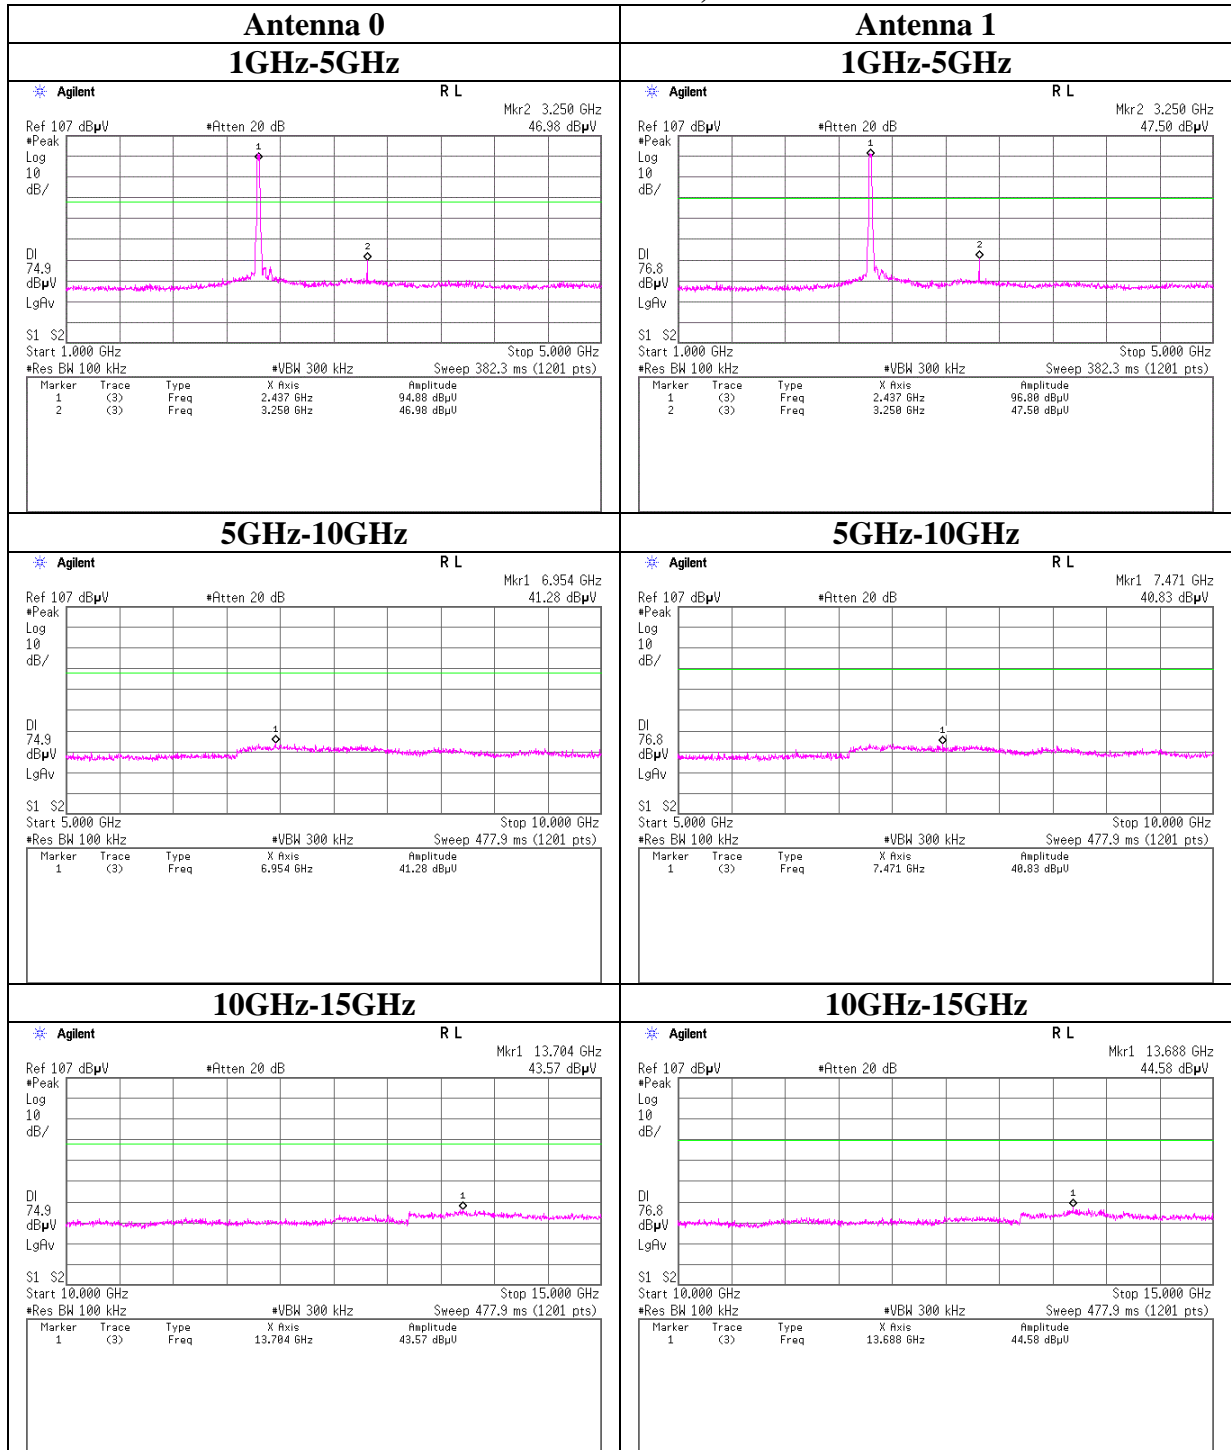


## Conducted Spurious Emission

### 11n-20 Tx 2437MHz, MCS13

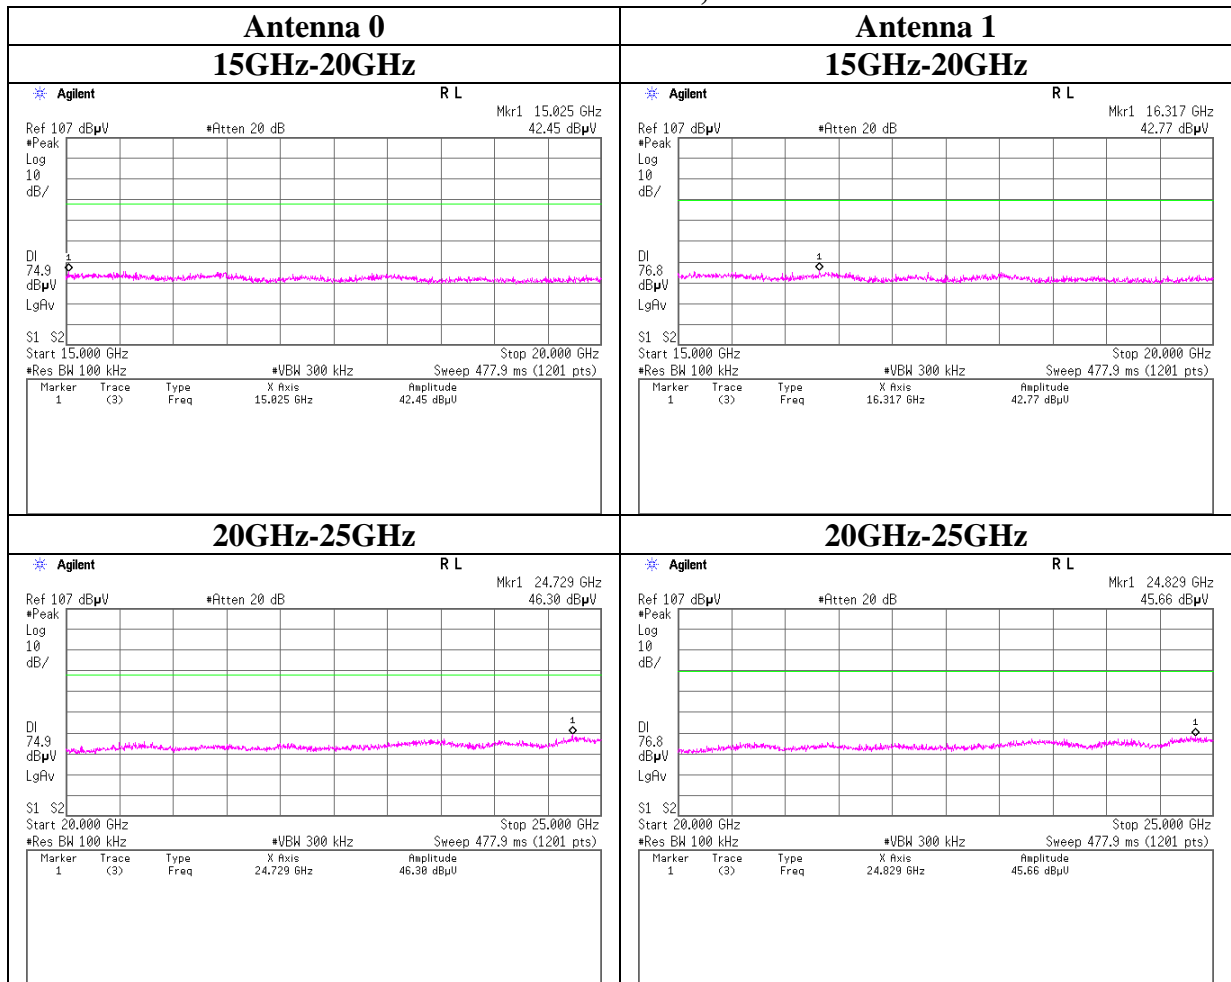


## Conducted Spurious Emission

**11n-20 Tx 2462MHz, MCS13**

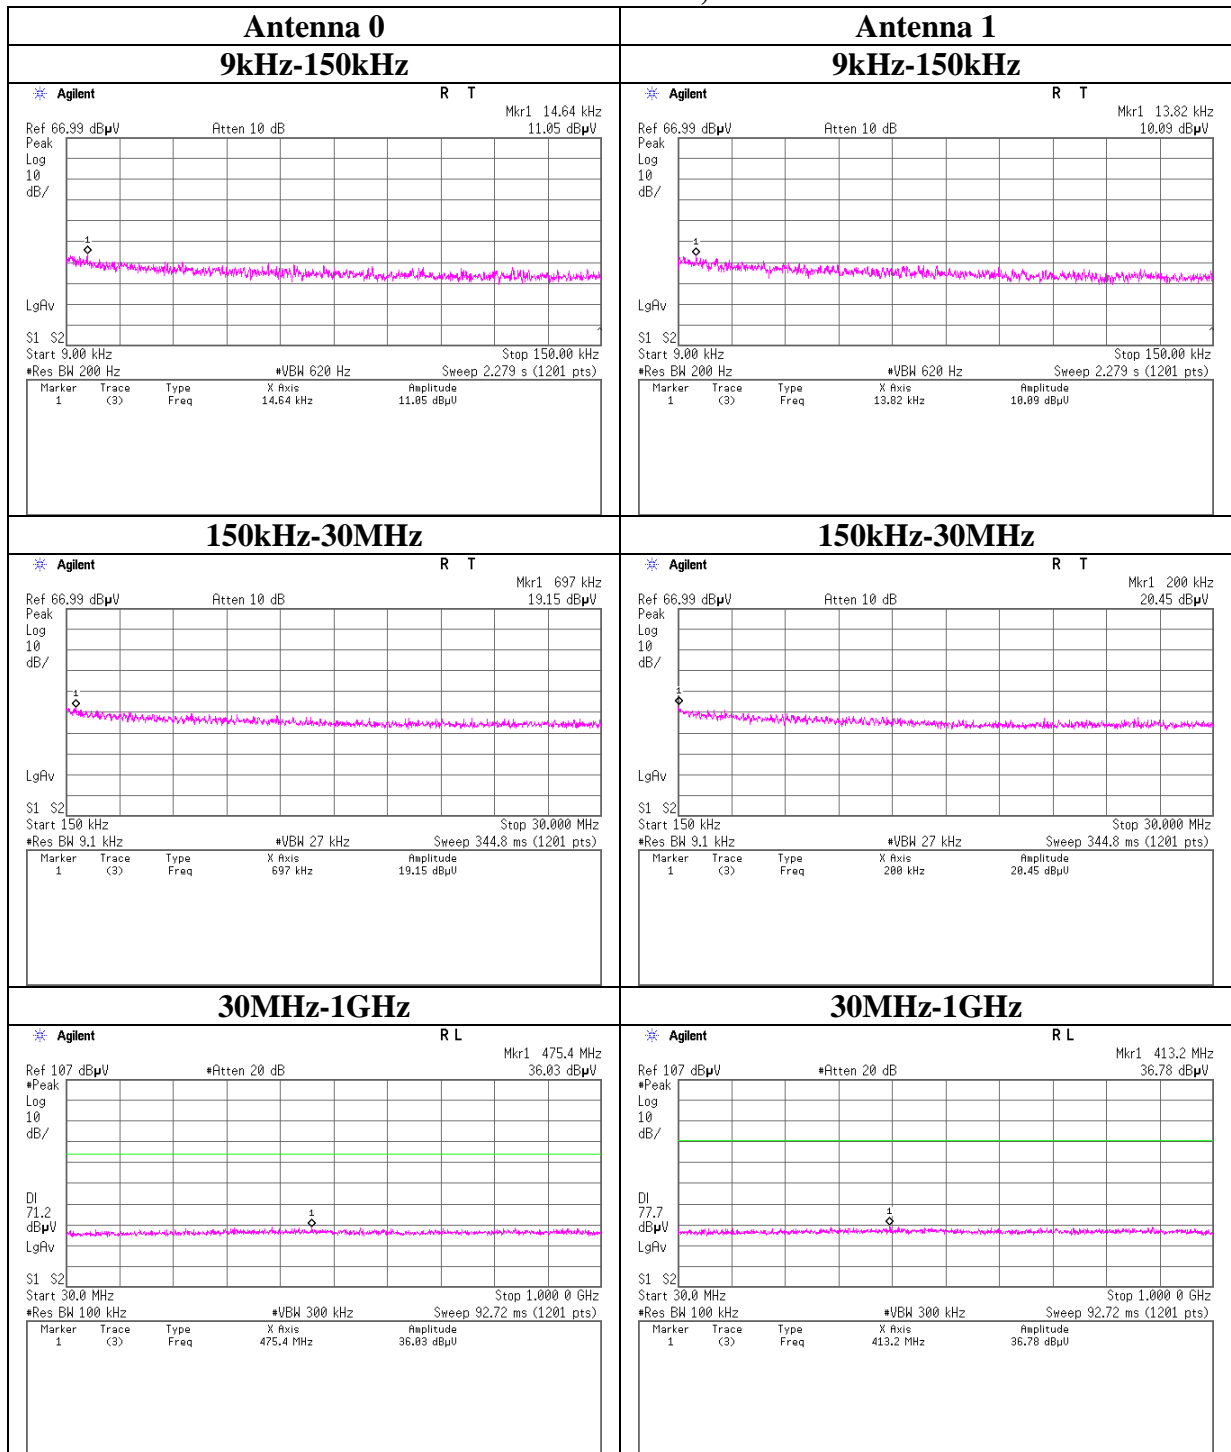


## Conducted Spurious Emission

### 11n-20 Tx 2462MHz, MCS13

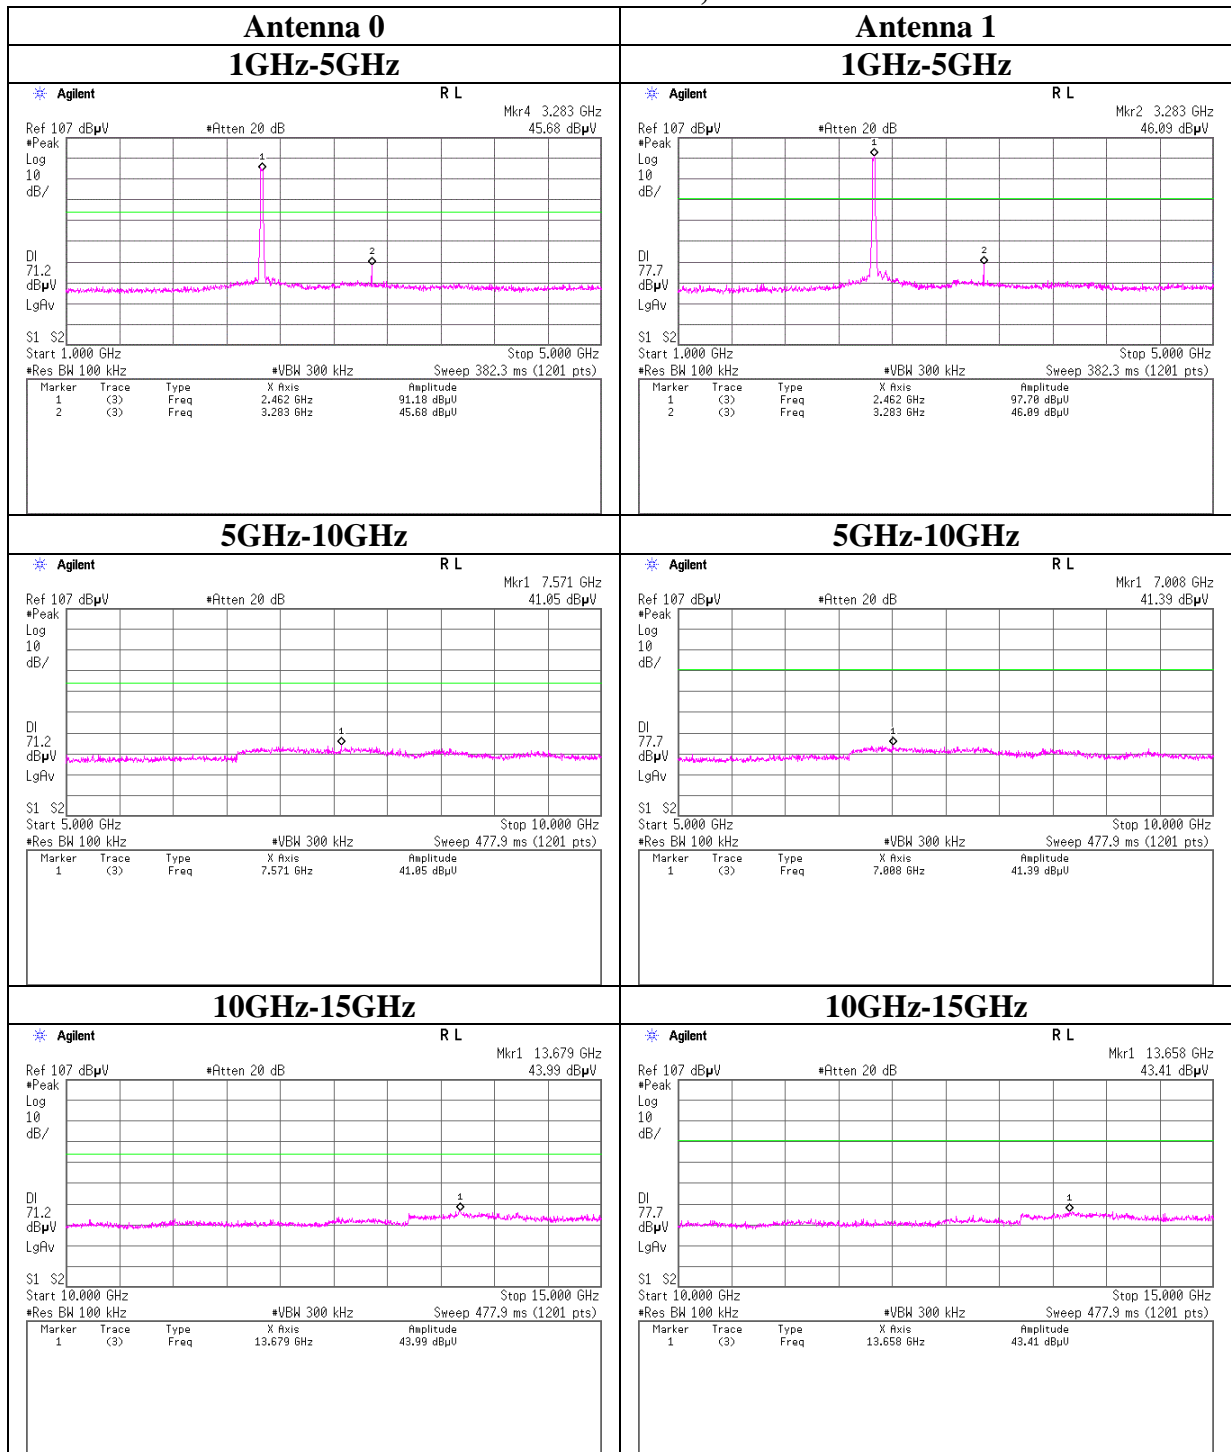

## Conducted Spurious Emission


### 11n-20 Tx 2462MHz, MCS13

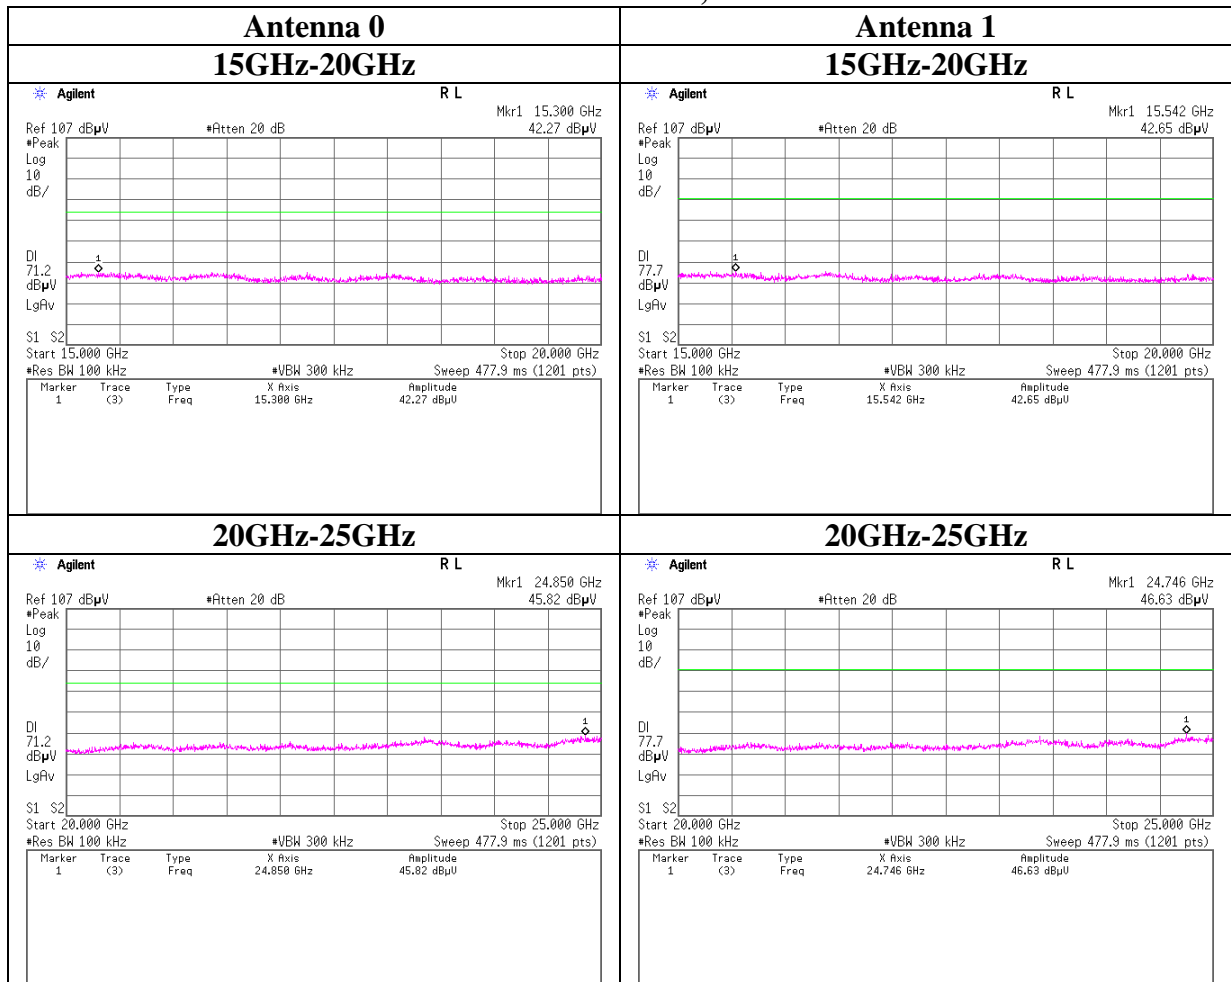




## Conducted Spurious Emission

### 11n-40 Tx 2422MHz, MCS8

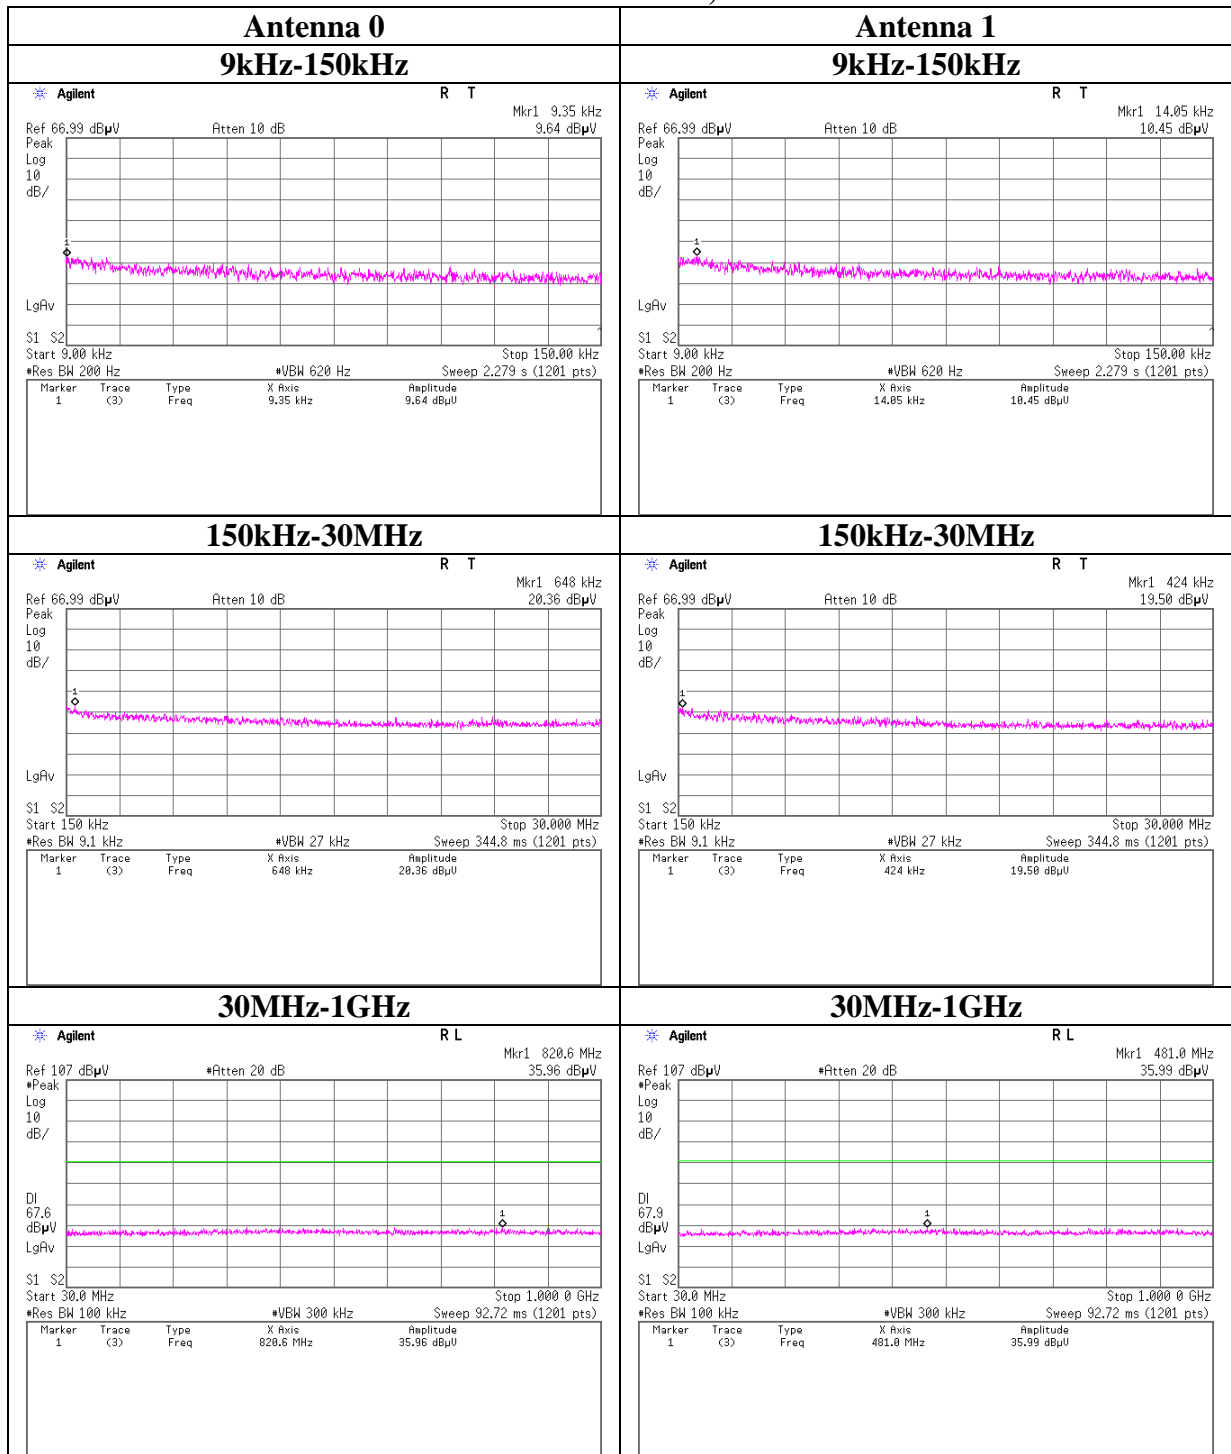


## Conducted Spurious Emission

### 11n-40 Tx 2422MHz, MCS8

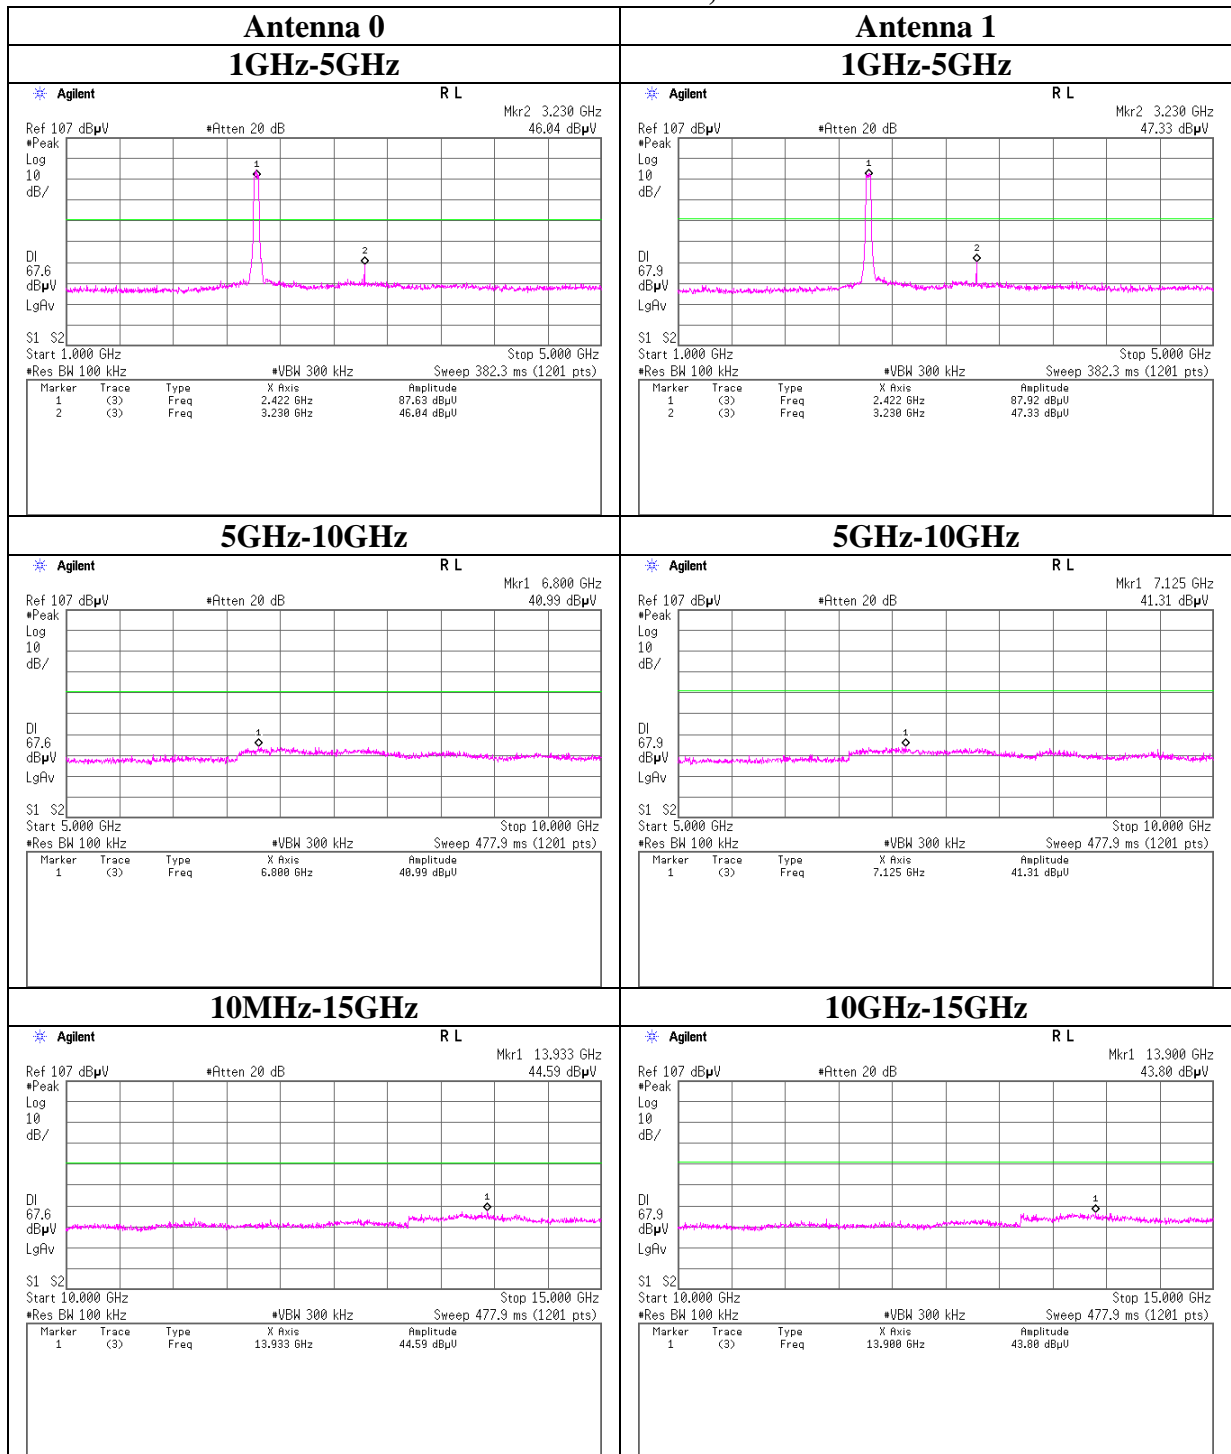


## Conducted Spurious Emission

### 11n-40 Tx 2422MHz, MCS8

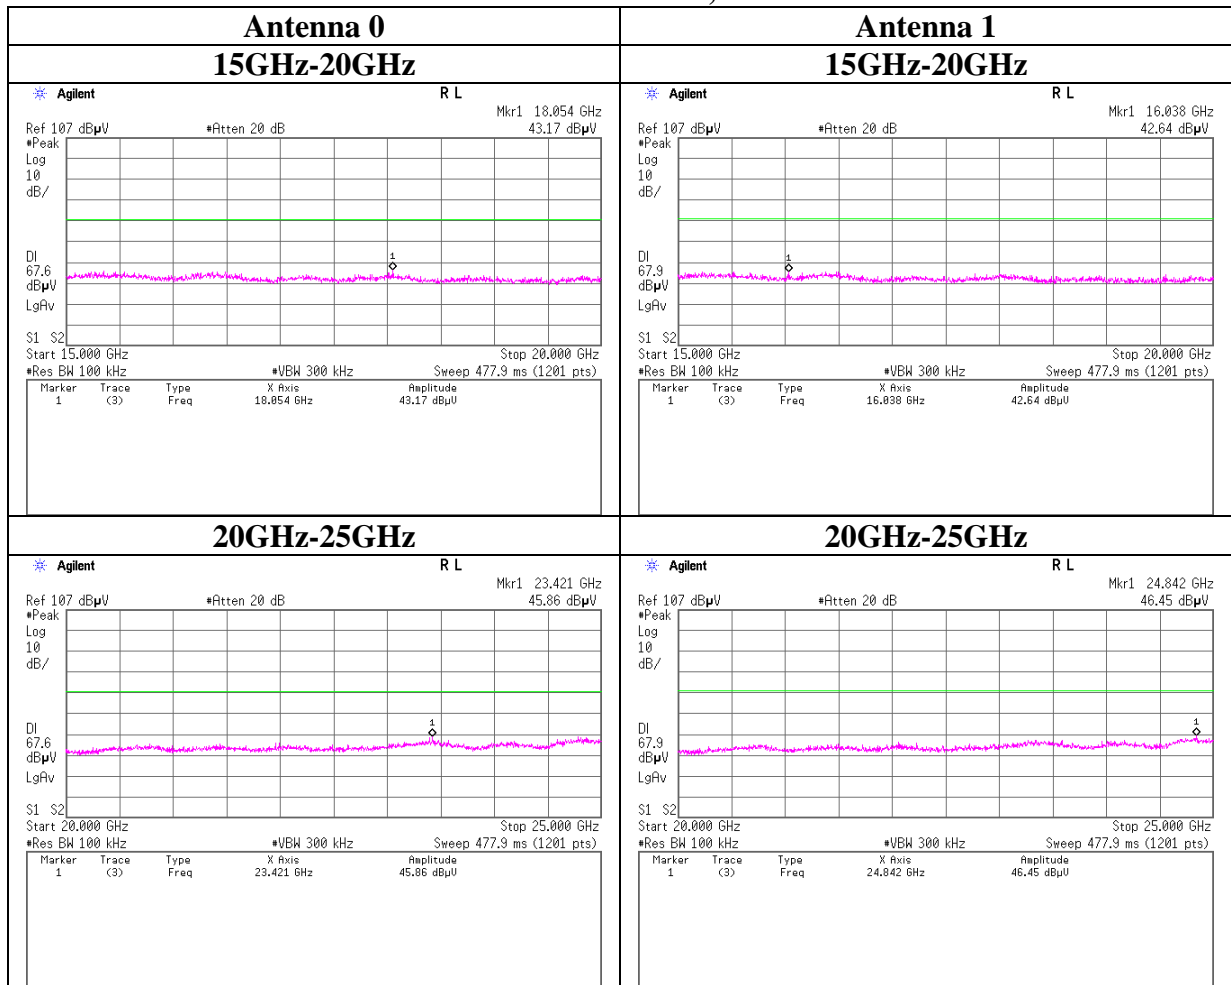


## Conducted Spurious Emission

### 11n-40 Tx 2437MHz, MCS8

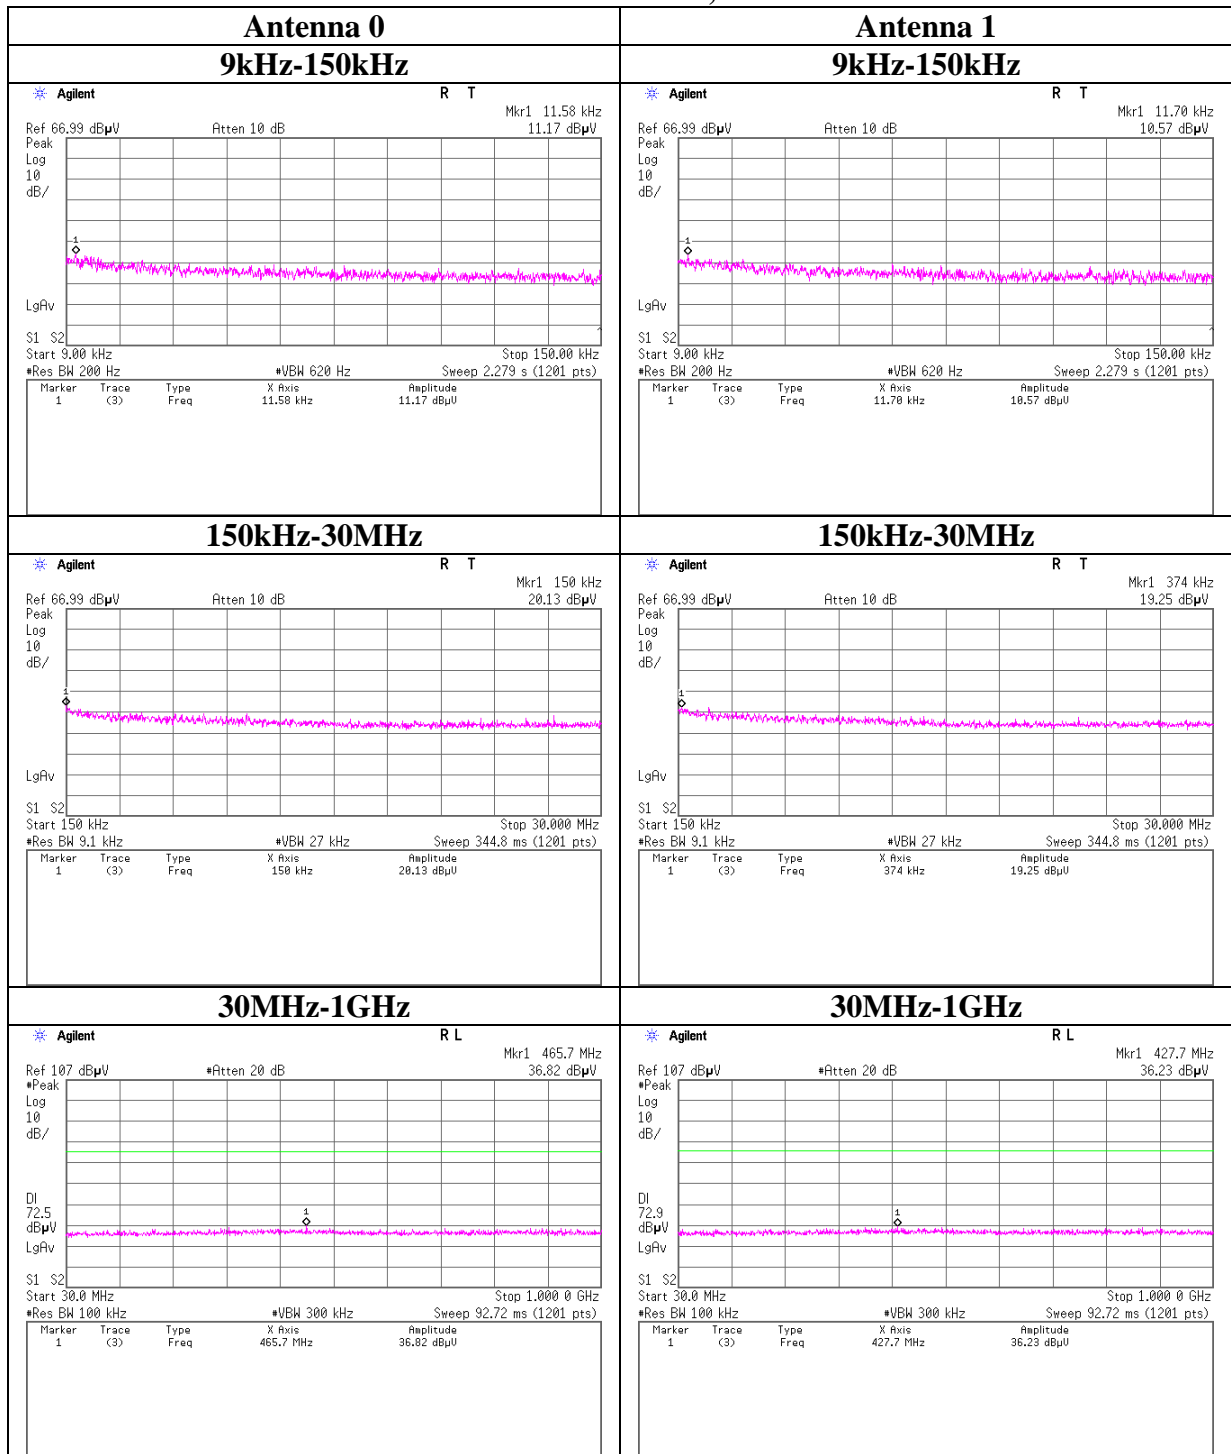


## Conducted Spurious Emission

### 11n-40 Tx 2437MHz, MCS8

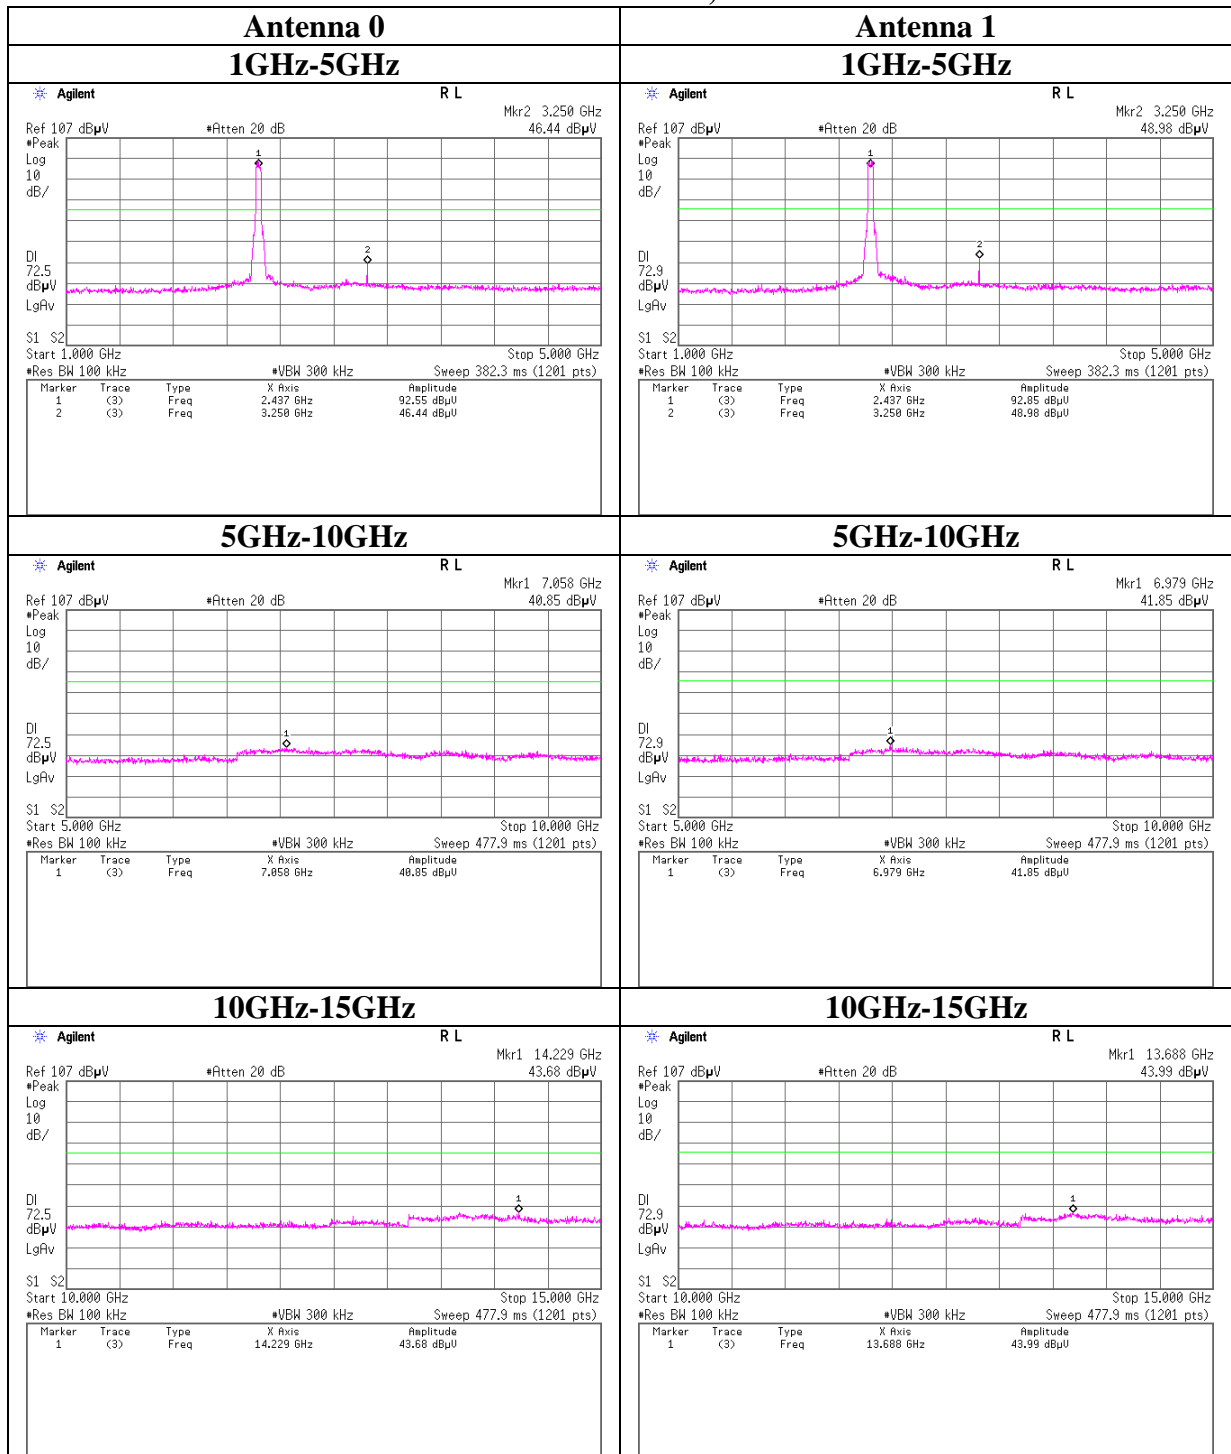


## Conducted Spurious Emission

### 11n-40 Tx 2437MHz, MCS8

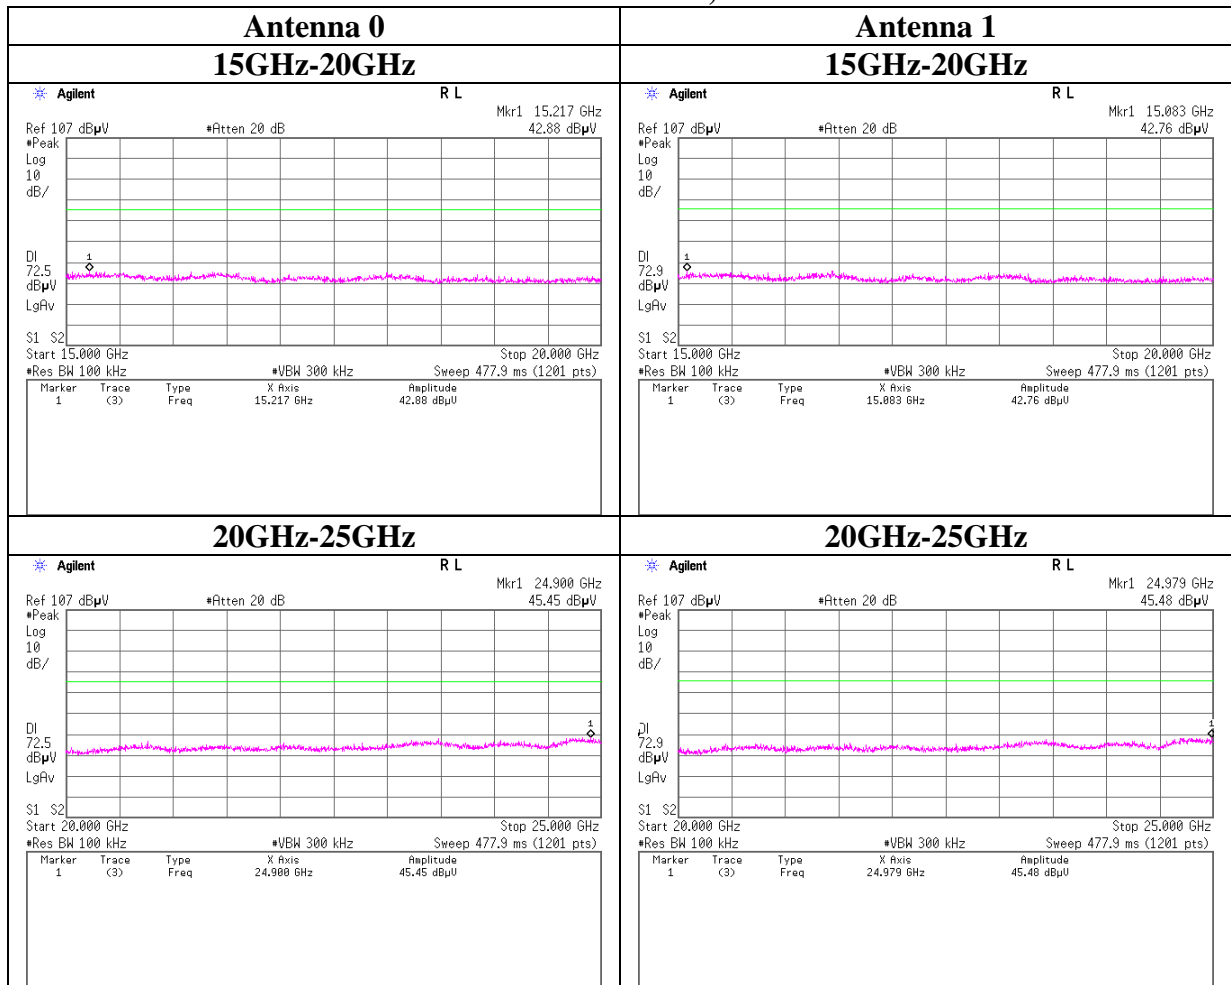


## Conducted Spurious Emission

### 11n-40 Tx 2452MHz, MCS8

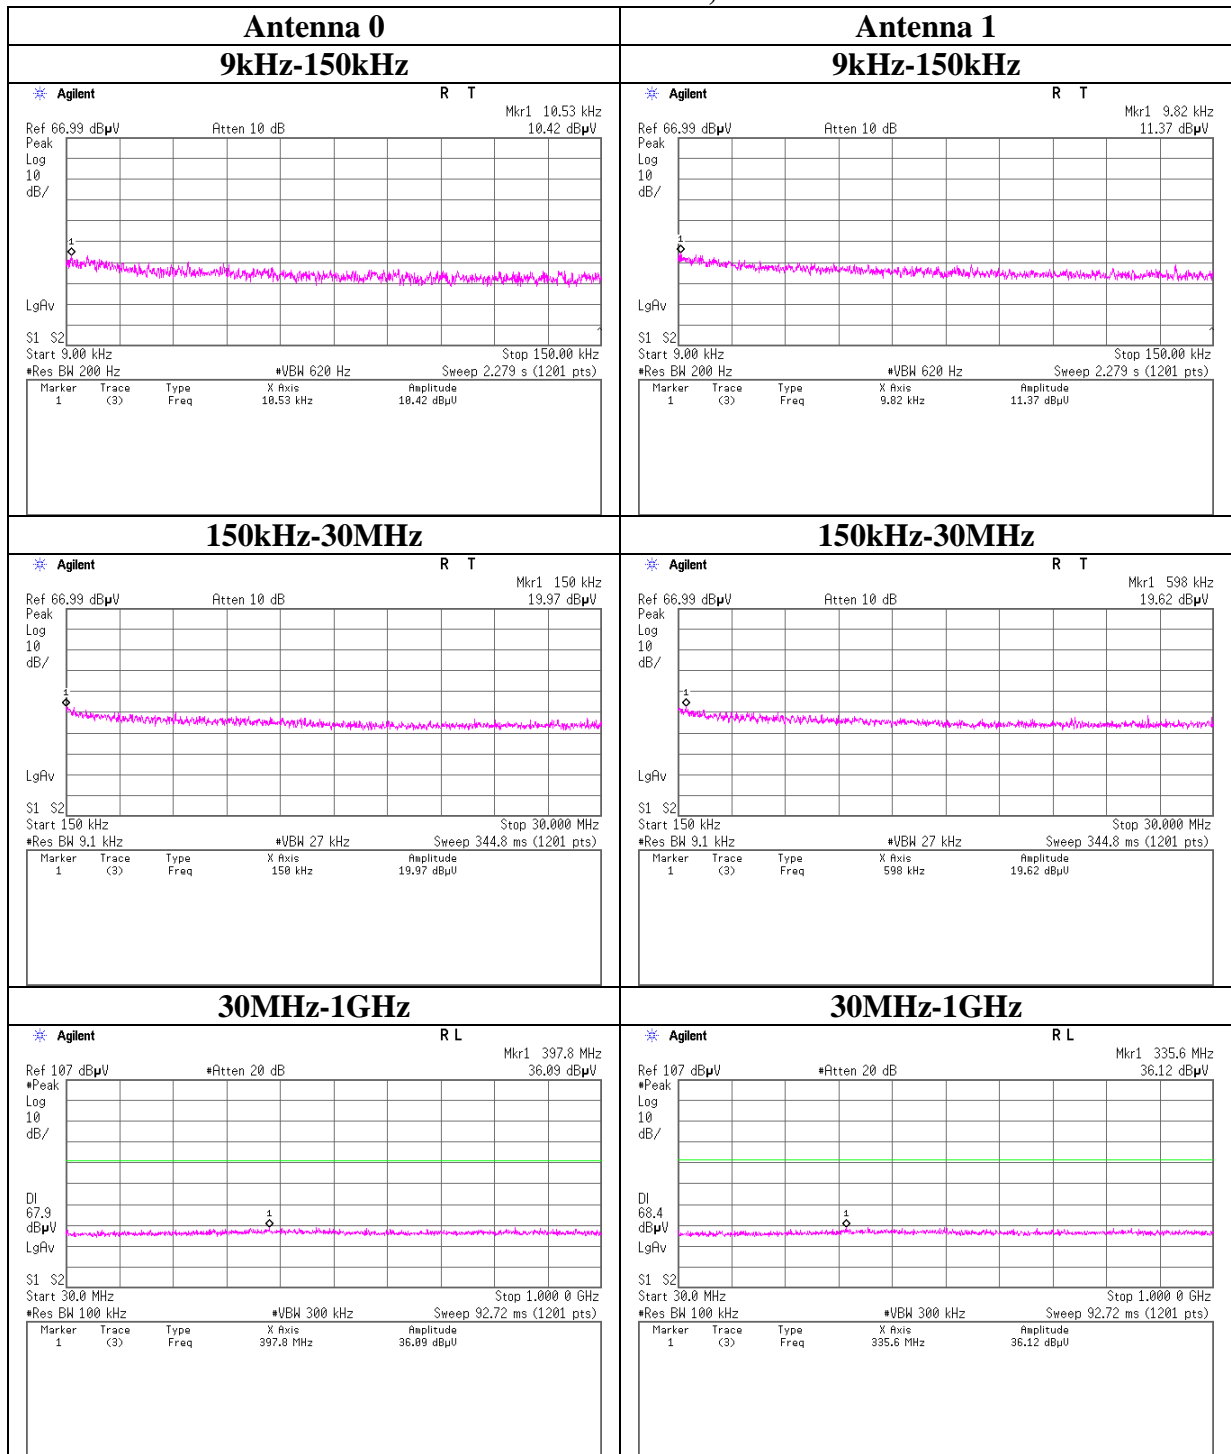

## Conducted Spurious Emission


### 11n-40 Tx 2452MHz, MCS8

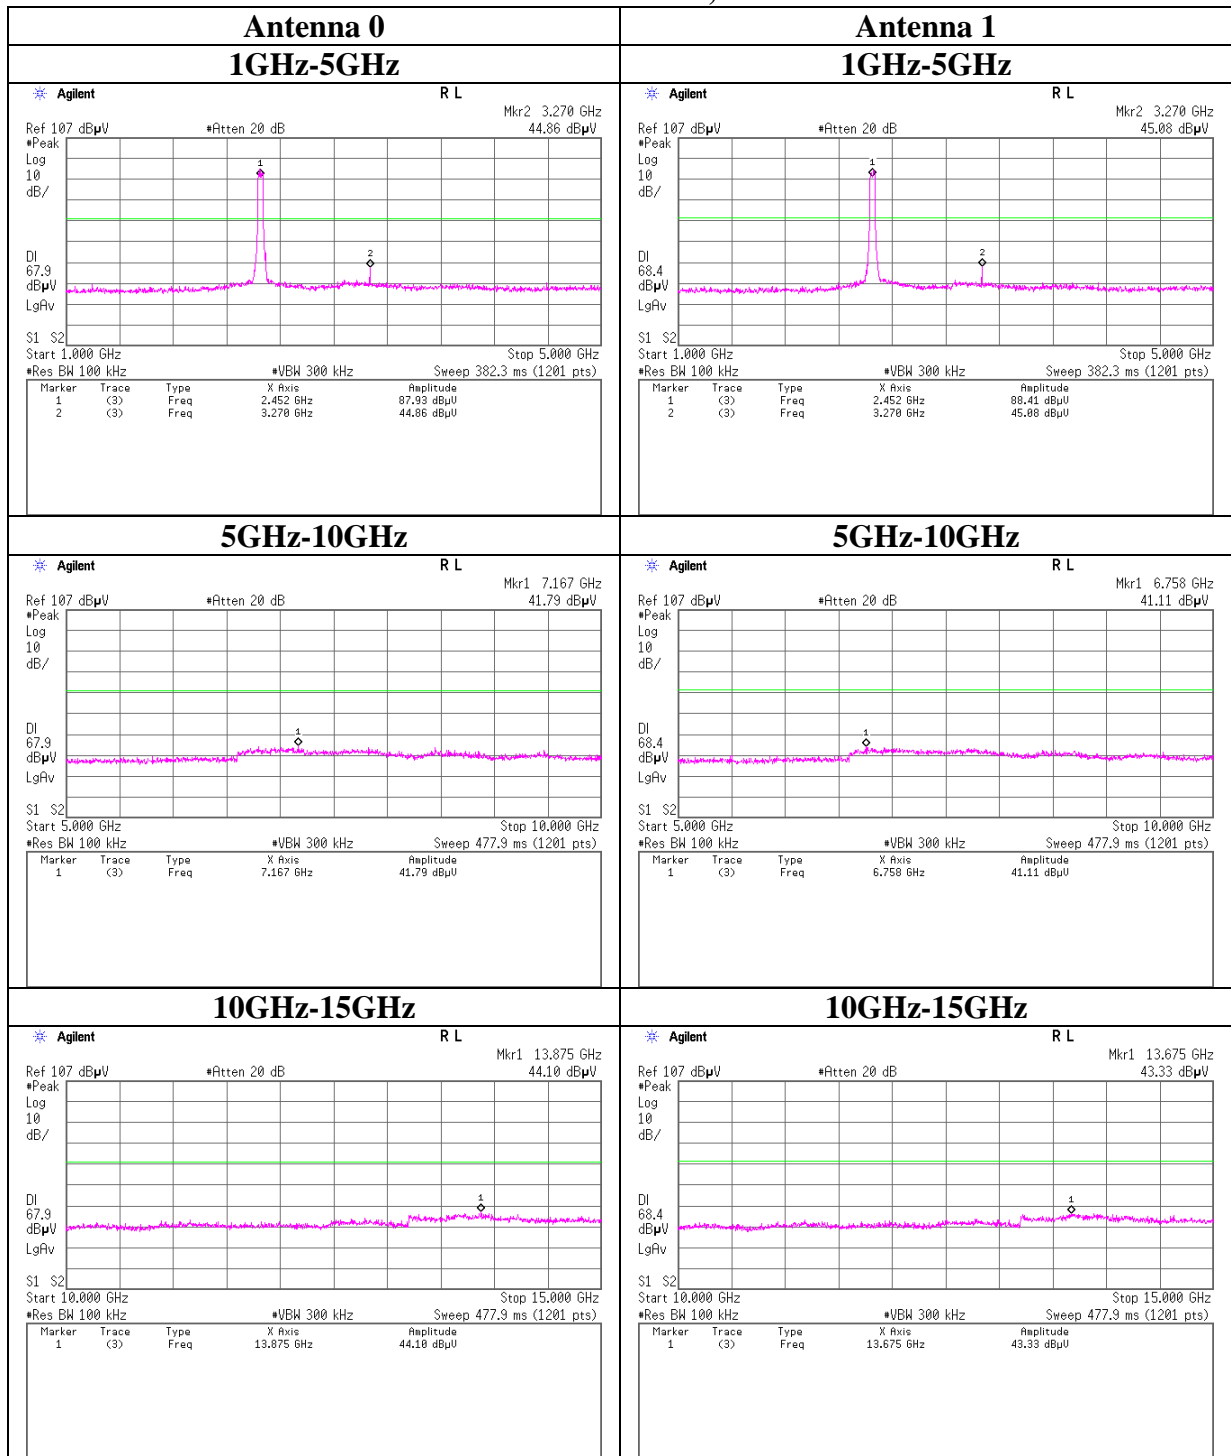




## Conducted Spurious Emission

### 11n-40 Tx 2452MHz, MCS8

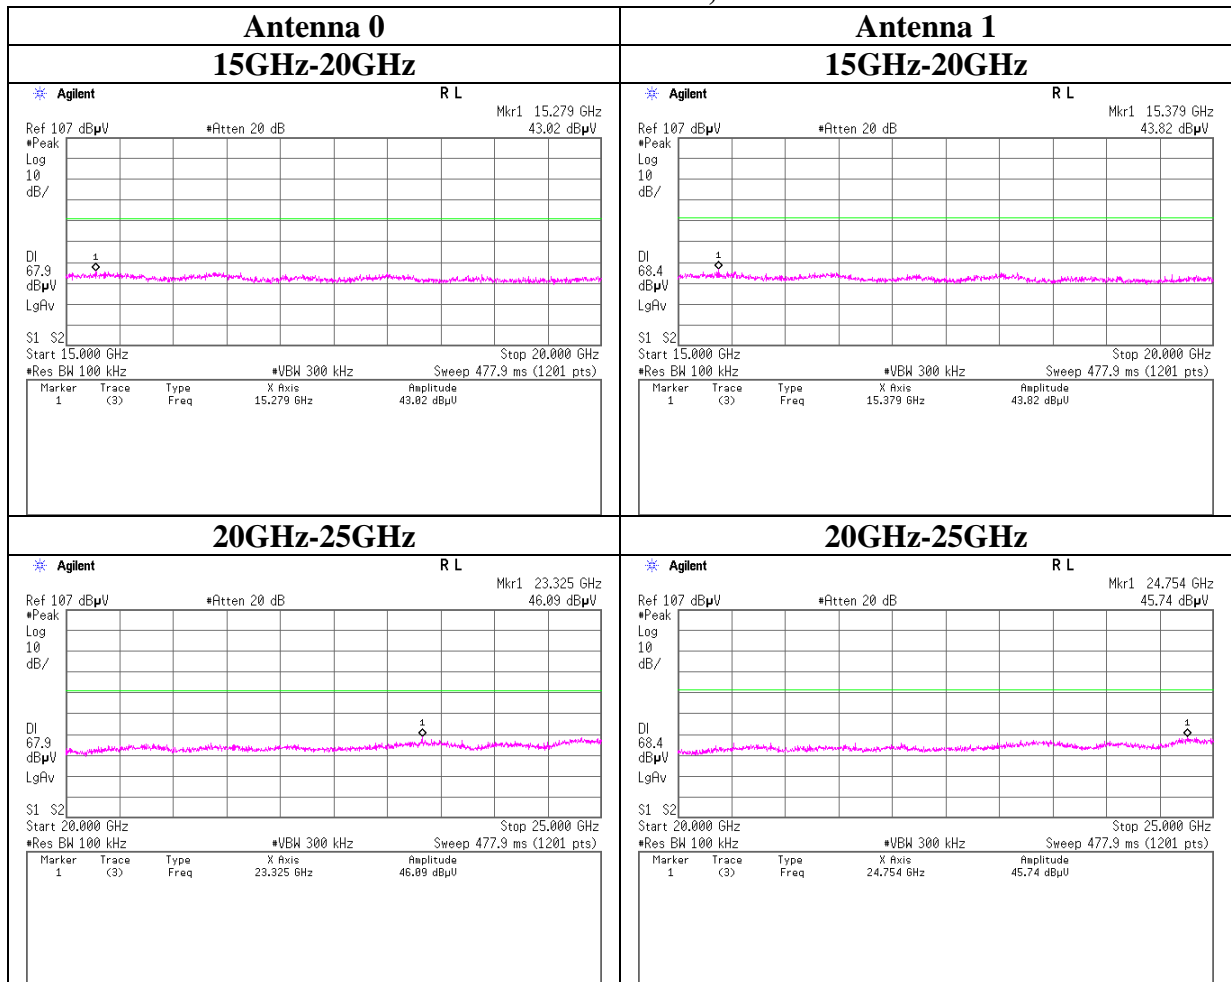


**Conducted Spurious Emission**

**Rx 2437MHz, Antenna 0**

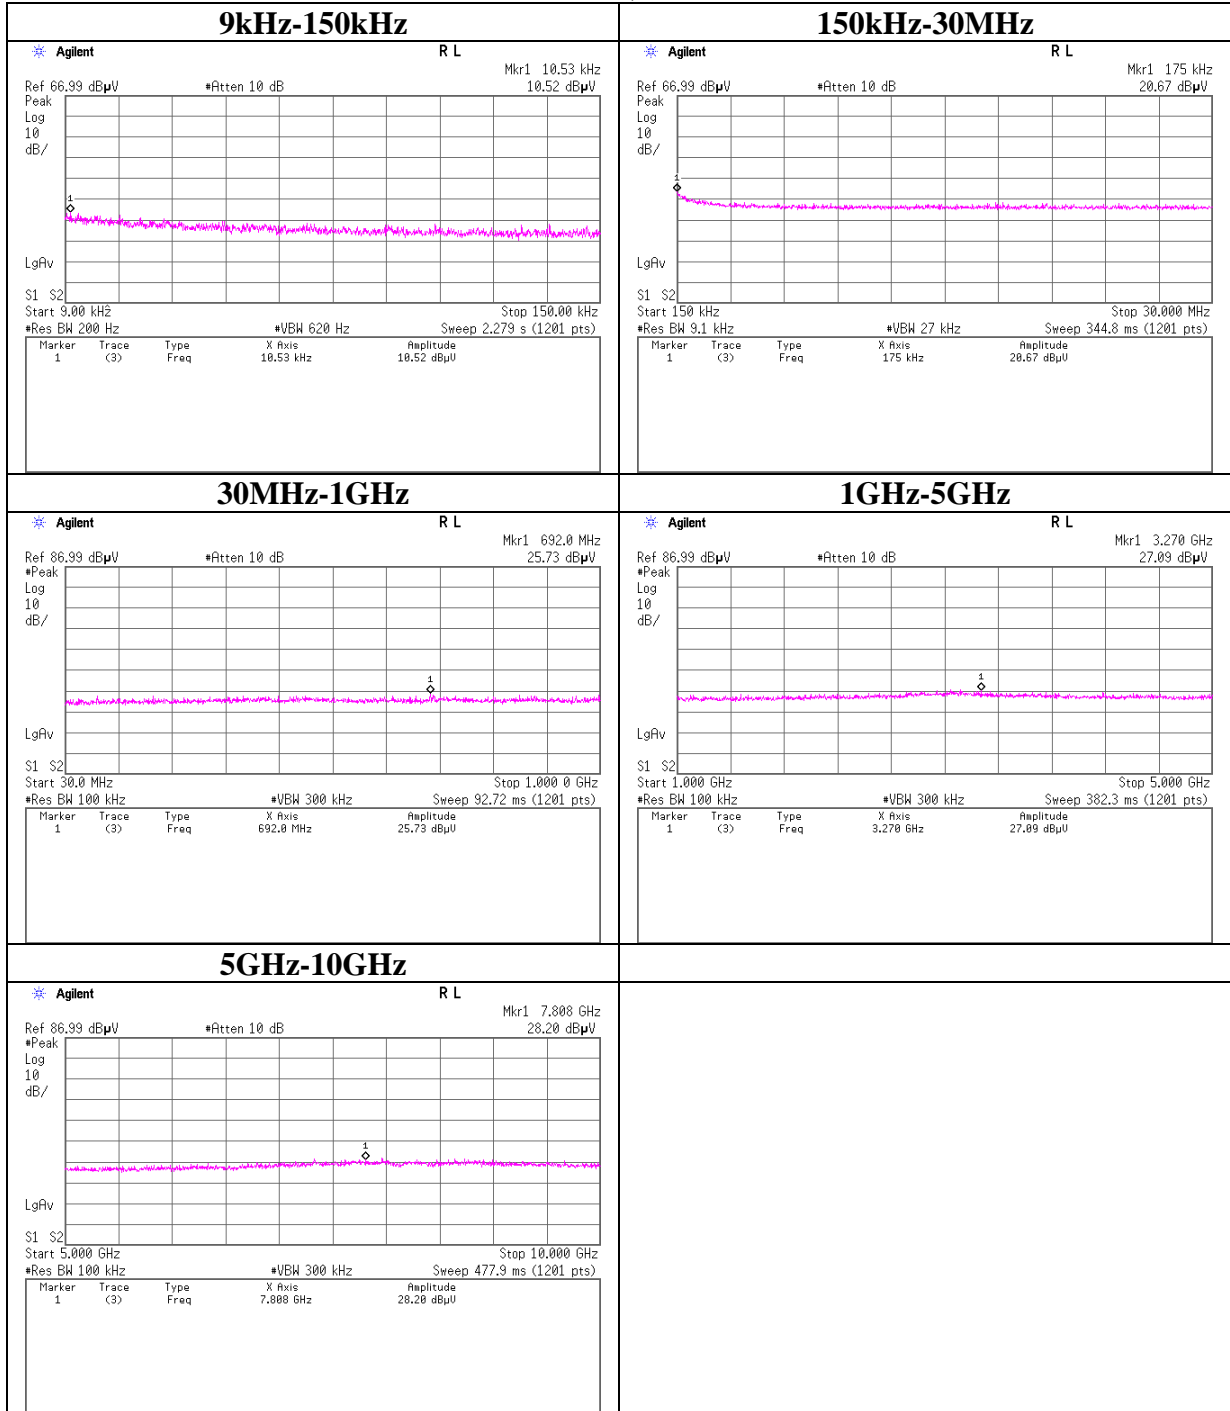


## Conducted Emission Band Edge compliance

### 11b Tx, Antenna 0, 11Mbps(Long)

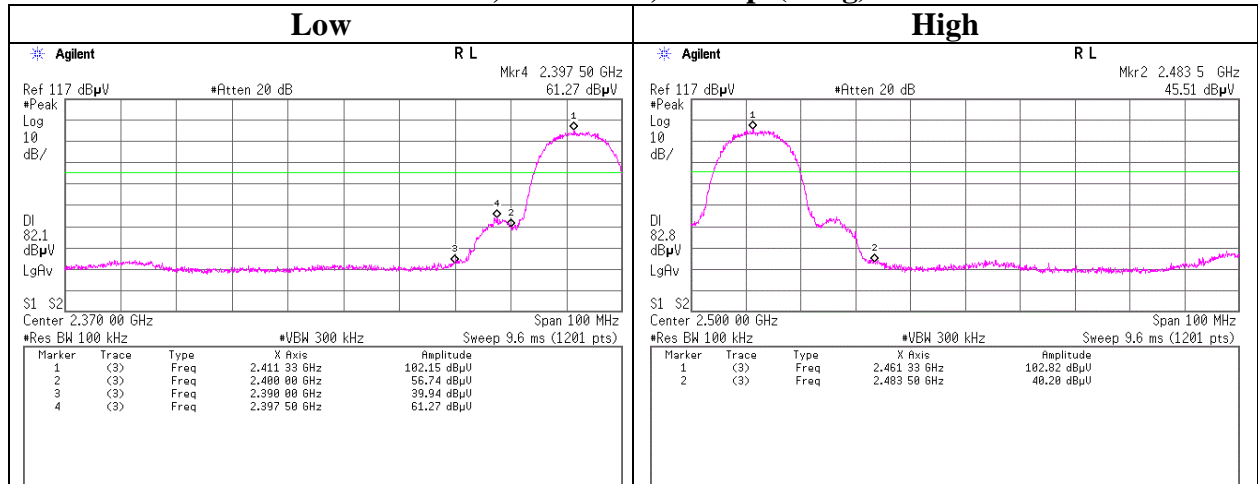


### 11g Tx, Antenna 0, 9Mbps

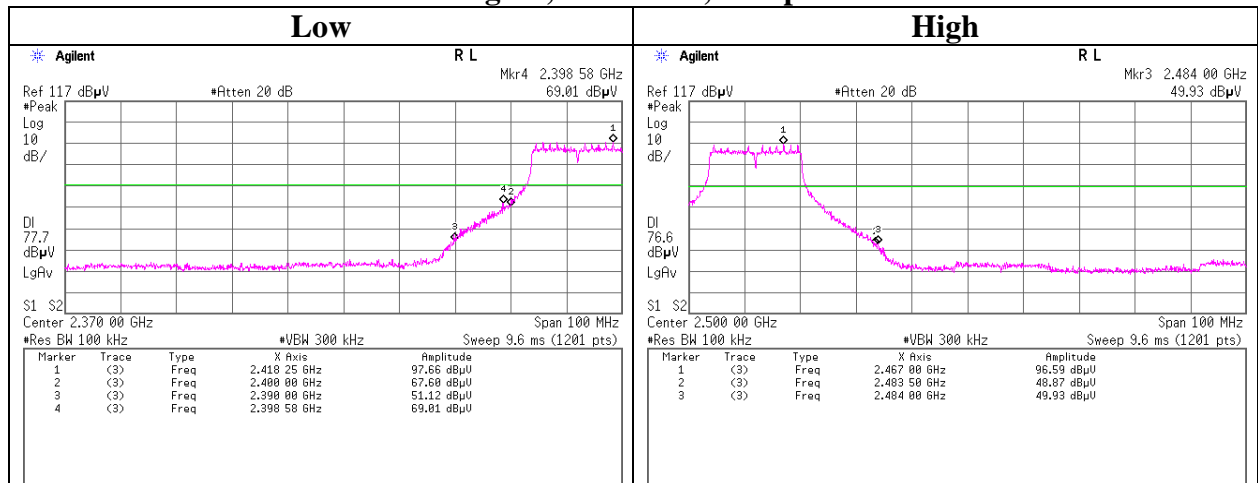


**Conducted Emission Band Edge compliance**

**11n-20 Tx, Antenna 0, MCS13**

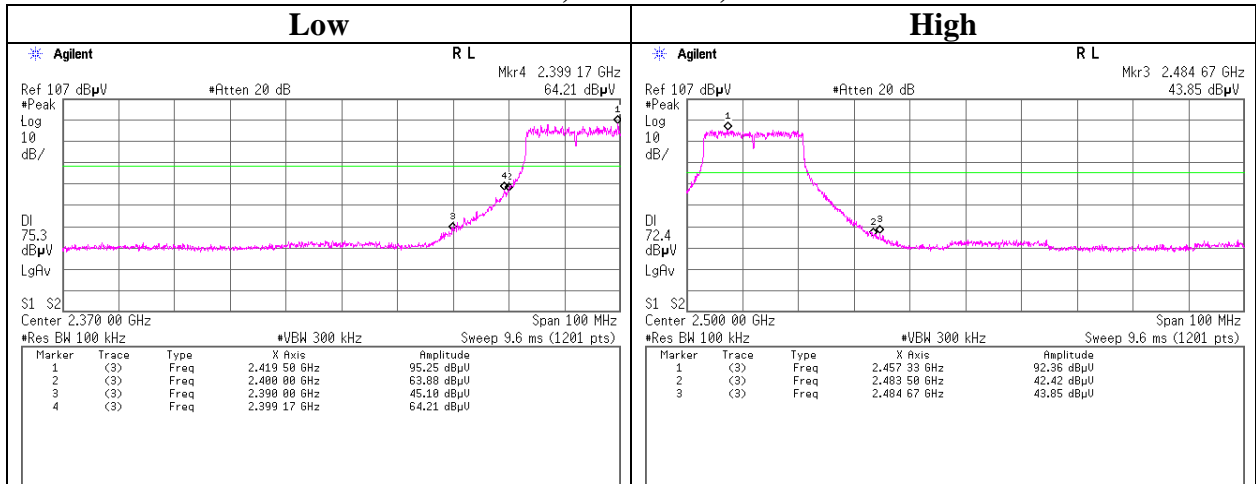


**11n-20 Tx, Antenna 1, MCS13**

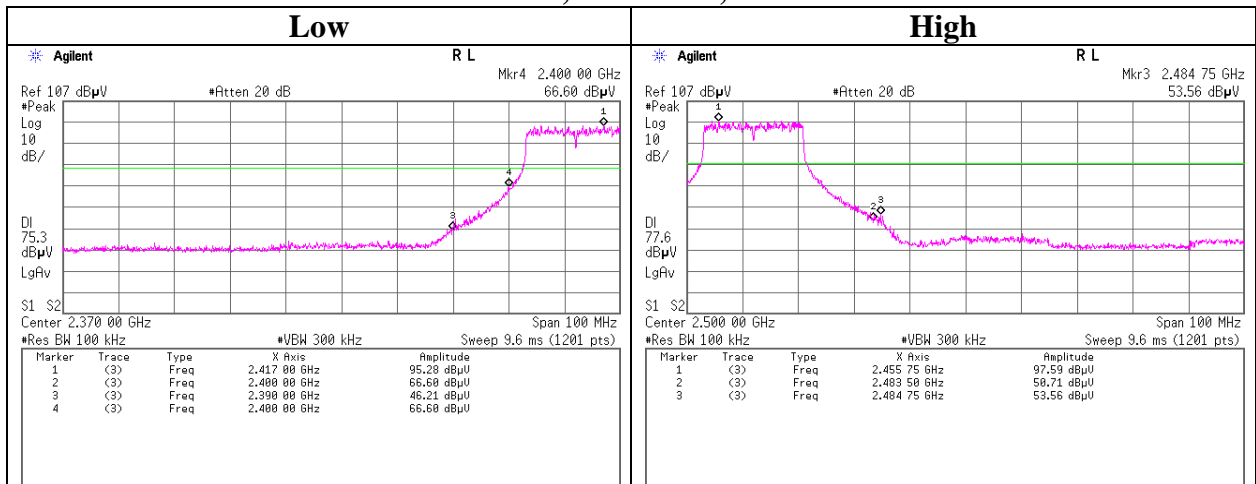


**Conducted Emission Band Edge compliance**

**11n-40 Tx, Antenna 0, MCS8**

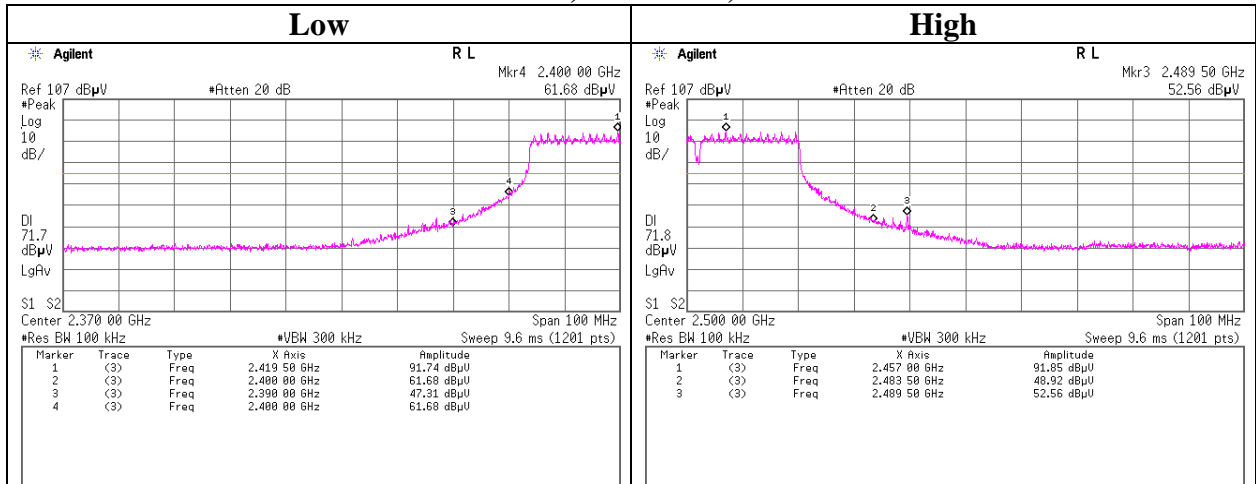

**11n-40 Tx, Antenna 1, MCS8**

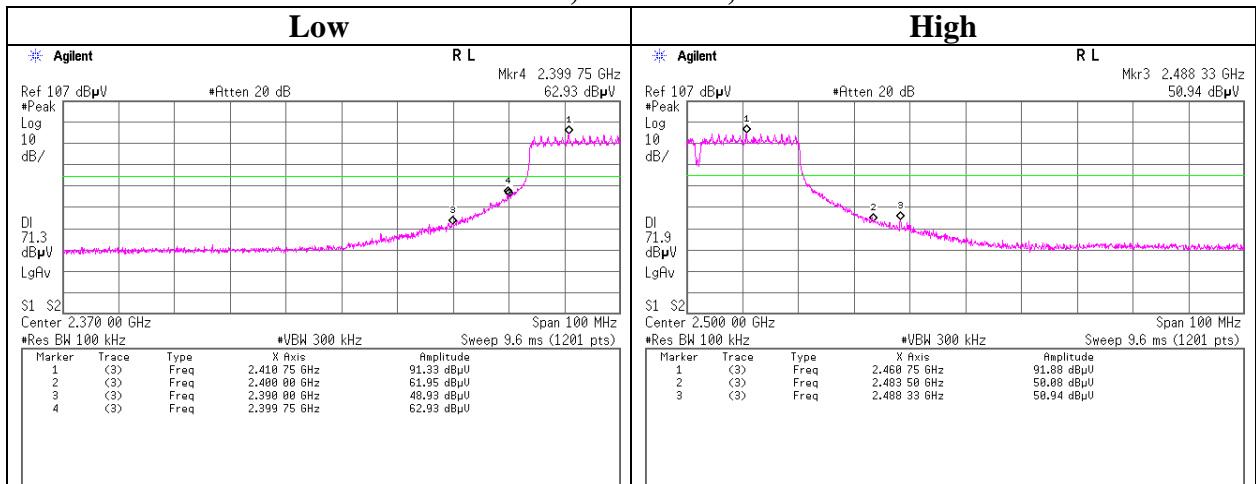

### Power Density

Test place                      Head Office EMC Lab. No.7 Shielded Room  
Report No.                      32AE0138-HO-01  
Date                              05/20/2011  
Temperature/ Humidity        24 deg.C / 40% RH  
Engineer                        Takumi Shimada  
Mode                              11b Tx, 11g Tx

11b      Antenna 0

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result [dBm]	Limit [dBm]	Margin [dB]
2412.00	-10.07	0.79	10.07	0.79	8.00	7.21
2437.00	-8.70	0.80	10.07	2.17	8.00	5.83
2462.00	-9.56	0.80	10.07	1.31	8.00	6.69

11g      Antenna 0

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result [dBm]	Limit [dBm]	Margin [dB]
2412.00	-13.52	0.79	10.07	-2.66	8.00	10.66
2437.00	-11.41	0.80	10.07	-0.54	8.00	8.54
2462.00	-14.50	0.80	10.07	-3.63	8.00	11.63


Sample Calculation:

Result = Reading + Cable Loss + Attenuator

**Power Density**

**11b, Antenna 0, 11Mbps(Long)**

**11g, Antenna 0, 9Mbps**

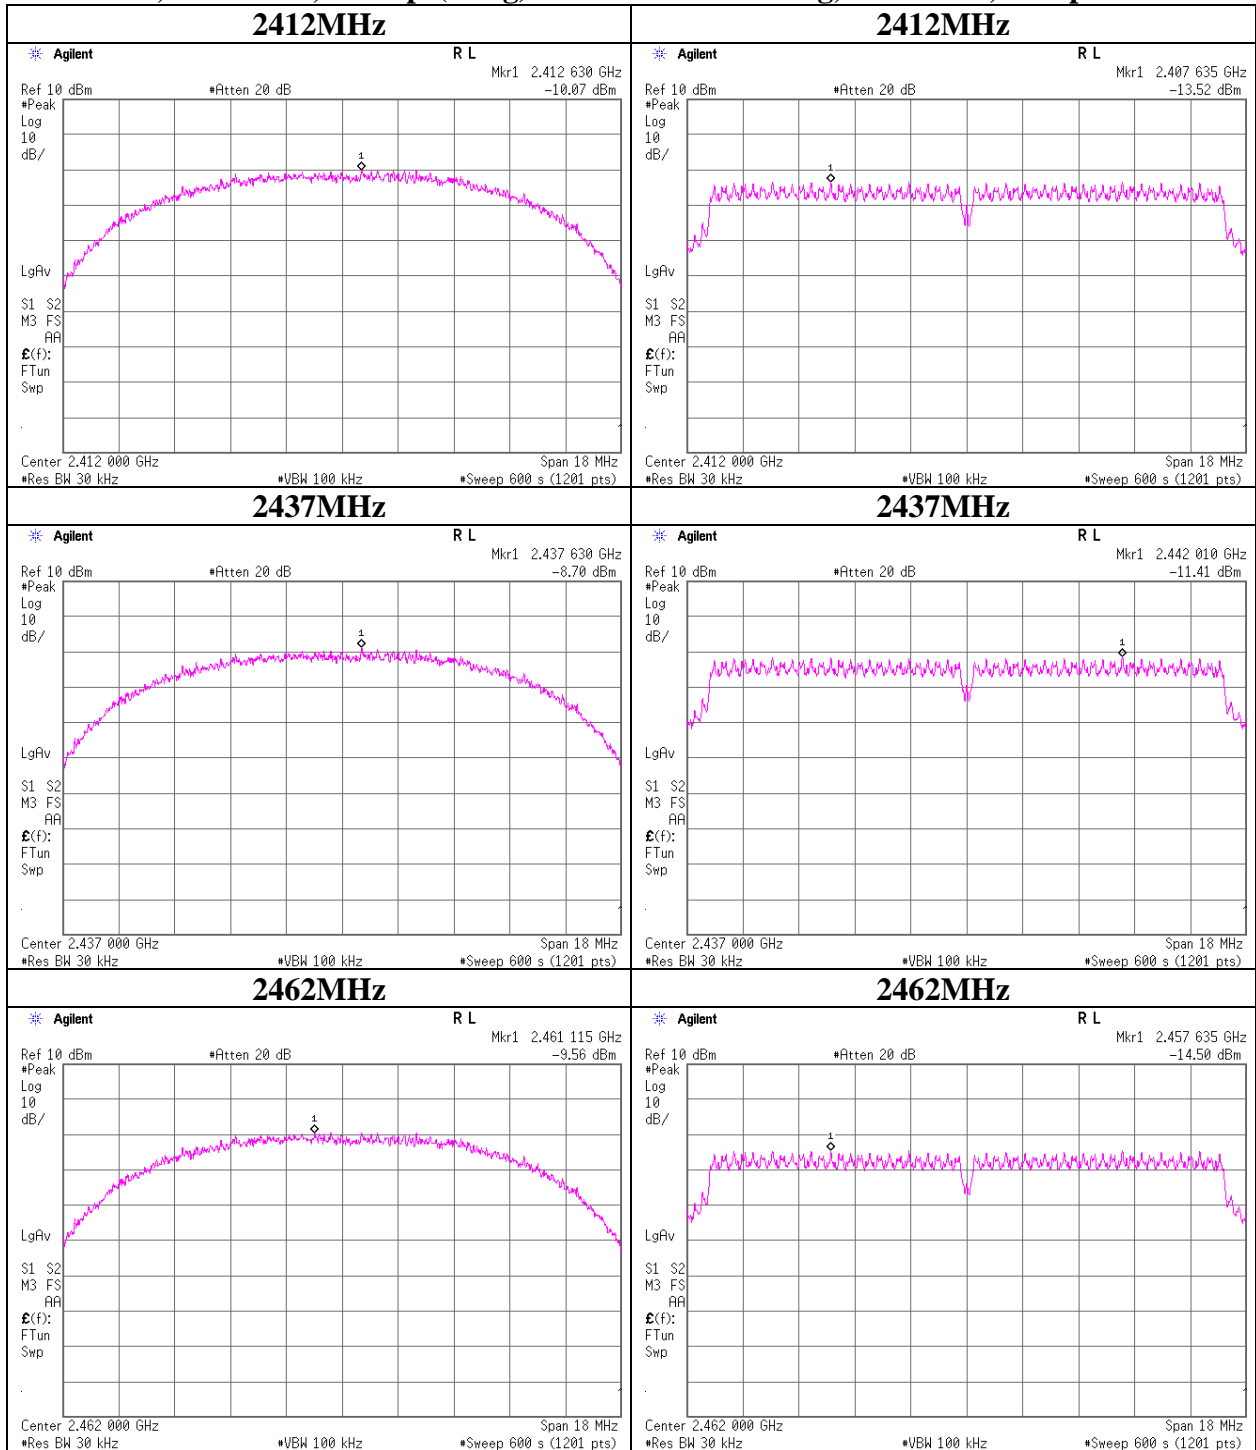

## Power Density

Test place	Head Office EMC Lab. No.7 Shielded Room
Report No.	32AE0138-HO-01
Date	05/20/2011
Temperature/ Humidity	24 deg.C / 40% RH
Engineer	Takumi Shimada
Mode	11n-20 Tx

### Antenna 0 + 1

Freq. [MHz]	Antenna 0	Antenna 1	Result		Limit [dBm]	Margin [dB]
	Result [mW]	Result [mW]	[dBm]	[mW]		
2412.00	0.25	0.30	-2.55	0.56	8.00	10.55
2437.00	0.55	0.62	0.67	1.17	8.00	7.33
2462.00	0.21	0.52	-1.41	0.72	8.00	9.41

Sample Calculation:

Result = Antenna 0 + 1

### Antenna 0

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result		Limit [dBm]	Margin [dB]
				[dBm]	[mW]		
2412.00	-16.81	0.79	10.07	-5.95	0.25	8.00	13.95
2437.00	-13.46	0.80	10.07	-2.59	0.55	8.00	10.59
2462.00	-17.72	0.80	10.07	-6.85	0.21	8.00	14.85

### Antenna 1


Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result		Limit [dBm]	Margin [dB]
				[dBm]	[mW]		
2412.00	-16.06	0.79	10.07	-5.20	0.30	8.00	13.20
2437.00	-12.98	0.80	10.07	-2.11	0.62	8.00	10.11
2462.00	-13.74	0.80	10.07	-2.87	0.52	8.00	10.87

Sample Calculation:

Result = Reading + Cable Loss + Attenuator



**Power Density**

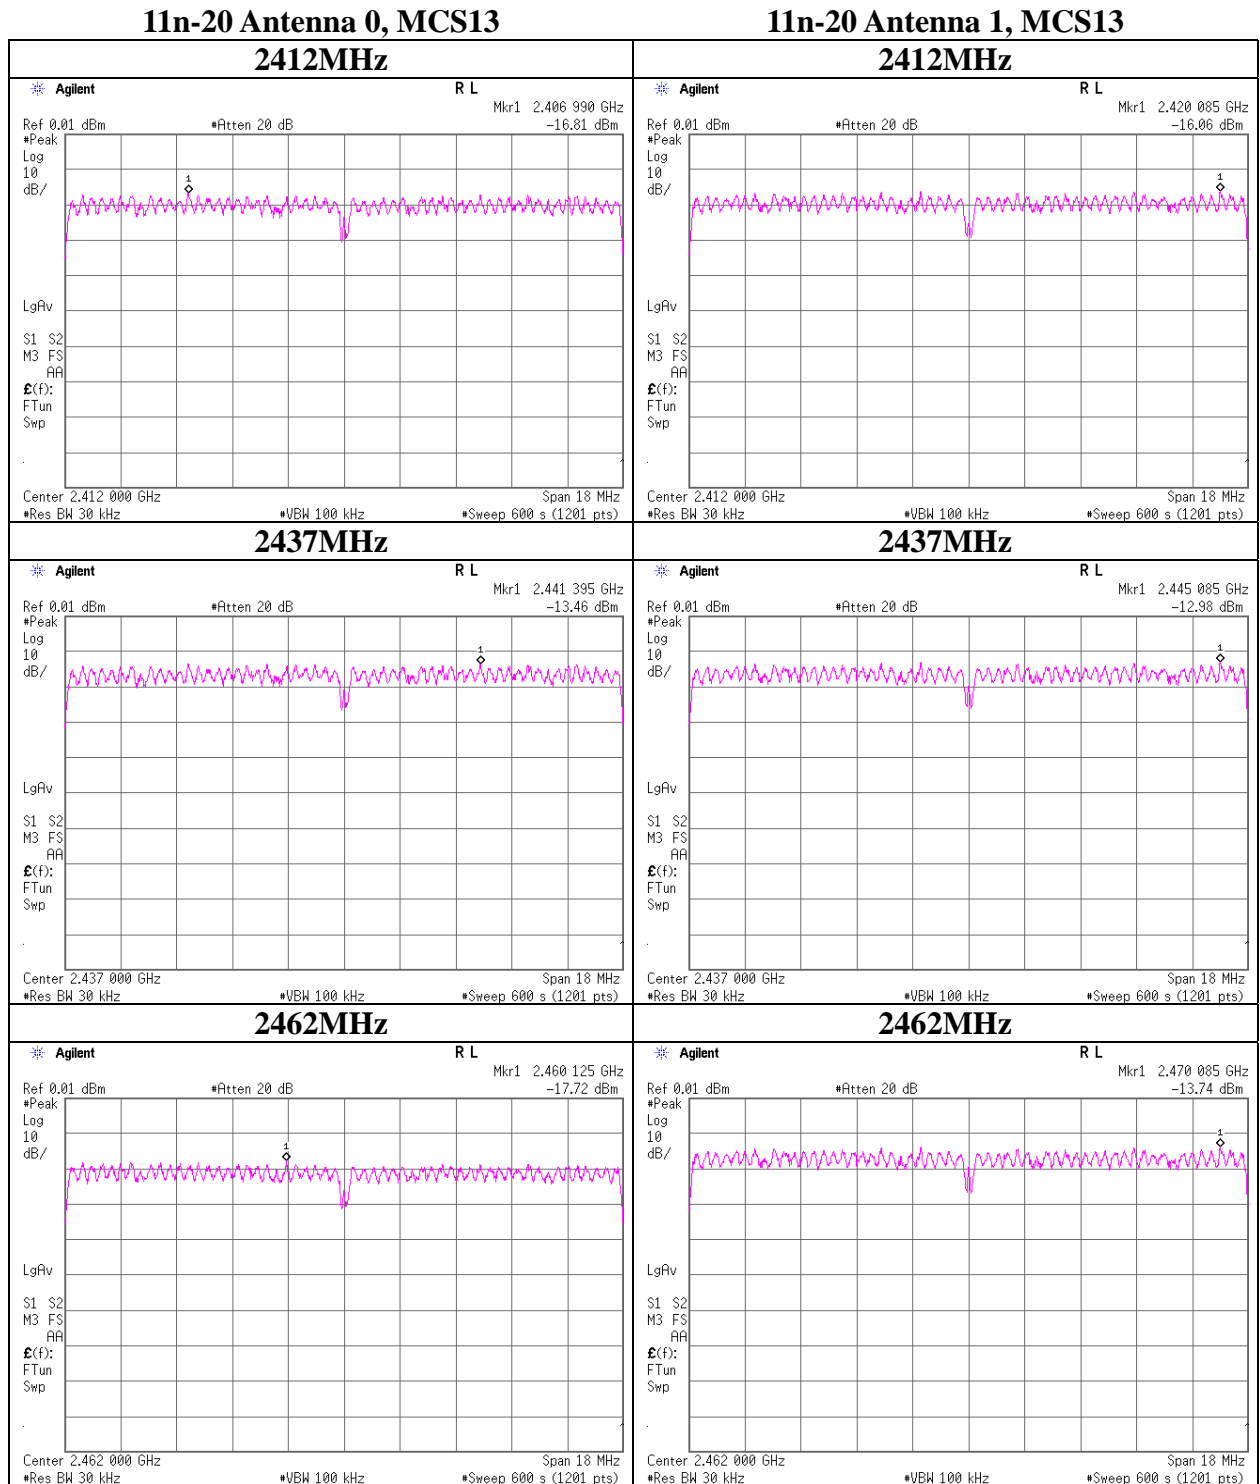

## Power Density

Test place	Head Office EMC Lab. No.7 Shielded Room
Report No.	32AE0138-HO-01
Date	05/20/2011
Temperature/ Humidity	24 deg.C / 40% RH
Engineer	Takayuki Shimada
Mode	11n-40 Tx

### Antenna 0 + 1

Freq. [MHz]	Antenna 0 Result [mW]	Antenna 1 Result [mW]	Result		Limit [dBm]	Margin [dB]
			[dBm]	[mW]		
2422.00	0.16	0.15	-5.06	0.31	8.00	13.06
2437.00	0.41	0.47	-0.57	0.88	8.00	8.57
2452.00	0.17	0.17	-4.68	0.34	8.00	12.68

Sample Calculation:

Result = Antenna 0 + 1

### Antenna 0

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result		Limit [dBm]	Margin [dB]
				[dBm]	[mW]		
2422.00	-18.91	0.80	10.07	-8.04	0.16	8.00	16.04
2437.00	-14.77	0.80	10.07	-3.90	0.41	8.00	11.90
2452.00	-18.46	0.80	10.07	-7.59	0.17	8.00	15.59

### Antenna 1

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result		Limit [dBm]	Margin [dB]
				[dBm]	[mW]		
2422.00	-18.97	0.80	10.07	-8.10	0.15	8.00	16.10
2437.00	-14.15	0.80	10.07	-3.28	0.47	8.00	11.28
2452.00	-18.66	0.80	10.07	-7.79	0.17	8.00	15.79


Sample Calculation:

Result = Reading + Cable Loss + Attenuator

**Power Density**

**11n-40 Antenna 0, MCS8**


**11n-40 Antenna 1, MCS8**

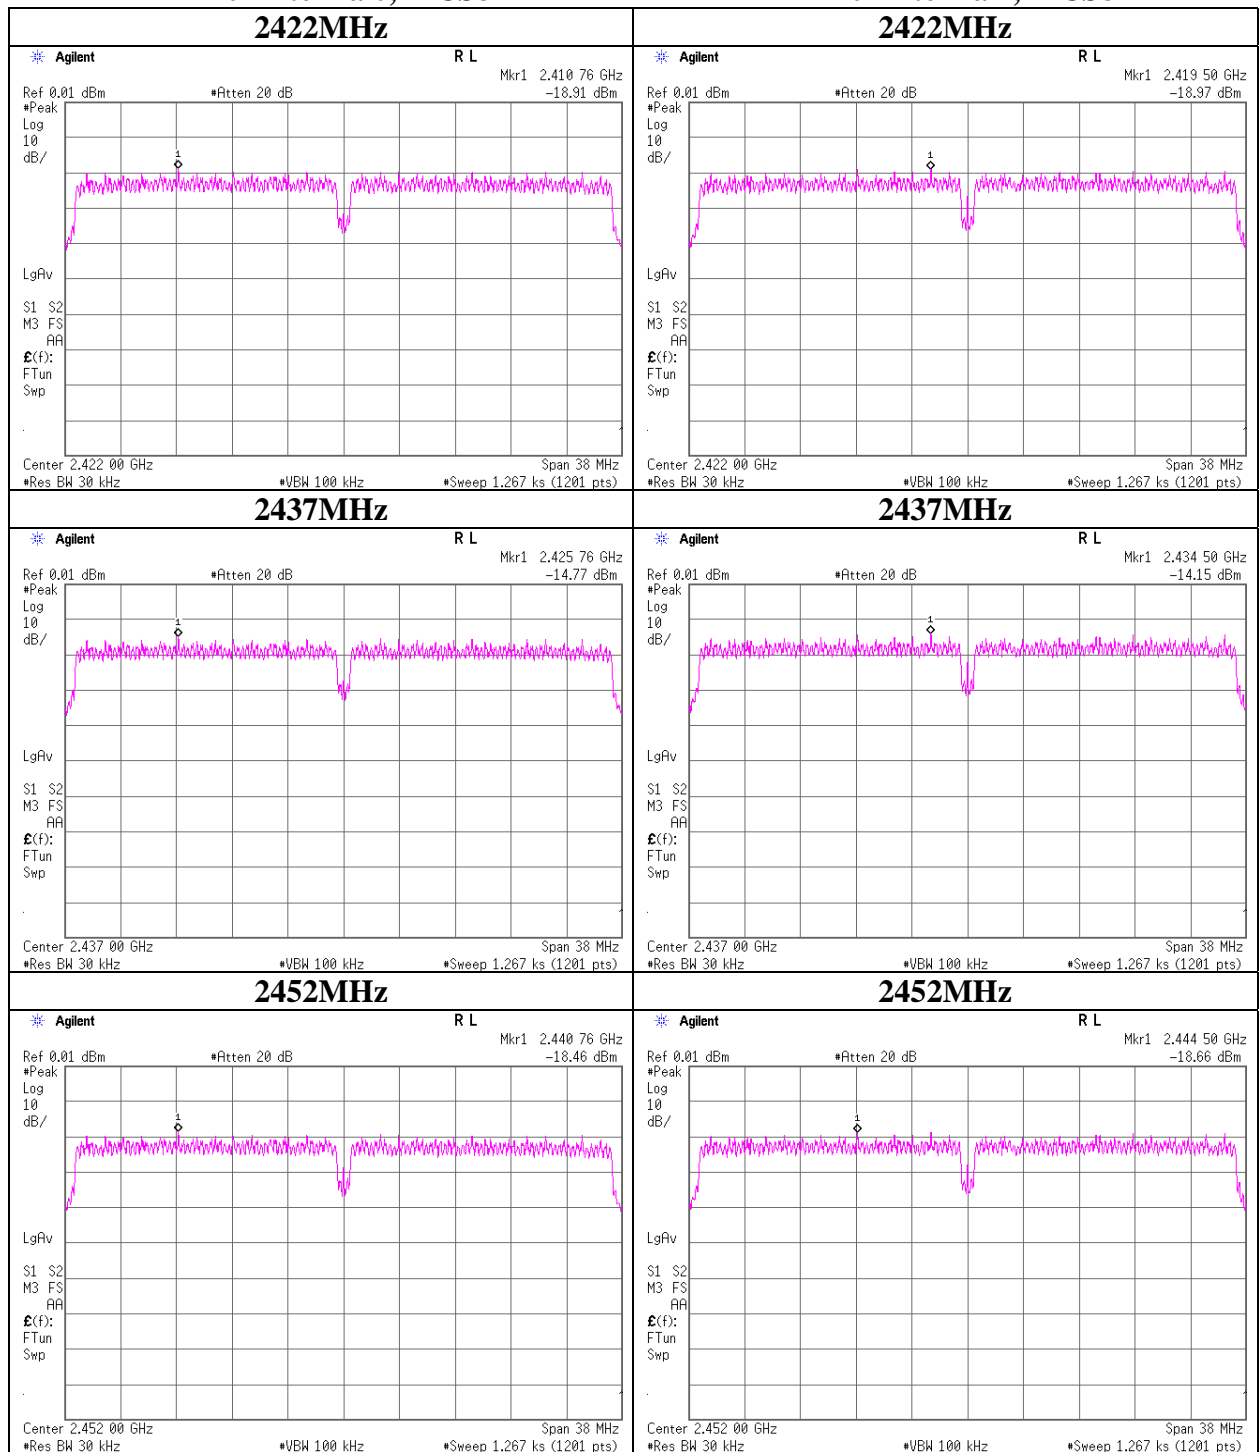


**99%Occupied Bandwidth**

**11b, Antenna 0, 11Mbps(Long)**


**11g, Antenna 0, 9Mbps**

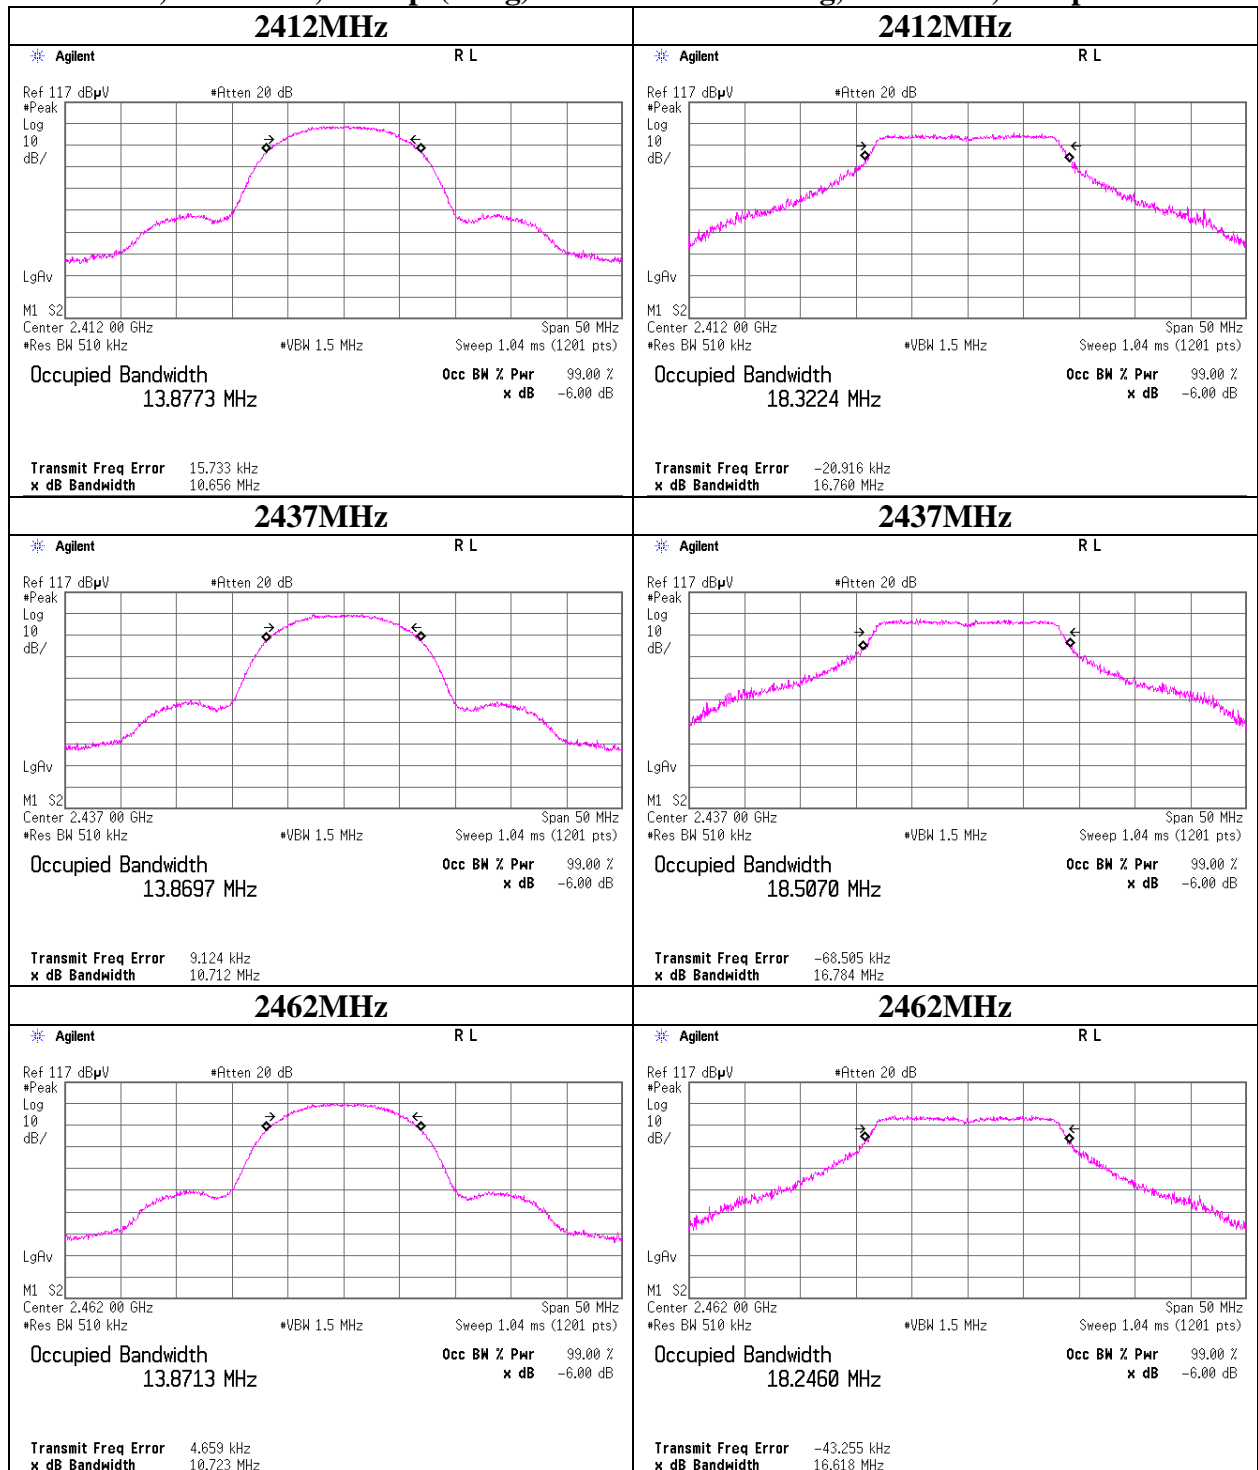

### 99% Occupied Bandwidth

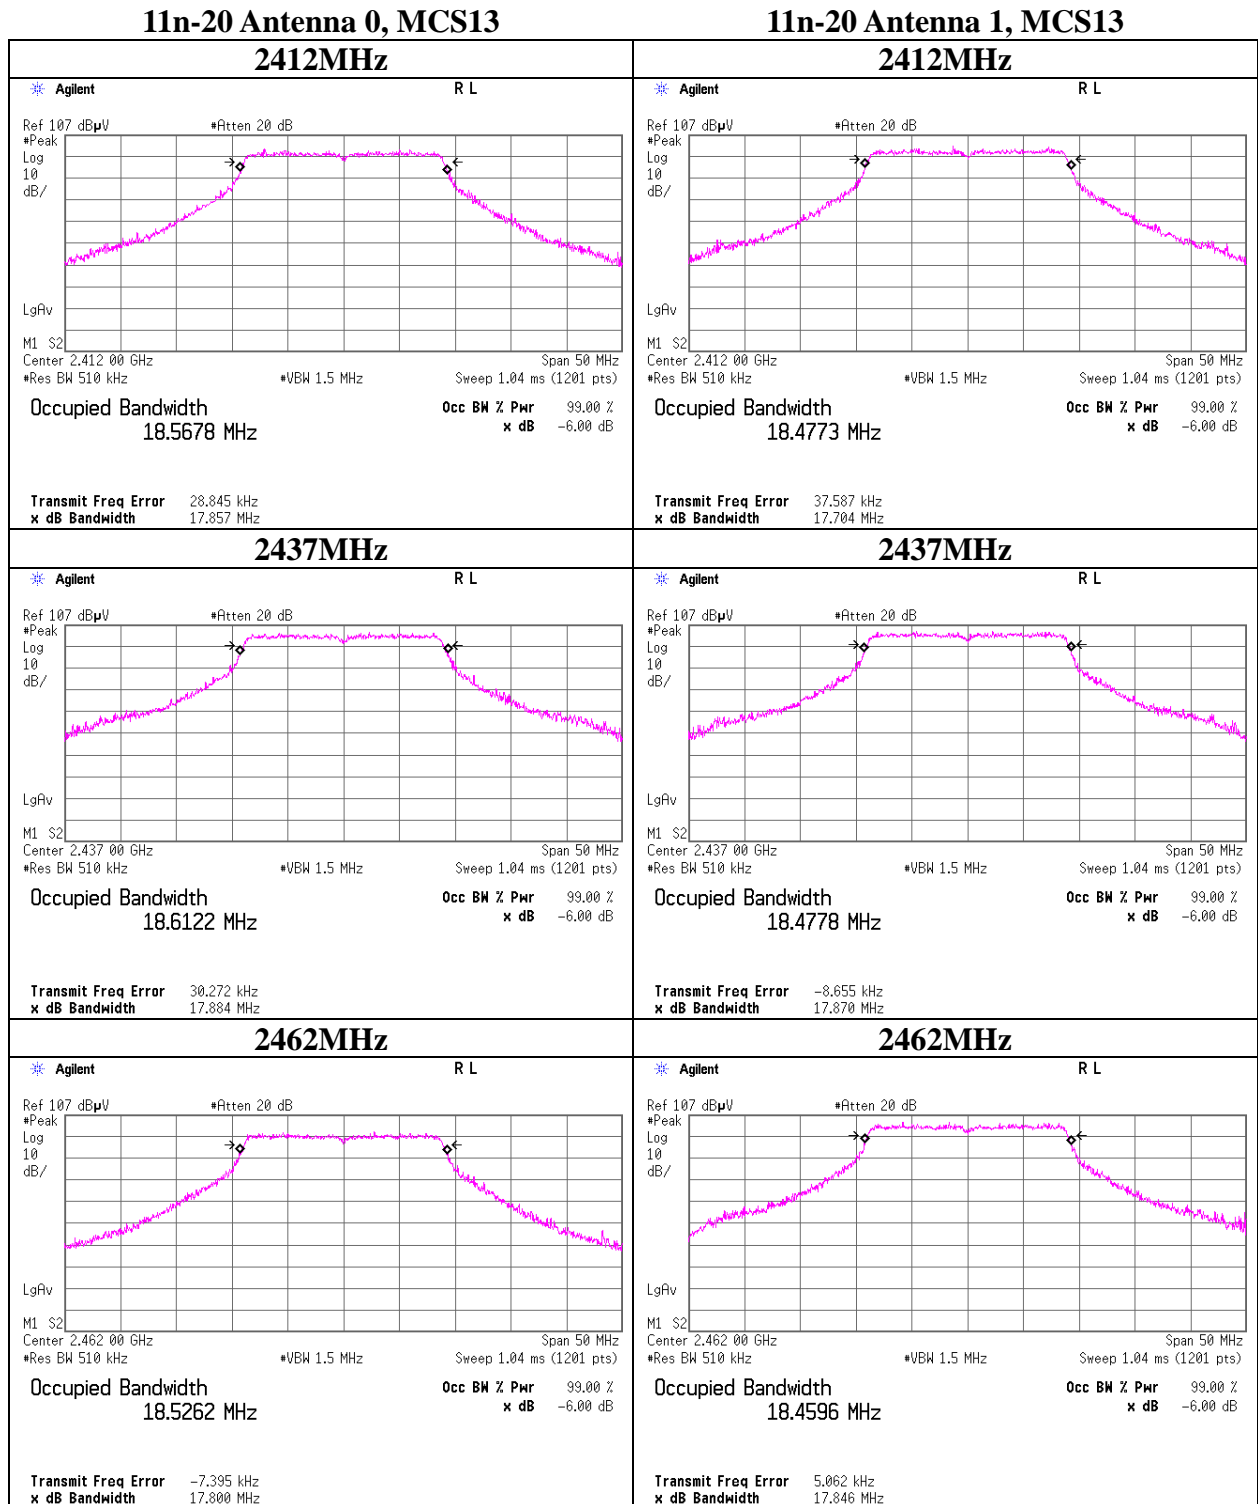

### 99% Occupied Bandwidth

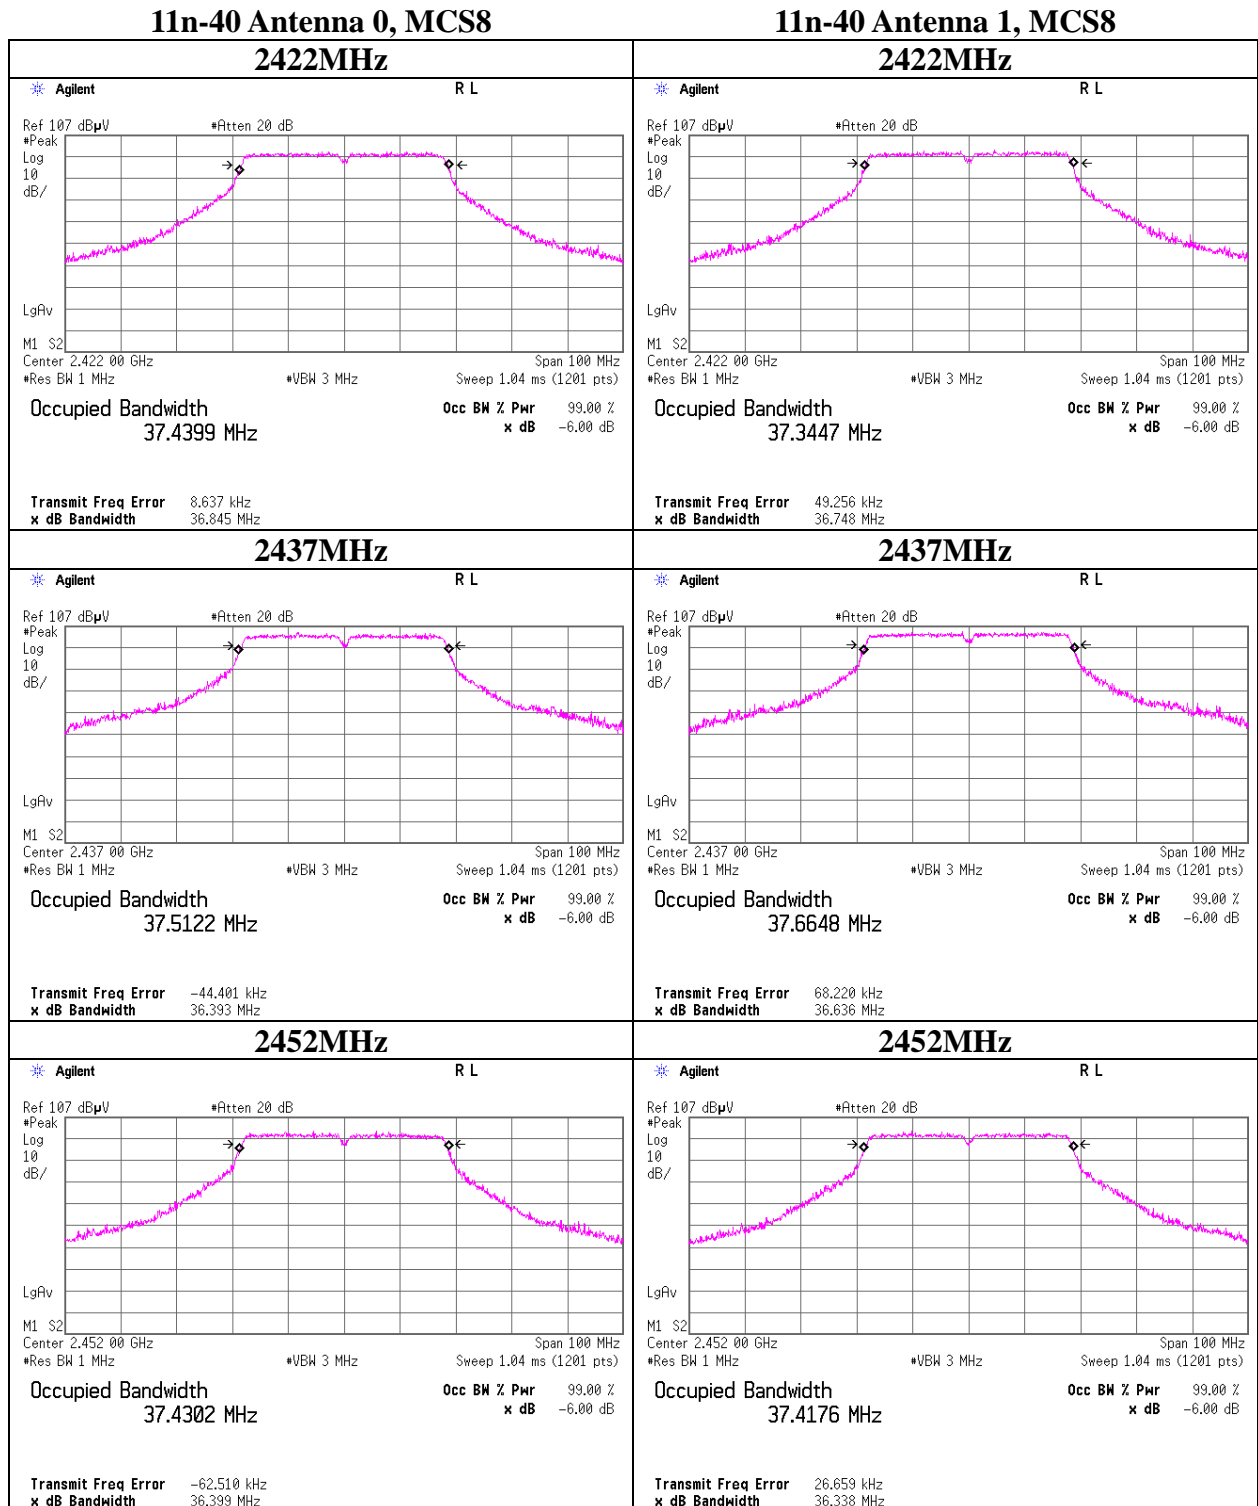

### APPENDIX 3: Test instruments

#### EMI test equipment (1/2)

Control No.	Instrument	Manufacturer	Model No	Serial No	Test Item	Calibration Date * Interval(month)
MSA-10	Spectrum Analyzer	Agilent	E4448A	MY46180655	AT	2011/02/15 * 12
MPM-13	Power Meter	Anritsu	ML2495A	0824014	AT	2010/11/01 * 12
MPSE-18	Power sensor	Anritsu	MA2411B	0738174	AT	2010/11/01 * 12
MAT-20	Attenuator(10dB)(above1 GHz)	HIROSE ELECTRIC CO.,LTD.	AT-110	-	AT	2011/01/06 * 12
MTA-09	Terminator	HP	HP 909D	03745	AT	2011/02/01 * 12
MCC-37	Microwave Cable	Hirose Electric	U.FL-2LP-066-A-(200)	-	AT	2010/09/29 * 12
MOS-19	Thermo-Hygrometer	Custom	CTH-201	0001	AT	2010/12/13 * 12
MSA-03	Spectrum Analyzer	Agilent	E4448A	MY44020357	AT	2010/11/30 * 12
MOS-04	Digital Humidity Indicator	N.T	NT-1800	MOS04	AT	2011/02/23 * 12
MAEC-03	Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 3m	DA-10005	RE	2011/02/22 * 12
MOS-13	Thermo-Hygrometer	Custom	CTH-180	-	RE	2011/02/23 * 12
MJM-15	Measure	KOMELON	KMC-36	-	RE	-
COTS-MEMI	EMI measurement program	TSJ	TEPTO-DV	-	RE / CE	-
MRENT-95	Spectrum Analyzer	Agilent	E4440A	MY45305081	RE / CE	2011/06/30 * 12
MHA-20	Horn Antenna 1-18GHz	Schwarzbeck	BBHA9120D	258	RE	2011/05/23 * 12
MCC-56	Microwave Cable	Suhner	SUCOFLEX104	270875/4(1m) / 284655(5m)	RE	2011/03/02 * 12
MPA-11	MicroWave System Amplifier	Agilent	83017A	MY39500779	RE	2011/03/10 * 12
MHF-19	High Pass Filter 3.5-18.0GHz	TOKIMEC	TF323DCA	602	RE	2010/09/21 * 12
MCC-76	Microwave Cable 1G-26.5GHz	Suhner	SUCOFLEX104	278967/4	RE	2010/12/03 * 12
MHA-16	Horn Antenna 15-40GHz	Schwarzbeck	BBHA9170	BBHA9170306	RE	2011/05/23 * 12
MTR-08	Test Receiver	Rohde & Schwarz	ESCI	100767	RE	2011/08/11 * 12
MBA-03	Biconical Antenna	Schwarzbeck	BBA9106	1915	RE	2010/10/11 * 12
MLA-03	Logperiodic Antenna	Schwarzbeck	USLP9143	174	RE	2010/10/11 * 12
MCC-51	Coaxial cable	UL Japan	-	-	RE	2011/07/15 * 12
MAT-09	Attenuator(6dB)	Weinschel Corp	2	BK7973	RE	2010/11/05 * 12
MPA-13	Pre Amplifier	SONOMA INSTRUMENT	310	260834	RE	2011/03/04 * 12
MSA-05	Spectrum Analyzer	Advantest	R3273	160400285	RE	2010/11/18 * 12
MAEC-04	Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 3m	DA-10005	CE	2011/03/01 * 12
MOS-15	Thermo-Hygrometer	Custom	CTH-180	-	CE	2011/02/23 * 12
MJM-07	Measure	PROMART	SEN1955	-	CE	-

**EMI test equipment (2/2)**

Control No.	Instrument	Manufacturer	Model No	Serial No	Test Item	Calibration Date * Interval(month)
MTR-07	Test Receiver	Rohde & Schwarz	ESCI	100635	CE	2010/10/27 * 12
MLS-06	LISN(AMN)	Schwarzbeck	NSLK8127	8127363	CE(AE)	2011/02/20 * 12
MLS-07	LISN(AMN)	Schwarzbeck	NSLK8127	8127364	CE(EUT)	2011/02/22 * 12
MTA-31	Terminator	TME	CT-01	-	CE	2011/01/05 * 12
MAT-67	Attenuator(13dB)	JFW Industries, Inc.	50FP-013H2 N	-	CE	2011/02/22 * 12
MCC-113	Coaxial cable	Fujikura/Suhner/TSJ	5D- 2W(10m)/SFM141(5m) /421- 010(1m)/sucoform141- PE(1m)/RFM- E121(Switcher)	-/04178	CE	2011/07/04 * 12

**The expiration date of the calibration is the end of the expired month.**

**All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.**

**As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.**

**Test Item: CE: Conducted Emission**

**RE: Radiated Emission**

**AT: Antenna Terminal Conducted test**

---

**UL Japan, Inc.**

**Head Office EMC Lab.**

**4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN**

**Telephone : +81 596 24 8116**

**Facsimile : +81 596 24 8124**