



Project: **07CA20145**
File: **MC115028**
Report: **R07CA20145**
Date: **May 09, 2007**
(Revised June 20, 2007)
Model: **Contactless Smart Card**
13.56 MHz RFID Transmitter Module
Part Number M07577B001
FCC ID: **N6SGBIR16**
IC: **827B-GBIR16**

Test Report

On

Electromagnetic Compatibility Testing

Gilbarco Inc.
Greensboro, NC USA

Copyright Ó 2007 Underwriters Laboratories Inc.

Underwriters Laboratories Inc. authorizes the above-named company to reproduce this Report provided it is reproduced in its entirety.

Test Report Details:

Tests Performed By: **Underwriters Laboratories Inc.
12 Laboratory Drive
Research Triangle Park, NC 27709**

Tests Performed For: **Gilbarco Inc.
7300 West Friendly Ave.
Greensboro, NC 27420 USA**

Applicant Contact: **Mr. Bob Sykes
(336) 547-5373
bob.sykes@gilbarco.com**

Test Report Number: **R07CA20145**

Test Report Date: **May 09, 2007**
Revision A (June 20, 2007) – Corrected ANSI C63.4 publication date

Product Type: **13.56 MHz RFID reader**

Model Number: **Contactless Smart Card - Part Number M07577B001**

Sample Serial Number: **Unserialized, pre-production sample**

Sample Tag Number: **S07LB037**

EUT Category: **Transmitter - Low Powered**

EUT Type: **Transmitter Module**

Sample Receive Date: **May 03, 2007**

Testing Start Date: **May 03, 2007**

Date Testing Complete: **May 04, 2007**

Underwriters Laboratories Inc. reports apply only to the specific samples tested under stated test conditions. All samples tested were in good operating condition throughout the entire test program. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. Underwriters Laboratories Inc. shall have no liability for any deductions, inferences or generalizations drawn by the client or others from Underwriters Laboratories Inc. issued reports. This report shall not be used to claim, constitute or imply product certification, approval, or endorsement by NVLAP or any agency of the US government.

This report may contain test results that are not covered by the NVLAP accreditation. The scope of accreditation is limited to the specific tests that are listed on the NVLAP certificates provided at the end of this report.

Summary of Testing:

Test #	Test Name Test Requirement/Specification	Comply	Does Not Comply	See Remark
1	Radiated Power and Spurious Emissions - 13.56 MHz Devices 47 CFR Part 15, Subpart C / 47 CFR Part 15, Subpart C, Section 15.225 RSS-210, Issue 6 / RSS-210, Issue 6, Section A2.6	X	-	
2	Radiated Emissions (unintentional) - 30 to 1000 MHz Electric Field 47 CFR Part 15, Subpart B / 47 CFR Part 15, Subpart B, Class A ICES-003 Issue 4 / ICES-003 Issue 4, Class A	X	-	
3	Conducted Emissions - Voltage 47 CFR Part 15, Subpart C / 47 CFR Part 15, Subpart C, Section 15.207 47 CFR Part 15, Subpart B / 47 CFR Part 15, Subpart B, Class A RSS-GEN Issue 1 / RSS-GEN Issue 1, Section 7.2.2 ICES-003 Issue 4 / ICES-003 Issue 4, Class A	X	-	1
4	Radiated Emissions - Occupied Bandwidth 47 CFR Part 15, Subpart C / 47 CFR Part 15, Subpart C RSS-210, Issue 6 / RSS-210, Issue 6	X	-	
5	Radiated Emissions - Restricted Bands 47 CFR Part 15, Subpart C / 47 CFR Part 15, Subpart C, Section 15.205 RSS-210, Issue 6 / RSS-210, Issue 6, Section 2.7	X	-	
6	Maximum Permissible Exposure 47 CFR Part 1 / 47 CFR Part 1, Section 1.1307	X	-	5


Remarks:

- Modifications: Modification required to comply: 120-ohm resistor added to ESD earth connection. Larger values were found to reduce the emissions further.
- Operating Environment: This device is considered to operate in a Class A environment (non-residential).
- Measurement Site: Measurements were performed on Industry Canada registered site IC-2953.
- Occupied BW: The occupied bandwidth was measured to be 1.80 kHz. Canadian Emissions Designator is 1K80G1D.
- Canada RF Exposure: This device is exempt from routine evaluation to RF Exposure requirements from RSS-210 Issue 2, because this device operates at less than 2.5 W EIRP at a frequency of less than 1.5 GHz as detailed in RSS-210 Issue 2 section 2.5.2.
- Peak-to-Average ratio: This device transmits nearly continuously, therefore no average reduction is applied to peak measurements.
- Frequency Stability: Measurements of frequency stability vs temperature and line voltage are provided by Gilbarco as a separate report.

Conclusion:


The tests listed in the Summary of Testing section of this report have been performed and the results recorded by Underwriters Laboratories Inc. in accordance with the procedures stated in each test requirement and specification. The test list was determined by the Applicant as being applicable to the Equipment Under Test. As a result, the subject product has been verified to comply or not comply as noted in the Summary of Testing with each test specification. The test results relate only to the items tested.

Prepared By:

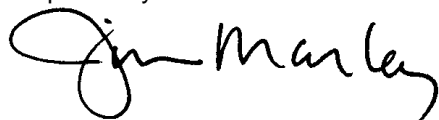

Jim Marley
NARTE Certified EMC Engineer
james.r.marley@us.ul.com
(919) 549-1408

Reviewed By:



Mark Nolting
NARTE Accredited EMC Test Lab Engineer
mark.nolting@us.ul.com
(919) 549-1584

Test Facilities:

Test Location A) 10-Meter Anechoic Chamber (Industry Canada - IC 2953, VCCI - R-722/C-2427)

Constructed by Lindgren RF Enclosures, this room consists of a 17.9 by 12 by 8.3 m (inside clearance) shielded room lined with TDK absorber material. The walls, floor (conducting ground plane) and ceiling are constructed of double sided galvanized sheet steel supported by 19 mm thick partical board. The interior walls and ceiling are covered with 10 by 10 cm, 4.6 mm thick ferrite tiles and partially covered with polystyrene absorber cones. Removable floor tiles and cones covering the floor between the EUT and antenna are provided when RF immunity testing is performed.

Room is provided with a 4.0 m diameter embedded turntable and a 3-ft x 7-ft and 8-ft x 8-ft double knife edge doors for access. Also, the room is fed electrical EUT power via permanently installed filters and is provided with a permanently mounted video surveillance camera. A remotely controllable antenna mast is located in the room for positioning the measuring antenna from 1 to 4 m above the ground plane.

Test Location B) Compact Anechoic Chamber

Constructed by Lindgren RF Enclosures, this room consists of a 6-m x 3-m x 2.9 m high (inside clearance) shielded room lined with TDK absorber material. The walls, floor, and ceiling are constructed of 0.75-mm thick galvanized sheet steel supported by ¾-inch thick partical board. The interior walls and ceiling are covered with 10 by 10 cm, 4.6 mm thick ferrite tiles and partially covered with polystyrene absorber cones. Removable floor tiles and cones cover the floor between the EUT and antenna.

Room is provided with a 4-ft x 8-ft double knife-edge door for access. Also, the room is fed electrical EUT power via permanently installed filters and is provided with a video camera.

Test Location C) Ground Reference Plane

Horizontal floor ground reference plane constructed of 0.75-mm thick galvanized sheet steel supported by ¾-inch partical board and measures 10-ft x 12- ft.

Test Location D) Ground Reference Plane # 1 (VCCI - C-742/T-235)

Horizontal floor ground reference plane constructed of 0.75-mm thick galvanized sheet steel supported by ¾-inch partical board and measures 10-ft x 12-ft. It is located and bonded next to one vertical wall of the Control Room and is, therefore, provided with a 10-ft x 12-ft vertical ground reference plane constructed of the same material. Power filters and LISNs, when required, are placed on top of and bonded to the horizontal floor ground reference plane.

Test Location E) Ground Reference Plane # 2 (VCCI - C-743/T-236)

Horizontal floor ground reference plane constructed of 0.75-mm thick galvanized sheet steel supported by ¾-in partical board and measures 22-ft x 14-ft. Bonded along one edge is a vertical plane measuring 12-ft x 10-ft constructed of the same material. Power filters and LISNs, when required, are placed on top of and bonded to the horizontal floor ground reference plane.

Test Location F) Ground Reference Plane

Horizontal floor ground reference plane constructed of 0.75-mm thick galvanized sheet steel supported by ¾-inch partical board measuring 10-ft x 12-ft.

Test Location G) Outdoor Test Site

30-meter diameter non-reflective grassy area located behind the UL-RTP EMC Laboratory used primarily for emissions testing of spark-ignited engine devices to CISPR 12.

Test Location I) Harmonics/Flicker Test Station

Test area consisting of three-phase synthesized power source, power analyzer, and reference impedance for measurement of Harmonic Currents and Voltage Fluctuations and Flicker.

Test Location J) Non-ferromagnetic Ground Reference Plane

Horizontal floor ground reference plane constructed of 1.5-mm thick aluminum measuring 3.6-m by 1.2-m.

Test Location X) Other

As described in the Comments Section of Test Results.

EUT Information:

Equipment Used During Test:

Use*	Product Type	Manufacturer	Part Number	Comments
EUT	Contactless Smart Card - RFID Module	Gilbarco	M07577B001	13.56 MHz RFID reader
ACC	Antenna	Gilbarco	M05170	
ACC	Antenna Cable	Gilbarco	M07703	
ACC	ESD ground cable	Gilbarco	M07709	ESD ground. Found to require 120-ohm resistor during testing.
ACC	ECR Smartpad Interface Cable	Gilbarco	M07702	
ACC	Power Supply	Elpac Power Systems	WM063-1950	Representative AC-to-DC power supply.
SIM	Power/Data connection board	-	-	Small board used to provide data/DC power to RFID module (simulated host).
SIM	Resistive Load	-	-	50-ohm Matched impedance resistive load (used for conducted emissions test).

* Use = EUT - Equipment Under Test, ACC - Accessory (Not Subjected to Test), or SIM - Simulator (Not Subjected to Test)

Input/Output Ports:

Port #	Name	Type*	Cable Max. >3m	Cable Shielded	Comments
0	Enclosure	N/E	No	No	
1	AC Mains	AC	No	No	To representative power supply.

AC = AC Power Port

N/E = Non-Electrical

EUT Operating Frequencies:

Frequency (MHz)	Description
13.56	Transmit Frequency. Measure spurious through 10 th harmonic.
< 108	Highest unintentional operating frequency

Power Interface:

Mode #	Voltage (V)	Current (A)	Power (W)	Frequency (DC/AC-Hz)	Phases (#)	Comments
Rated	120	-	-	60	1	
1	120	-	-	60	1	North American nominal line voltage

EUT Operation Modes:

Mode #	Description
1	EUT operating normally – transmitting at 13.56 searching for RFID tag. Output power is fixed and not adjustable by the user.

EUT Configuration Modes:

Mode #	Description
1	RFID card reader module with representative power supply. Actual antenna is attached. Setup is placed on non-conductive, polystyrene foam table measuring 1.5m wide x 1.0m deep x 0.8m high.
2	RFID card reader module with representative power supply. Antenna is replaced by matched-impedance resistive load. Setup is located on non-conductive, wood and PVC table measuring 1.5m wide x 1.0m deep x 0.8m high.
3	RFID card reader module with representative power supply. Actual antenna is attached. Setup is placed on non-conductive, wood and PVC table measuring 1.5m wide x 1.0m deep x 0.8m high.

Test 1: Radiated Power and Spurious Emissions - 13.56 MHz RFID Devices

Test Requirement: FCC Part 15, Subpart C
 RSS-210 Issue 6

Test Specification: FCC Part 15, Subpart C, Section 15.225
 RSS-210 Issue 6, Section A2.6

Test Procedure:

All testing was performed inside UL's 10-meter semi-anechoic chamber. The chamber meets the FCC's site attenuation criteria for use as an alternative measurement site. The EUT was tested per ANSI C63.4:2003 test method placed on a non-conductive 1m x 1.5m table 80 cm above the ground plane.


Below 30 MHz: The receiver resolution bandwidth was set to 9 kHz and video bandwidth was set to 100 kHz. The receive antenna used was a loop antenna placed 1 meter above the ground reference plane with the loop axis pointing toward the EUT. The turntable was rotated from 0° to 360° to determine the worst-case emissions angle for each frequency.

At the angle of highest emissions the loop antenna axis was rotated from -90° to +90° to capture the highest field strength. The peak field strength was recorded. For this device peak field strength is assumed to equal average field strength, because, except for short interruptions, the signal is transmitted constantly.

All measurements were made at a 3-meter distance in an attempt to identify any emission produced by the EUT. A -40 dB/decade adjustment was made to the signal for measurements below 30 MHz per FCC Section 15.31(f)(2). Magnetic Field to electric field conversion is made assuming the impedance of free space of 377Ω (or 51.5 dBΩ).

30 MHz through 10th harmonic: The receiver resolution bandwidth was set to 120 kHz and video bandwidth was set to 1 MHz. The receive biconical antenna was placed three meters from the EUT. The turntable was rotated from 0° to 360° to determine the worst-case emissions angle for each frequency. Initial antennas heights of 1m, 2.5m, and 4 m are used for peak scan. Any emission within 6 dB of the applied limit is investigated in detail with antennas scanned from 1 to 4 meters at worst-case turntable angle.

FCC Part 15, Section 15.225 / RSS-210 Issue 6, Section A2.6 Emissions Limit

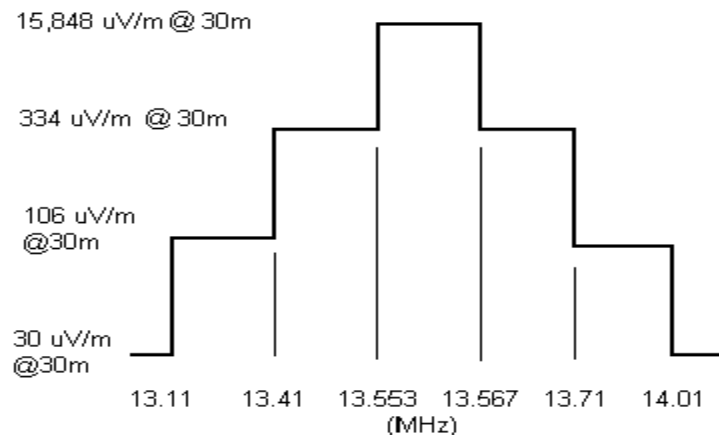

Test Deviations:

None

Test Setup:

Only the following ports were tested. See EUT Information for details.

Test Item	Port #	Port Name	EUT Operation Mode	EUT Configuration	Power Interface
A	0	Enclosure	1	1	1

Test 1 - Results: Radiated Power and Spurious Emissions - 13.56 MHz Devices

Test Results Summary:

Test Item	Test Location	Humidity (%)	Temperature (°C)	Pressure (kPa)	Pass/Fail (P/F)	Date Completed	Comment (#)
A	D	43	22	101	P	5/3/07	1 - 4

The EUT was considered to **Pass** the Requirements.

Comments:

Comment #	Description
1	From preliminary tests, it was determined that worst-case orientation is with card slot vertical.
2	A -40 dB adjustment was applied where 3m-distance measurements were used to meet 30-m distance limit.
3	FCC Part 15/RSS-210 radiated emissions below 30 MHz: Magnetic Field measurements are converted to Electric Field assuming far field impedance of 377 ohms (51.5dBO).
4	For setup photo see section Test 2 on pages 19 and 20.


Test Equipment Used:

Equipment ID	Description	Manufacturer	Model Number	Last Cal.	Next Cal.
AT0006	Loop Antenna, .01 to 30 MHz	Electro-Metrics	EM-6879	5/16/06	5/31/07
ATA030	Coaxial Cable, 25ft, BNC	UL	-	3/1/07	3/31/08
ATA198	6-ft. flexible microwave cable	Micro-Coax	UFB293C-0-0720-5GU50U	3/1/07	3/31/08
ATA199	6-ft. flexible microwave cable	Micro-Coax	UFB293C-0-0720-5GU50U	3/1/07	3/31/08
ATA208	50ft coaxial cable, N-male to N-male, low-loss	Micro-Coax	UFB293C-0-0720-5GU50U	3/1/07	3/31/08
SAR001	Spectrum Analyzer / Receiver	Hewlett-Packard	8572A	3/23/07	3/31/08

The above equipment has been calibrated and is within the manufacturer's published limit of error. Calibration is traceable to the National Institute of Standards & Technology(NIST) and conforms to ISO 17025:2005.


Test 1, Item A - Peak Plot:

Radiated Power and Spurious Emissions - 13.56 MHz Devices (13 to 30 MHz)

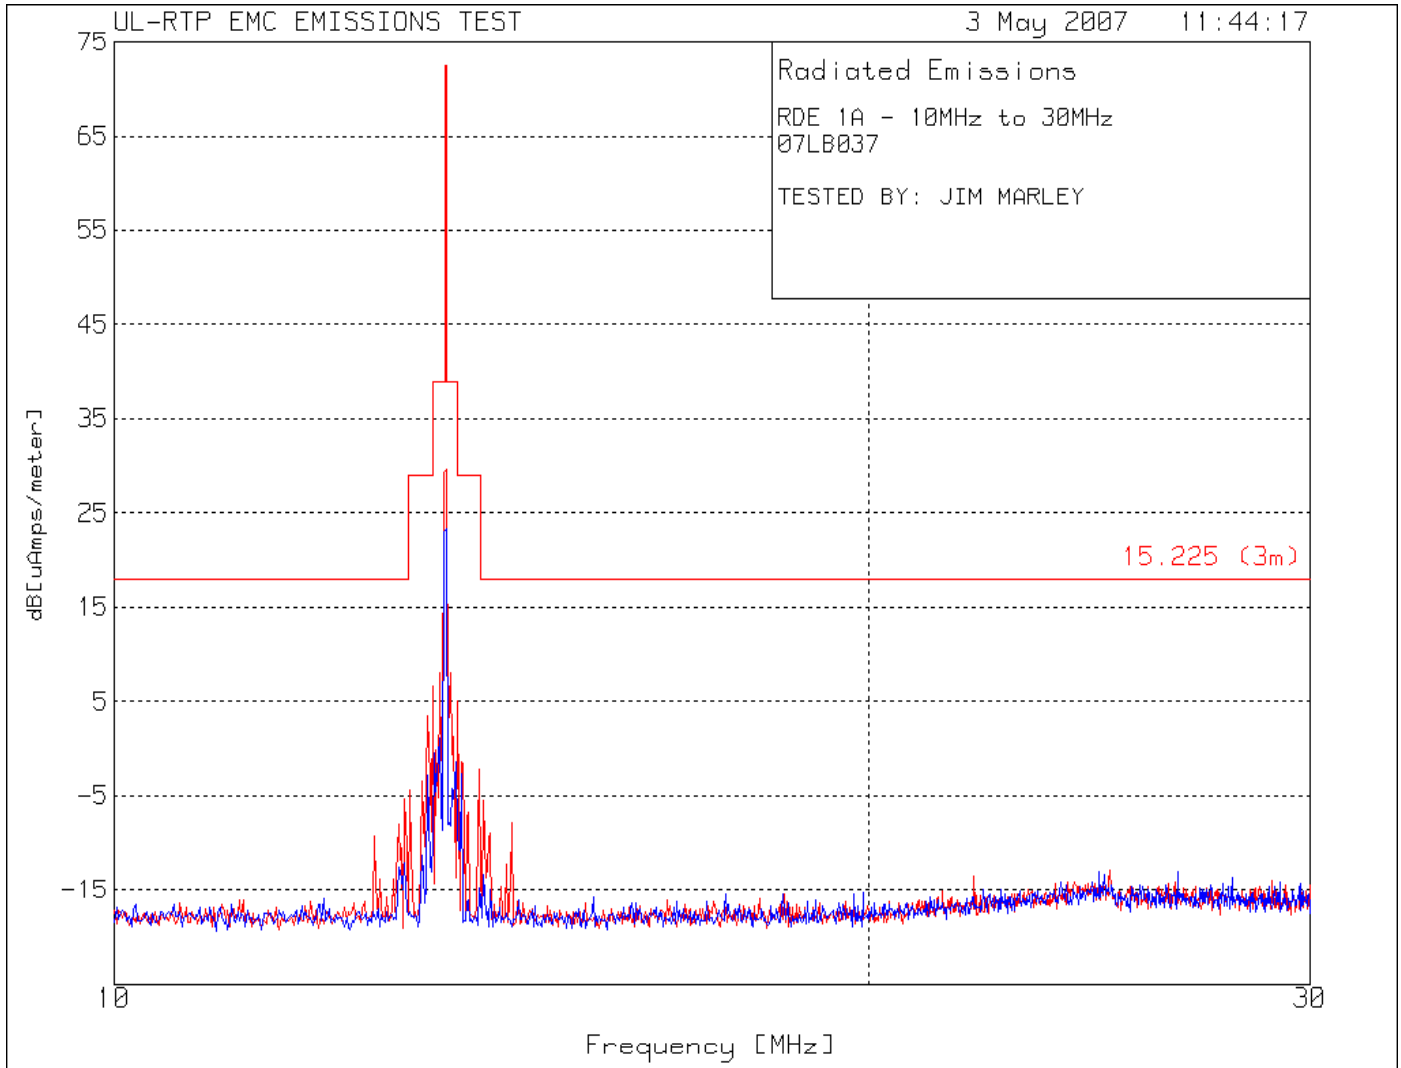


Test 1, Item A - Peak Plot:

Radiated Power and Spurious Emissions - 13.56 MHz Devices (Detail measurement – 13.01 to 14.11 MHz)

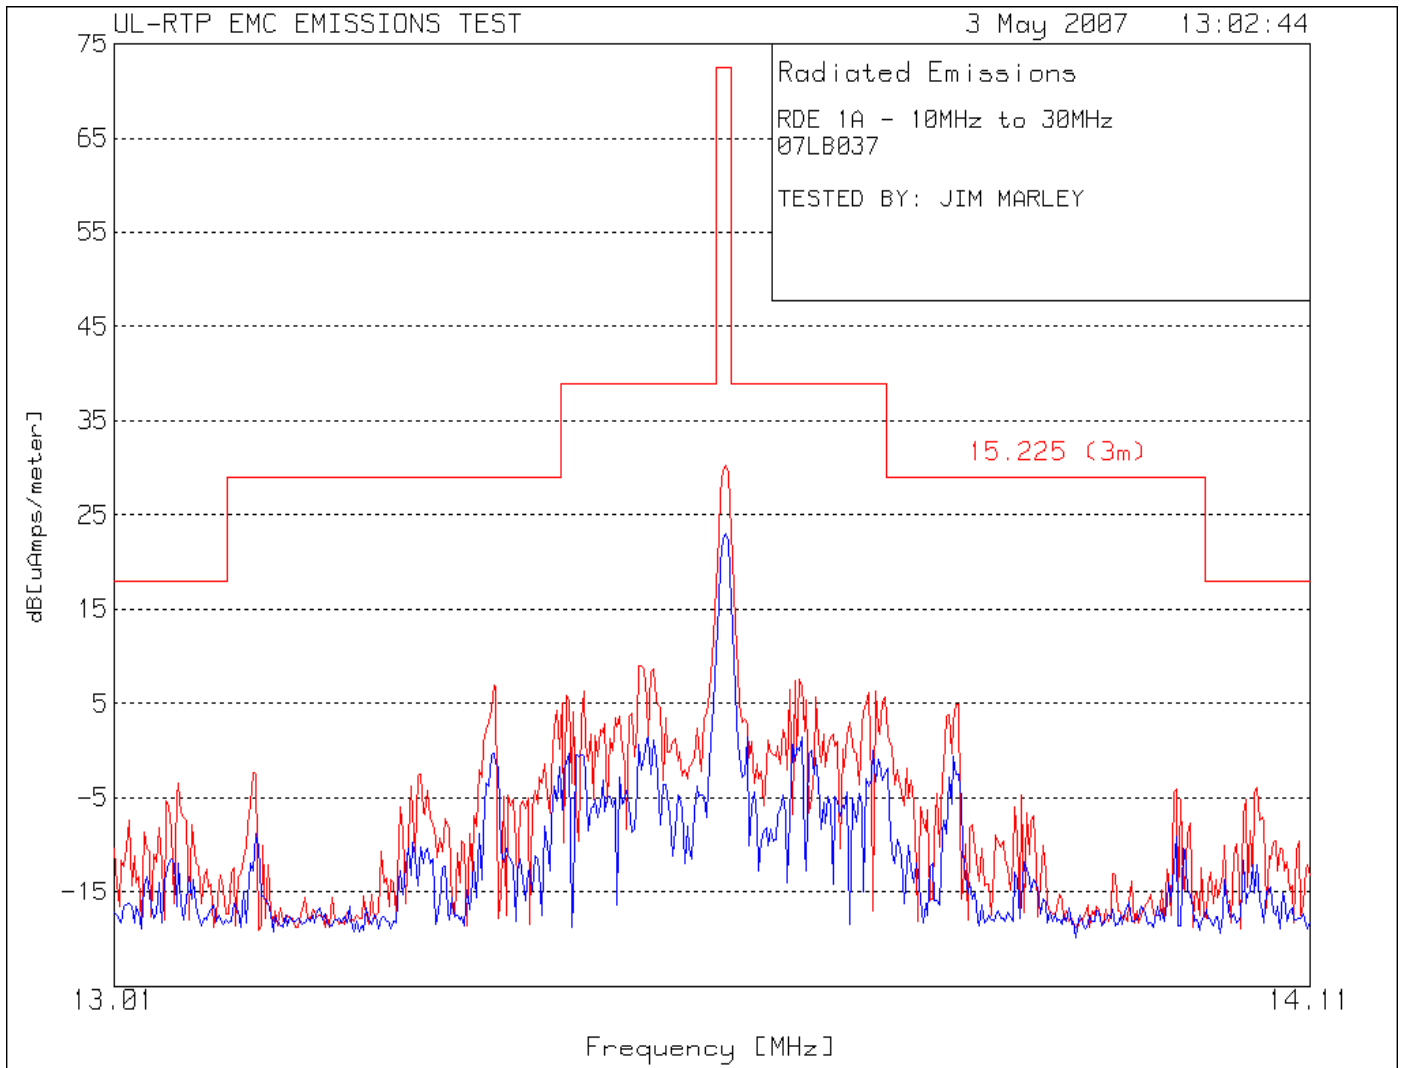

Test 1, Item A - Peak Plot:

Radiated Power and Spurious Emissions - 13.56 MHz Devices (Zoom Detail measurement – 13.55 to 13.57 MHz)

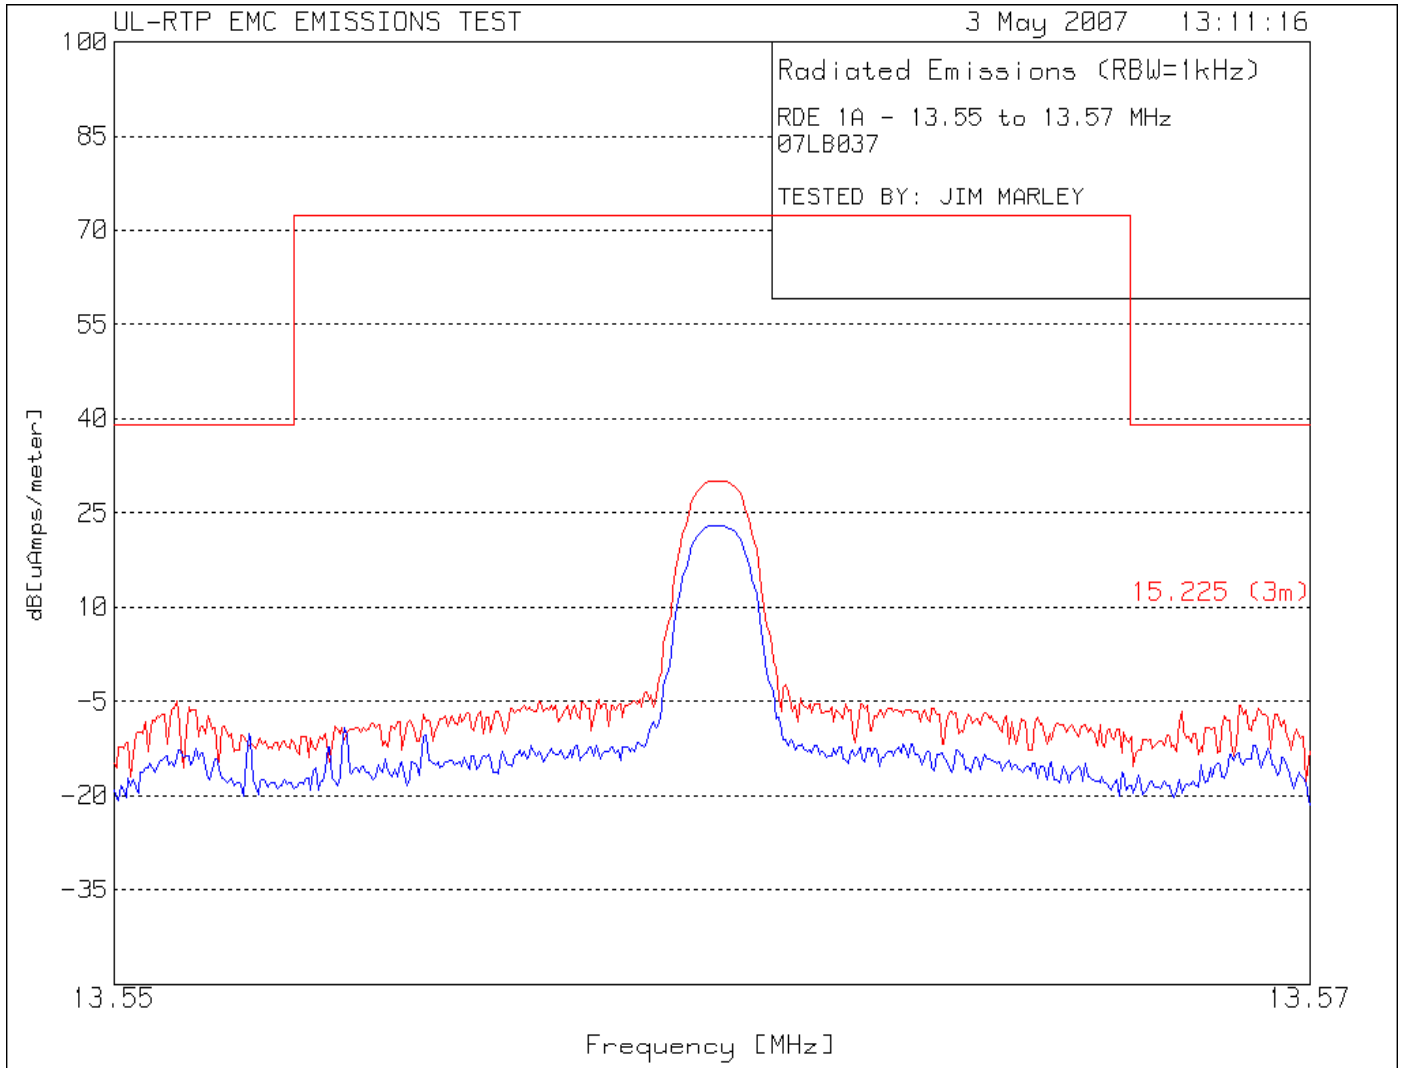

Test 1, Item A – Emissions Table: Radiated Power and Spurious Emissions - 13.56 MHz Devices

Test Item (A-Z)	Detector Type* (P/Q/A)	Antenna Azimuth (0°/90°)	Antenna Distance (m)	Measured Frequency (MHz)	Measured Value (dBuV)	Equip Correction (dBA/Vm)	Corrected Magnetic Field @3m (dBuA/m)	Magnetic to Electric Field (377 O)	Distance Correction (3m to 30m)	Corrected E-Field @30m (dBuV/m)	Specified Limit** (dBuV/m)	Spec Margin (dB)	See Comment (#)***
Radiated Power and Spurious below 30 MHz (13 to 30 MHz)													
A	P	0/90	3	13.0673	10.74	-14.2	-3.5	51.5	-40.0	8.0	29.5	-21.5	
A	P	0/90	3	13.1335	11.86	-14.2	-2.3	51.5	-40.0	9.2	40.5	-31.3	
A	P	0/90	3	13.3495	21.12	-14.2	6.9	51.5	-40.0	18.4	40.5	-22.1	
A	P	0/90	3	13.4817	23.22	-14.2	9.0	51.5	-40.0	20.5	50.5	-30.0	
A	P	0/90	3	13.5611	44.39	-14.2	30.2	51.5	-40.0	41.7	84.0	-42.3	1
A	P	0/90	3	13.6294	21.75	-14.2	7.6	51.5	-40.0	19.1	50.5	-31.5	
A	P	0/90	3	13.7088	19.93	-14.2	5.7	51.5	-40.0	17.2	50.5	-33.3	
A	P	0/90	3	13.7749	19.18	-14.3	4.9	51.5	-40.0	16.4	40.5	-24.1	
A	P	0/90	3	14.0593	10.36	-14.3	-3.9	51.5	-40.0	7.6	29.5	-21.9	
Radiated Power (Detail - 13.11 to 14.01MHz)													
A	P	0	3	13.5601	43.8	-14.2	29.6	51.5	-40.0	41.1	84.0	-42.9	
A	P	0/90	3	13.4034	20.78	-14.2	6.6	51.5	-40.0	18.1	40.5	-22.4	
A	P	0/90	3	13.7037	19.2	-14.2	5.0	51.5	-40.0	16.5	50.5	-34.0	
A	P	0/90	3	13.3433	17.67	-14.2	3.5	51.5	-40.0	15.0	40.5	-25.5	
A	P	0/90	3	13.9840	12.08	-14.3	-2.2	51.5	-40.0	9.3	40.5	-31.2	
A	P	0/90	3	13.1231	9.86	-14.2	-4.3	51.5	-40.0	7.2	40.5	-33.3	
A	P	0/90	3	13.0631	8.87	-14.2	-5.3	51.5	-40.0	6.2	29.5	-23.4	
A	P	0/90	3	14.4044	6.4	-14.3	-7.9	51.5	-40.0	3.6	29.5	-25.9	
A	P	0/90	3	12.7027	4.9	-14.2	-9.3	51.5	-40.0	2.2	29.5	-27.4	
A	P	90	3	13.5601	37.5	-14.2	23.3	51.5	-40.0	34.8	84.0	-49.2	
Radiated Power (Zoom detail 13.55 to 13.75 MHz) – RBW = 1 kHz													
A	P	0/90	3	13.5510	9.4	-14.2	-4.9	51.5	-40.0	6.7	50.5	-43.9	
A	P	0/90	3	13.5601	44.3	-14.2	30.1	51.5	-40.0	41.6	84.0	-42.4	
A	P	0/90	3	13.5688	8.5	-14.2	-5.7	51.5	-40.0	5.8	50.5	-44.7	

* P = Peak, Q = Quasi-Peak, A = Average.

** The Specified Limit is for the type measurement indicated. When Peak data is indicated, the tightest limit applicable is indicated.

*** # = See Comment below.

Sample Calculation:

Electric Field Strength @ 30m = Receiver measurement + Loop Antenna Factor + cable loss + 51.5 dBV/A (magnetic to electric field conversion) – 40 dB (3m to 30m distance adjustment).

Comment #	Description
1	<p><u>Highest emission (transmit frequency) – magnetic field strength</u> 30.2 dBuA/m @ 3 meter distance, or 32.4 uA/m @ 3 meter distance Equivalent isotropic radiated power = 44.8 uW. See following page.</p> <p><u>Highest emissions (transmit frequency) – equivalent electric field strength and 30-m distance</u> 41.7 dBuV/m @ 30 meter distance, or 121.6 uV/m @ 30 meter distance</p>

Equivalent Isotropic Radiated Power Calculation:

$$\text{EIRP} = 0.3 * (\text{Electric Field Strength at 3m in V/m})^2$$


Substituting Measured Magnetic Field Strength (32.4×10^{-6} A/m) * Impedance of Free Space (377 ohms) for electric field:

$$\text{EIRP} = 0.3 * (.012215 \text{ V/m})^2$$

$$\text{EIRP} = 44.8 \text{ uW}$$

Test 1, Item A (radiated spurious through 10th harmonic - 3m) - Peak Plot:

Radiated Spurious Emissions - 30 to 140 MHz Electric Field

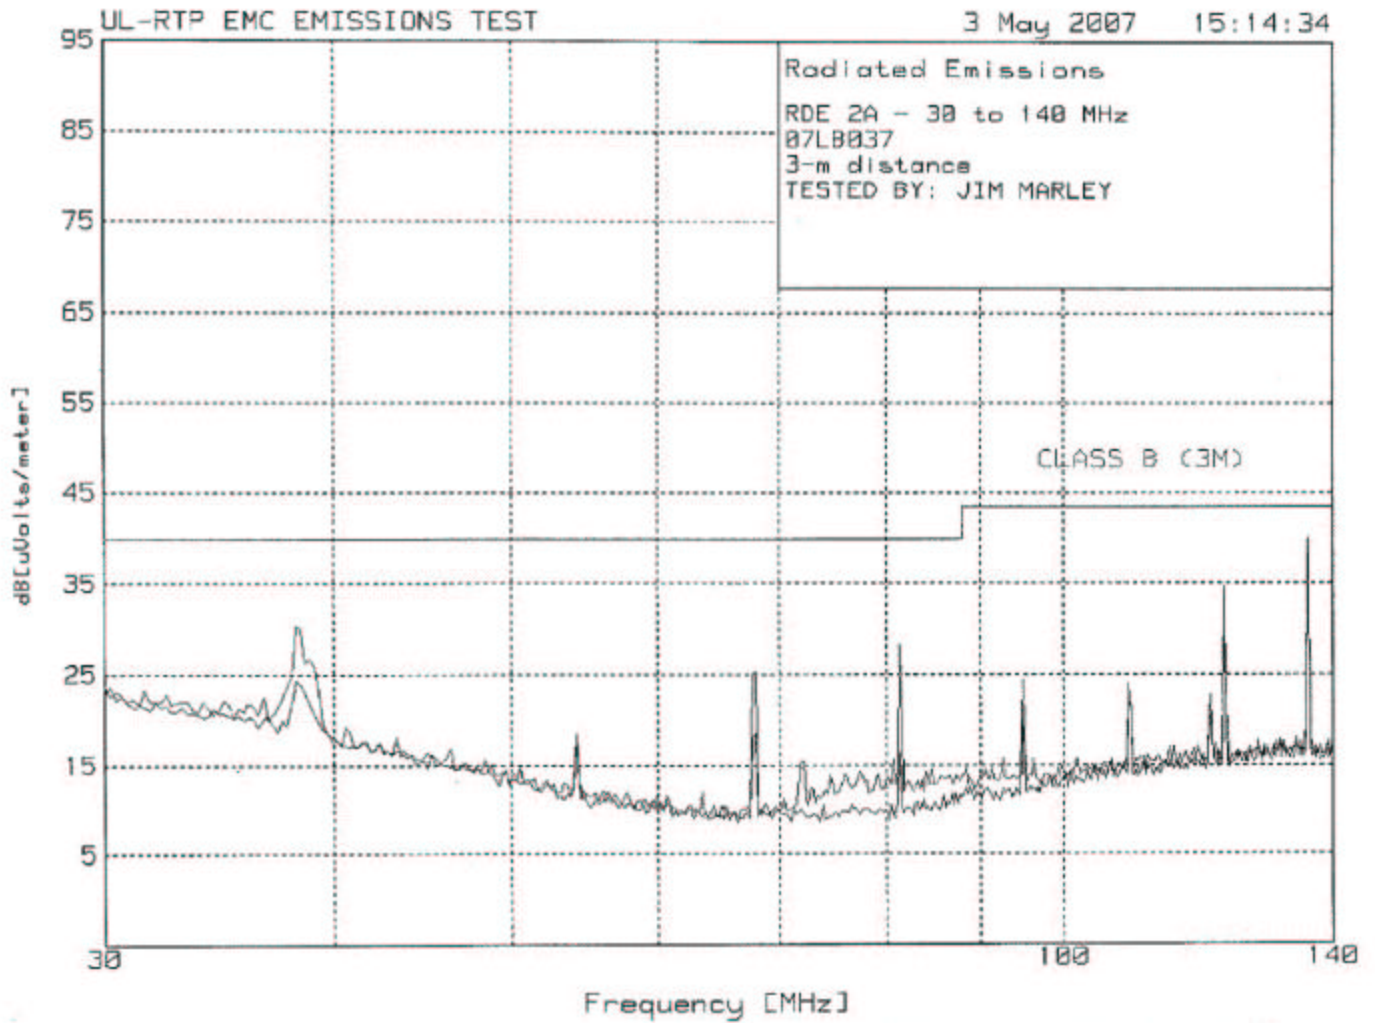

Test 1, Item A – Emissions Table: Radiated Spurious Emissions - 30 to 140 MHz Electric Field

Test Item (A-Z)	Detector Type* (P/Q/A)	Antenna Polarity (H/V)	Antenna Distance (m)	Measured Frequency (MHz)	Measured Value (dBuV)	Equip Correction (dB/m)	Corrected Value (dBuV/m)	Specified Limit** (dBuV/m)	Spec Margin (dB)	See Comment (#)***
Radiated Spurious (through 10th harmonic)										
A	P	V	3	38.156	41.5	-11.2	30.3	40.0	-9.7	
A	P	V	3	54.249	36.6	-18.2	18.4	40.0	-21.6	
A	P	V	3	67.820	46.06	-20.7	25.4	40.0	-14.6	
A	P	V	3	81.363	47.92	-19.7	28.2	43.5	-15.3	
A	P	V	3	94.920	41.44	-17.1	24.3	43.5	-19.2	
A	P	V	3	108.477	39.2	-15.2	24.0	43.5	-19.5	
A	P	V	3	122.040	48.4	-13.8	34.6	43.5	-8.9	
A	P	V	3	135.601	53.1	-13.0	40.1	43.5	-3.4	2

* P = Peak, Q = Quasi-Peak, A = Average.

** The Specified Limit is for the type measurement indicated. When Peak data is indicated, the tightest limit applicable is indicated.

*** # = See Comment below.

Sample Calculation: Corrected Value = Measured Value + Equip Correction

Sample Calculation: Equip Correction = Antenna Factor (dB/m) + Cable Loss (dB) - Amplifier Gain (dB, if used)

Comment #	Description
2	<u>Highest spurious emission</u> 135.601 MHz. 40.1 dBuV/m @ 3 meter distance, or 101.2 uV/m @ 3 meter distance.

Test 2: Radiated Emissions (Unintentional) - 30 to 1000 MHz Electric Field

Test Requirement: 47 CFR Part 15, Subpart B
ICES-003 Issue 4

Test Specification: 47 CFR Part 15, Subpart B, Class A
ICES-003 Issue 4, Class A

Test Procedure:

The test was performed in accordance with the Test Requirement and Specification and configured as noted in the Test Setup. The EUT was placed inside the anechoic chamber and connected to the proper power supply source. The EUT was tested per ANSI C63.4:2003 test method placed on a non-conductive 1m x 1.5m table 80 cm above the ground plane. The receiver resolution bandwidth was set to 120 kHz and video bandwidth was set to 1 MHz. A peak measurement was first made by scanning the entire test frequency range and maximizing the EUT emissions by rotating the EUT and raising the antenna height from 1 to 4 meters above the ground reference plane. Then, a measurement was taken for all peak emissions with 6 dB of the applied test limit to verify each were below the limit. In each case, all cables and equipment were adjusted and EUT orientation and antenna height were varied for maximum emissions.

Radiated Disturbance Limits for Class A Equipment
at a measuring distance of 10m.

Frequency Range MHz	Quasi-Peak Limits $\mu\text{V}/\text{m}$	Quasi-Peak Limits $\text{dB}\mu\text{V}/\text{m}$
30 to 88	90	39.08
88 to 216	150	43.52
216 to 960	210	46.44
Above 960	300	49.54

Test Deviations:

None

Test Setup: Only the following ports were tested. See EUT Information for details.

Test Item	Port #	Port Name	EUT Operation Mode	EUT Configuration	Power Interface
A	0	Enclosure	1	1	1

Test 2 - Results: Radiated Emissions (Unintentional) - 30 to 1000 MHz Electric Field

Test Results Summary:

Test Item	Test Location	Humidity (%)	Temperature (°C)	Pressure (kPa)	Pass/Fail (P/F)	Date Completed	Comment #
A	D	43	22	101	P	5/3/07	

The EUT was considered to **Pass** the Requirements.

Comments:

Comment #	Description


Test Equipment Used:

Equipment ID	Description	Manufacturer	Model Number	Last Cal.	Next Cal.
AT0021	Biconical Antenna, 20 to 300 MHz	Chase	VBA6106A	9/22/06	9/30/07
AT0022	Log Periodic Antenna, 200 to 1000 MHz	Chase	UPA6109	9/22/06	9/31/07
ATA084	Attenuator 6 dB, 2 GHz	Pasternack	PE7002-6	3/1/07	3/31/08
ATA085	Attenuator 6 dB, 2 GHz	Pasternack	PE7002-6	3/1/07	3/31/08
ATA108	10 m, N male - N male	UL	RG214	3/1/07	3/31/08
ATA124	RF Amplifier, 1 to 1000 MHz	Miteq	AM-3A-000110-N	3/1/07	3/31/08
ATA125	RF Amplifier, 1 to 1000 MHz	Miteq	AM-3A-000110-N	3/1/07	3/31/08
ATA165	RG 214, Ferrite Cable	EMC Eupen	N/A	3/1/07	3/31/08
ATA198	6-ft. flexible microwave cable	Micro-Coax	UFB293C-0-0720-5GU50U	3/1/07	3/31/08
ATA199	6-ft. flexible microwave cable	Micro-Coax	UFB293C-0-0720-5GU50U	3/1/07	3/31/08
SAR001	Spectrum Analyzer / Receiver	Hewlett-Packard	8572A	3/23/07	3/31/08

The above equipment has been calibrated and is within the manufacturer's published limit of error. Calibration is traceable to the National Institute of Standards & Technology(NIST) and conforms to ISO 17025:2005.

Test 2, Item B (10m distance) - Peak Plot:

Radiated Emissions (unintentional) - 30 to 1000 MHz Electric Field

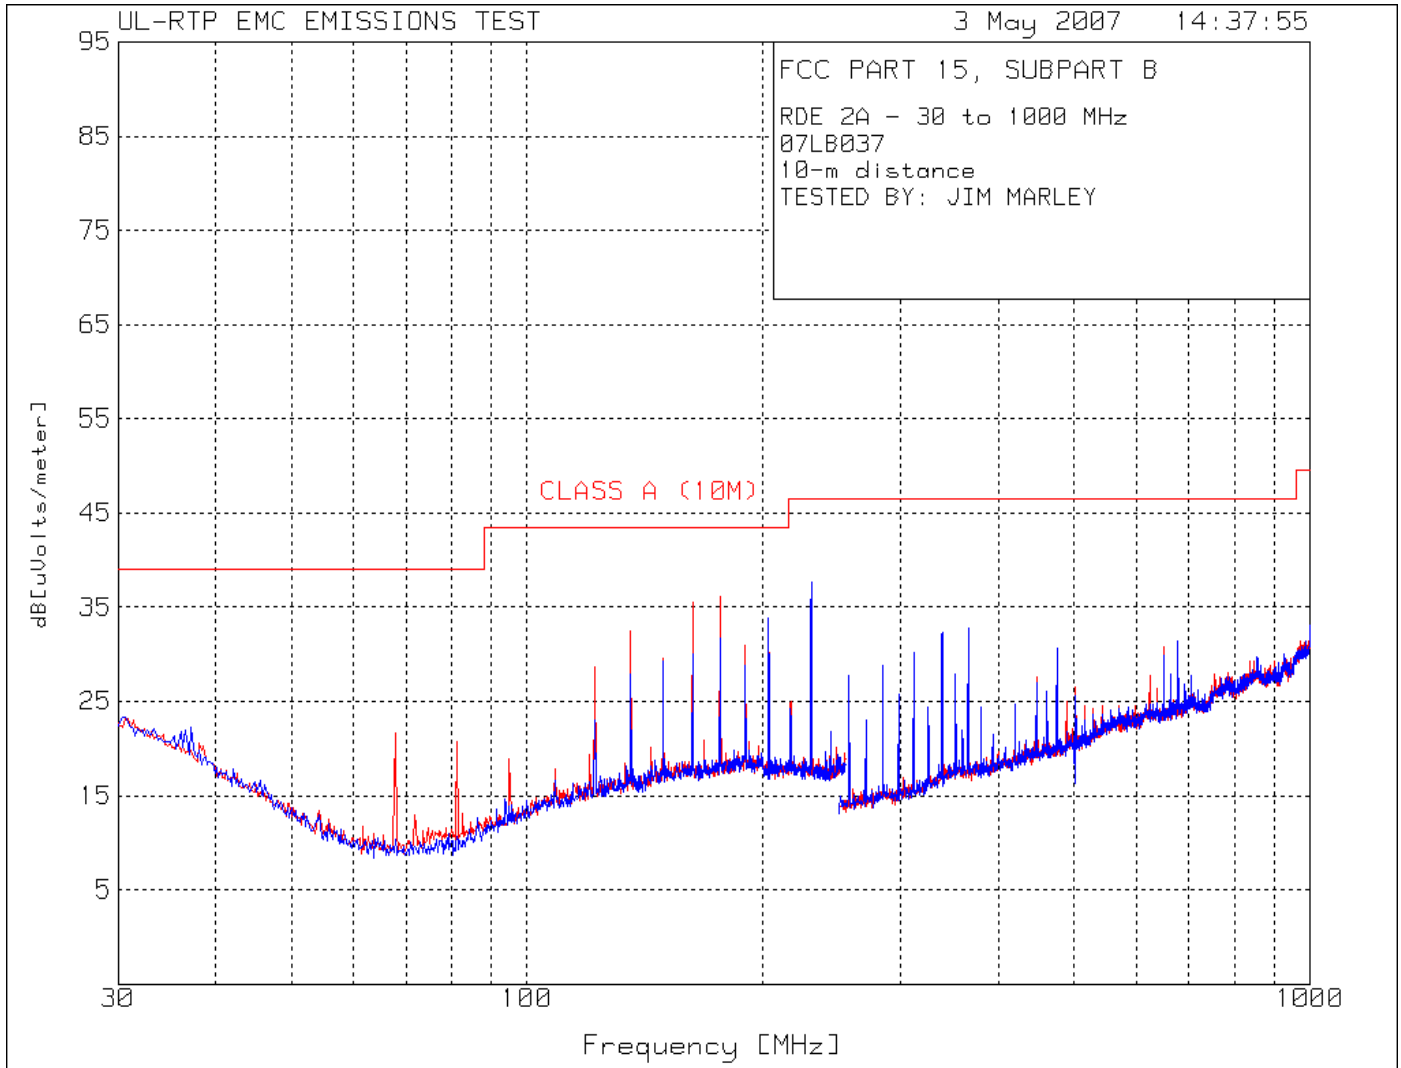

Test 2, Item A – Frequency Table: Radiated Emissions (unintentional) - 30 to 1000 MHz Electric Field

Test Item (A-Z)	Detector Type* (P/Q/A)	Antenna Polarity (H/V)	Antenna Distance (m)	Measured Frequency (MHz)	Measured Value (dBuV)	Equip Correction (dB/m)	Corrected Value (dBuV/m)	Specified Limit** (dBuV/m)	Spec Margin (dB)	See Comment (#)***
Unintentional (Class A - 10-m distance)										
A	P	V	10	162.658	47.5	-12.0	35.5	43.5	-8.0	
A	P	V	10	176.396	47.8	-11.7	36.1	43.5	-7.4	
A	P	V	10	135.631	45.4	-13.0	32.4	43.5	-11.1	
A	P	V	10	189.910	42.4	-11.5	30.9	43.5	-12.6	
A	P	H	10	203.423	45.1	-11.3	33.8	43.5	-9.7	
A	P	H	10	230.676	48.8	-11.1	37.7	46.4	-8.7	

* P = Peak, Q = Quasi-Peak, A = Average.

** The Specified Limit is for the type measurement indicated. When Peak data is indicated, the tightest limit applicable is indicated.

*** # = See Comment Number Under This Test's Comments Section.

Sample Calculation: Corrected Value = Measured Value + Equip Correction

Sample Calculation: Equip Correction = Antenna Factor (dB/m) + Cable Loss (dB) - Amplifier Gain (dB, if used)

Test 2, Item A - Test Set-Up Photo:


Radiated Disturbance Emissions - 30 to 1000 MHz Electric Field



RFID Reader (EUT) in center with power/data connection board on left, antenna on right. From preliminary testing it was determined that the reader was worst in the upright position as shown.

Test 2, Item A - Test Set-Up Photo:

Radiated Disturbance Emissions - 30 to 1000 MHz Electric Field

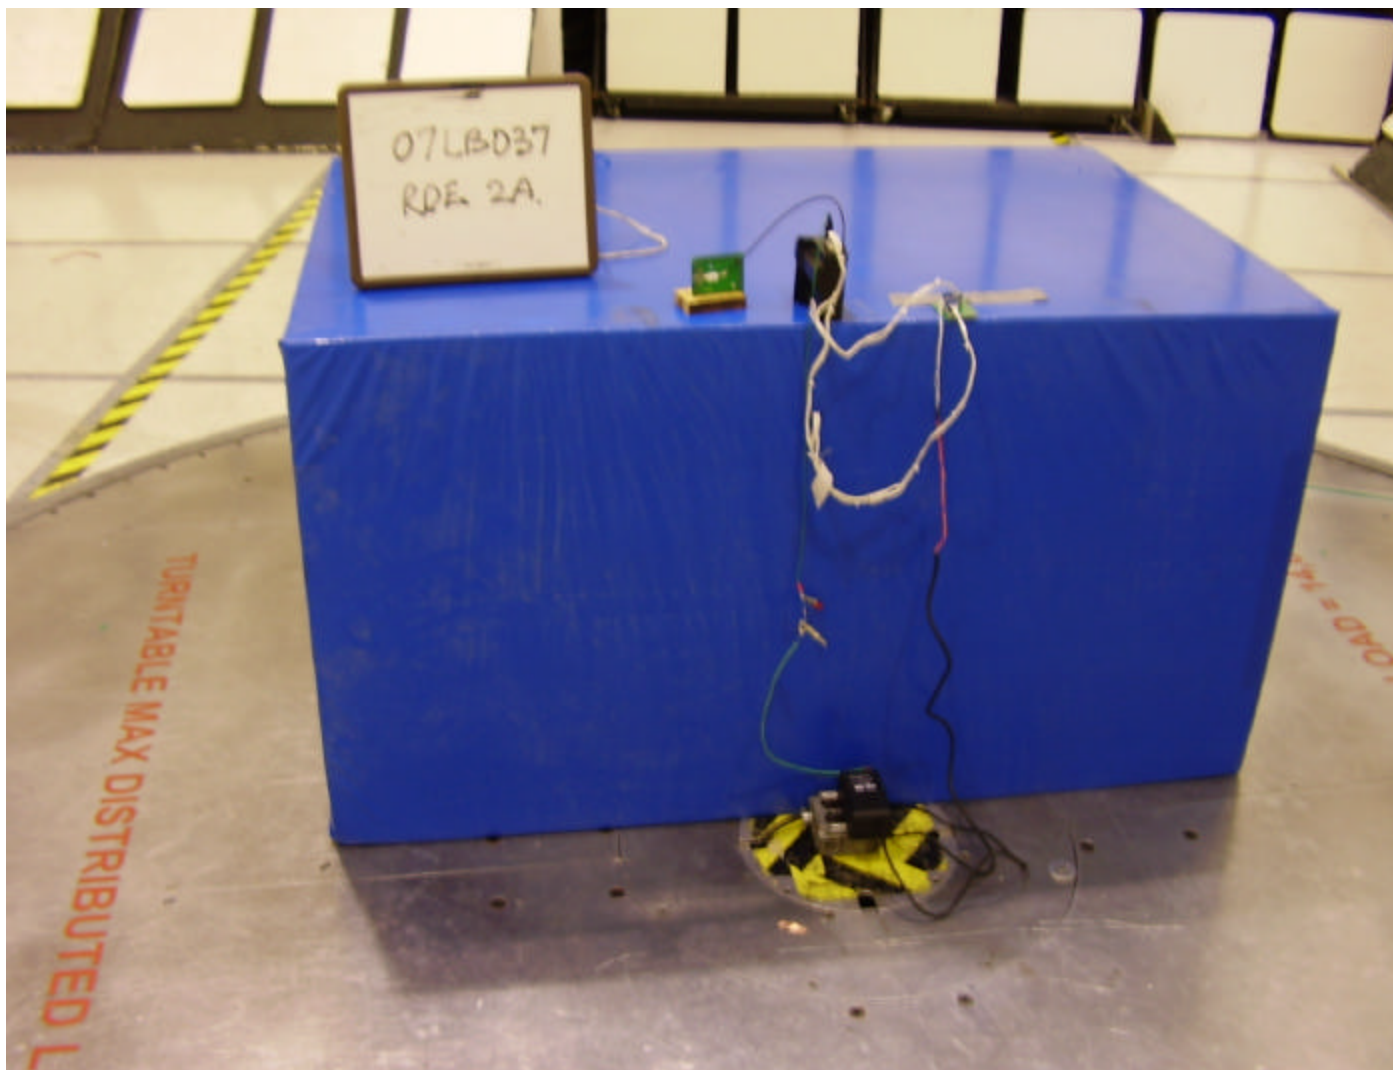

Test 3: Conducted Emissions - Voltage

Test Requirement: 47 CFR Part 15, Subparts B and C
 RSS-GEN Issue 1 and ICES-003 Issue 4

Test Specification: 47 CFR Part 15, Subpart B, Class A, and Subpart C, Section 15.207
 RSS-GEN Issue 1 Section 7.2.2 and ICES-003, Issue 4 Class A

Test Procedure:

The test was performed in accordance with the Test Requirement and Specification and configured as noted in the Test Setup. The EUT was connected to the proper supply source via a Line Impedance Stabilization Network (LISN). The Measuring Receiver was connected to the Port under test via the LISN. The receiver resolution bandwidth is set to 9 kHz and video bandwidth is set to 100 kHz.

A peak measurement was first made at the test point across the test frequency range over a one-minute test period. Then, Quasi-Peak or Average measurements were taken and recorded under Discrete Data. This was repeated for each conductor of the test port except for equipment grounding.

Conducted Emission Limits (Unintentional Radiator) for
 Mains Terminals of Class A Equipment

Frequency (MHz)	Quasi-Peak Limit dB μ V	Average Limit dB μ V
0.15 to 0.50	79	66
0.50 to 5	73	60
5 to 30	73	60

Conducted Emission Limits (Intentional Radiator) for
 Mains Terminals – General Limits

Frequency MHz	Quasi-Peak Limit dB μ V	Average Limit dB μ V
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

* Limit decreases linearly with the logarithm of the frequency

Test Deviations:

None

Test Setup: Only the following ports were tested. See EUT Information for details.

Test Item	Port #	Port Name	EUT Operation Mode	EUT Configuration	Power Interface
A	1	AC Mains	1	2 (matched load)	1
B	1	AC Mains	1	3 (antenna)	1

Test 3 - Results: Conducted Emissions - Voltage

Test Results Summary:

Test Item	Test Location	Humidity (%)	Temperature (°C)	Pressure (kPa)	Pass/Fail (P/F)	Date Completed	Comment #
A	A	45	21	101	P	5/3/07	1, 2
B	A	45	21	101	P	5/3/07	3

The EUT was considered to **Pass** the Requirements.

Comments:

Comment #	Description
1	Compliance measurements are performed with matched-impedance resistive load in place of antenna.
2	It was required to add one 120-ohm resistor in series with "ESD" earth connection to comply. Larger values were found to provide additional margin to limit.
3	<u>For Reference Only:</u> With antenna in place it is shown that the radiated spurious emission at 13.56 MHz couples to power cord. These are disregarded for purposes of measuring conducted spurious emissions.


Test Equipment Used:

Equipment ID	Description	Manufacturer	Model Number	Last Cal.	Next Cal.
ATA001	Transient Limiter, 0.009 to 100 MHz	Electro-Metrics	EM-7600	3/1/07	3/31/08
ATA013	20 ft Cable, BNC - BNC	UL	RG-223	3/1/07	3/31/08
ATA014	20 ft Cable, BNC - BNC	UL	RG-223	3/1/07	3/31/08
ATA066	LISN, 150 kHz to 30 MHz	Solar Electronics	9629-50-TS-25-BNC	3/1/07	3/31/08
ATA067	LISN, 150 kHz to 30 MHz	Solar Electronics	9629-50-TS-25-BNC	3/1/07	3/31/08
SAR001	Spectrum Analyzer / Receiver	Hewlett-Packard	8572A	3/23/07	3/31/08

The above equipment has been calibrated and is within the manufacturer's published limit of error. Calibration is traceable to the National Institute of Standards & Technology(NIST) and conforms to ISO 17025:2005.


Test 3, Item A (with matched load) - Peak Plot - Line Conductor:

Conducted Emissions - Voltage

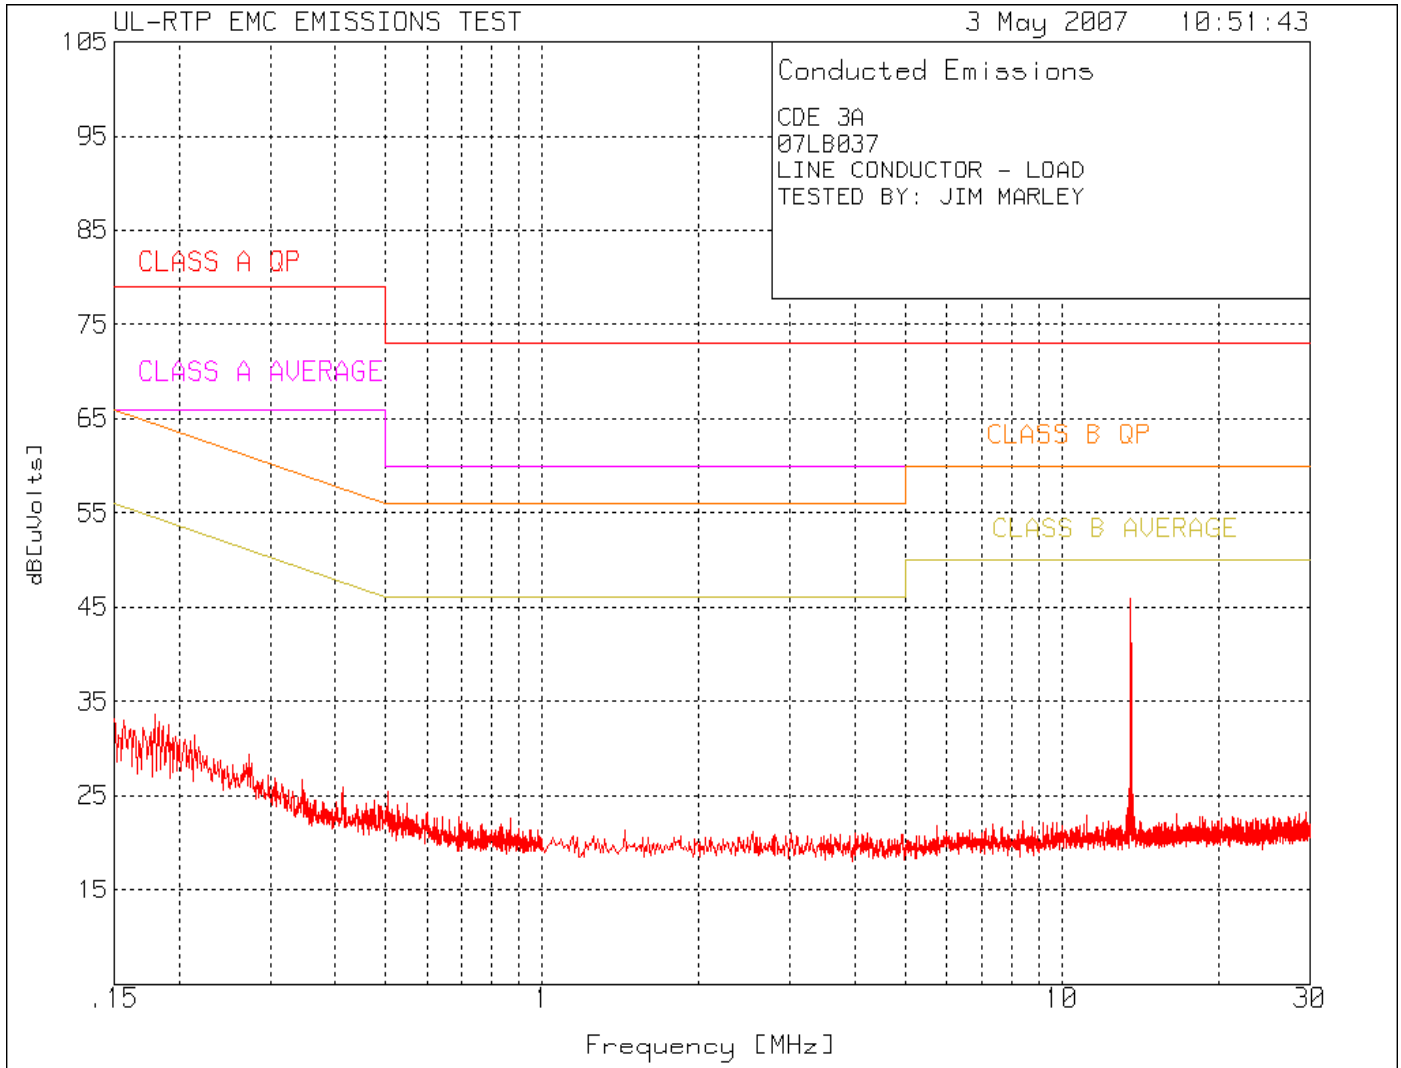

Test 3, Item A (with matched load) - Peak Plot - Neutral Conductor:

Conducted Emissions - Voltage

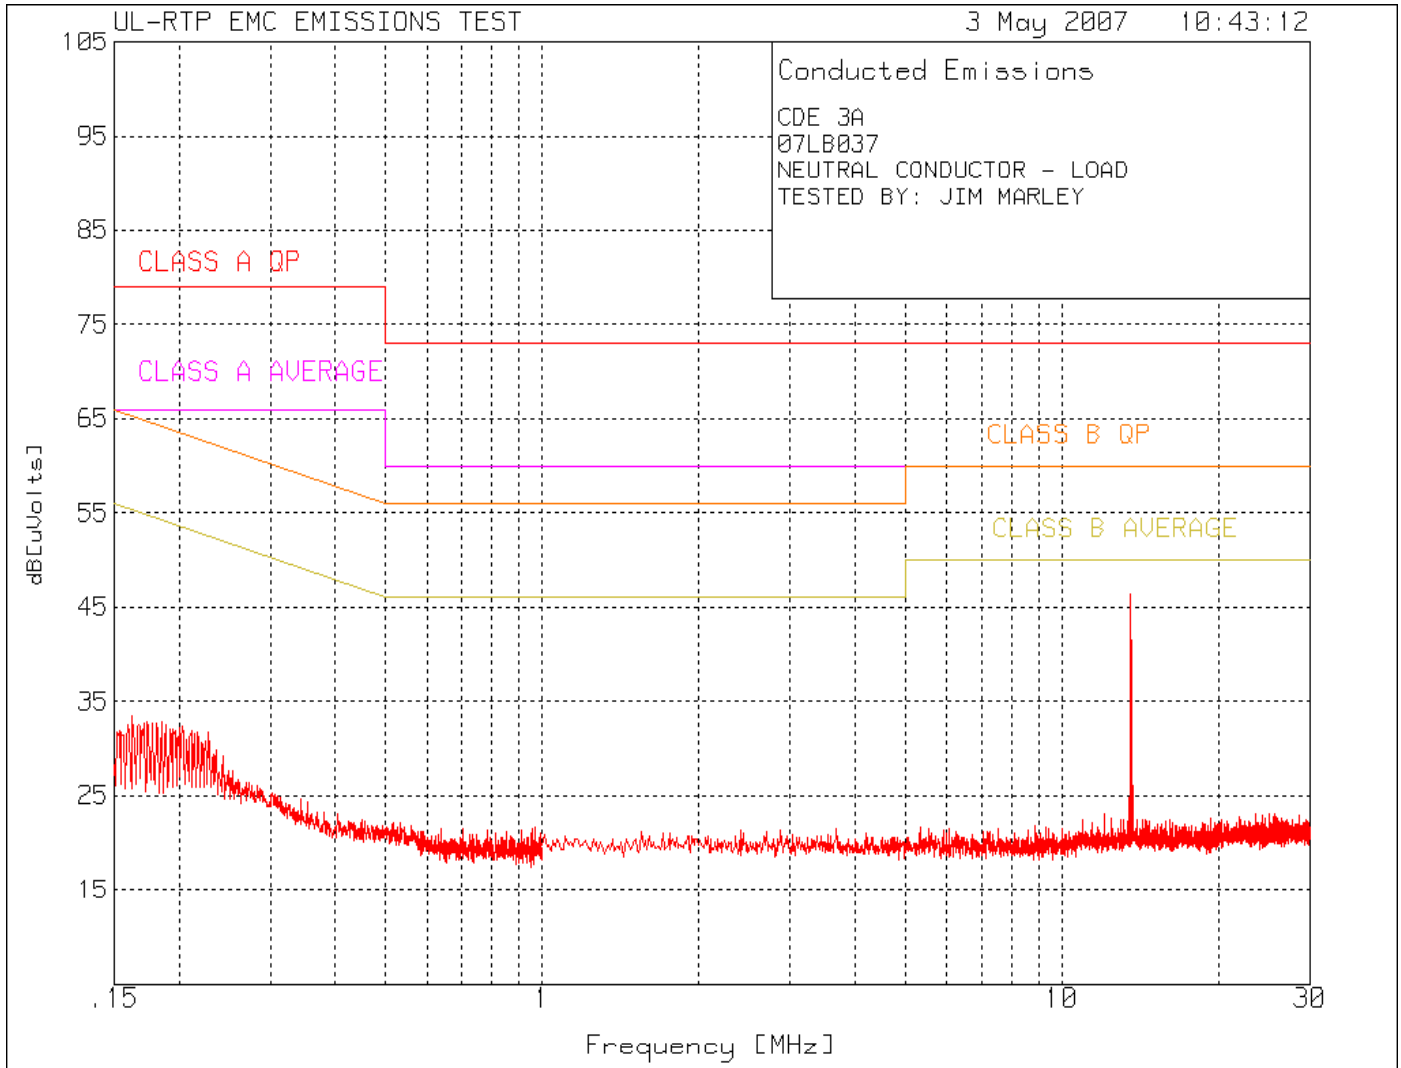

Test 3, Item A (with matched load) – Frequency Table: Conducted Emissions – Voltage

Test Item (A-Z)	Detector Type (P/Q/A)	Measured Conductor (Name)	Measured Frequency (MHz)	Measured Value (dBuV)	Equip Correction (dB)	Corrected Value (dBuV)	Specified Limit (dBuV)	Spec Margin (dB)	See Comment (#)***
Matched Load									
A	P	Line	0.1568	23.0	10.1	33.1	66.0	-33.0	
A	P	Line	0.1798	23.6	10.1	33.7	66.0	-32.4	
A	P	Line	0.1832	22.8	10.1	32.9	66.0	-33.1	
A	P	Line	0.1908	22.4	10.1	32.5	66.0	-33.6	
A	P	Line	13.5600	35.1	10.9	46.0	50.0	-4.0	1, 2
A	P	Line	27.1200	11.0	11.2	22.2	50.0	-27.8	
A	P	Neutral	0.1628	23.4	10.1	33.5	66.0	-32.5	
A	P	Neutral	0.1849	22.7	10.1	32.8	66.0	-33.2	
A	P	Neutral	0.2028	22.2	10.1	32.3	66.0	-33.7	
A	P	Neutral	0.2274	21.6	10.1	31.7	66.0	-34.3	
A	P	Neutral	13.5600	35.5	10.9	46.4	50.0	-3.6	1, 2
A	P	Neutral	27.1200	11.2	11.2	22.4	50.0	-27.6	

* P = Peak, Q = Quasi-Peak, A = Average.

** Average Limit is displayed.

*** # = See Comment Number Under This Test's Comments Section.

Sample Calculation: Corrected Value = Measured Value (dBuV) + Equip Correction (dB)


Sample Calculation: Equip Correction = LISN Factor (dB) + Cable Loss (dB) + Transient Limiter Loss (dB)

Comments:

Comment #	Description
1	Compliance measurements are performed with matched-impedance resistive load in place of antenna.
2	It was required to add one 120-ohm series resistor to "ESD" earth connection to comply. Larger values were found to provide additional margin to limit.
3	For convenience, only the General/Class B limits are listed in the table.

Test 3, Item B (with antenna) - Peak Plot - Line Conductor:

Conducted Emissions - Voltage

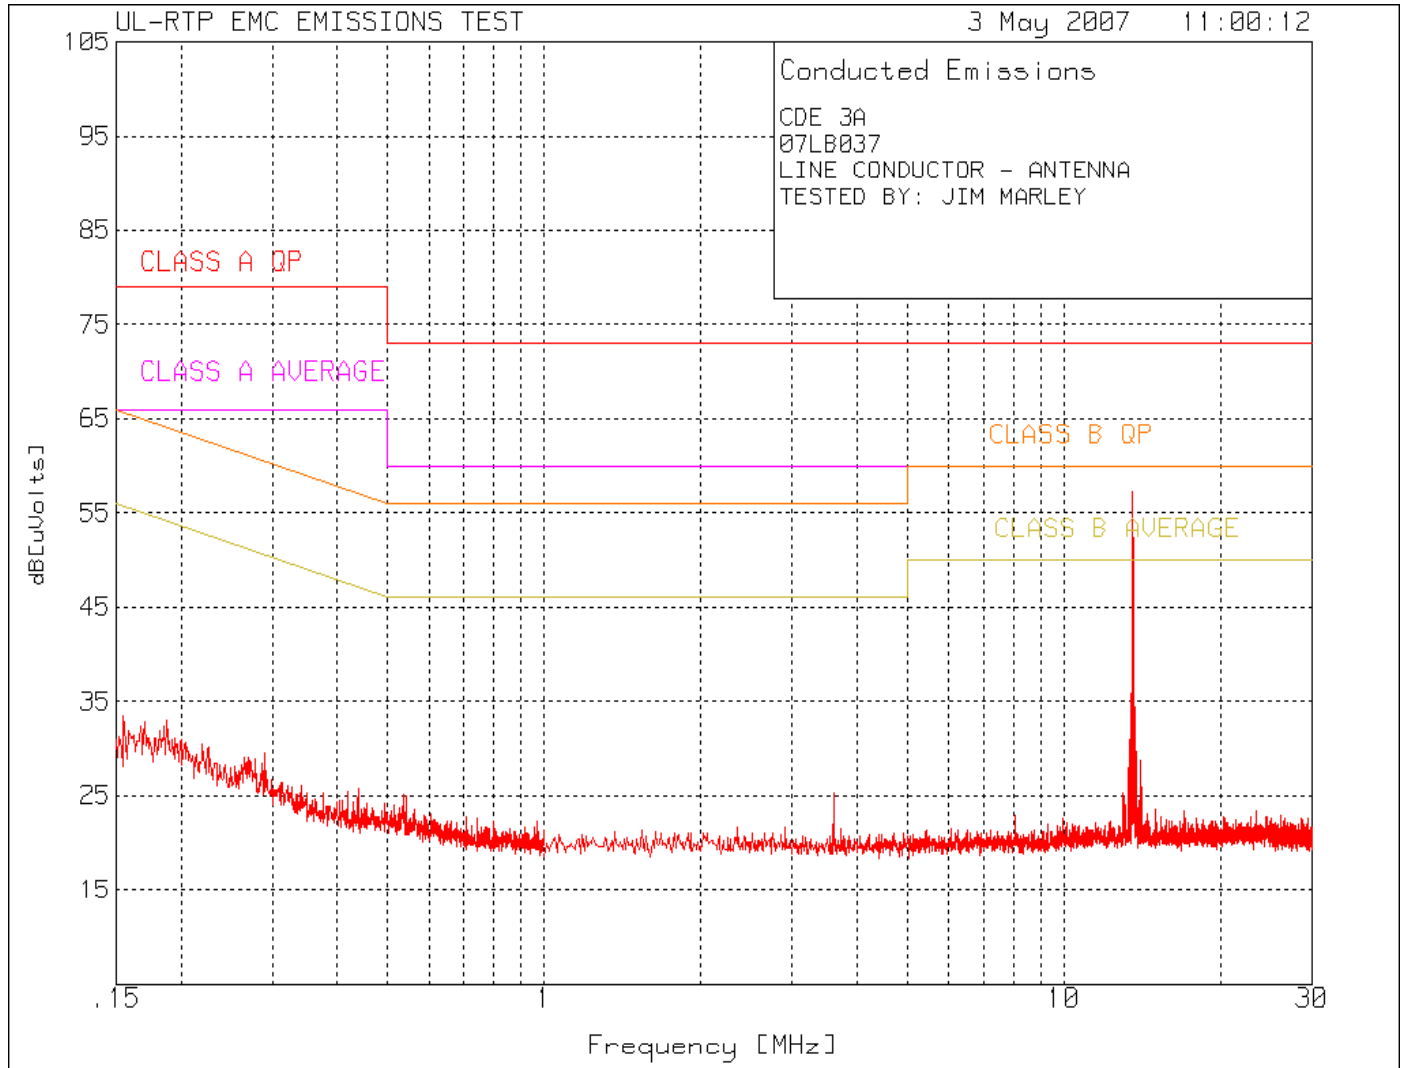


Measurement For Reference Only: With antenna in place it is shown that the intended radiated emission at 13.56 MHz couples through the air from the antenna to power cord. With a matched-load in place this emissions is shown to diminish considerably. The matched-load configuration is used to determine compliance.

Effect on neutral conductor data is similar.

Test 3, Item A (with matched load) - Test Set-Up Photo:

Conducted Emissions - Voltage

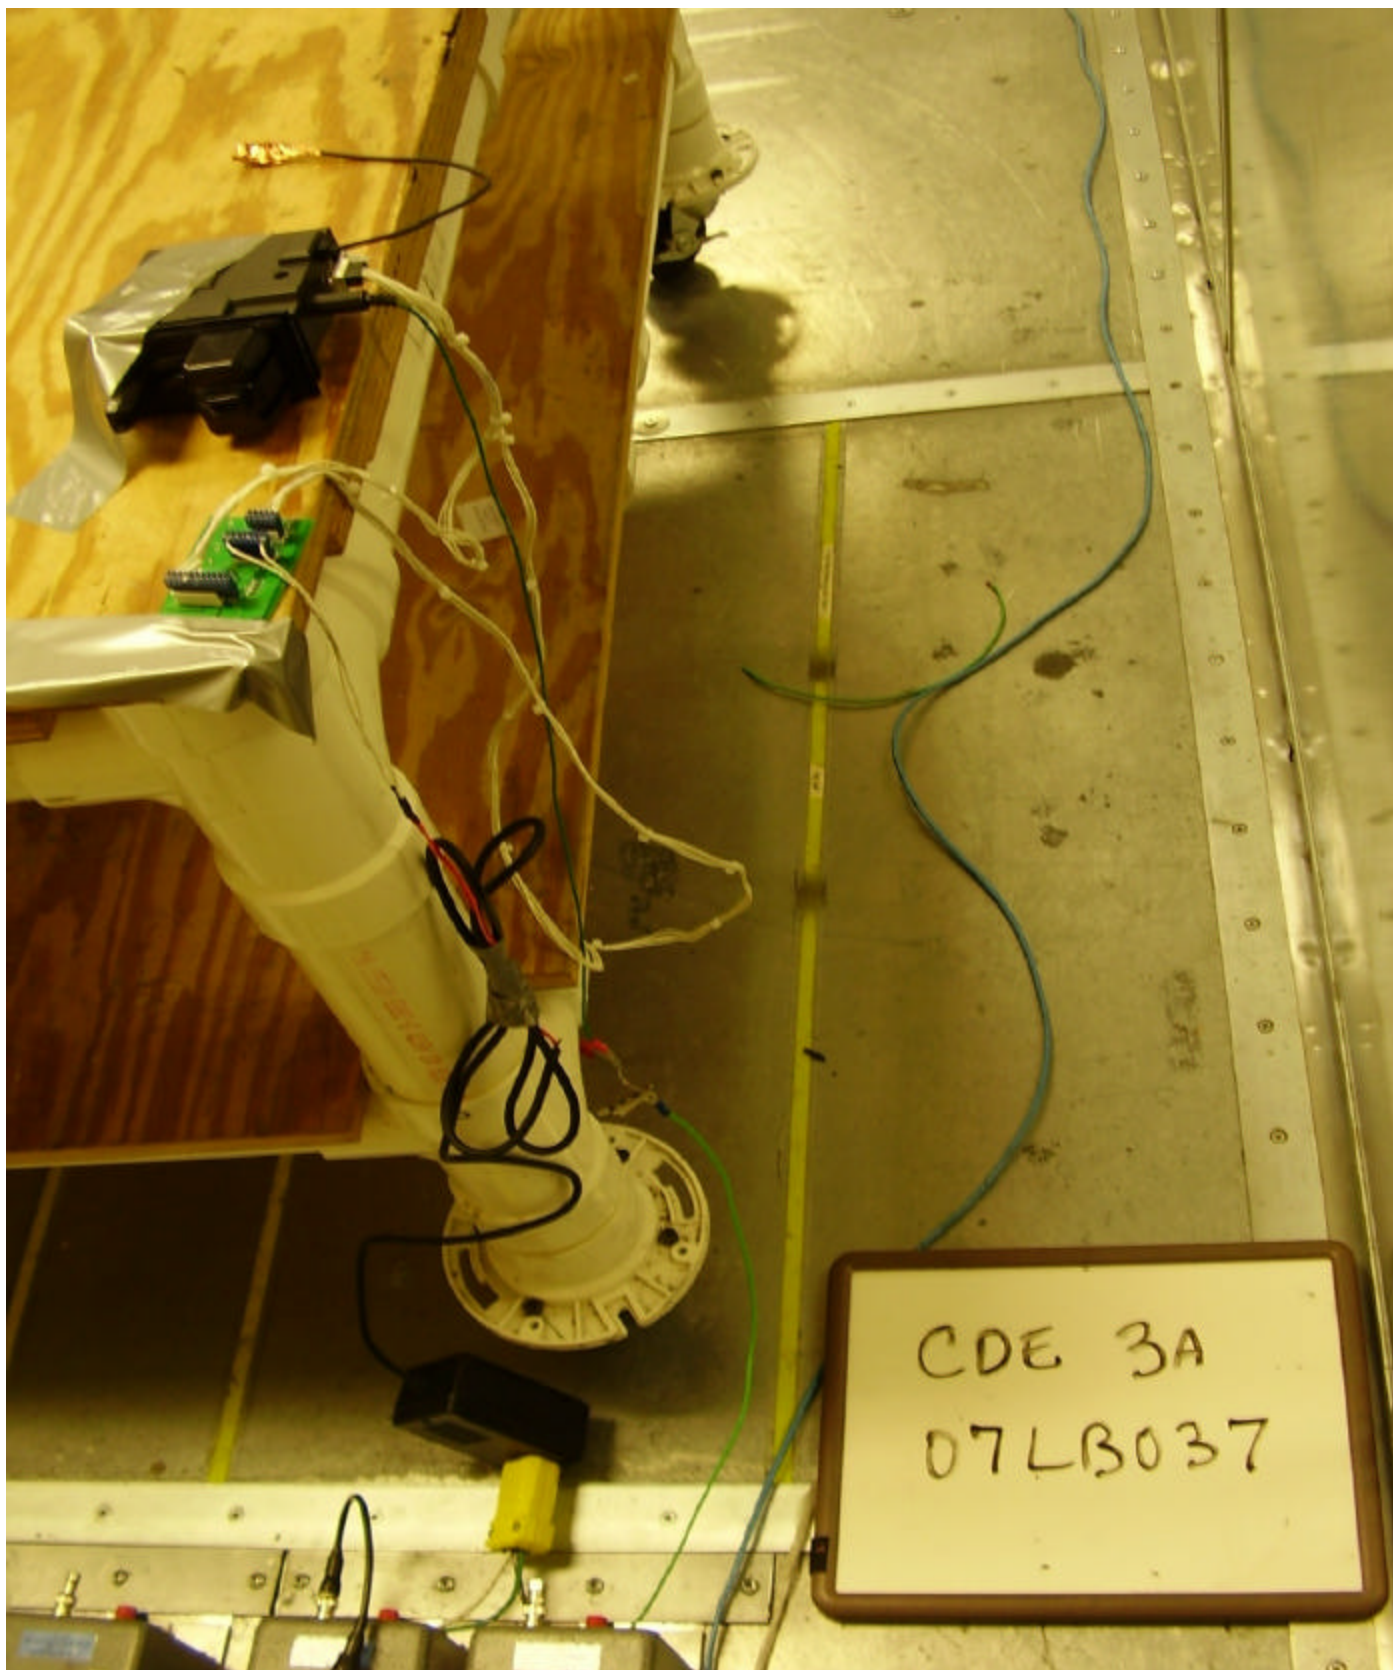

Test 3, Item A (with matched load) - Test Set-Up Photo:

Conducted Disturbance Emissions - Voltage



Test 4: Occupied Bandwidth

Test Requirement: 47 CFR Part 15, Subpart C
RSS-210 Issue 6

Test Specification: 47 CFR Part 15, Subpart C
RSS-210 Issue 6

Test Procedure:

All testing was performed in UL's 10 meter semi-anechoic chamber. The chamber meets the FCC's site attenuation criteria for use as an alternative measurement site. The EUT was tested per ANSI C63.4:2003 test method placed on a non-conductive 1m x 1.5m table 80 cm above the ground plane. The receive antenna used was a loop antenna mounted on a 1m stand. The turntable was rotated from 0° to 360° to determine the worst-case emissions angle for the transmit frequency. The receive antenna was placed approximately 30cm from the EUT to ensure a strong signal is captured for the measurement.

As strongest field strength limit is limited to 14 kHz band (13.553 to 13.567 MHz), Resolution Bandwidth is set to largest value that is less than 1/10th of this bandwidth. Resolution Bandwidth is set to 1 kHz and Video Bandwidth to 5 kHz for the measurement. Spectrum Analyzer reference level is set with the signal at the top of the screen. Left and Right -20 dB points are marked as the band edges.

Occupied Bandwidth Limit – FCC Part 15.225 devices

Transmit Frequency MHz	Bandwidth Limit
13.56	No limit provided bandedges from 15.225 are observed.

Test Deviations:

None

Test Setup: Only the following ports were tested. See EUT Information for details.

Test Item	Port #	Port Name	EUT Operation Mode	EUT Configuration	Power Interface
A	0	Enclosure	1	1	1

Test 4 - Results: Occupied Bandwidth

Test Results Summary:

Test Item	Test Location	Humidity (%)	Temperature (°C)	Pressure (kPa)	Pass/Fail (P/F)	Date Completed	Comment #
A	A	44	22	101	P	5/4/07	1

The EUT was considered to **Pass** the Requirements.

Comments:

Comment #	Description
1	Note for Occupied BW measurement: As emission is dominated by transmitter's CW signal, reported occupied bandwidth will vary depending on Resolution Bandwidth chosen.


Test Equipment Used:

Equipment ID	Description	Manufacturer	Model Number	Last Cal.	Next Cal.
AT0006	Loop Antenna, .01 to 30 MHz	Electro-Metrics	EM-6879	5/16/06	5/31/07
ATA198	6-ft. flexible microwave cable	Micro-Coax	UFB293C-0-0720-5GU50U	3/1/07	3/31/08
ATA199	6-ft. flexible microwave cable	Micro-Coax	UFB293C-0-0720-5GU50U	3/1/07	3/31/08
ATA208	50ft coaxial cable, N-male to N-male, low-loss	Micro-Coax	UFB293C-0-0720-5GU50U	3/1/07	3/31/08
SAR001	Spectrum Analyzer / Receiver	Hewlett-Packard	8572A	3/23/07	3/31/08

The above equipment has been calibrated and is within the manufacturer's published limit of error. Calibration is traceable to the National Institute of Standards & Technology(NIST) and conforms to ISO 17025:2005.

Test 4, Item A (occupied bw, -20dB points) - Peak Plot:

Occupied Bandwidth

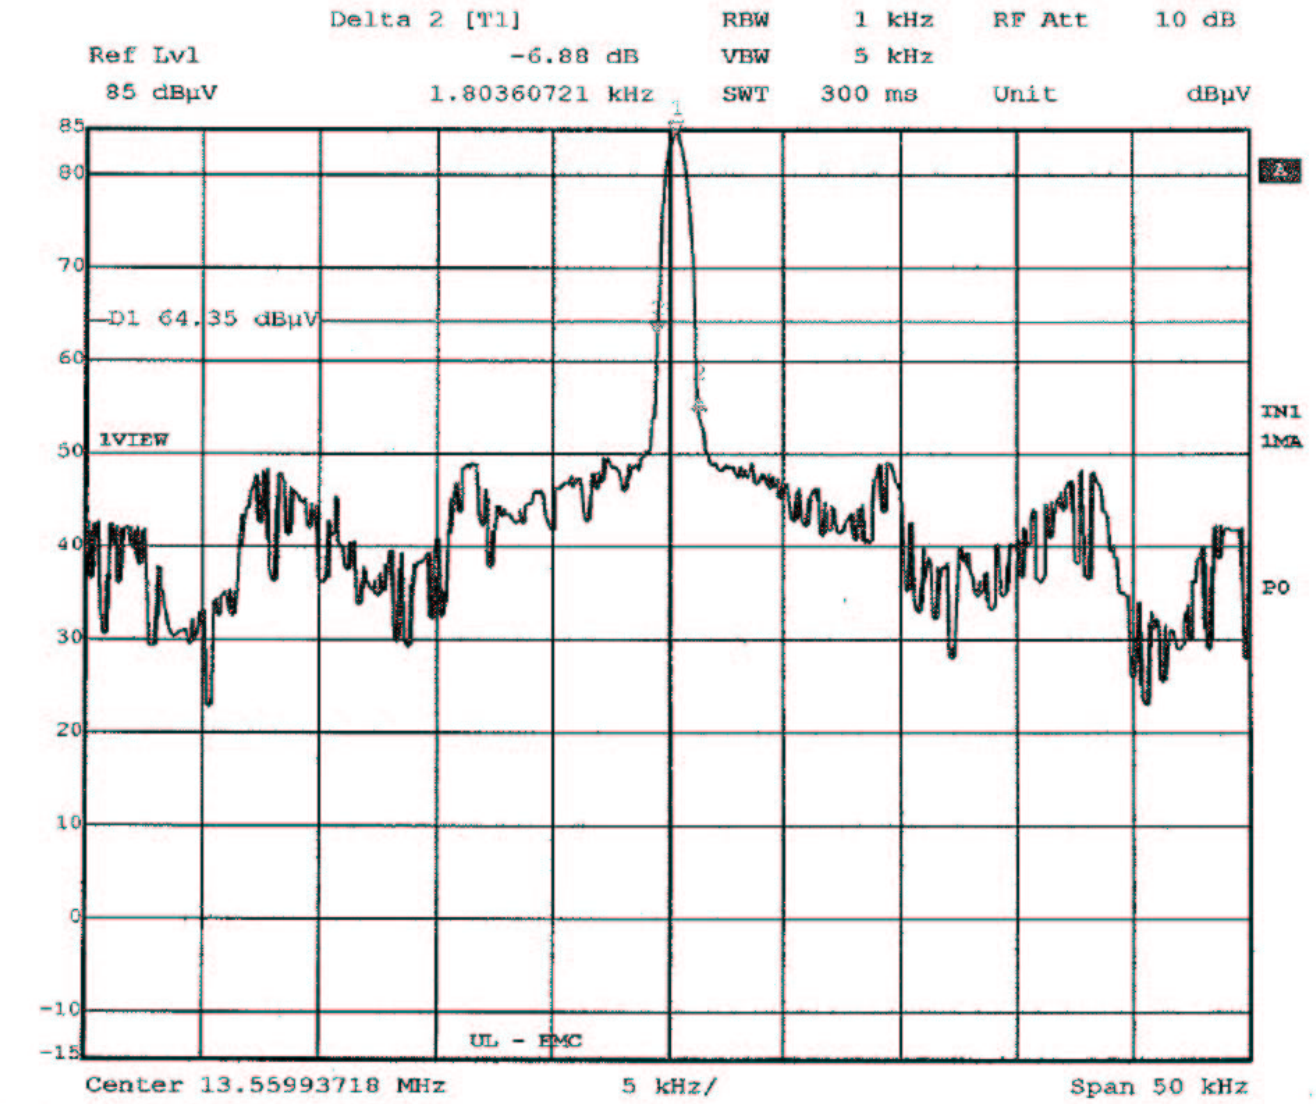

Date: 9.MAY.2007 16:12:31

Test 4, Item A – Emissions Table: Occupied Bandwidth

Test Item (A-Z)	Center Frequency (MHz)	Bandwidth (kHz)	See Comment (#)*
-20 dB bandwidth			
A	13.5600	1.8036	1

* # = See Comment Number Under This Test's Comments Section.

Test 5: Radiated Disturbance Emissions - Restricted Bands

Test Requirement: 47 CFR Part 15, Subpart C
 RSS-210 Issue 6

Test Specification: 47 CFR Part 15, Subpart C, Section 15.205
 RSS-210 Issue 6, Section 2.7

Test Procedure:

The EUT is verified to produce only spurious emissions in the bands listed below. Where spurious emissions exist they must comply with the general limits from 47 CFR Part 15, Section 15.209 and RSS-210 Issue 5 Section 6.2.2(t1).

Results from measurements are examined to ensure that no spurious emission in a restricted band (below) exceeds the general limits. The restricted bands are:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	608 - 614	4.5 - 5.15
0.495 - 0.505	16.69475 - 16.69525	960 - 1240	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	1300 - 1427	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1435 - 1626.5	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1645.5 - 1646.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1660 - 1710	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1718.8 - 1722.2	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	2200 - 2300	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2310 - 2390	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2483.5 - 2500	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2655 - 2900	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	3260 - 3267	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3332 - 3339	23.6 - 24.0
12.29 - 12.293	127.72 - 167.17	3345.8 - 3358	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3600 - 4400	36.43 - 36.5
12.57675 - 12.57725	332-335.4		Above 38.6
13.36 - 13.41	399.9 - 410		

Test Deviations:

None

Test Setup: Only the following ports were tested. See EUT Information for details.

Test Item	Port #	Port Name	EUT Operation Mode	EUT Configuration	Power Interface
-	0	Enclosure	1	1	1

Test 5 - Results: Radiated Disturbance Emissions - Restricted Bands

Test Results Summary:

Test Item	Test Location	Humidity (%)	Temperature (°C)	Pressure (kPa)	Pass/Fail (P/F)	Date Completed	Comment #
-	-	-	-	-	P	5/3/07	

The EUT was considered to **Pass** the Requirements.

Comments:

Comment #	Description
1	From results found in Test 1: It is observed that transmit frequency of 13.56 MHz is not within a restricted band in 15.205.
2	From results found in Test 1: It is observed that all spurious emissions through 10 th harmonic comply with general limit in 15.207.

Test 6: Maximum Permissible Exposure Calculation

Test Requirement: 47 CFR Part 1

Test Specification: 47 CFR Part 1, Section 1.1307

Exposure Limits:

FCC Limits for Occupational/Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm ²)	Averaging Time E ² , H ² . or S (minutes)
0.3 – 3.0	614	1.63	(100)*	6
3.0 - 30	1824/f	4.89/f	(900/f ²)*	6
30 - 300	61.4	0.163	1.0	6
300 – 1500	-	-	f/300	6
1500 – 100,000	-	-	5.0	6

* Plane-wave equivalent power density. f in MHz.

FCC Limits for General Population/Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm ²)	Averaging Time E ² , H ² . or S (minutes)
0.3 - 1.34	614	1.63	(100)*	30
1.34 - 30	824/f	2.19/f	(180/f ²)*	30
30 - 300	27.5	0.073	0.2	30
300 – 1500	-	-	f/1500	30
1500 – 100,000	-	-	1.0	30

*Plane-wave equivalent power density. f in MHz.

Test Details: This device is considered to possibly be located in either environment, therefore the General/Uncontrolled limit is used during calculation.

Background: Per the following guidance from OET Bulletin 65 Supplement C required minimum spacings are provided to the professional installer.

Transmitter or Device Type ¹⁸	Output ¹⁹	Applicable Methods to Ensure Compliance ²⁰
Transmitters using indoor antennas that operate at 20 cm or more from nearby persons	>2.5 W at 915 MHz	If the MPE distance is greater than that required for normal operation of the device, operating instructions, warning instructions and/or warning labels may be used to ensure compliance by indicating the minimal separation distance to comply with MPE limits. If the antennas are professionally installed to ensure compliance, warning instructions and warning labels are not necessary.
	=< 2.5 W at 915 MHz or =< 4 W at 2450 MHz	Transmitters operating at 2.5 W EIRP (1.5 W ERP) or less at 915 MHz, or at 4 W EIRP (2.4 W ERP) or less at 2450 MHz, generally are not expected to exceed MPE limits when nearby persons are 20 cm or more from most antennas. Therefore, special instructions and warnings are normally not necessary to ensure compliance.

MPE Calculation:

As measurements were performed by radiated emissions in magnetic field, the magnetic field strength recorded at 3 meter distance is extrapolated to 20 cm. A 40 dB/decade factor is used. The result is compared against the magnetic field strength limit for general/uncontrolled environment.

Exposure Limit

Magnetic Field Strength Limit (from table) = $2.19/f$ A/m, where f = frequency in MHz.

Magnetic Field Strength Limit = $2.19/13.56$ A/m = **0.1615 A/m**

Field Produced at 20 cm (continuous exposure assumed)

Extrapolating from 3 meter distance to 20 cm:

Magnetic Field Strength measured = 30.2 dBuA/m + $40 * \text{Log}_{10}(300 \text{ cm}/20 \text{ cm})$

Magnetic Field Strength measured = 30.2 dBuA/m + 47.0 dB = 77.2 dBuA/m or in linear units = **0.00724 A/m @ 20cm.**

Result

It is demonstrated that the device complies with the magnetic field strength RF exposure limits for general/uncontrolled environment at a distance of 20 cm. Because the transmitting antenna is a loop antenna, only the magnetic field limit is considered. The electric field limit and power density limit are considered to be met without calculation.

Accreditation Certificates:



SCOPE OF ACCREDITATION TO ISO/IEC 17025:1999


Underwriters Laboratories, Inc.
12 Laboratory Drive
Research Triangle Park, NC 27709
Mr. Rick A. Titus
Phone: 847-272-8100 x43281 Fax: 847-313-3281
E-Mail: Rick.A.Titus@us.ul.com
URL: http://www.ul.com

ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS NVLAP LAB CODE 200246-0

NVLAP Code	Designation / Description
Emissions Test Methods:	
12CIS14	CISPR 14-1 (March 10, 2000): Limits and Methods of Measurement of Radio Interference Characteristics of Household Electrical Appliances, Portable Tools and Similar Electrical Apparatus - Part 1: Emissions
12CIS14a	EN 55014-1 (1993), A1 (1993), A2 (1999);
12CIS14b	AS/NZS 1044 (1993);
12CIS14c	CNS 13743-1: Electromagnetic Compatibility Requirements for household appliances, electric tools and similar apparatus - Part 1: Emissions
12CIS22	IEC/CISPR 22 (1997) & EN 55022 (1998) + A1(2000): Limits and methods of measurement of radio disturbance characteristics of information technology equipment
12CIS22a	IEC/CISPR 22 (1997) and EN 55022 (1998): Limits and methods of measurement of radio disturbance characteristics of information technology equipment, Amendment 1 (1999) and Amendment 2 (1996)
12CIS22b	CNS 13438 (1997): Limits and Methods of Measurement of Radio Interference Characteristics of Information Technology Equipment

2006-07-01 through 2007-06-30
Effective dates
Page 1 of 3

Sally J. Bruce
For the National Institute of Standards and Technology
NVLAP-015 (REV. 10-20-01)



ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS NVLAP LAB CODE 200246-0

NVLAP Code	Designation / Description
12EM02a	IEC 61000-3-2, Edition 2.1 (2001-10), EN 61000-3-2 (2004), and AS/NZS 2270.1 (2000): Electromagnetic compatibility (EMC) Part 3-2: Limits - Limits for harmonic current emissions (equipment input current >= 16 A)
12EM03b	IEC 61000-3-3, Edition 1.1(2000-03) & EN 61000-3-3, A1(2001); EMC - Part 3-3: Limits - Limitations of voltage changes, voltage fluctuations and flicker, in public low-voltage supply-systems, for equipment with rated current <=16 A per phase and not subject to conditional connection
12FCC15b	ANSI C63.4 (2003) with FCC Method 47 CFR Part 15, Subpart B: Unintentional Radiators
12I51	AS/NZS CISPR 22 (2002) and AS/NZS 3548 (1997): Electromagnetic Interference - Limits and Methods of Measurement of Information Technology Equipment
Immunity Test Methods:	
12I01	IEC 61000-4-2, Ed. 1.2 (2001) + A1, A2; EN 61000-4-2: Electrostatic Discharge Immunity Test
12I02	IEC 61000-4-3, Ed. 2.0 (2002-03); EN 61000-4-3 (2002): Radiated Radio-Frequency Electromagnetic Field Immunity Test
12I03	IEC 61000-4-4 (1995), A1(2000), A2(2001); EN 61000-4-4: Electromagnetic compatibility (EMC) - Part 4-4: Testing and measurement techniques - Electrical Fast Transient/Burst Immunity Test
12I04	IEC 61000-4-5, Ed. 1.1 (2001-04); EN 61000-4-5: Electromagnetic compatibility (EMC) - Part 4-5: Testing and measurement techniques - Surge Immunity test
12I05	IEC 61000-4-6, Ed. 2.0 (2003-05); EN 61000-4-6: Electromagnetic compatibility (EMC) - Part 4-6: Testing and measurement techniques - Immunity to conducted disturbances, induced by radio-frequency fields
12I06	IEC 61000-4-8, Ed. 1.1 (2001); EN 61000-4-8: Electromagnetic compatibility (EMC) - Part 4-8: Testing and measurement techniques - Power frequency magnetic field immunity test

2006-07-01 through 2007-06-30
Effective dates
Page 2 of 3

Sally J. Bruce
For the National Institute of Standards and Technology
NVLAP-015 (REV. 10-20-01)



ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS NVLAP LAB CODE 200246-0

NVLAP Code	Designation / Description
12I07	IEC 61000-4-11, Ed. 1.1 (2001-05); EN 61000-4-11: Voltage Dips, Short Interruptions and Voltage Variations Immunity Test
Product Safety Test Methods	
12I74a	AS/NZS 60950 (2000): Safety of Information Technology Equipment (including Aerials)
12I75	AS/NZS 3260 (1993) + Supplement 1 (1996): Safety of Information Technology Equipment Including Electrical Business Equipment
Telecommunications Test Methods:	
12I089a	GR-1089-CORE, Issue 3 (April 2002): EMC and Electrical Safety - Generic Criteria for Network Telecommunications Equipment (sections: 2.1.2.1, 2.1.2.2, 2.1.4, 2.2, 3.2, 3.3, 4.6.2, 4.6.5, 4.6.7 - 4.6.17, 4.7, 5.2, 5.3.1, 5.4, 6, 7.2 - 7.7, 8, and 9.2 - 9.12)
12I0200a	SBC-TY-76210, Issue 5 (May 2005): Network Equipment Power, Grounding, Environmental, and Physical Design Requirements (sections: 6.1B, 7.1, 7.2, 7.3, 7.4, and 10.1 - 10.4B)
12I086a	GR-63-CORE, Issue 2 (April 2002): NBBS (TM) Requirements: Physical Protection (sections: 2, 3, 4.1, 4.2.5, 4.3, 4.4.1, 4.4.3, 4.4.4, 4.5, 4.6, and 4.7)

2006-07-01 through 2007-06-30
Effective dates
Page 3 of 3

Sally J. Bruce
For the National Institute of Standards and Technology
NVLAP-015 (REV. 10-20-01)

Measurement Uncertainty Statement

Test	Expanded Estimate of Uncertainty <small>(k = 2, for 95% of a normal distribution)</small>	Units
Radiated Disturbance Emissions:	± 3.8 dB	Volts/meter
Conducted Disturbance Emissions (150 kHz – 30 MHz):	± 3.4 dB	Volts

CISPR 16-4:2000 Statement

The UL-RTP estimate of expanded measurement uncertainty listed above for Conducted Disturbance (+/- 3.4 dB) and Radiated Disturbance (+/-3.8 dB) are less than the Values of U_{cispr} as listed in Table 1 of CISPR 16-4. Therefore:

- Compliance is deemed to occur if no measured disturbance reported exceeds the disturbance limits.
- Non-compliance is deemed to occur if any measured disturbance reported exceeds the disturbance limits.