

**EUT Operation Modes:**


Mode #	Description
1	EUT operating normally – transmitting at 13.56 searching for RFID tag. Output power is fixed and not adjustable by the user.

**EUT Configuration Modes:**

Mode #	Description
1	RFID card reader module with representative power supply. Actual antenna is attached. Setup is placed on non-conductive, polystyrene foam table measuring 1.5m wide x 1.0m deep x 0.8m high.

**EUT Photo:**

Antenna Assembly - Front

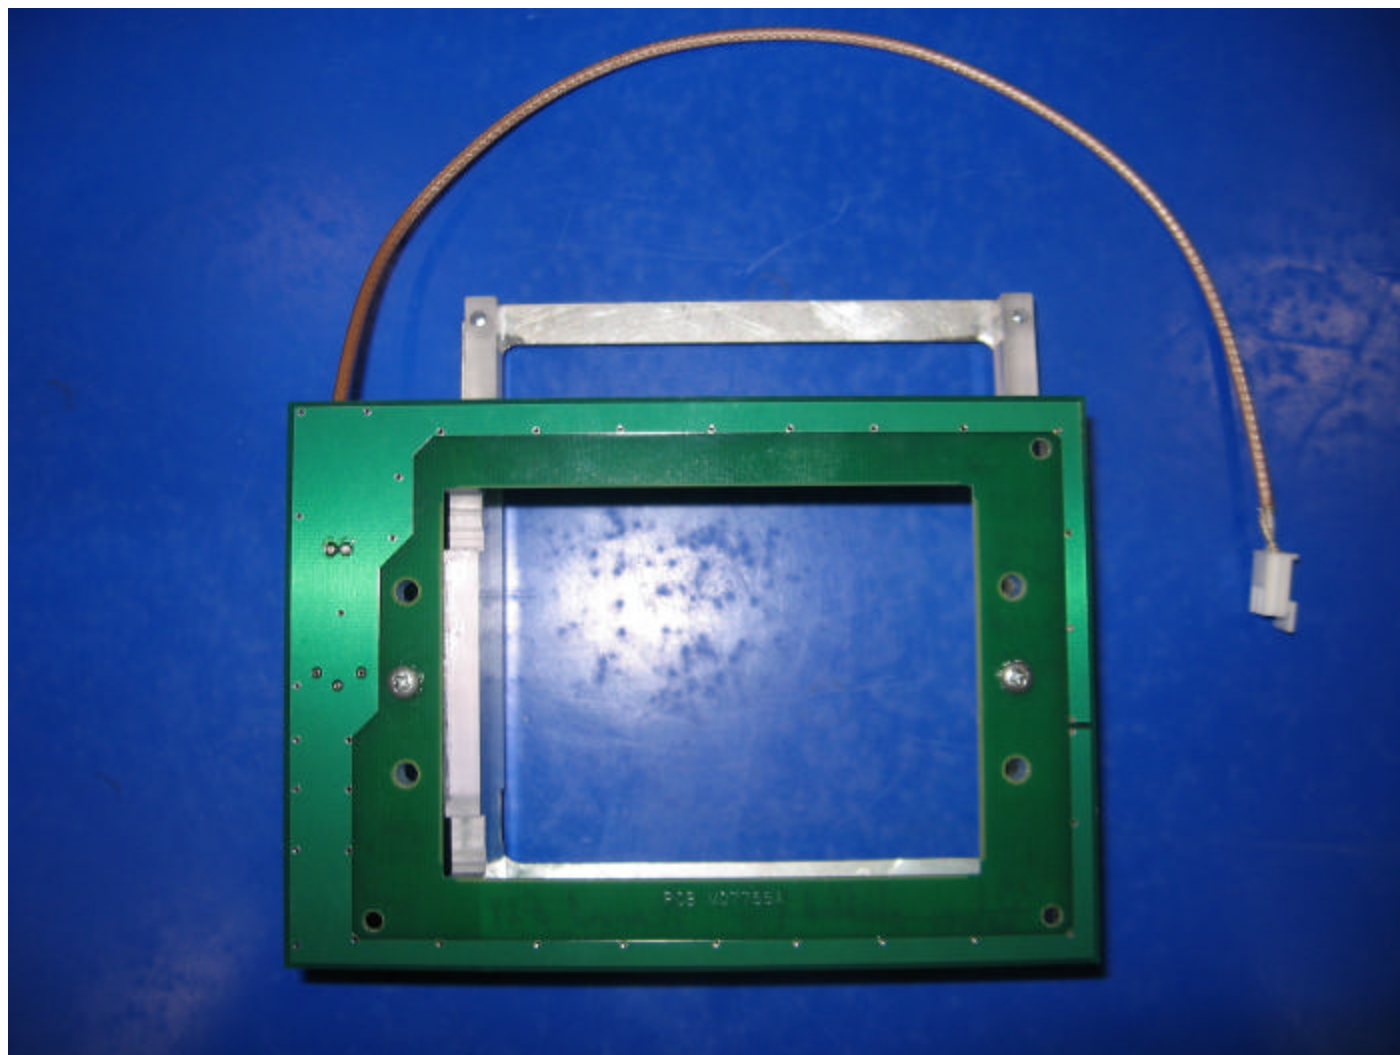

**EUT Photo:**

Antenna Assembly - Rear

