


[Test mode: TX middle channel]; [Polarity: Horizontal]

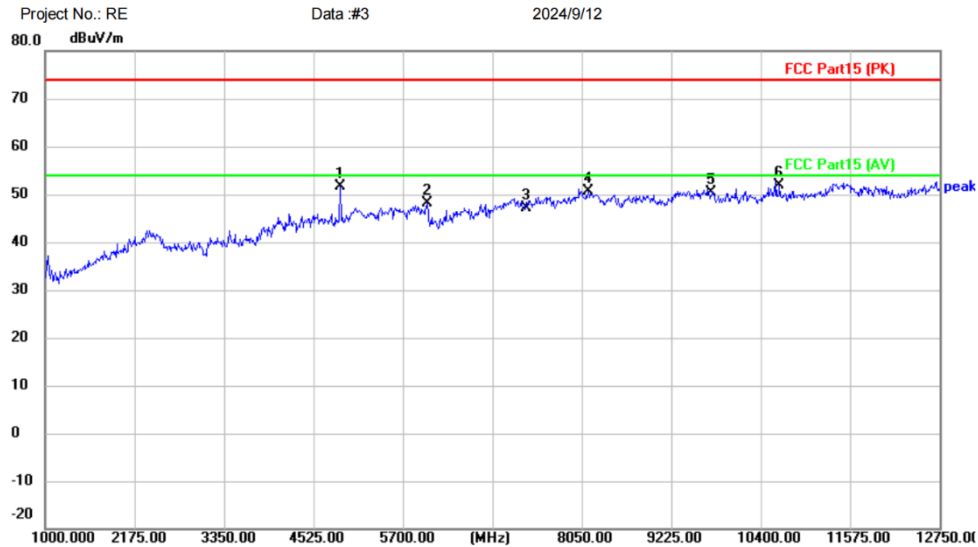


Site Polarization: **Horizontal** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: Portable Speaker
 M/N: S08G
 Mode: BT TX 2441
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4877.500	45.19	6.41	51.60	74.00	-22.40	peak	
2		6017.250	42.05	5.96	48.01	74.00	-25.99	peak	
3		7323.000	37.06	10.17	47.23	74.00	-26.77	peak	
4		8132.250	38.96	11.61	50.57	74.00	-23.43	peak	
5		9764.000	36.60	13.76	50.36	74.00	-23.64	peak	
6	*	10646.75	38.03	13.73	51.76	74.00	-22.24	peak	

*:Maximum data x:Over limit !:over margin <Reference Only
 Receiver: ESR_1 Spectrum Analyzer: FSP40

Test Result: Pass

[Test mode: TX middle channel]; [Polarity: Vertical]

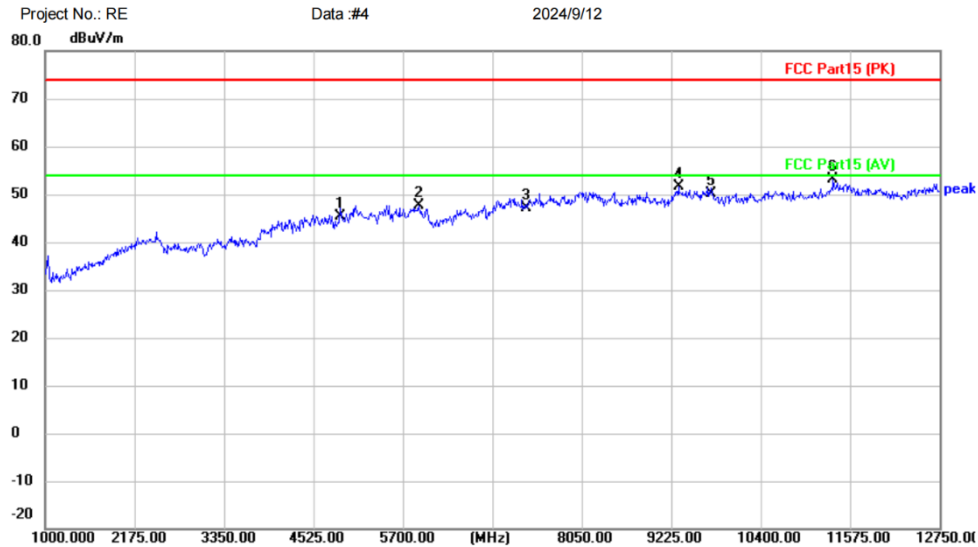


Site Polarization: **Vertical** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: Portable Speaker
 M/N: S08G
 Mode: BT TX 2441
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4882.000	38.91	6.43	45.34	74.00	-28.66	peak	
2		5911.500	38.52	9.08	47.60	74.00	-26.40	peak	
3		7323.000	36.94	10.17	47.11	74.00	-26.89	peak	
4		9319.000	38.30	13.21	51.51	74.00	-22.49	peak	
5		9764.000	36.29	13.76	50.05	74.00	-23.95	peak	
6	*	11351.75	38.90	14.32	53.22	74.00	-20.78	peak	

*:Maximum data x:Over limit !:over margin <Reference Only
 Receiver: ESR_1 Spectrum Analyzer: FSP40

Test Result: Pass

[Test mode: TX High channel]; [Polarity: Horizontal]

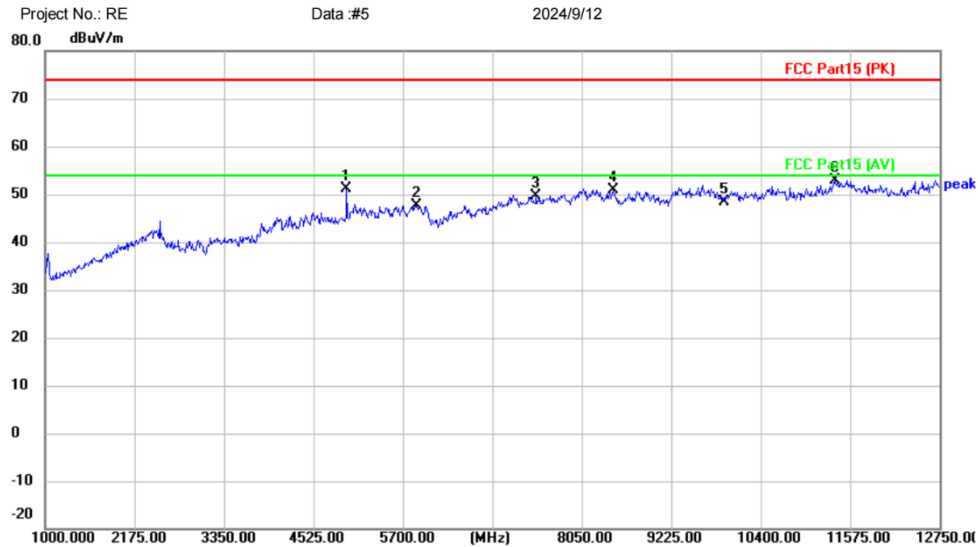


Site Polarization: **Horizontal** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: Portable Speaker
 M/N: S08G
 Mode: BT TX 2480
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4959.750	43.77	7.41	51.18	74.00	-22.82	peak	
2		5876.250	38.57	8.99	47.56	74.00	-26.44	peak	
3		7440.000	38.63	11.03	49.66	74.00	-24.34	peak	
4		8461.250	39.44	11.47	50.91	74.00	-23.09	peak	
5		9920.000	35.15	13.16	48.31	74.00	-25.69	peak	
6	*	11375.25	38.31	14.56	52.87	74.00	-21.13	peak	

*:Maximum data x:Over limit !:over margin <Reference Only
 Receiver: ESR_1 Spectrum Analyzer: FSP40

Test Result: Pass

[Test mode: TX High channel]; [Polarity: Vertical]

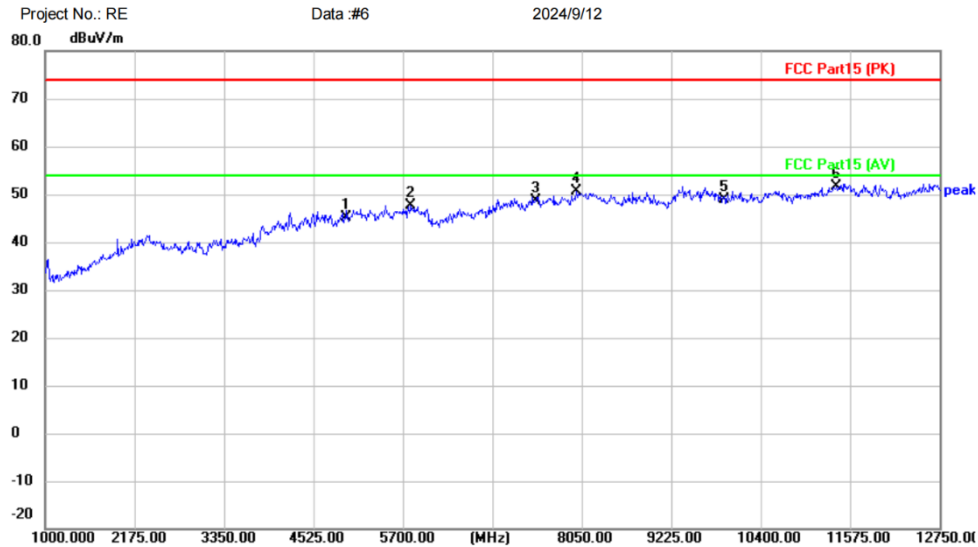

Site Polarization: **Vertical** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: Portable Speaker
 M/N: S08G
 Mode: BT TX 2480
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4960.000	37.74	7.41	45.15	74.00	-28.85	peak	
2		5805.750	38.54	9.00	47.54	74.00	-26.46	peak	
3		7440.000	37.56	11.03	48.59	74.00	-25.41	peak	
4		7979.500	39.27	11.47	50.74	74.00	-23.26	peak	
5		9920.000	35.67	13.16	48.83	74.00	-25.17	peak	
6	*	11398.75	36.86	14.81	51.67	74.00	-22.33	peak	

*:Maximum data x:Over limit !:over margin <Reference Only
 Receiver: ESR_1 Spectrum Analyzer: FSP40

Test Result: Pass

6.11 Radiated emissions which fall in the restricted bands

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.10.5
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX


6.11.1 Limit

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3


Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

6.11.2 Test setup


Below 1GHz:

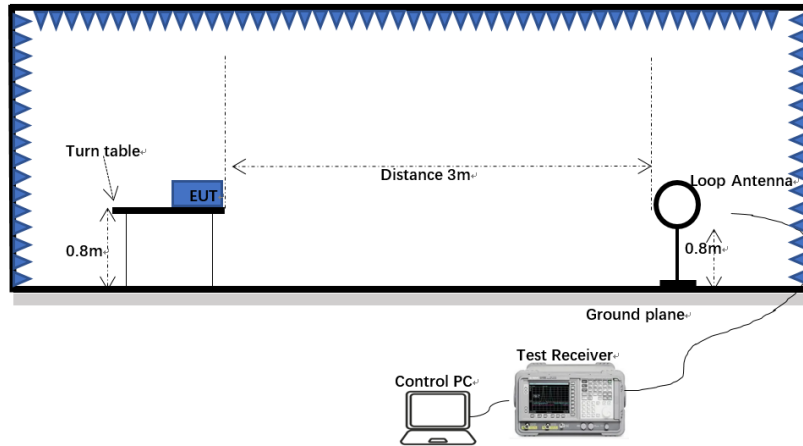

30MHz-1GHz:

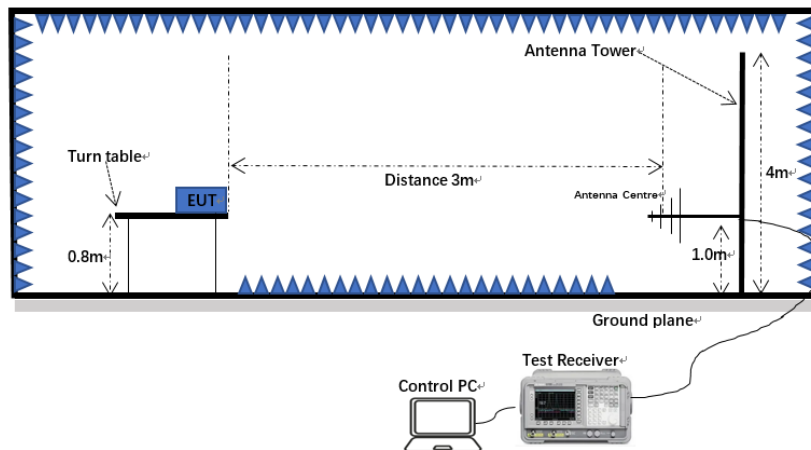

Above 1GHz:

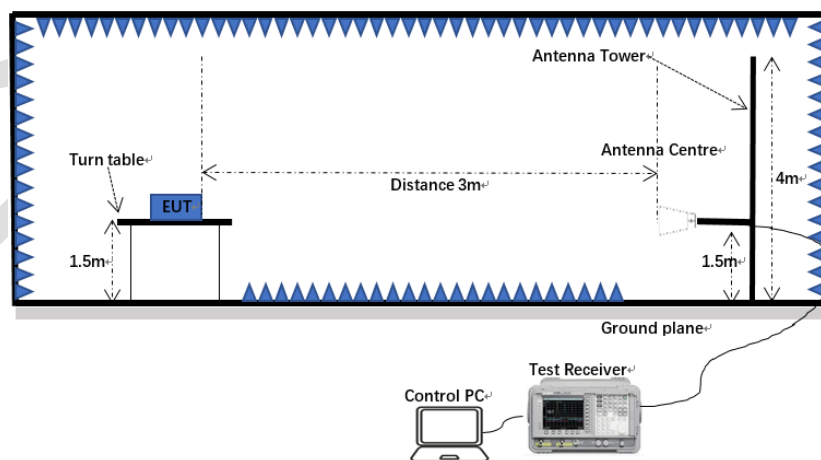

6.11.3 Procedure

- a) For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c) The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d) The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f) The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g) If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h) Test the EUT in the lowest channel, the middle channel, the highest channel.
- i) The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j) Repeat above procedures until all frequencies measured was complete.


Note 1: Level (dBuV) = Reading (dBuV) + Factor (dB/m)

Note 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report. all modes have been tested, and only the worst mode is showed in the report.

6.11.4 Test data

Remark: During the test, pre-scan the GFSK, pi/4DQPSK, 8DPSK mode, and found the GFSK mode which it is worse case.

[Test mode: TX low channel]; [Polarity: Horizontal]

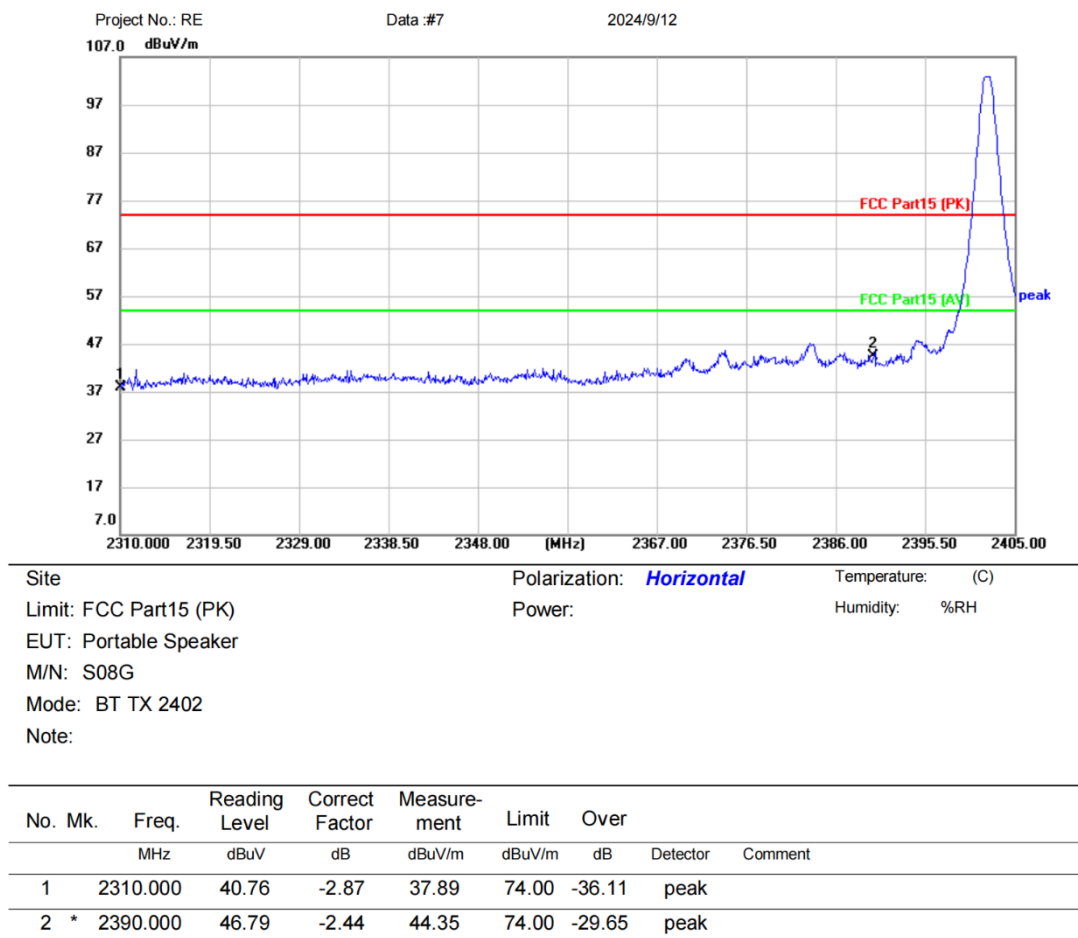

*:Maximum data x:Over limit !:over margin


<Reference Only

Receiver: ESR_1

Spectrum Analyzer: FSP40

Test Result: Pass

[Test mode:TX low channel]; [Polarity: Vertical]

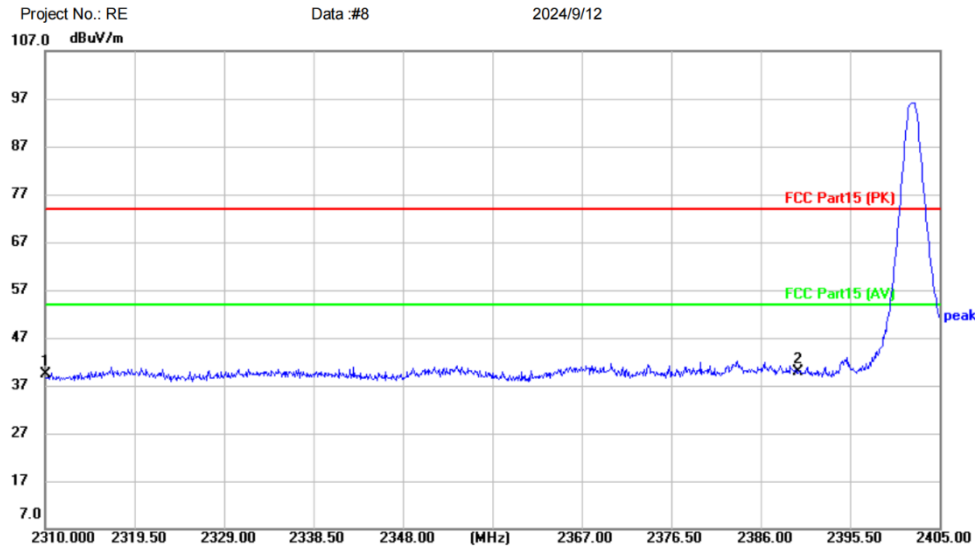

Site Polarization: **Vertical** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: Portable Speaker
 M/N: S08G
 Mode: BT TX 2402
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2310.000	42.32	-2.87	39.45	74.00	-34.55	peak	
2	*	2390.000	42.24	-2.44	39.80	74.00	-34.20	peak	

*:Maximum data x:Over limit !:over margin


⟨Reference Only

Receiver: ESR_1

Spectrum Analyzer: FSP40

Test Result: Pass

[Test mode: TX High channel]; [Polarity: Horizontal]

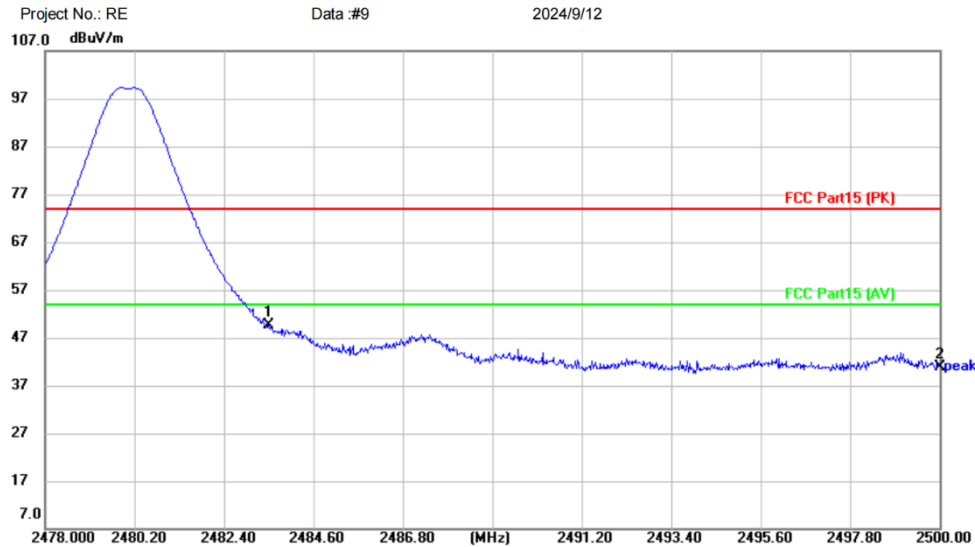

Site Polarization: **Horizontal** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: Portable Speaker
 M/N: S08G
 Mode: BT TX 2480
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	2483.500	52.57	-2.91	49.66	74.00	-24.34	peak	
2		2500.000	43.87	-3.00	40.87	74.00	-33.13	peak	

*:Maximum data x:Over limit !:over margin


〈Reference Only

Receiver: ESR_1

Spectrum Analyzer: FSP40

Test Result: Pass

[Test mode:TX High channel]; [Polarity: Vertical]

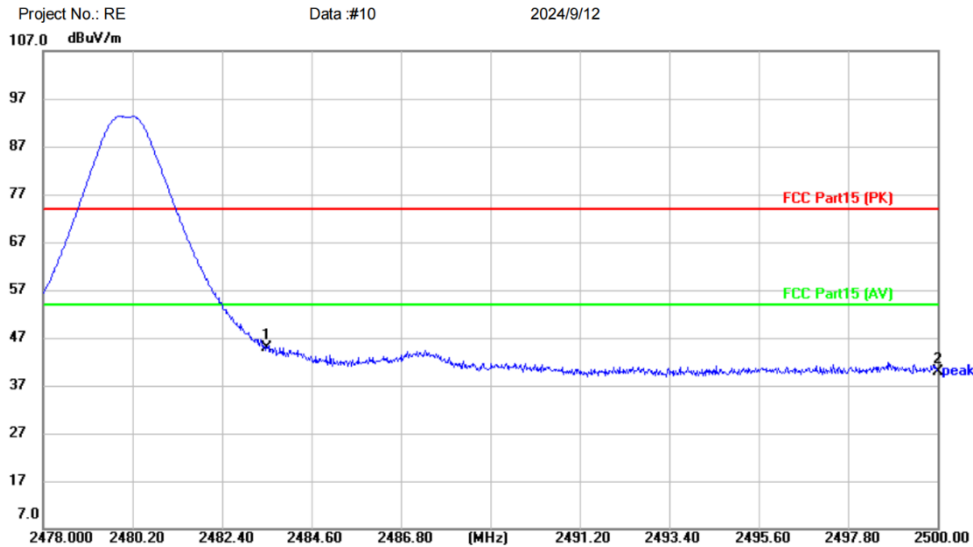

Site Polarization: **Vertical** Temperature: (C)

Limit: FCC Part15 (PK) Power: Humidity: %RH

EUT: Portable Speaker

M/N: S08G

Mode: BT TX 2480

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	2483.500	47.84	-2.91	44.93	74.00	-29.07	peak	
2		2500.000	42.99	-3.00	39.99	74.00	-34.01	peak	

*:Maximum data x:Over limit !:over margin

〈Reference Only

Receiver: ESR_1

Spectrum Analyzer: FSP40


Test Result: Pass

7 Appendix A


Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	1-DH1	2402	Ant1	1.999	21	Pass
NVNT	1-DH1	2441	Ant1	2.359	21	Pass
NVNT	1-DH1	2480	Ant1	2.137	21	Pass
NVNT	2-DH1	2402	Ant1	1.963	21	Pass
NVNT	2-DH1	2441	Ant1	2.376	21	Pass
NVNT	2-DH1	2480	Ant1	2.139	21	Pass
NVNT	3-DH1	2402	Ant1	1.981	21	Pass
NVNT	3-DH1	2441	Ant1	2.384	21	Pass
NVNT	3-DH1	2480	Ant1	2.175	21	Pass


Power NVNT 1-DH1 2402MHz Ant1

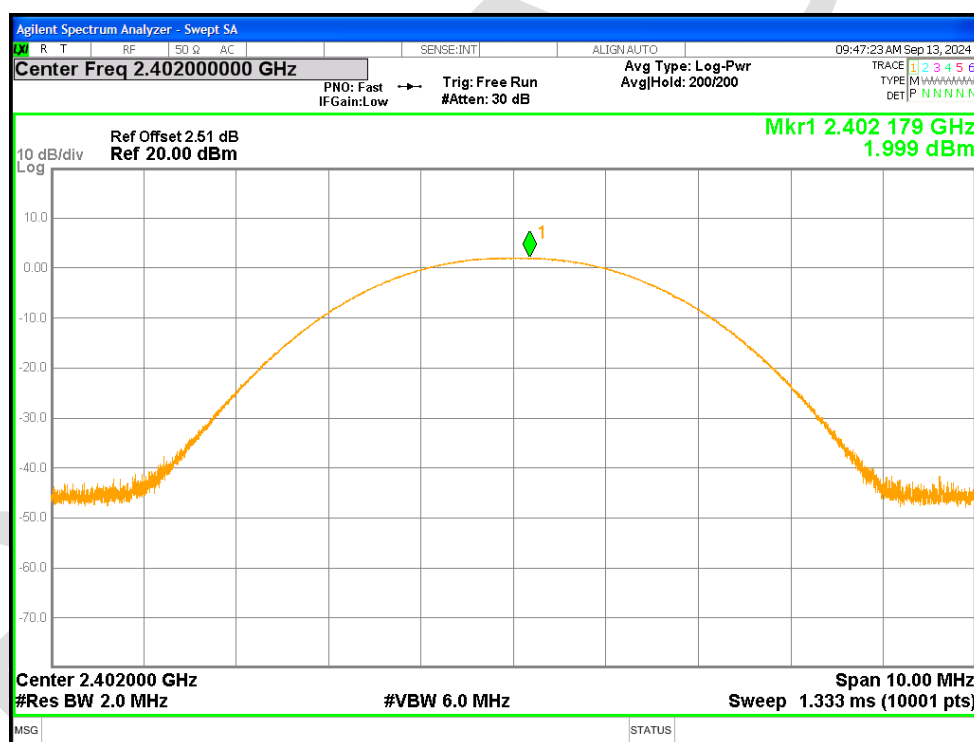


Power NVNT 1-DH1 2441MHz Ant1

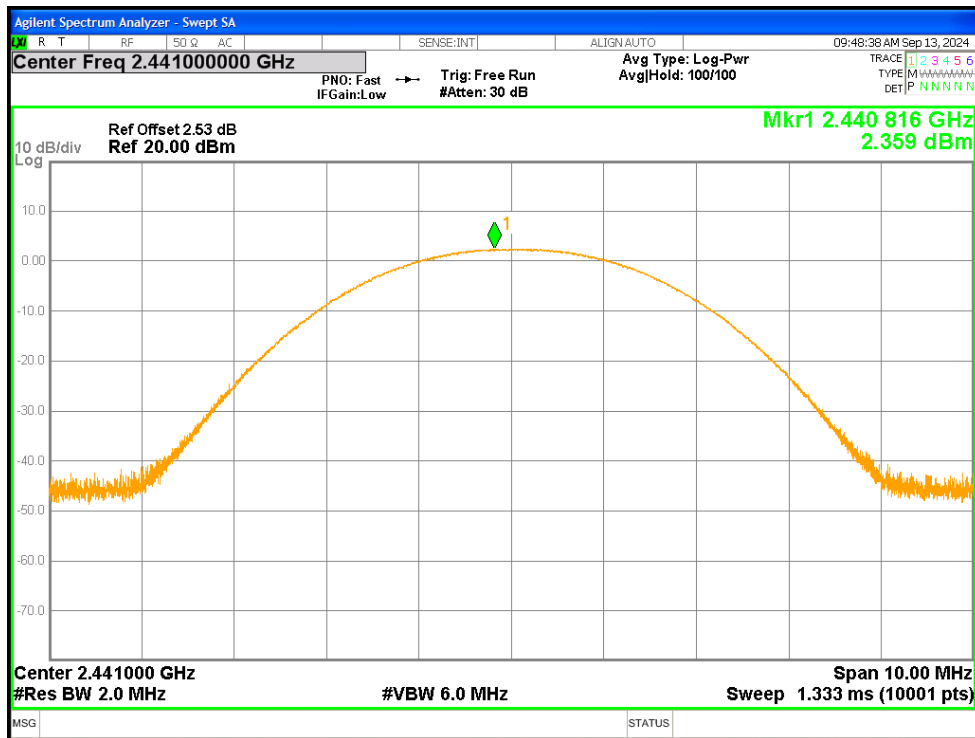


Power NVNT 1-DH1 2480MHz Ant1

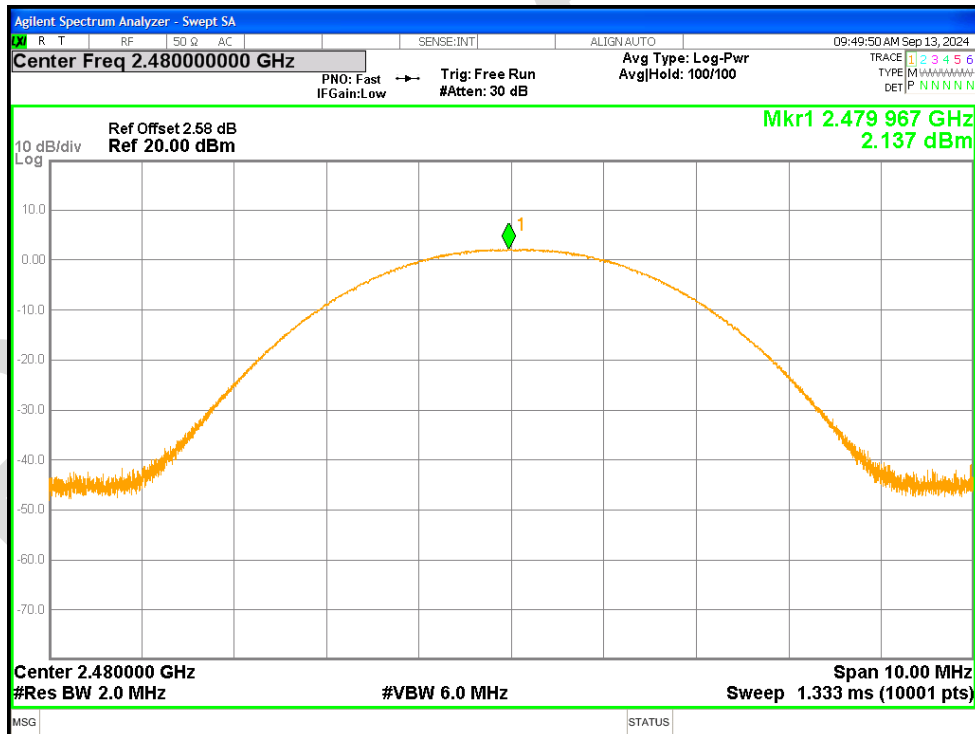


Power NVNT 2-DH1 2402MHz Ant1

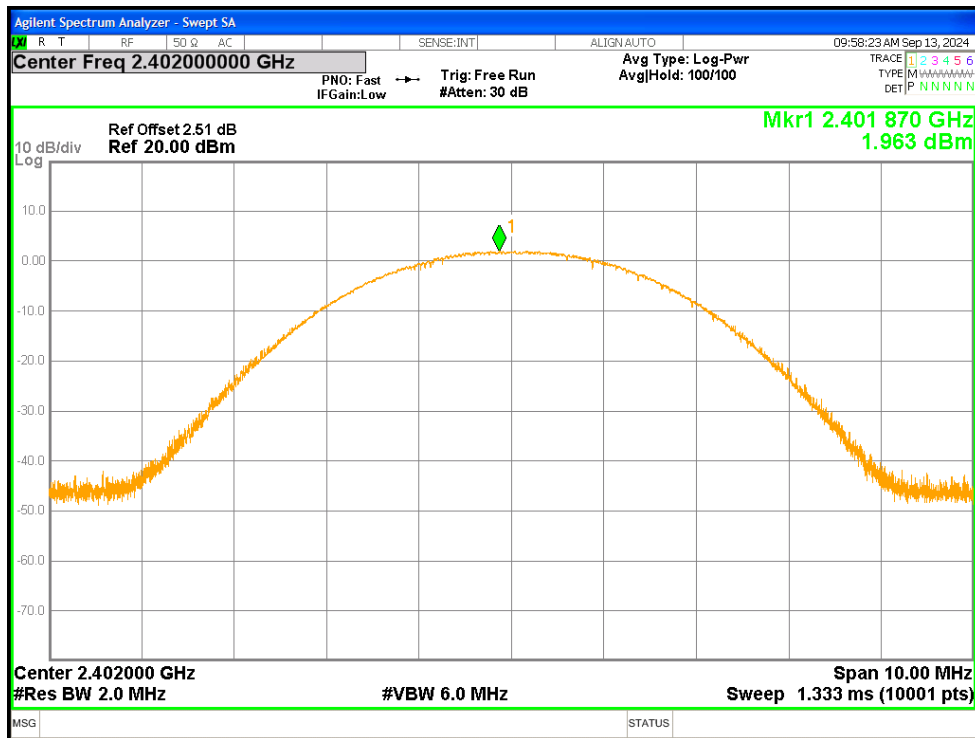


Power NVNT 2-DH1 2441MHz Ant1

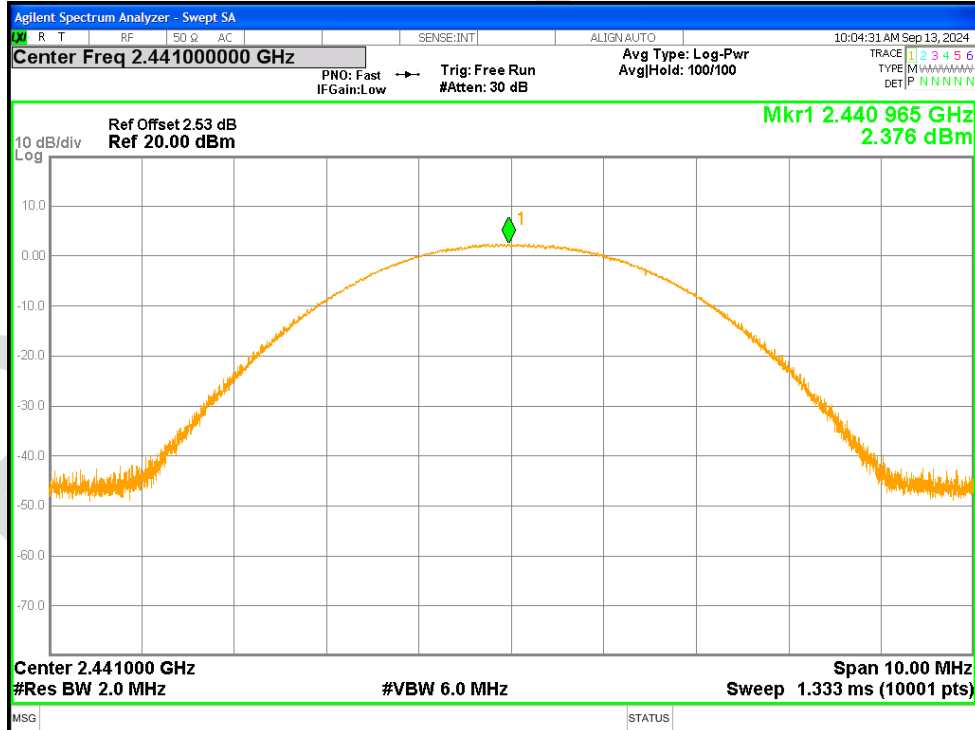


Power NVNT 2-DH1 2480MHz Ant1

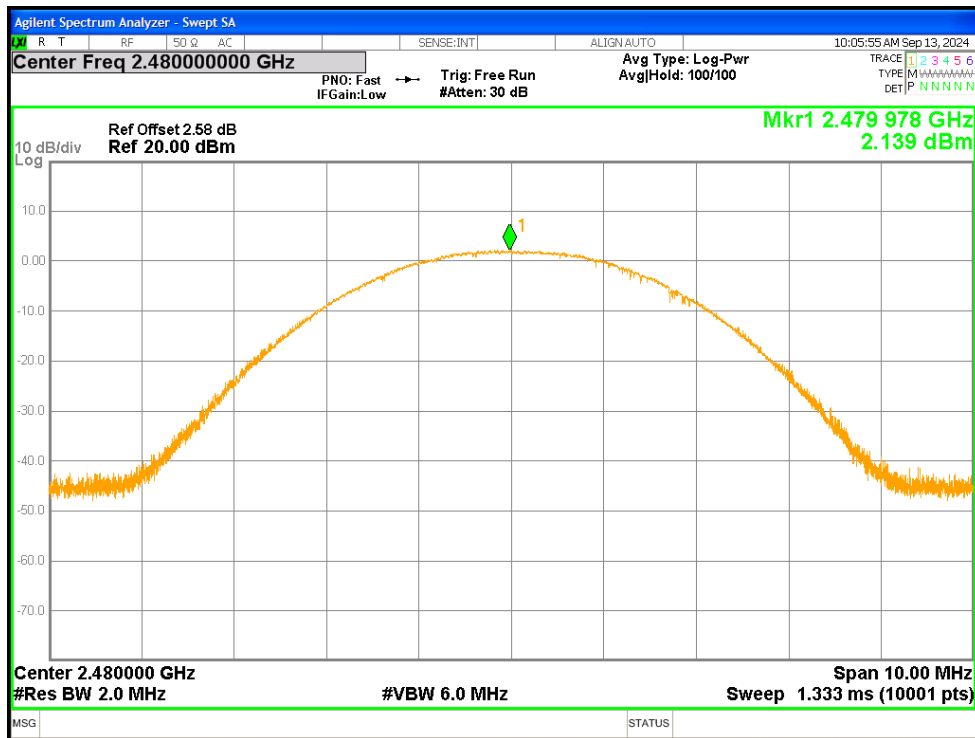


Power NVNT 3-DH1 2402MHz Ant1

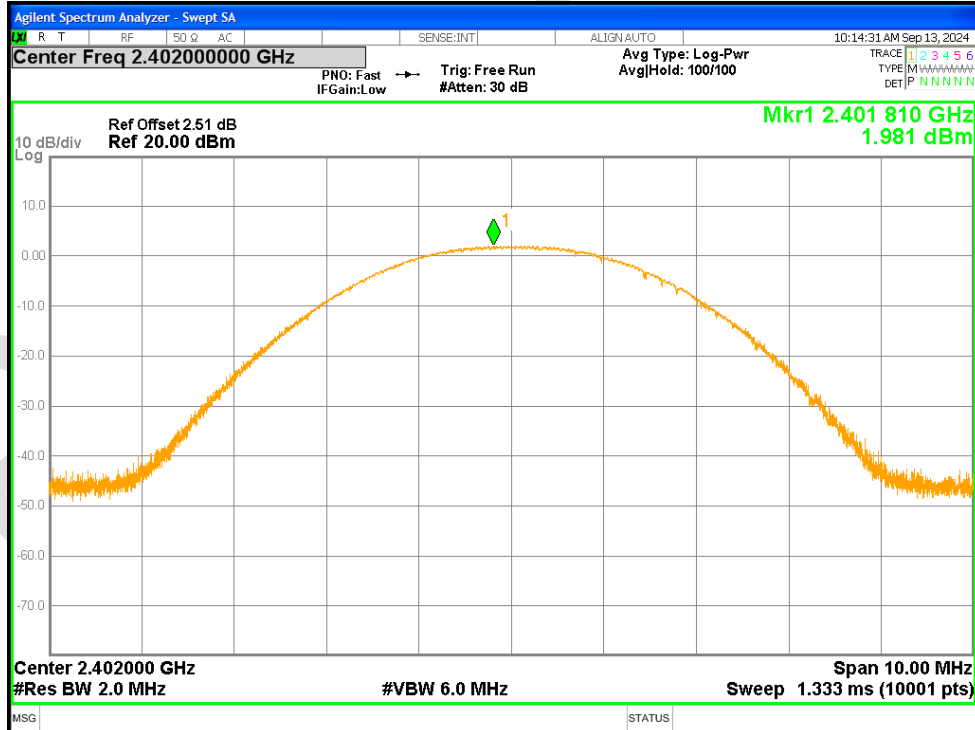

Power NVNT 3-DH1 2441MHz Ant1

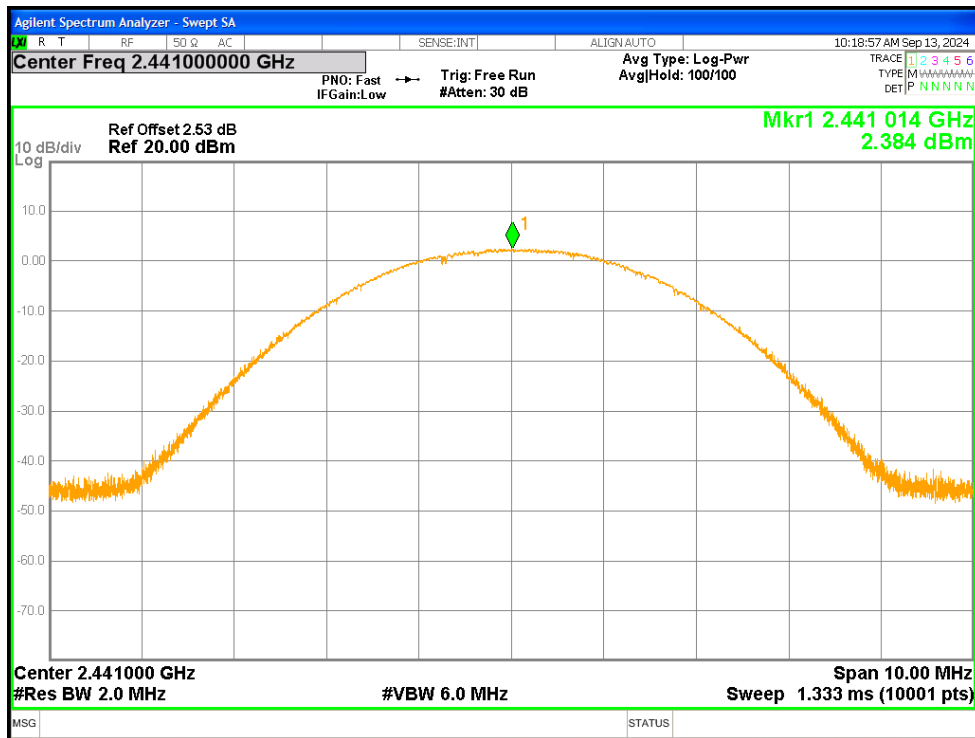


Power NVNT 3-DH1 2480MHz Ant1

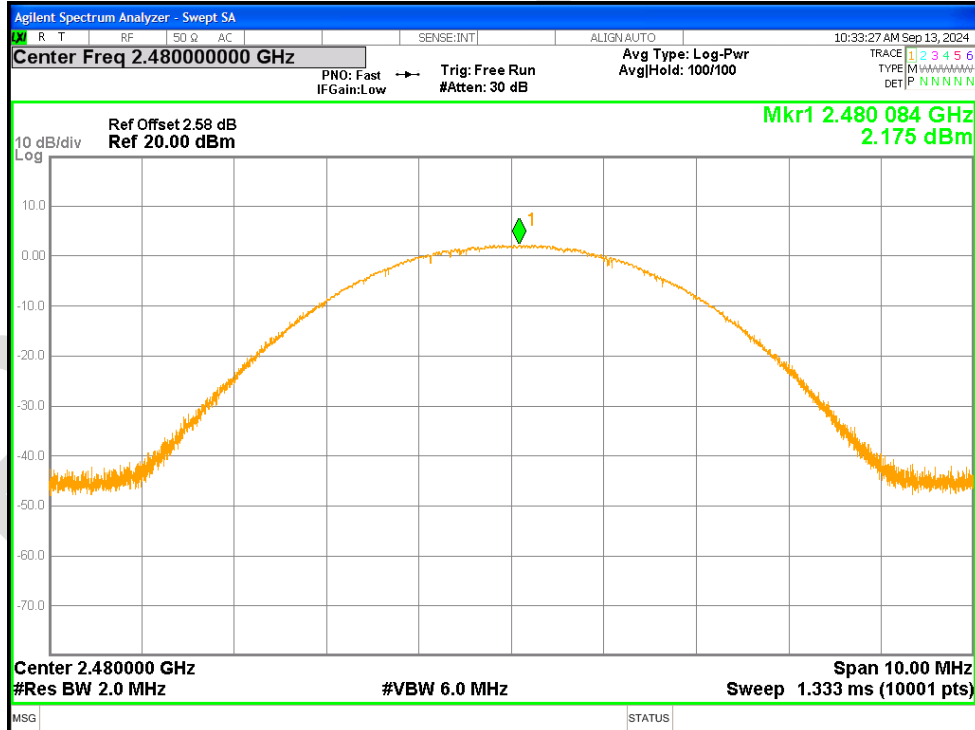


-20dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)	Limit -20 dB Bandwidth (MHz)	Verdict
NVNT	1-DH1	2402	Ant1	0.921	N/A	Pass
NVNT	1-DH1	2441	Ant1	0.93	N/A	Pass
NVNT	1-DH1	2480	Ant1	0.936	N/A	Pass
NVNT	2-DH1	2402	Ant1	1.205	N/A	Pass
NVNT	2-DH1	2441	Ant1	1.206	N/A	Pass
NVNT	2-DH1	2480	Ant1	1.204	N/A	Pass
NVNT	3-DH1	2402	Ant1	1.208	N/A	Pass
NVNT	3-DH1	2441	Ant1	1.209	N/A	Pass
NVNT	3-DH1	2480	Ant1	1.211	N/A	Pass


-20dB Bandwidth NVNT 1-DH1 2402MHz Ant1

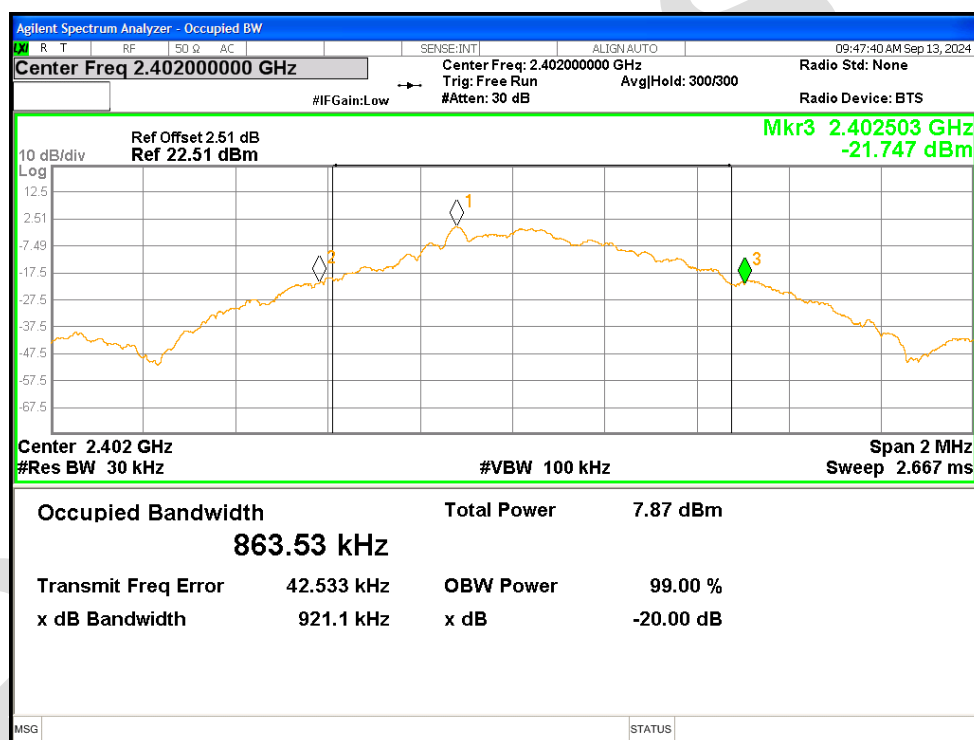


-20dB Bandwidth NVNT 1-DH1 2441MHz Ant1

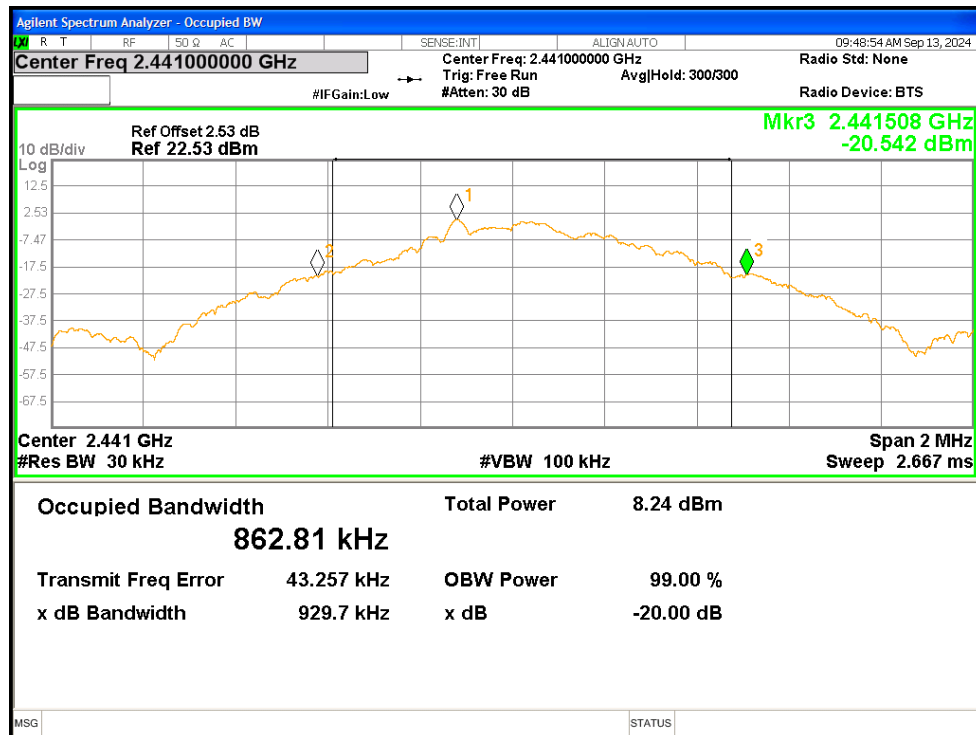


-20dB Bandwidth NVNT 1-DH1 2480MHz Ant1

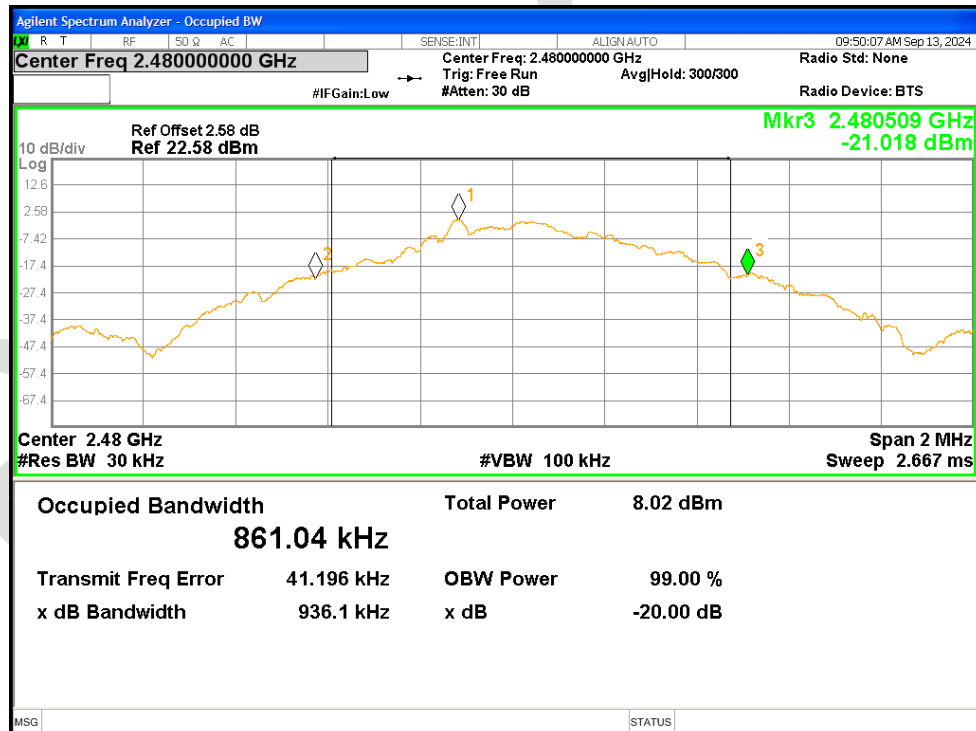


-20dB Bandwidth NVNT 2-DH1 2402MHz Ant1

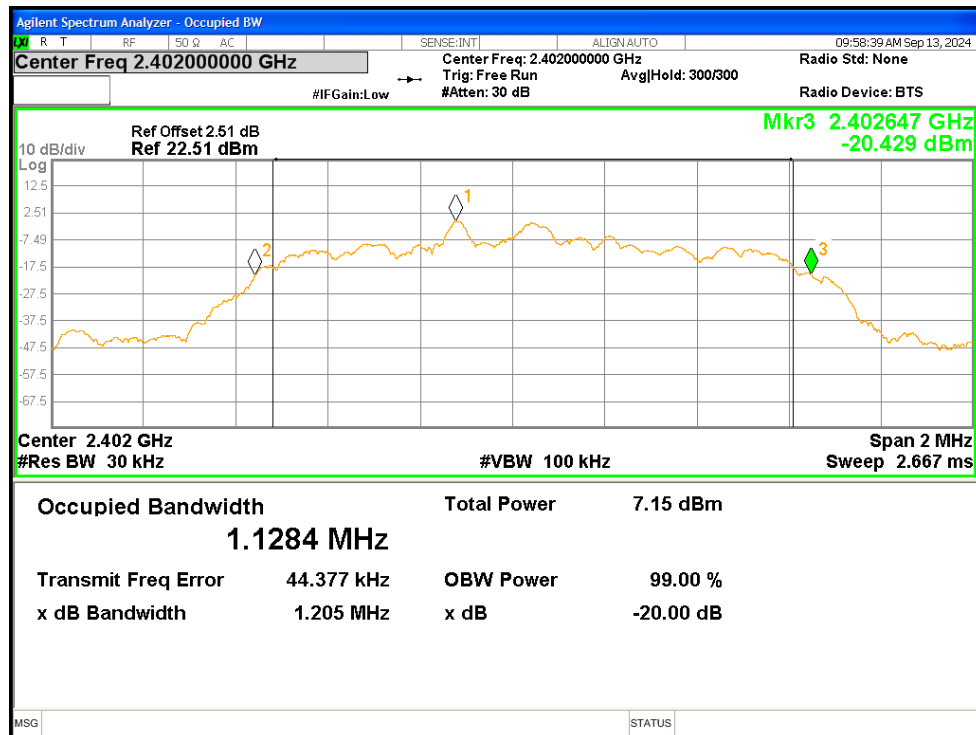


-20dB Bandwidth NVNT 2-DH1 2441MHz Ant1

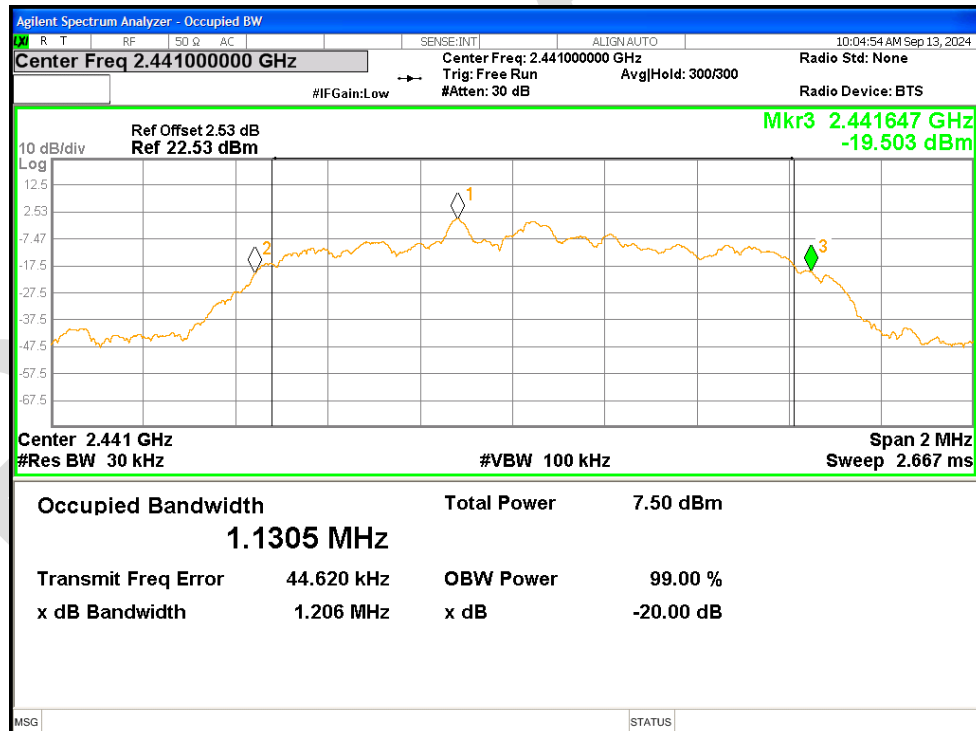


-20dB Bandwidth NVNT 2-DH1 2480MHz Ant1

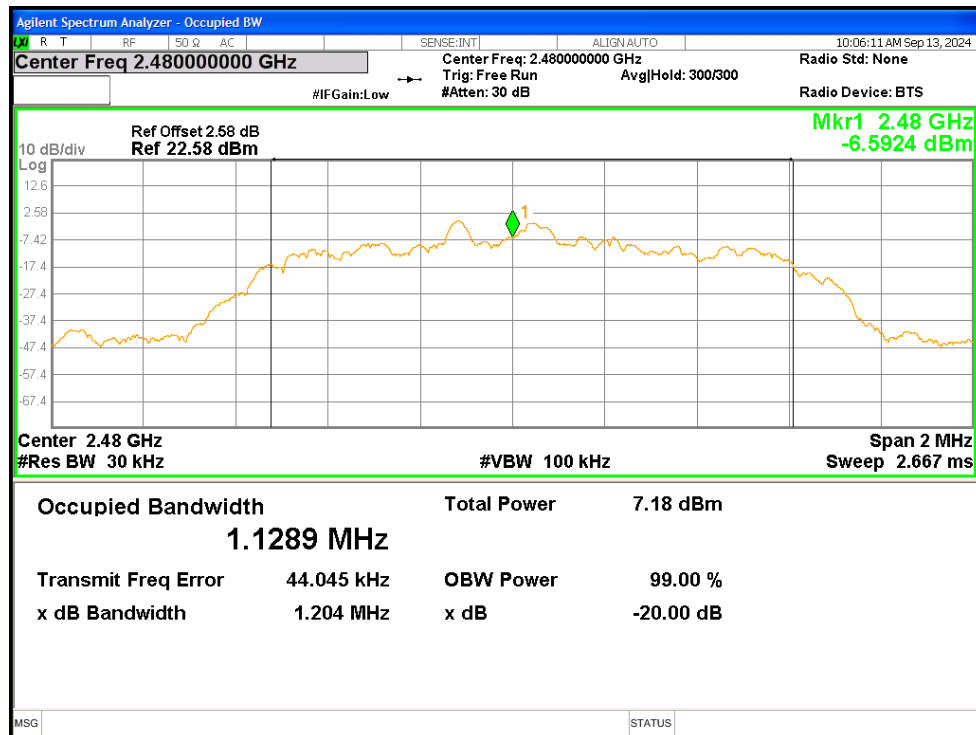


-20dB Bandwidth NVNT 3-DH1 2402MHz Ant1

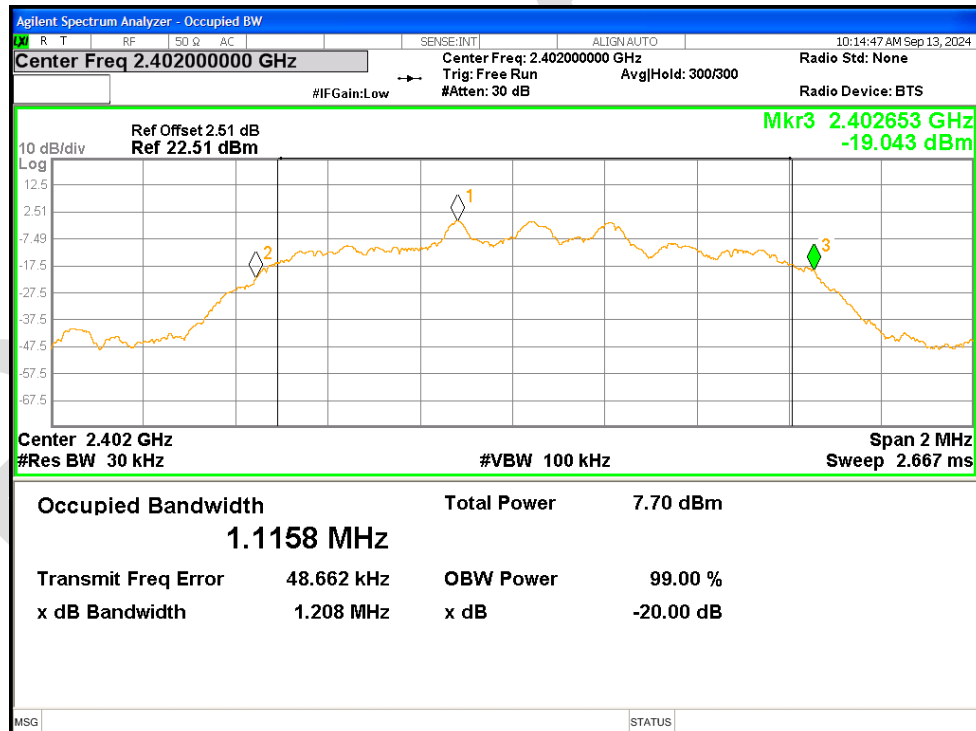

-20dB Bandwidth NVNT 3-DH1 2441MHz Ant1

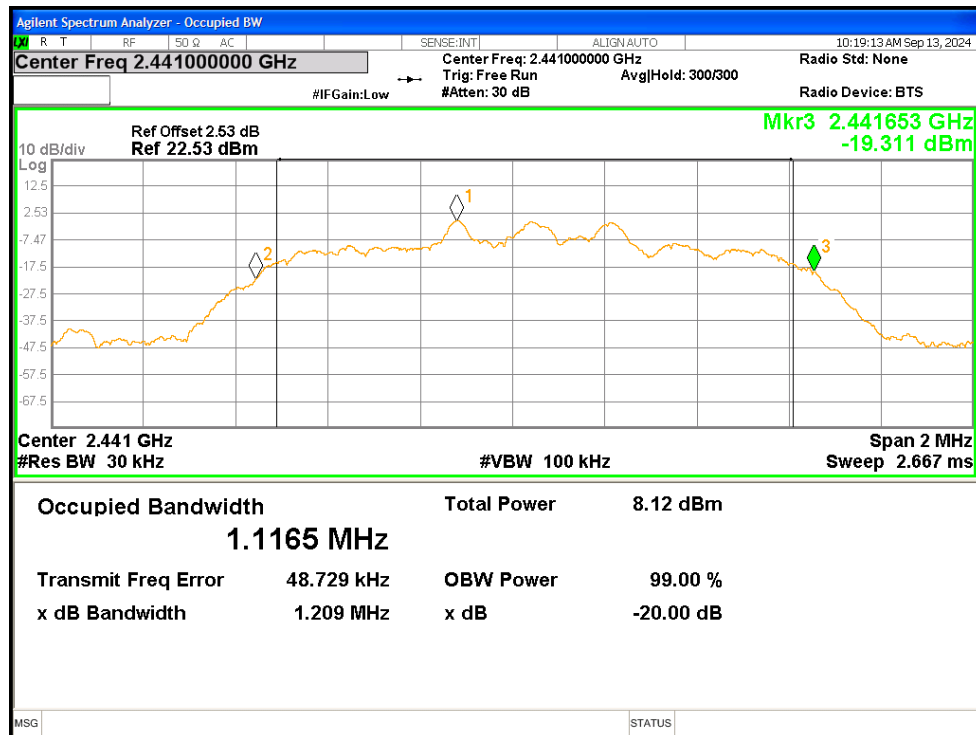


-20dB Bandwidth NVNT 3-DH1 2480MHz Ant1

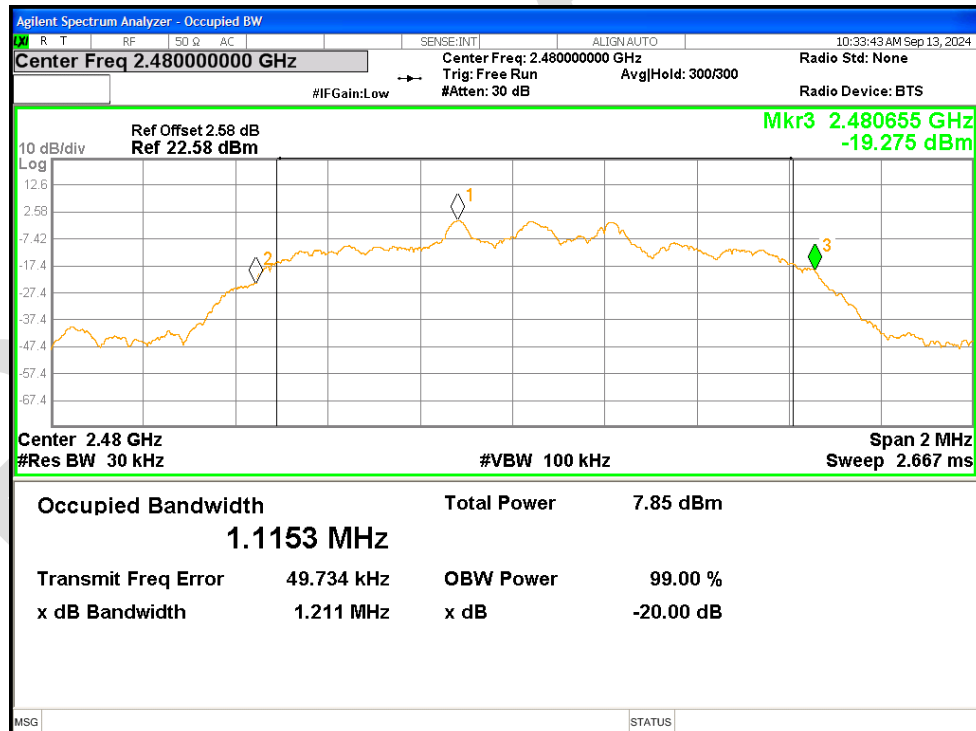


Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	1-DH1	2402	Ant1	0.86581
NVNT	1-DH1	2441	Ant1	0.87146
NVNT	1-DH1	2480	Ant1	0.85641
NVNT	2-DH1	2402	Ant1	1.1263
NVNT	2-DH1	2441	Ant1	1.1281
NVNT	2-DH1	2480	Ant1	1.1279
NVNT	3-DH1	2402	Ant1	1.1185
NVNT	3-DH1	2441	Ant1	1.1197
NVNT	3-DH1	2480	Ant1	1.1181


OBW NVNT 1-DH1 2402MHz Ant1

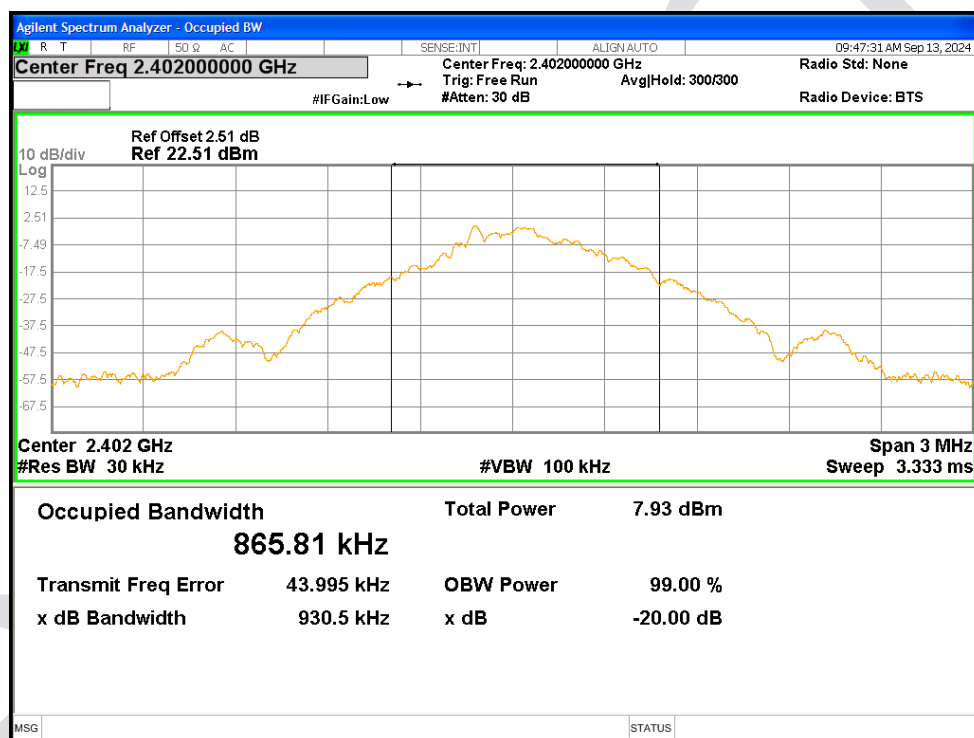


OBW NVNT 1-DH1 2441MHz Ant1

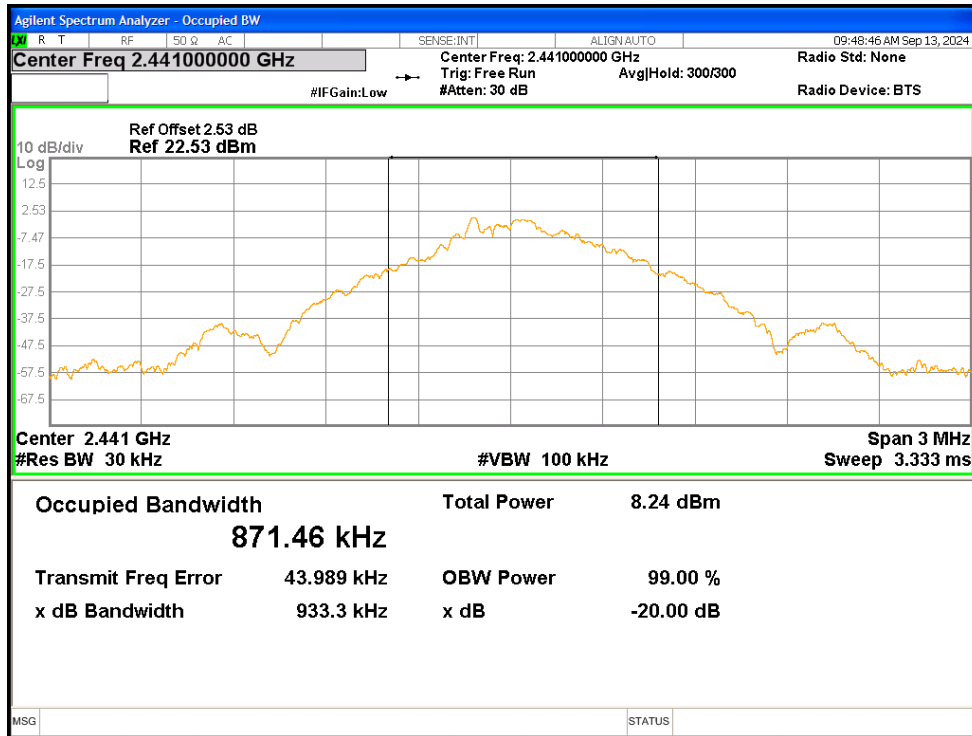


OBW NVNT 1-DH1 2480MHz Ant1

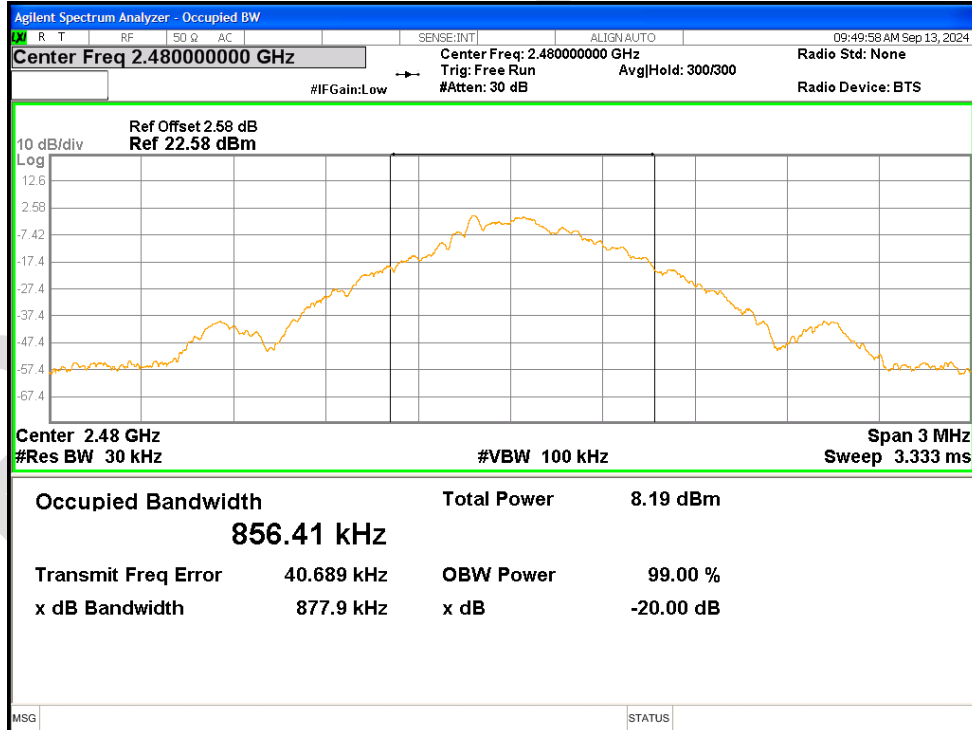


OBW NVNT 2-DH1 2402MHz Ant1

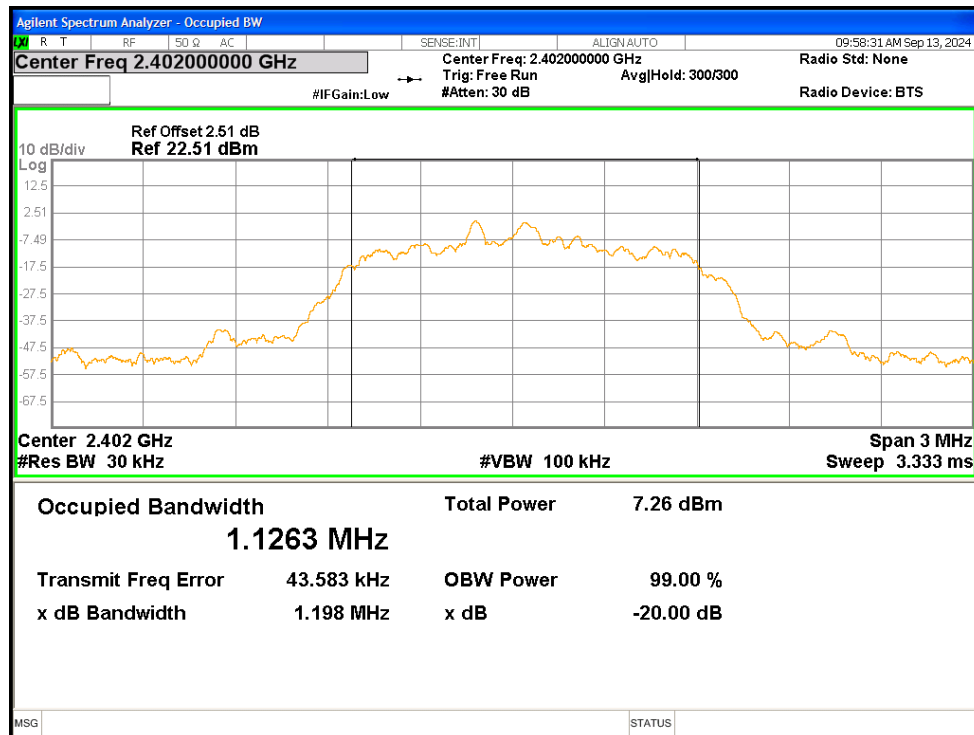


OBW NVNT 2-DH1 2441MHz Ant1

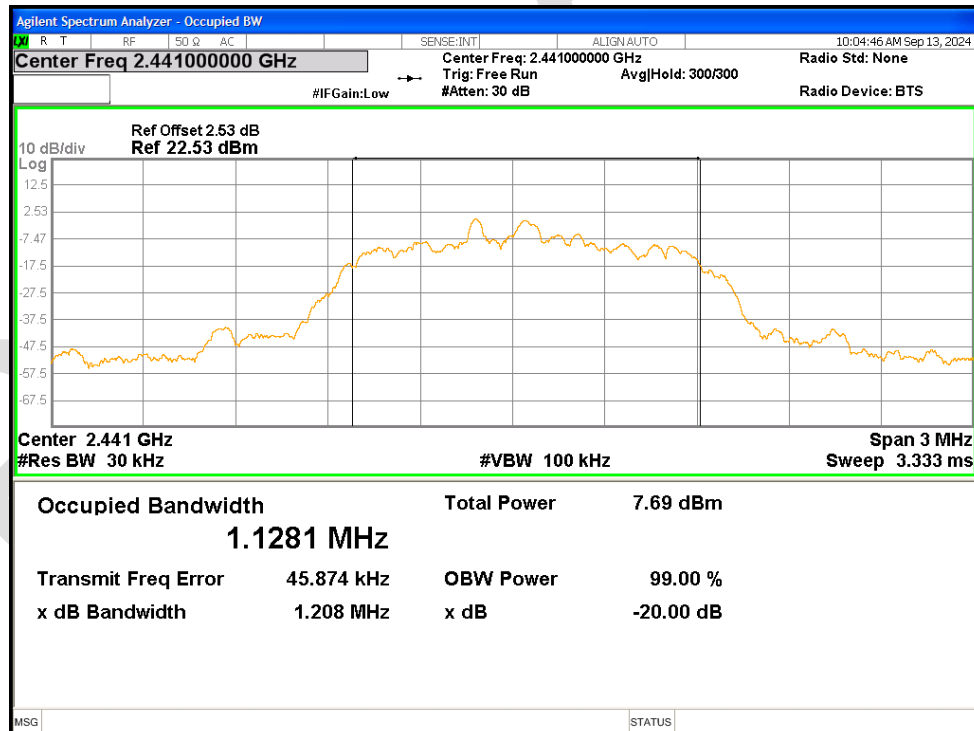


OBW NVNT 2-DH1 2480MHz Ant1

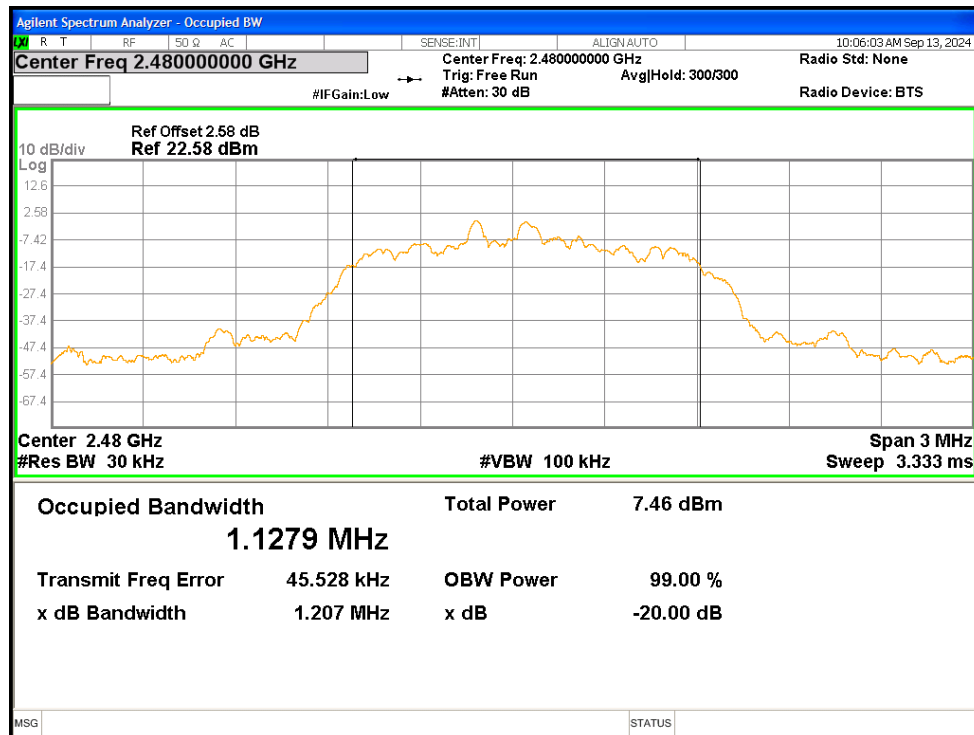


OBW NVNT 3-DH1 2402MHz Ant1

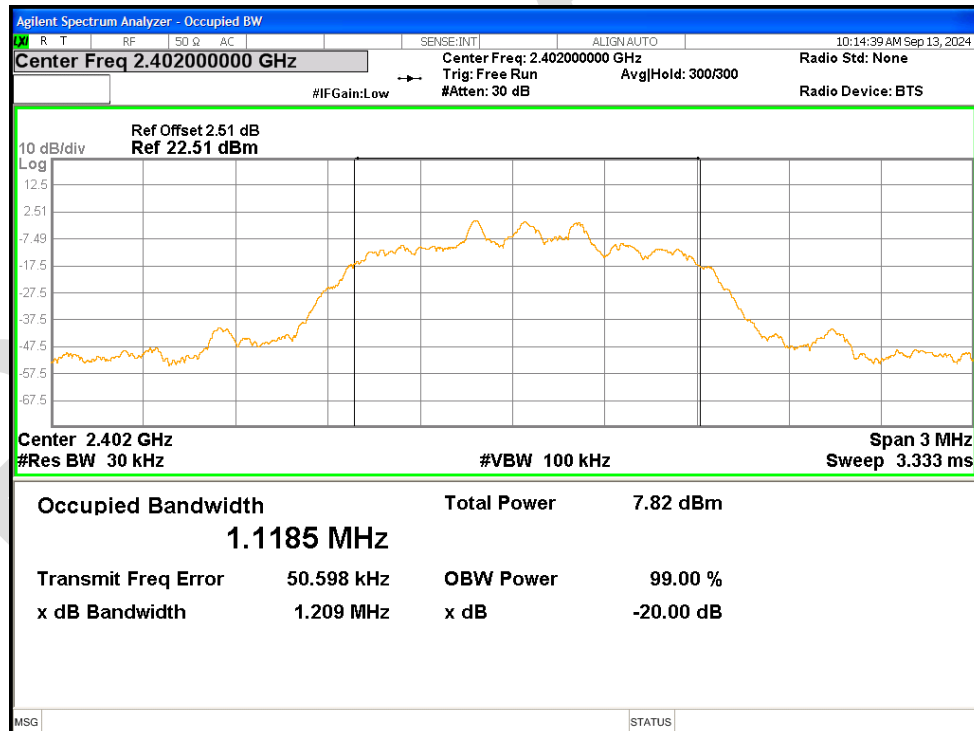

OBW NVNT 3-DH1 2441MHz Ant1

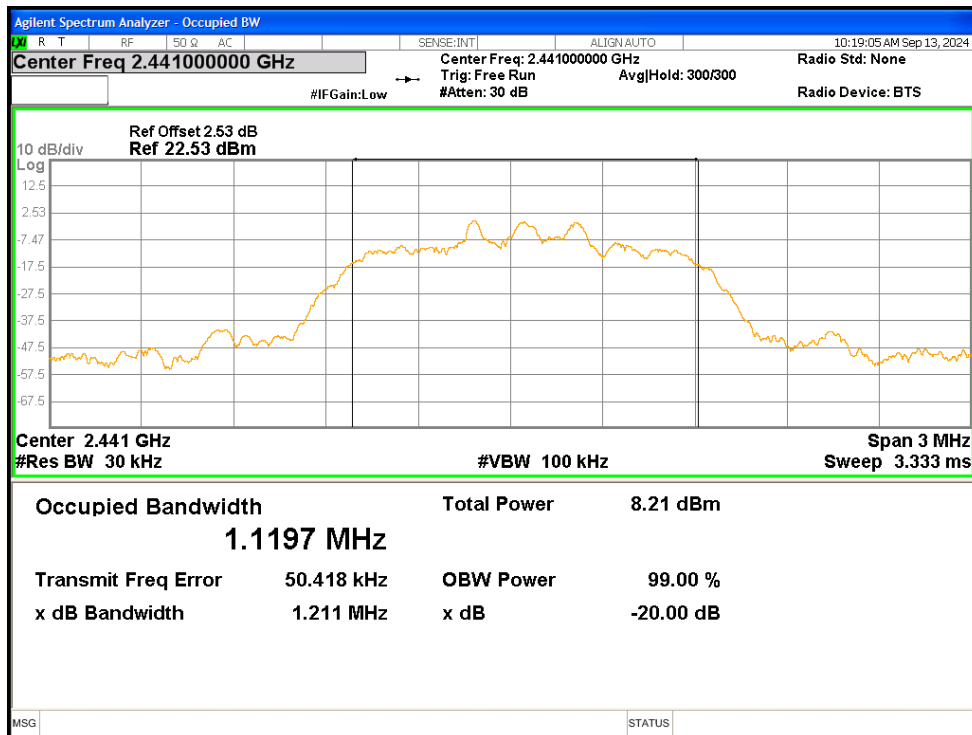


OBW NVNT 3-DH1 2480MHz Ant1

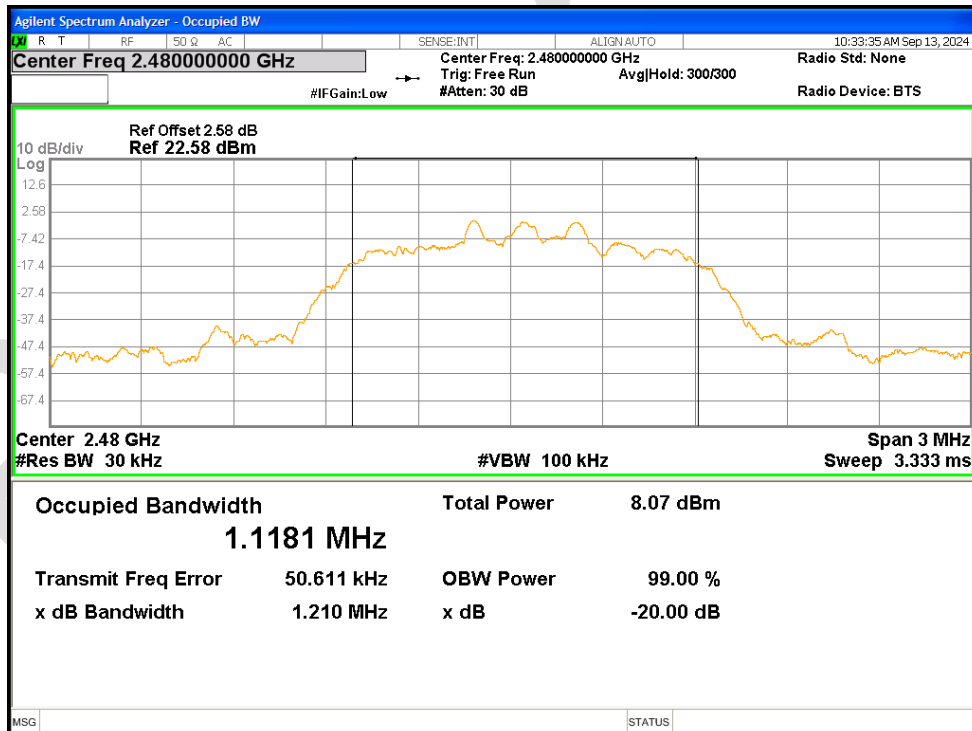


Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH1	2402	Ant1	No-Hopping	-56.78	-20	Pass
NVNT	1-DH1	2480	Ant1	No-Hopping	-55.32	-20	Pass
NVNT	2-DH1	2402	Ant1	No-Hopping	-56.02	-20	Pass
NVNT	2-DH1	2480	Ant1	No-Hopping	-54.87	-20	Pass
NVNT	3-DH1	2402	Ant1	No-Hopping	-57.2	-20	Pass
NVNT	3-DH1	2480	Ant1	No-Hopping	-56.05	-20	Pass


Band Edge NVNT 1-DH1 2402MHz Ant1 No-Hopping Ref

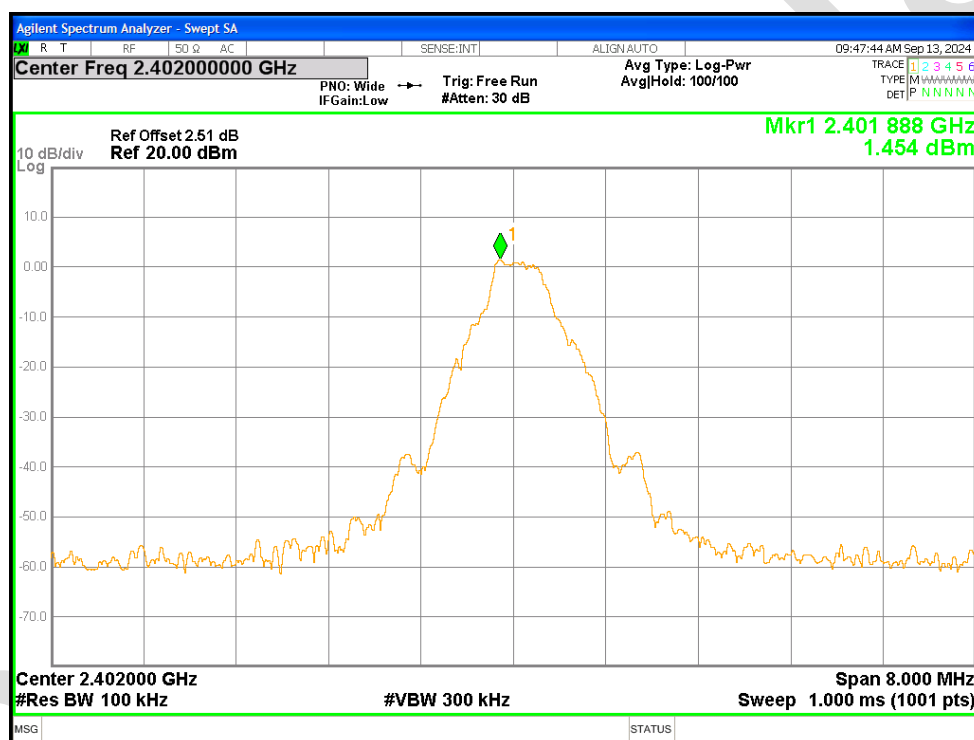


Band Edge NVNT 1-DH1 2402MHz Ant1 No-Hopping Emission

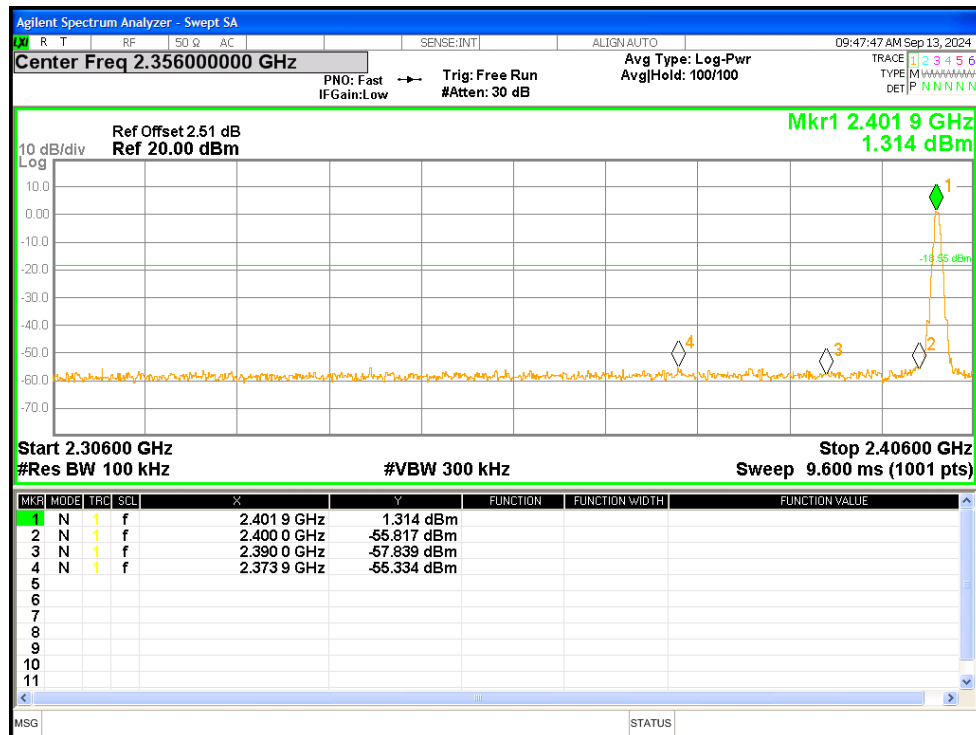


Band Edge NVNT 1-DH1 2480MHz Ant1 No-Hopping Ref

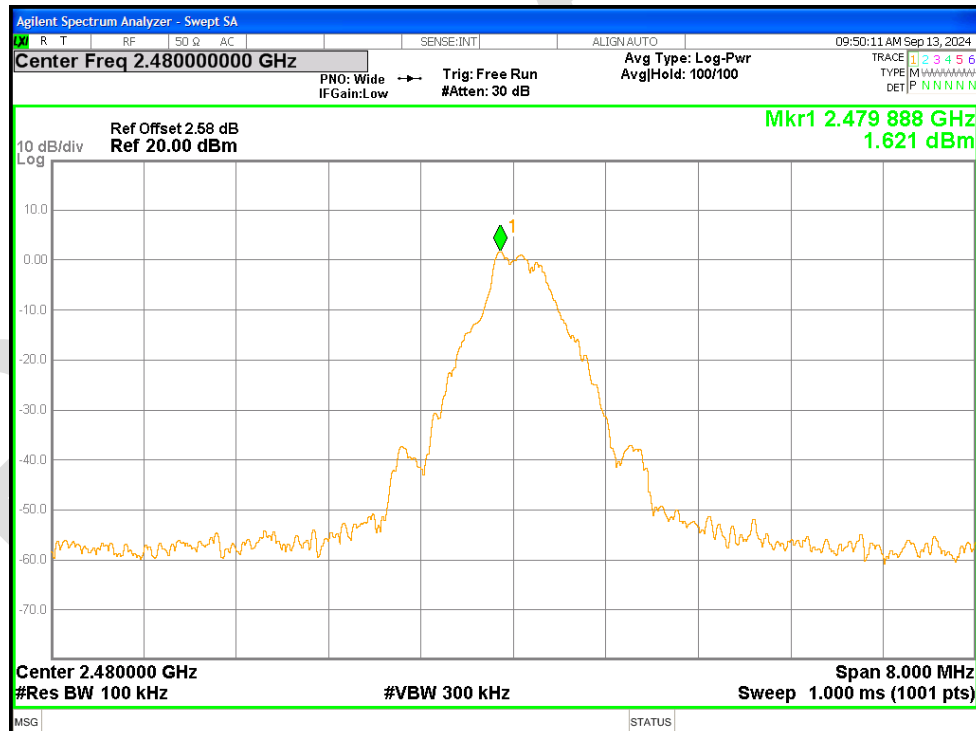


Band Edge NVNT 1-DH1 2480MHz Ant1 No-Hopping Emission

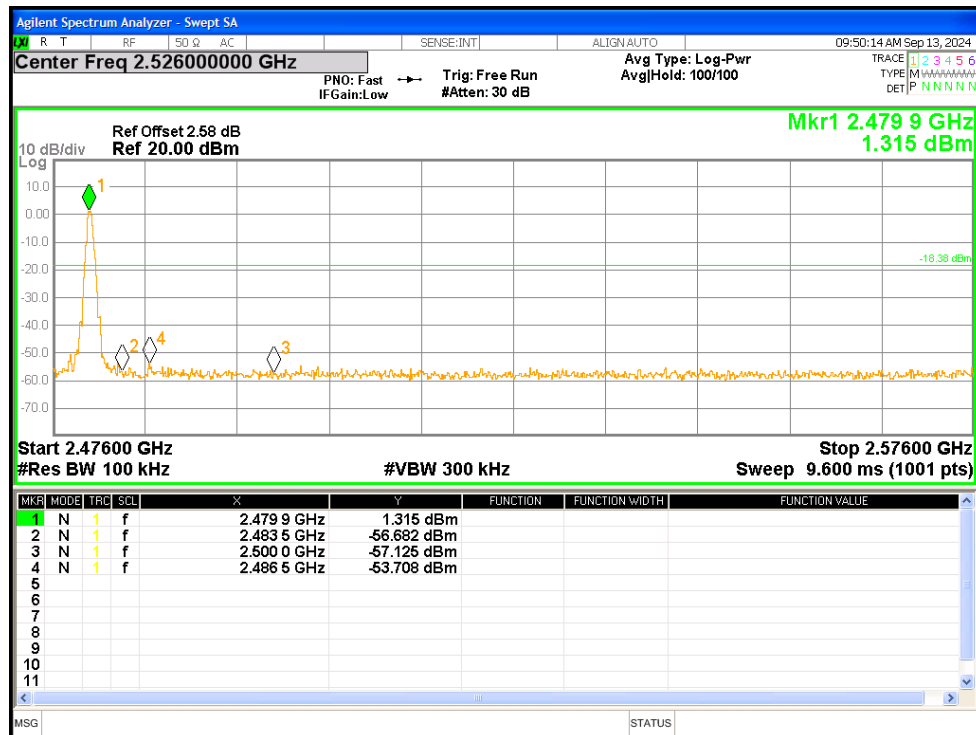


Band Edge NVNT 2-DH1 2402MHz Ant1 No-Hopping Ref

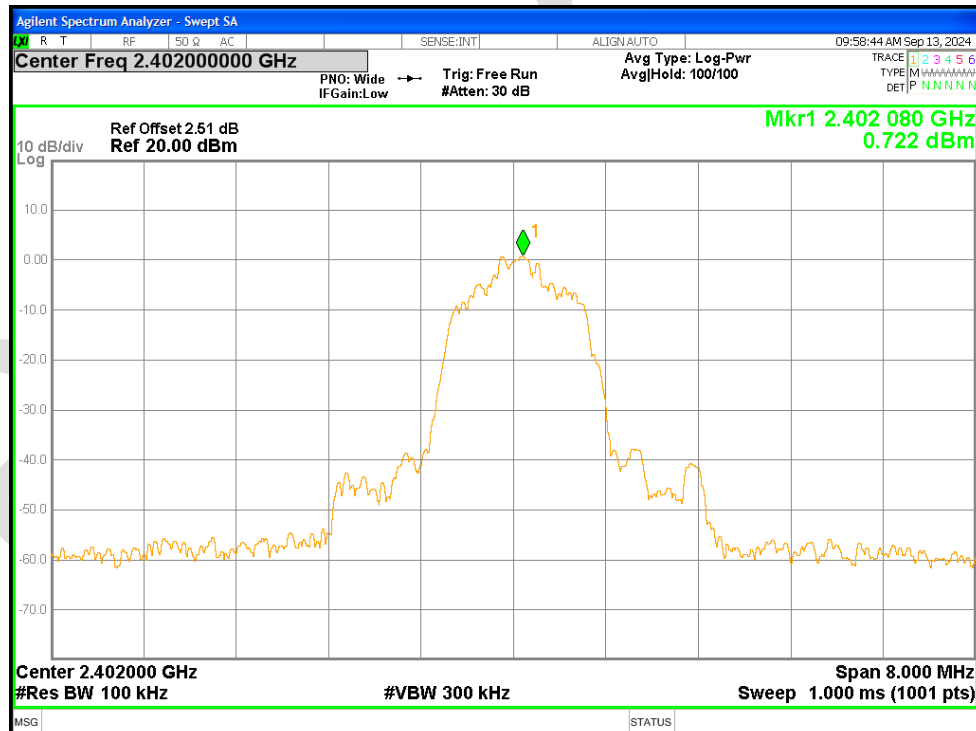

Band Edge NVNT 2-DH1 2402MHz Ant1 No-Hopping Emission

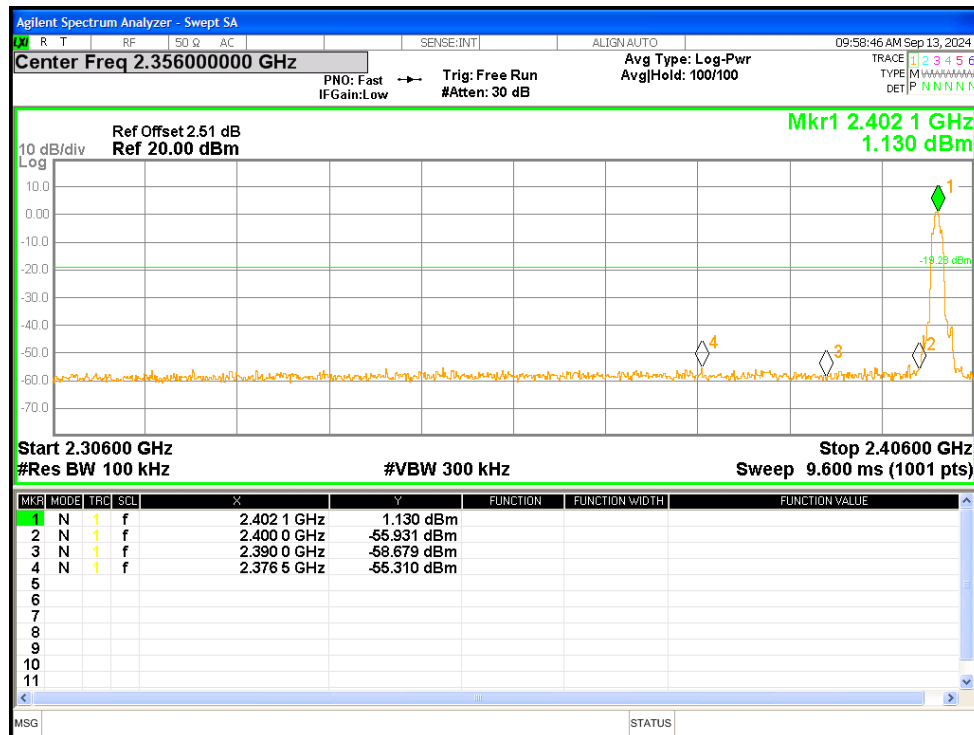

Band Edge NVNT 2-DH1 2480MHz Ant1 No-Hopping Ref

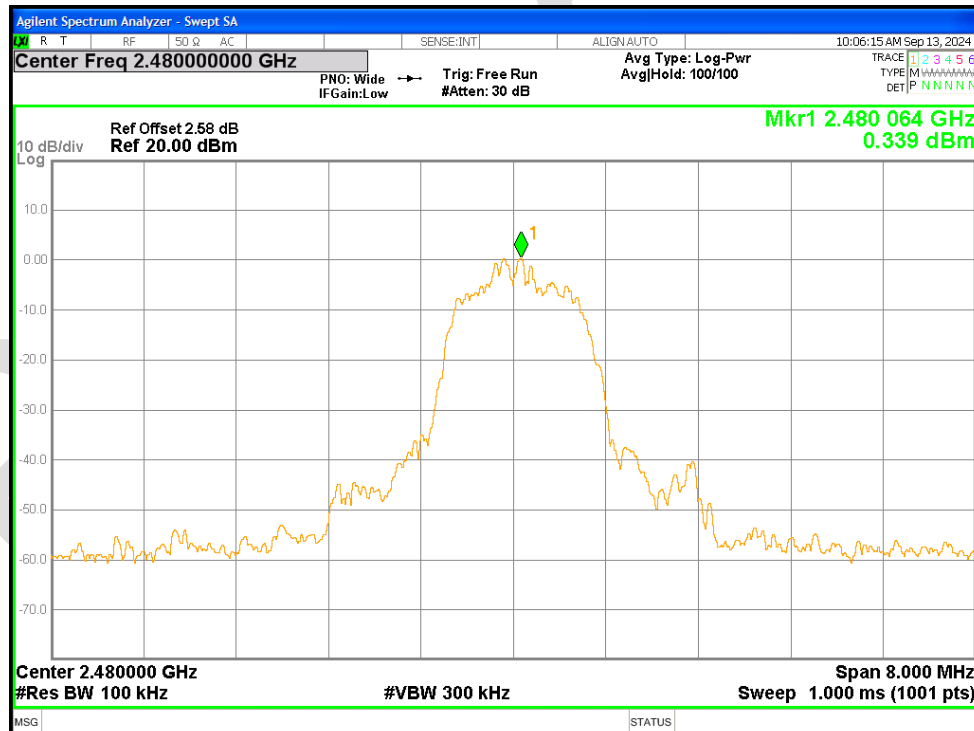

Band Edge NVNT 2-DH1 2480MHz Ant1 No-Hopping Emission