

Test Laboratory: Compliance Certification Services

Tablet Mode 3 Edge - Primary Portrait

DUT: Fujitsu; Type: N/A; Serial: N/A

Communication System: CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 51.7$; $\rho = 1000$ kg/m³
Phantom section: Flat Section


Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(8.7, 8.7, 8.7); Calibrated: 4/23/2008
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 11/16/2007
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:XXXX
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

EV-DO Rel. 0_M-Ch Ant 0/Area Scan (10x16x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.050 mW/g

EV-DO Rel. 0_M-Ch Ant 0/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 1.99 V/m; Power Drift = 0.139 dB
Peak SAR (extrapolated) = 0.098 W/kg
SAR(1 g) = 0.045 mW/g; SAR(10 g) = 0.026 mW/g
Maximum value of SAR (measured) = 0.058 mW/g

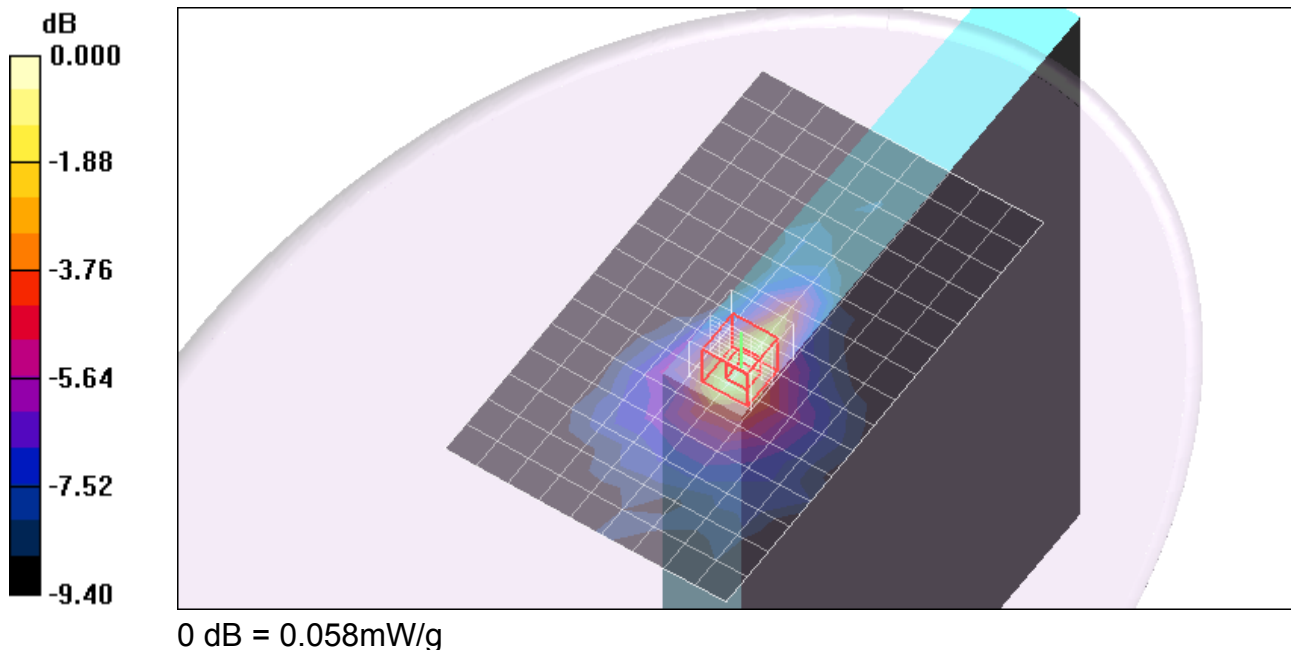

Test Laboratory: Compliance Certification Services

Tablet Mode 3 Edge - Primary Portrait

DUT: Fujitsu; Type: N/A; Serial: N/A

Communication System: CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 51.7$; $\rho = 1000$ kg/m³
Phantom section: Flat Section


Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(8.7, 8.7, 8.7); Calibrated: 4/23/2008
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 11/16/2007
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:XXXX
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

EV-DO Rel. 0_M-Ch Ant 90/Area Scan (10x16x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.525 mW/g

EV-DO Rel. 0_M-Ch Ant 90/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 3.56 V/m; Power Drift = 0.260 dB
Peak SAR (extrapolated) = 0.950 W/kg
SAR(1 g) = 0.438 mW/g; SAR(10 g) = 0.232 mW/g
Maximum value of SAR (measured) = 0.554 mW/g

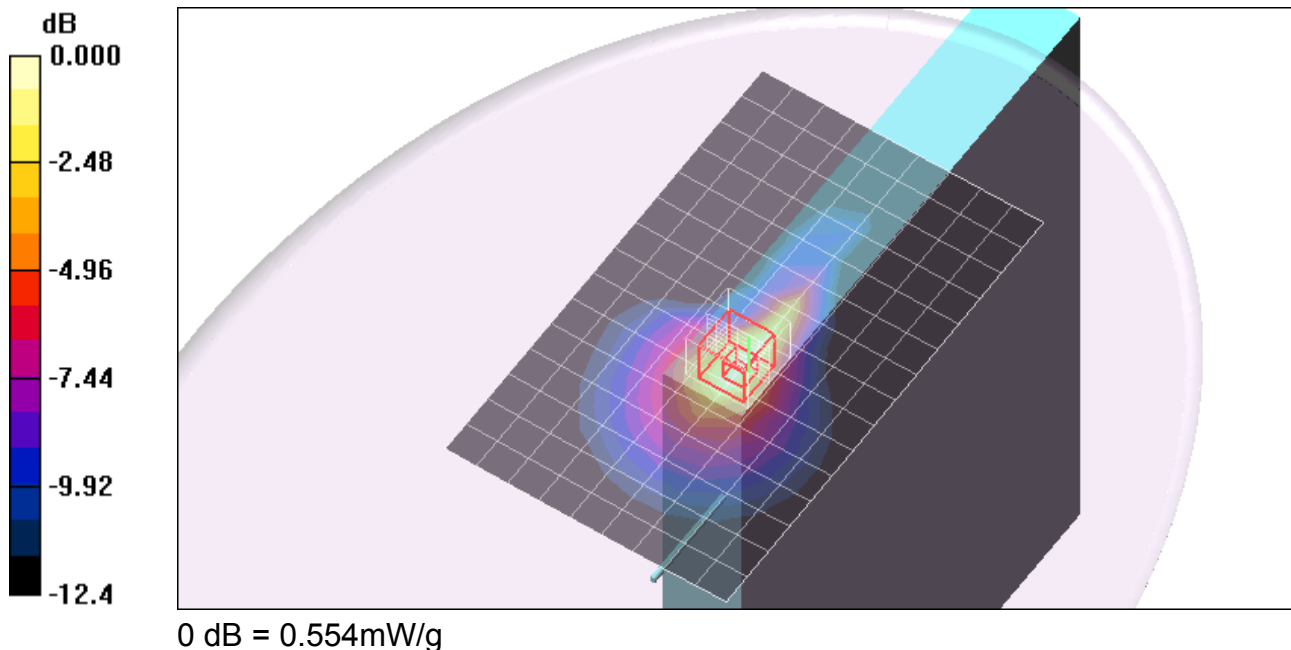


Test Laboratory: Compliance Certification Services

Tablet Mode 3 Edge - Primary Portrait

DUT: Fujitsu; Type: N/A; Serial: N/A

Communication System: CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

EV-DO Rel. 0_M-Ch Ant 90/Z Scan (1x1x34): Measurement grid: dx=20mm, dy=20mm, dz=3mm
Maximum value of SAR (measured) = 0.549 mW/g

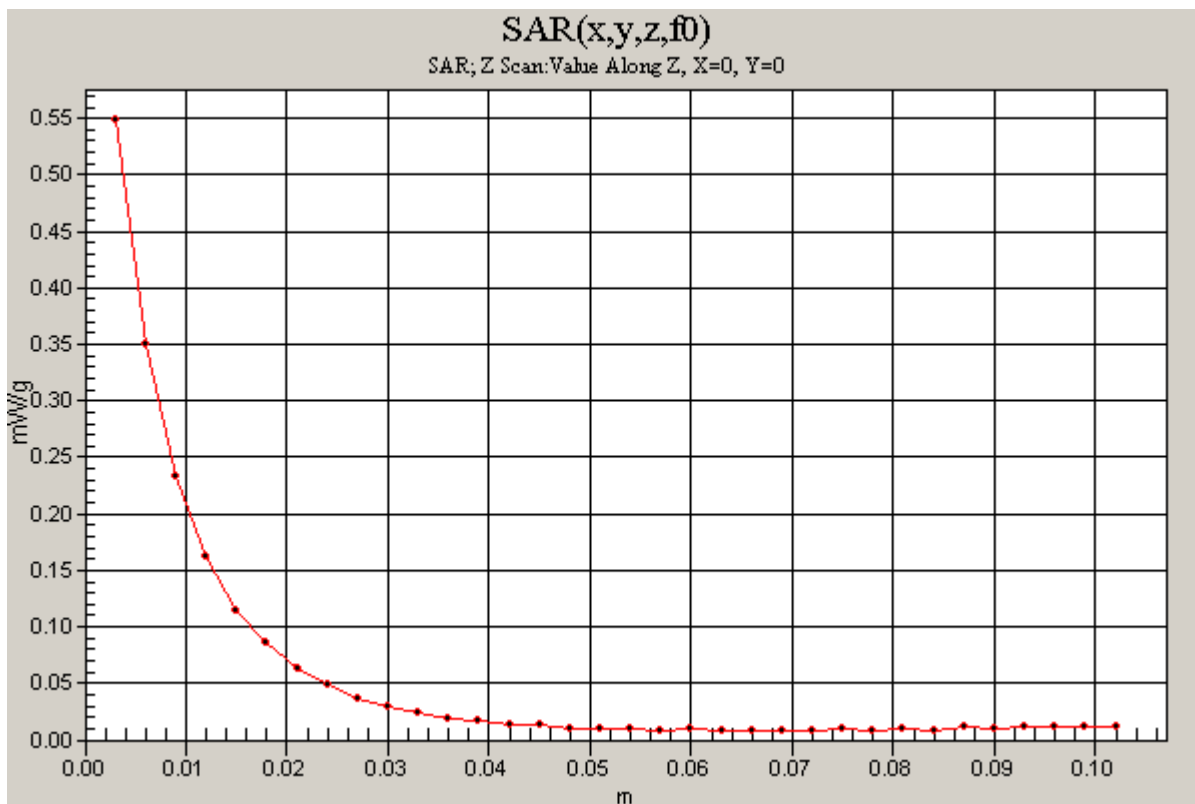

Test Laboratory: Compliance Certification Services

Tablet Mode 3 Edge - Primary Portrait

DUT: Fujitsu; Type: N/A; Serial: N/A

Communication System: CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 51.7$; $\rho = 1000$ kg/m³
Phantom section: Flat Section


Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(8.7, 8.7, 8.7); Calibrated: 4/23/2008
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 11/16/2007
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:XXXX
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

EV-DO Rev. A_M-Ch Ant 90/Area Scan (10x16x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.425 mW/g

EV-DO Rev. A_M-Ch Ant 90/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 3.37 V/m; Power Drift = 0.238 dB
Peak SAR (extrapolated) = 0.889 W/kg
SAR(1 g) = 0.383 mW/g; SAR(10 g) = 0.202 mW/g
Maximum value of SAR (measured) = 0.491 mW/g

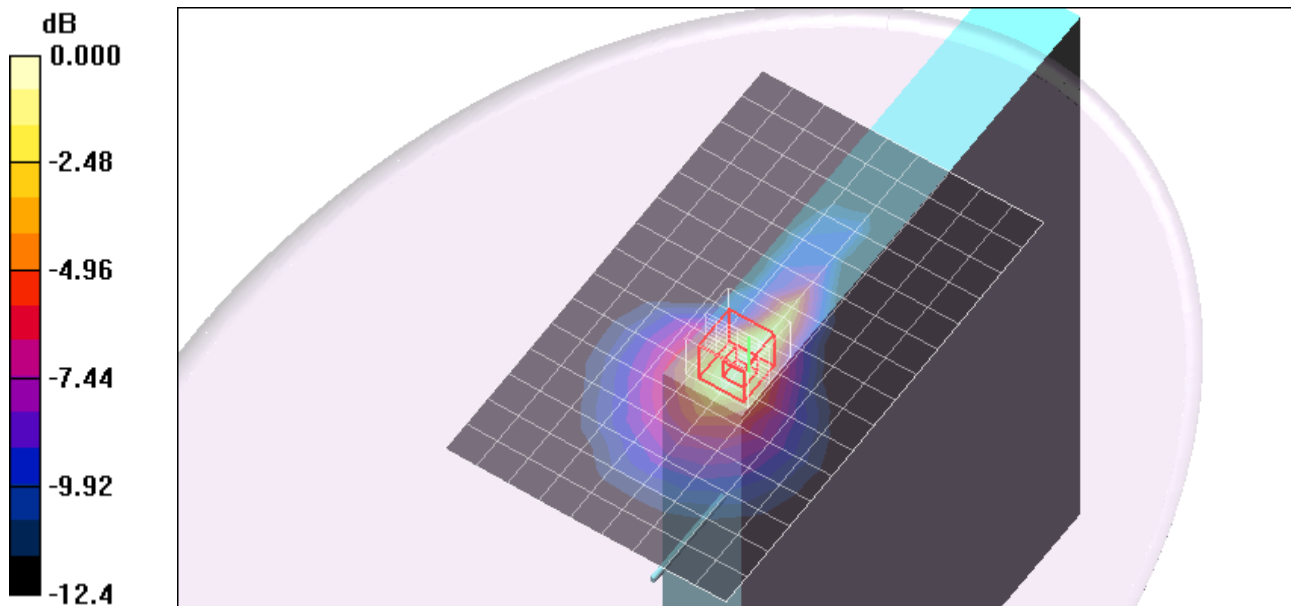

0 dB = 0.491mW/g

Test Laboratory: Compliance Certification Services

Tablet Mode 4 Edge - Secondary Portrait

DUT: Fujitsu; Type: N/A; Serial: N/A

Communication System: CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.5 \text{ mho/m}$; $\epsilon_r = 51.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(8.7, 8.7, 8.7); Calibrated: 4/23/2008
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 11/16/2007
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:XXXX
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

EV-DO Rel. 0_M-Ch Ant 0/Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.017 mW/g


EV-DO Rel. 0_M-Ch Ant 0/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 2.63 V/m; Power Drift = 0.567 dB

Peak SAR (extrapolated) = 0.026 W/kg

SAR(1 g) = 0.018 mW/g; SAR(10 g) = 0.013 mW/g

Maximum value of SAR (measured) = 0.021 mW/g

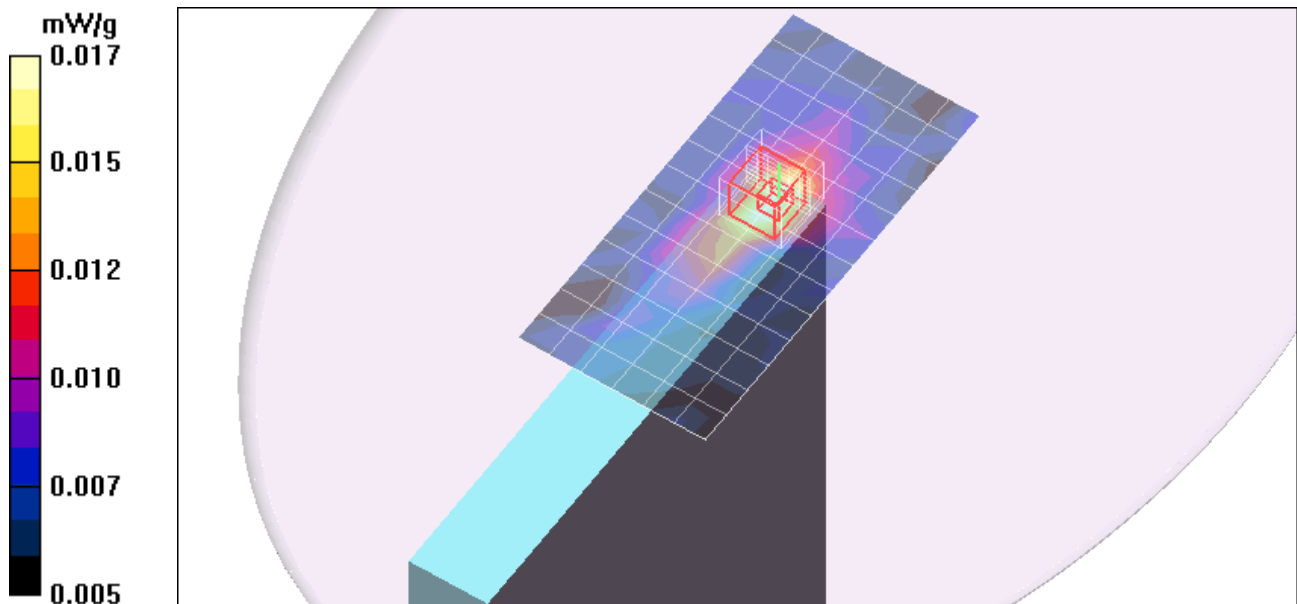

Test Laboratory: Compliance Certification Services

Tablet Mode 4 Edge - Secondary Portrait

DUT: Fujitsu; Type: N/A; Serial: N/A

Communication System: CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.5 \text{ mho/m}$; $\epsilon_r = 51.7$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(8.7, 8.7, 8.7); Calibrated: 4/23/2008
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 11/16/2007
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:XXXX
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

EV-DO Rel. 0_M-Ch Ant 90/Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.198 mW/g


EV-DO Rel. 0_M-Ch Ant 90/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 7.25 V/m; Power Drift = 0.263 dB

Peak SAR (extrapolated) = 0.323 W/kg

SAR(1 g) = 0.181 mW/g; SAR(10 g) = 0.103 mW/g

Maximum value of SAR (measured) = 0.227 mW/g

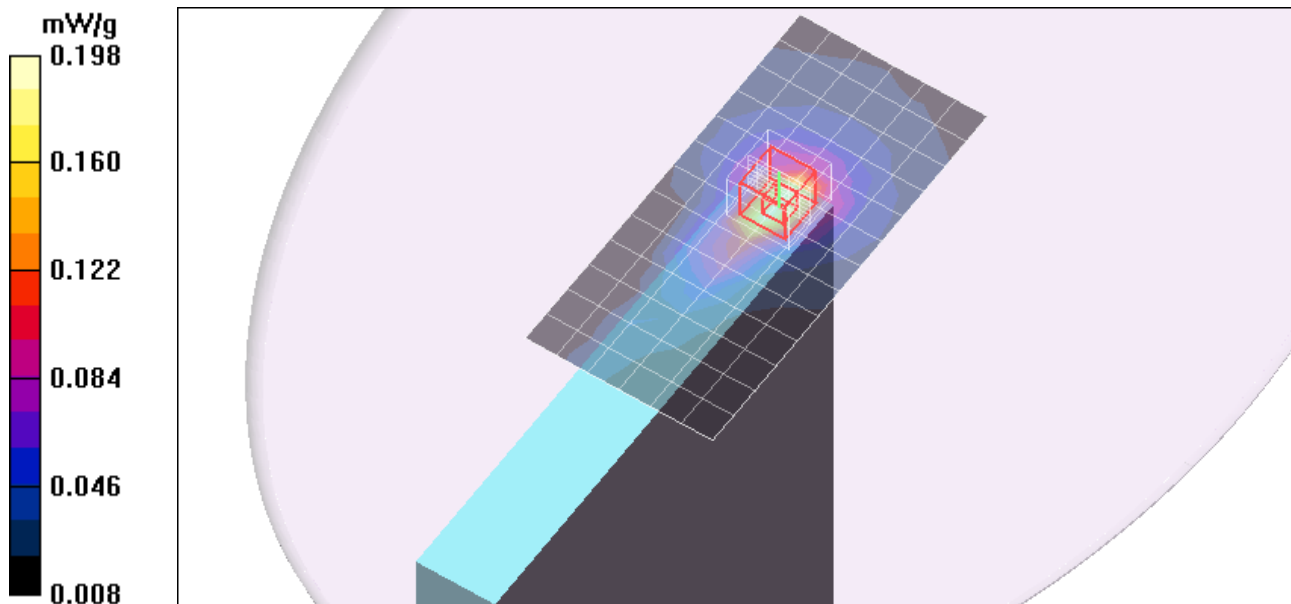

Test Laboratory: Compliance Certification Services

Tablet Mode 4 Edge - Secondary Portrait

DUT: Fujitsu; Type: N/A; Serial: N/A

Communication System: CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 51.7$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(8.7, 8.7, 8.7); Calibrated: 4/23/2008
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 11/16/2007
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:XXXX
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

EV-DO Rev. A_M-Ch Ant 90/Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.167 mW/g


EV-DO Rev. A_M-Ch Ant 90/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 6.80 V/m; Power Drift = 0.390 dB

Peak SAR (extrapolated) = 0.296 W/kg

SAR(1 g) = 0.157 mW/g; SAR(10 g) = 0.090 mW/g

Maximum value of SAR (measured) = 0.198 mW/g

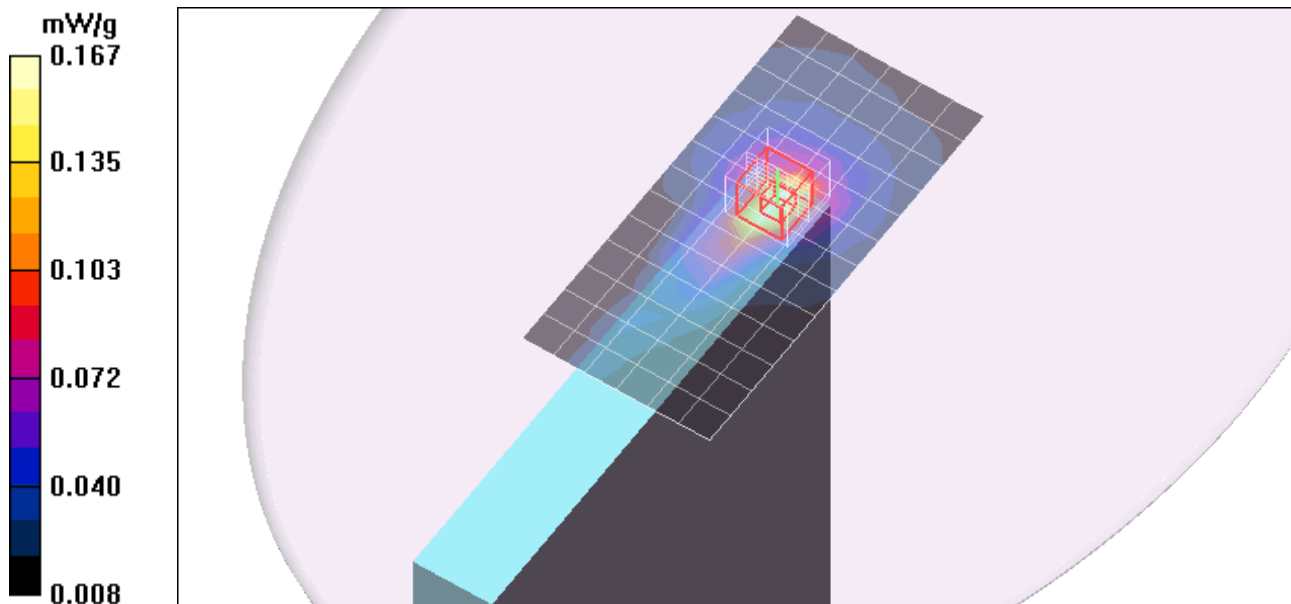

Test Laboratory: Compliance Certification Services

Tablet Mode 5 Bottom Face - Lapheld

DUT: Fujitsu; Type: N/A; Serial: N/A


Communication System: CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.49 \text{ mho/m}$; $\epsilon_r = 51.8$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

- DASY4 Configuration:
- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
 - Probe: EX3DV3 - SN3531; ConvF(8.7, 8.7, 8.7); Calibrated: 4/23/2008
 - Sensor-Surface: 3mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn500; Calibrated: 11/16/2007
 - Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:XXXX
 - Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

EV-DO Rel. 0_M-Ch Ant 0/Area Scan (10x17x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.022 mW/g

EV-DO Rel. 0_M-Ch Ant 0/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 2.90 V/m; Power Drift = -0.101 dB
Peak SAR (extrapolated) = 0.029 W/kg
SAR(1 g) = 0.021 mW/g; SAR(10 g) = 0.018 mW/g
Maximum value of SAR (measured) = 0.023 mW/g

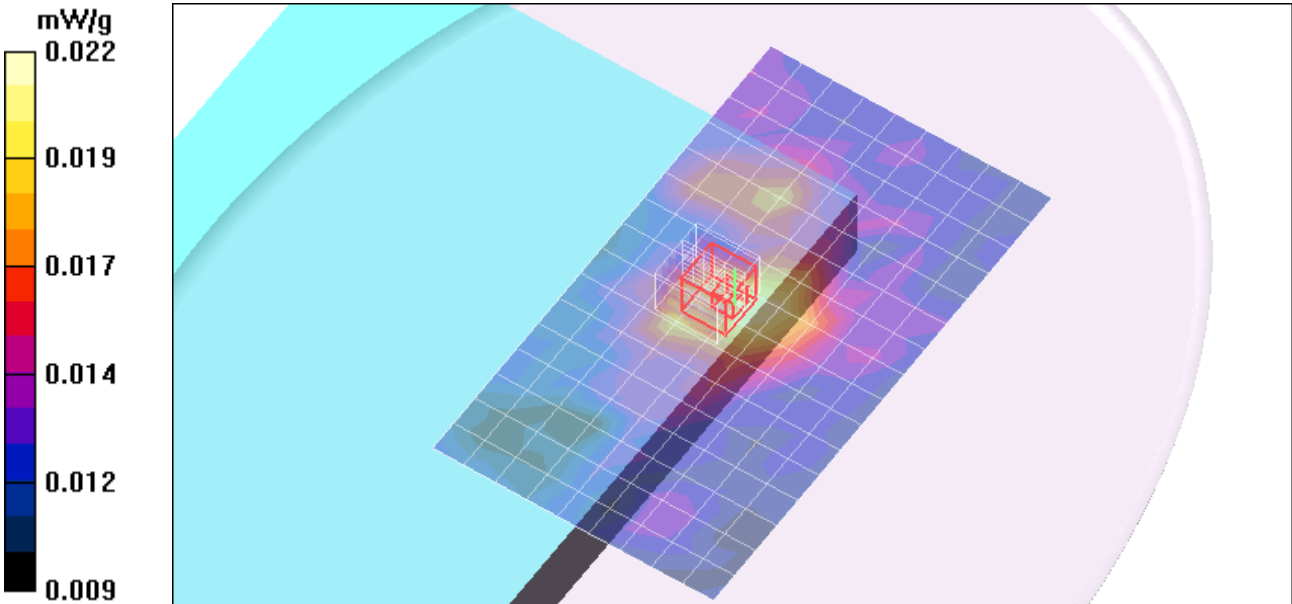

Test Laboratory: Compliance Certification Services

Tablet Mode 5 Bottom Face - Lapheld

DUT: Fujitsu; Type: N/A; Serial: N/A

Communication System: CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(8.7, 8.7, 8.7); Calibrated: 4/23/2008
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 11/16/2007
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:XXXX
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

EV-DO Rel. 0_M-Ch Ant 90/Area Scan (9x17x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.229 mW/g


EV-DO Rel. 0_M-Ch Ant 90/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 4.96 V/m; Power Drift = 0.387 dB

Peak SAR (extrapolated) = 0.338 W/kg

SAR(1 g) = 0.213 mW/g; SAR(10 g) = 0.134 mW/g

Maximum value of SAR (measured) = 0.251 mW/g

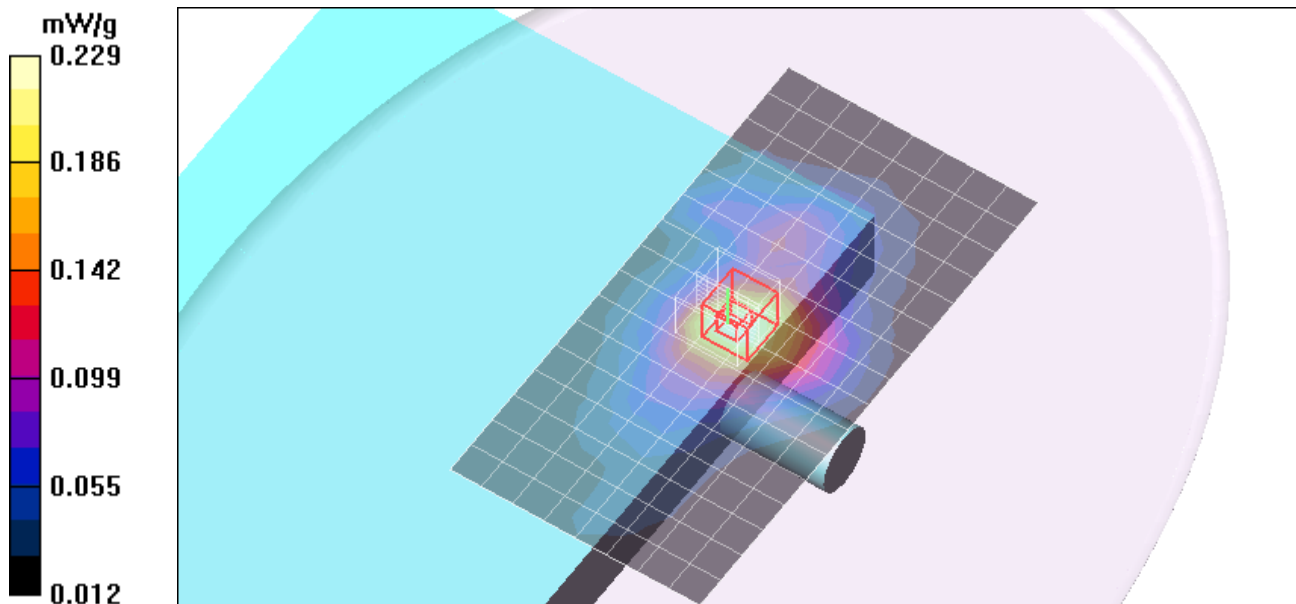

Test Laboratory: Compliance Certification Services

Tablet Mode 5 Bottom Face - Lapheld

DUT: Fujitsu; Type: N/A; Serial: N/A

Communication System: CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(8.7, 8.7, 8.7); Calibrated: 4/23/2008
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 11/16/2007
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:XXXX
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

EV-DO Rev. A_M-Ch Ant 90/Area Scan (9x17x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.203 mW/g

EV-DO Rev. A_M-Ch Ant 90/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 4.83 V/m; Power Drift = -0.219 dB

Peak SAR (extrapolated) = 0.299 W/kg

SAR(1 g) = 0.187 mW/g; SAR(10 g) = 0.118 mW/g

Maximum value of SAR (measured) = 0.219 mW/g

