

Combined

DASY4 Configuration for b mode - M ch - Volume Scan/Volume Scan:

Date/Time: 2/12/2008 3:21:23 PM

Test Laboratory: Compliance Certification Services

File Name: [T2010 Secondary Landscape - Volume Scan - Atheros 2.4 GHz.da4](#)

DUT: T2010 Tablet ; Type: Laptop; Serial: N/A

Communication System: 802.11bg; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: M2450 MHz Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.97$ mho/m; $\epsilon_r = 50.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

- Probe: EX3DV4 - SN3554; ConvF(6.14, 6.14, 6.14); Calibrated: 4/24/2007
 - Sensor-Surface: 4mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn500; Calibrated: 11/16/2007
 - Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
 - Measurement SW: DASY4, V4.7 Build 55
-

DASY4 Configuration for cell band/1xRTT - M ch - Volume Scan/Volume Scan:

Date/Time: 2/8/2008 9:32:50 PM

Test Laboratory: Compliance Certification Services

File Name: [T2010 Secondary Landscape - Cell Band Volume Scan.da4](#)

DUT: T2010 Tablet ; Type: Laptop; Serial: N/A

Communication System: CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: M835 MHz Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.957$ mho/m; $\epsilon_r = 54.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section



Measurement Standard: DASY4 (High Precision Assessment)

- Probe: EX3DV4 - SN3554; ConvF(8, 8, 8); Calibrated: 4/24/2007
 - Sensor-Surface: 4mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn500; Calibrated: 11/16/2007
 - Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
 - Measurement SW: DASY4, V4.7 Build 55
-

Multi Band Result:

SAR(1 g) = 0.855 mW/g; SAR(10 g) = 0.412 mW/g

Maximum value of SAR (measured) = 0.937 mW/g

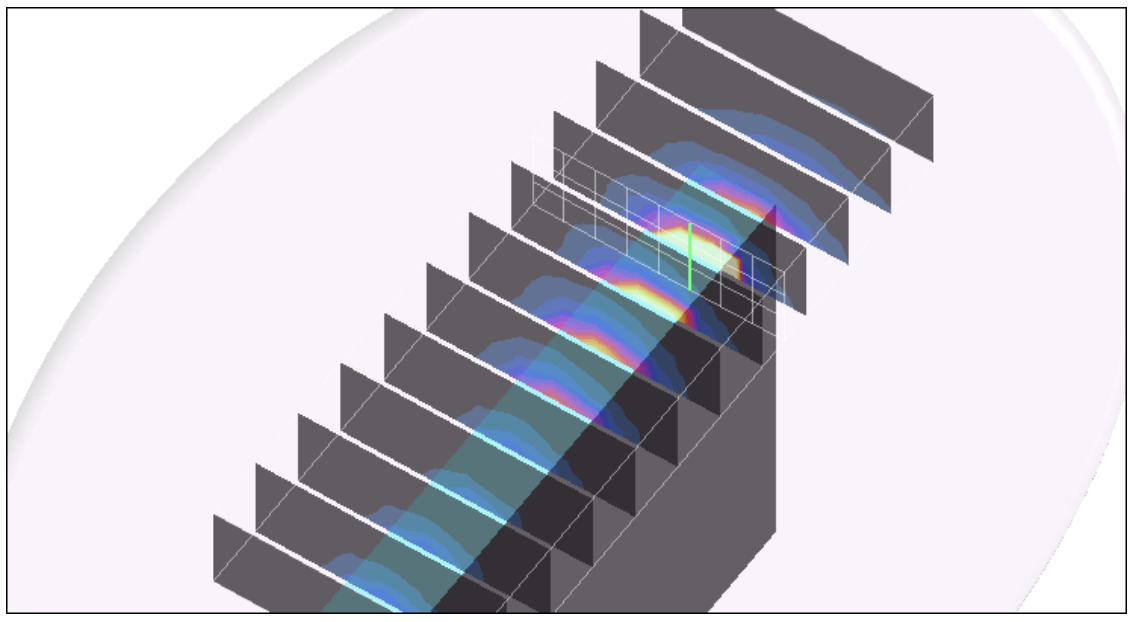

Combined

DASY4 Configuration for b mode Volume Scan - M ch/Volume Scan:

Date/Time: 2/12/2008 2:29:46 PM

Test Laboratory: Compliance Certification Services

File Name: [T2010 Secondary Portrait - Volume scan Atheros 2.4 GHz.da4](#)

DUT: T2010 Tablet ; Type: Laptop; Serial: N/A

Communication System: 802.11bg; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: M2450 MHz Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.97$ mho/m; $\epsilon_r = 50.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

- Probe: EX3DV4 - SN3554; ConvF(6.14, 6.14, 6.14); Calibrated: 4/24/2007
 - Sensor-Surface: 4mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn500; Calibrated: 11/16/2007
 - Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
 - Measurement SW: DASY4, V4.7 Build 55
-

DASY4 Configuration for cell band/1xRTT Volume Scan - M ch/Volume Scan:

Date/Time: 2/8/2008 5:04:15 PM

Test Laboratory: Compliance Certification Services

File Name: [T2010 Secondary Portrait - Cell Band Volume scan.da4](#)

DUT: T2010 Tablet ; Type: Laptop; Serial: N/A

Communication System: CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: M835 MHz Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.957$ mho/m; $\epsilon_r = 54.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section



Measurement Standard: DASY4 (High Precision Assessment)

- Probe: EX3DV4 - SN3554; ConvF(8, 8, 8); Calibrated: 4/24/2007
 - Sensor-Surface: 4mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn500; Calibrated: 11/16/2007
 - Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
 - Measurement SW: DASY4, V4.7 Build 55
-

Multi Band Result:

SAR(1 g) = 0.662 mW/g; SAR(10 g) = 0.354 mW/g

Maximum value of SAR (measured) = 0.712 mW/g

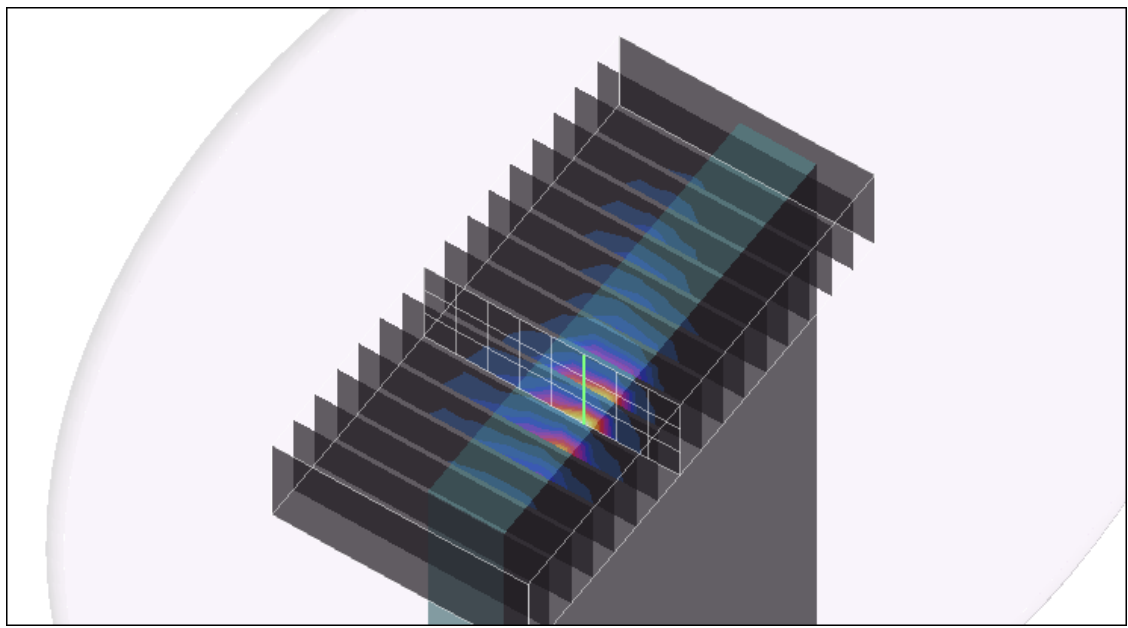

Combined

DASY4 Configuration for g mode - M ch - Volume Scan/Volume Scan:

Date/Time: 2/12/2008 12:21:44 PM

Test Laboratory: Compliance Certification Services

File Name: [T2010 Secondary Landscape - Volume Scan - Intel 2.4 GHz.da4](#)

DUT: T2010 Tablet ; Type: Laptop; Serial: N/A

Communication System: 802.11bg; Frequency: 2437 MHz; Duty Cycle: 1:1.1

Medium: M2450 MHz Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.97$ mho/m; $\epsilon_r = 50.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

- Probe: EX3DV4 - SN3554; ConvF(6.14, 6.14, 6.14); Calibrated: 4/24/2007
 - Sensor-Surface: 4mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn500; Calibrated: 11/16/2007
 - Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
 - Measurement SW: DASY4, V4.7 Build 55
-

DASY4 Configuration for cell band/1xRTT - M ch - Volume Scan/Volume Scan:

Date/Time: 2/8/2008 9:32:50 PM

Test Laboratory: Compliance Certification Services

File Name: [T2010 Secondary Landscape - Cell Band Volume Scan.da4](#)

DUT: T2010 Tablet ; Type: Laptop; Serial: N/A

Communication System: CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: M835 MHz Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.957$ mho/m; $\epsilon_r = 54.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section



Measurement Standard: DASY4 (High Precision Assessment)

- Probe: EX3DV4 - SN3554; ConvF(8, 8, 8); Calibrated: 4/24/2007
 - Sensor-Surface: 4mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn500; Calibrated: 11/16/2007
 - Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
 - Measurement SW: DASY4, V4.7 Build 55
-

Multi Band Result:

SAR(1 g) = 0.375 mW/g; SAR(10 g) = 0.205 mW/g

Maximum value of SAR (measured) = 0.350 mW/g

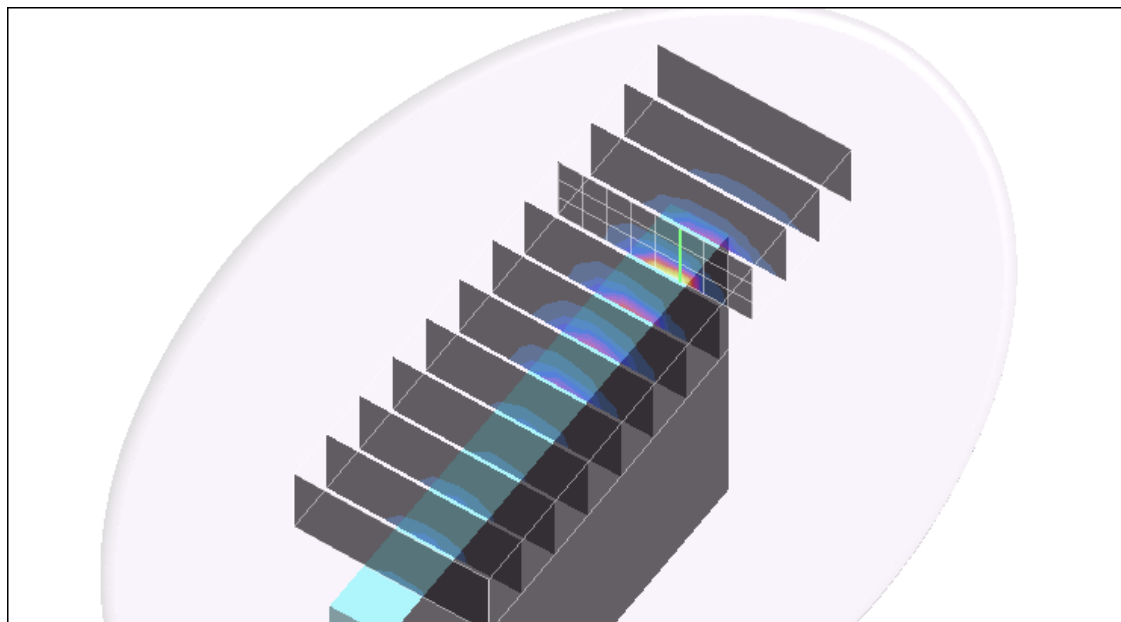

Combined

DASY4 Configuration for g mode Volume Scan - M ch/Volume Scan:

Date/Time: 2/12/2008 1:33:21 PM

Test Laboratory: Compliance Certification Services

File Name: [T2010 Secondary Portrait - Volume scan Intel 2.4 GHz.da4](#)

DUT: T2010 Tablet ; Type: Laptop; Serial: N/A

Communication System: 802.11bg; Frequency: 2437 MHz; Duty Cycle: 1:1.1

Medium: M2450 MHz Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.97$ mho/m; $\epsilon_r = 50.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

- Probe: EX3DV4 - SN3554; ConvF(6.14, 6.14, 6.14); Calibrated: 4/24/2007
 - Sensor-Surface: 4mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn500; Calibrated: 11/16/2007
 - Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
 - Measurement SW: DASY4, V4.7 Build 55
-

DASY4 Configuration for cell band/1xRTT Volume Scan - M ch/Volume Scan:

Date/Time: 2/8/2008 5:04:15 PM

Test Laboratory: Compliance Certification Services

File Name: [T2010 Secondary Portrait - Cell Band Volume scan.da4](#)

DUT: T2010 Tablet ; Type: Laptop; Serial: N/A

Communication System: CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: M835 MHz Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.957$ mho/m; $\epsilon_r = 54.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section



Measurement Standard: DASY4 (High Precision Assessment)

- Probe: EX3DV4 - SN3554; ConvF(8, 8, 8); Calibrated: 4/24/2007
 - Sensor-Surface: 4mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn500; Calibrated: 11/16/2007
 - Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
 - Measurement SW: DASY4, V4.7 Build 55
-

Multi Band Result:

SAR(1 g) = 0.611 mW/g; SAR(10 g) = 0.330 mW/g

Maximum value of SAR (measured) = 0.663 mW/g

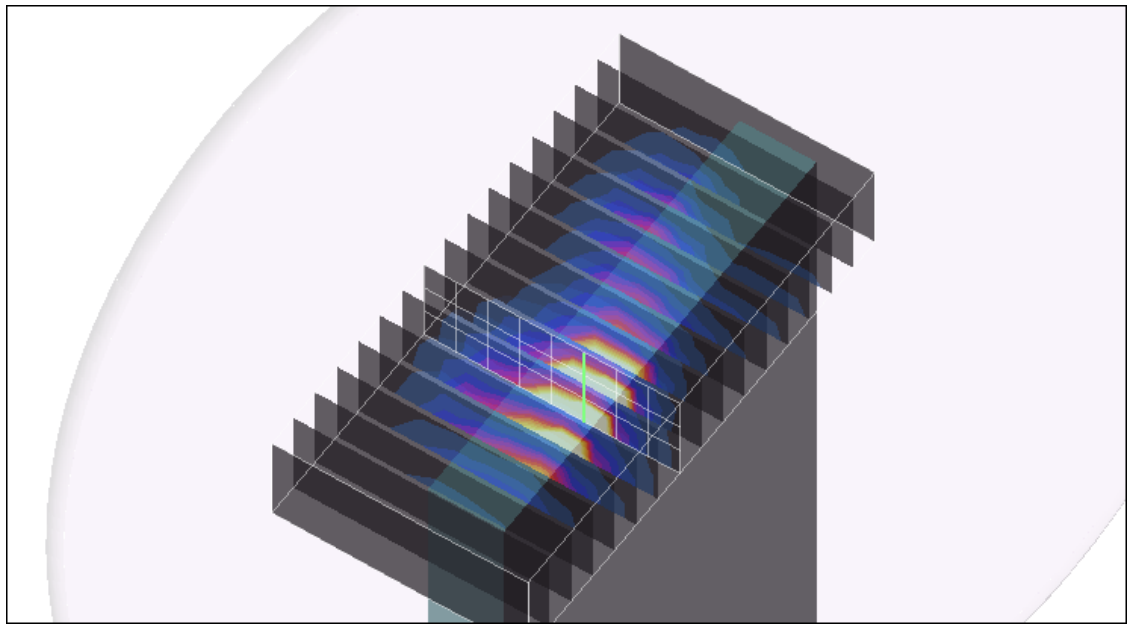

Combined

DASY4 Configuration for PCS band/1xRTT - M ch - Volume scan/Volume Scan:

Date/Time: 2/11/2008 5:56:24 PM

Test Laboratory: Compliance Certification Services

File Name: [T2010 Secondary Landscape - PCS Band Volume Scan.da4](#)

DUT: T2010 Tablet ; Type: Laptop; Serial: N/A

Communication System: CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: M1900 MHz Medium parameters used: $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 51.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

- Probe: EX3DV4 - SN3554; ConvF(6.61, 6.61, 6.61); Calibrated: 4/24/2007
 - Sensor-Surface: 4mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn500; Calibrated: 11/16/2007
 - Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
 - Measurement SW: DASY4, V4.7 Build 55
-

DASY4 Configuration for /b mode - M ch - Volume Scan 2/Volume Scan:

Date/Time: 2/12/2008 3:21:23 PM

Test Laboratory: Compliance Certification Services

File Name: [T2010 Secondary Landscape - Volume Scan - Atheros 2.4 GHz.da4](#)

DUT: T2010 Tablet ; Type: Laptop; Serial: N/A

Communication System: 802.11bg; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: M2450 MHz Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.97$ mho/m; $\epsilon_r = 50.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section



Measurement Standard: DASY4 (High Precision Assessment)

- Probe: EX3DV4 - SN3554; ConvF(6.14, 6.14, 6.14); Calibrated: 4/24/2007
 - Sensor-Surface: 4mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn500; Calibrated: 11/16/2007
 - Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
 - Measurement SW: DASY4, V4.7 Build 55
-

Multi Band Result:

SAR(1 g) = 0.923 mW/g; SAR(10 g) = 0.416 mW/g

Maximum value of SAR (measured) = 0.864 mW/g

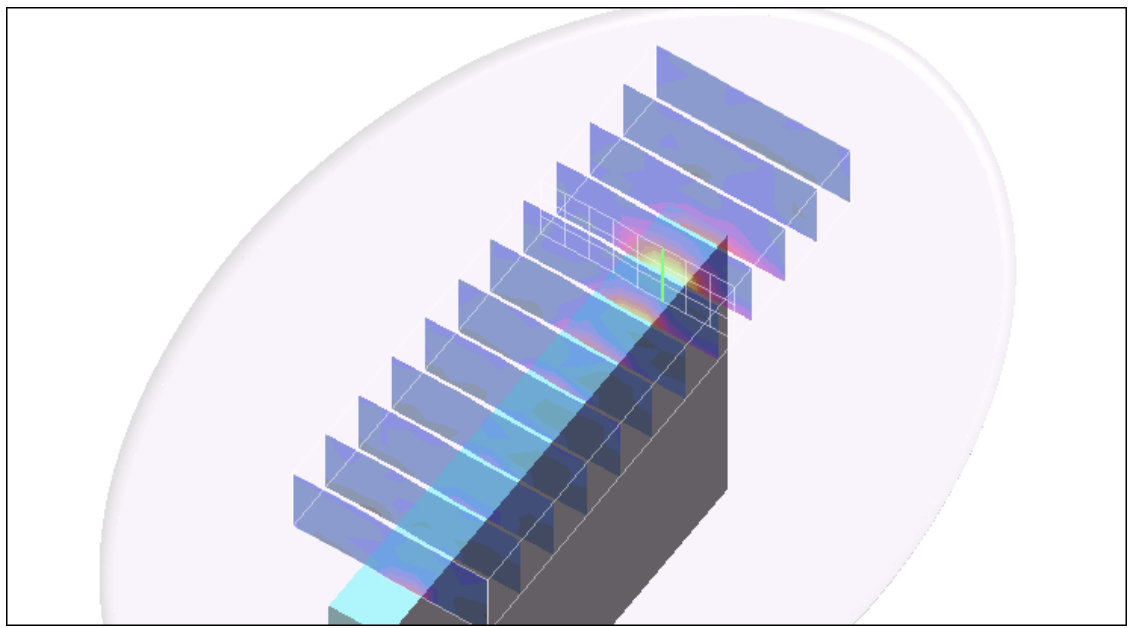

0 dB = 0.864mW/g

Combined

DASY4 Configuration for b mode Volume Scan - M ch/Volume Scan:

Date/Time: 2/12/2008 2:29:46 PM

Test Laboratory: Compliance Certification Services

File Name: [T2010 Secondary Portrait - Volume scan Atheros 2.4 GHz.da4](#)

DUT: T2010 Tablet ; Type: Laptop; Serial: N/A

Communication System: 802.11bg; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: M2450 MHz Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.97$ mho/m; $\epsilon_r = 50.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

- Probe: EX3DV4 - SN3554; ConvF(6.14, 6.14, 6.14); Calibrated: 4/24/2007
 - Sensor-Surface: 4mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn500; Calibrated: 11/16/2007
 - Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
 - Measurement SW: DASY4, V4.7 Build 55
-

DASY4 Configuration for PCS band/1xRTT - M ch - Volume Scan/Volume Scan:

Date/Time: 2/11/2008 2:52:19 PM

Test Laboratory: Compliance Certification Services

File Name: [T2010 Secondary Portrait - PCS Band Volume scan.da4](#)

DUT: T2010 Tablet ; Type: Laptop; Serial: N/A

Communication System: CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: M1900 MHz Medium parameters used: $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 51.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section



Measurement Standard: DASY4 (High Precision Assessment)

- Probe: EX3DV4 - SN3554; ConvF(6.61, 6.61, 6.61); Calibrated: 4/24/2007
 - Sensor-Surface: 4mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn500; Calibrated: 11/16/2007
 - Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
 - Measurement SW: DASY4, V4.7 Build 55
-

Multi Band Result:

SAR(1 g) = 0.680 mW/g; SAR(10 g) = 0.350 mW/g

Maximum value of SAR (measured) = 0.622 mW/g

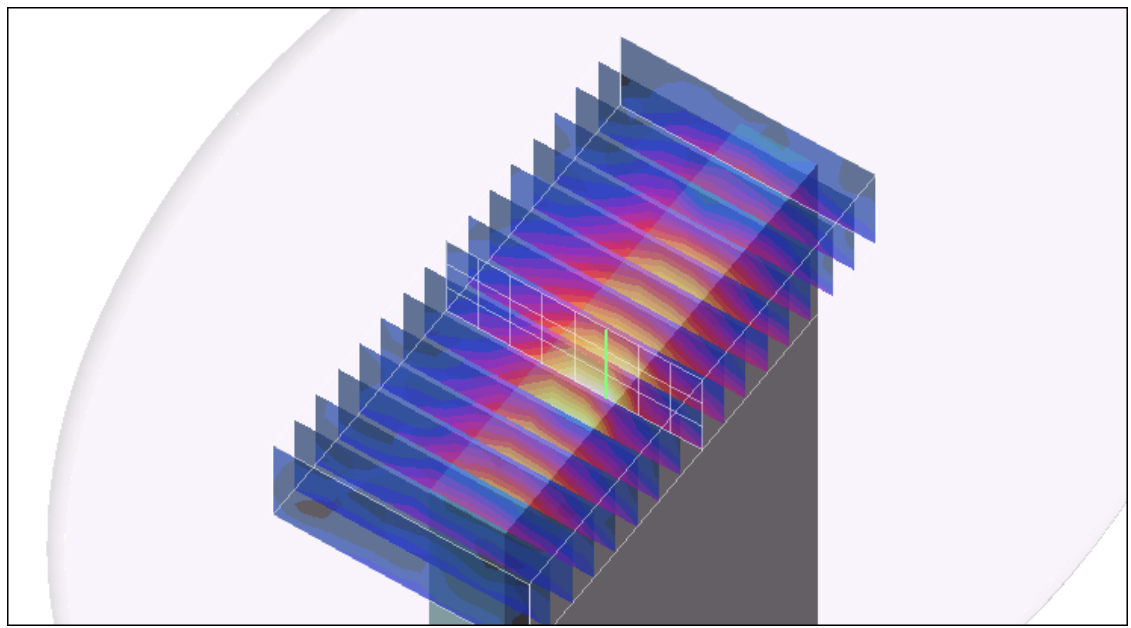

0 dB = 0.622mW/g

Combined

DASY4 Configuration for g mode - M ch - Volume Scan 2/Volume Scan:

Date/Time: 2/12/2008 12:21:44 PM

Test Laboratory: Compliance Certification Services

File Name: [T2010 Secondary Landscape - Volume Scan - Intel 2.4 GHz.da4](#)

DUT: T2010 Tablet ; Type: Laptop; Serial: N/A

Communication System: 802.11bg; Frequency: 2437 MHz; Duty Cycle: 1:1.1

Medium: M2450 MHz Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.97$ mho/m; $\epsilon_r = 50.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

- Probe: EX3DV4 - SN3554; ConvF(6.14, 6.14, 6.14); Calibrated: 4/24/2007
 - Sensor-Surface: 4mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn500; Calibrated: 11/16/2007
 - Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
 - Measurement SW: DASY4, V4.7 Build 55
-

DASY4 Configuration for PCS band/1xRTT - M ch - Volume scan/Volume Scan:

Date/Time: 2/11/2008 5:56:24 PM

Test Laboratory: Compliance Certification Services

File Name: [T2010 Secondary Landscape - PCS Band Volume Scan.da4](#)

DUT: T2010 Tablet ; Type: Laptop; Serial: N/A

Communication System: CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: M1900 MHz Medium parameters used: $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 51.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section



Measurement Standard: DASY4 (High Precision Assessment)

- Probe: EX3DV4 - SN3554; ConvF(6.61, 6.61, 6.61); Calibrated: 4/24/2007
 - Sensor-Surface: 4mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn500; Calibrated: 11/16/2007
 - Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
 - Measurement SW: DASY4, V4.7 Build 55
-

Multi Band Result:

SAR(1 g) = 0.419 mW/g; SAR(10 g) = 0.200 mW/g

Maximum value of SAR (measured) = 0.367 mW/g

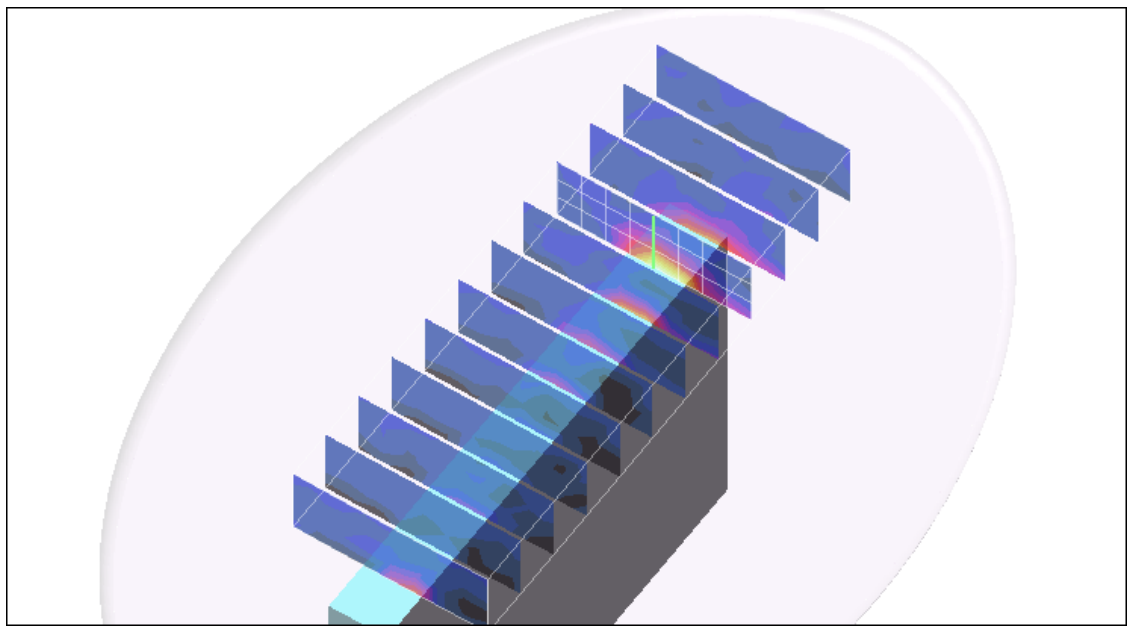

0 dB = 0.367mW/g

Combined

DASY4 Configuration for g mode Volume Scan - M ch/Volume Scan:

Date/Time: 2/12/2008 1:33:21 PM

Test Laboratory: Compliance Certification Services

File Name: [T2010 Secondary Portrait - Volume scan Intel 2.4 GHz.da4](#)

DUT: T2010 Tablet ; Type: Laptop; Serial: N/A

Communication System: 802.11bg; Frequency: 2437 MHz; Duty Cycle: 1:1.1

Medium: M2450 MHz Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.97$ mho/m; $\epsilon_r = 50.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

- Probe: EX3DV4 - SN3554; ConvF(6.14, 6.14, 6.14); Calibrated: 4/24/2007
 - Sensor-Surface: 4mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn500; Calibrated: 11/16/2007
 - Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
 - Measurement SW: DASY4, V4.7 Build 55
-

DASY4 Configuration for PCS band/1xRTT - M ch - Volume Scan/Volume Scan:

Date/Time: 2/11/2008 2:52:19 PM

Test Laboratory: Compliance Certification Services

File Name: [T2010 Secondary Portrait - PCS Band Volume scan.da4](#)

DUT: T2010 Tablet ; Type: Laptop; Serial: N/A

Communication System: CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: M1900 MHz Medium parameters used: $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 51.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

- Probe: EX3DV4 - SN3554; ConvF(6.61, 6.61, 6.61); Calibrated: 4/24/2007
 - Sensor-Surface: 4mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn500; Calibrated: 11/16/2007
 - Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
 - Measurement SW: DASY4, V4.7 Build 55
-

Multi Band Result:

SAR(1 g) = 0.635 mW/g; SAR(10 g) = 0.330 mW/g

Maximum value of SAR (measured) = 0.574 mW/g

