




System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/7/2007 5:55:02 PM	DUT Battery Model/No:	
Filename:	LapMain6_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	HP Hoyas	Relative Permittivity:	51.03
Relative Humidity:	30%	Conductivity:	1.91
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	34.00 mm
DUT Position:	Lap 0 mm.	Max SAR Y-axis Location:	50.00 mm
Antenna Configuration:	Integral	Max E Field:	6.77 V/m
Test Frequency:	2437MHz	SAR 1g:	0.067 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.047 W/kg
Type of Modulation:		SAR End:	0.046 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-2.13 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	06/07/07
Input Power Level:	max	Extrapolation:	poly4

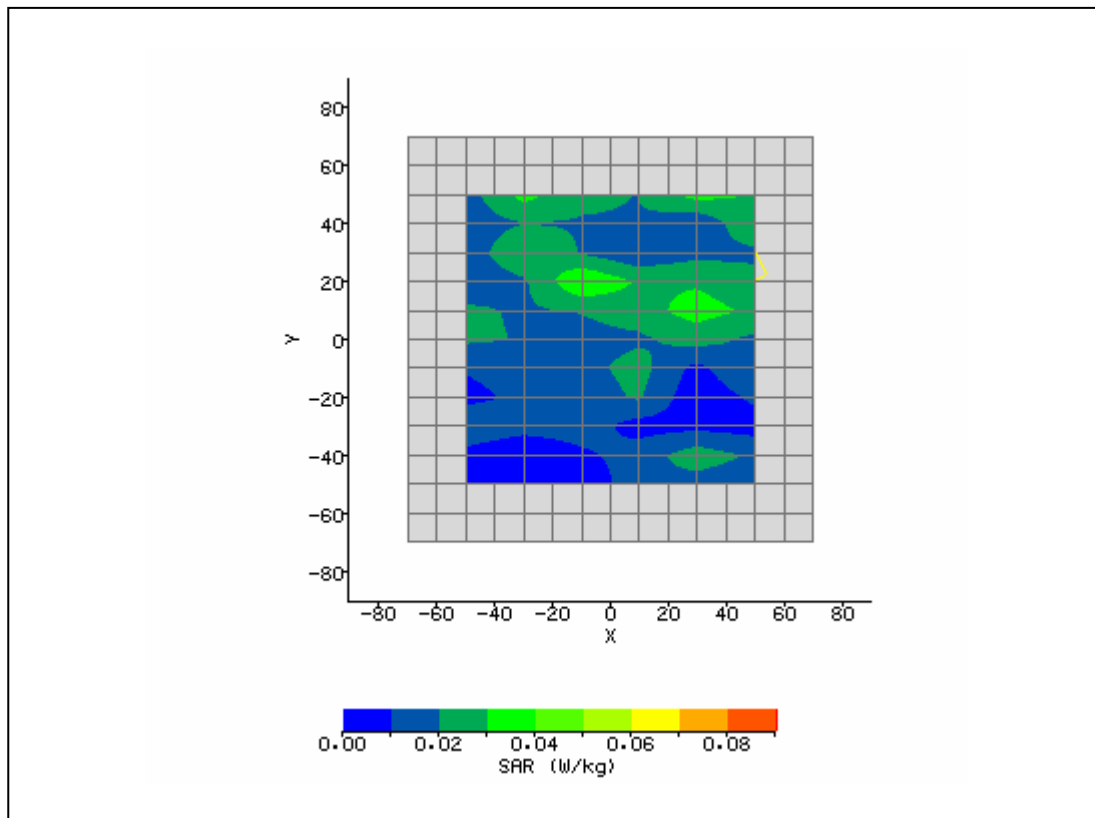


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/7/2007 11:12:46 AM	DUT Battery Model/No:	
Filename:	LapAux6_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	HP Hoyas	Relative Permittivity:	51.03
Relative Humidity:	30%	Conductivity:	1.91
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-4.00 mm
DUT Position:	Lap 0 mm.	Max SAR Y-axis Location:	-2.00 mm
Antenna Configuration:	Integral - Aux.	Max E Field:	6.79 V/m
Test Frequency:	2437MHz	SAR 1g:	0.082 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.052 W/kg
Type of Modulation:		SAR End:	0.054 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.83 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	06/07/07
Input Power Level:	max	Extrapolation:	poly4

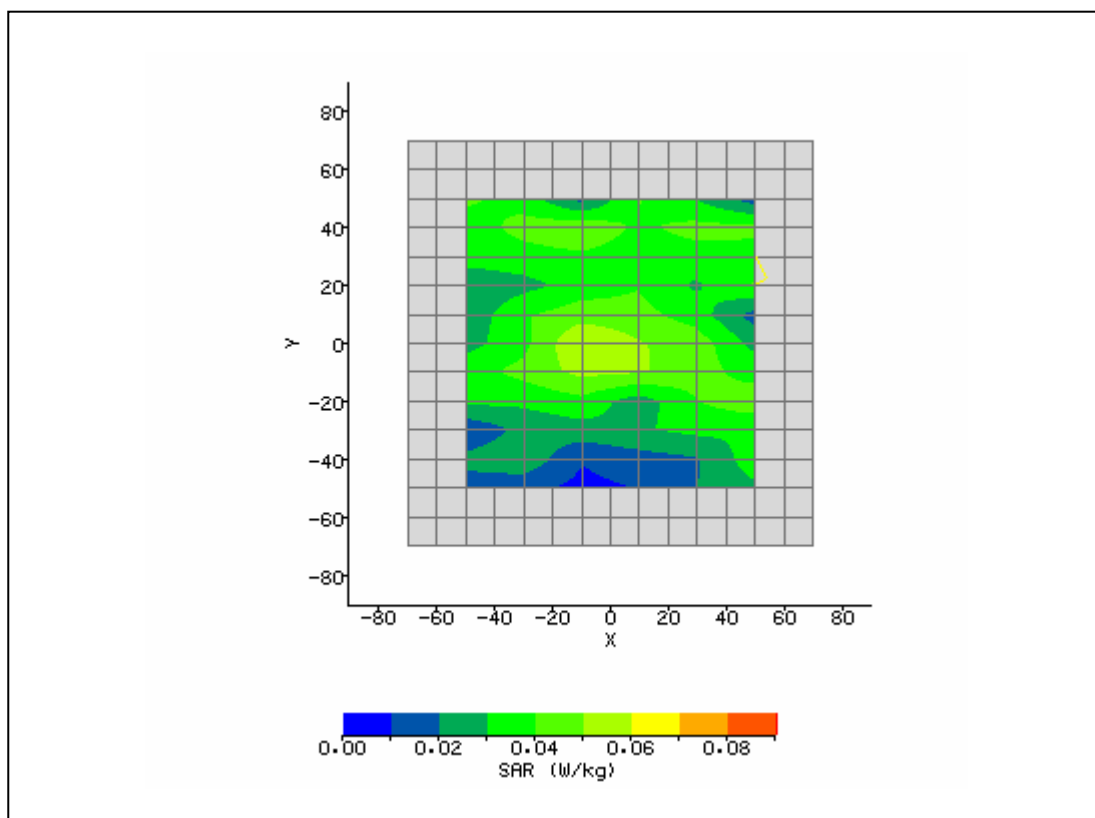


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/7/2007 9:13:47 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	HP Hoyas	Relative Permittivity:	51.03
Relative Humidity:	30%	Conductivity:	1.91
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	12.00 mm
DUT Position:	Right Side 0 mm.	Max SAR Y-axis Location:	-27.00 mm
Antenna Configuration:	Integral	Max E Field:	5.82 V/m
Test Frequency:	2437MHz	SAR 1g:	0.073 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.011 W/kg
Type of Modulation:		SAR End:	0.012 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	4.90 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	06/07/07
Input Power Level:	max	Extrapolation:	poly4

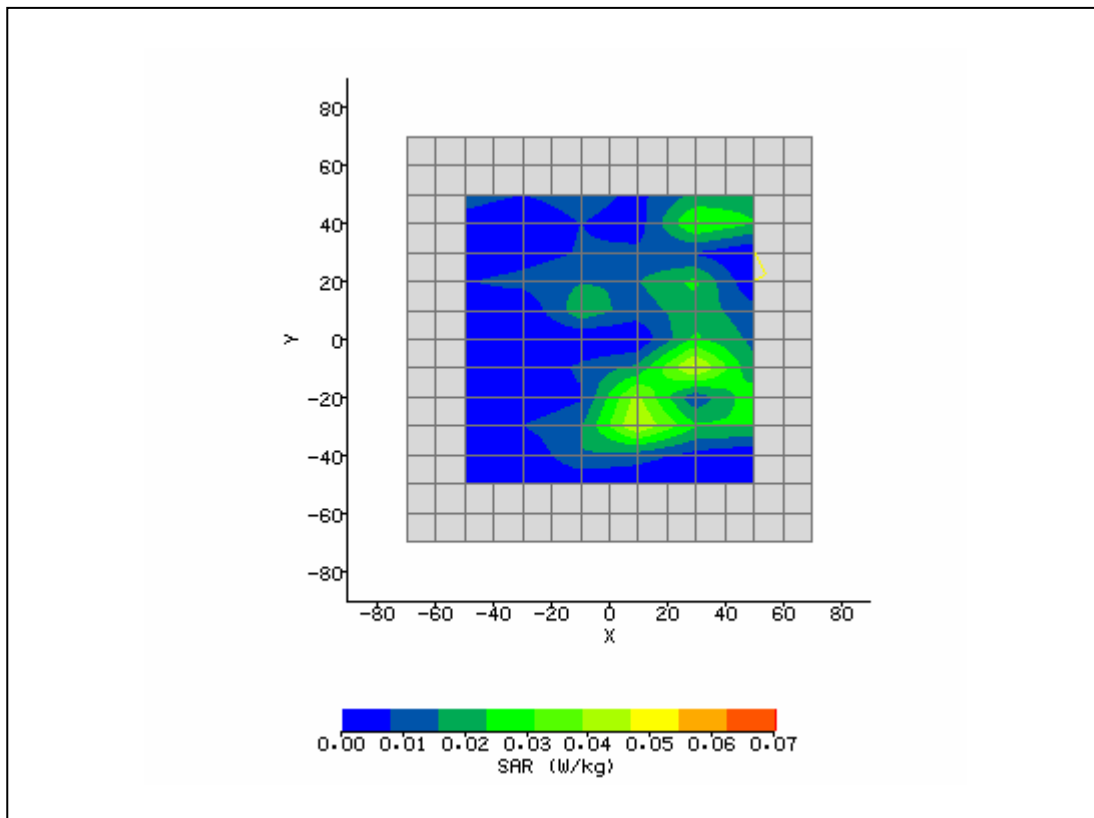

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/7/2007 11:30:11 AM	DUT Battery Model/No:	
Filename:	LapAux6_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	HP Hoyas	Relative Permittivity:	51.03
Relative Humidity:	30%	Conductivity:	1.91
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	8.00 mm
DUT Position:	Left side 0 mm.	Max SAR Y-axis Location:	-20.00 mm
Antenna Configuration:	Integral - Aux.	Max E Field:	8.00 V/m
Test Frequency:	2437MHz	SAR 1g:	0.151 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.057 W/kg
Type of Modulation:		SAR End:	0.058 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.76 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	06/07/07
Input Power Level:	max	Extrapolation:	poly4

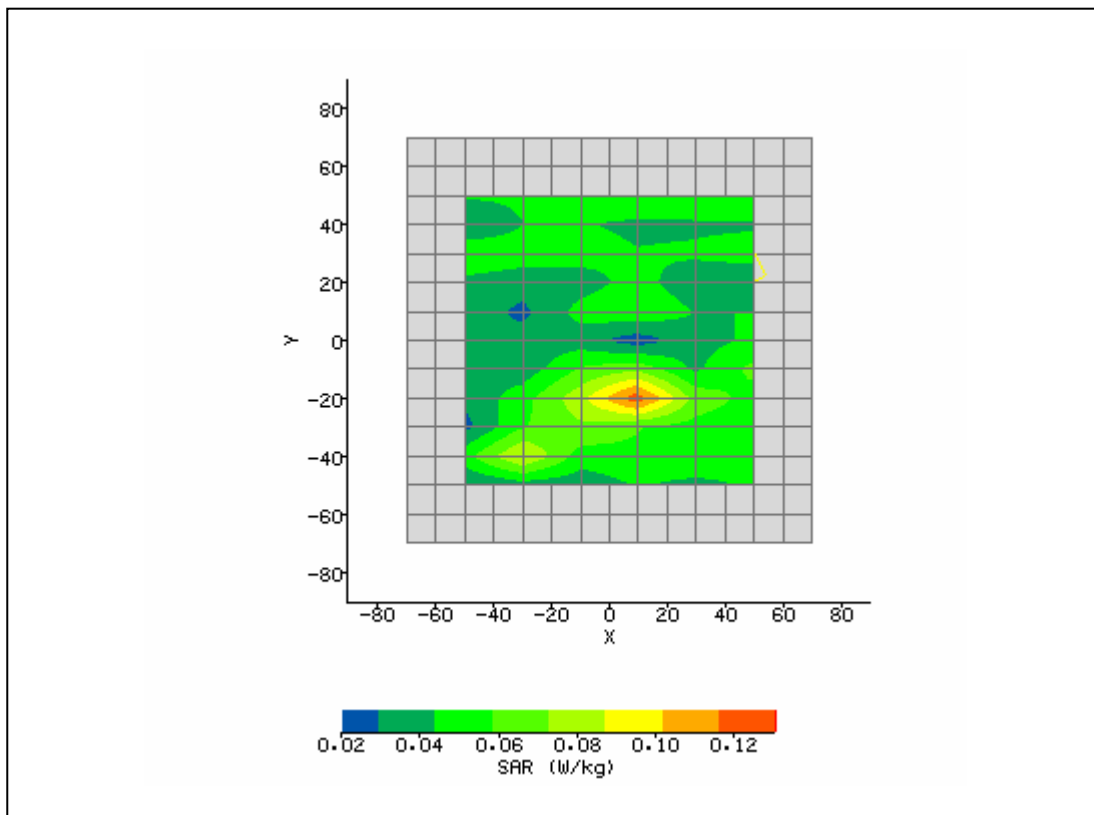

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/7/2007 2:02:30 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	HP Optimator - Bevos	Relative Permittivity:	50.92
Relative Humidity:	30%	Conductivity:	1.908
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	24.00 mm
DUT Position:	Left side 0mm.	Max SAR Y-axis Location:	-33.00 mm
Antenna Configuration:	Integral-Aux.	Max E Field:	5.10 V/m
Test Frequency:	2412MHz	SAR 1g:	0.122 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.017 W/kg
Type of Modulation:		SAR End:	0.017 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.02 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	06/07/07
Input Power Level:	max	Extrapolation:	poly4

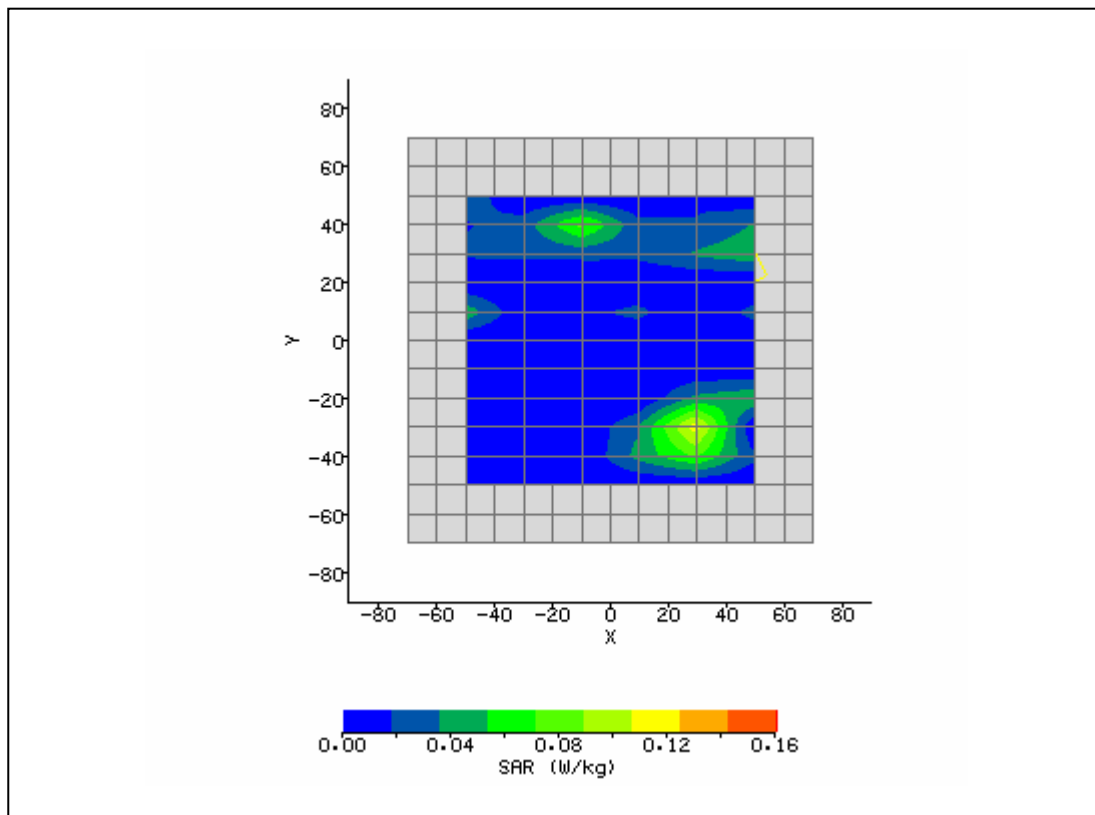

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/7/2007 2:32:22 AM	DUT Battery Model/No:	
Filename:	LeftAux11_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	HP Optimator - Bevos	Relative Permittivity:	51.12
Relative Humidity:	30%	Conductivity:	1.919
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	50.00 mm
DUT Position:	Left side 0mm.	Max SAR Y-axis Location:	21.00 mm
Antenna Configuration:	Integral-Aux.	Max E Field:	6.64 V/m
Test Frequency:	2462MHz	SAR 1g:	0.125 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.112 W/kg
Type of Modulation:		SAR End:	0.114 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.49 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	06/07/07
Input Power Level:	max	Extrapolation:	poly4

