




<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	5/21/2007 4:37:49 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	temp.txt	<b>Probe Serial Number:</b>	L0116
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	Optimator-Kedron AGN	<b>Relative Permittivity:</b>	51.03
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	1.91
<b>Phantom S/No:</b>	HeadBox1.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	-14.00 mm
<b>DUT Position:</b>	Lap 0mm.	<b>Max SAR Y-axis Location:</b>	15.00 mm
<b>Antenna Configuration:</b>	Integral_Main.	<b>Max E Field:</b>	5.00 V/m
<b>Test Frequency:</b>	2437MHz	<b>SAR 1g:</b>	0.021 W/kg
<b>Air Factors:</b>	488 / 373 / 340	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.692 / .692 / .692	<b>SAR Start:</b>	0.012 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.012 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	1.72 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	05/18/07
<b>Input Power Level:</b>	d.c.98%	<b>Extrapolation:</b>	poly4

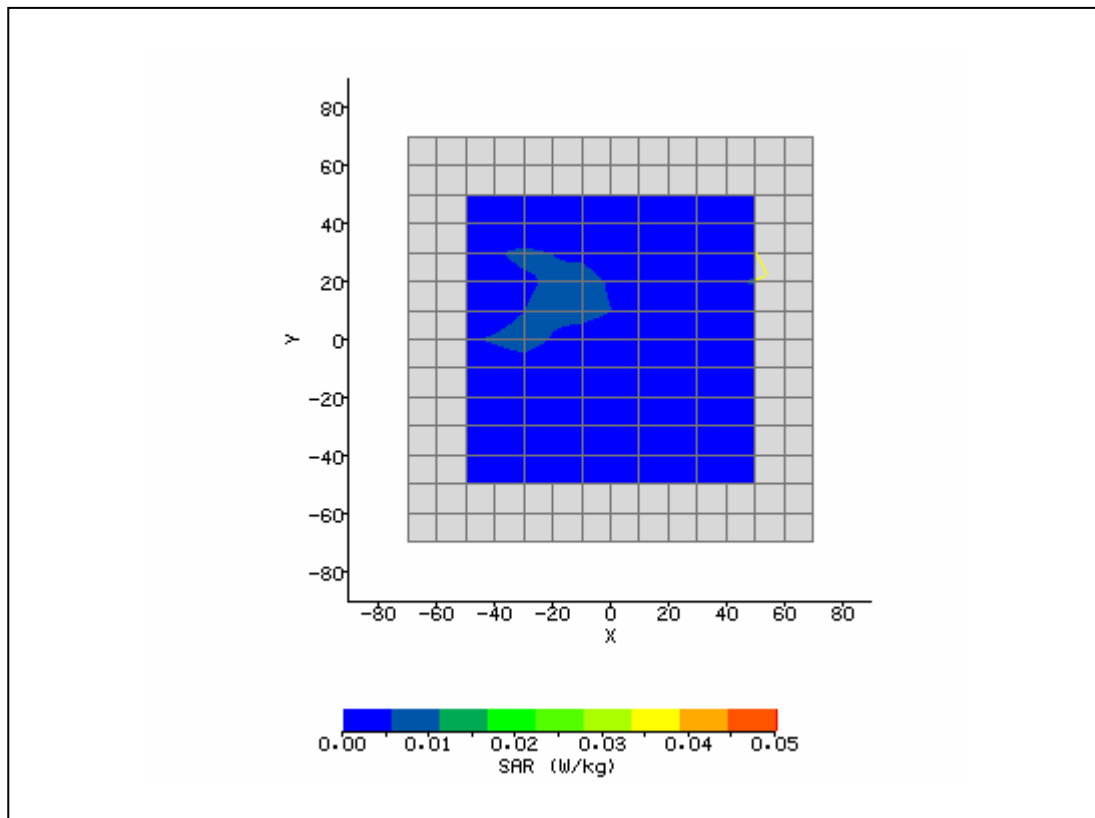


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	5/21/2007 4:54:55 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	LapM6_3d.txt	<b>Probe Serial Number:</b>	L0116
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	Optimator-Kedron AGN	<b>Relative Permittivity:</b>	51.03
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	1.91
<b>Phantom S/No:</b>	HeadBox1.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	14.00 mm
<b>DUT Position:</b>	Lap 0mm.	<b>Max SAR Y-axis Location:</b>	18.00 mm
<b>Antenna Configuration:</b>	Integral_Aux.	<b>Max E Field:</b>	4.60 V/m
<b>Test Frequency:</b>	2437MHz	<b>SAR 1g:</b>	0.028 W/kg
<b>Air Factors:</b>	488 / 373 / 340	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.692 / .692 / .692	<b>SAR Start:</b>	0.003 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.004 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	4.03 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	05/18/07
<b>Input Power Level:</b>	d.c.98%	<b>Extrapolation:</b>	poly4

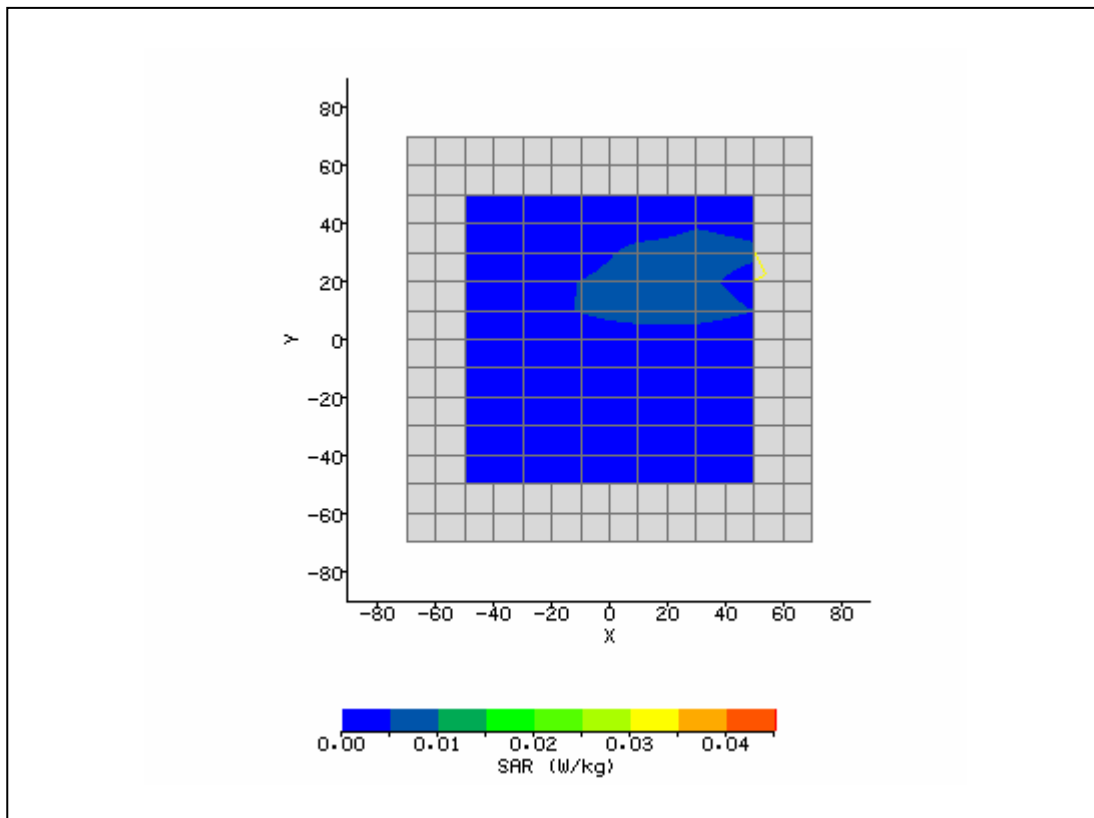


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	5/21/2007 5:50:11 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	TopMain6_3d.txt	<b>Probe Serial Number:</b>	L0116
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	Optimator-Kedron AGN	<b>Relative Permittivity:</b>	50.98
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	1.91
<b>Phantom S/No:</b>	HeadBox1.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	20.00 mm
<b>DUT Position:</b>	Right 0mm.	<b>Max SAR Y-axis Location:</b>	-8.00 mm
<b>Antenna Configuration:</b>	Integral_Main.	<b>Max E Field:</b>	10.95 V/m
<b>Test Frequency:</b>	2412MHz	<b>SAR 1g:</b>	0.315 W/kg
<b>Air Factors:</b>	488 / 373 / 340	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.692 / .692 / .692	<b>SAR Start:</b>	0.014 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.014 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-2.34 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	05/18/07
<b>Input Power Level:</b>	d.c.98%	<b>Extrapolation:</b>	poly4

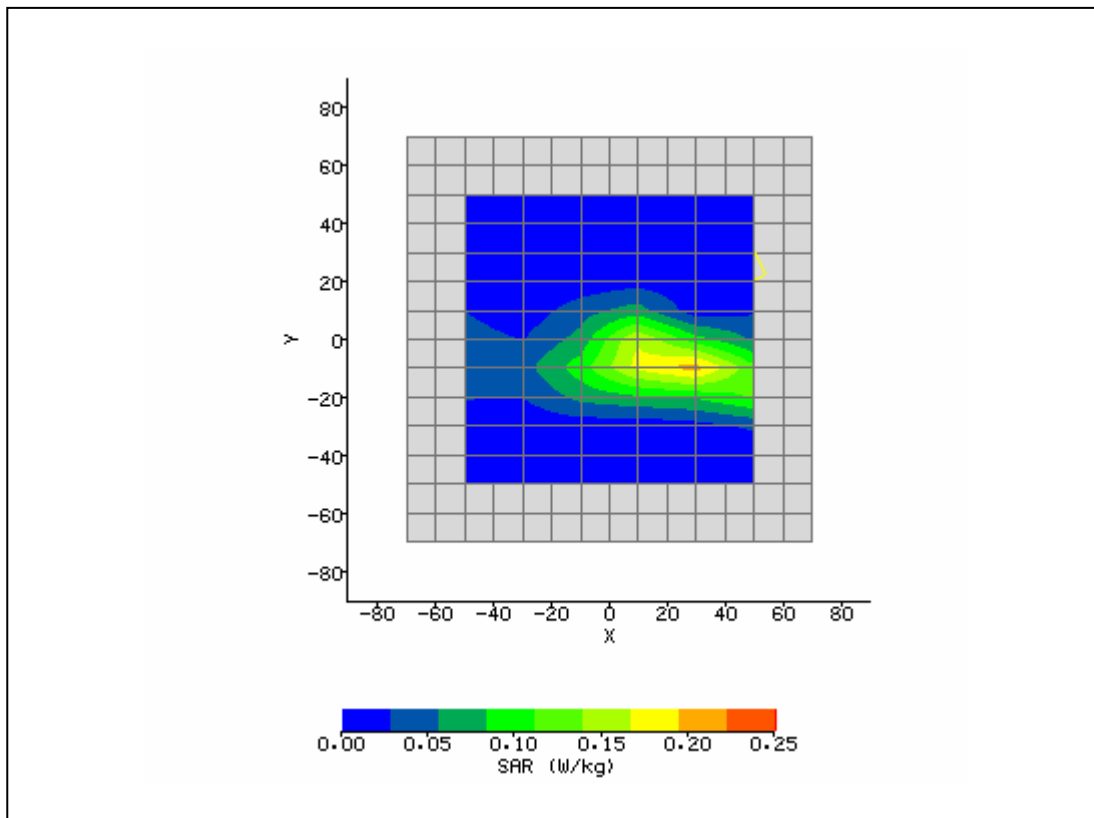


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	5/21/2007 5:32:59 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	TopAux6_3d.txt	<b>Probe Serial Number:</b>	L0116
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	Optimator-Kedron AGN	<b>Relative Permittivity:</b>	51.03
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	1.91
<b>Phantom S/No:</b>	HeadBox1.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	6.00 mm
<b>DUT Position:</b>	Right 0mm.	<b>Max SAR Y-axis Location:</b>	-2.00 mm
<b>Antenna Configuration:</b>	Integral_Main.	<b>Max E Field:</b>	10.35 V/m
<b>Test Frequency:</b>	2437MHz	<b>SAR 1g:</b>	0.271 W/kg
<b>Air Factors:</b>	488 / 373 / 340	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.692 / .692 / .692	<b>SAR Start:</b>	0.017 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.018 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	3.00 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	05/18/07
<b>Input Power Level:</b>	d.c.98%	<b>Extrapolation:</b>	poly4

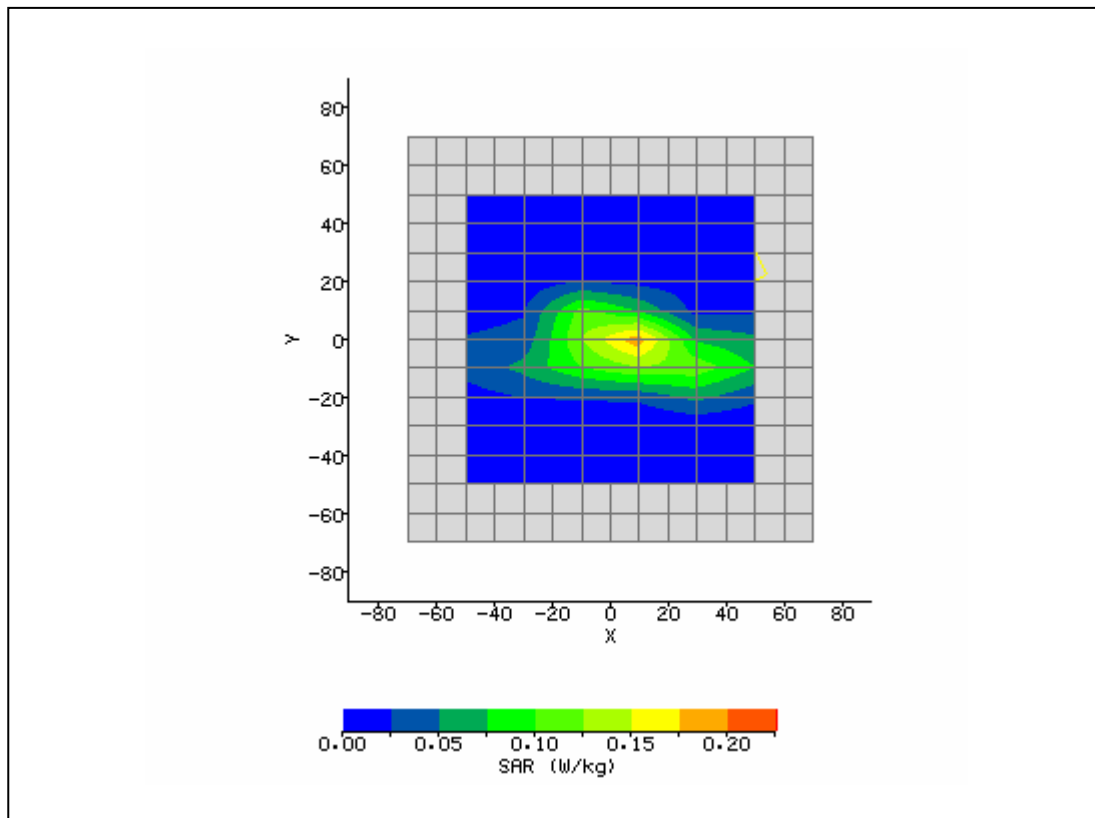


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	5/21/2007 6:07:32 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	TopMain1_3d.txt	<b>Probe Serial Number:</b>	L0116
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	Optimator-Kedron AGN	<b>Relative Permittivity:</b>	51.12
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	1.919
<b>Phantom S/No:</b>	HeadBox1.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	24.00 mm
<b>DUT Position:</b>	Right 0mm.	<b>Max SAR Y-axis Location:</b>	-14.00 mm
<b>Antenna Configuration:</b>	Integral_Main.	<b>Max E Field:</b>	9.15 V/m
<b>Test Frequency:</b>	2462MHz	<b>SAR 1g:</b>	0.223 W/kg
<b>Air Factors:</b>	488 / 373 / 340	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.692 / .692 / .692	<b>SAR Start:</b>	0.011 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.011 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-1.45 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	05/21/07
<b>Input Power Level:</b>	d.c.98%	<b>Extrapolation:</b>	poly4

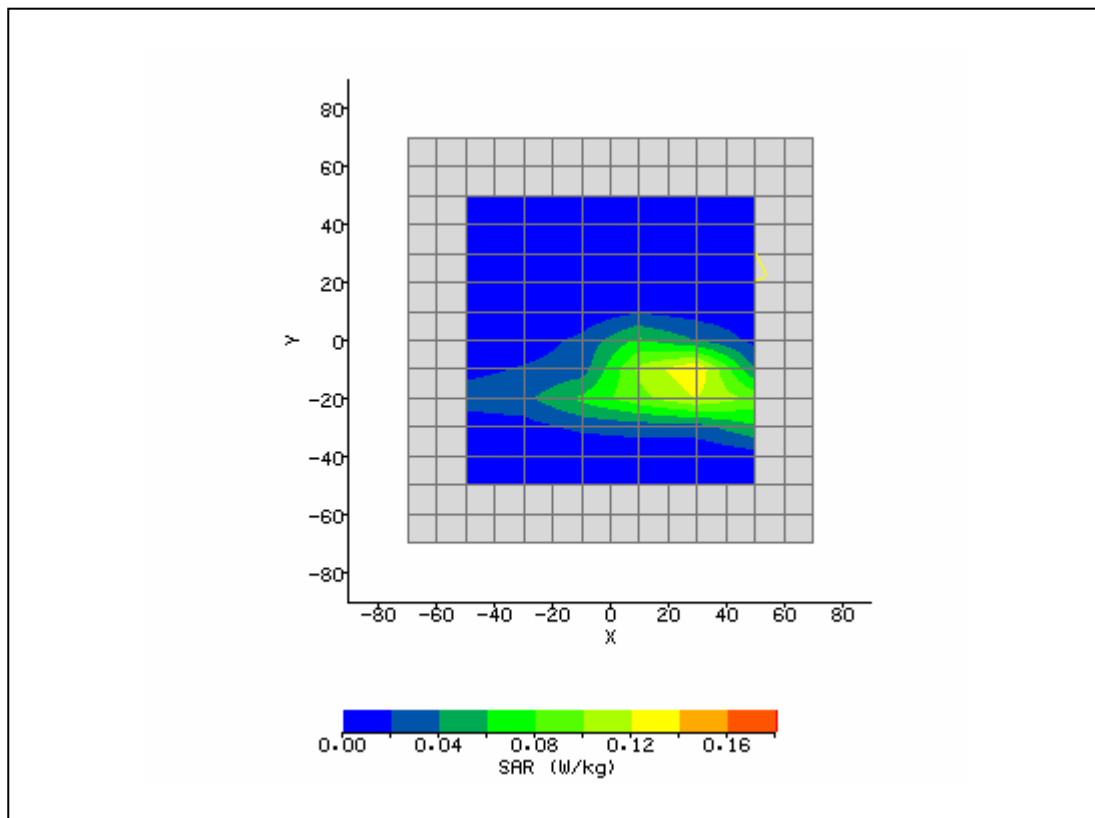


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	5/21/2007 11:42:40 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Lap_M_3d.txt	<b>Probe Serial Number:</b>	L0116
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	Optimator-Kedron AGN	<b>Relative Permittivity:</b>	50.98
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	1.907
<b>Phantom S/No:</b>	HeadBox1.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	14.00 mm
<b>DUT Position:</b>	Left 0mm.	<b>Max SAR Y-axis Location:</b>	-4.00 mm
<b>Antenna Configuration:</b>	Integral_ Aux.	<b>Max E Field:</b>	9.05 V/m
<b>Test Frequency:</b>	2412MHz	<b>SAR 1g:</b>	0.224 W/kg
<b>Air Factors:</b>	488 / 373 / 340	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.692 / .692 / .692	<b>SAR Start:</b>	0.008 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.009 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	1.00 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	05/18/07
<b>Input Power Level:</b>	d.c.98%	<b>Extrapolation:</b>	poly4

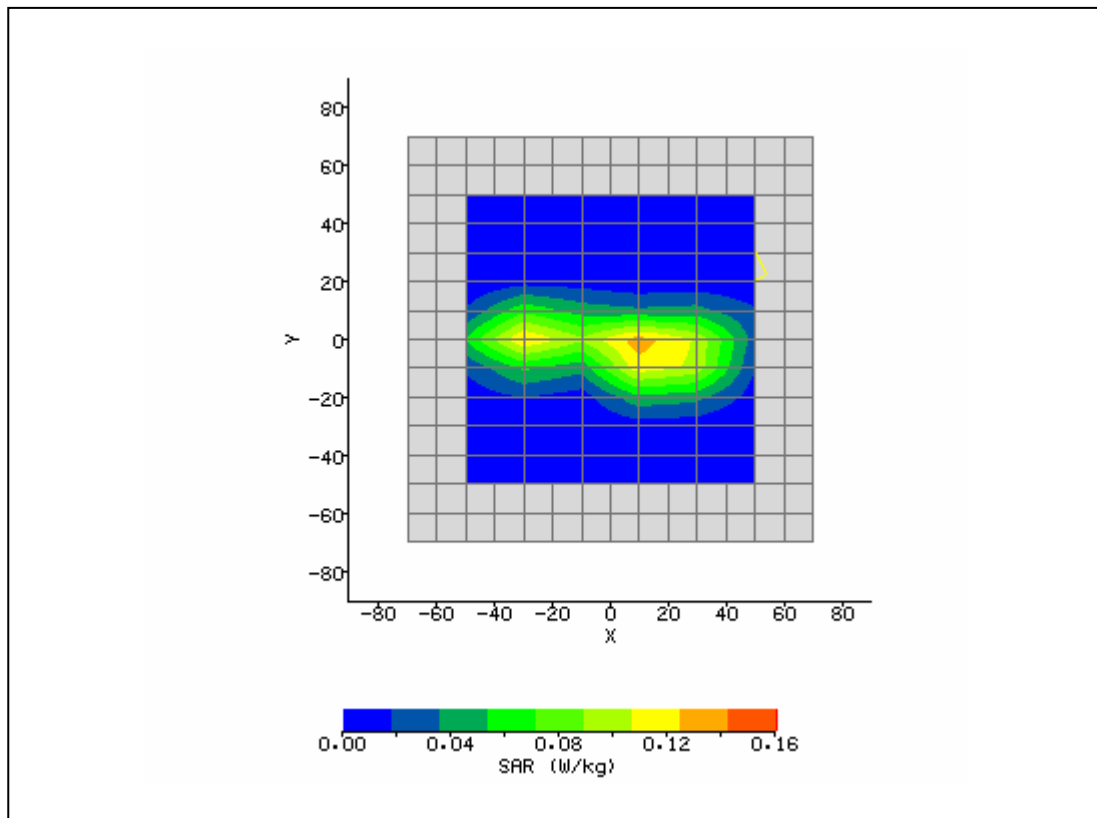

<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	5/21/2007 5:13:18 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	LapAux6_3d.txt	<b>Probe Serial Number:</b>	L0116
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	Optimator-Kedron AGN	<b>Relative Permittivity:</b>	51.03
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	1.91
<b>Phantom S/No:</b>	HeadBox1.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	-10.00 mm
<b>DUT Position:</b>	Top 0mm.	<b>Max SAR Y-axis Location:</b>	-19.00 mm
<b>Antenna Configuration:</b>	Integral_Aux.	<b>Max E Field:</b>	9.90 V/m
<b>Test Frequency:</b>	2437MHz	<b>SAR 1g:</b>	0.265 W/kg
<b>Air Factors:</b>	488 / 373 / 340	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.692 / .692 / .692	<b>SAR Start:</b>	0.011 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.012 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	4.43 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	05/18/07
<b>Input Power Level:</b>	d.c.98%	<b>Extrapolation:</b>	poly4

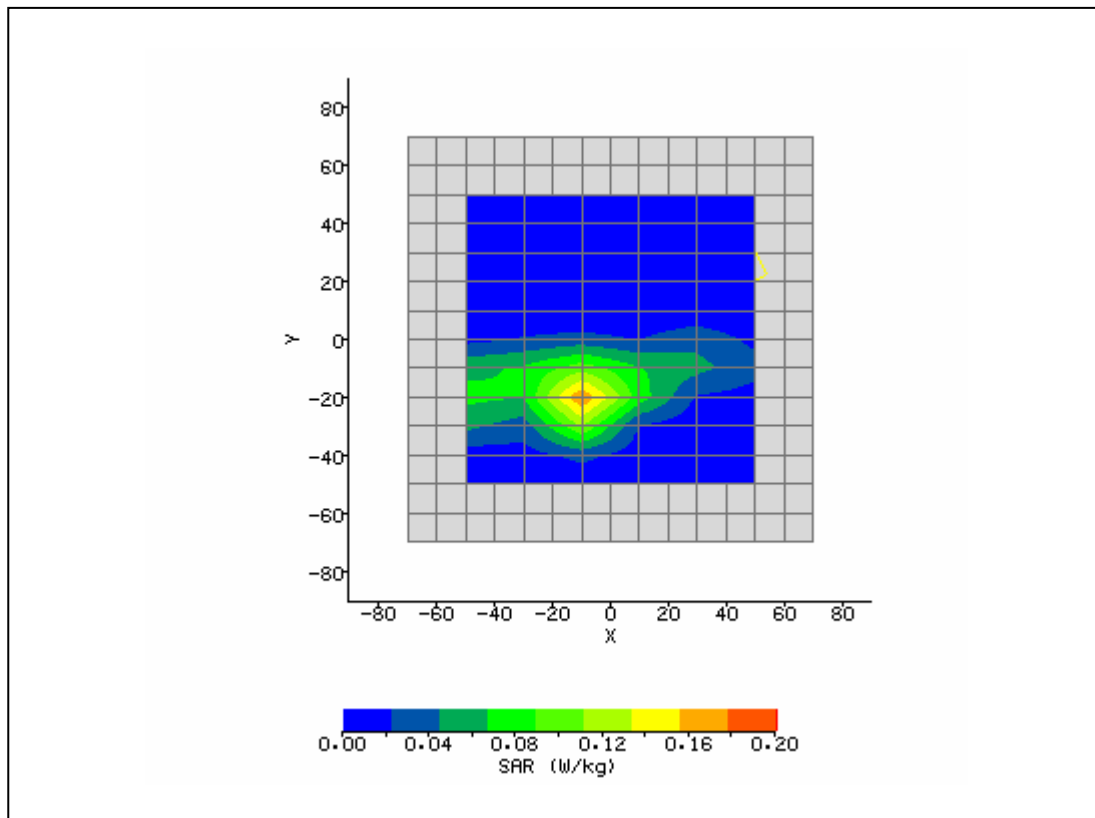


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	5/21/2007 12:05:11 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	TopEd_M_1_3d.txt	<b>Probe Serial Number:</b>	L0116
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	Optimator-Kedron AGN	<b>Relative Permittivity:</b>	51.12
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	1.919
<b>Phantom S/No:</b>	HeadBox1.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	-4.00 mm
<b>DUT Position:</b>	Left 0mm.	<b>Max SAR Y-axis Location:</b>	0.00 mm
<b>Antenna Configuration:</b>	Integral_Aux.	<b>Max E Field:</b>	8.90 V/m
<b>Test Frequency:</b>	2462MHz	<b>SAR 1g:</b>	0.225 W/kg
<b>Air Factors:</b>	488 / 373 / 340	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.692 / .692 / .692	<b>SAR Start:</b>	0.008 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.009 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	3.86 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	05/18/07
<b>Input Power Level:</b>	d.c.98%	<b>Extrapolation:</b>	poly4

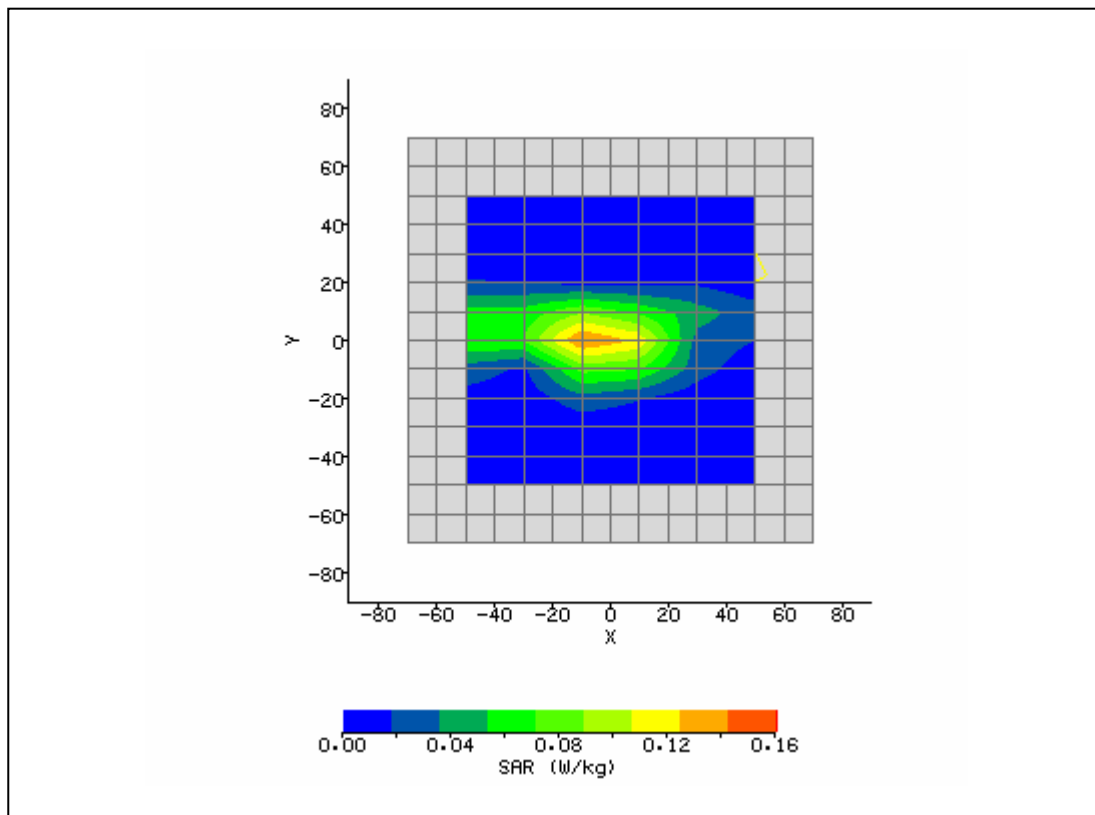





<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	5/24/2007 5:14:12 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	temp.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	5250
<b>Device Under Test:</b>	Optimator-Kedron AGN	<b>Relative Permittivity:</b>	48.23
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	5.233
<b>Phantom S/No:</b>	HeadBox1.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	50.00 mm
<b>DUT Position:</b>	Lap 0mm.	<b>Max SAR Y-axis Location:</b>	50.00 mm
<b>Antenna Configuration:</b>	Integral_Main.	<b>Max E Field:</b>	5.64 V/m
<b>Test Frequency:</b>	5180MHz	<b>SAR 1g:</b>	0.121 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.494 / .494 / .494	<b>SAR Start:</b>	0.061 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.061 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-0.18 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	05/24/07
<b>Input Power Level:</b>	d.c.91%	<b>Extrapolation:</b>	poly4

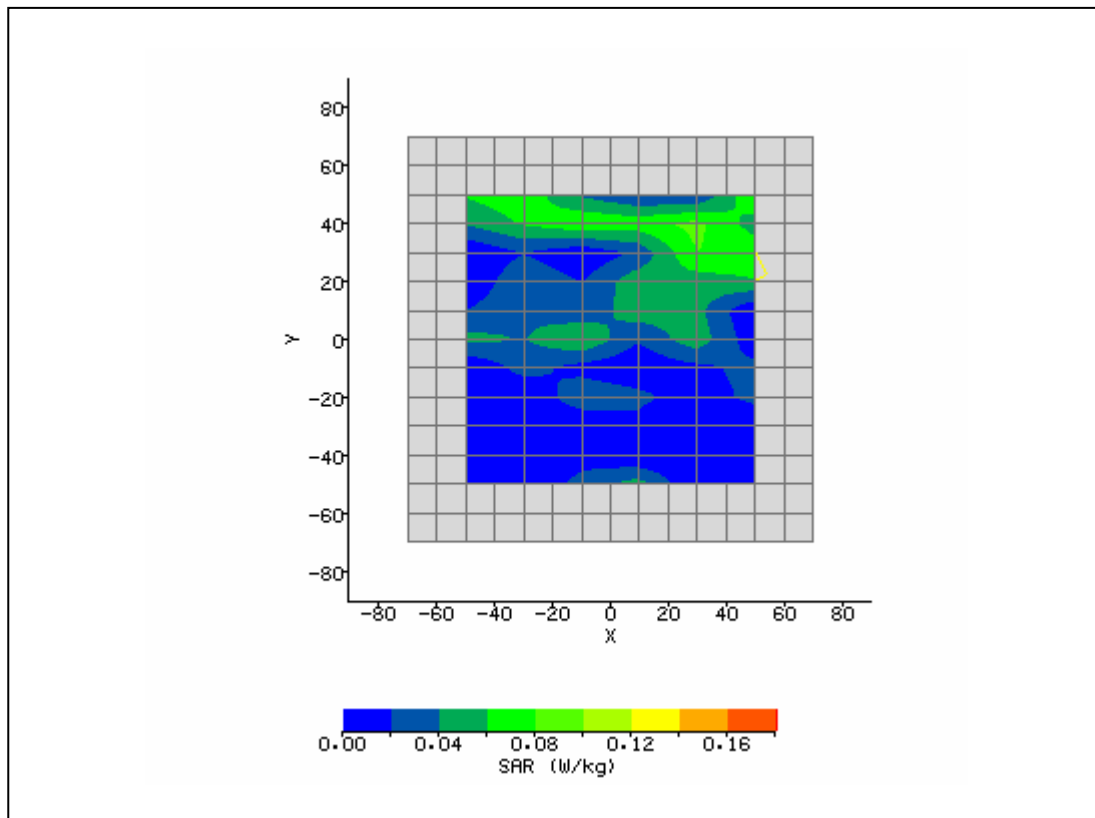


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	5/25/2007 9:46:22 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	temp.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	5180
<b>Device Under Test:</b>	Optimator-Kedron AGN	<b>Relative Permittivity:</b>	48.23
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	5.233
<b>Phantom S/No:</b>	HeadBox1.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	50.00 mm
<b>DUT Position:</b>	Lap 0mm.	<b>Max SAR Y-axis Location:</b>	50.00 mm
<b>Antenna Configuration:</b>	Integral_Aux.	<b>Max E Field:</b>	5.61 V/m
<b>Test Frequency:</b>	5180MHz	<b>SAR 1g:</b>	0.112 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.494 / .494 / .494	<b>SAR Start:</b>	0.109 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.110 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	1.37 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	05/24/07
<b>Input Power Level:</b>	d.c.91%	<b>Extrapolation:</b>	poly4

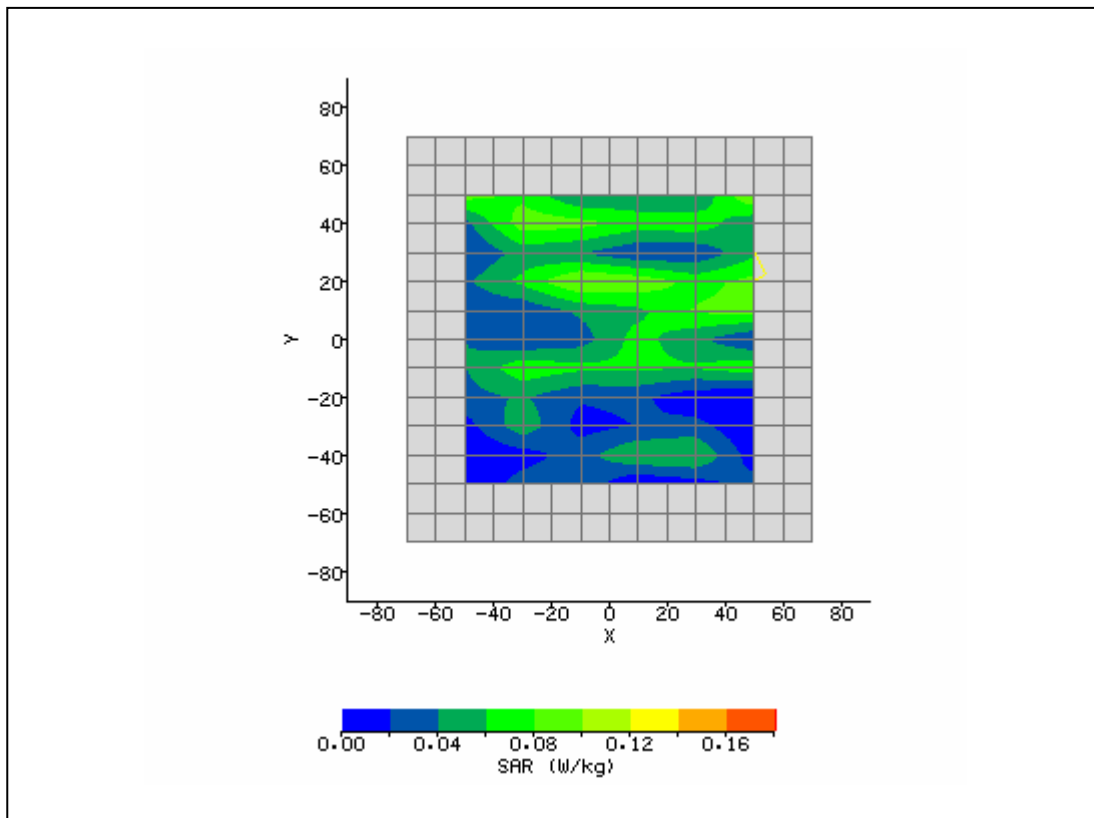


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	5/25/2007 10:28:28 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	LeftAux36_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	5250
<b>Device Under Test:</b>	Optimator-Kedron AGN	<b>Relative Permittivity:</b>	48.23
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	5.233
<b>Phantom S/No:</b>	HeadBox1.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	6.00 mm
<b>DUT Position:</b>	Right side 0mm.	<b>Max SAR Y-axis Location:</b>	-14.00 mm
<b>Antenna Configuration:</b>	Integral_Main	<b>Max E Field:</b>	7.52 V/m
<b>Test Frequency:</b>	5180MHz	<b>SAR 1g:</b>	0.271 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.494 / .494 / .494	<b>SAR Start:</b>	0.013 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.014 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	0.71 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	05/24/07
<b>Input Power Level:</b>	d.c.91%	<b>Extrapolation:</b>	poly4

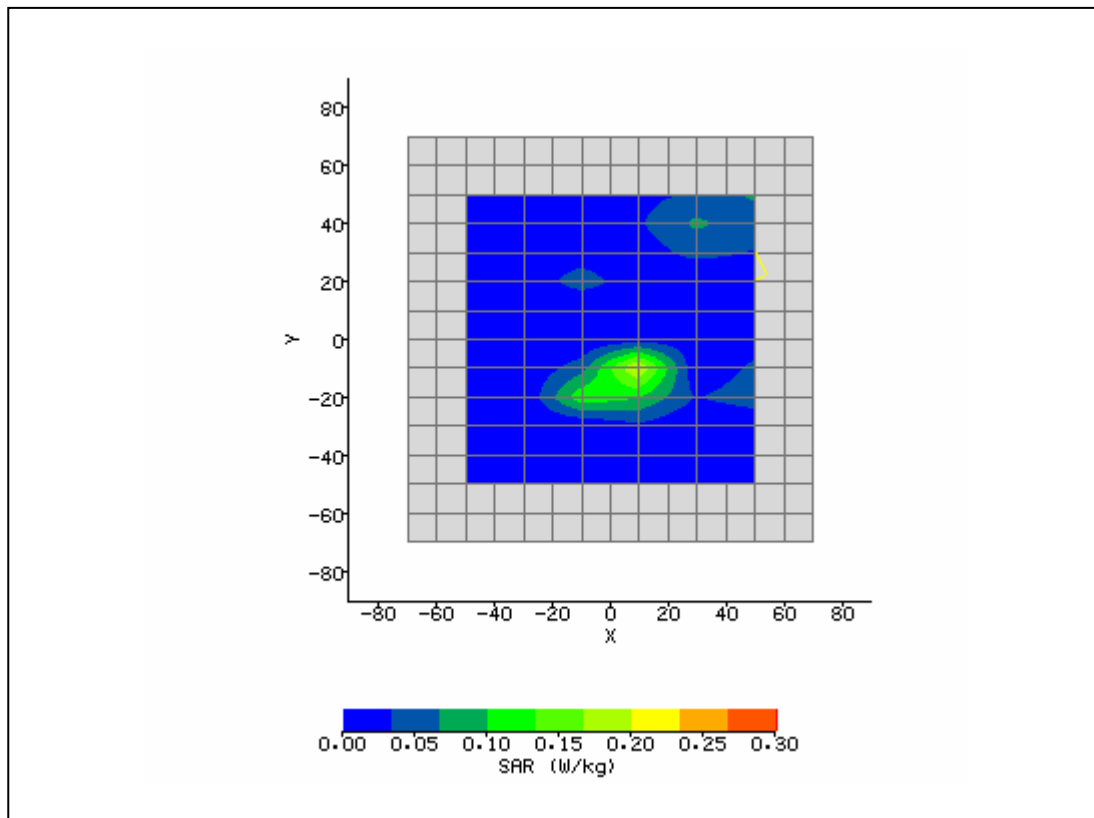


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	5/25/2007 10:08:54 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	LapAux36_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	5250
<b>Device Under Test:</b>	Optimator-Kedron AGN	<b>Relative Permittivity:</b>	48.23
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	5.233
<b>Phantom S/No:</b>	HeadBox1.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	50.00 mm
<b>DUT Position:</b>	Left side 0mm.	<b>Max SAR Y-axis Location:</b>	50.00 mm
<b>Antenna Configuration:</b>	Integral_Aux.	<b>Max E Field:</b>	5.69 V/m
<b>Test Frequency:</b>	5180MHz	<b>SAR 1g:</b>	0.093 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.494 / .494 / .494	<b>SAR Start:</b>	0.051 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.050 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	1.96 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	05/24/07
<b>Input Power Level:</b>	d.c.91%	<b>Extrapolation:</b>	poly4

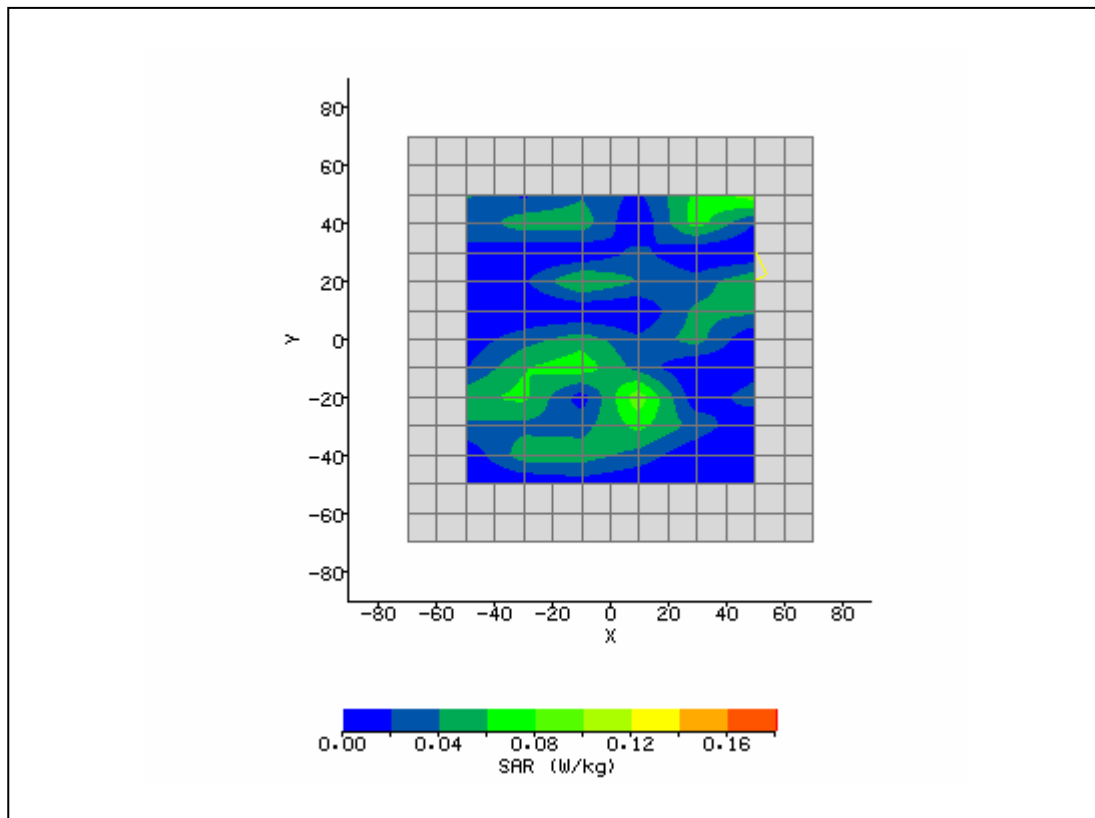


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	5/25/2007 10:47:31 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	RightM36_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	5250
<b>Device Under Test:</b>	Optimator-Kedron AGN	<b>Relative Permittivity:</b>	48.16
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	5.218
<b>Phantom S/No:</b>	HeadBox1.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	8.00 mm
<b>DUT Position:</b>	Right side 0mm.	<b>Max SAR Y-axis Location:</b>	-9.00 mm
<b>Antenna Configuration:</b>	Integral_Main	<b>Max E Field:</b>	7.18 V/m
<b>Test Frequency:</b>	5240MHz	<b>SAR 1g:</b>	0.251 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.494 / .494 / .494	<b>SAR Start:</b>	0.004 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.005 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	1.04 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	05/24/07
<b>Input Power Level:</b>	d.c.91%	<b>Extrapolation:</b>	poly4

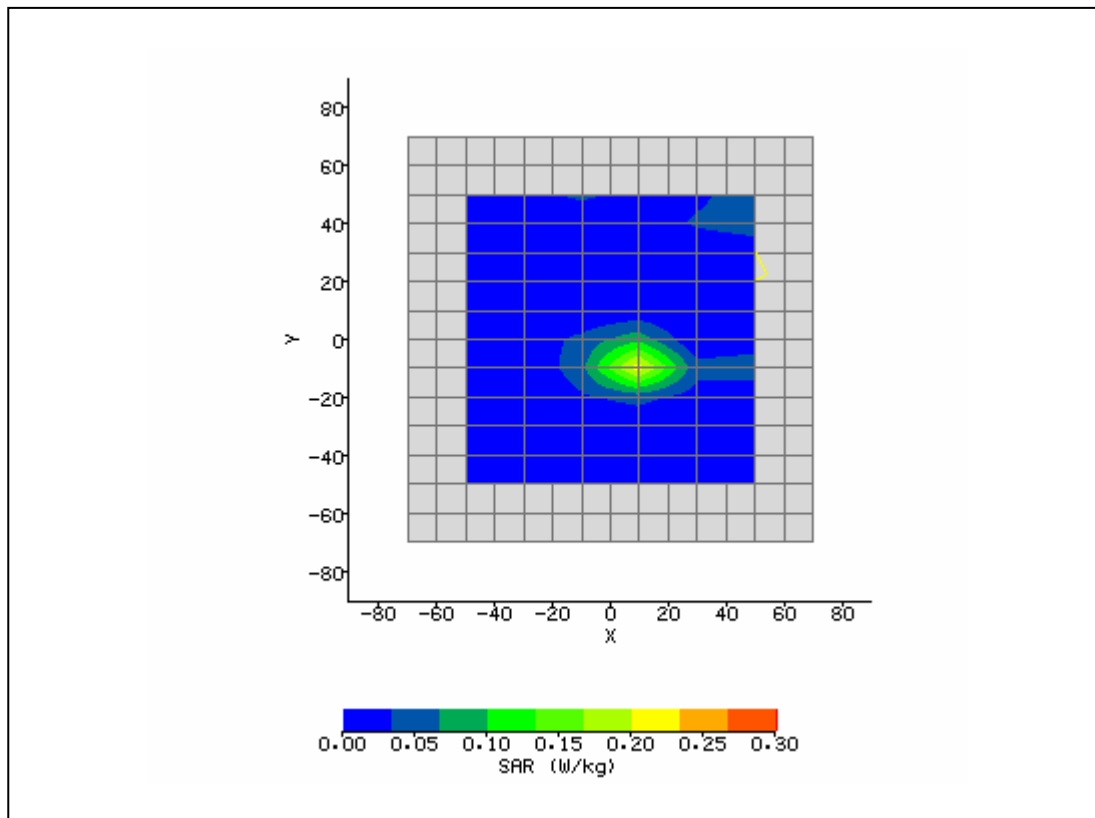


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	5/25/2007 11:06:53 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	RightM48_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	5250
<b>Device Under Test:</b>	Optimator-Kedron AGN	<b>Relative Permittivity:</b>	48.16
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	5.218
<b>Phantom S/No:</b>	HeadBox1.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	4.00 mm
<b>DUT Position:</b>	Right side 0mm.	<b>Max SAR Y-axis Location:</b>	-11.00 mm
<b>Antenna Configuration:</b>	Integral_Aux.	<b>Max E Field:</b>	6.33 V/m
<b>Test Frequency:</b>	5240MHz	<b>SAR 1g:</b>	0.214 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.494 / .494 / .494	<b>SAR Start:</b>	0.018 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.019 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	1.07 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	05/24/07
<b>Input Power Level:</b>	d.c.91%	<b>Extrapolation:</b>	poly4

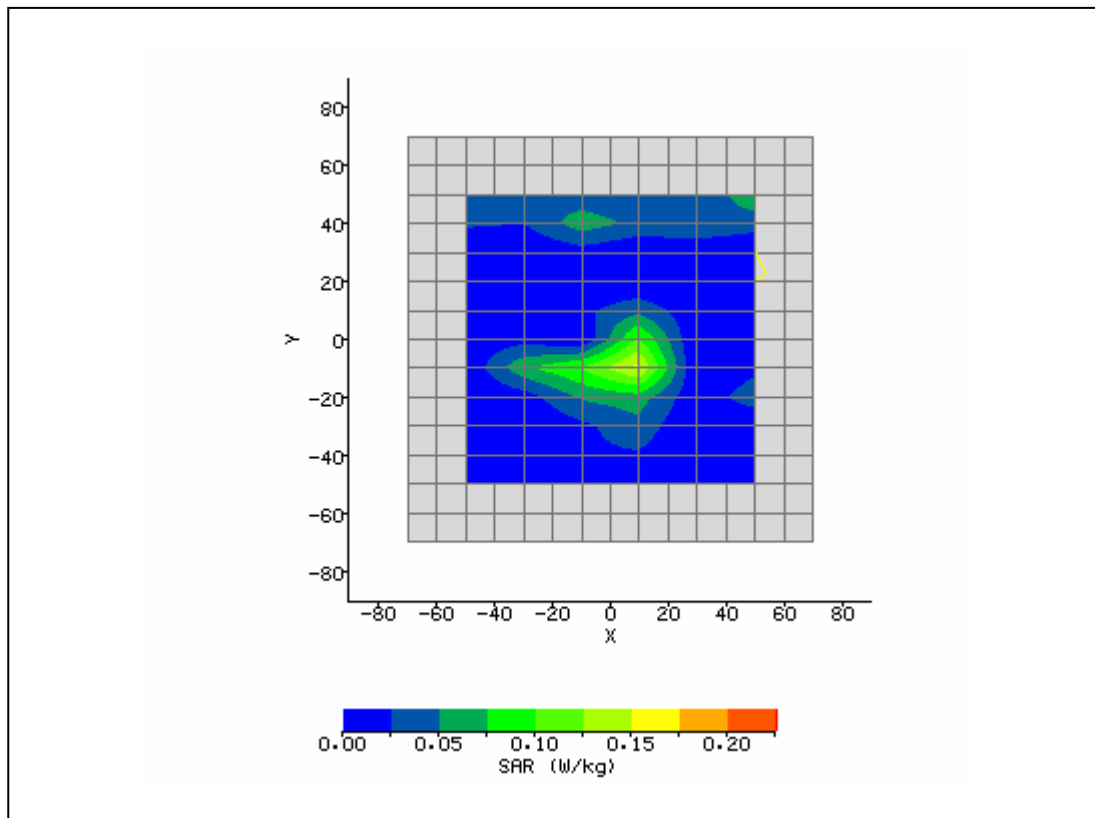

<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	5/29/2007 12:17:00 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	RightAux52_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	5200
<b>Device Under Test:</b>	Optimator-Kedron AGN	<b>Relative Permittivity:</b>	48.07
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	5.211
<b>Phantom S/No:</b>	HeadBox1.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	20.00 mm
<b>DUT Position:</b>	Left side 0mm.	<b>Max SAR Y-axis Location:</b>	-32.00 mm
<b>Antenna Configuration:</b>	Integral_Main.	<b>Max E Field:</b>	8.28 V/m
<b>Test Frequency:</b>	5260MHz	<b>SAR 1g:</b>	0.176 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.494 / .494 / .494	<b>SAR Start:</b>	0.046 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.046 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-1.25 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	05/29/07
<b>Input Power Level:</b>	d.c.91%	<b>Extrapolation:</b>	poly4

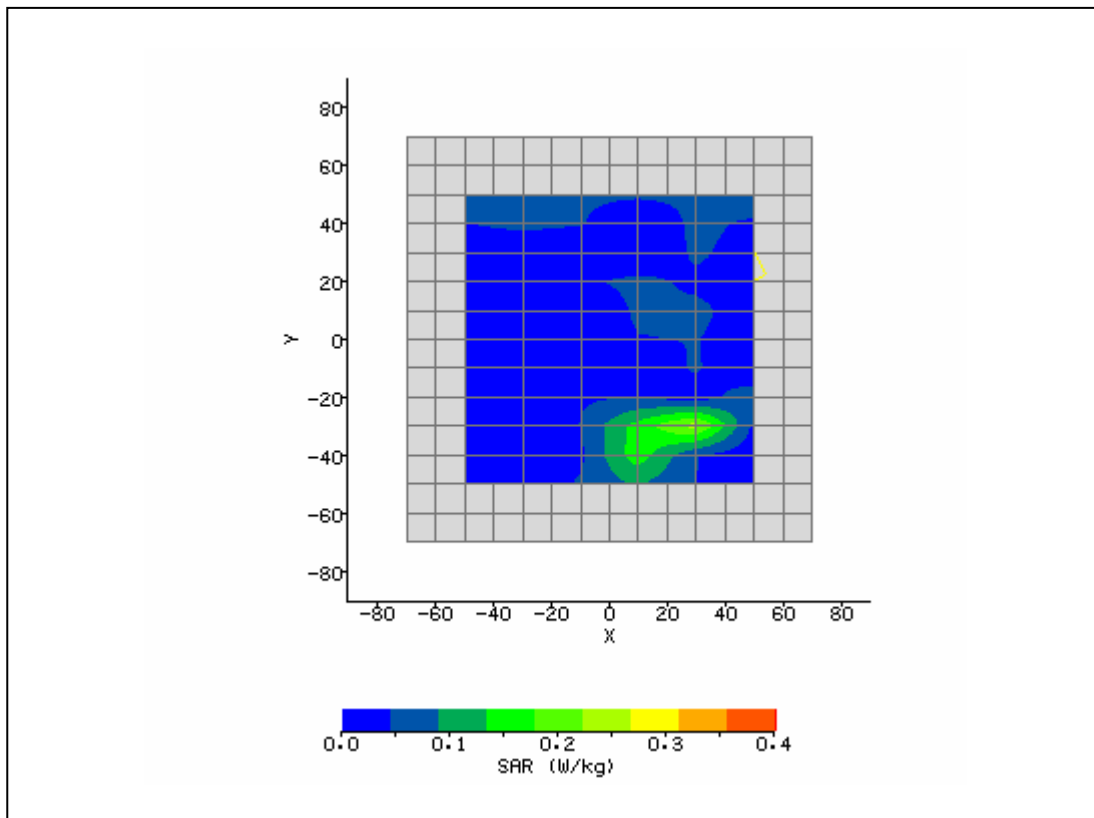


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	5/29/2007 9:46:01 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	LeftAux64_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	5200
<b>Device Under Test:</b>	Optimator-Kedron AG	<b>Relative Permittivity:</b>	48.07
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	5.211
<b>Phantom S/No:</b>	HeadBox1.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	16.00 mm
<b>DUT Position:</b>	Left side 0mm.	<b>Max SAR Y-axis Location:</b>	-30.00 mm
<b>Antenna Configuration:</b>	Integral_Aux.	<b>Max E Field:</b>	8.17 V/m
<b>Test Frequency:</b>	5260MHz	<b>SAR 1g:</b>	0.252 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.494 / .494 / .494	<b>SAR Start:</b>	0.050 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.048 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-4.71 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	05/29/07
<b>Input Power Level:</b>	d.c.91%	<b>Extrapolation:</b>	poly4

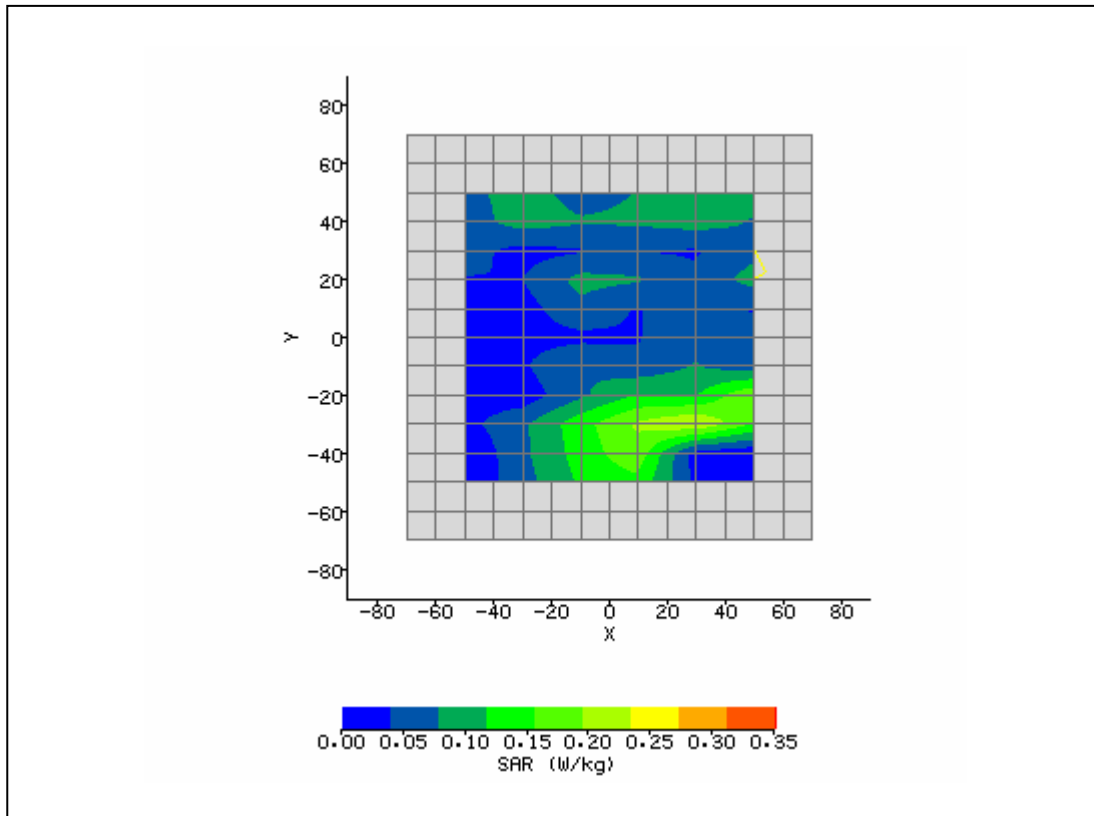





<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	5/29/2007 10:15:00 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	RightMain52_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	5200
<b>Device Under Test:</b>	Optimator-Kedron AGN	<b>Relative Permittivity:</b>	48.07
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	5.181
<b>Phantom S/No:</b>	HeadBox1.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	-10.00 mm
<b>DUT Position:</b>	Lap side 0mm.	<b>Max SAR Y-axis Location:</b>	50.00 mm
<b>Antenna Configuration:</b>	Integral_Main.	<b>Max E Field:</b>	4.85 V/m
<b>Test Frequency:</b>	5320MHz	<b>SAR 1g:</b>	0.085 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.494 / .494 / .494	<b>SAR Start:</b>	0.119 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.121 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	1.68 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	05/29/07
<b>Input Power Level:</b>	d.c.91%	<b>Extrapolation:</b>	poly4

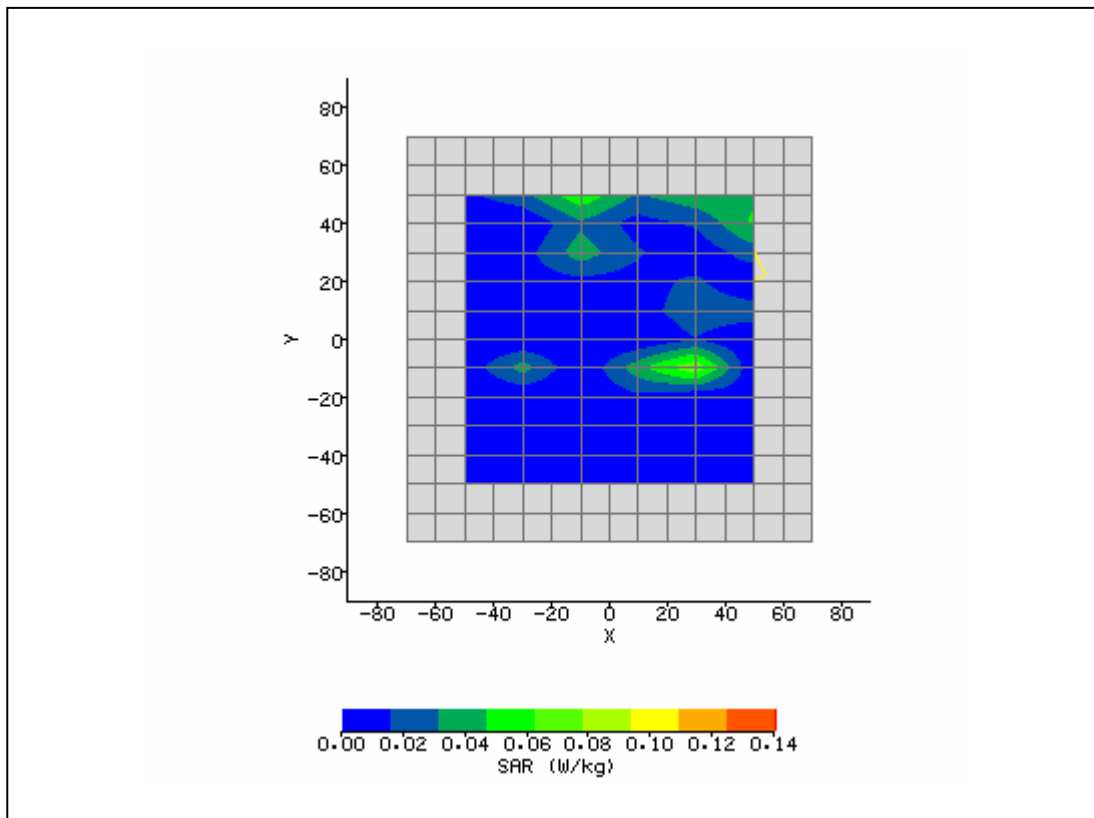


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	5/29/2007 10:46:00 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	LapMain64_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	5200
<b>Device Under Test:</b>	Optimator-Kedron AGN	<b>Relative Permittivity:</b>	48.07
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	5.181
<b>Phantom S/No:</b>	HeadBox1.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	-30.00 mm
<b>DUT Position:</b>	Lap side 0mm.	<b>Max SAR Y-axis Location:</b>	50.00 mm
<b>Antenna Configuration:</b>	Integral_Aux.	<b>Max E Field:</b>	5.00 V/m
<b>Test Frequency:</b>	5320MHz	<b>SAR 1g:</b>	0.149 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	0.302 W/kg
<b>Conversion Factors:</b>	.494 / .494 / .494	<b>SAR Start:</b>	0.052 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.050 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-3.84 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	05/29/07
<b>Input Power Level:</b>	d.c.91%	<b>Extrapolation:</b>	poly4

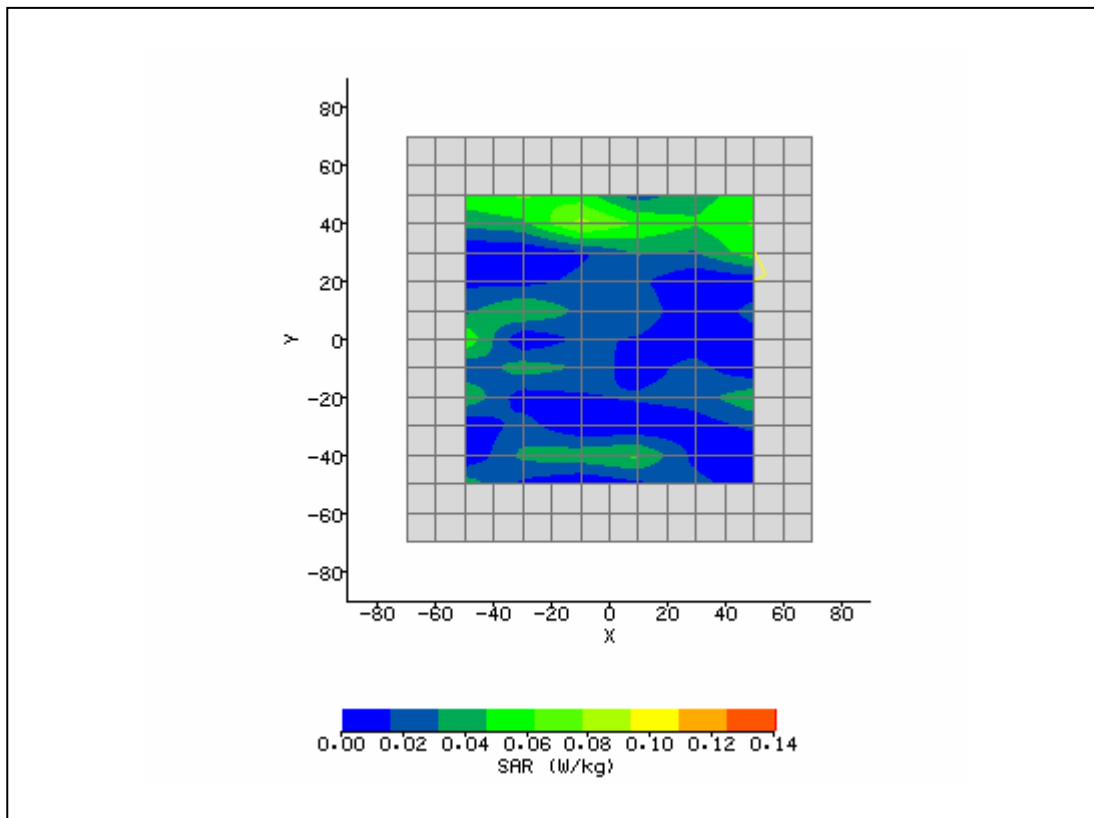


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	5/29/2007 11:32:15 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	LapAux64_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	5200
<b>Device Under Test:</b>	Optimator-Kedron AGN	<b>Relative Permittivity:</b>	48.07
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	5.181
<b>Phantom S/No:</b>	HeadBox1.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	-28.00 mm
<b>DUT Position:</b>	Right side 0mm.	<b>Max SAR Y-axis Location:</b>	-39.00 mm
<b>Antenna Configuration:</b>	Integral_Main.	<b>Max E Field:</b>	8.98 V/m
<b>Test Frequency:</b>	5320MHz	<b>SAR 1g:</b>	0.254 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.494 / .494 / .494	<b>SAR Start:</b>	0.043 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.041 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-4.65 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	05/29/07
<b>Input Power Level:</b>	d.c.91%	<b>Extrapolation:</b>	poly4

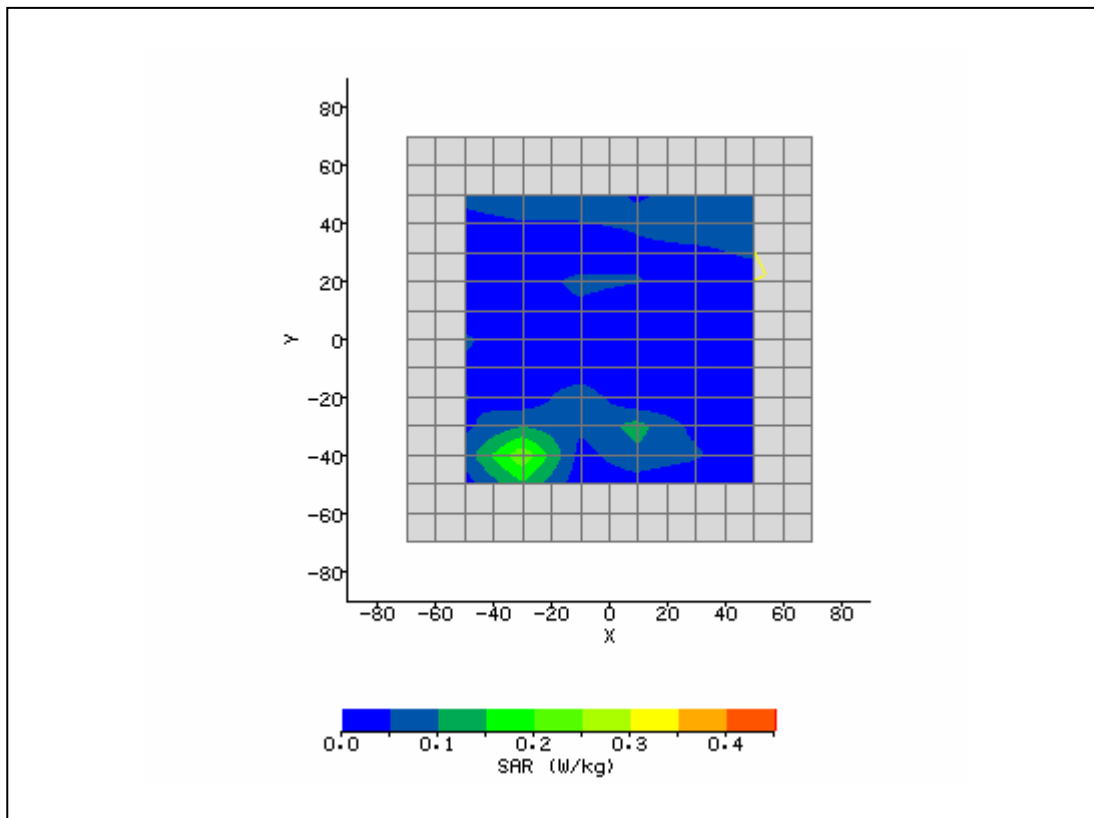


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	5/29/2007 11:54:40 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	RightMain64_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	5200
<b>Device Under Test:</b>	Optimator-Kedron AGN	<b>Relative Permittivity:</b>	48.07
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	5.181
<b>Phantom S/No:</b>	HeadBox1.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	10.00 mm
<b>DUT Position:</b>	Left side 0mm.	<b>Max SAR Y-axis Location:</b>	-22.00 mm
<b>Antenna Configuration:</b>	Integral_Aux.	<b>Max E Field:</b>	9.52 V/m
<b>Test Frequency:</b>	5320MHz	<b>SAR 1g:</b>	0.117 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.494 / .494 / .494	<b>SAR Start:</b>	0.091 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.089 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-2.19 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	05/29/07
<b>Input Power Level:</b>	d.c.91%	<b>Extrapolation:</b>	poly4

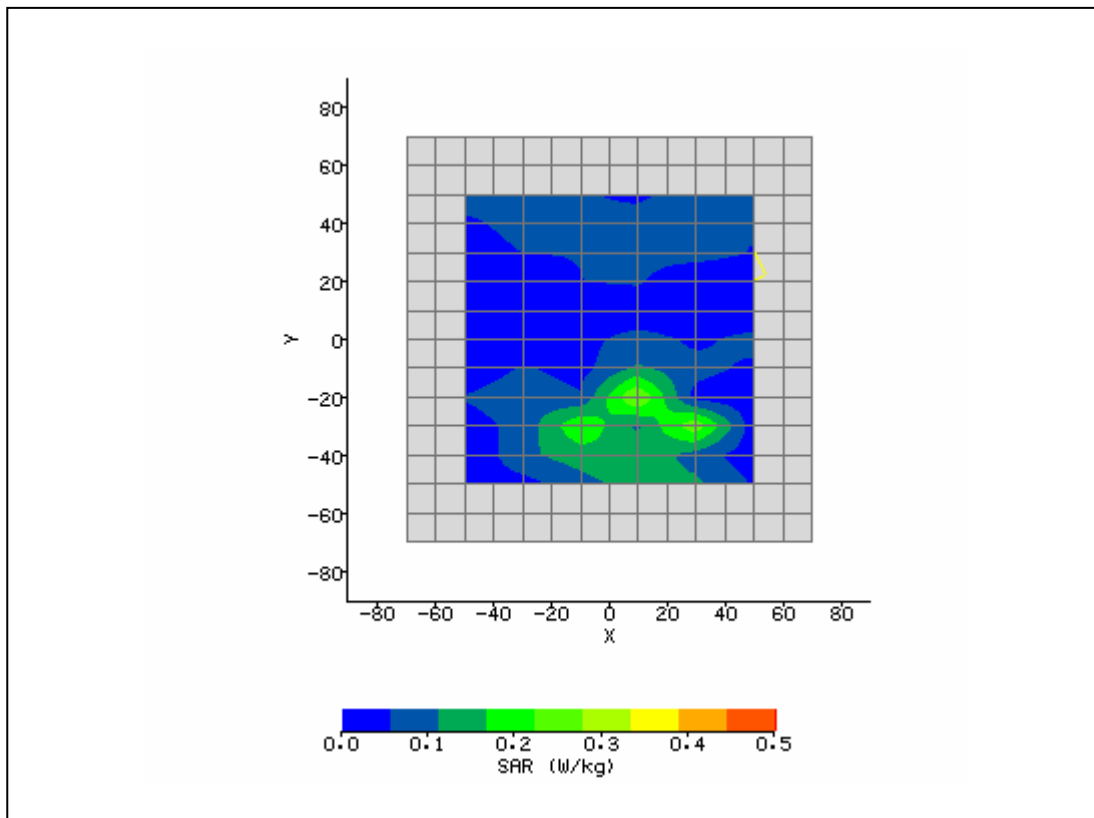


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	5/30/2007 10:02:35 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	RightMain165_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	5800
<b>Device Under Test:</b>	Optimator-Kedron AGN	<b>Relative Permittivity:</b>	47.42
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	5.112
<b>Phantom S/No:</b>	HeadBox1.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	50.00 mm
<b>DUT Position:</b>	Lap 0mm.	<b>Max SAR Y-axis Location:</b>	50.00 mm
<b>Antenna Configuration:</b>	Integral_Main.	<b>Max E Field:</b>	6.47 V/m
<b>Test Frequency:</b>	5805MHz	<b>SAR 1g:</b>	0.212 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.583 / .583 / .583	<b>SAR Start:</b>	0.112 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.114 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	2.09 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	05/30/07
<b>Input Power Level:</b>	d.c.91%	<b>Extrapolation:</b>	poly4

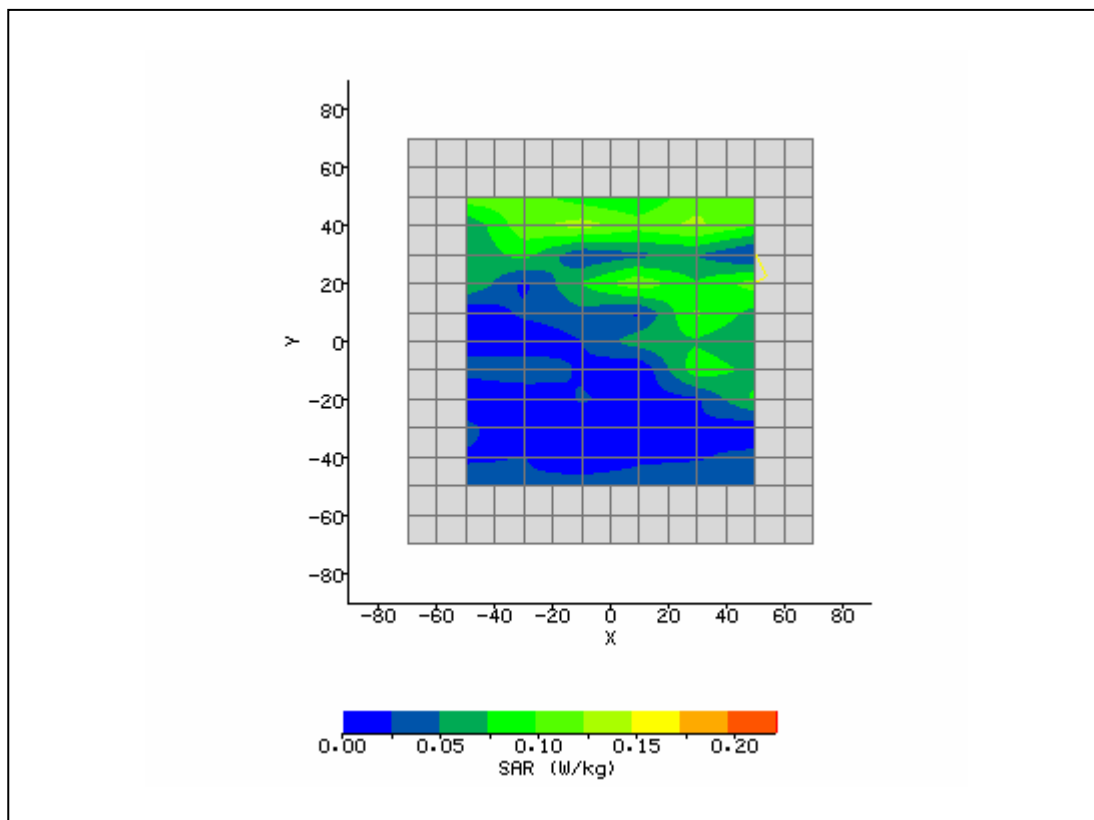


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	5/30/2007 12:09:17 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	LeftAux161_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	5800
<b>Device Under Test:</b>	Optimator-Kedron AGN	<b>Relative Permittivity:</b>	47.42
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	6.109
<b>Phantom S/No:</b>	HeadBox1.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	-10.00 mm
<b>DUT Position:</b>	Lap 0mm.	<b>Max SAR Y-axis Location:</b>	46.00 mm
<b>Antenna Configuration:</b>	Integral_Aux.	<b>Max E Field:</b>	5.76 V/m
<b>Test Frequency:</b>	5805MHz	<b>SAR 1g:</b>	0.207 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.583 / .583 / .583	<b>SAR Start:</b>	0.069 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.071 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	2.89 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	05/30/07
<b>Input Power Level:</b>	d.c.91%	<b>Extrapolation:</b>	poly4

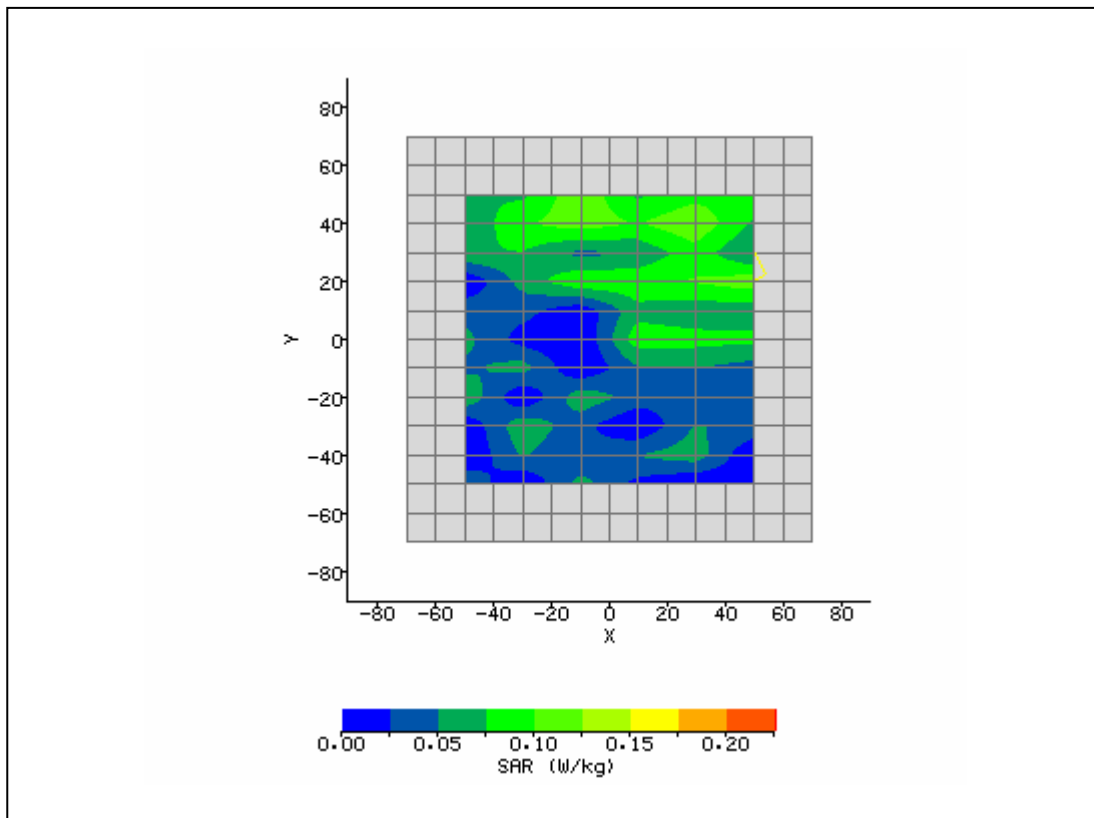

<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	5/30/2007 10:42:49 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	LapAux161_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	5800
<b>Device Under Test:</b>	Optimator-Kedron AGN	<b>Relative Permittivity:</b>	47.42
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	5.112
<b>Phantom S/No:</b>	HeadBox1.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	26.00 mm
<b>DUT Position:</b>	Right side 0mm.	<b>Max SAR Y-axis Location:</b>	-25.00 mm
<b>Antenna Configuration:</b>	Integral_Main.	<b>Max E Field:</b>	7.77 V/m
<b>Test Frequency:</b>	5805MHz	<b>SAR 1g:</b>	0.334 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.583 / .583 / .583	<b>SAR Start:</b>	0.089 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.090 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	1.15 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	05/30/07
<b>Input Power Level:</b>	d.c.91%	<b>Extrapolation:</b>	poly4

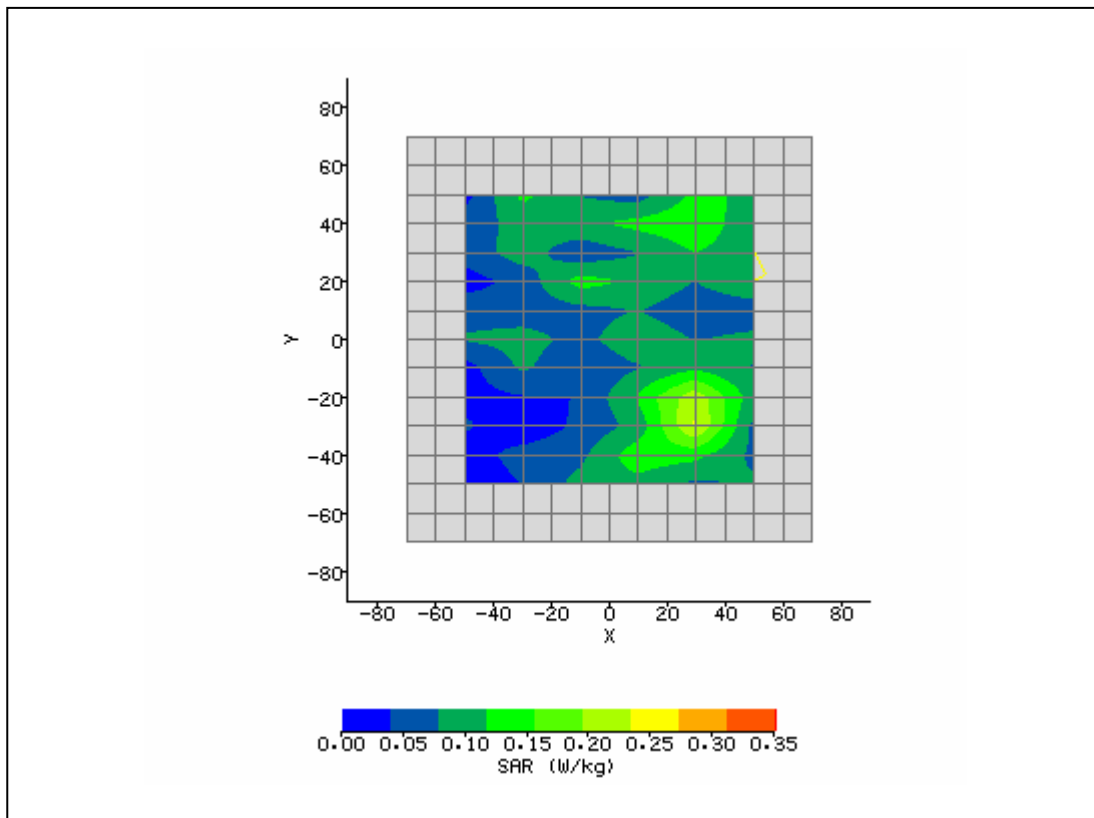


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	5/30/2007 11:05:32 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	RightMain161_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	5800
<b>Device Under Test:</b>	Optimator-Kedron AGN	<b>Relative Permittivity:</b>	47.42
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	5.112
<b>Phantom S/No:</b>	HeadBox1.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	8.00 mm
<b>DUT Position:</b>	Left side 0mm.	<b>Max SAR Y-axis Location:</b>	-13.00 mm
<b>Antenna Configuration:</b>	Integral_Aux.	<b>Max E Field:</b>	8.17 V/m
<b>Test Frequency:</b>	5805MHz	<b>SAR 1g:</b>	0.285 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.583 / .583 / .583	<b>SAR Start:</b>	0.078 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.079 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	1.28 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	05/30/07
<b>Input Power Level:</b>	d.c.91%	<b>Extrapolation:</b>	poly4

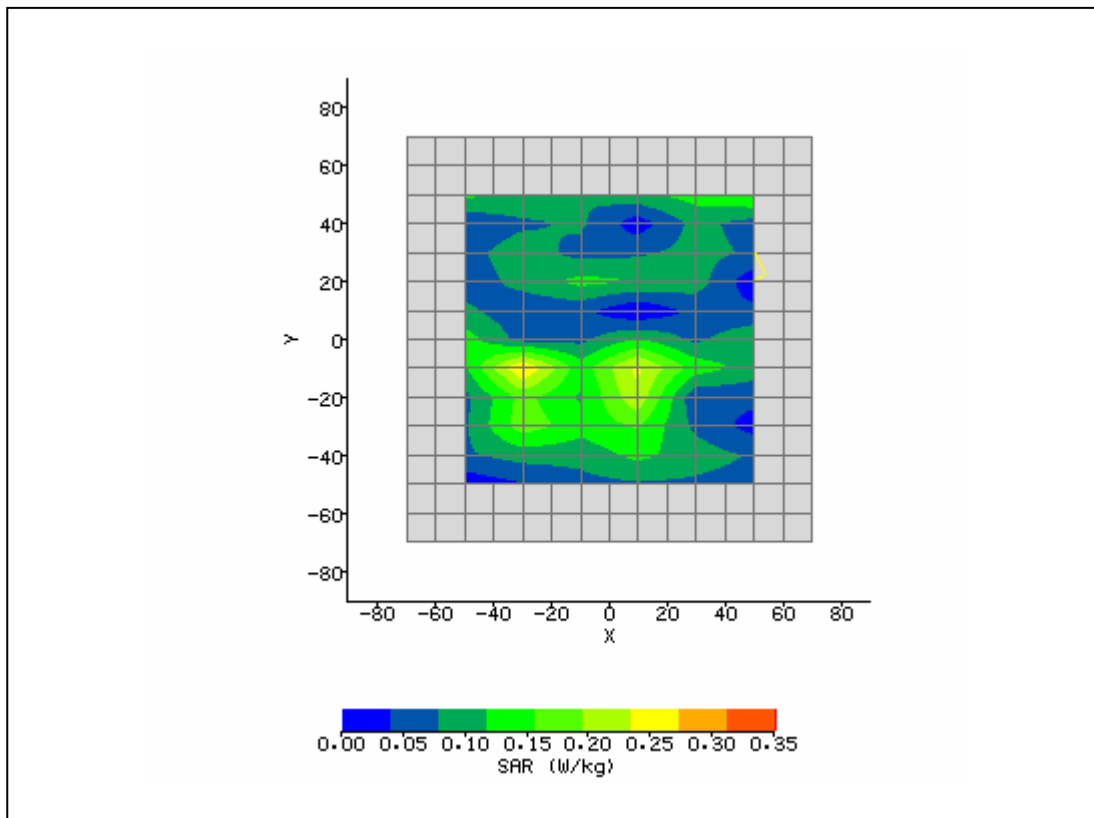





<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	5/30/2007 1:46:01 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	LeftAux161_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	5800
<b>Device Under Test:</b>	Optimator-Kedron AGN	<b>Relative Permittivity:</b>	48.21
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	5.895
<b>Phantom S/No:</b>	HeadBox1.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	10.00 mm
<b>DUT Position:</b>	Right side 0mm.	<b>Max SAR Y-axis Location:</b>	-12.00 mm
<b>Antenna Configuration:</b>	Integral_Main.	<b>Max E Field:</b>	6.42 V/m
<b>Test Frequency:</b>	5745MHz	<b>SAR 1g:</b>	0.247 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.583 / .583 / .583	<b>SAR Start:</b>	0.121 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.122 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	0.82 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	05/30/07
<b>Input Power Level:</b>	d.c.91%	<b>Extrapolation:</b>	poly4

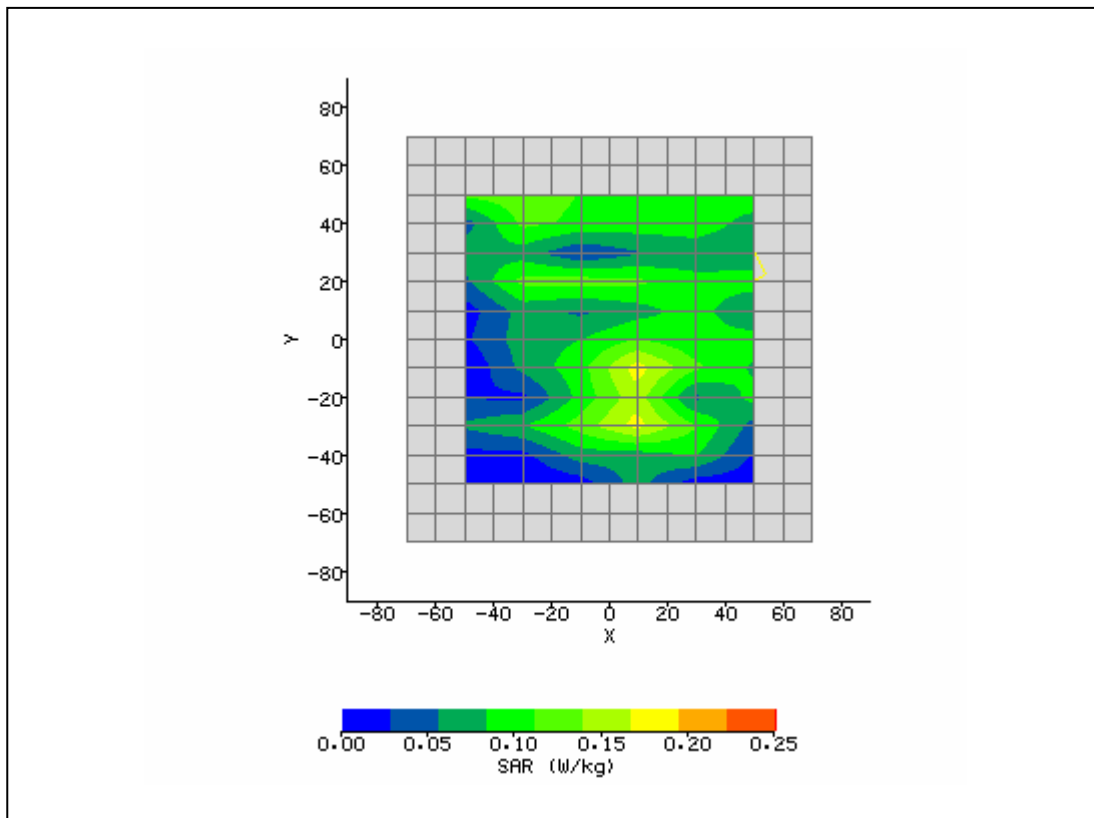


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	5/30/2007 2:05:30 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	RightMain149_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	5800
<b>Device Under Test:</b>	Optimator-Kedron AGN	<b>Relative Permittivity:</b>	47.85
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	6.066
<b>Phantom S/No:</b>	HeadBox1.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	28.00 mm
<b>DUT Position:</b>	Right side 0mm.	<b>Max SAR Y-axis Location:</b>	-19.00 mm
<b>Antenna Configuration:</b>	Integral_Main.	<b>Max E Field:</b>	6.42 V/m
<b>Test Frequency:</b>	5785MHz	<b>SAR 1g:</b>	0.281 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.583 / .583 / .583	<b>SAR Start:</b>	0.087 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.088 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	1.14 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	05/30/07
<b>Input Power Level:</b>	d.c.91%	<b>Extrapolation:</b>	poly4

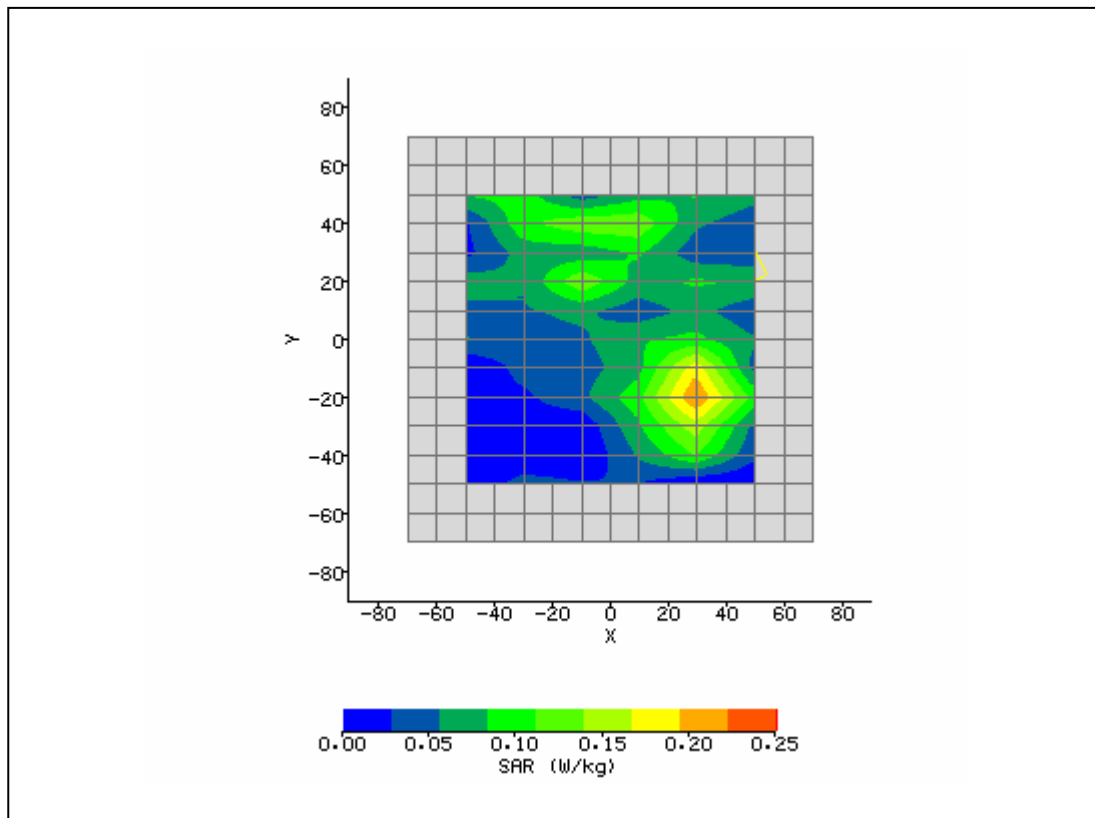


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	5/30/2007 2:24:23 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	RightMain157_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	5800
<b>Device Under Test:</b>	Optimator-Kedron AGN	<b>Relative Permittivity:</b>	47.14
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	6.112
<b>Phantom S/No:</b>	HeadBox1.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	32.00 mm
<b>DUT Position:</b>	Right side 0mm.	<b>Max SAR Y-axis Location:</b>	50.00 mm
<b>Antenna Configuration:</b>	Integral_Main.	<b>Max E Field:</b>	8.01 V/m
<b>Test Frequency:</b>	5825MHz	<b>SAR 1g:</b>	0.376 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	0.297 W/kg
<b>Conversion Factors:</b>	.583 / .583 / .583	<b>SAR Start:</b>	0.134 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.139 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	3.73 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	05/30/07
<b>Input Power Level:</b>	d.c.91%	<b>Extrapolation:</b>	poly4

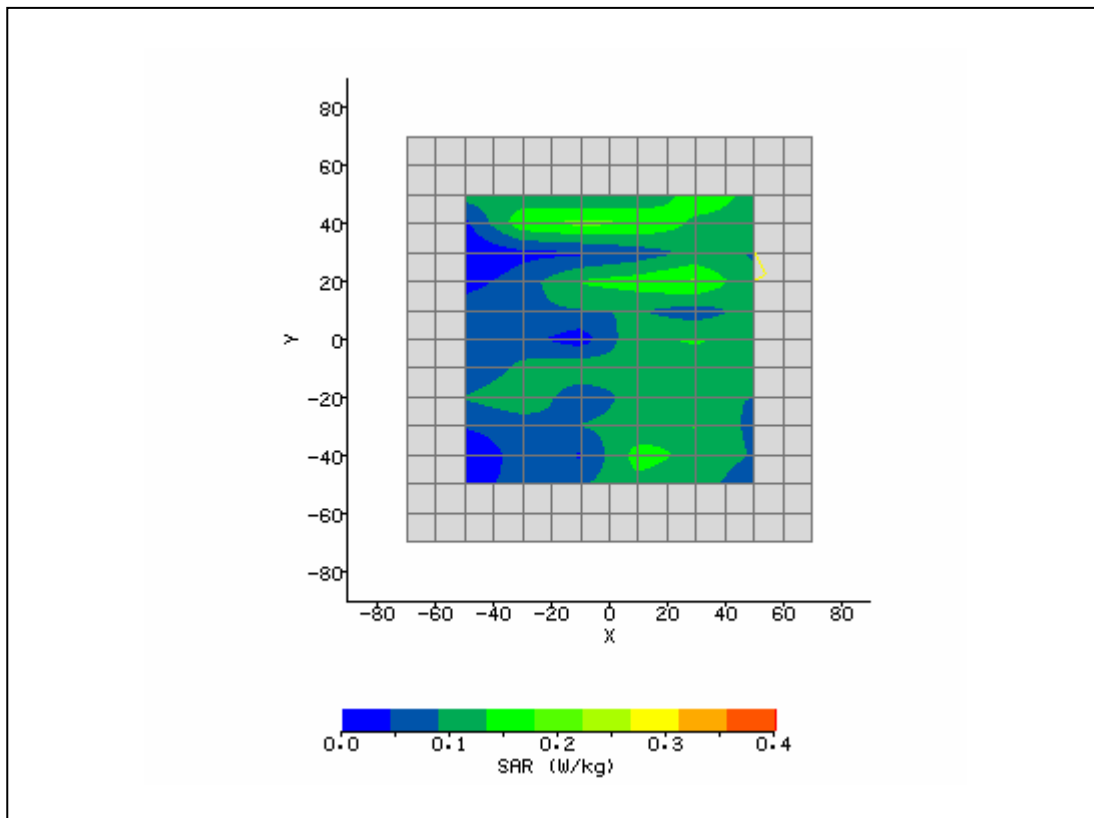


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	6/1/2007 5:08:49 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	RightMain62_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	5200
<b>Device Under Test:</b>	Optimator-Kedron AGN	<b>Relative Permittivity:</b>	48.17
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	5.217
<b>Phantom S/No:</b>	HeadBox1.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	50.00 mm
<b>DUT Position:</b>	Lap 0mm.	<b>Max SAR Y-axis Location:</b>	35.00 mm
<b>Antenna Configuration:</b>	Integral_Main.	<b>Max E Field:</b>	5.78 V/m
<b>Test Frequency:</b>	5230MHz	<b>SAR 1g:</b>	0.166 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.494 / .494 / .494	<b>SAR Start:</b>	0.097 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.095 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-2.06 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	06/01/07
<b>Input Power Level:</b>	d.c.91%	<b>Extrapolation:</b>	poly4

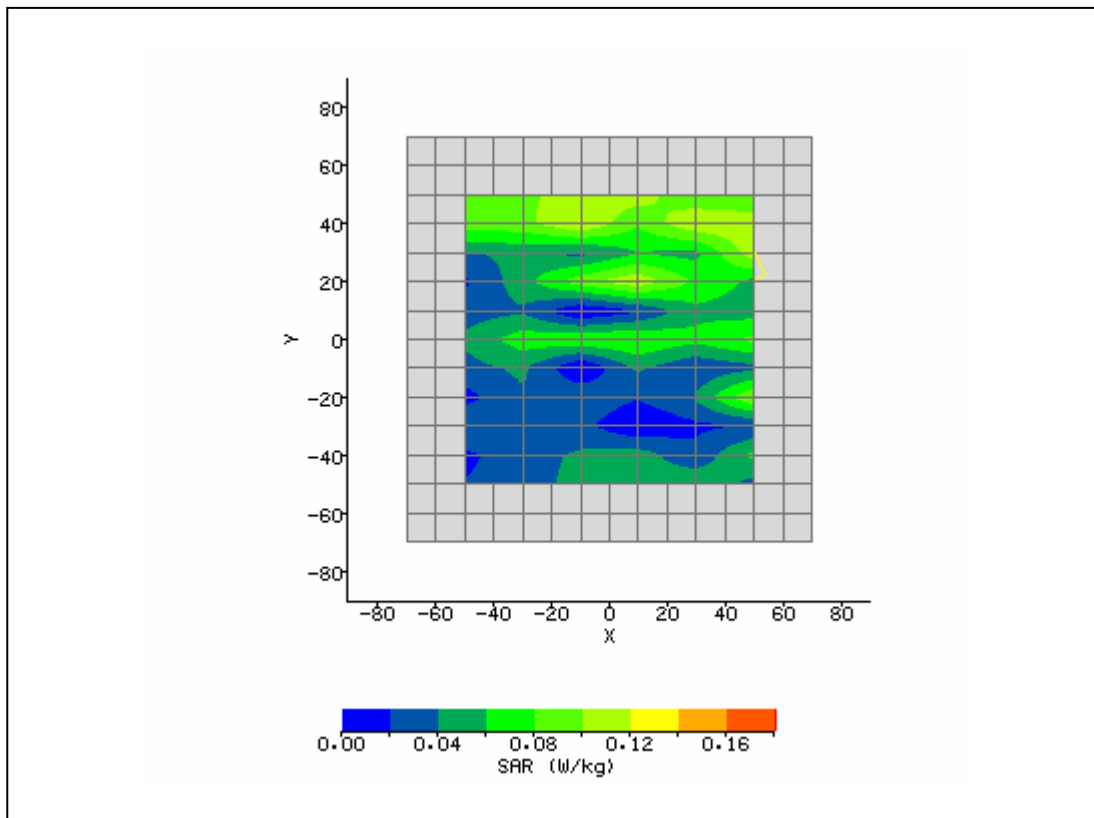


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	6/1/2007 4:24:31 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	RightMain38_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	5200
<b>Device Under Test:</b>	Optimator-Kedron AGN	<b>Relative Permittivity:</b>	48.17
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	5.217
<b>Phantom S/No:</b>	HeadBox1.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	22.00 mm
<b>DUT Position:</b>	Right side 0mm.	<b>Max SAR Y-axis Location:</b>	-10.00 mm
<b>Antenna Configuration:</b>	Integral_Main.	<b>Max E Field:</b>	9.66 V/m
<b>Test Frequency:</b>	5230MHz	<b>SAR 1g:</b>	0.493 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.494 / .494 / .494	<b>SAR Start:</b>	0.106 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.101 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-4.71 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	06/01/07
<b>Input Power Level:</b>	d.c.91%	<b>Extrapolation:</b>	poly4

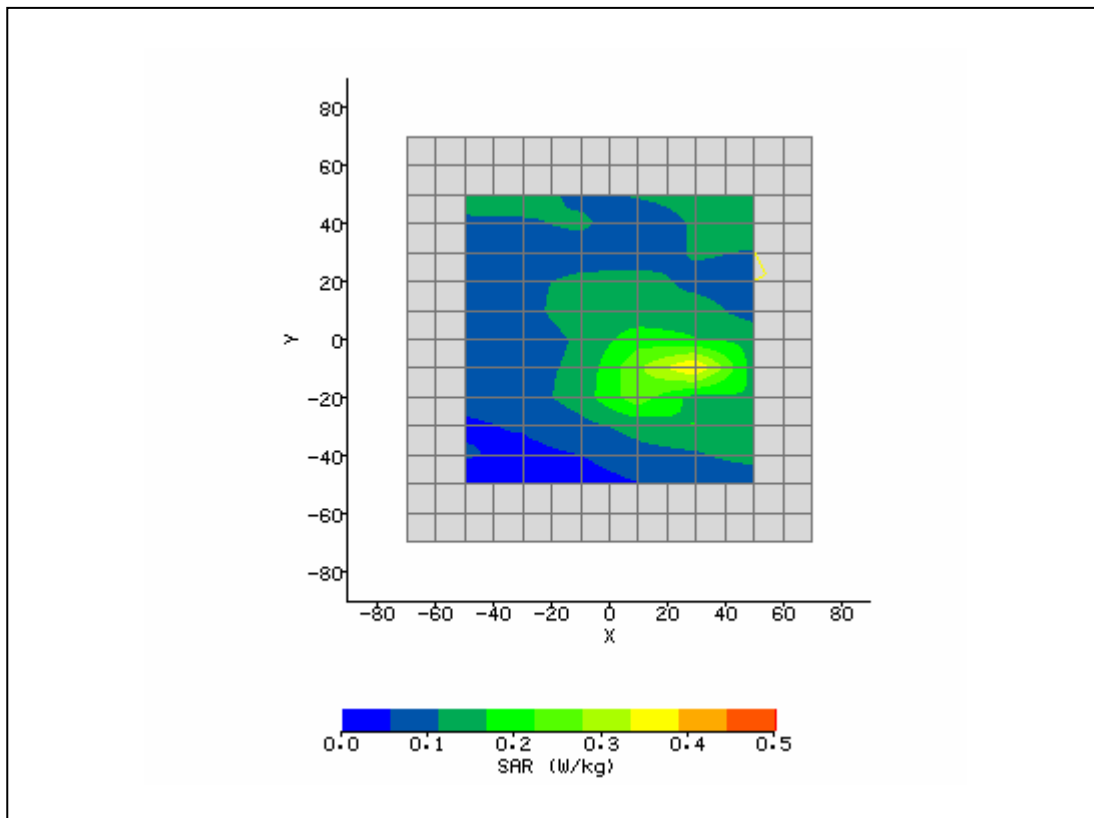


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	6/1/2007 4:02:09 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	LeftAux54_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	5200
<b>Device Under Test:</b>	Optimator-Kedron AGN	<b>Relative Permittivity:</b>	48.20
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	5.220
<b>Phantom S/No:</b>	HeadBox1.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	28.00 mm
<b>DUT Position:</b>	Right side 0mm.	<b>Max SAR Y-axis Location:</b>	-31.00 mm
<b>Antenna Configuration:</b>	Integral_Main.	<b>Max E Field:</b>	7.04 V/m
<b>Test Frequency:</b>	5190MHz	<b>SAR 1g:</b>	0.235 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.494 / .494 / .494	<b>SAR Start:</b>	0.083 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.085 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	2.44 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	06/01/07
<b>Input Power Level:</b>	d.c.91%	<b>Extrapolation:</b>	poly4

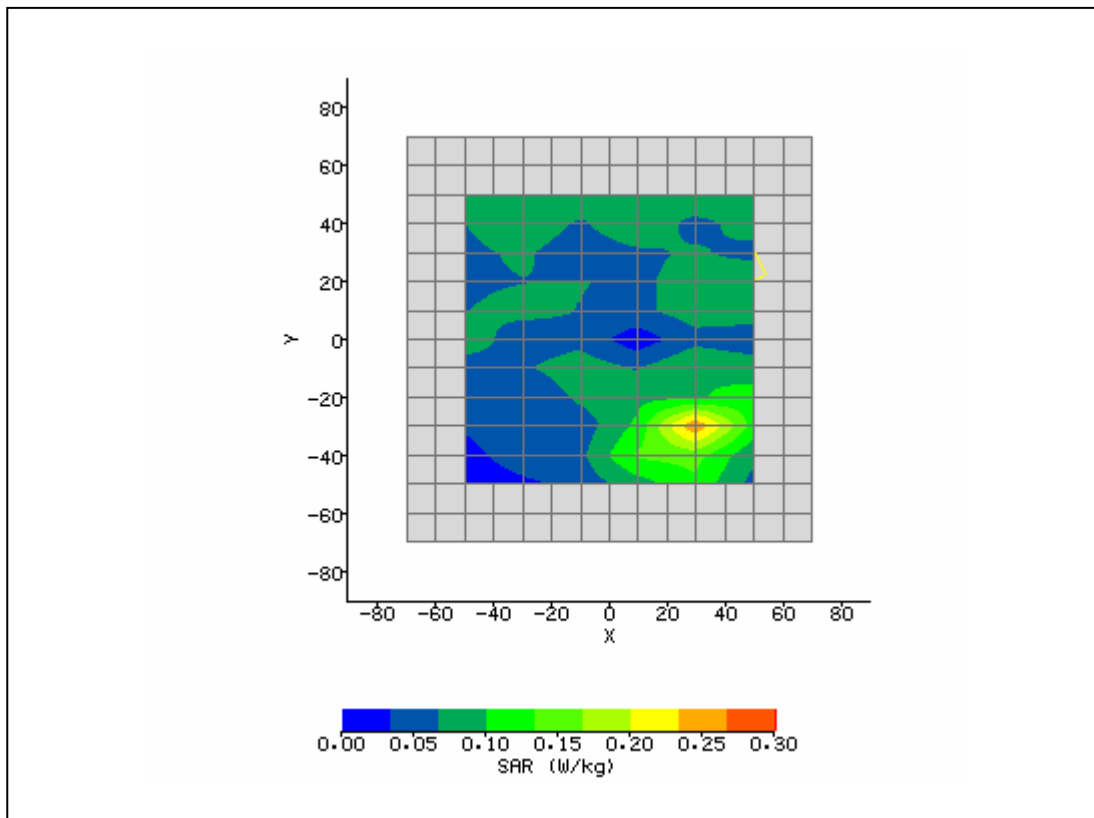

<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	6/1/2007 3:25:26 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	LapMain54_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	5200
<b>Device Under Test:</b>	Optimator-Kedron AGN	<b>Relative Permittivity:</b>	48.01
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	5.209
<b>Phantom S/No:</b>	HeadBox1.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	28.00 mm
<b>DUT Position:</b>	Right side 0mm.	<b>Max SAR Y-axis Location:</b>	-23.00 mm
<b>Antenna Configuration:</b>	Integral_Main.	<b>Max E Field:</b>	8.71 V/m
<b>Test Frequency:</b>	5270MHz	<b>SAR 1g:</b>	0.447 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.494 / .494 / .494	<b>SAR Start:</b>	0.108 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.105 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-2.78 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	06/01/07
<b>Input Power Level:</b>	d.c.91%	<b>Extrapolation:</b>	poly4

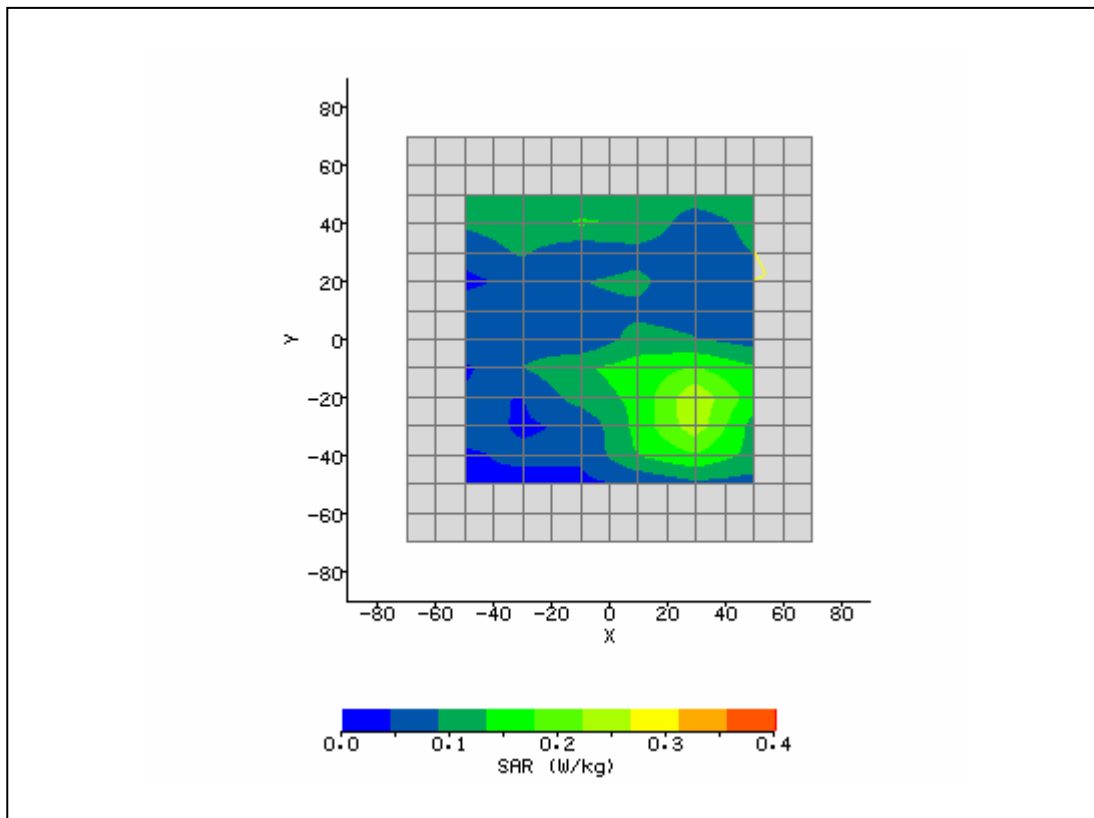


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	6/1/2007 4:45:46 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	RightMain46_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	5200
<b>Device Under Test:</b>	Optimator-Kedron AGN	<b>Relative Permittivity:</b>	47.99
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	5.183
<b>Phantom S/No:</b>	HeadBox1.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	6.00 mm
<b>DUT Position:</b>	Right side 0mm.	<b>Max SAR Y-axis Location:</b>	-4.00 mm
<b>Antenna Configuration:</b>	Integral_Main.	<b>Max E Field:</b>	7.51 V/m
<b>Test Frequency:</b>	5310MHz	<b>SAR 1g:</b>	0.289 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.494 / .494 / .494	<b>SAR Start:</b>	0.085 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.082 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-3.52 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	06/01/07
<b>Input Power Level:</b>	d.c.91%	<b>Extrapolation:</b>	poly4

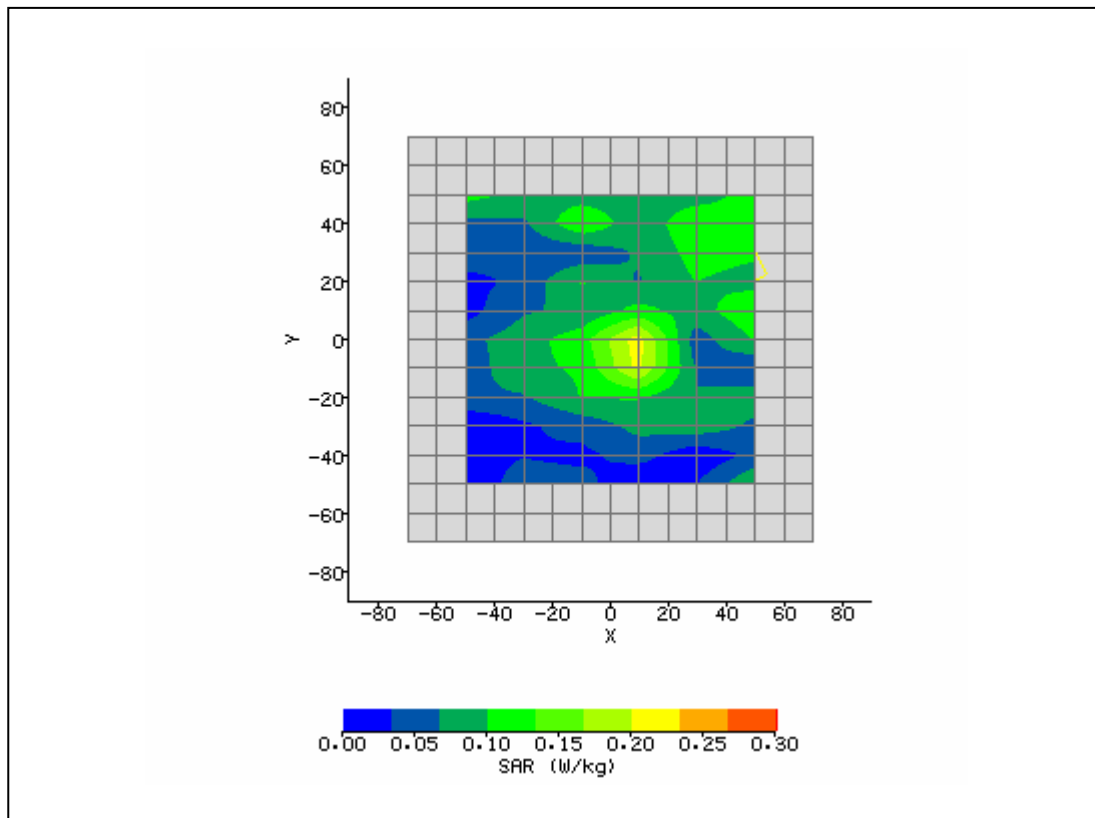





<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	6/1/2007 2:35:32 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	temp.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	5200
<b>Device Under Test:</b>	Optimator-Kedron AGN	<b>Relative Permittivity:</b>	48.01
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	5.209
<b>Phantom S/No:</b>	HeadBox1.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	50.00 mm
<b>DUT Position:</b>	Lap 0mm.	<b>Max SAR Y-axis Location:</b>	31.00 mm
<b>Antenna Configuration:</b>	Integral_Aux.	<b>Max E Field:</b>	5.41 V/m
<b>Test Frequency:</b>	5270MHz	<b>SAR 1g:</b>	0.145 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.494 / .494 / .494	<b>SAR Start:</b>	0.089 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.085 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-4.49 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	06/01/07
<b>Input Power Level:</b>	d.c.91%	<b>Extrapolation:</b>	poly4

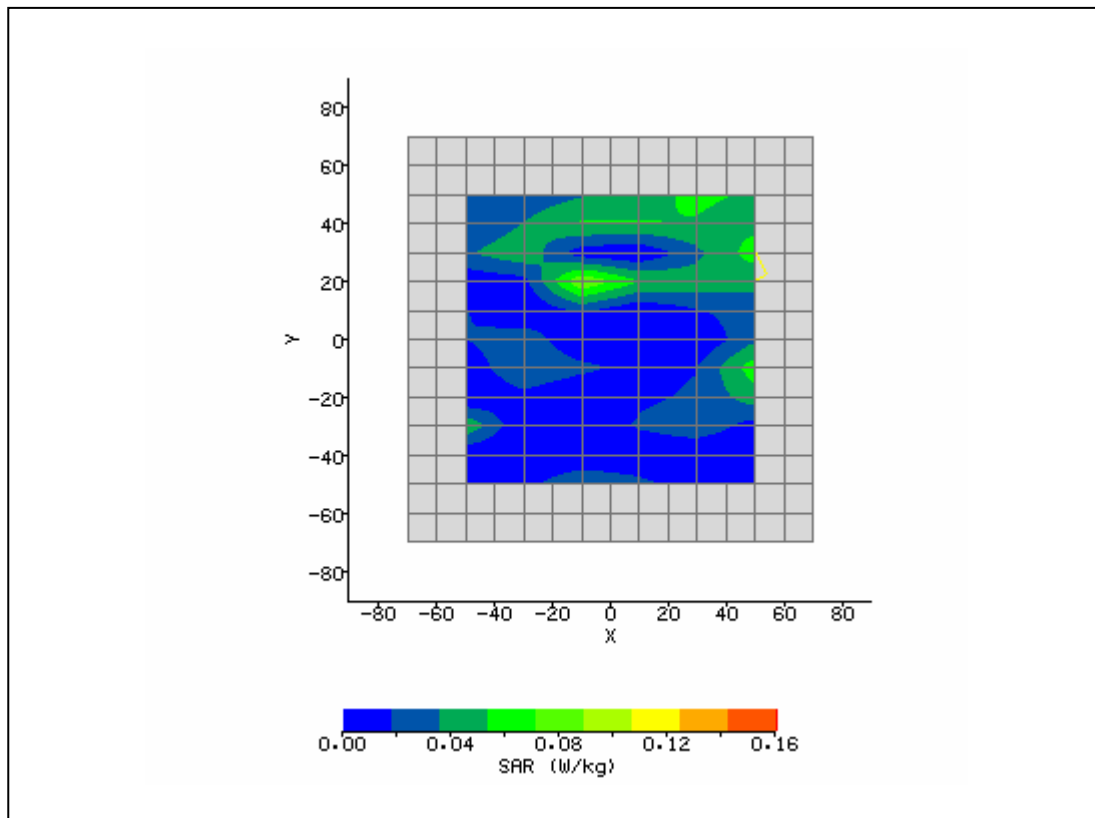


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	6/1/2007 3:44:33 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	RightMain54_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	5200
<b>Device Under Test:</b>	Optimator-Kedron AGN	<b>Relative Permittivity:</b>	48.01
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	5.209
<b>Phantom S/No:</b>	HeadBox1.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	50.00 mm
<b>DUT Position:</b>	Left side 0mm.	<b>Max SAR Y-axis Location:</b>	15.00 mm
<b>Antenna Configuration:</b>	Integral_Aux.	<b>Max E Field:</b>	7.25 V/m
<b>Test Frequency:</b>	5270MHz	<b>SAR 1g:</b>	0.270 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.494 / .494 / .494	<b>SAR Start:</b>	0.110 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.114 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	3.94 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	06/01/07
<b>Input Power Level:</b>	d.c.91%	<b>Extrapolation:</b>	poly4

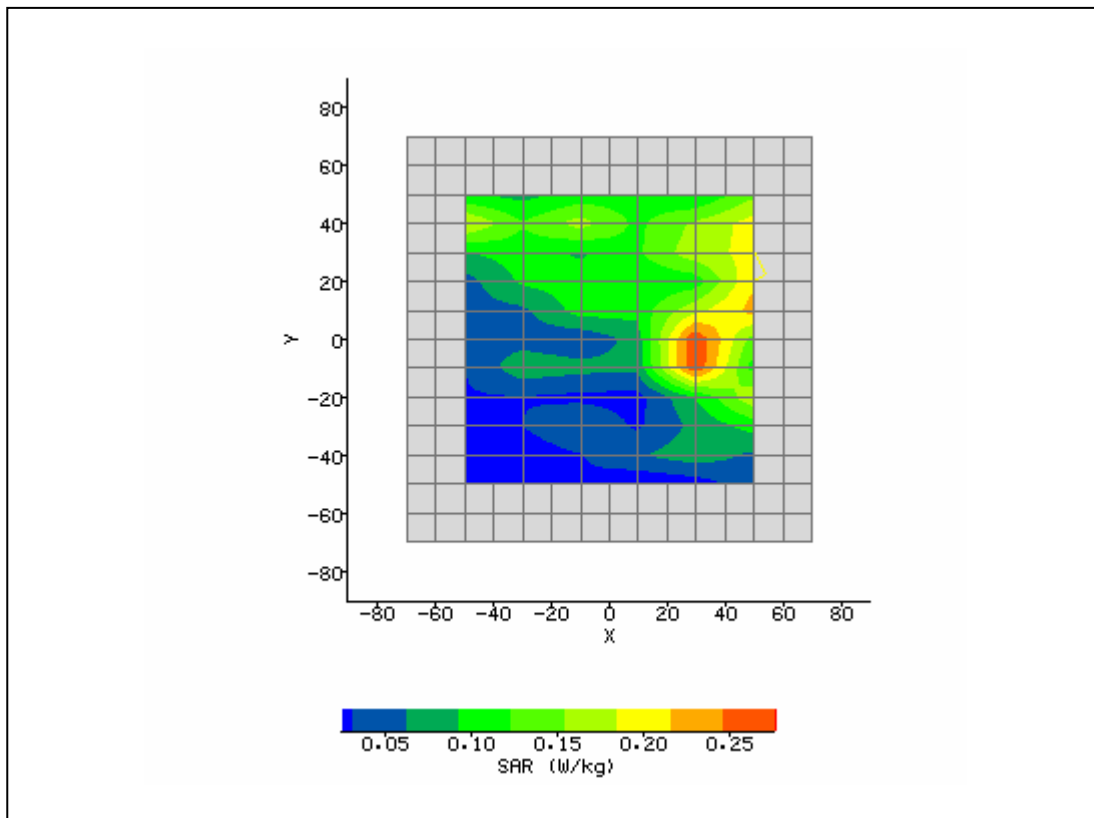


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	6/5/2007 12:09:08 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	LeftAux46_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	5200
<b>Device Under Test:</b>	Optimator - Kedron AGN	<b>Relative Permittivity:</b>	48.20
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	5.22
<b>Phantom S/No:</b>	HeadBox1.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	50.00 mm
<b>DUT Position:</b>	Left side 0mm.	<b>Max SAR Y-axis Location:</b>	36.00 mm
<b>Antenna Configuration:</b>	Integral - Aux.	<b>Max E Field:</b>	5.71 V/m
<b>Test Frequency:</b>	5190MHz	<b>SAR 1g:</b>	0.152 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.494 / .494 / .494	<b>SAR Start:</b>	0.101 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.105 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	3.96 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	06/05/07
<b>Input Power Level:</b>	As per EEPROM regulatory preset	<b>Extrapolation:</b>	poly4

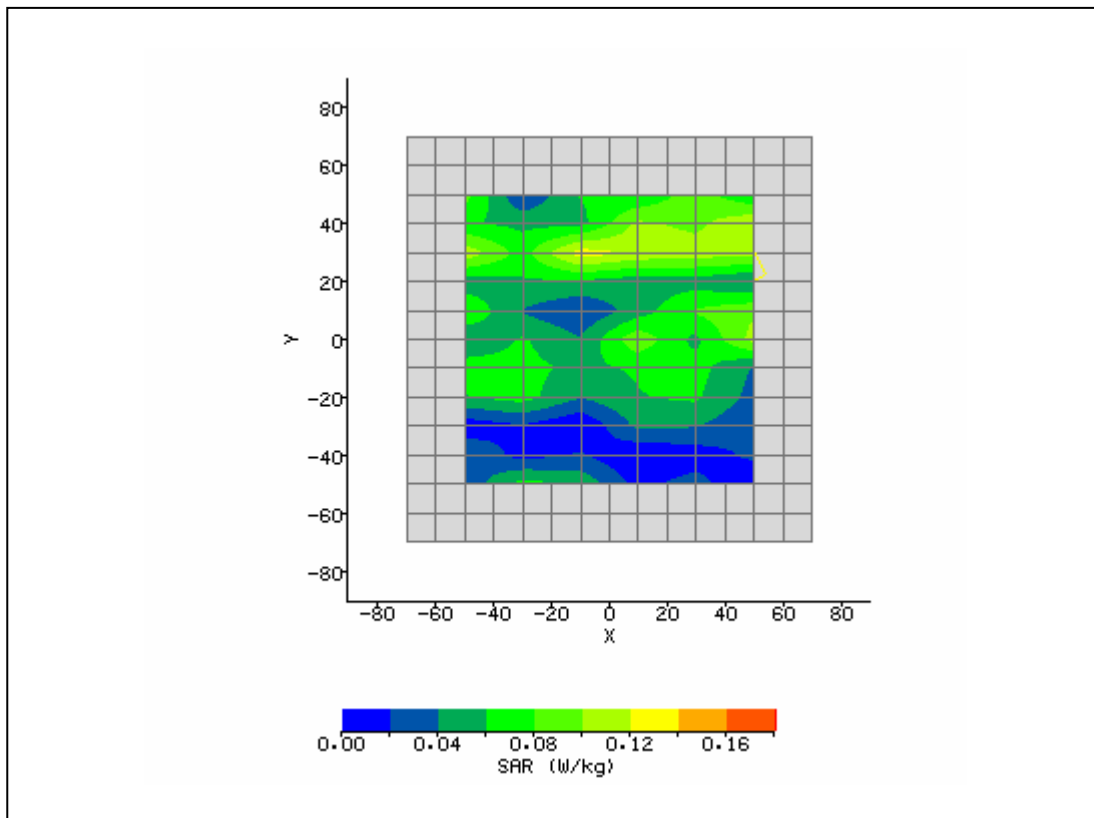


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	6/5/2007 11:49:11 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	LeftAux62_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	5200
<b>Device Under Test:</b>	Optimator - Kedron AGN	<b>Relative Permittivity:</b>	48.17
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	5.183
<b>Phantom S/No:</b>	HeadBox1.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	2.00 mm
<b>DUT Position:</b>	Left side 0mm.	<b>Max SAR Y-axis Location:</b>	30.00 mm
<b>Antenna Configuration:</b>	Integral - Aux.	<b>Max E Field:</b>	5.67 V/m
<b>Test Frequency:</b>	52230MHz	<b>SAR 1g:</b>	0.158 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.494 / .494 / .494	<b>SAR Start:</b>	0.105 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.107 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	1.92 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	06/05/07
<b>Input Power Level:</b>	As per EEPROM regulatory preset	<b>Extrapolation:</b>	poly4

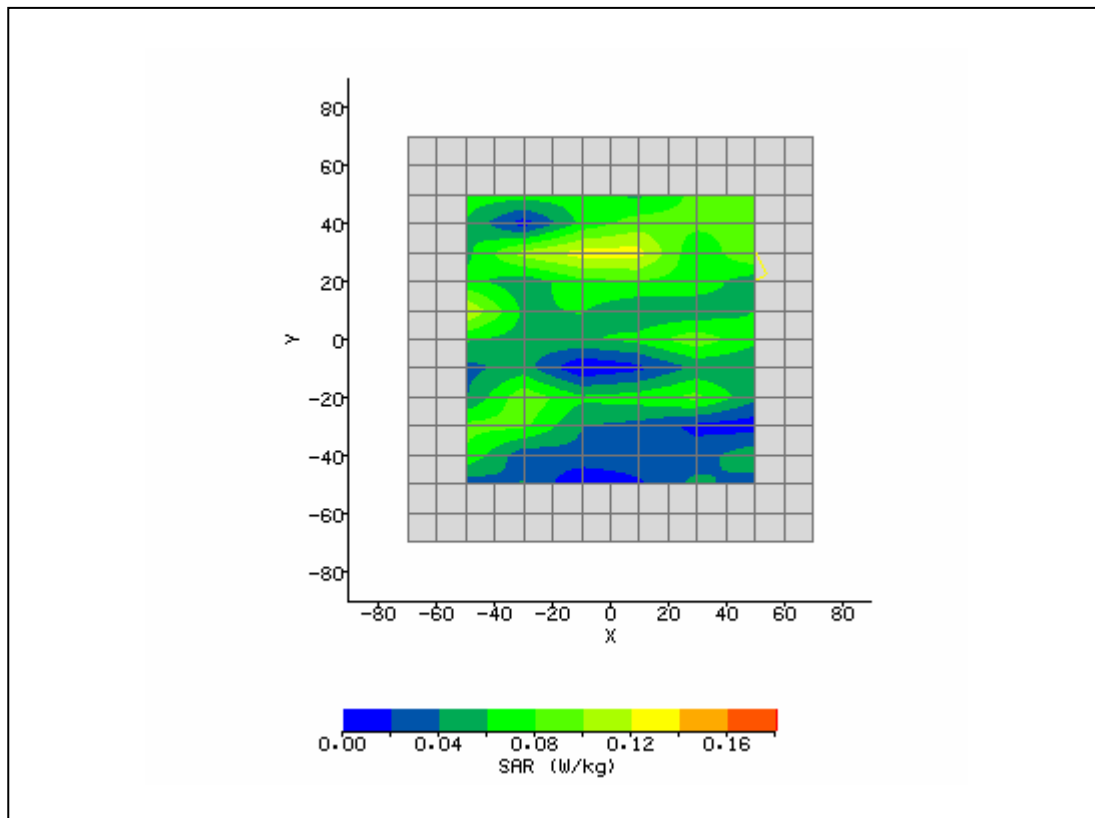


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	6/5/2007 11:30:26 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	LeftAux46_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	5200
<b>Device Under Test:</b>	Optimator - Kedron AGN	<b>Relative Permittivity:</b>	47.99
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	5.183
<b>Phantom S/No:</b>	HeadBox1.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	-16.00 mm
<b>DUT Position:</b>	Left side 0mm.	<b>Max SAR Y-axis Location:</b>	50.00 mm
<b>Antenna Configuration:</b>	Integral - Aux.	<b>Max E Field:</b>	5.94 V/m
<b>Test Frequency:</b>	5310MHz	<b>SAR 1g:</b>	0.174 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.494 / .494 / .494	<b>SAR Start:</b>	0.120 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.118 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-1.68 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	06/05/07
<b>Input Power Level:</b>	As per EEPROM regulatory preset	<b>Extrapolation:</b>	poly4

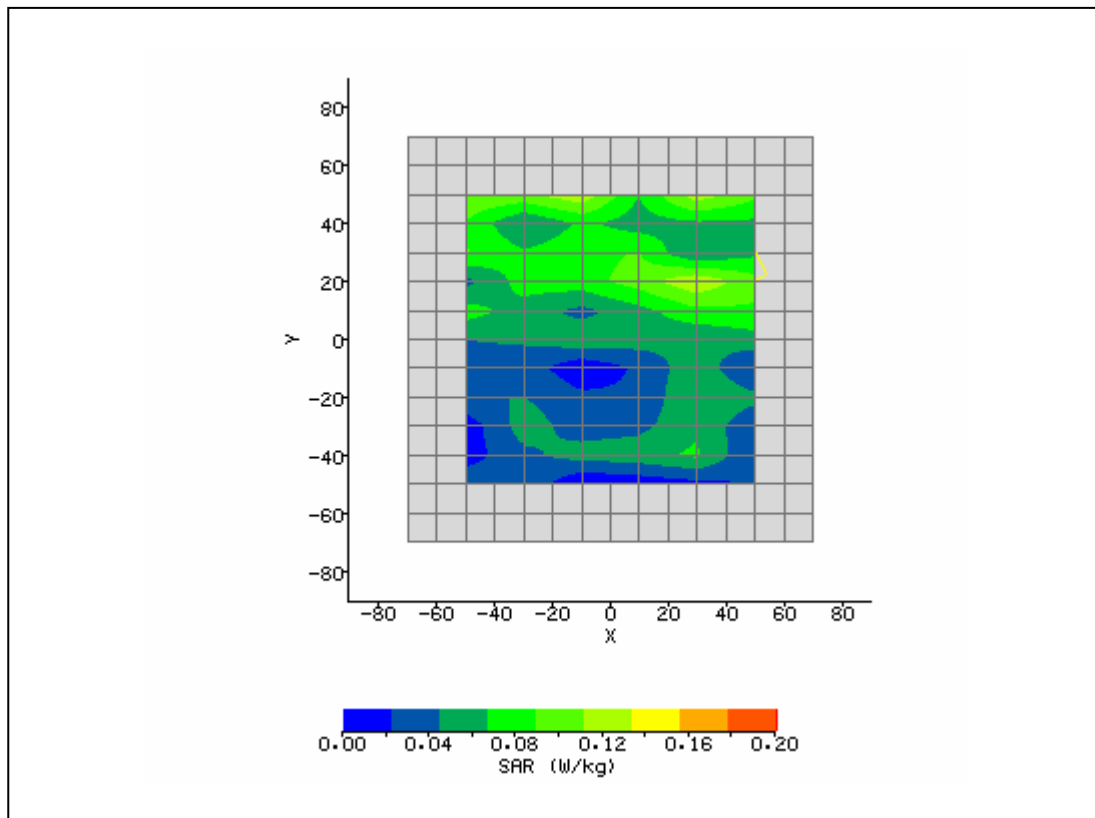


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	6/5/2007 3:20:21 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	temp.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	5800
<b>Device Under Test:</b>	Optimator - Kedron AGN	<b>Relative Permittivity:</b>	48.02
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	5.22
<b>Phantom S/No:</b>	HeadBox1.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	-16.00 mm
<b>DUT Position:</b>	Lap 0mm.	<b>Max SAR Y-axis Location:</b>	40.00 mm
<b>Antenna Configuration:</b>	Integral - Main.	<b>Max E Field:</b>	6.19 V/m
<b>Test Frequency:</b>	5755MHz	<b>SAR 1g:</b>	0.158 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.583 / .583 / .583	<b>SAR Start:</b>	0.159 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.161 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	1.37 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	06/05/07
<b>Input Power Level:</b>	As per EEPROM regulatory presets	<b>Extrapolation:</b>	poly4

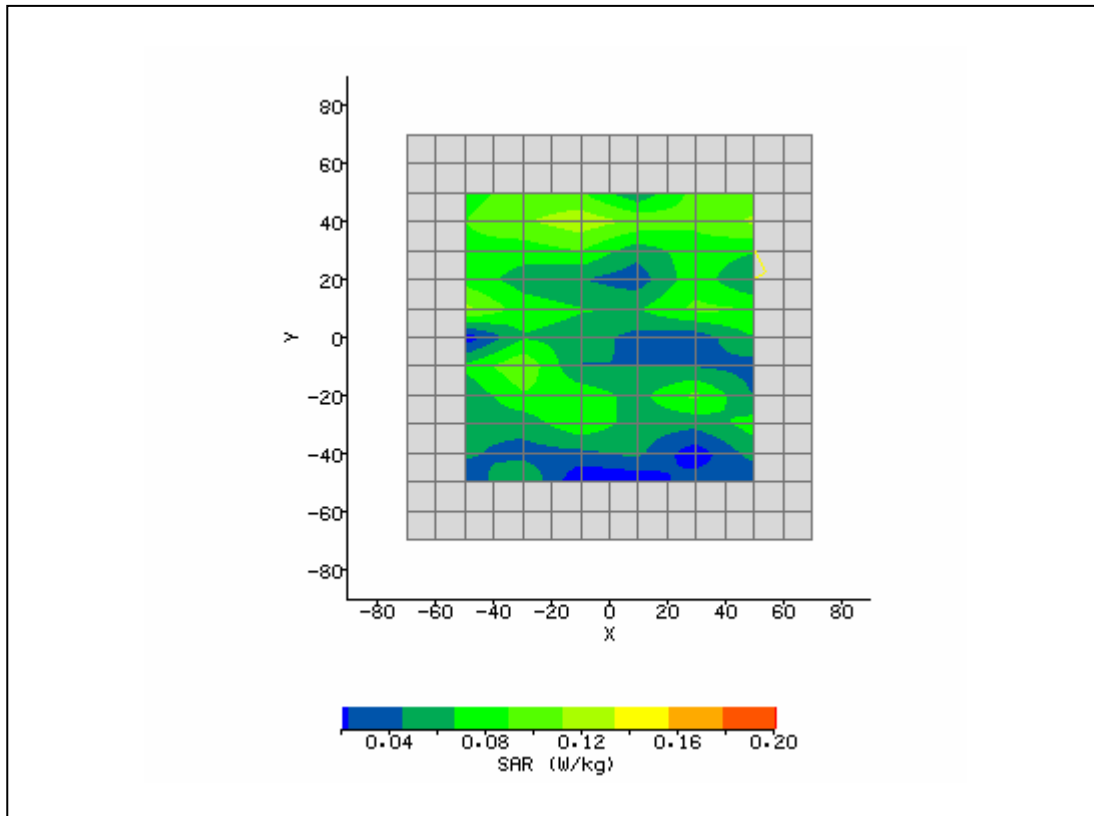

<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	6/5/2007 4:36:32 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	LeftAux151_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	5800
<b>Device Under Test:</b>	Optimator - Kedron AGN	<b>Relative Permittivity:</b>	48.02
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	5.991
<b>Phantom S/No:</b>	HeadBox1.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	8.00 mm
<b>DUT Position:</b>	Right Side 0mm.	<b>Max SAR Y-axis Location:</b>	29.00 mm
<b>Antenna Configuration:</b>	Integral - Main.	<b>Max E Field:</b>	6.86 V/m
<b>Test Frequency:</b>	5755MHz	<b>SAR 1g:</b>	0.176 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.583 / .583 / .583	<b>SAR Start:</b>	0.132 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.129 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-2.78 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	06/05/07
<b>Input Power Level:</b>	As per EEPROM regulatory presets	<b>Extrapolation:</b>	poly4

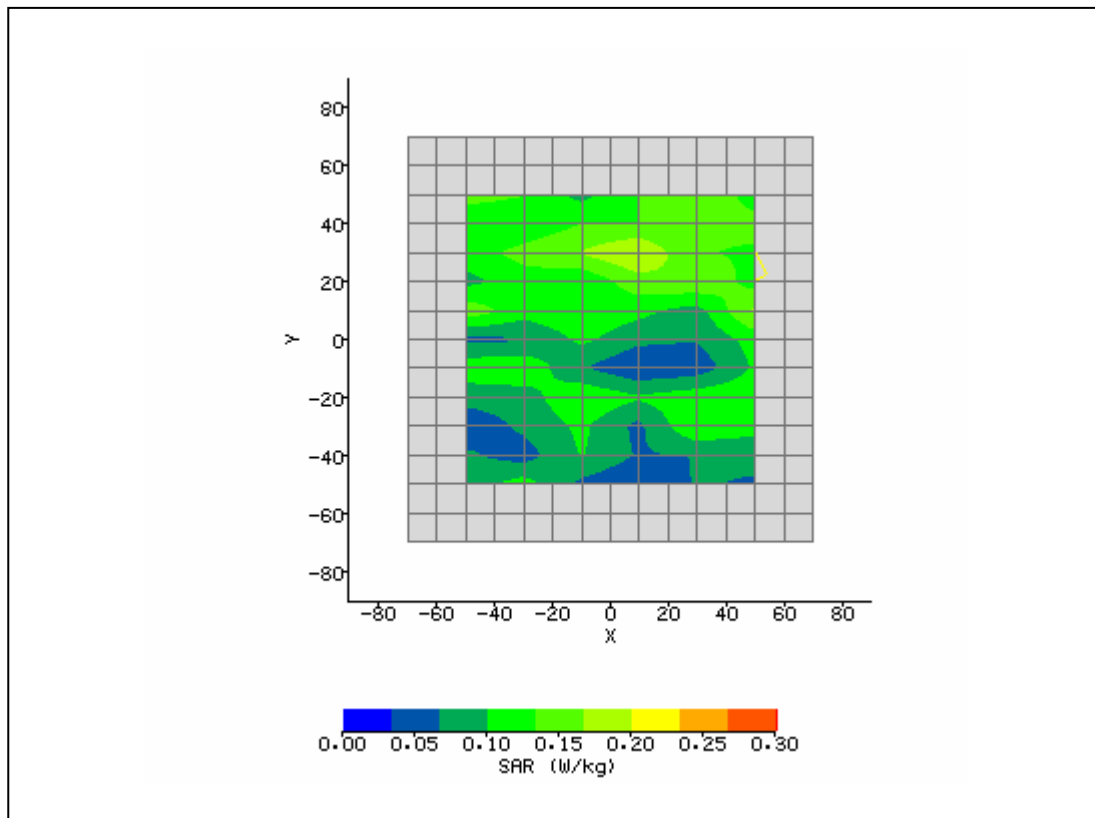


<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	6/6/2007 12:16:35 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	LeftAux159_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	5800
<b>Device Under Test:</b>	Optimator - Kedron AGN	<b>Relative Permittivity:</b>	47.52
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	6.101
<b>Phantom S/No:</b>	HeadBox1.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	-2.00 mm
<b>DUT Position:</b>	Right side 0mm.	<b>Max SAR Y-axis Location:</b>	28.00 mm
<b>Antenna Configuration:</b>	Integral - Main.	<b>Max E Field:</b>	6.19 V/m
<b>Test Frequency:</b>	5795MHz	<b>SAR 1g:</b>	0.168 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.583 / .583 / .583	<b>SAR Start:</b>	0.087 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.090 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	2.56 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	06/05/07
<b>Input Power Level:</b>	As per EEPROM regulatory presets	<b>Extrapolation:</b>	poly4

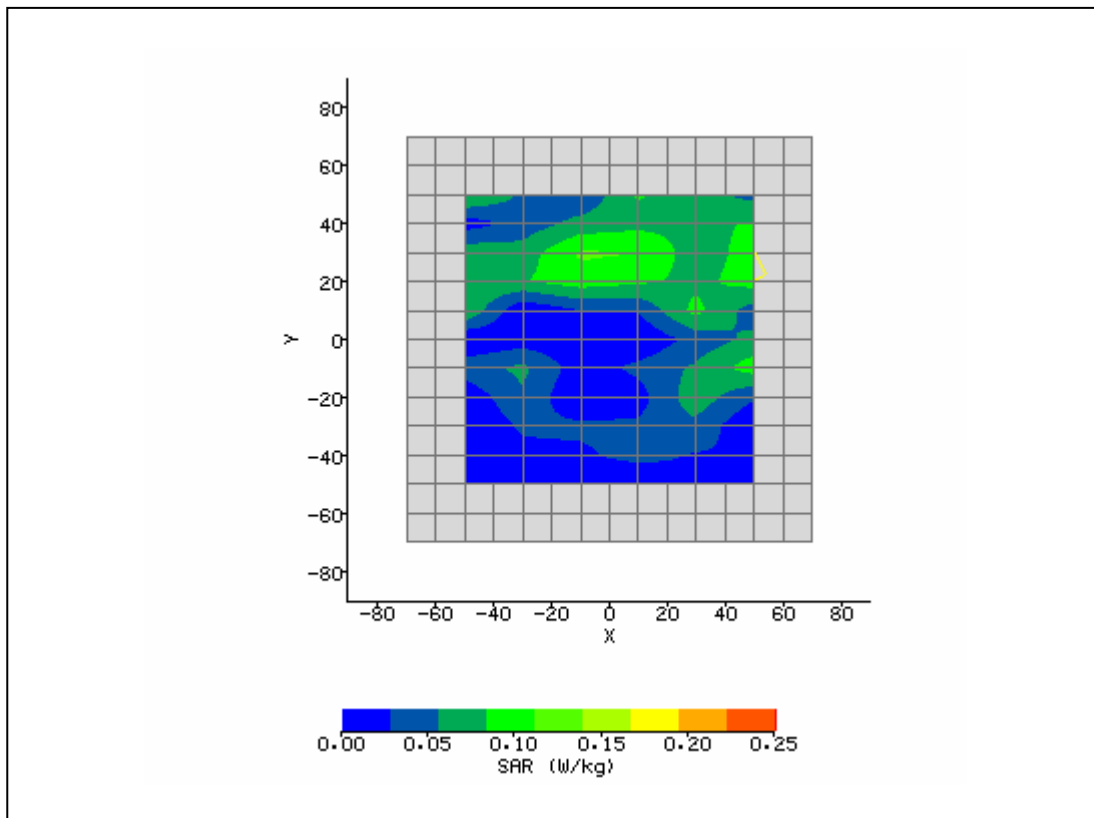




<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	6/6/2007 11:05:40 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	temp.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	5800
<b>Device Under Test:</b>	Optimator - Kedron AGN	<b>Relative Permittivity:</b>	48.02
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	5.991
<b>Phantom S/No:</b>	HeadBox1.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	50.00 mm
<b>DUT Position:</b>	Lap 0mm.	<b>Max SAR Y-axis Location:</b>	15.00 mm
<b>Antenna Configuration:</b>	Integral - Aux.	<b>Max E Field:</b>	5.71 V/m
<b>Test Frequency:</b>	5755MHz	<b>SAR 1g:</b>	0.197 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.583 / .583 / .583	<b>SAR Start:</b>	0.111 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.108 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-2.79 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	06/05/07
<b>Input Power Level:</b>	As per EEPROM regulatory presets	<b>Extrapolation:</b>	poly4

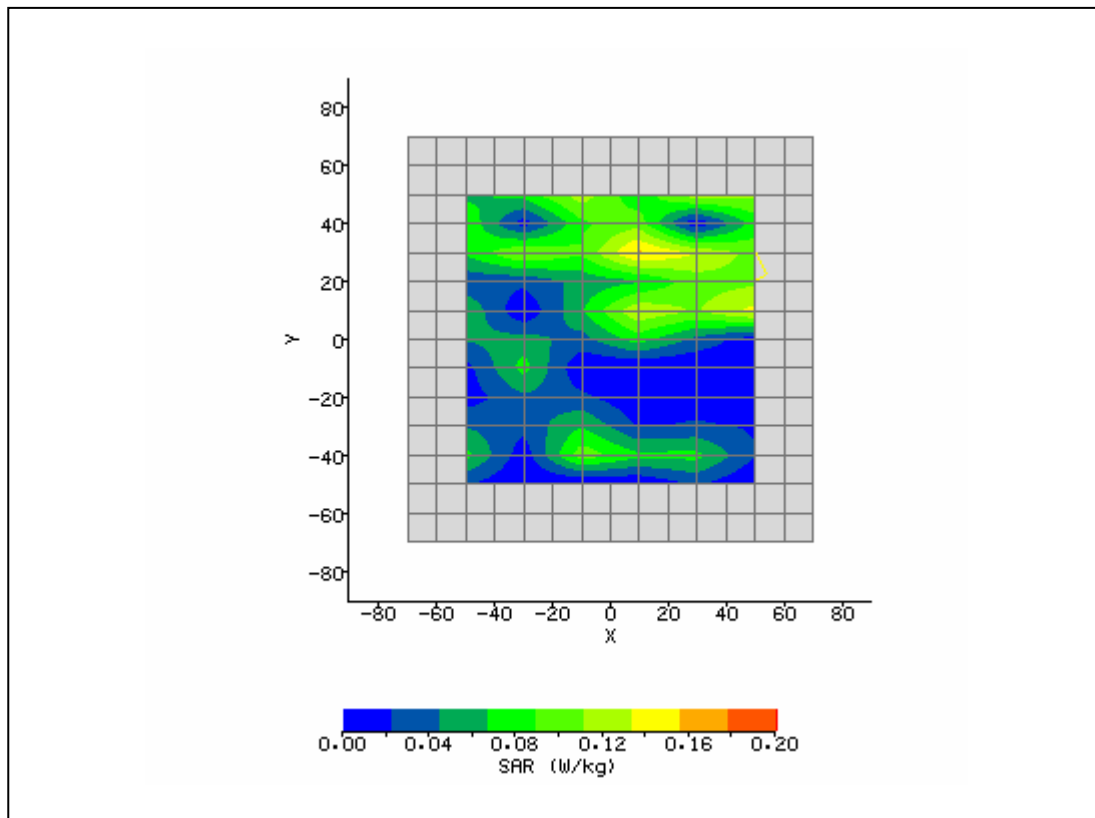

<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	6/5/2007 4:09:01 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	RightMain151_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	5800
<b>Device Under Test:</b>	Optimator - Kedron AGN	<b>Relative Permittivity:</b>	48.02
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	5.991
<b>Phantom S/No:</b>	HeadBox1.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	-10.00 mm
<b>DUT Position:</b>	Left Side 0mm.	<b>Max SAR Y-axis Location:</b>	25.00 mm
<b>Antenna Configuration:</b>	Integral - Aux.	<b>Max E Field:</b>	.633 V/m
<b>Test Frequency:</b>	5755MHz	<b>SAR 1g:</b>	0.199 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.583 / .583 / .583	<b>SAR Start:</b>	0.115 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.111 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-3.48 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	06/05/07
<b>Input Power Level:</b>	As per EEPROM regulatory presets	<b>Extrapolation:</b>	poly4

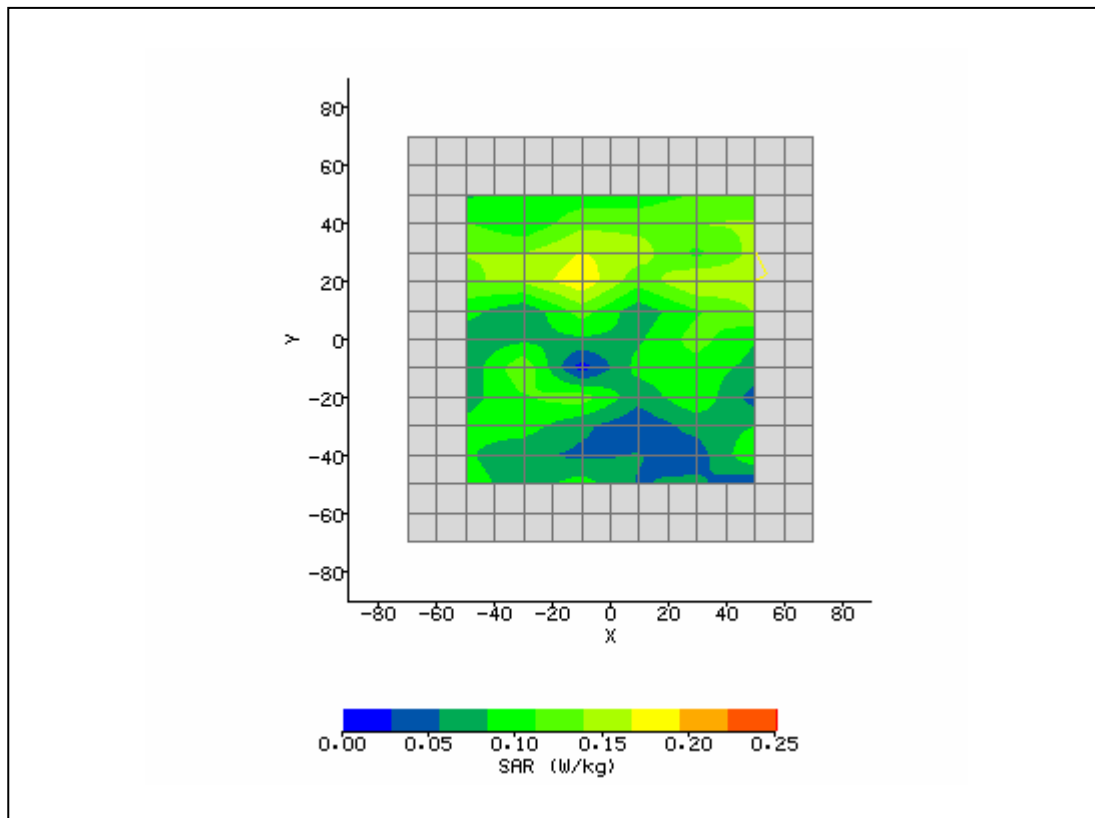

<b>System / software:</b>	SARA2 / 2.40 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	6/6/2007 11:25:03 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	LapAux151_3d.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	22.8°C	<b>Liquid Simulant:</b>	5800
<b>Device Under Test:</b>	Optimator - Kedron AGN	<b>Relative Permittivity:</b>	47.52
<b>Relative Humidity:</b>	30%	<b>Conductivity:</b>	6.101
<b>Phantom S/No:</b>	HeadBox1.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	50.00 mm
<b>DUT Position:</b>	Left side 0mm.	<b>Max SAR Y-axis Location:</b>	12.00 mm
<b>Antenna Configuration:</b>	Integral - Aux.	<b>Max E Field:</b>	5.19 V/m
<b>Test Frequency:</b>	5795MHz	<b>SAR 1g:</b>	0.134 W/kg
<b>Air Factors:</b>	2685 / 2277 / 2238	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.583 / .583 / .583	<b>SAR Start:</b>	0.083 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.0799 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-3.69 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	06/05/07
<b>Input Power Level:</b>	As per EEPROM regulatory presets	<b>Extrapolation:</b>	poly4

