




System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/29/2007 12:00:40 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	Redstorm	Relative Permittivity:	51.00
Relative Humidity:	30%	Conductivity:	1.915
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	50.00 mm
DUT Position:	Lap 0mm.	Max SAR Y-axis Location:	35.00 mm
Antenna Configuration:	Integral Main	Max E Field:	11.95 V/m
Test Frequency:	2437MHz	SAR 1g:	0.298 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.197 W/kg
Type of Modulation:		SAR End:	0.196 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-2.26 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	06/29/2007
Input Power Level:	Set by test SW	Extrapolation:	poly4

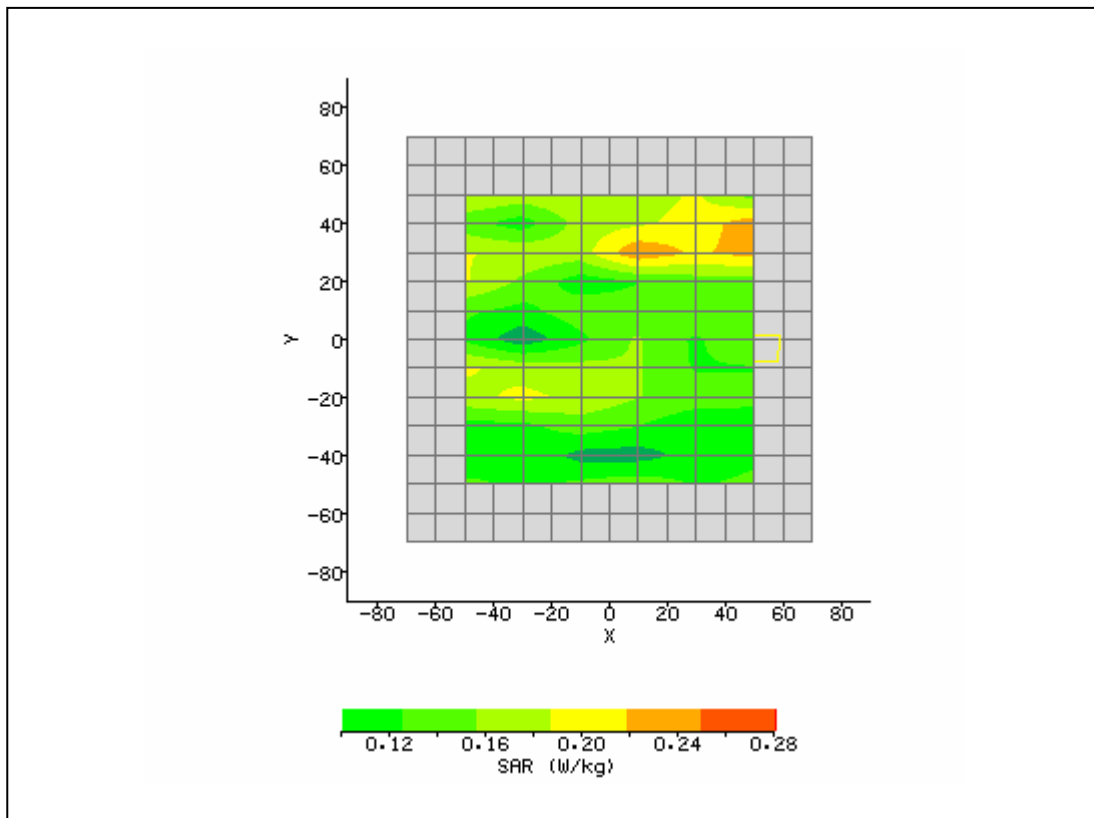


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/29/2007 4:06:08 PM	DUT Battery Model/No:	
Filename:	Lap_Main_11_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	Redstorm	Relative Permittivity:	51.00
Relative Humidity:	30%	Conductivity:	1.915
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	50.00 mm
DUT Position:	Lap 0mm.	Max SAR Y-axis Location:	33.00 mm
Antenna Configuration:	Integral	Max E Field:	9.90 V/m
Test Frequency:	2437MHz	SAR 1g:	0.248 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.070 W/kg
Type of Modulation:		SAR End:	0.073 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.62 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	06/29/2007
Input Power Level:	Set by test SW	Extrapolation:	poly4

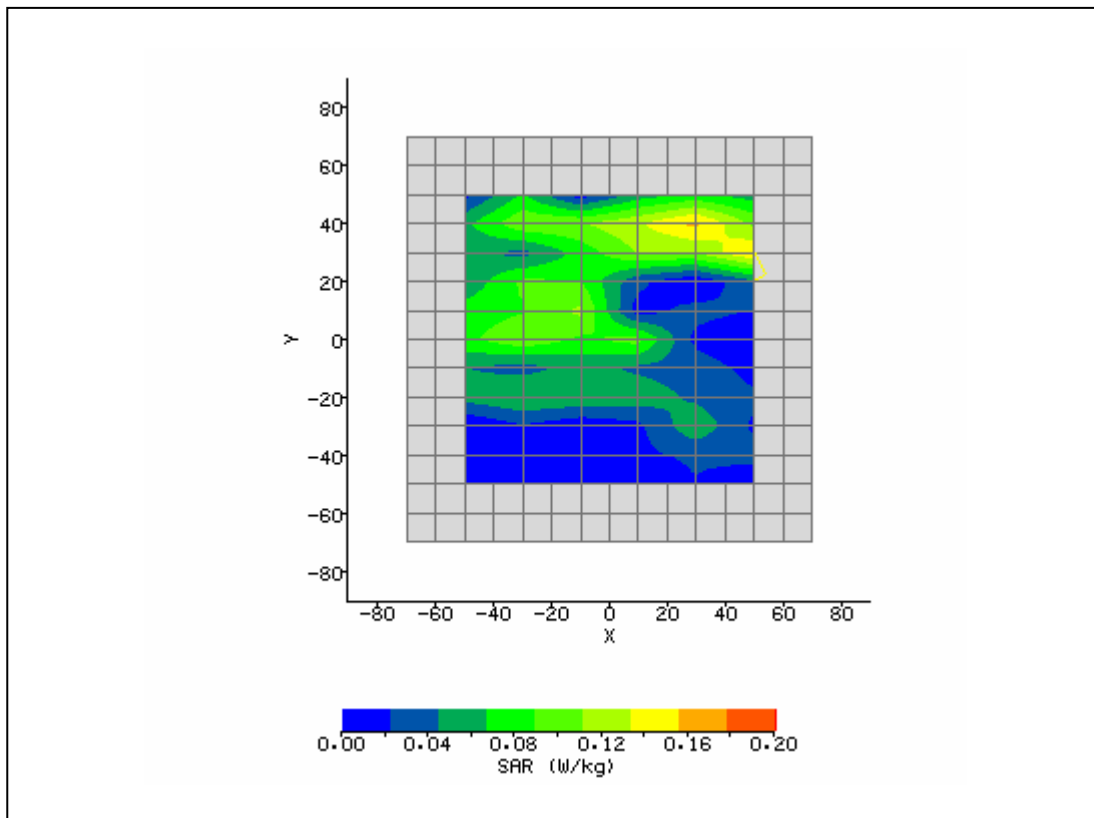


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/29/2007 1:56:01 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	Redstorm	Relative Permittivity:	51.00
Relative Humidity:	30%	Conductivity:	1.915
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	50.00 mm
DUT Position:	Right 0mm.	Max SAR Y-axis Location:	50.00 mm
Antenna Configuration:	Integral	Max E Field:	10.59 V/m
Test Frequency:	2437MHz	SAR 1g:	0.189 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.088 W/kg
Type of Modulation:		SAR End:	0.089 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	4.01 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	06/29/2007
Input Power Level:	Set by test SW	Extrapolation:	poly4

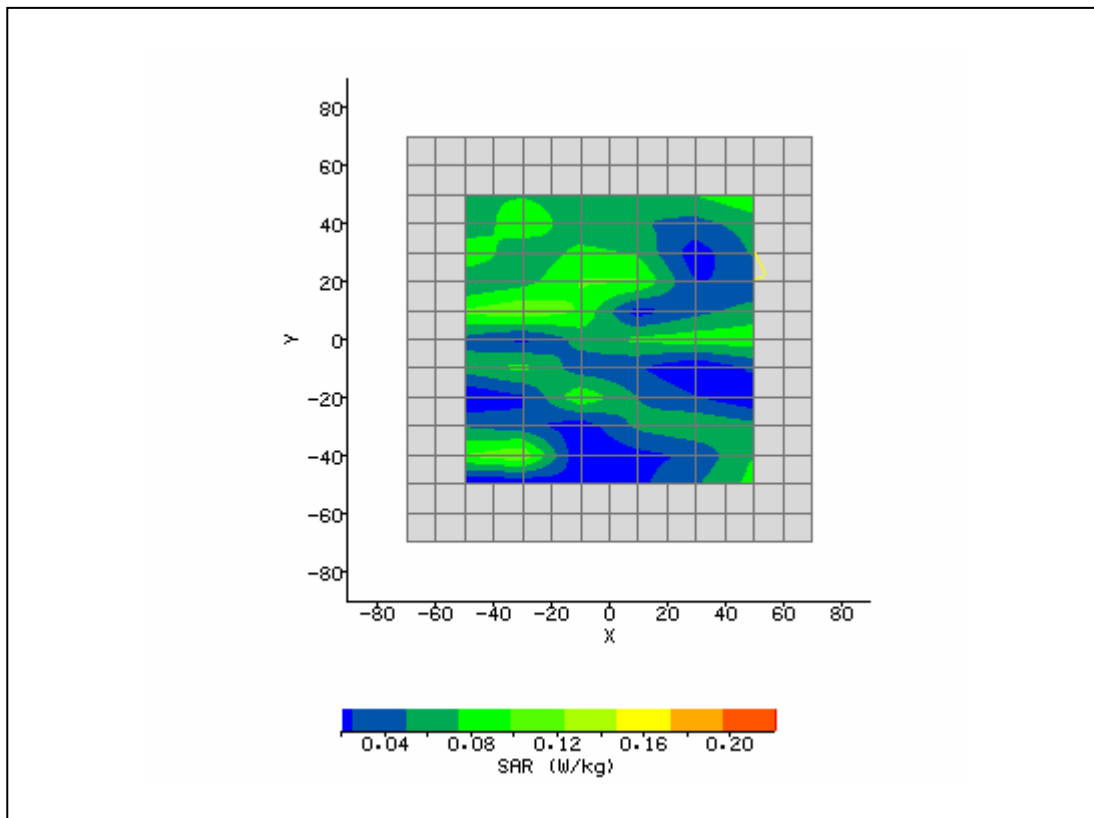


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/29/2007 4:28:55 PM	DUT Battery Model/No:	
Filename:	Right_Aux_6_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	Redstorm	Relative Permittivity:	51.00
Relative Humidity:	30%	Conductivity:	1.915
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	14.00 mm
DUT Position:	Right 0mm.	Max SAR Y-axis Location:	-4.00 mm
Antenna Configuration:	Integral	Max E Field:	9.09 V/m
Test Frequency:	2437MHz	SAR 1g:	0.236 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.074 W/kg
Type of Modulation:		SAR End:	0.075 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.14 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	06/29/2007
Input Power Level:	Set by test SW	Extrapolation:	poly4

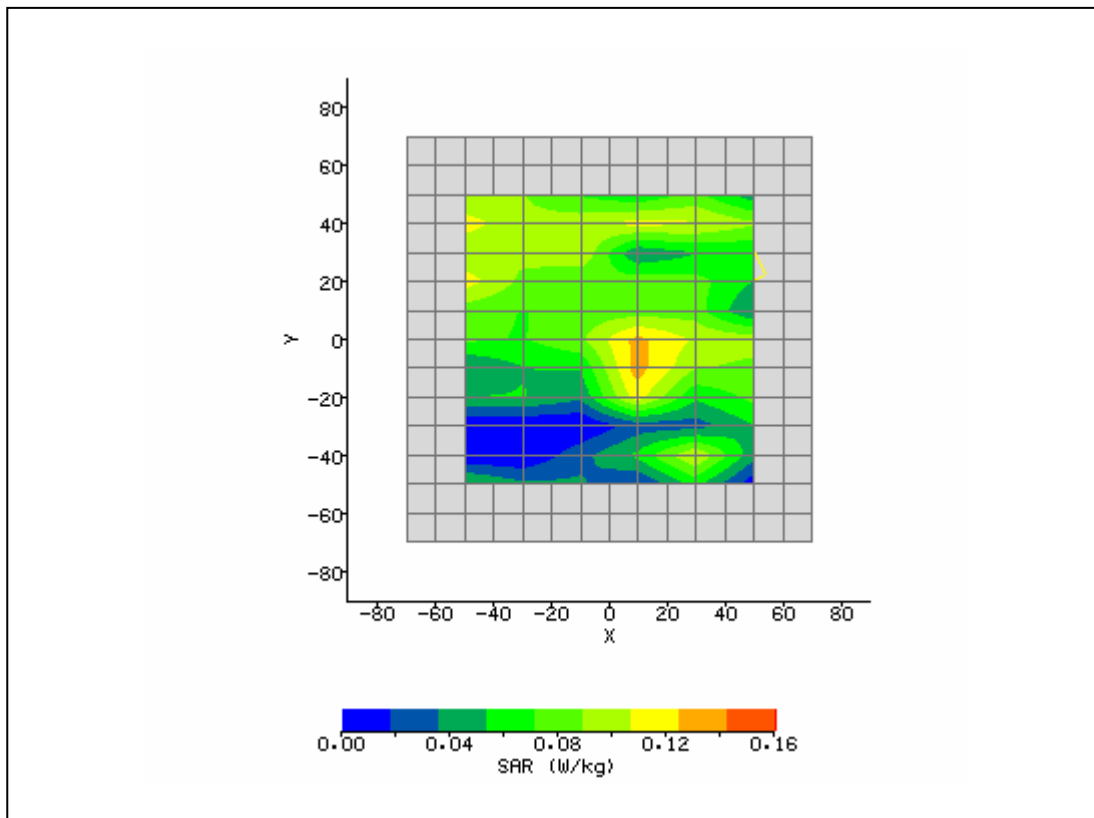


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/29/2007 2:26:22 PM	DUT Battery Model/No:	
Filename:	Lap_Main_1.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	Redstorm	Relative Permittivity:	50.80
Relative Humidity:	30%	Conductivity:	1.619
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	30.00 mm
DUT Position:	Side 0mm	Max SAR Y-axis Location:	30.00 mm
Antenna Configuration:	Integral Main	Max E Field:	9.47 V/m
Test Frequency:	2412MHz	SAR 1g:	0.161 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.489 / .489 / .489	SAR Start:	0.103 W/kg
Type of Modulation:		SAR End:	0.105 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.94 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	07/10/2007
Input Power Level:	max	Extrapolation:	poly4

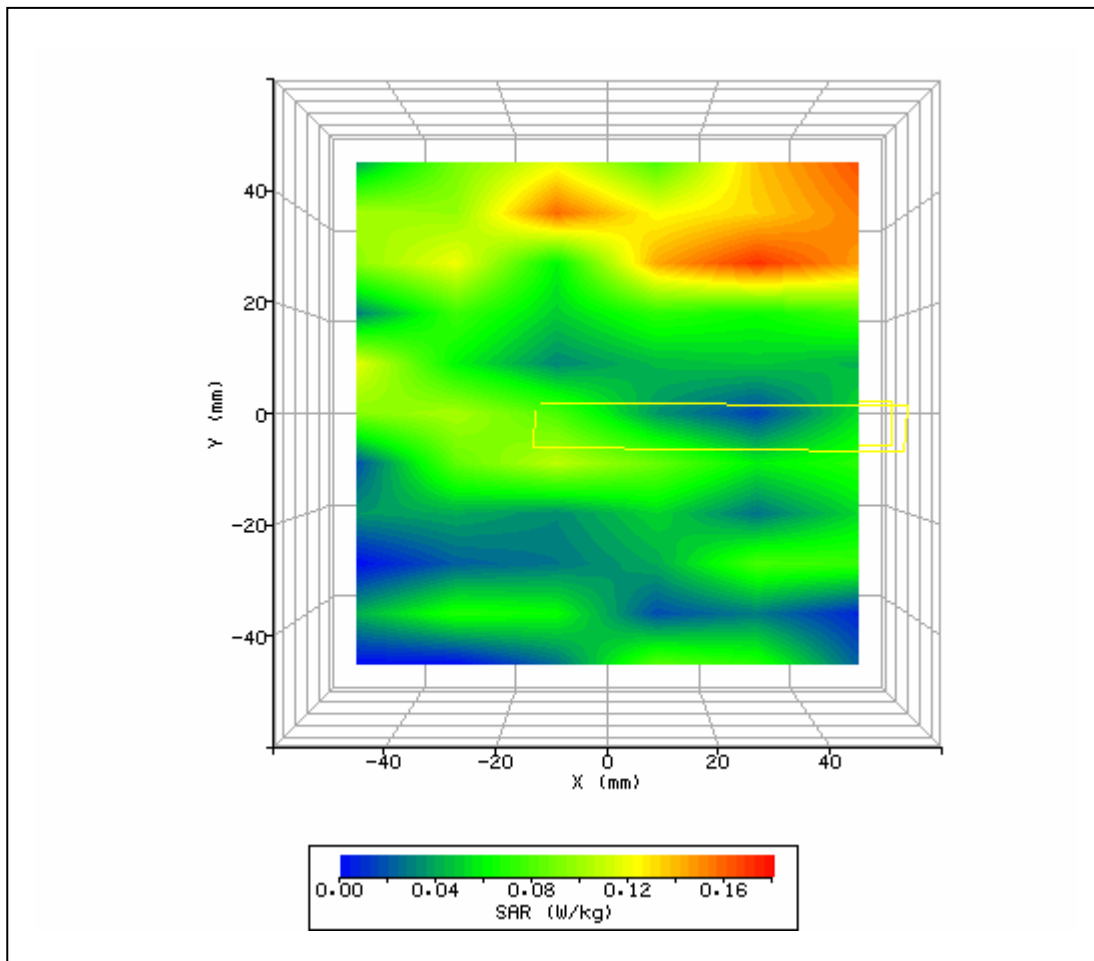


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/29/2007 3:33:29 PM	DUT Battery Model/No:	
Filename:	Lap_Main_11_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	Redstorm	Relative Permittivity:	51.07
Relative Humidity:	30%	Conductivity:	1.923
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	50.00 mm
DUT Position:	Lap 0mm.	Max SAR Y-axis Location:	50.00 mm
Antenna Configuration:	Integral	Max E Field:	9.99 V/m
Test Frequency:	2462MHz	SAR 1g:	0.212 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	0.164 W/kg
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.095 W/kg
Type of Modulation:		SAR End:	0.098 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.16 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	06/29/2007
Input Power Level:	Set by test SW	Extrapolation:	poly4

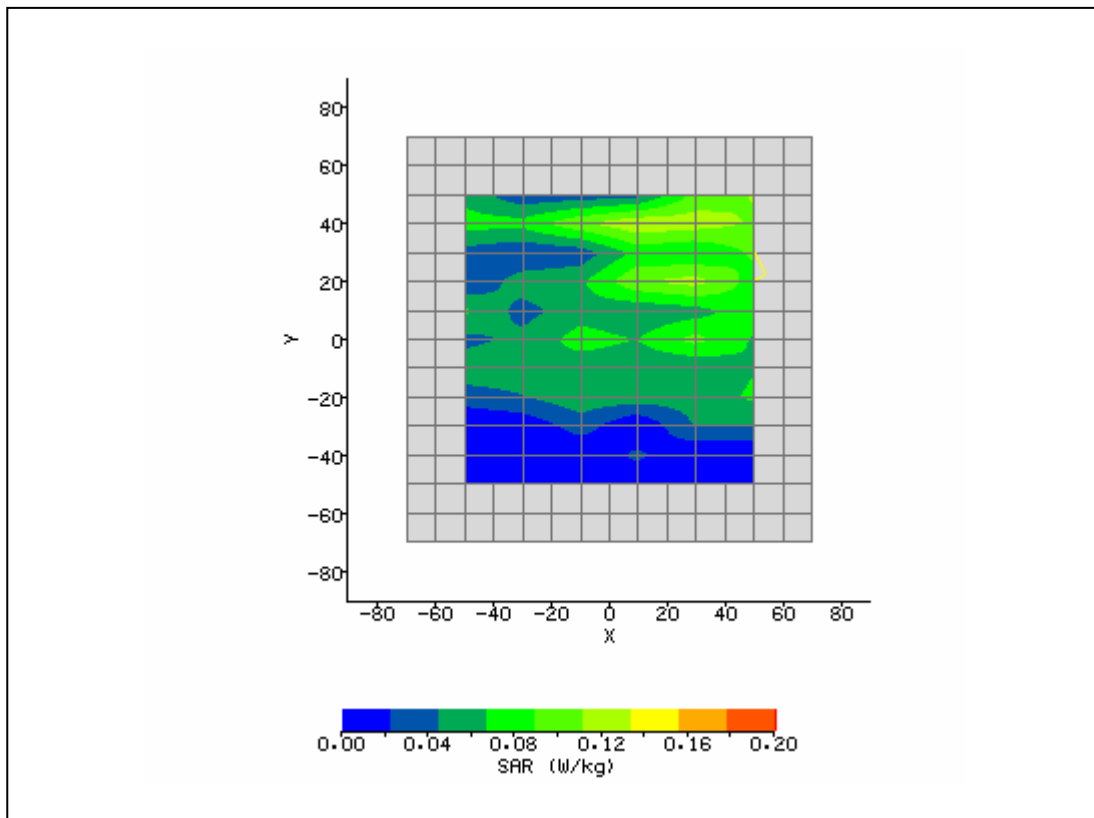


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/29/2007 4:52:23 PM	DUT Battery Model/No:	
Filename:	Right_Aux_6_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	Redstorm	Relative Permittivity:	50.89
Relative Humidity:	30%	Conductivity:	1.909
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-50.00 mm
DUT Position:	Lap 0mm.	Max SAR Y-axis Location:	50.00 mm
Antenna Configuration:	Integral	Max E Field:	9.07 V/m
Test Frequency:	2412MHz	SAR 1g:	0.228 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.079 W/kg
Type of Modulation:		SAR End:	0.080 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.91 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	06/29/2007
Input Power Level:	Set by test SW	Extrapolation:	poly4

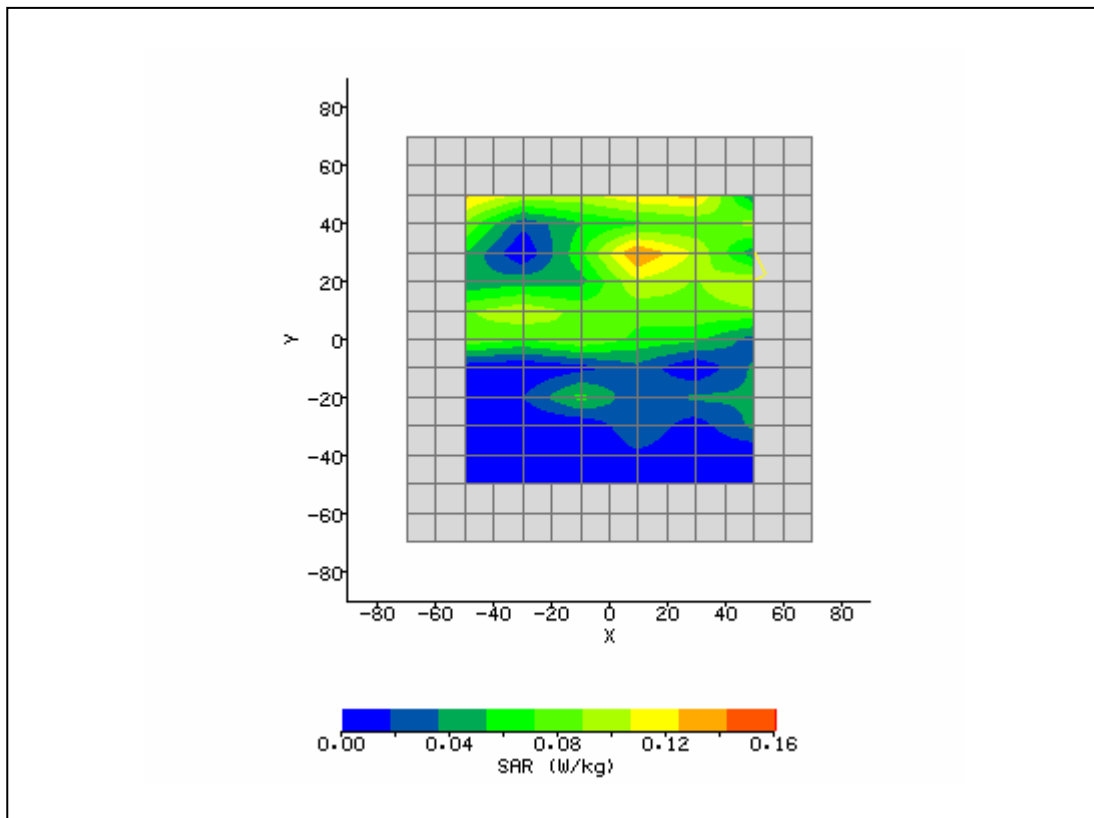


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/29/2007 5:13:25 PM	DUT Battery Model/No:	
Filename:	Lap_Aux_1_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	Redstorm	Relative Permittivity:	51.07
Relative Humidity:	30%	Conductivity:	1.923
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-50.00 mm
DUT Position:	Lap 0mm.	Max SAR Y-axis Location:	27.00 mm
Antenna Configuration:	Integral	Max E Field:	8.97 V/m
Test Frequency:	2462MHz	SAR 1g:	0.161 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.072 W/kg
Type of Modulation:		SAR End:	0.076 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.88 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	06/29/2007
Input Power Level:	Set by test SW	Extrapolation:	poly4

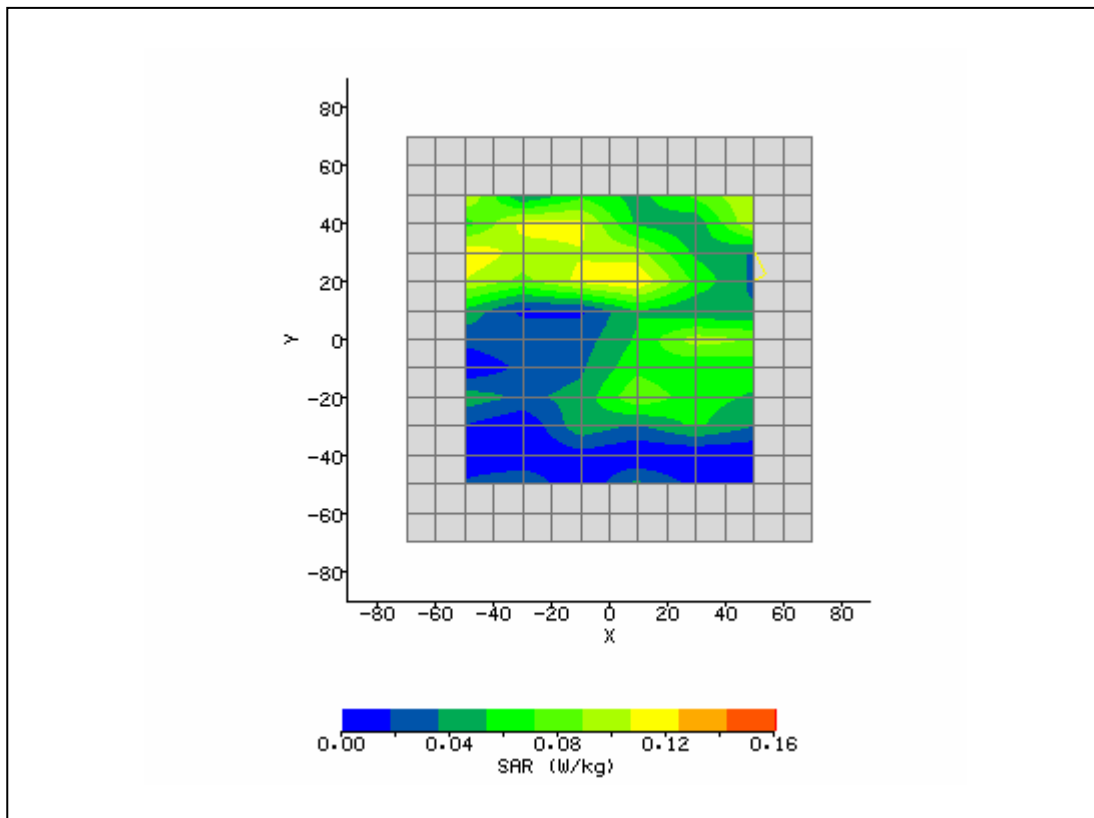


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	7/2/2007 3:41:25 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5200
Device Under Test:	Redstrom	Relative Permittivity:	48.30
Relative Humidity:	30%	Conductivity:	5.21
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-50.00 mm
DUT Position:	Lap 0mm	Max SAR Y-axis Location:	46.00 mm
Antenna Configuration:	Integral	Max E Field:	4.77 V/m
Test Frequency:	5260MHz	SAR 1g:	0.088 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.494 / .494 / .494	SAR Start:	0.018 W/kg
Type of Modulation:		SAR End:	0.019 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.59 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	07/02/2007
Input Power Level:	Set by SW	Extrapolation:	poly4

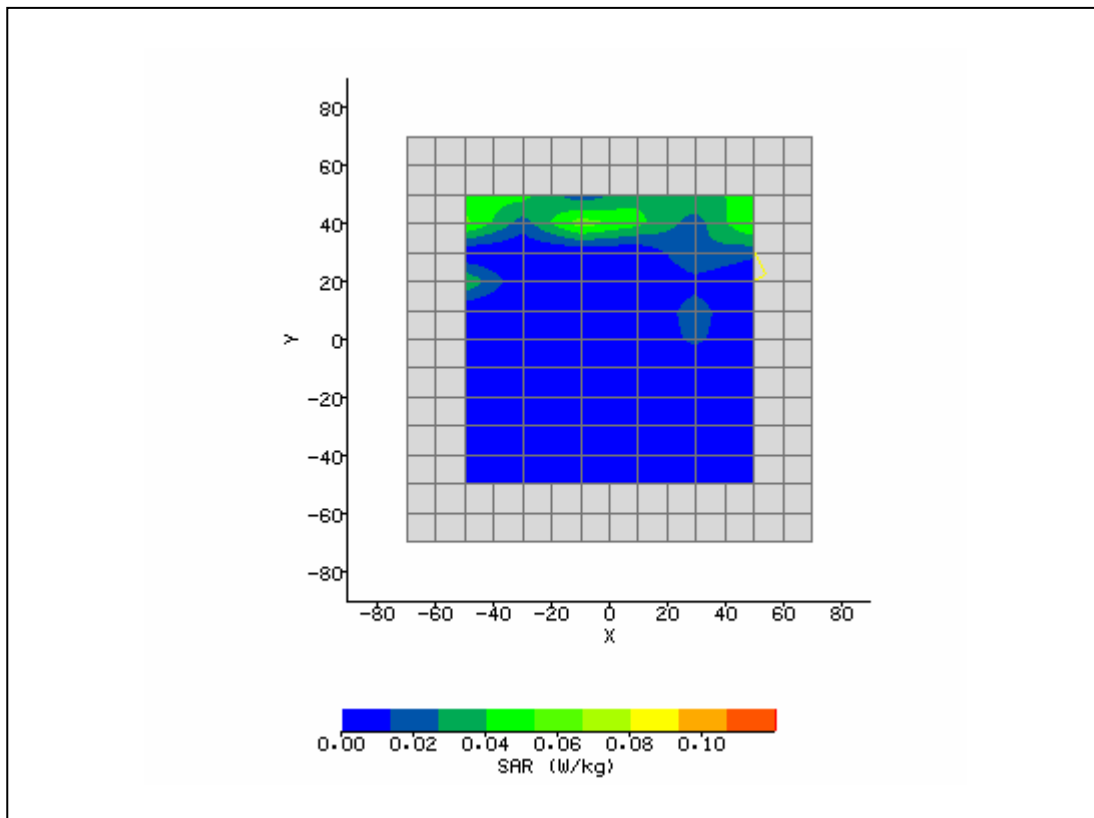


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	7/2/2007 4:06:59 PM	DUT Battery Model/No:	
Filename:	Side52_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5200
Device Under Test:	Redstrom	Relative Permittivity:	48.30
Relative Humidity:	30%	Conductivity:	5.187
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	56.67 mm
DUT Position:	Side 0mm	Max SAR Y-axis Location:	48.00 mm
Antenna Configuration:	Integral	Max E Field:	5.08 V/m
Test Frequency:	5260MHz	SAR 1g:	0.132 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.494 / .494 / .494	SAR Start:	0.049 W/kg
Type of Modulation:		SAR End:	0.051 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.94 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	07/02/2007
Input Power Level:	Set by SW	Extrapolation:	poly4

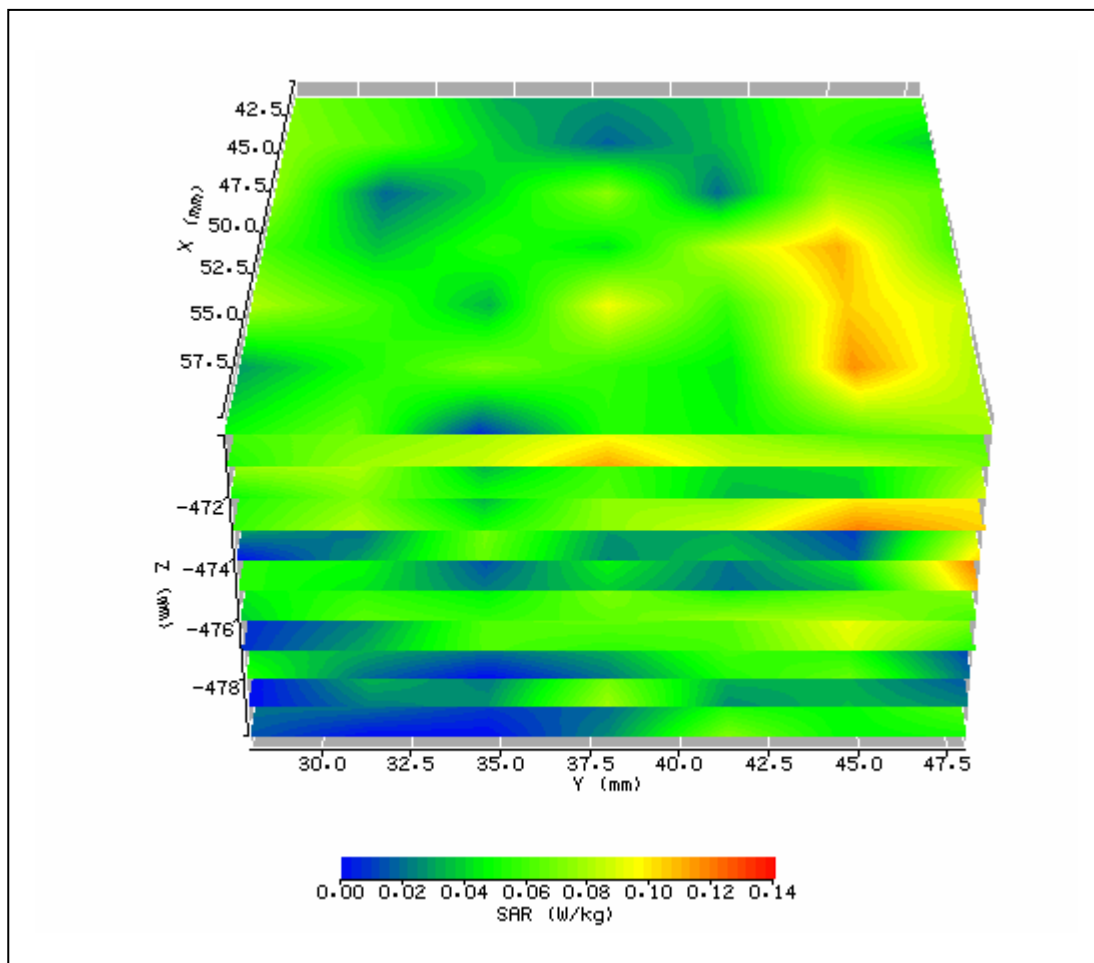


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	7/2/2007 4:38:22 PM	DUT Battery Model/No:	
Filename:	Side36_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5200
Device Under Test:	Redstrom	Relative Permittivity:	48.27
Relative Humidity:	30%	Conductivity:	5.229
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	34.67 mm
DUT Position:	Side 0mm	Max SAR Y-axis Location:	46.67 mm
Antenna Configuration:	Integral	Max E Field:	5.25 V/m
Test Frequency:	5180MHz	SAR 1g:	0.083 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.494 / .494 / .494	SAR Start:	0.031 W/kg
Type of Modulation:		SAR End:	0.032 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.19 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	07/02/2007
Input Power Level:	Set by SW	Extrapolation:	poly4

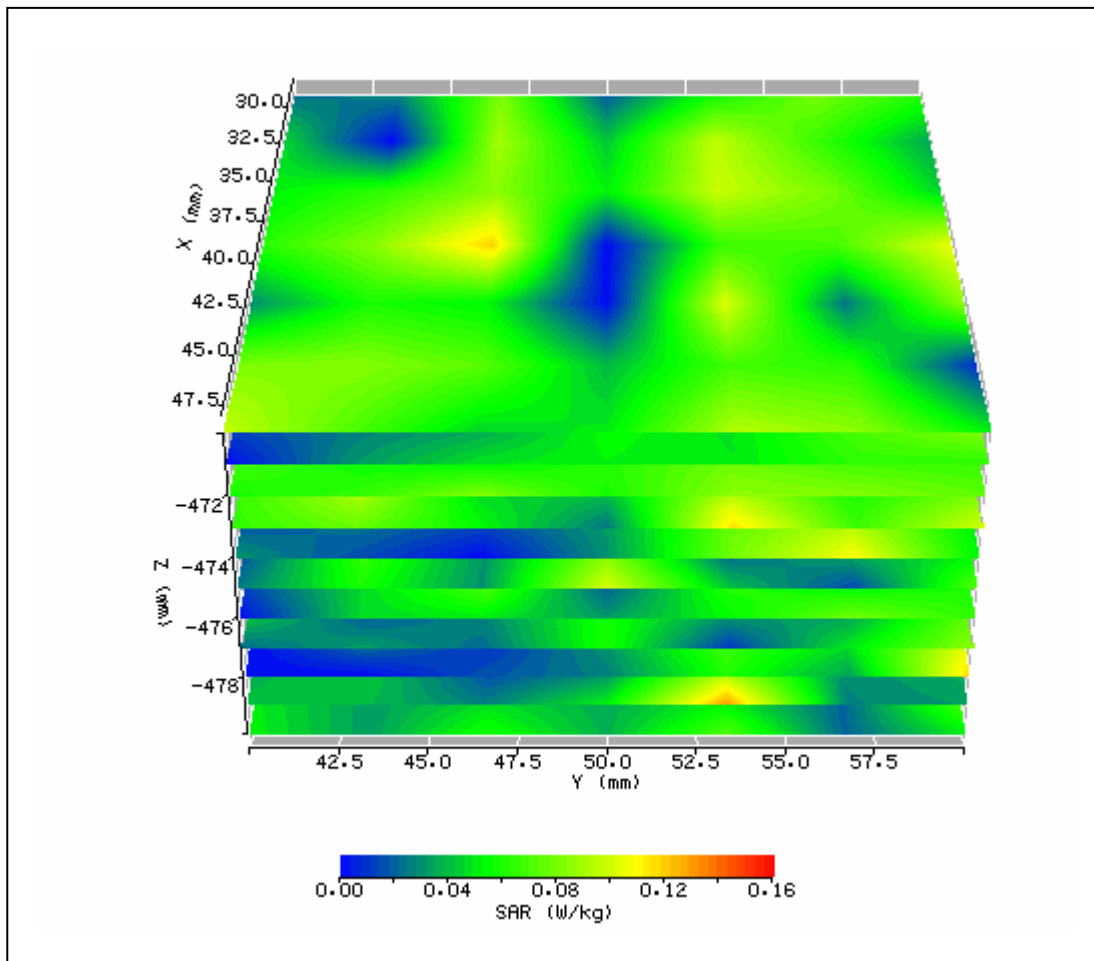


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	7/2/2007 4:59:46 PM	DUT Battery Model/No:	
Filename:	Side36_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5200
Device Under Test:	Redstrom	Relative Permittivity:	47.90
Relative Humidity:	30%	Conductivity:	5.187
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	36.00 mm
DUT Position:	Side 0mm	Max SAR Y-axis Location:	43.00 mm
Antenna Configuration:	Integral	Max E Field:	5.18 V/m
Test Frequency:	5320MHz	SAR 1g:	0.076 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.494 / .494 / .494	SAR Start:	0.064 W/kg
Type of Modulation:		SAR End:	0.061 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-2.02 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	07/02/2007
Input Power Level:	Set by SW	Extrapolation:	poly4

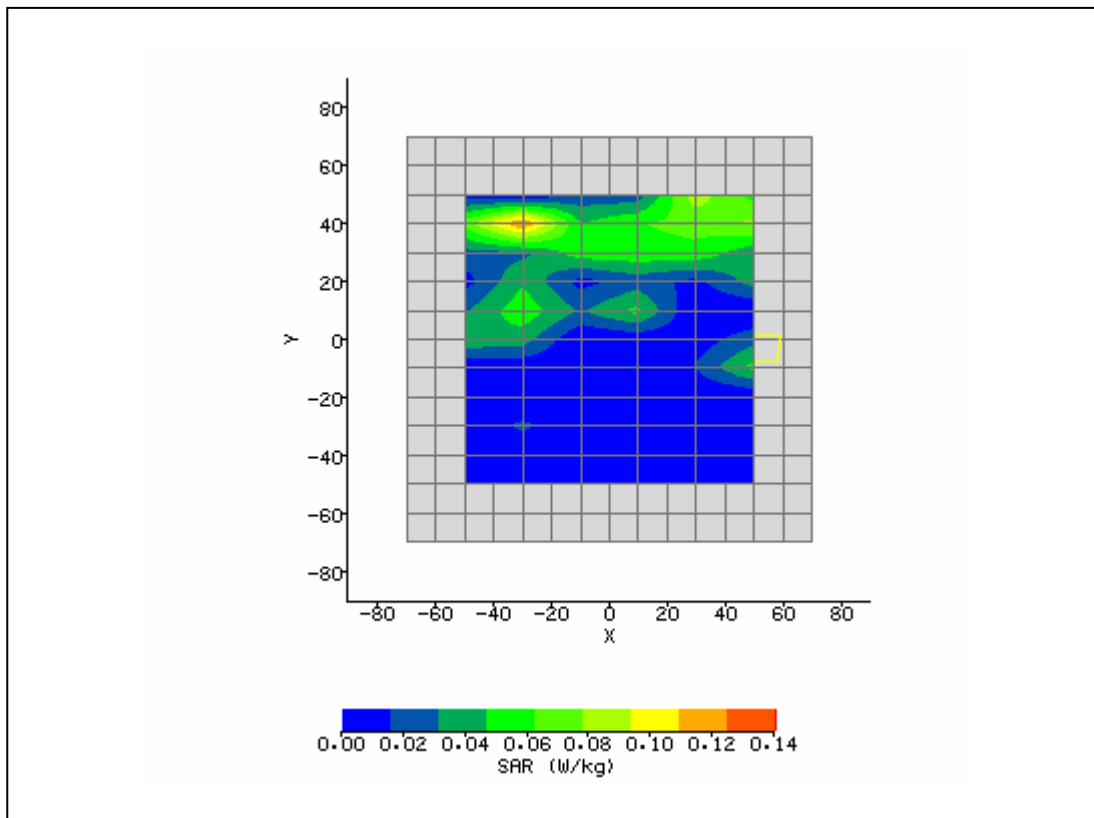


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	7/3/2007 8:52:55 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5200
Device Under Test:	Redstrom	Relative Permittivity:	48.30
Relative Humidity:	30%	Conductivity:	5.21
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	50.00 mm
DUT Position:	Lap 0mm	Max SAR Y-axis Location:	45.00 mm
Antenna Configuration:	Integral	Max E Field:	4.91 V/m
Test Frequency:	5260MHz	SAR 1g:	0.117 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.494 / .494 / .494	SAR Start:	0.035 W/kg
Type of Modulation:		SAR End:	0.034 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-3.42 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	07/02/2007
Input Power Level:	Set by SW	Extrapolation:	poly4

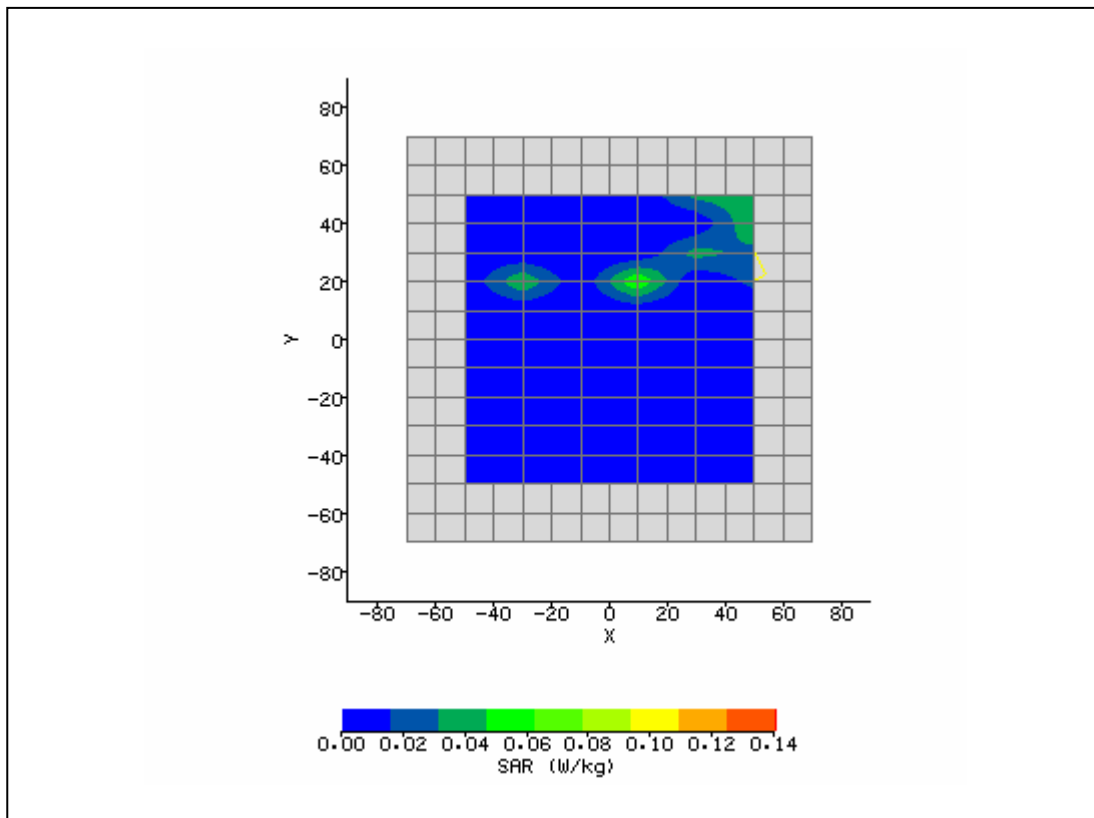


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	7/3/2007 9:11:44 AM	DUT Battery Model/No:	
Filename:	Lap_Aux_52_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5200
Device Under Test:	Redstrom	Relative Permittivity:	48.30
Relative Humidity:	30%	Conductivity:	5.21
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	50.00 mm
DUT Position:	Side 0mm	Max SAR Y-axis Location:	38.00 mm
Antenna Configuration:	Integral	Max E Field:	4.60 V/m
Test Frequency:	5260MHz	SAR 1g:	0.126 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.494 / .494 / .494	SAR Start:	0.040 W/kg
Type of Modulation:		SAR End:	0.041 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.16 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	07/02/2007
Input Power Level:	Set by SW	Extrapolation:	poly4

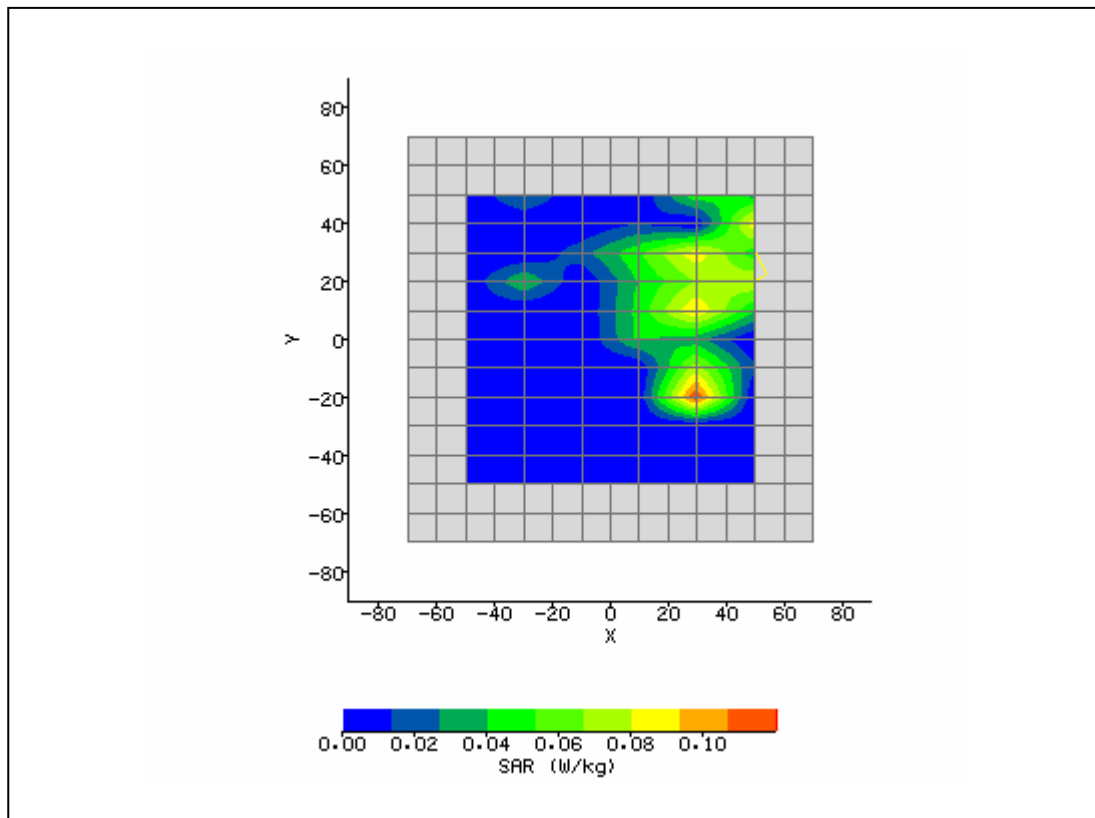


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	7/2/2007 4:38:22 PM	DUT Battery Model/No:	
Filename:	Side36_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5200
Device Under Test:	Redstrom	Relative Permittivity:	48.27
Relative Humidity:	30%	Conductivity:	5.229
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	34.67 mm
DUT Position:	Side 0mm	Max SAR Y-axis Location:	46.67 mm
Antenna Configuration:	Integral	Max E Field:	5.25 V/m
Test Frequency:	5180MHz	SAR 1g:	0.107 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.494 / .494 / .494	SAR Start:	0.031 W/kg
Type of Modulation:		SAR End:	0.032 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.19 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	07/02/2007
Input Power Level:	Set by SW	Extrapolation:	poly4

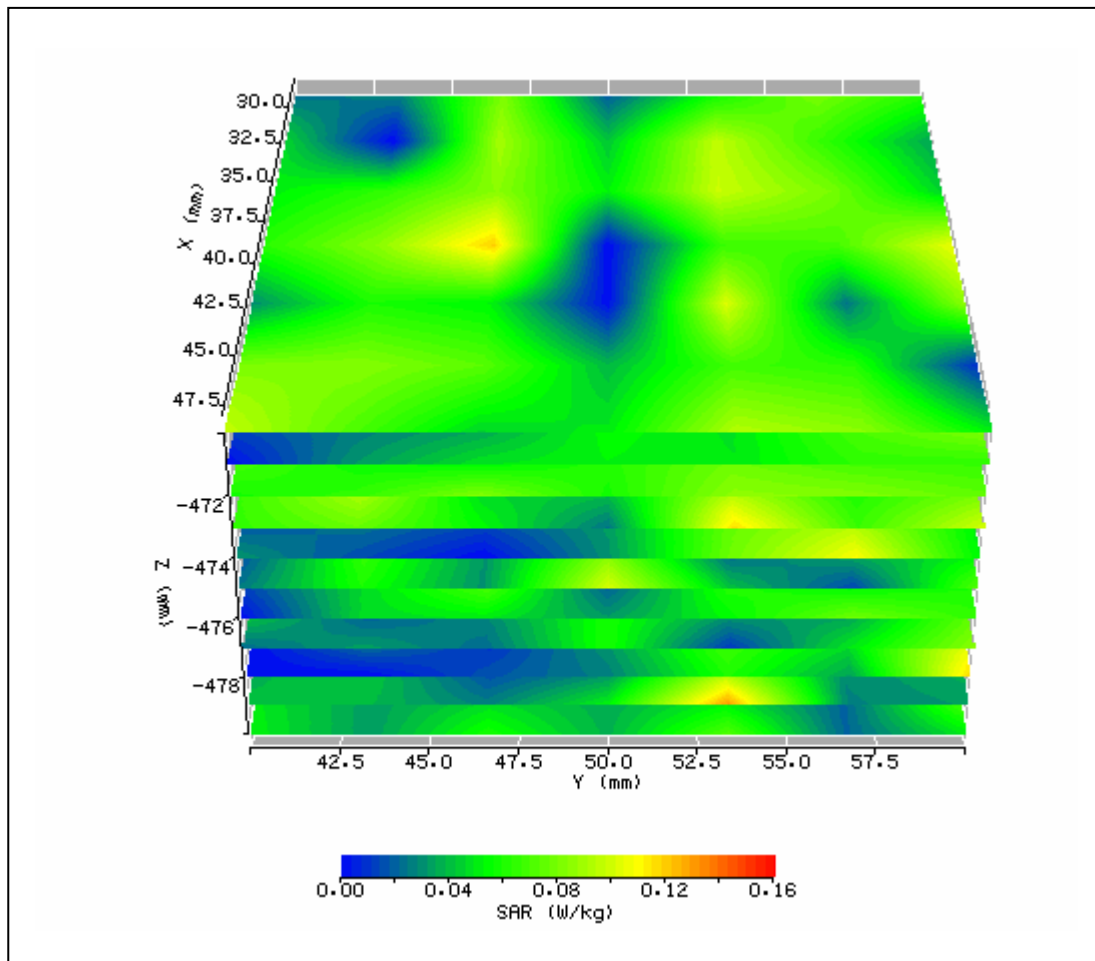


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	7/3/2007 9:51:37 AM	DUT Battery Model/No:	
Filename:	Side_Aux_36_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5200
Device Under Test:	Redstrom	Relative Permittivity:	47.90
Relative Humidity:	30%	Conductivity:	5.187
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-10.00 mm
DUT Position:	Side 0mm	Max SAR Y-axis Location:	-21.00 mm
Antenna Configuration:	Integral	Max E Field:	3.78 V/m
Test Frequency:	5320MHz	SAR 1g:	0.051 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.494 / .494 / .494	SAR Start:	0.010 W/kg
Type of Modulation:		SAR End:	0.010 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.65 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	07/02/2007
Input Power Level:	Set by SW	Extrapolation:	poly4

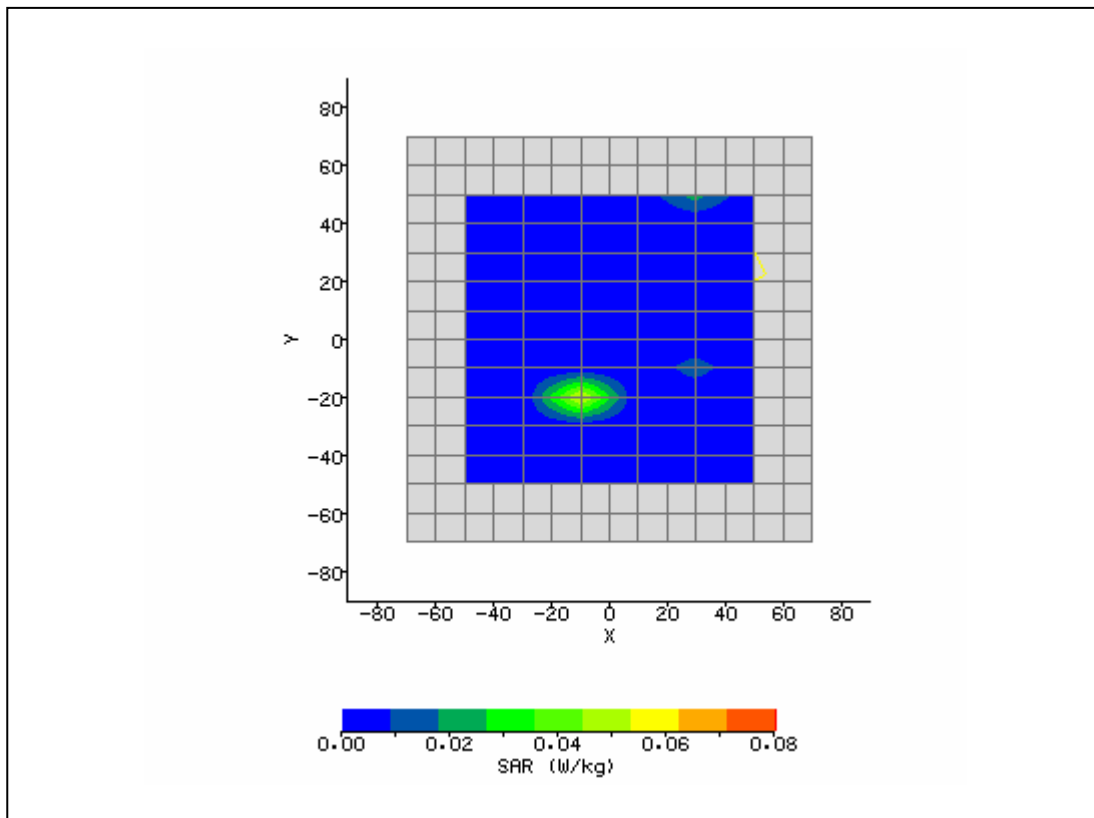


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	7/3/2007 2:52:14 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5800
Device Under Test:	Redstrom	Relative Permittivity:	47.85
Relative Humidity:	30%	Conductivity:	6.066
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-18.00 mm
DUT Position:	Lap 0mm	Max SAR Y-axis Location:	25.00 mm
Antenna Configuration:	Integral	Max E Field:	10.50 V/m
Test Frequency:	5785MHz	SAR 1g:	0.847 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.583 / .583 / .583	SAR Start:	0.299 W/kg
Type of Modulation:		SAR End:	0.312 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	4.14 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	07/03/2007
Input Power Level:	Set by SW	Extrapolation:	poly4

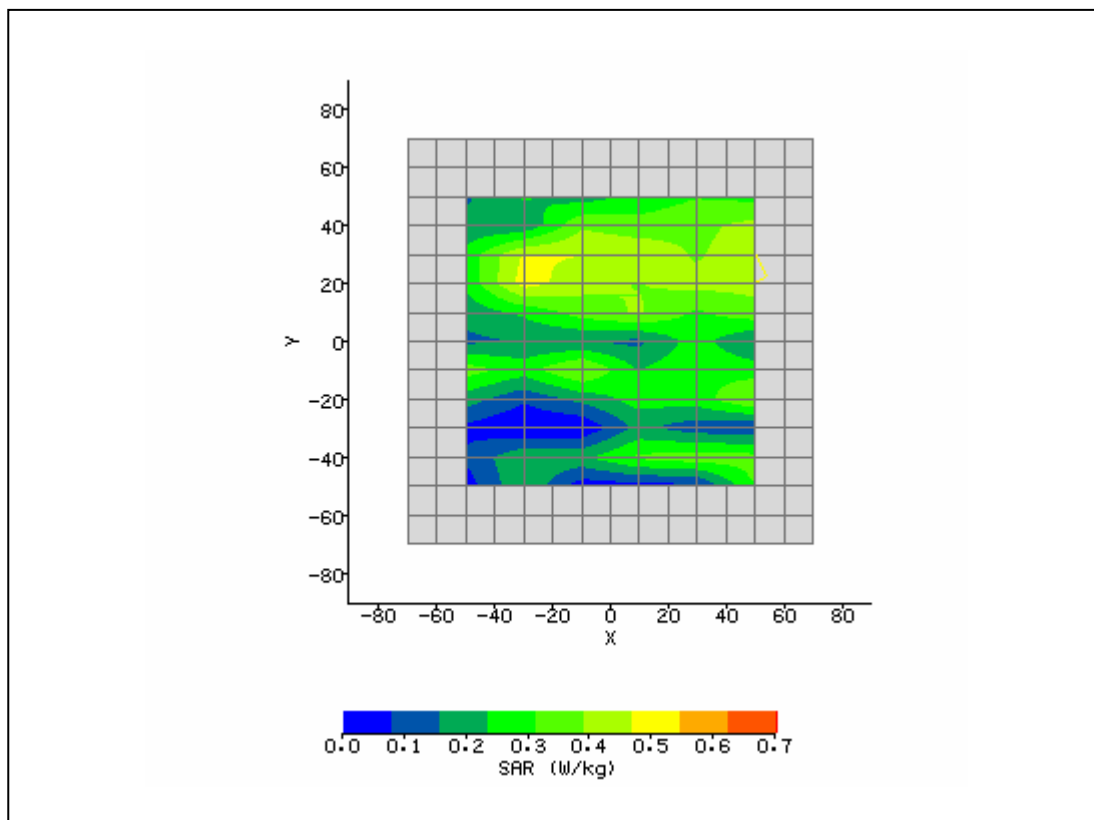


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	7/3/2007 3:31:58 PM	DUT Battery Model/No:	
Filename:	Lap_Main_157_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5800
Device Under Test:	Redstrom	Relative Permittivity:	47.85
Relative Humidity:	30%	Conductivity:	6.066
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-50.00 mm
DUT Position:	Side 0mm	Max SAR Y-axis Location:	50.00 mm
Antenna Configuration:	Integral	Max E Field:	11.28 V/m
Test Frequency:	5785MHz	SAR 1g:	0.621 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.583 / .583 / .583	SAR Start:	0.462 W/kg
Type of Modulation:		SAR End:	0.457 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-1.08 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	07/03/2007
Input Power Level:	Set by SW	Extrapolation:	poly4

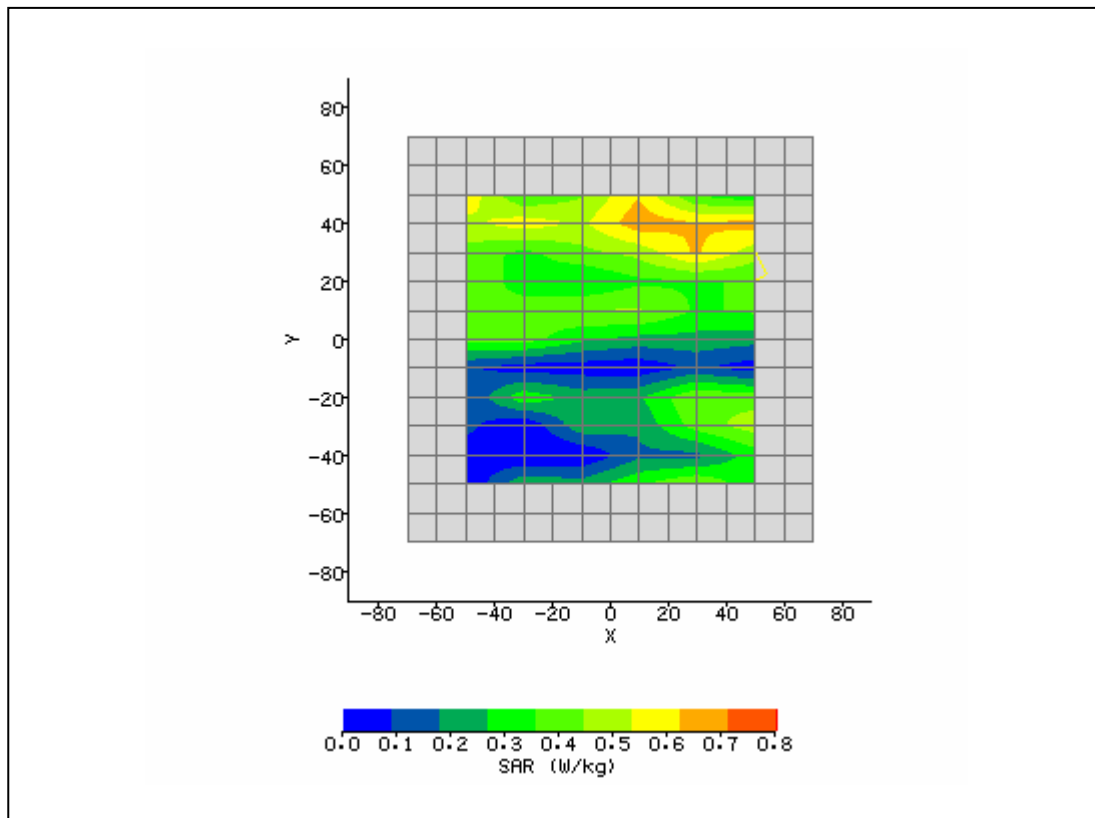


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	7/3/2007 3:58:14 PM	DUT Battery Model/No:	
Filename:	Side_Main_157_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5800
Device Under Test:	Redstorm	Relative Permittivity:	48.21
Relative Humidity:	30%	Conductivity:	5.985
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	50.00 mm
DUT Position:	Lap 0mm	Max SAR Y-axis Location:	17.00 mm
Antenna Configuration:	Integral	Max E Field:	10.22 V/m
Test Frequency:	5745MHz	SAR 1g:	0.438 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.583 / .583 / .583	SAR Start:	0.364 W/kg
Type of Modulation:		SAR End:	0.355 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-2.47 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	07/03/2007
Input Power Level:	Set by SW	Extrapolation:	poly4

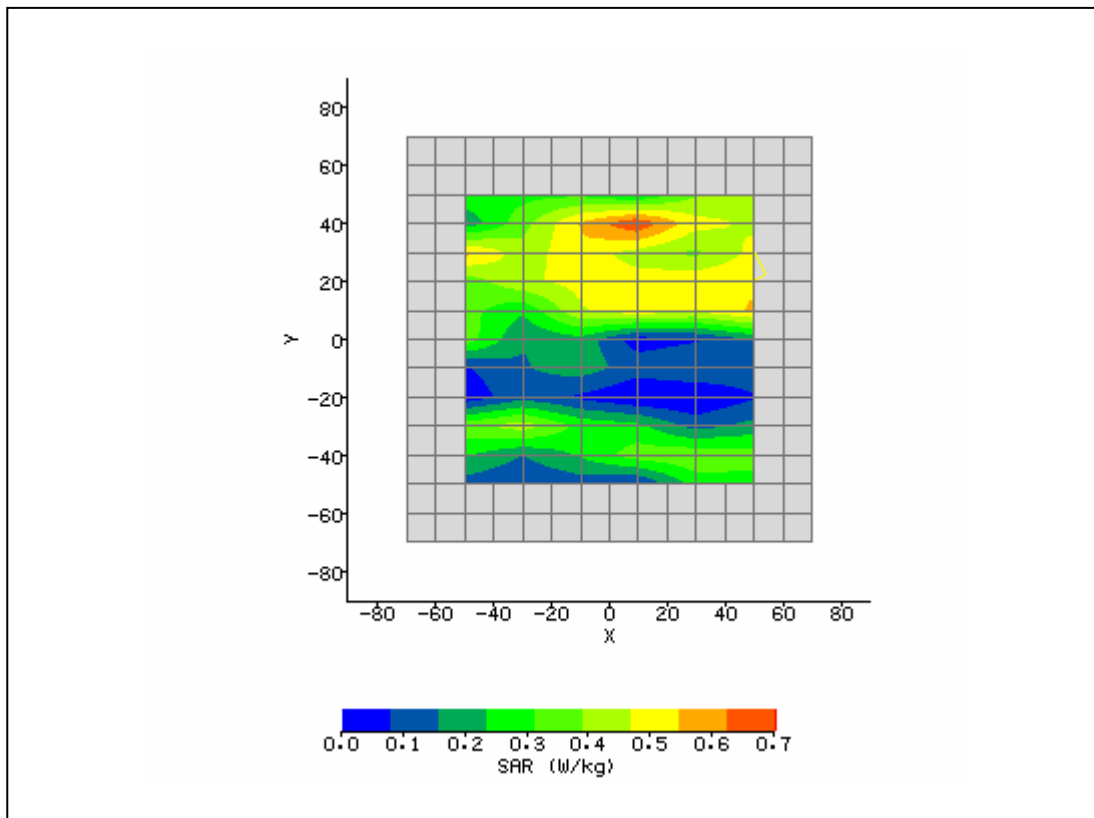


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	7/3/2007 4:24:40 PM	DUT Battery Model/No:	
Filename:	Lap_Main_149_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5800
Device Under Test:	Redstrom	Relative Permittivity:	47.14
Relative Humidity:	30%	Conductivity:	6.112
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-25.00 mm
DUT Position:	Lap 0mm	Max SAR Y-axis Location:	25.00 mm
Antenna Configuration:	Integral	Max E Field:	10.58 V/m
Test Frequency:	5825MHz	SAR 1g:	0.555 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.583 / .583 / .583	SAR Start:	0.338 W/kg
Type of Modulation:		SAR End:	0.328 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-2.95 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	07/03/2007
Input Power Level:	Set by SW	Extrapolation:	poly4

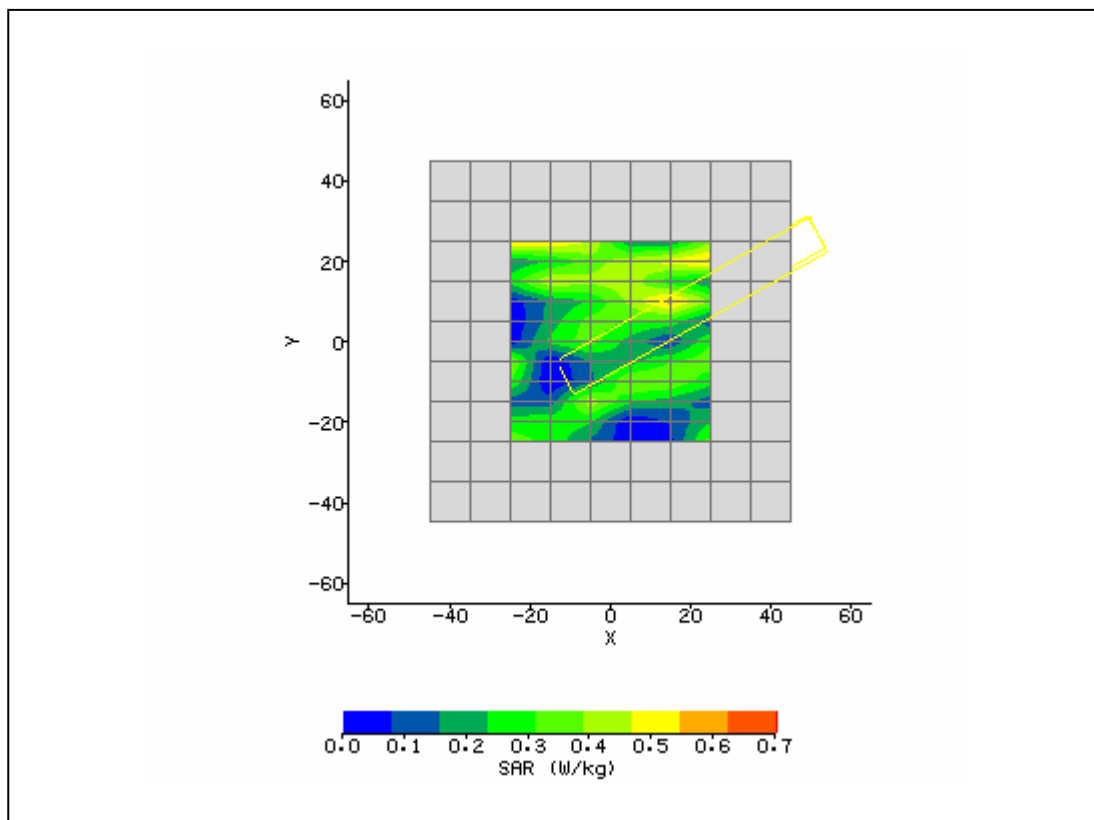


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	7/3/2007 4:47:38 PM	DUT Battery Model/No:	
Filename:	Lap_Main_165_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5800
Device Under Test:	Redstorm	Relative Permittivity:	47.85
Relative Humidity:	30%	Conductivity:	6.066
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-25.00 mm
DUT Position:	Lap 0mm	Max SAR Y-axis Location:	2.00 mm
Antenna Configuration:	Integral	Max E Field:	9.66 V/m
Test Frequency:	5785MHz	SAR 1g:	0.520 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.583 / .583 / .583	SAR Start:	0.230 W/kg
Type of Modulation:		SAR End:	0.228 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-2.16 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	07/03/2007
Input Power Level:	Set by SW	Extrapolation:	poly4

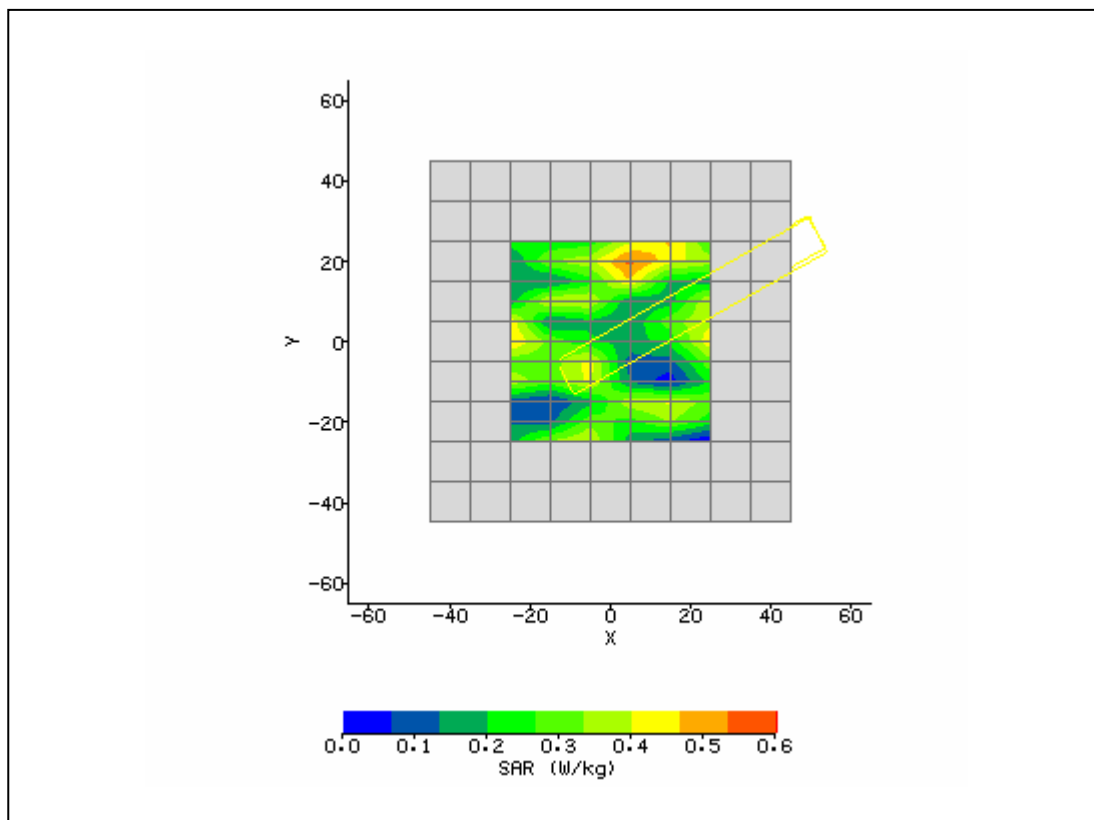


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	7/3/2007 5:01:04 PM	DUT Battery Model/No:	
Filename:	Side_Aux_157.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5800
Device Under Test:	Redstorm	Relative Permittivity:	47.85
Relative Humidity:	30%	Conductivity:	6.066
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-15.00 mm
DUT Position:	Side 0mm	Max SAR Y-axis Location:	-20.00 mm
Antenna Configuration:	Integral	Max E Field:	10.79 V/m
Test Frequency:	5785MHz	SAR 1g:	0.551 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.583 / .583 / .583	SAR Start:	0.269 W/kg
Type of Modulation:		SAR End:	0.257 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-2.29 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	07/03/2007
Input Power Level:	Set by SW	Extrapolation:	poly4

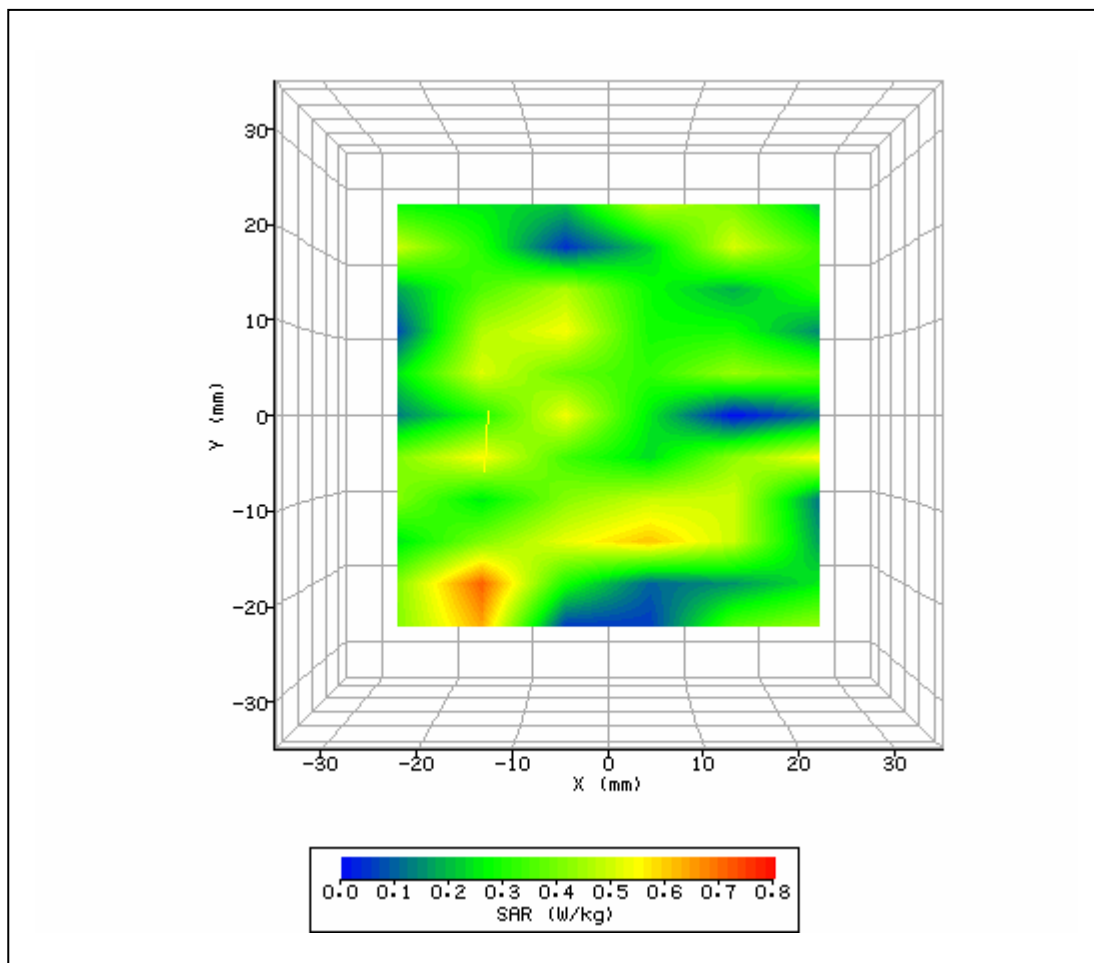


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	7/5/2007 8:46:47 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5800
Device Under Test:	Redstrom	Relative Permittivity:	48.21
Relative Humidity:	30%	Conductivity:	5.985
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	5.00 mm
DUT Position:	Side 0mm	Max SAR Y-axis Location:	-7.50 mm
Antenna Configuration:	Integral	Max E Field:	12.79 V/m
Test Frequency:	5745MHz	SAR 1g:	0.733 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.583 / .583 / .583	SAR Start:	0.478 W/kg
Type of Modulation:		SAR End:	0.462 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-3.34 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	07/03/2007
Input Power Level:	Set by SW	Extrapolation:	poly4

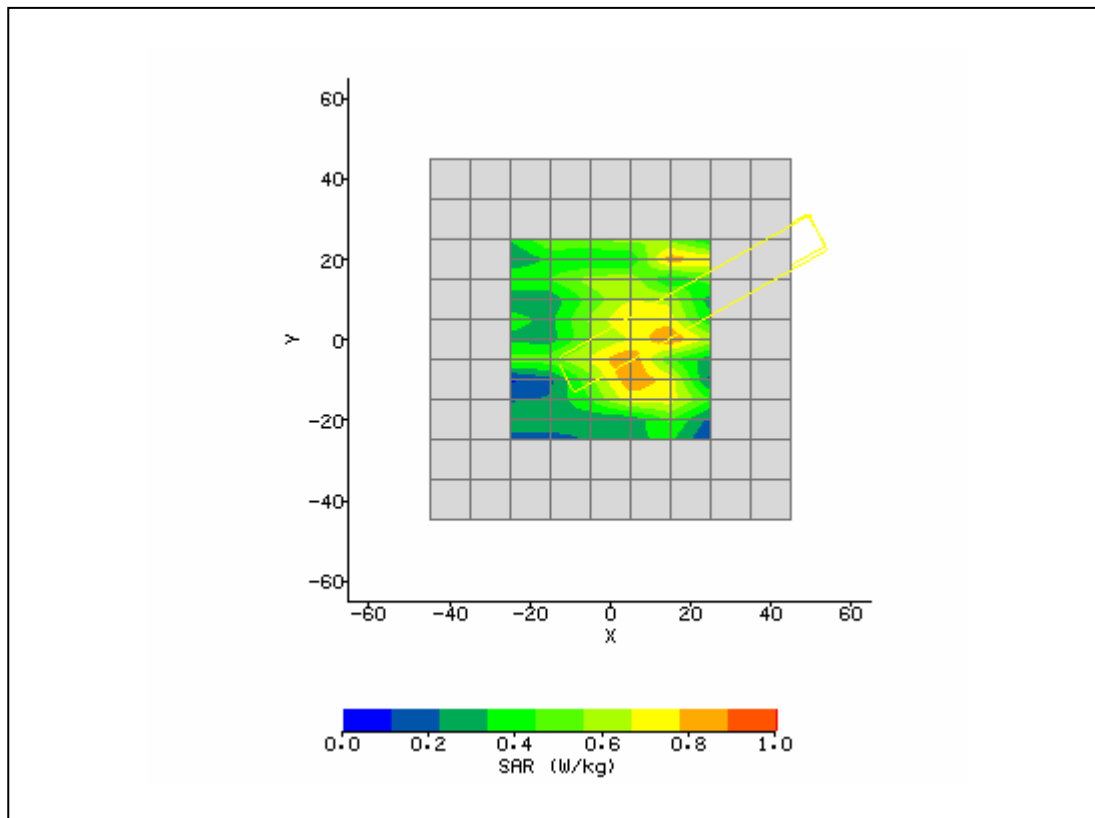


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	7/5/2007 9:01:59 AM	DUT Battery Model/No:	
Filename:	Side_Aux_149_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5800
Device Under Test:	Redstrom	Relative Permittivity:	47.14
Relative Humidity:	30%	Conductivity:	6.112
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	0.00 mm
DUT Position:	Side 0mm	Max SAR Y-axis Location:	-3.00 mm
Antenna Configuration:	Integral	Max E Field:	13.72 V/m
Test Frequency:	5825MHz	SAR 1g:	0.701 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.583 / .583 / .583	SAR Start:	0.341 W/kg
Type of Modulation:		SAR End:	0.338 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-1.01 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	07/03/2007
Input Power Level:	Set by SW	Extrapolation:	poly4

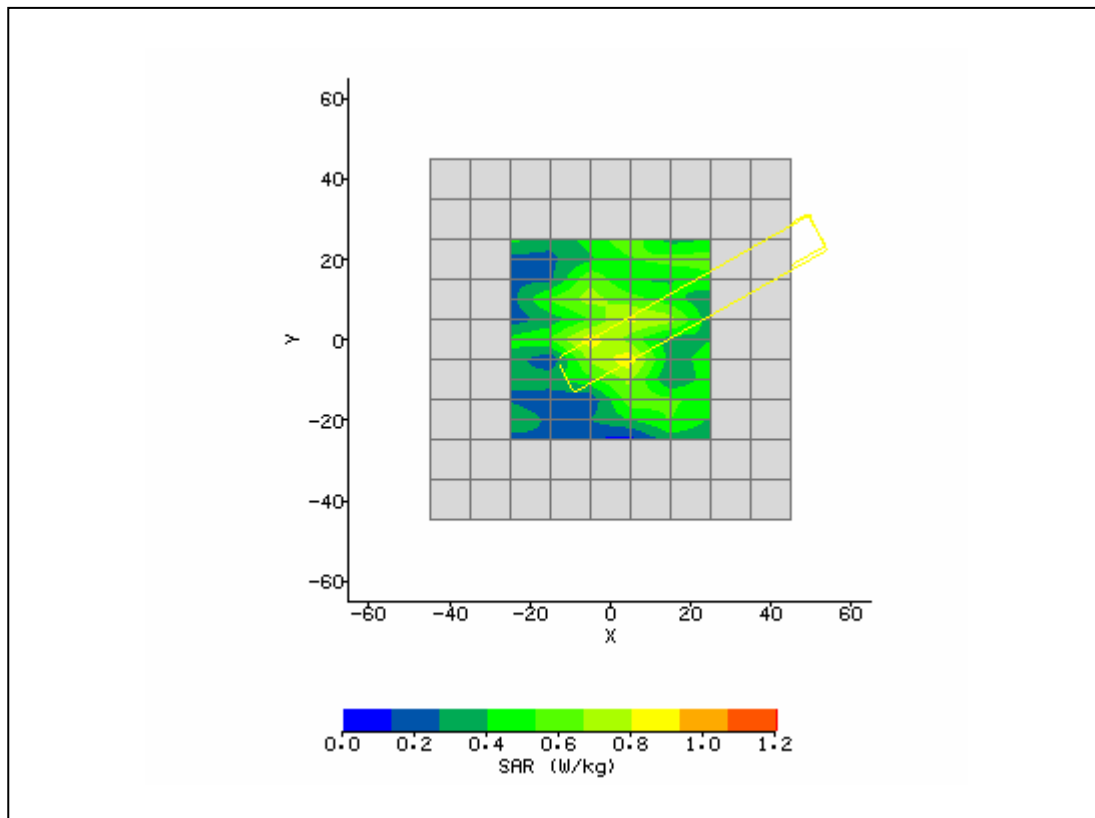


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	7/2/2007 9:52:12 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	Redstorm	Relative Permittivity:	51.00
Relative Humidity:	30%	Conductivity:	1.915
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	32.00 mm
DUT Position:	Lap 0mm.	Max SAR Y-axis Location:	40.00 mm
Antenna Configuration:	Integral	Max E Field:	7.55 V/m
Test Frequency:	2437MHz	SAR 1g:	0.086 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.053 W/kg
Type of Modulation:		SAR End:	0.055 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.31 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	07/02/2007
Input Power Level:	Set by test SW	Extrapolation:	poly4

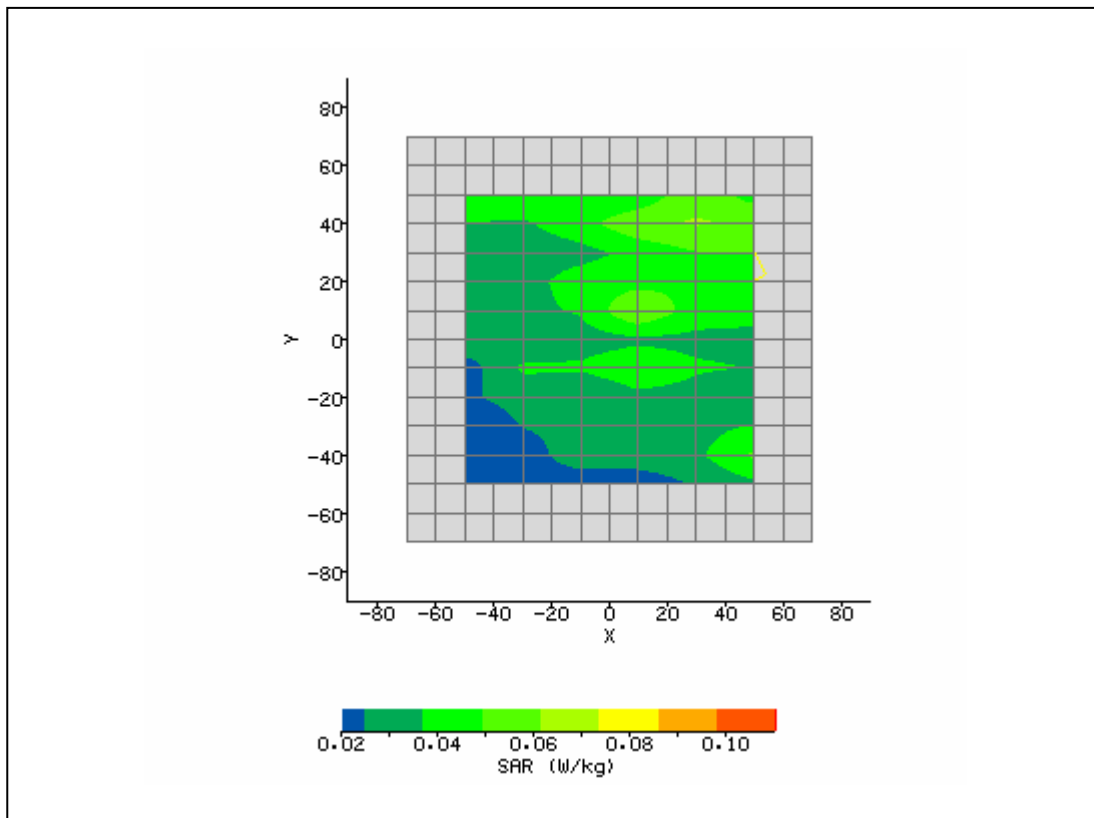


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	7/2/2007 10:10:40 AM	DUT Battery Model/No:	
Filename:	Lap_6_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	Redstorm	Relative Permittivity:	51.00
Relative Humidity:	30%	Conductivity:	1.915
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	20.00 mm
DUT Position:	Right 0mm.	Max SAR Y-axis Location:	50.00 mm
Antenna Configuration:	Integral	Max E Field:	7.97 V/m
Test Frequency:	2437MHz	SAR 1g:	0.091 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.069 W/kg
Type of Modulation:		SAR End:	0.073 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	4.97 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	07/02/2007
Input Power Level:	Set by test SW	Extrapolation:	poly4

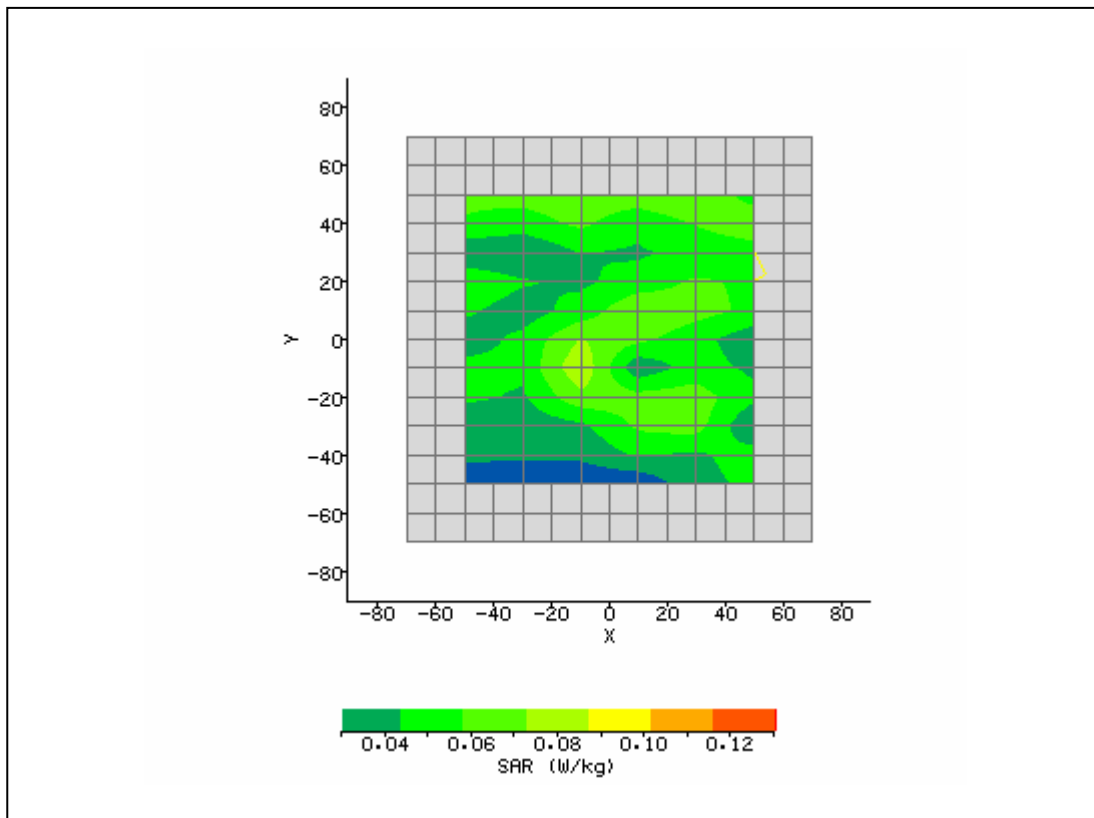


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	7/2/2007 10:26:43 AM	DUT Battery Model/No:	
Filename:	Right_6_3d1.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	Redstorm	Relative Permittivity:	50.89
Relative Humidity:	30%	Conductivity:	1.909
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	24.00 mm
DUT Position:	Right 0mm.	Max SAR Y-axis Location:	-13.00 mm
Antenna Configuration:	Integral	Max E Field:	6.85 V/m
Test Frequency:	2412MHz	SAR 1g:	0.113 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.048 W/kg
Type of Modulation:		SAR End:	0.050 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.65 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	07/02/2007
Input Power Level:	Set by test SW	Extrapolation:	poly4

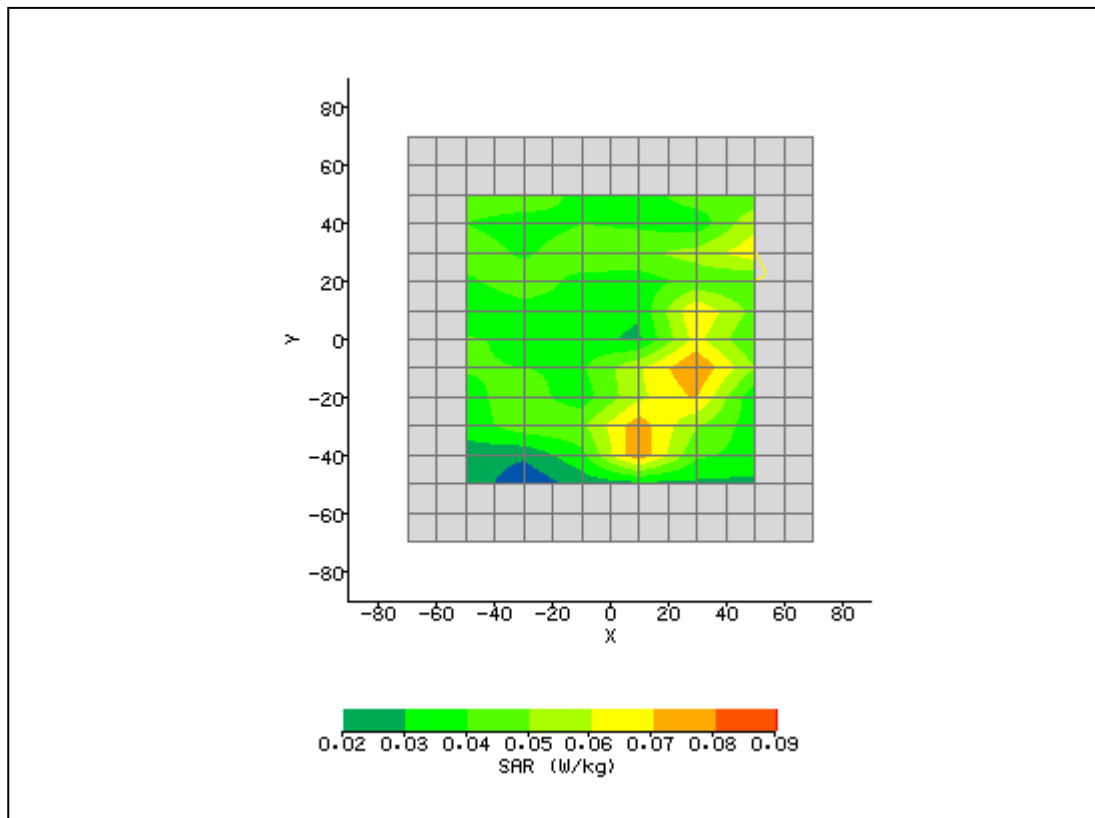


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	7/2/2007 10:41:02 AM	DUT Battery Model/No:	
Filename:	Right_1_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	Redstorm	Relative Permittivity:	51.07
Relative Humidity:	30%	Conductivity:	1.923
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	28.00 mm
DUT Position:	Right 0mm.	Max SAR Y-axis Location:	-9.00 mm
Antenna Configuration:	Integral	Max E Field:	7.68 V/m
Test Frequency:	2462MHz	SAR 1g:	0.133 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.047 W/kg
Type of Modulation:		SAR End:	0.049 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	4.12 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	07/02/2007
Input Power Level:	Set by test SW	Extrapolation:	poly4

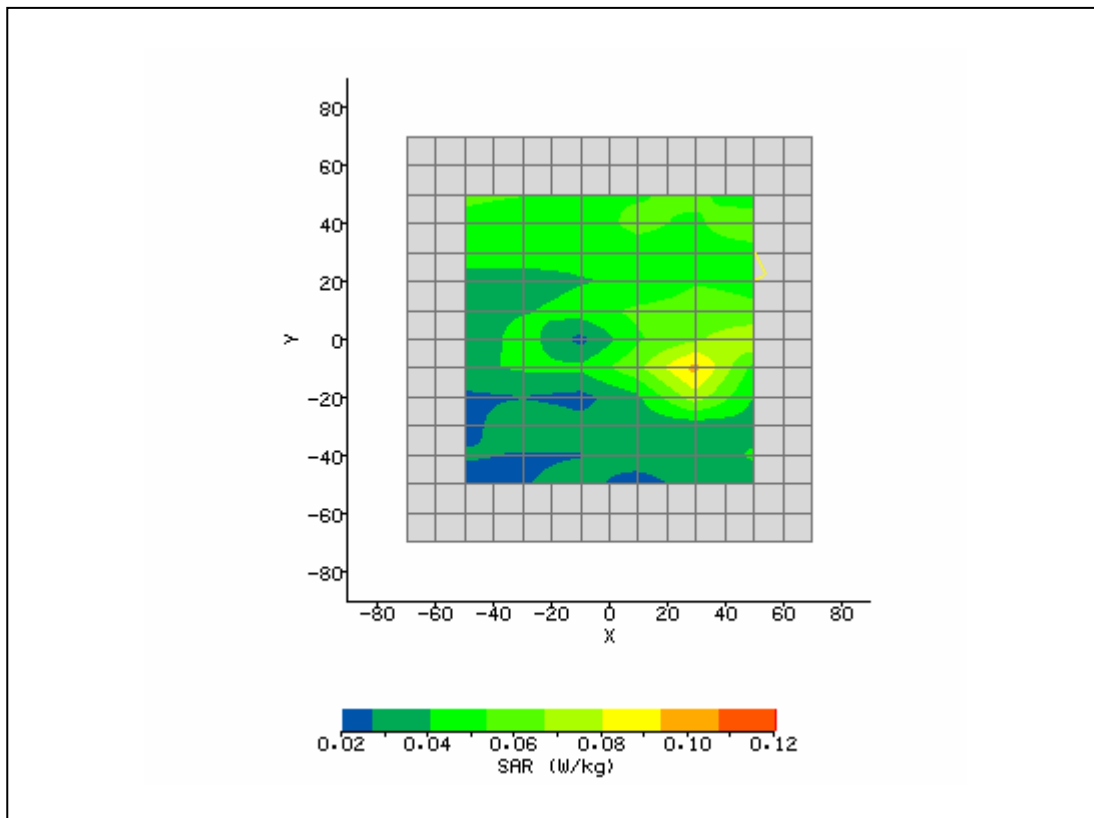


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	7/2/2007 11:13:02 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	Redstorm	Relative Permittivity:	51.00
Relative Humidity:	30%	Conductivity:	1.915
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	50.00 mm
DUT Position:	Lap 0mm.	Max SAR Y-axis Location:	40.00 mm
Antenna Configuration:	Integral	Max E Field:	6.40 V/m
Test Frequency:	2437MHz	SAR 1g:	0.064 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.035 W/kg
Type of Modulation:		SAR End:	0.037 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	4.35 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	07/02/2007
Input Power Level:	Set by test SW	Extrapolation:	poly4

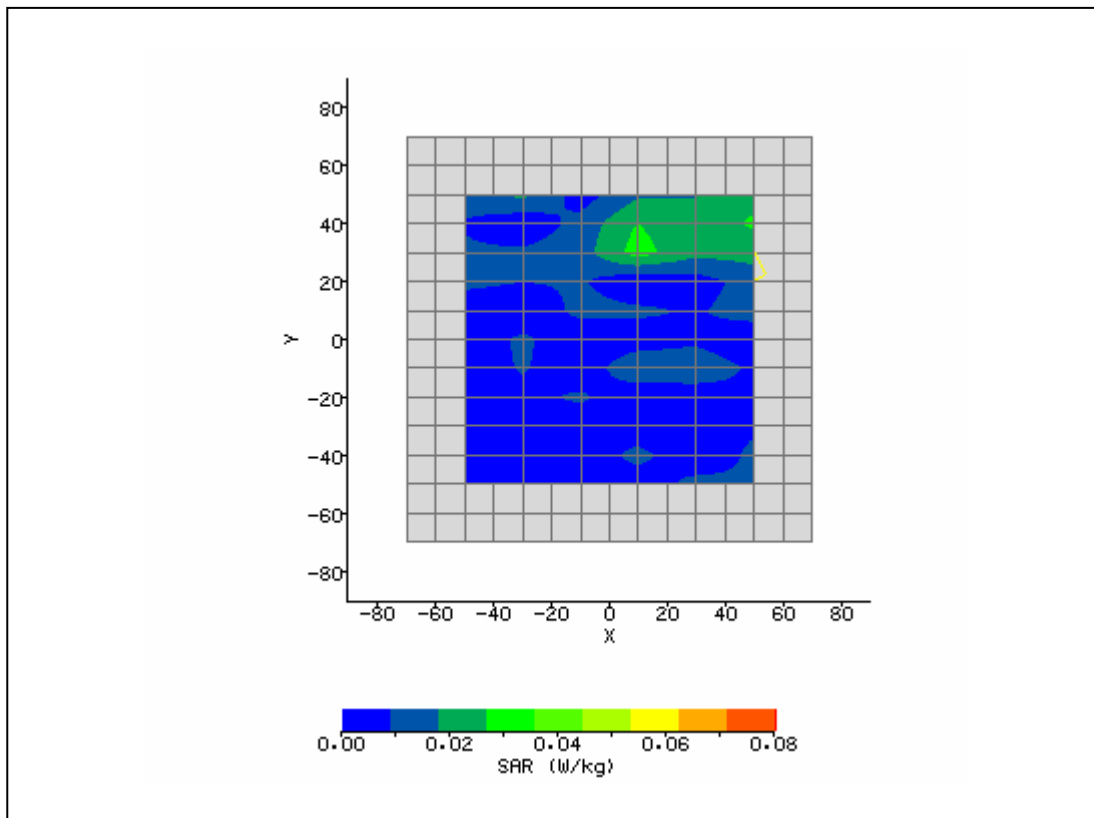


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	7/2/2007 11:28:48 AM	DUT Battery Model/No:	
Filename:	Lap_6_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	Redstorm	Relative Permittivity:	51.00
Relative Humidity:	30%	Conductivity:	1.915
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-14.00 mm
DUT Position:	Right 0mm.	Max SAR Y-axis Location:	50.00 mm
Antenna Configuration:	Integral	Max E Field:	6.42 V/m
Test Frequency:	2437MHz	SAR 1g:	0.049 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.020 W/kg
Type of Modulation:		SAR End:	0.021 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	4.56 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	07/02/2007
Input Power Level:	Set by test SW	Extrapolation:	poly4

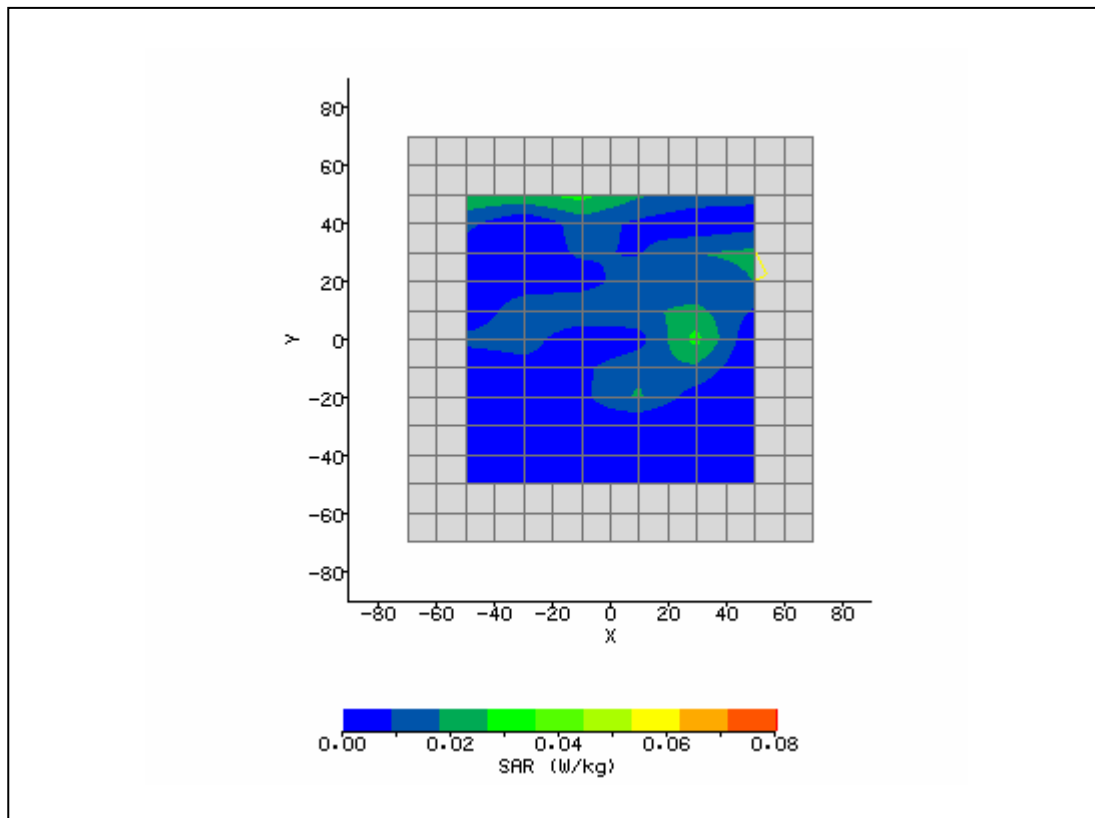


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	7/2/2007 2:30:12 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	Redstrom	Relative Permittivity:	50.89
Relative Humidity:	30%	Conductivity:	1.91
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	30.00 mm
DUT Position:	Lap 0mm	Max SAR Y-axis Location:	50.00 mm
Antenna Configuration:	Integral	Max E Field:	6.17 V/m
Test Frequency:	2422MHz	SAR 1g:	0.010 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	0.008 W/kg
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.005 W/kg
Type of Modulation:		SAR End:	0.005 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.82 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	07/02/2007
Input Power Level:	Set by SW	Extrapolation:	poly4

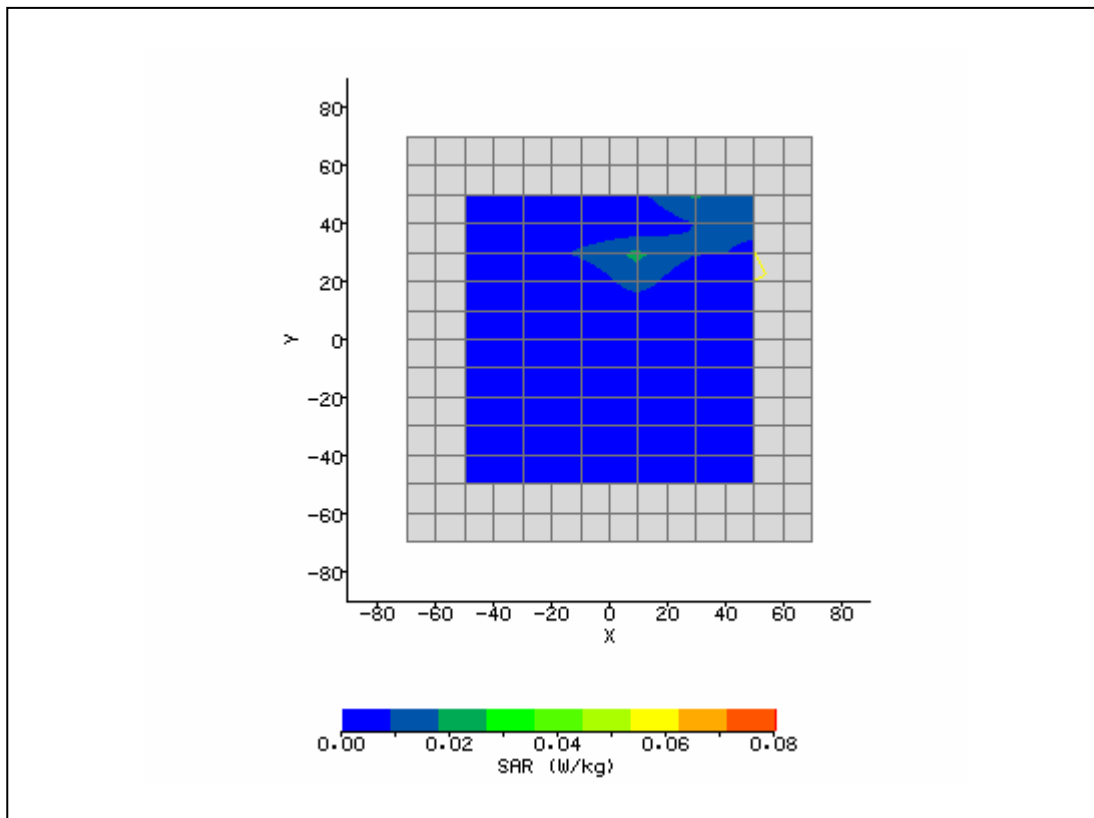


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	7/2/2007 2:56:04 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	Redstrom	Relative Permittivity:	51.07
Relative Humidity:	30%	Conductivity:	1.92
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	8.00 mm
DUT Position:	Lap 0mm	Max SAR Y-axis Location:	30.00 mm
Antenna Configuration:	Integral	Max E Field:	6.32 V/m
Test Frequency:	2452MHz	SAR 1g:	0.038 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.022 W/kg
Type of Modulation:		SAR End:	0.023 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	4.36 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	07/02/2007
Input Power Level:	Set by SW	Extrapolation:	poly4

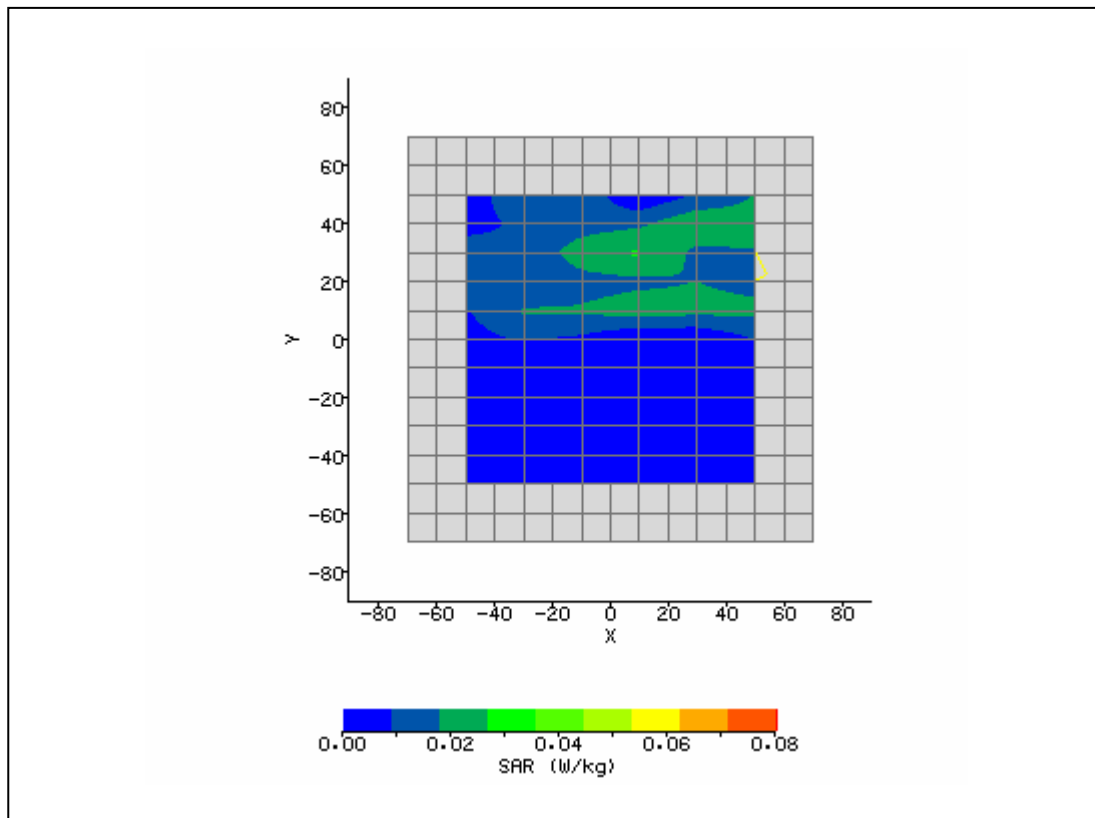


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	7/3/2007 10:27:31 AM	DUT Battery Model/No:	
Filename:	Side_Aux_64_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5200
Device Under Test:	Redstrom	Relative Permittivity:	48.30
Relative Humidity:	30%	Conductivity:	5.21
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	42.00 mm
DUT Position:	Lap 0mm	Max SAR Y-axis Location:	25.00 mm
Antenna Configuration:	Integral	Max E Field:	4.19 V/m
Test Frequency:	5260MHz	SAR 1g:	0.102 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.494 / .494 / .494	SAR Start:	0.033 W/kg
Type of Modulation:		SAR End:	0.035 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	4.06 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	07/02/2007
Input Power Level:	Set by SW	Extrapolation:	poly4

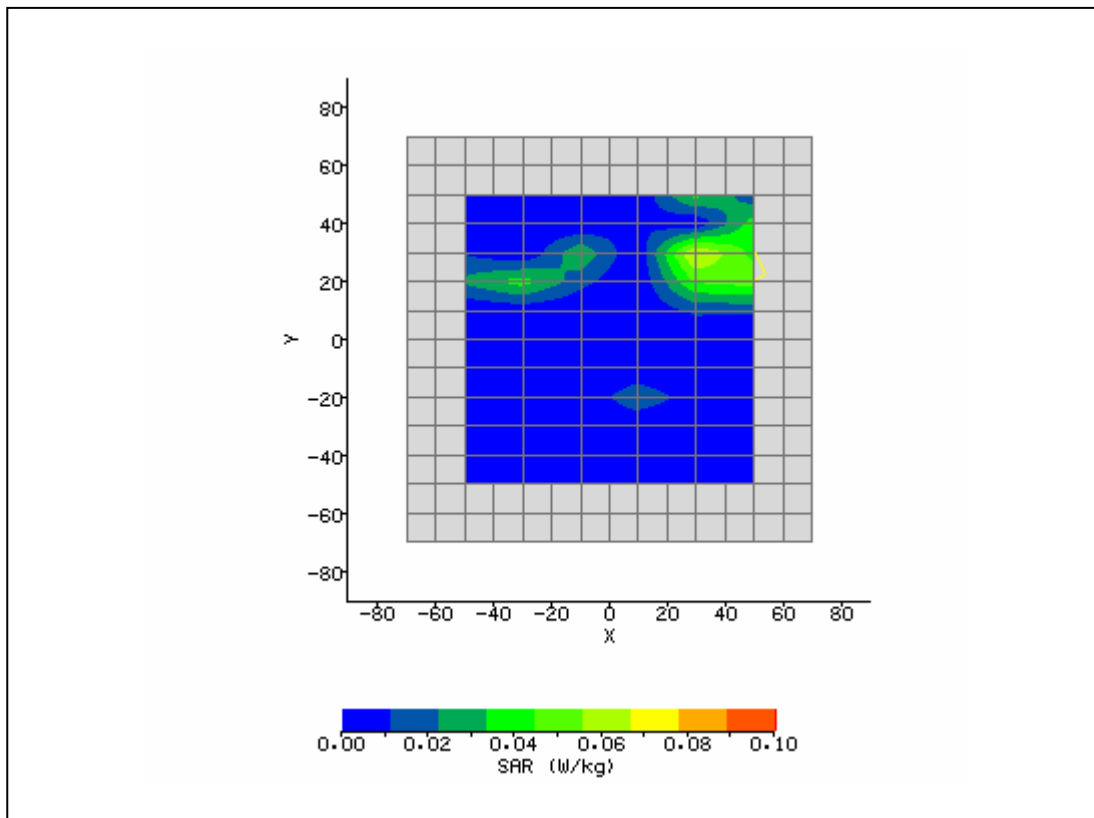


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	7/3/2007 10:48:27 AM	DUT Battery Model/No:	
Filename:	Lap_52_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5200
Device Under Test:	Redstrom	Relative Permittivity:	48.30
Relative Humidity:	30%	Conductivity:	5.21
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-50.00 mm
DUT Position:	Side 0mm	Max SAR Y-axis Location:	49.00 mm
Antenna Configuration:	Integral	Max E Field:	4.56 V/m
Test Frequency:	5260MHz	SAR 1g:	0.114 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.494 / .494 / .494	SAR Start:	0.055 W/kg
Type of Modulation:		SAR End:	0.054 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-4.65 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	07/02/2007
Input Power Level:	Set by SW	Extrapolation:	poly4

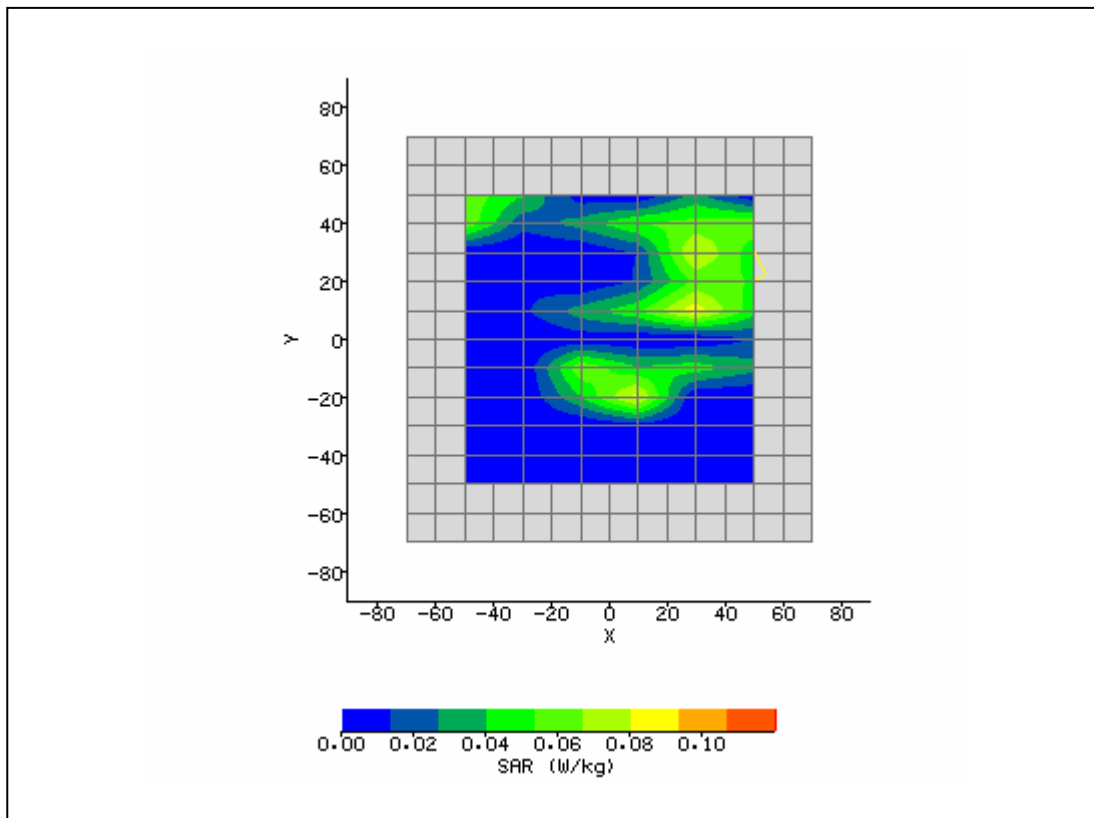


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	7/3/2007 11:05:30 AM	DUT Battery Model/No:	
Filename:	Side_52_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5200
Device Under Test:	Redstrom	Relative Permittivity:	48.27
Relative Humidity:	30%	Conductivity:	5.229
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	10.00 mm
DUT Position:	Side 0mm	Max SAR Y-axis Location:	-27.00 mm
Antenna Configuration:	Integral	Max E Field:	5.10 V/m
Test Frequency:	5180MHz	SAR 1g:	0.126 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.494 / .494 / .494	SAR Start:	0.025 W/kg
Type of Modulation:		SAR End:	0.025 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-3.65 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	07/02/2007
Input Power Level:	Set by SW	Extrapolation:	poly4

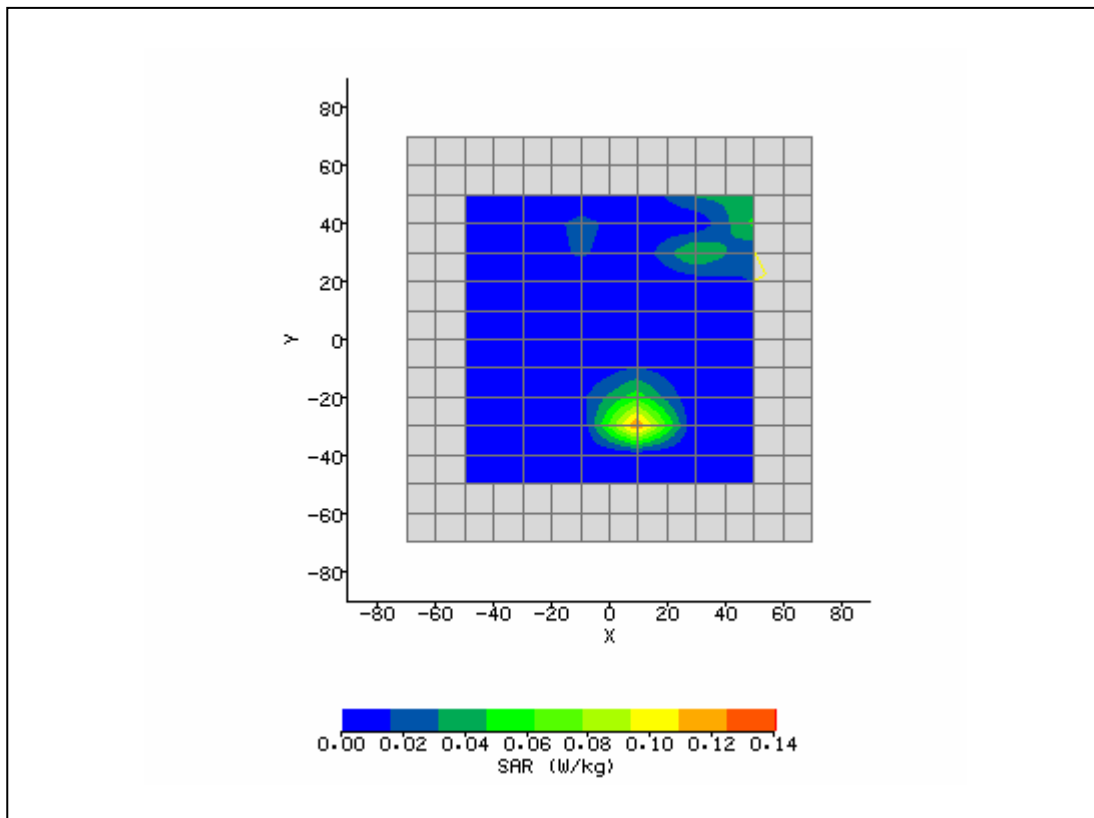


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	7/3/2007 11:21:05 AM	DUT Battery Model/No:	
Filename:	Side_36_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5200
Device Under Test:	Redstrom	Relative Permittivity:	47.90
Relative Humidity:	30%	Conductivity:	5.229
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	10.00 mm
DUT Position:	Side 0mm	Max SAR Y-axis Location:	-27.00 mm
Antenna Configuration:	Integral	Max E Field:	5.85 V/m
Test Frequency:	5320MHz	SAR 1g:	0.190 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.494 / .494 / .494	SAR Start:	0.024 W/kg
Type of Modulation:		SAR End:	0.023 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-3.98 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	07/02/2007
Input Power Level:	Set by SW	Extrapolation:	poly4

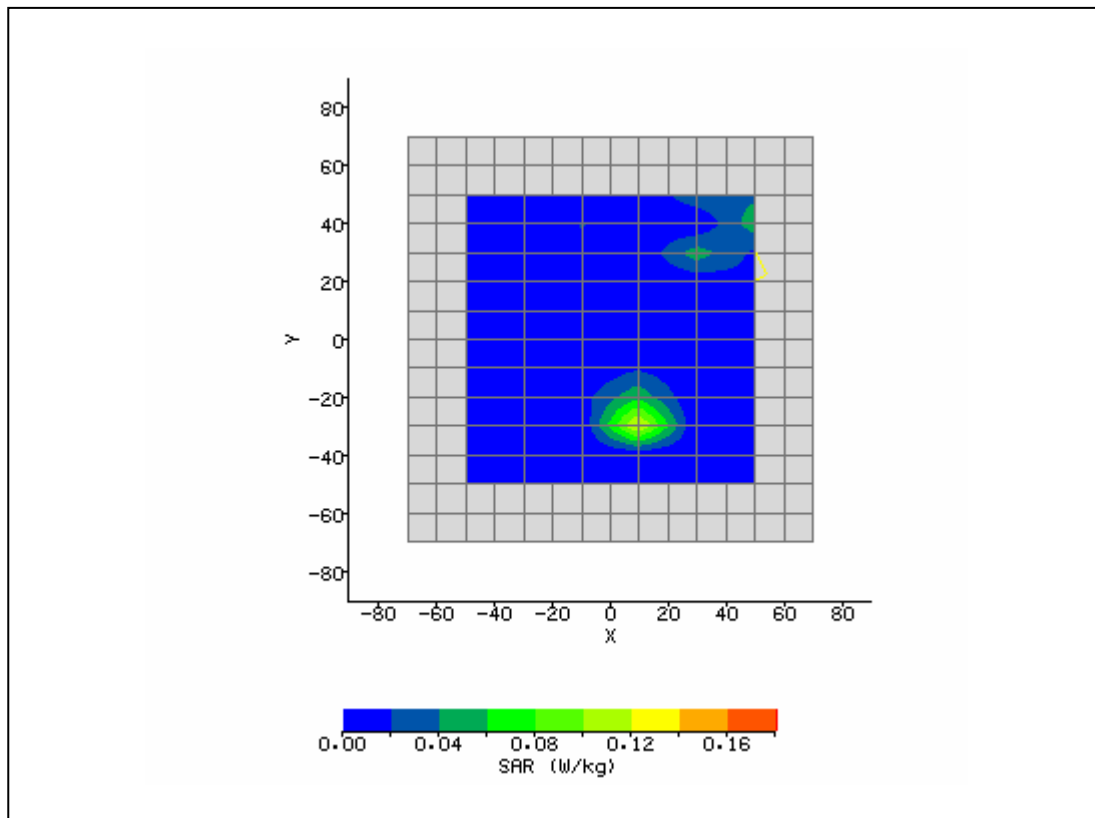


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	7/3/2007 12:00:51 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5200
Device Under Test:	Redstrom	Relative Permittivity:	48.31
Relative Humidity:	30%	Conductivity:	5.213
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	50.00 mm
DUT Position:	Lap 0mm	Max SAR Y-axis Location:	0.00 mm
Antenna Configuration:	Integral	Max E Field:	8.53 V/m
Test Frequency:	5270MHz	SAR 1g:	0.414 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.494 / .494 / .494	SAR Start:	0.150 W/kg
Type of Modulation:		SAR End:	0.155 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.34 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	07/03/2007
Input Power Level:	Set by SW	Extrapolation:	poly4

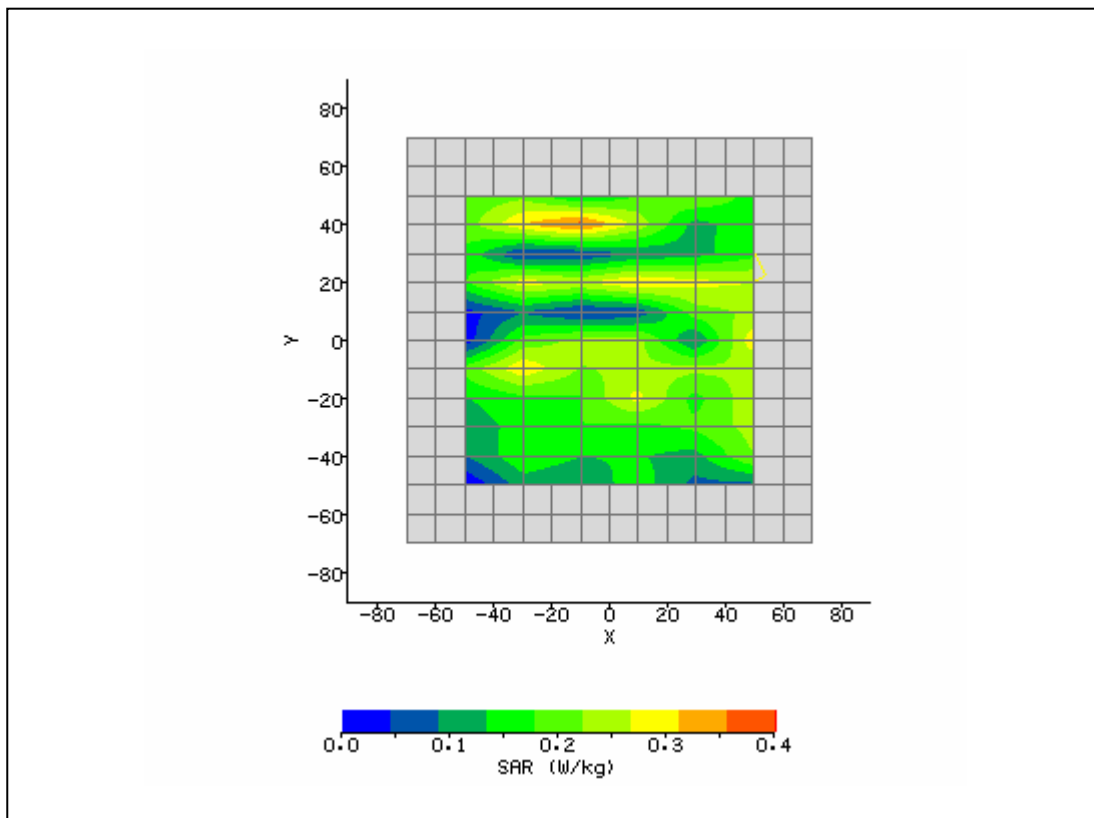


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	7/3/2007 12:19:29 PM	DUT Battery Model/No:	
Filename:	Lap_54_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5200
Device Under Test:	Redstrom	Relative Permittivity:	48.31
Relative Humidity:	30%	Conductivity:	5.213
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	50.00 mm
DUT Position:	Side 0mm	Max SAR Y-axis Location:	50.00 mm
Antenna Configuration:	Integral	Max E Field:	10.95 V/m
Test Frequency:	5270MHz	SAR 1g:	0.588 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.494 / .494 / .494	SAR Start:	0.316 W/kg
Type of Modulation:		SAR End:	0.326 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.16 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	07/03/2007
Input Power Level:	Set by SW	Extrapolation:	poly4

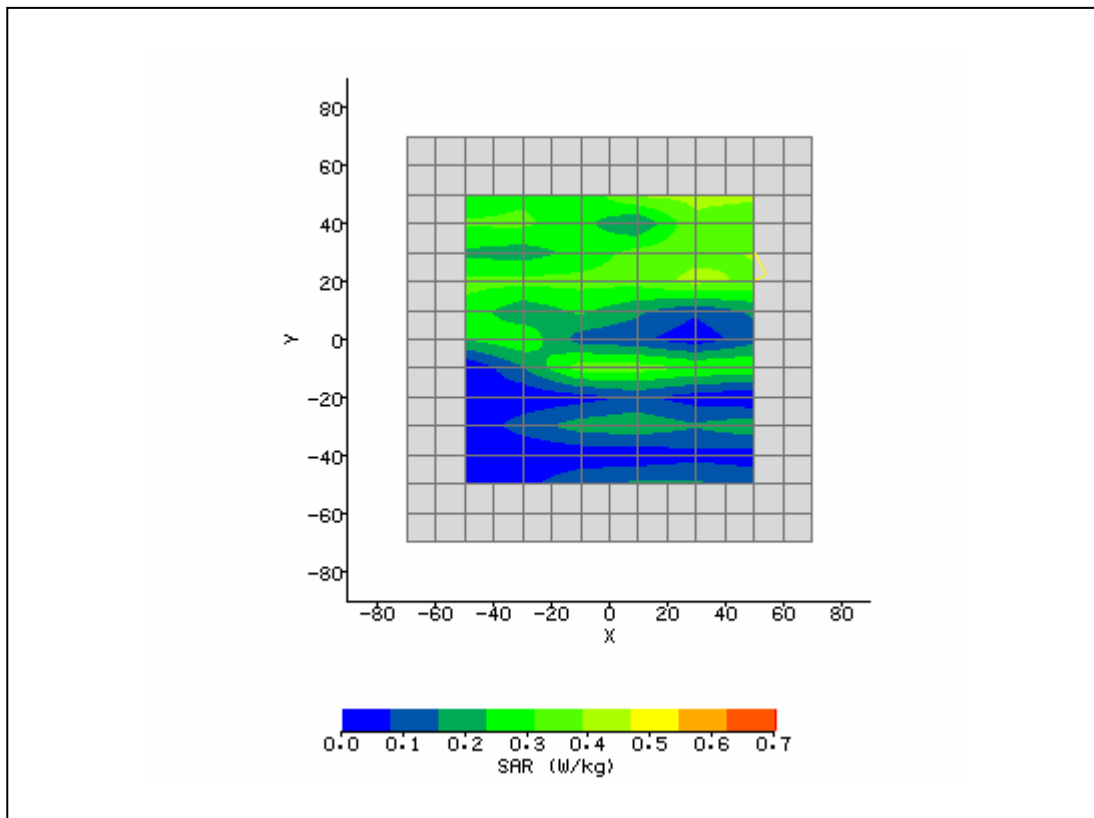


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	7/3/2007 12:49:37 PM	DUT Battery Model/No:	
Filename:	Lap_38_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5200
Device Under Test:	Redstrom	Relative Permittivity:	48.29
Relative Humidity:	30%	Conductivity:	5.227
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	50.00 mm
DUT Position:	Side 0mm	Max SAR Y-axis Location:	31.00 mm
Antenna Configuration:	Integral	Max E Field:	9.90 V/m
Test Frequency:	5190MHz	SAR 1g:	0.327 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.494 / .494 / .494	SAR Start:	0.250 W/kg
Type of Modulation:		SAR End:	0.255 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.11 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	07/03/2007
Input Power Level:	Set by SW	Extrapolation:	poly4

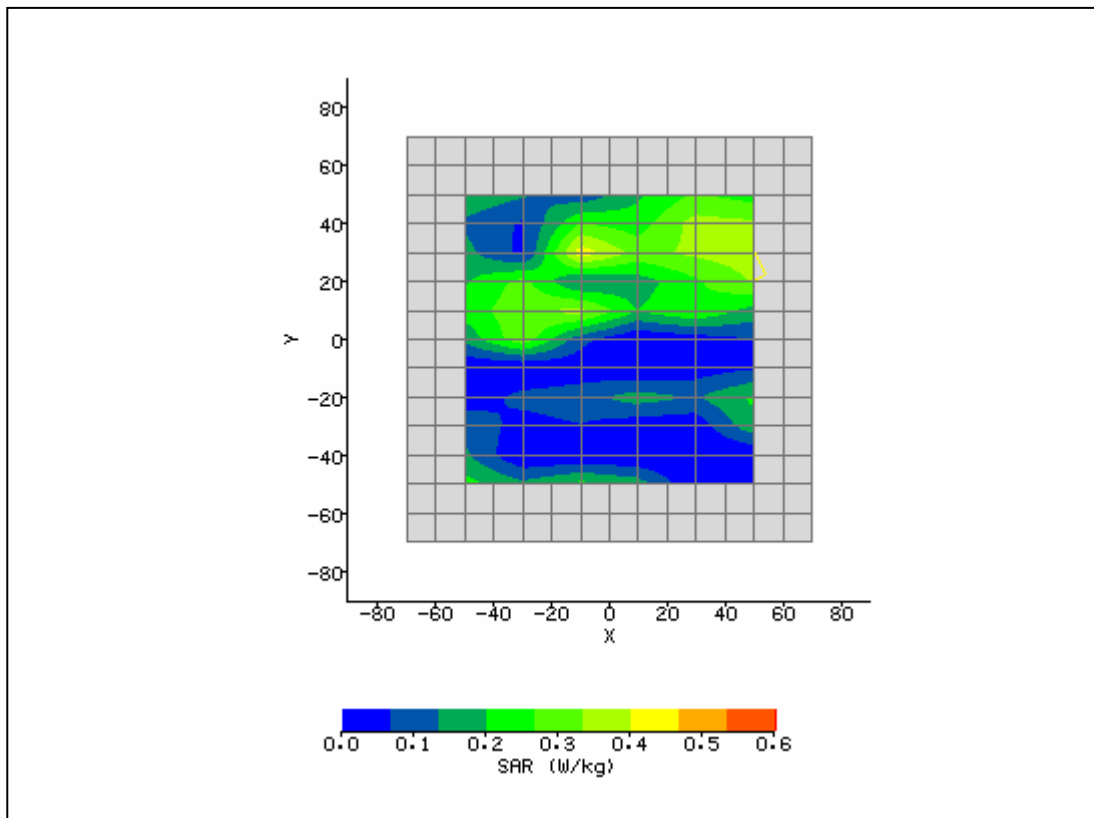


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	7/3/2007 1:04:30 PM	DUT Battery Model/No:	
Filename:	Side_38_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5200
Device Under Test:	Redstrom	Relative Permittivity:	47.92
Relative Humidity:	30%	Conductivity:	5.193
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	50.00 mm
DUT Position:	Side 0mm	Max SAR Y-axis Location:	50.00 mm
Antenna Configuration:	Integral	Max E Field:	10.40 V/m
Test Frequency:	5310MHz	SAR 1g:	0.646 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.494 / .494 / .494	SAR Start:	0.315 W/kg
Type of Modulation:		SAR End:	0.304 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-3.61 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	07/03/2007
Input Power Level:	Set by SW	Extrapolation:	poly4

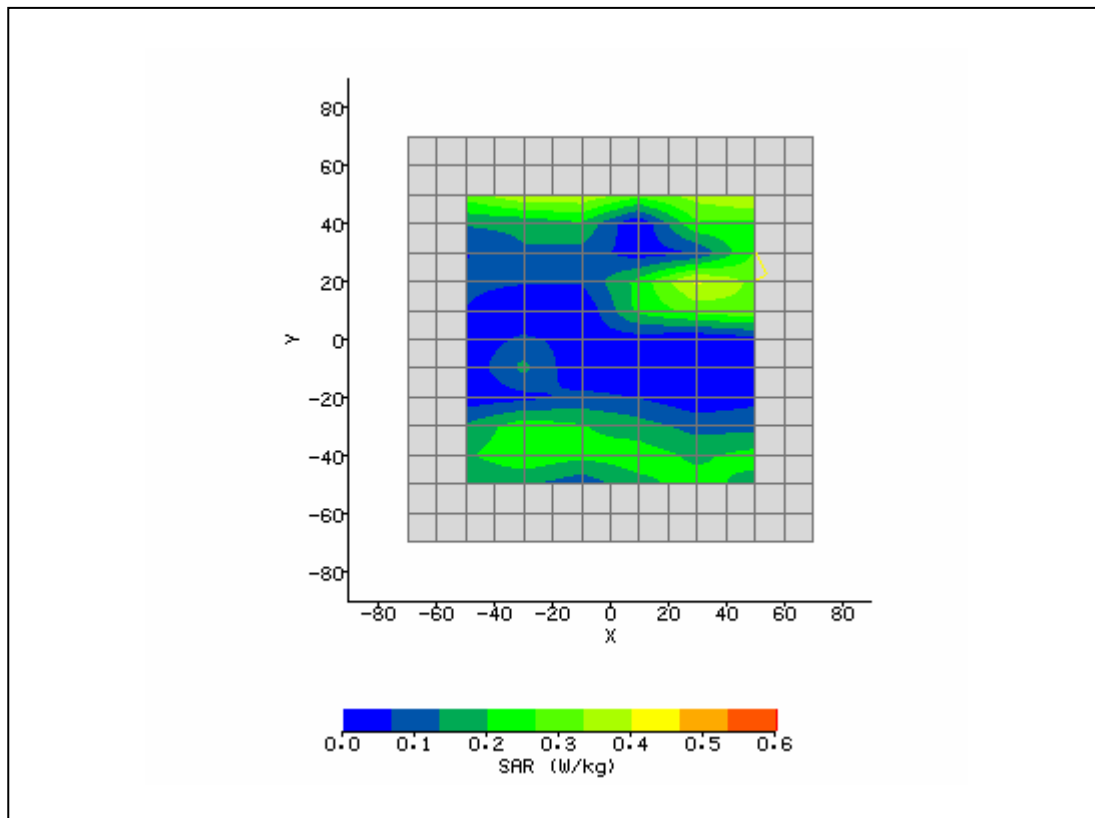


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	7/3/2007 9:50:39 AM	DUT Battery Model/No:	
Filename:	Side_Aux_165_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5800
Device Under Test:	Redstrom	Relative Permittivity:	47.85
Relative Humidity:	30%	Conductivity:	6.066
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	15.00 mm
DUT Position:	Lap 0mm	Max SAR Y-axis Location:	15.00 mm
Antenna Configuration:	Integral	Max E Field:	10.21 V/m
Test Frequency:	5785MHz	SAR 1g:	0.410 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.583 / .583 / .583	SAR Start:	0.327 W/kg
Type of Modulation:		SAR End:	0.334 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.14 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	07/03/2007
Input Power Level:	Set by SW	Extrapolation:	poly4

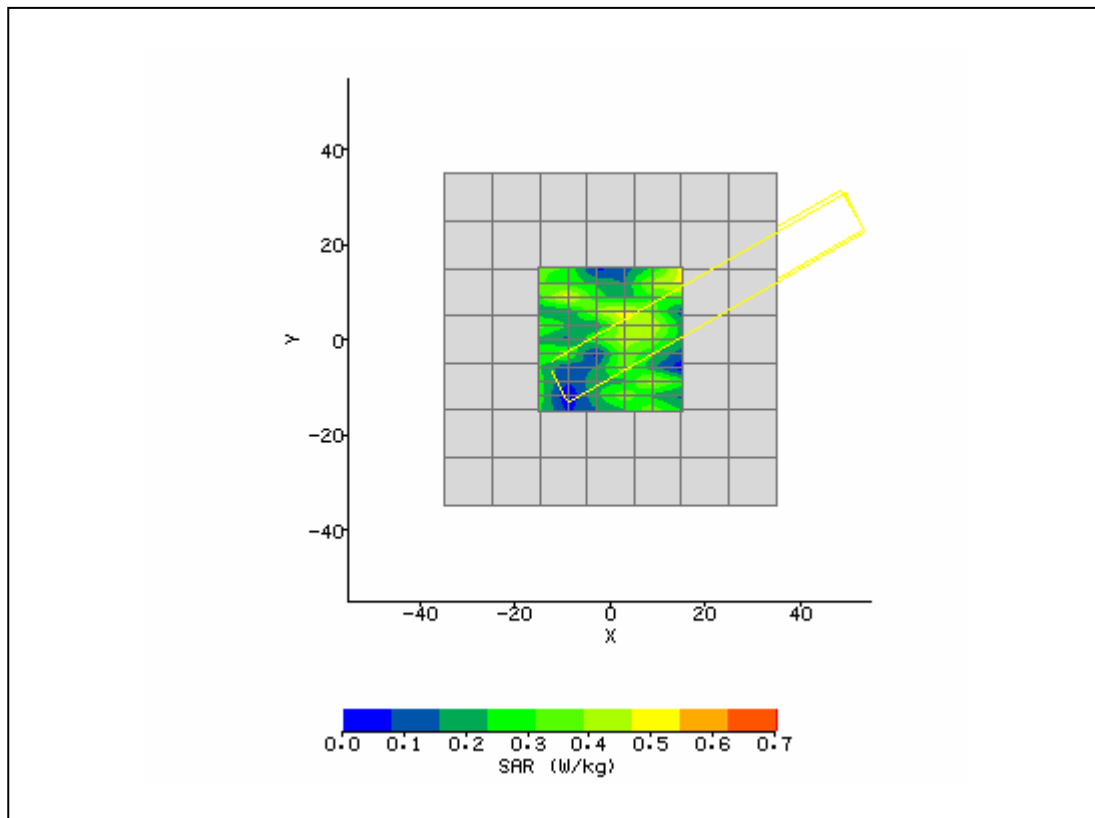


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	7/3/2007 10:07:36 AM	DUT Battery Model/No:	
Filename:	Lap_157_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5800
Device Under Test:	Redstrom	Relative Permittivity:	47.85
Relative Humidity:	30%	Conductivity:	6.066
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-4.20 mm
DUT Position:	Side 0mm	Max SAR Y-axis Location:	3.00 mm
Antenna Configuration:	Integral	Max E Field:	11.79 V/m
Test Frequency:	5785MHz	SAR 1g:	0.781 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.583 / .583 / .583	SAR Start:	0.265 W/kg
Type of Modulation:		SAR End:	0.270 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.00 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	07/03/2007
Input Power Level:	Set by SW	Extrapolation:	poly4

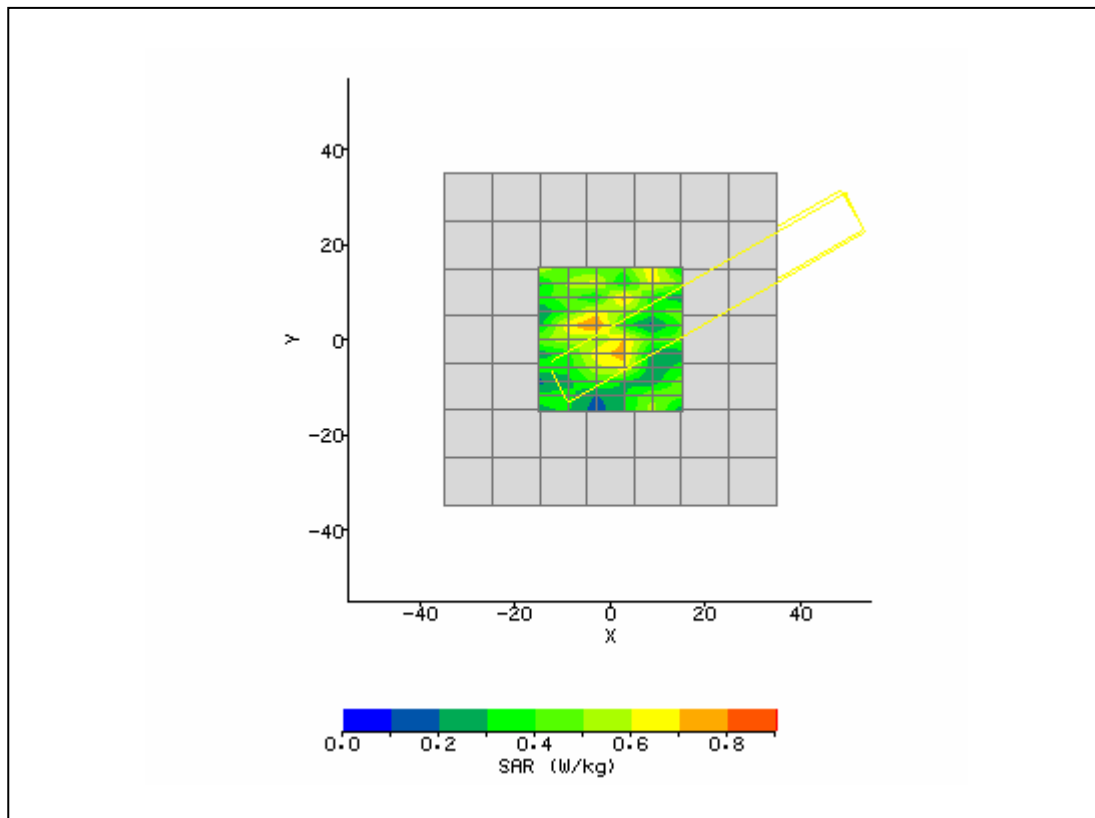


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	7/3/2007 10:27:39 AM	DUT Battery Model/No:	
Filename:	Side_157_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5800
Device Under Test:	Redstrom	Relative Permittivity:	48.21
Relative Humidity:	30%	Conductivity:	5.985
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	6.00 mm
DUT Position:	Side 0mm	Max SAR Y-axis Location:	5.00 mm
Antenna Configuration:	Integral	Max E Field:	10.51 V/m
Test Frequency:	5745MHz	SAR 1g:	0.561 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.583 / .583 / .583	SAR Start:	0.323 W/kg
Type of Modulation:		SAR End:	0.316 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-2.16 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	07/03/2007
Input Power Level:	Set by SW	Extrapolation:	poly4

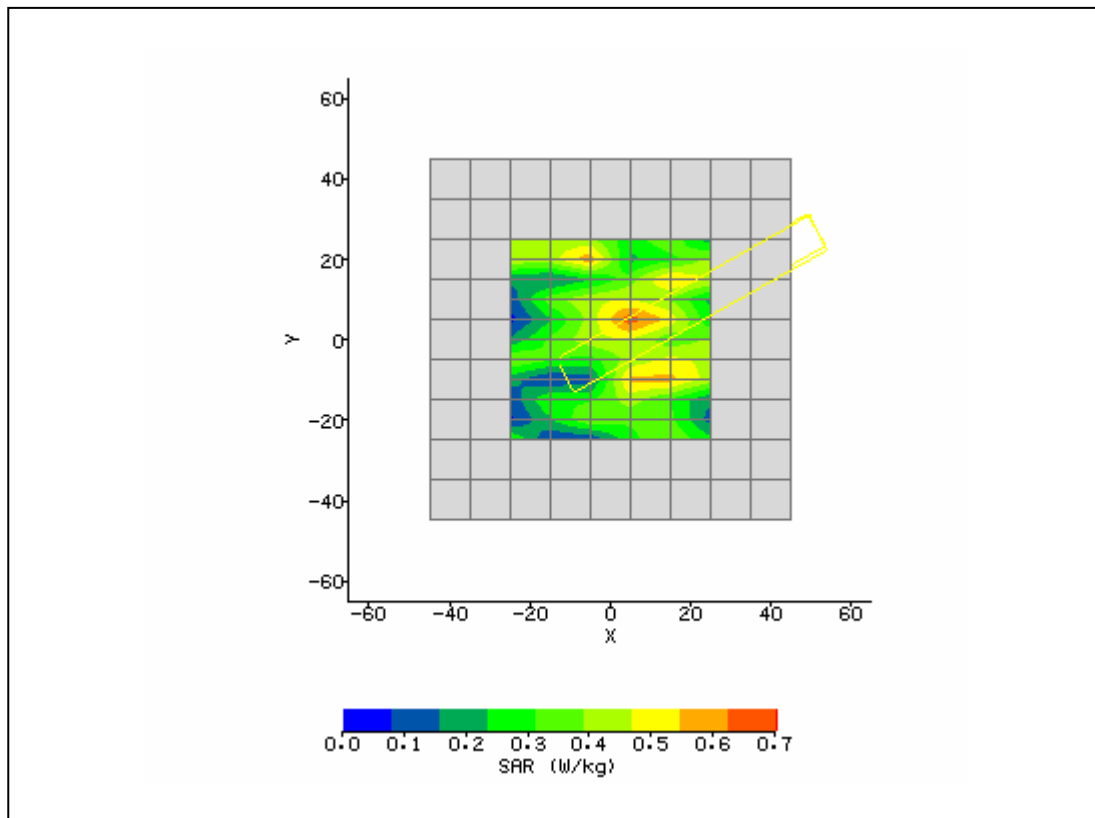


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	7/3/2007 10:46:59 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5800
Device Under Test:	Redstrom	Relative Permittivity:	47.14
Relative Humidity:	30%	Conductivity:	6.112
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	5.00 mm
DUT Position:	Side 0mm	Max SAR Y-axis Location:	-2.50 mm
Antenna Configuration:	Integral	Max E Field:	11.19 V/m
Test Frequency:	5825MHz	SAR 1g:	0.614 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.583 / .583 / .583	SAR Start:	0.233 W/kg
Type of Modulation:		SAR End:	0.242 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.86 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	07/03/2007
Input Power Level:	Set by SW	Extrapolation:	poly4

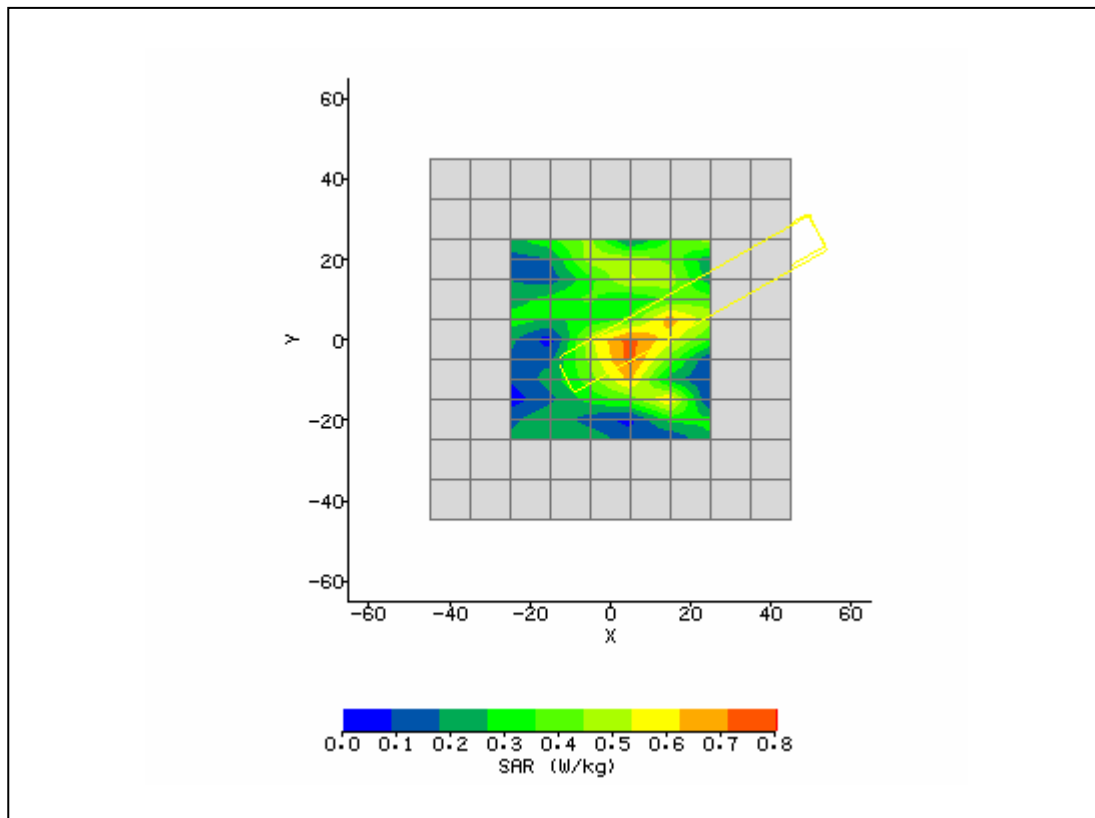


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	7/3/2007 11:20:47 AM	DUT Battery Model/No:	
Filename:	Side_165_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5800
Device Under Test:	Redstorm	Relative Permittivity:	48.01
Relative Humidity:	30%	Conductivity:	6.021
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	1.00 mm
DUT Position:	Lap 0mm	Max SAR Y-axis Location:	21.50 mm
Antenna Configuration:	Integral	Max E Field:	10.11 V/m
Test Frequency:	5755MHz	SAR 1g:	0.496 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.583 / .583 / .583	SAR Start:	0.287 W/kg
Type of Modulation:		SAR End:	0.274 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-4.52 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	07/03/2007
Input Power Level:	Set by SW	Extrapolation:	poly4

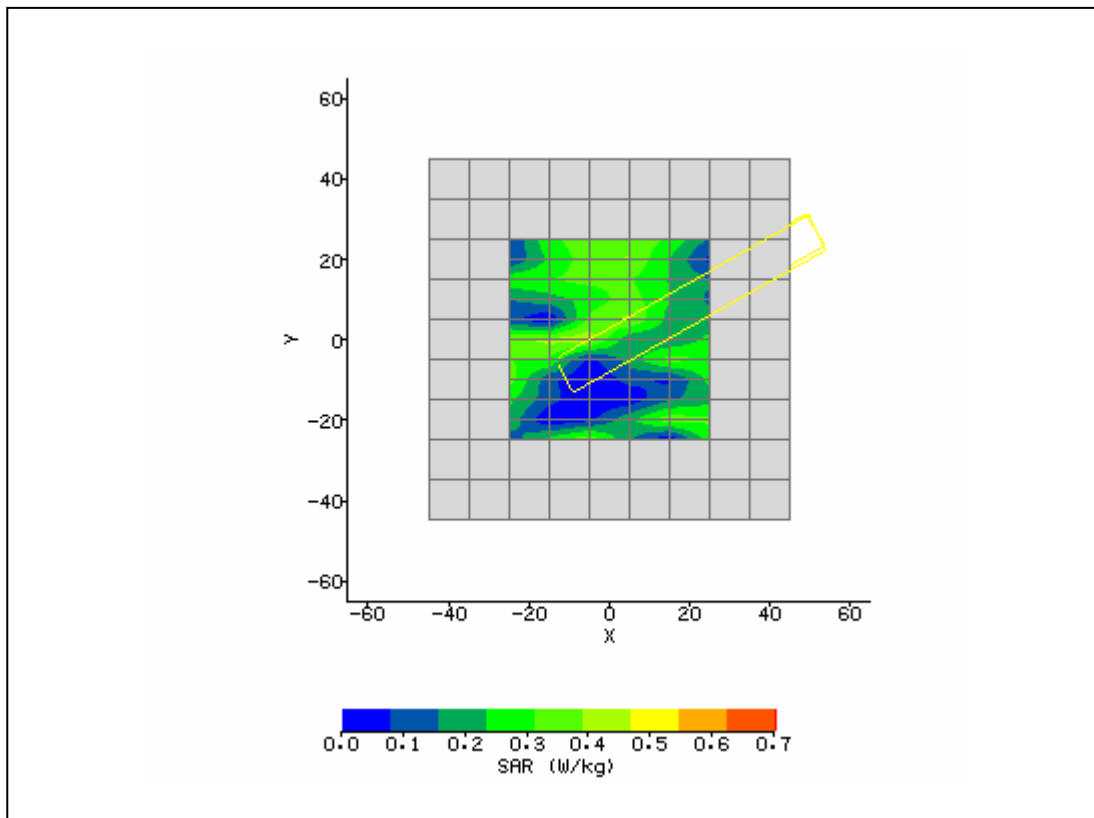

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	7/3/2007 11:34:34 AM	DUT Battery Model/No:	
Filename:	Lap_151_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5800
Device Under Test:	Redstrom	Relative Permittivity:	48.01
Relative Humidity:	30%	Conductivity:	6.021
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	13.00 mm
DUT Position:	Side 0mm	Max SAR Y-axis Location:	25.00 mm
Antenna Configuration:	Integral	Max E Field:	10.20 V/m
Test Frequency:	5755MHz	SAR 1g:	0.526 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.583 / .583 / .583	SAR Start:	0.334 W/kg
Type of Modulation:		SAR End:	0.342 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.39 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	07/03/2007
Input Power Level:	Set by SW	Extrapolation:	poly4

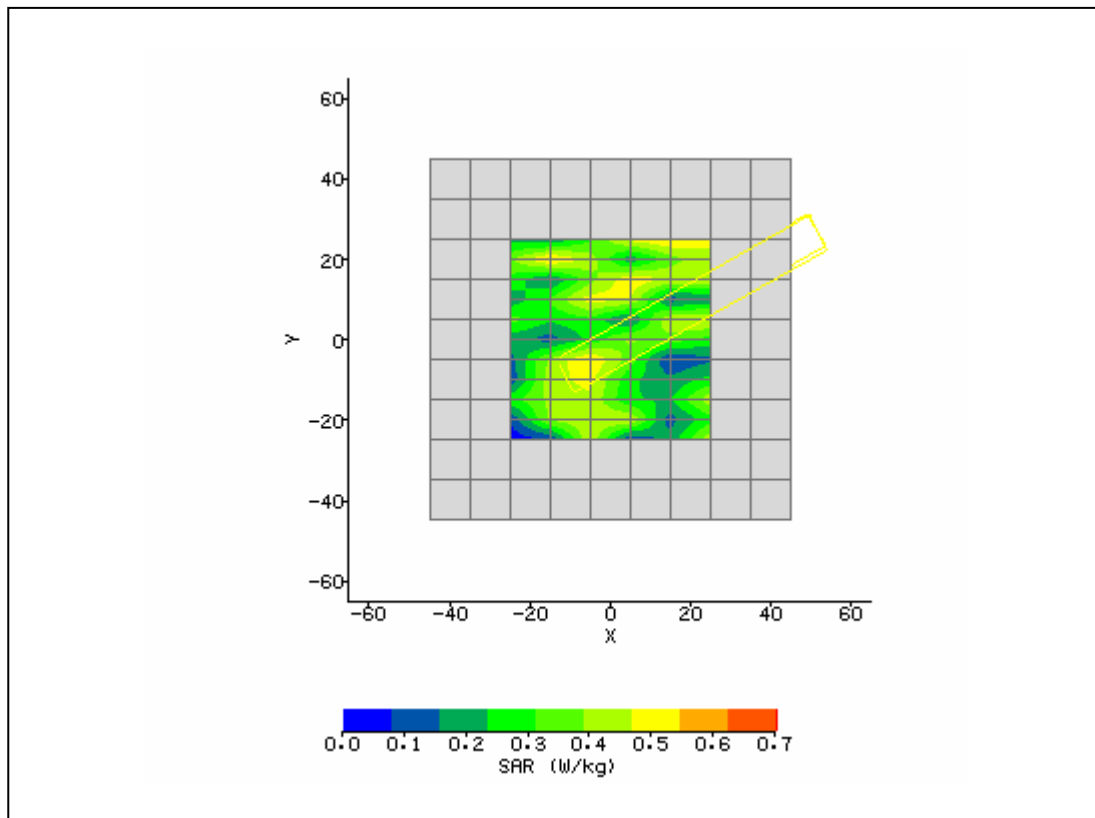

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	7/3/2007 11:49:23 AM	DUT Battery Model/No:	
Filename:	Side_151_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5800
Device Under Test:	Redstrom	Relative Permittivity:	47.63
Relative Humidity:	30%	Conductivity:	6.084
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-13.00 mm
DUT Position:	Lap 0mm	Max SAR Y-axis Location:	25.00 mm
Antenna Configuration:	Integral	Max E Field:	10.06 V/m
Test Frequency:	5795MHz	SAR 1g:	0.578 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.583 / .583 / .583	SAR Start:	0.289 W/kg
Type of Modulation:		SAR End:	0.277 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-4.15 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	07/03/2007
Input Power Level:	Set by SW	Extrapolation:	poly4

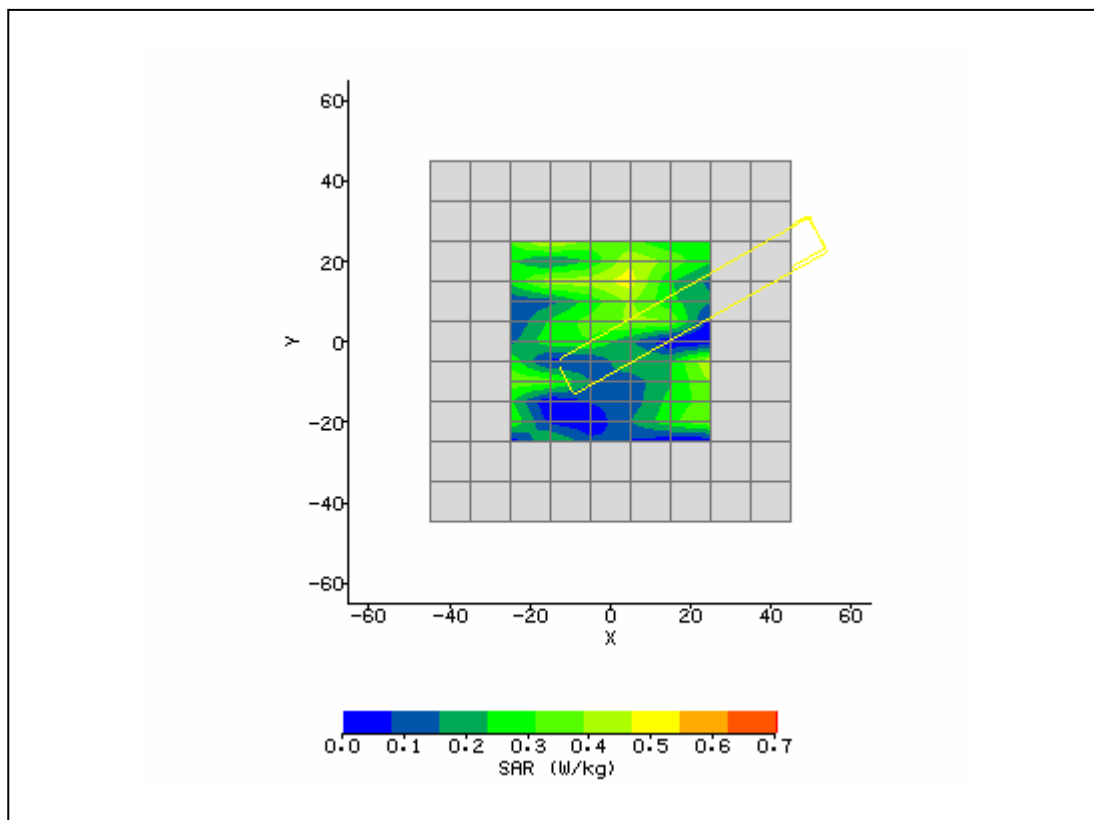

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	7/3/2007 12:06:56 PM	DUT Battery Model/No:	
Filename:	Side_159_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5800
Device Under Test:	Redstorm	Relative Permittivity:	47.63
Relative Humidity:	30%	Conductivity:	6.084
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-21.00 mm
DUT Position:	Side 0mm	Max SAR Y-axis Location:	25.00 mm
Antenna Configuration:	Integral	Max E Field:	10.70 V/m
Test Frequency:	5795MHz	SAR 1g:	0.685 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.583 / .583 / .583	SAR Start:	0.359 W/kg
Type of Modulation:		SAR End:	0.348 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-3.02 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	07/03/2007
Input Power Level:	Set by SW	Extrapolation:	poly4

