




System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/14/2007 12:00:40 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	L0016
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	Bevos	Relative Permittivity:	51.00
Relative Humidity:	30%	Conductivity:	1.915
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	50.00 mm
DUT Position:	Lap 0mm.	Max SAR Y-axis Location:	35.00 mm
Antenna Configuration:	Integral Main	Max E Field:	11.95 V/m
Test Frequency:	2437MHz	SAR 1g:	0.278 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.197 W/kg
Type of Modulation:		SAR End:	0.198 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-1.26 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	06/14/2007
Input Power Level:	Set by test SW	Extrapolation:	poly4

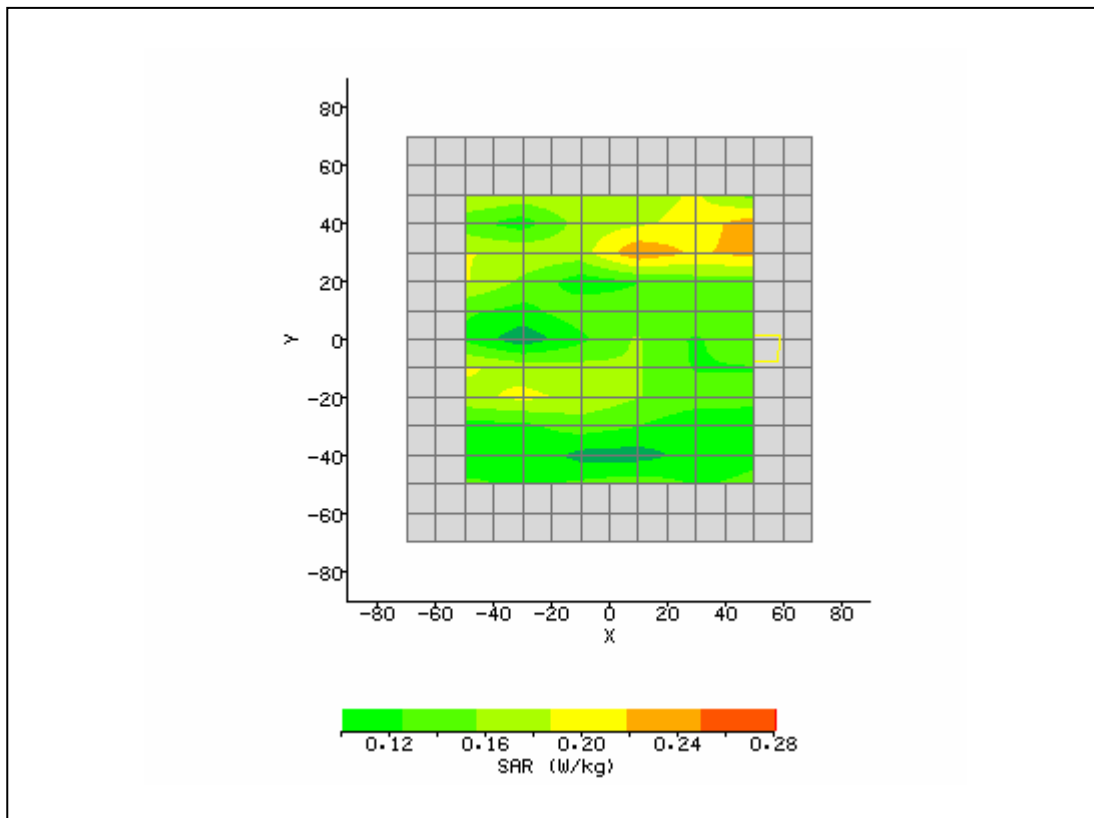


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/14/2007 4:06:08 PM	DUT Battery Model/No:	
Filename:	Lap_Aux_6_3d.txt	Probe Serial Number:	L0016
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	Bevos	Relative Permittivity:	51.00
Relative Humidity:	30%	Conductivity:	1.915
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	50.00 mm
DUT Position:	Lap 0mm.	Max SAR Y-axis Location:	33.00 mm
Antenna Configuration:	Integral- Aux	Max E Field:	9.90 V/m
Test Frequency:	2437MHz	SAR 1g:	0.259 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.070 W/kg
Type of Modulation:		SAR End:	0.073 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.62 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	06/14/2007
Input Power Level:	Set by test SW	Extrapolation:	poly4

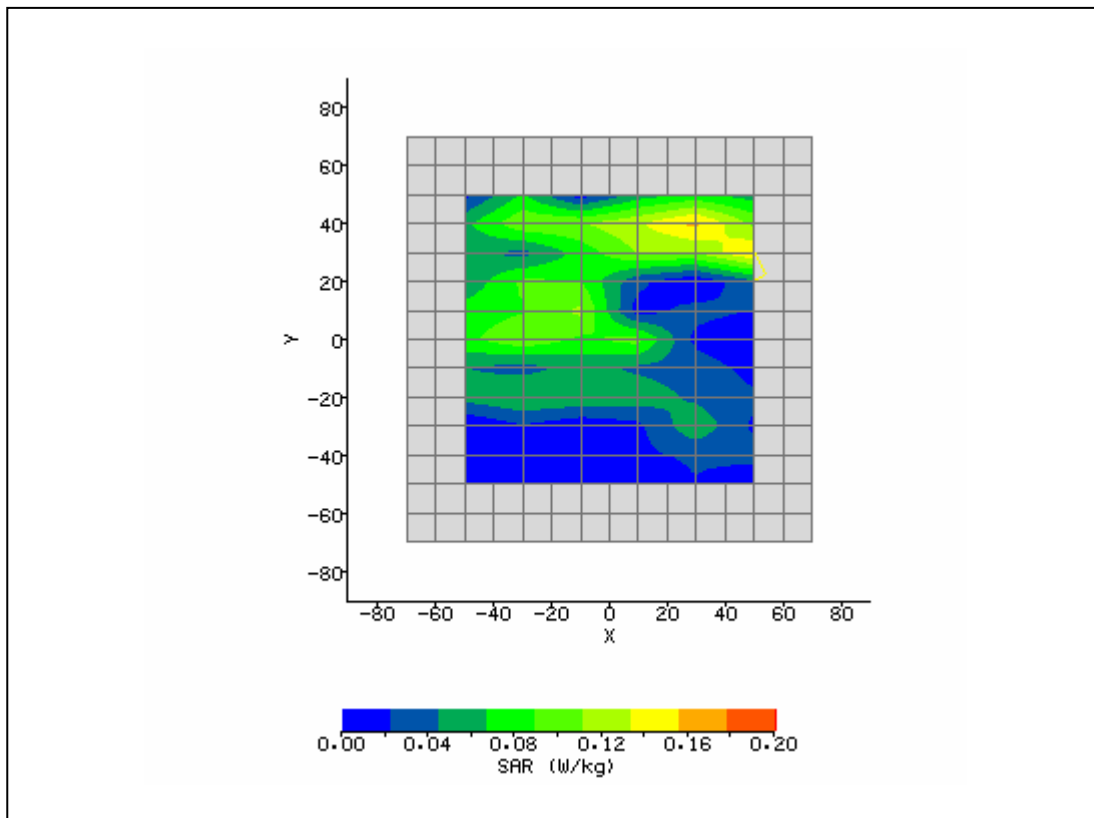


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/14/2007 1:56:01 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	L0016
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	Bevos	Relative Permittivity:	51.00
Relative Humidity:	30%	Conductivity:	1.915
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	50.00 mm
DUT Position:	Right 0mm.	Max SAR Y-axis Location:	50.00 mm
Antenna Configuration:	Integral - Main	Max E Field:	10.59 V/m
Test Frequency:	2437MHz	SAR 1g:	0.121 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.088 W/kg
Type of Modulation:		SAR End:	0.089 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.01 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	06/14/2007
Input Power Level:	Set by test SW	Extrapolation:	poly4

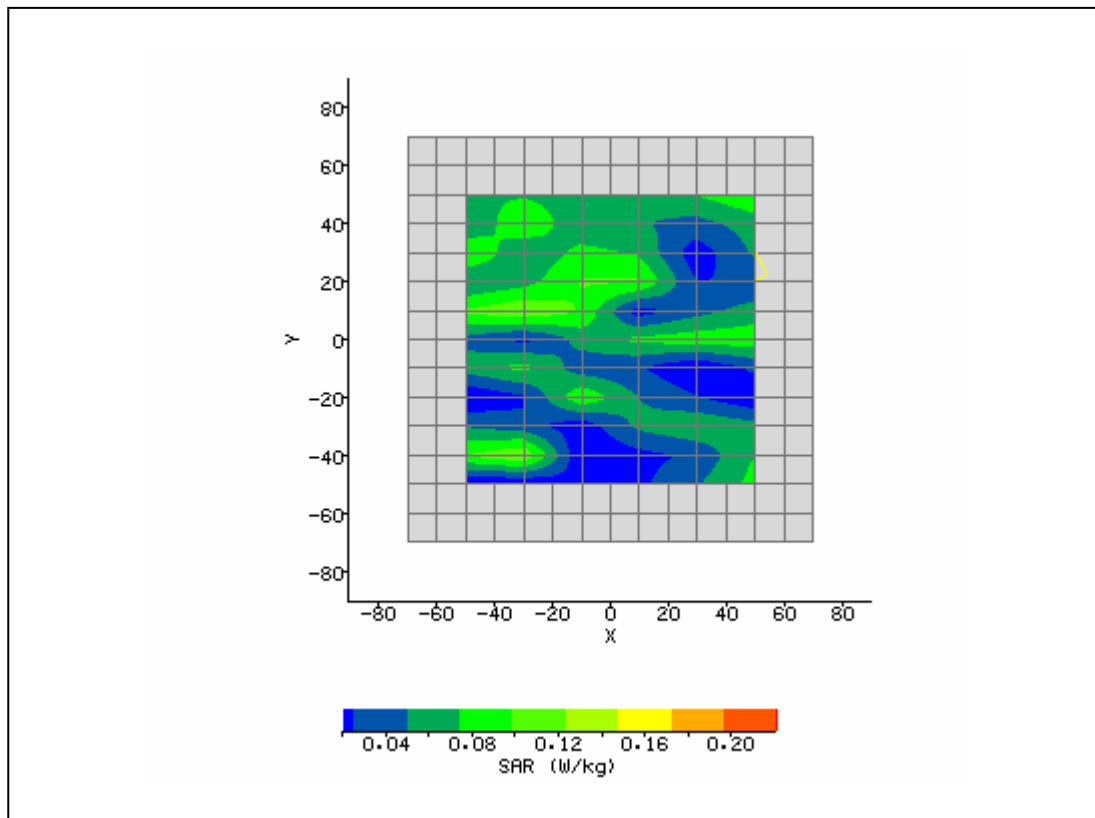


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/14/2007 2:26:22 PM	DUT Battery Model/No:	
Filename:	Lap_Main_1.txt	Probe Serial Number:	L0016
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	Redstorm	Relative Permittivity:	50.89
Relative Humidity:	30%	Conductivity:	1.916
Phantom S/No:	HeadBox2.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	30.00 mm
DUT Position:	Side 0mm	Max SAR Y-axis Location:	30.00 mm
Antenna Configuration:	Integral Main	Max E Field:	8.97 V/m
Test Frequency:	2412MHz	SAR 1g:	0.165 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.489 / .489 / .489	SAR Start:	0.103 W/kg
Type of Modulation:		SAR End:	0.105 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.94 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	06/14/2007
Input Power Level:	max	Extrapolation:	poly4

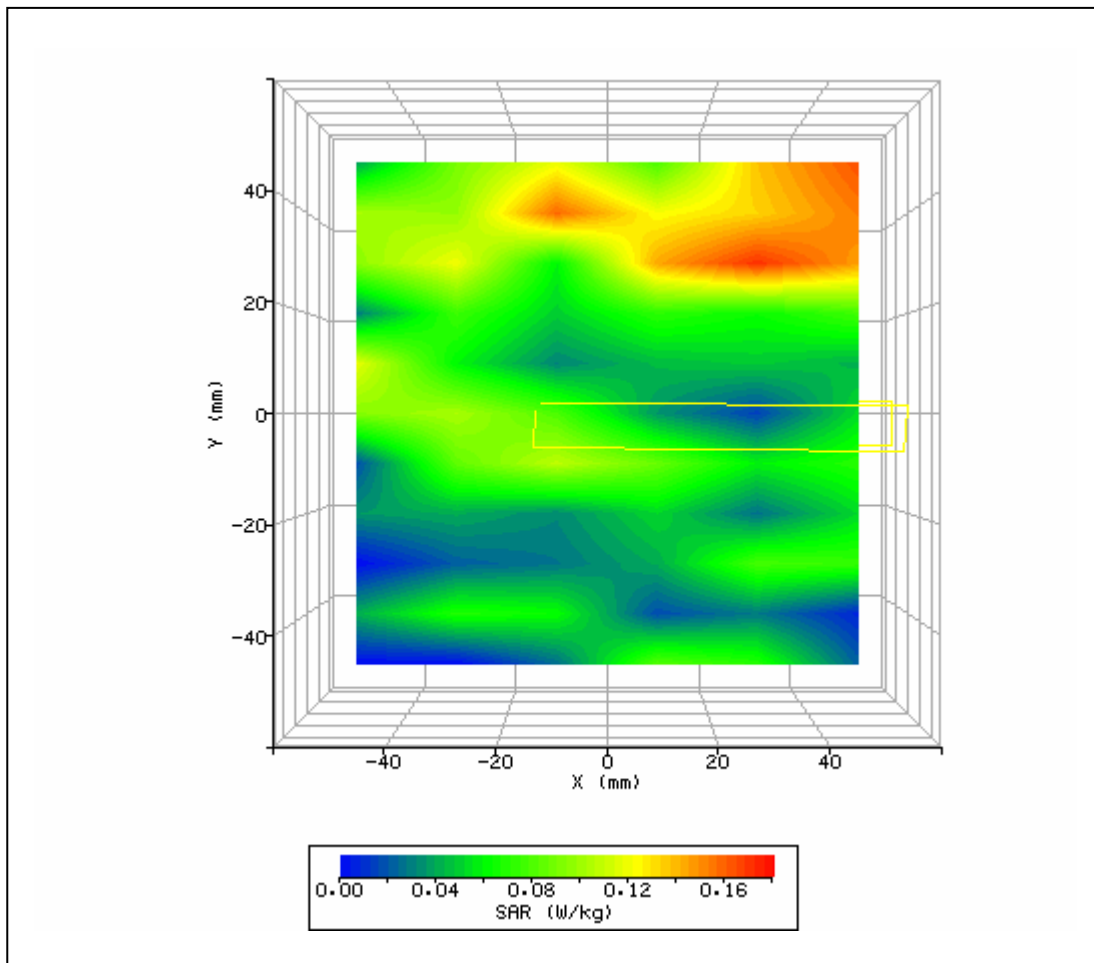


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/14/2007 3:33:29 PM	DUT Battery Model/No:	
Filename:	Lap_Main_11_3d.txt	Probe Serial Number:	L0016
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	Bevos	Relative Permittivity:	51.07
Relative Humidity:	30%	Conductivity:	1.923
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	50.00 mm
DUT Position:	Lap 0mm.	Max SAR Y-axis Location:	50.00 mm
Antenna Configuration:	Integral Main	Max E Field:	9.99 V/m
Test Frequency:	2462MHz	SAR 1g:	0.195 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.462 / .462 / .462	SAR Start:	0.095 W/kg
Type of Modulation:		SAR End:	0.098 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.16 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	06/14/2007
Input Power Level:	Set by test SW	Extrapolation:	poly4

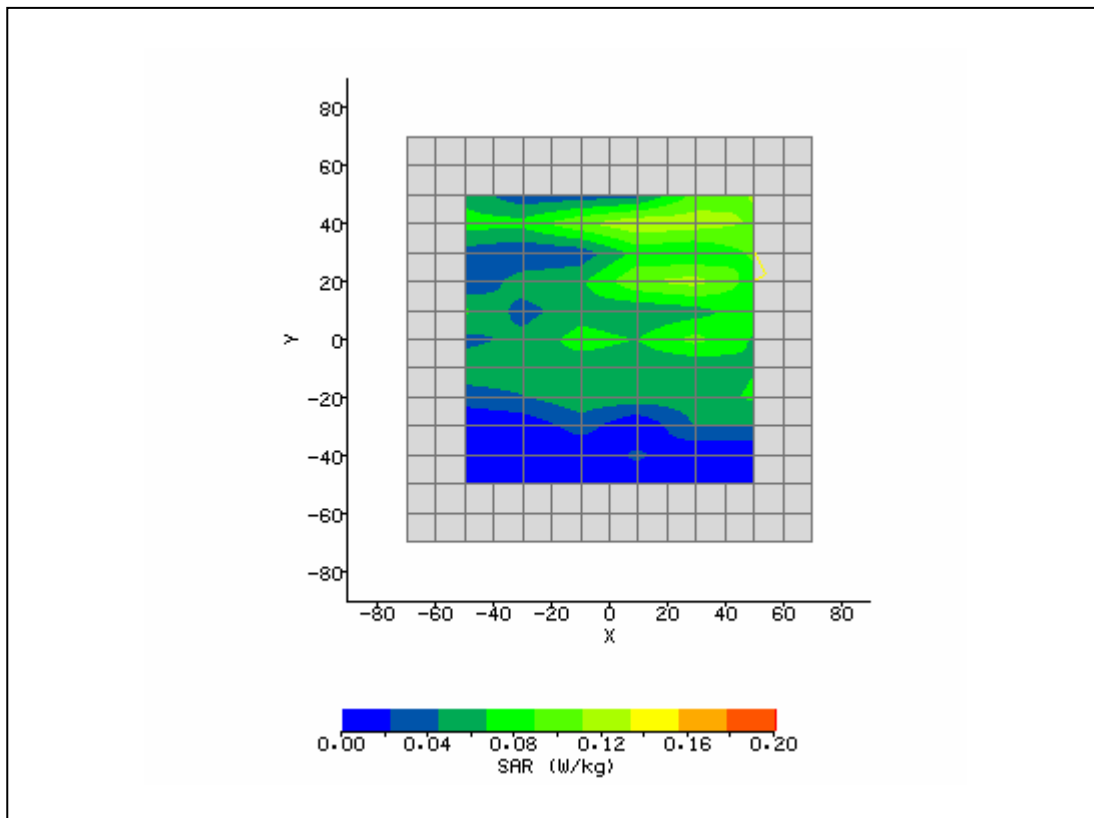


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/14/2007 3:14:19 PM	DUT Battery Model/No:	
Filename:	SideAux6_3d.txt	Probe Serial Number:	L0016
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	Bevos	Relative Permittivity:	51.01
Relative Humidity:	30%	Conductivity:	1.915
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	30.00 mm
DUT Position:	Side 0 mm.	Max SAR Y-axis Location:	-11.00 mm
Antenna Configuration:	Integral - Aux.	Max E Field:	7.24 V/m
Test Frequency:	2437MHz	SAR 1g:	0.128 W/kg
Air Factors:	488 / 373 / 340	SAR 10g:	
Conversion Factors:	.692 / .692 / .692	SAR Start:	0.011 W/kg
Type of Modulation:		SAR End:	0.011 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.44 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	06/14/07
Input Power Level:	max	Extrapolation:	poly4

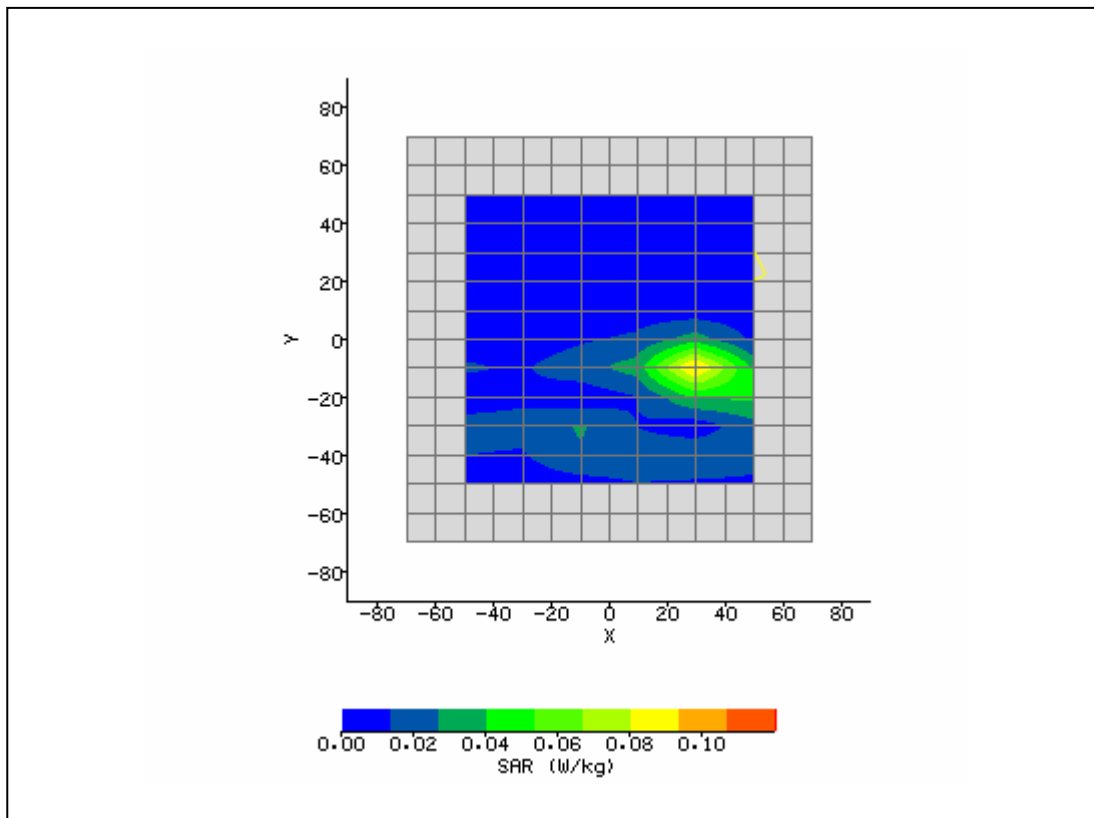


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/14/2007 4:52:23 PM	DUT Battery Model/No:	
Filename:	Lap_1_3d.txt	Probe Serial Number:	L0016
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	Redstorm	Relative Permittivity:	50.89
Relative Humidity:	30%	Conductivity:	1.909
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-50.00 mm
DUT Position:	Lap 0mm.	Max SAR Y-axis Location:	50.00 mm
Antenna Configuration:	Integral	Max E Field:	9.07 V/m
Test Frequency:	2412MHz	SAR 1g:	0.282 W/kg
Air Factors:	488 / 373 / 340	SAR 10g:	
Conversion Factors:	.692 / .692 / .692	SAR Start:	0.176 W/kg
Type of Modulation:		SAR End:	0.180 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.27 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	06/14/2007
Input Power Level:	Set by test SW	Extrapolation:	poly4

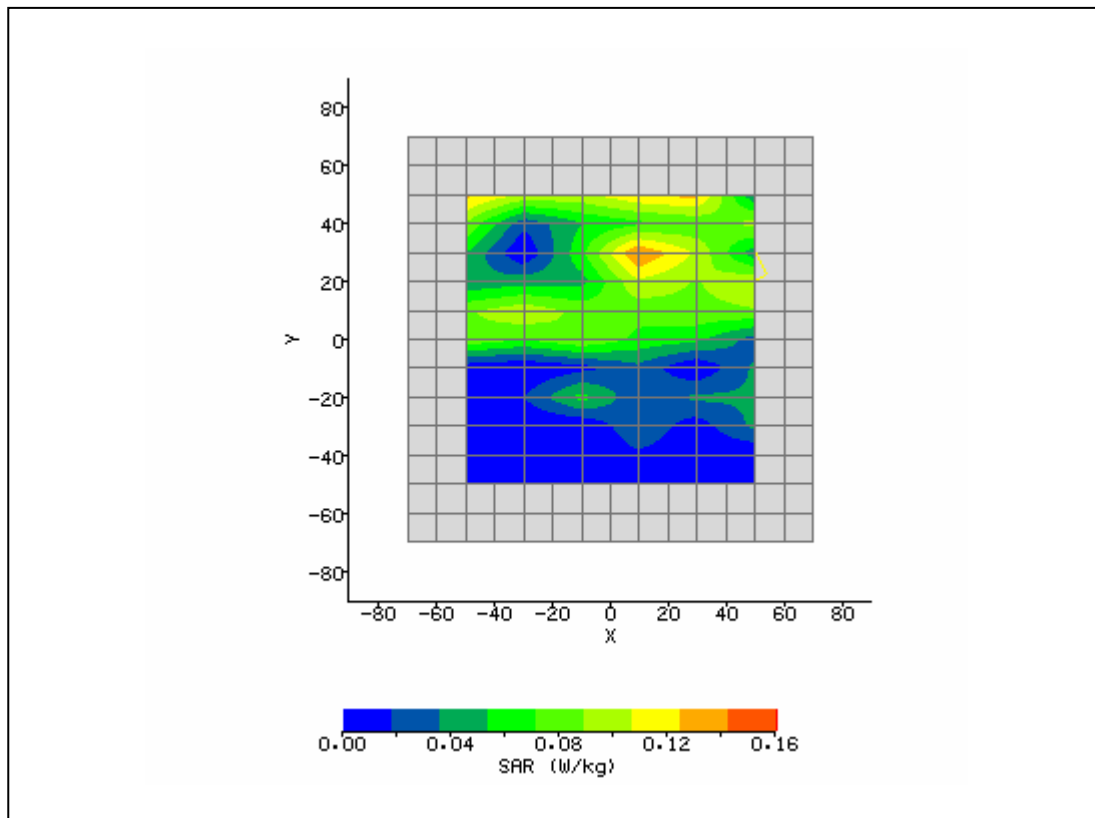


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/14/2007 3:53:56 PM	DUT Battery Model/No:	
Filename:	LApAux1_3d.txt	Probe Serial Number:	L0016
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	Bevos	Relative Permittivity:	51.09
Relative Humidity:	30%	Conductivity:	1.923
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	4.00 mm
DUT Position:	Lap 0 mm.	Max SAR Y-axis Location:	-16.00 mm
Antenna Configuration:	Integral - Aux.	Max E Field:	16.38 V/m
Test Frequency:	2462MHz	SAR 1g:	0.323 W/kg
Air Factors:	488 / 373 / 340	SAR 10g:	
Conversion Factors:	.692 / .692 / .692	SAR Start:	0.037 W/kg
Type of Modulation:		SAR End:	0.039 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	4.97 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	06/14/07
Input Power Level:	max	Extrapolation:	poly4

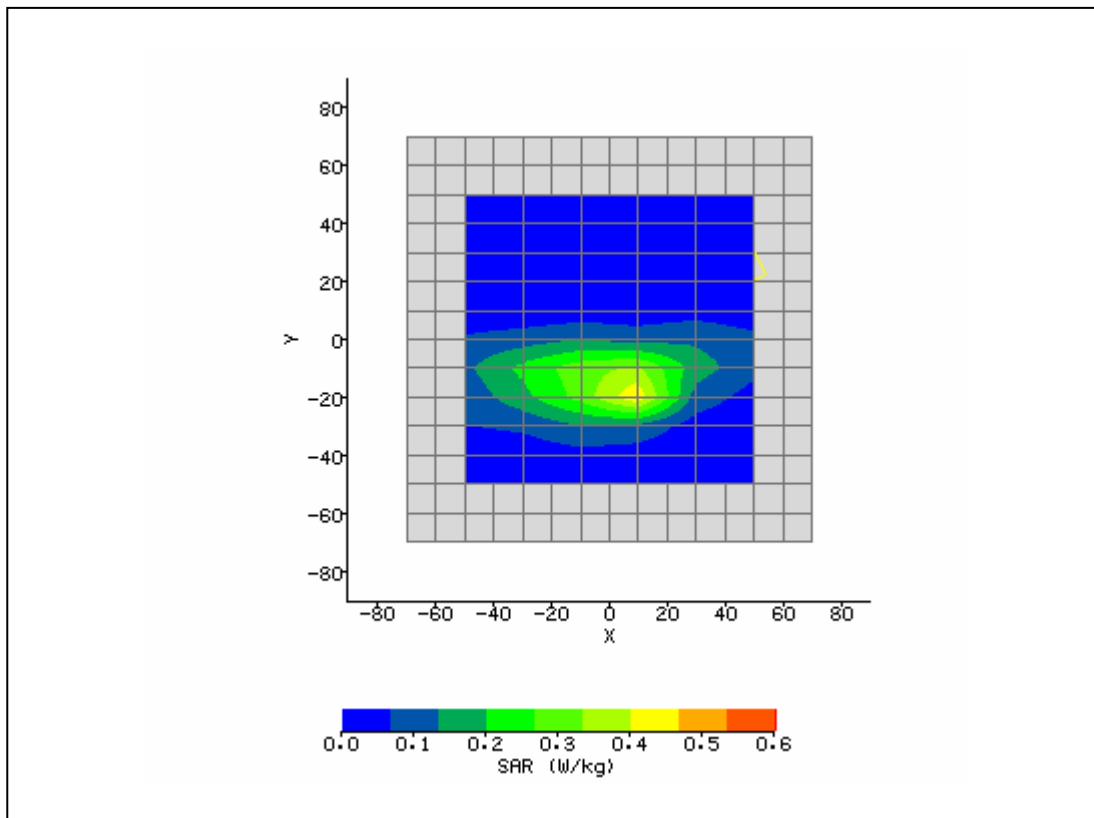


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/22/2007 10:37:29 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5200
Device Under Test:	HP Optimator - Bevos	Relative Permittivity:	47.93
Relative Humidity:	30%	Conductivity:	5.178
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR X-axis Location:	24.00 mm
DUT Position:	Lap 0mm.	Max SAR Y-axis Location:	50.00 mm
Antenna Configuration:	Integral	Max E Field:	6.32 V/m
Test Frequency:	5320MHz	SAR 1g:	0.164 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.494 / .494 / .494	SAR Start:	0.160 W/kg
Type of Modulation:		SAR End:	0.167 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.96 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	06/22/07
Input Power Level:	max	Extrapolation:	poly4

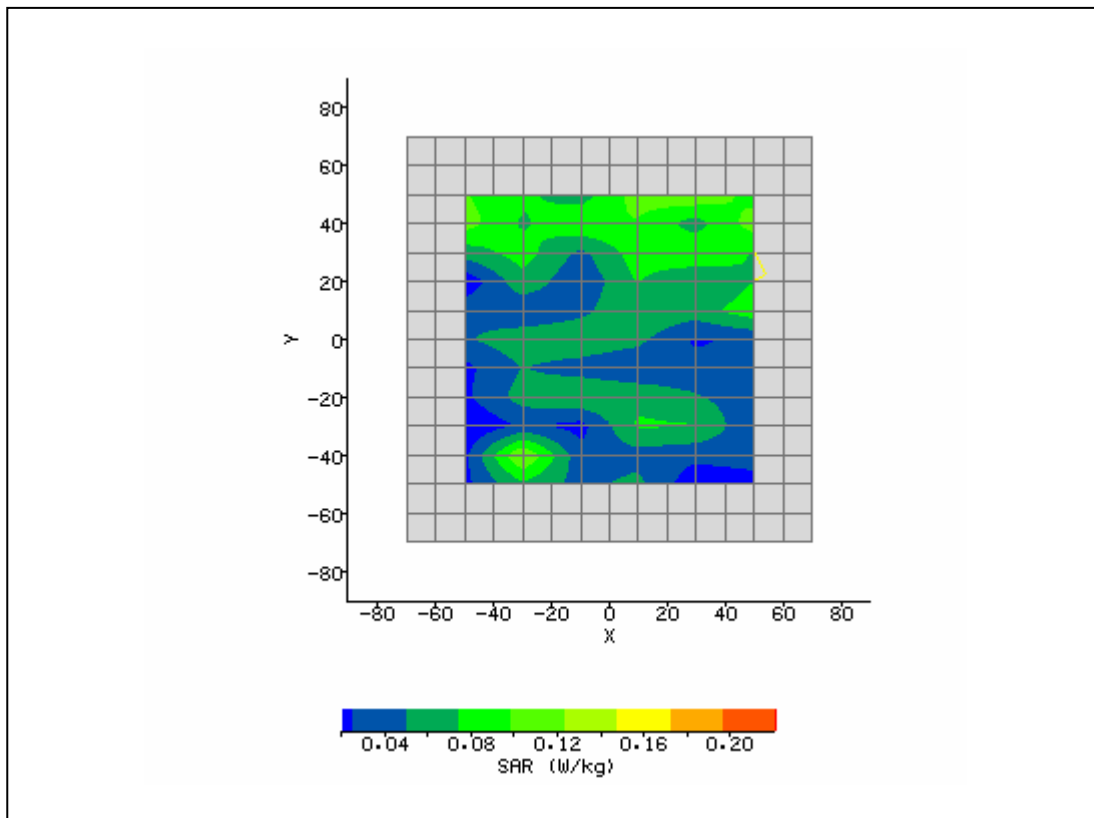


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/22/2007 10:57:44 AM	DUT Battery Model/No:	
Filename:	LapMain64_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5200
Device Under Test:	HP Optimator - Bevos	Relative Permittivity:	47.93
Relative Humidity:	30%	Conductivity:	5.178
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR X-axis Location:	50.00 mm
DUT Position:	Right side 0mm.	Max SAR Y-axis Location:	8.00 mm
Antenna Configuration:	Integral	Max E Field:	5.74 V/m
Test Frequency:	5320MHz	SAR 1g:	0.116 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.494 / .494 / .494	SAR Start:	0.093 W/kg
Type of Modulation:		SAR End:	0.089 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-4.30 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	06/22/07
Input Power Level:	max	Extrapolation:	poly4

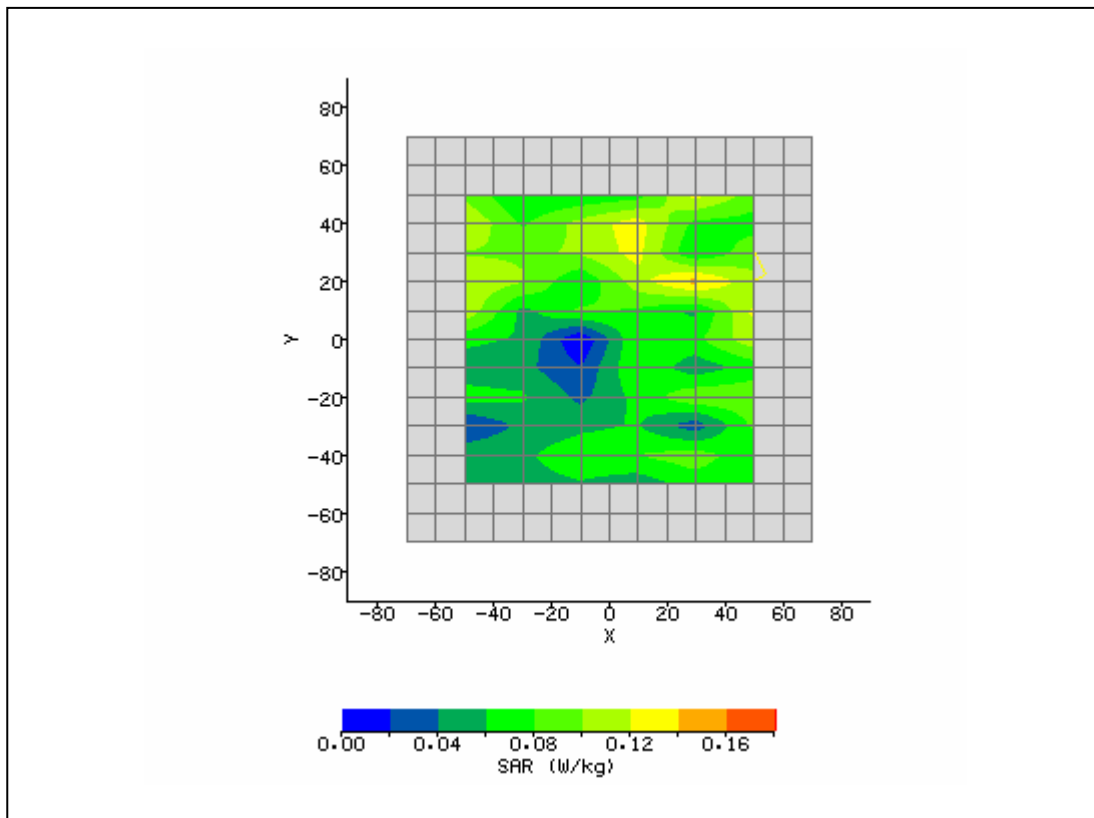


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/22/2007 11:24:30 AM	DUT Battery Model/No:	
Filename:	RightAux64_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5200
Device Under Test:	HP Optimator - Bevos	Relative Permittivity:	47.96
Relative Humidity:	30%	Conductivity:	5.178
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR X-axis Location:	32.00 mm
DUT Position:	Lap 0mm.	Max SAR Y-axis Location:	50.00 mm
Antenna Configuration:	Integral-Aux.	Max E Field:	6.61 V/m
Test Frequency:	5320MHz	SAR 1g:	0.155 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.494 / .494 / .494	SAR Start:	0.148 W/kg
Type of Modulation:		SAR End:	0.153 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.51 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	06/22/07
Input Power Level:	max	Extrapolation:	poly4

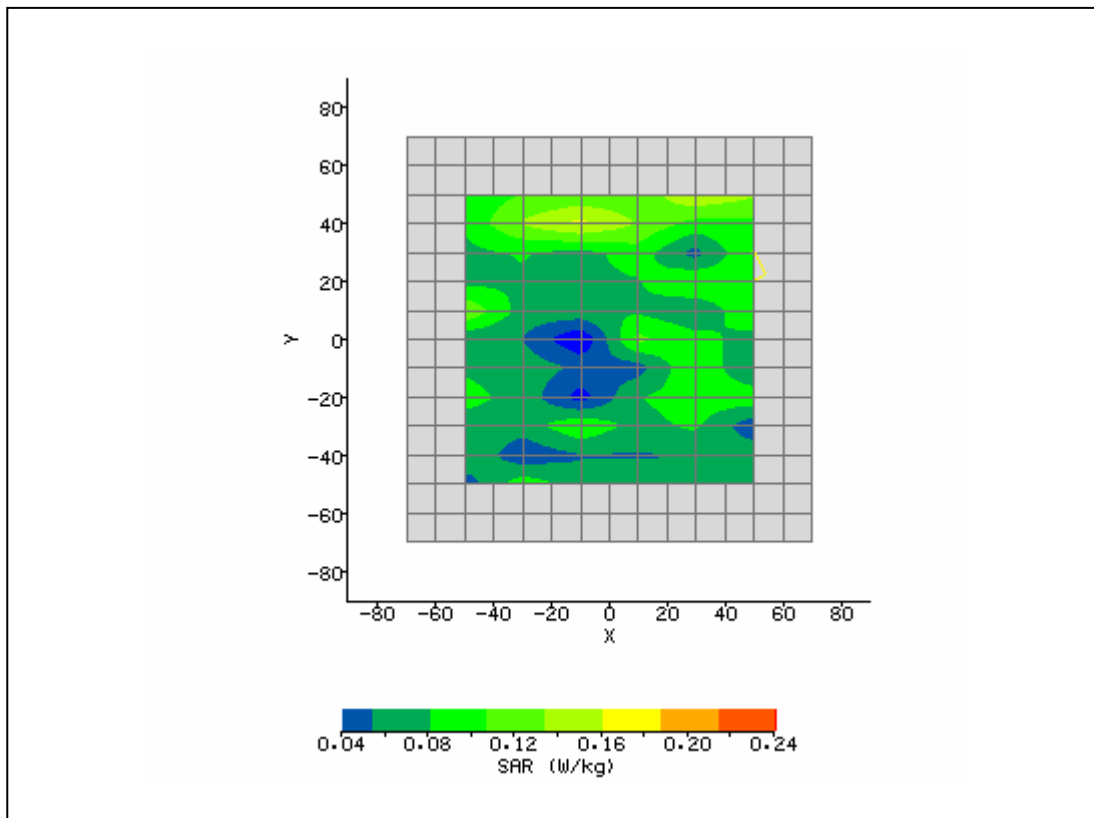


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/22/2007 12:24:51 PM	DUT Battery Model/No:	
Filename:	LapAux64_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5200
Device Under Test:	HP Optimator - Bevos	Relative Permittivity:	48.21
Relative Humidity:	30%	Conductivity:	5.221
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR X-axis Location:	-50.00 mm
DUT Position:	lap side 0mm.	Max SAR Y-axis Location:	30.00 mm
Antenna Configuration:	Integral-Main.	Max E Field:	5.42 V/m
Test Frequency:	5180MHz	SAR 1g:	0.112 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.494 / .494 / .494	SAR Start:	0.102 W/kg
Type of Modulation:		SAR End:	0.104 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.98 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	06/22/07
Input Power Level:	max	Extrapolation:	poly4

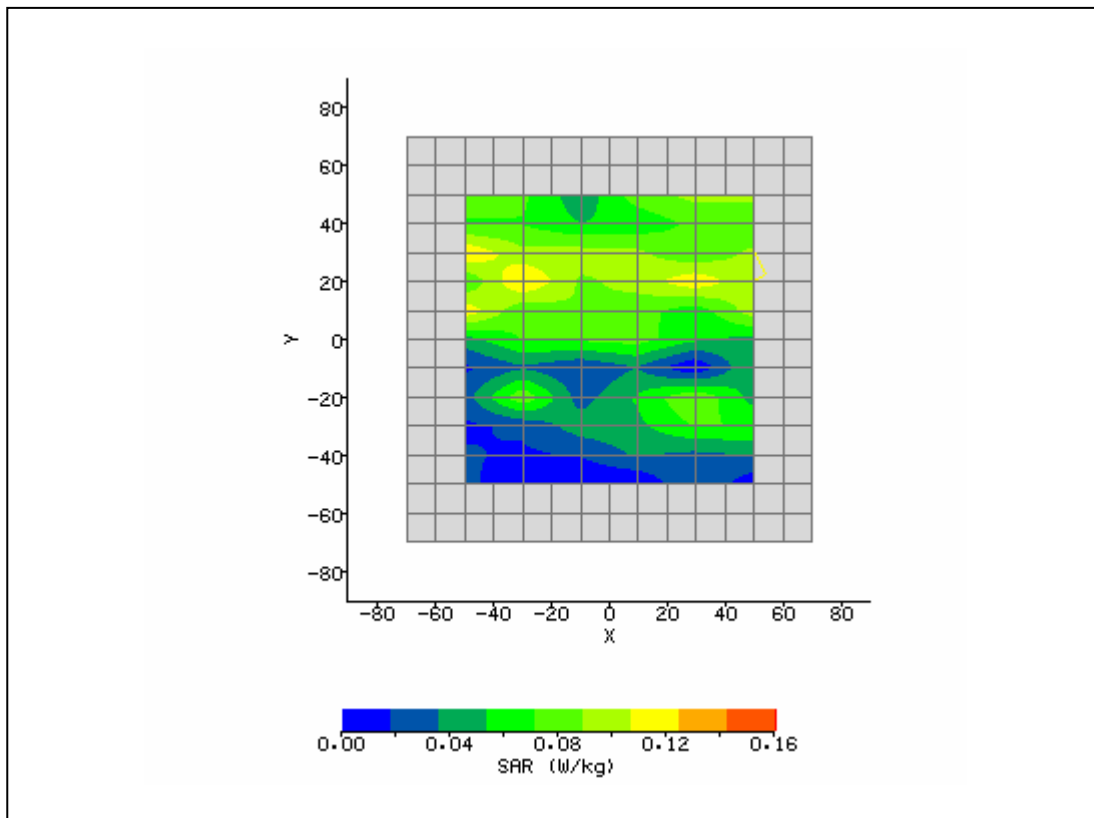


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/22/2007 12:42:50 PM	DUT Battery Model/No:	
Filename:	LapMain36_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5200
Device Under Test:	HP Optimator - Bevos	Relative Permittivity:	48.07
Relative Humidity:	30%	Conductivity:	5.209
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR X-axis Location:	50.00 mm
DUT Position:	Lap 0mm.	Max SAR Y-axis Location:	42.00 mm
Antenna Configuration:	Integral-Main.	Max E Field:	8.22 V/m
Test Frequency:	5260MHz	SAR 1g:	0.241 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.494 / .494 / .494	SAR Start:	0.221 W/kg
Type of Modulation:		SAR End:	0.220 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-3.21 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	06/22/07
Input Power Level:	max	Extrapolation:	poly4

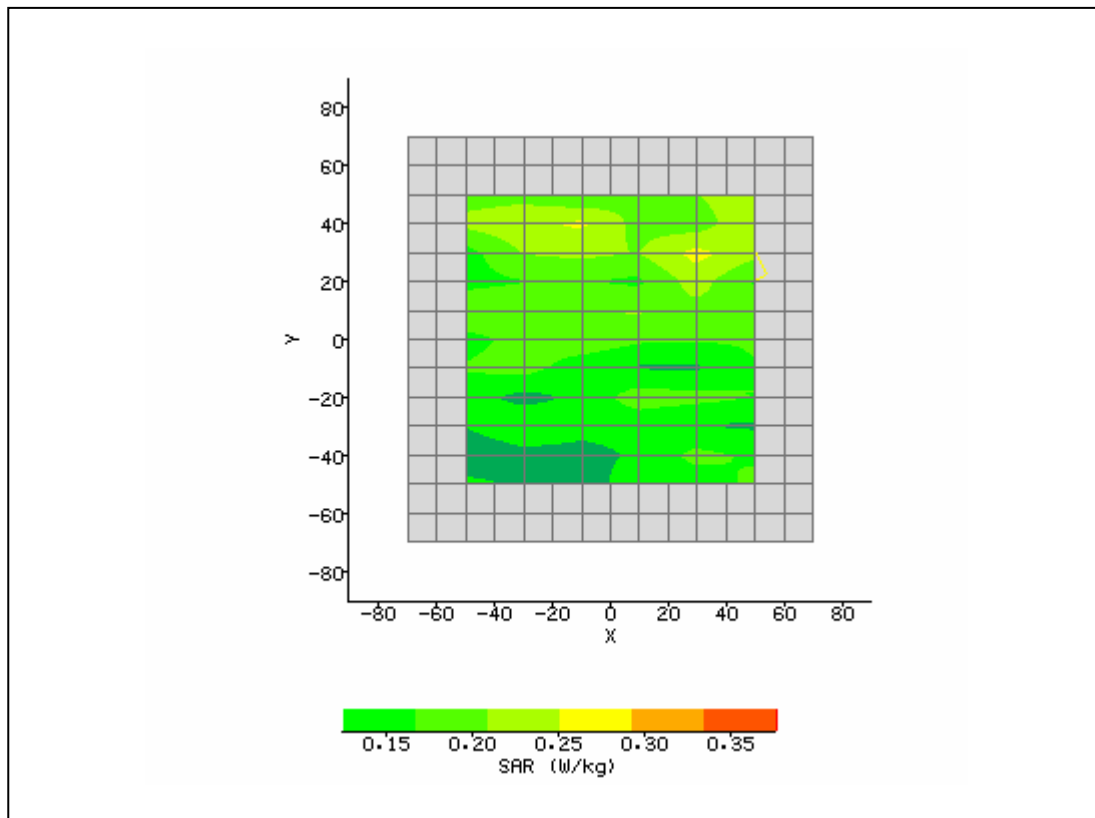


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/22/2007 1:34:18 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5800
Device Under Test:	HP Optimator - Bevos	Relative Permittivity:	48.19
Relative Humidity:	30%	Conductivity:	5.988
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR X-axis Location:	28.00 mm
DUT Position:	Lap 0mm.	Max SAR Y-axis Location:	50.00 mm
Antenna Configuration:	Integral-Main.	Max E Field:	6.29 V/m
Test Frequency:	5745MHz	SAR 1g:	0.141 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.583 / .583 / .583	SAR Start:	0.143 W/kg
Type of Modulation:		SAR End:	0.142 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-1.79 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	06/22/07
Input Power Level:	max	Extrapolation:	poly4

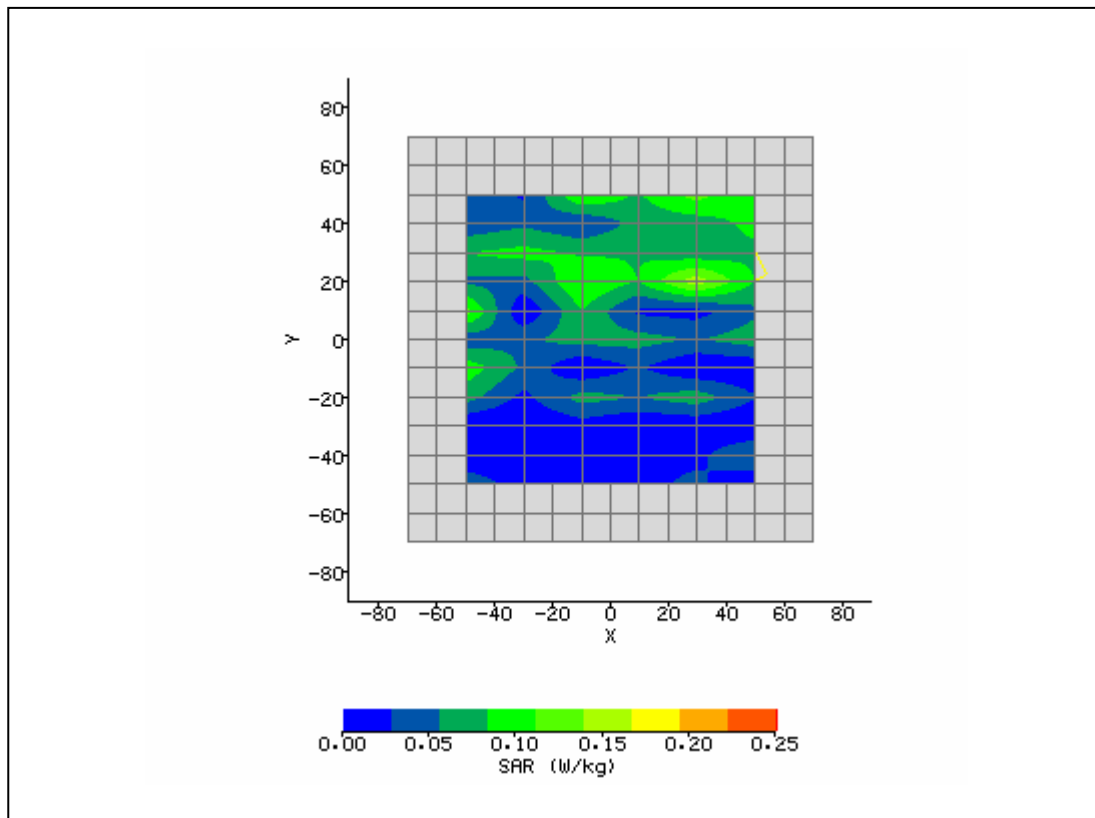


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/22/2007 2:02:30 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5800
Device Under Test:	HP Optimator - Bevos	Relative Permittivity:	48.19
Relative Humidity:	30%	Conductivity:	5.988
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR X-axis Location:	24.00 mm
DUT Position:	Right side 0mm.	Max SAR Y-axis Location:	-33.00 mm
Antenna Configuration:	Integral-Main.	Max E Field:	5.10 V/m
Test Frequency:	5745MHz	SAR 1g:	0.178 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.583 / .583 / .583	SAR Start:	0.017 W/kg
Type of Modulation:		SAR End:	0.017 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.99 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	06/22/07
Input Power Level:	max	Extrapolation:	poly4

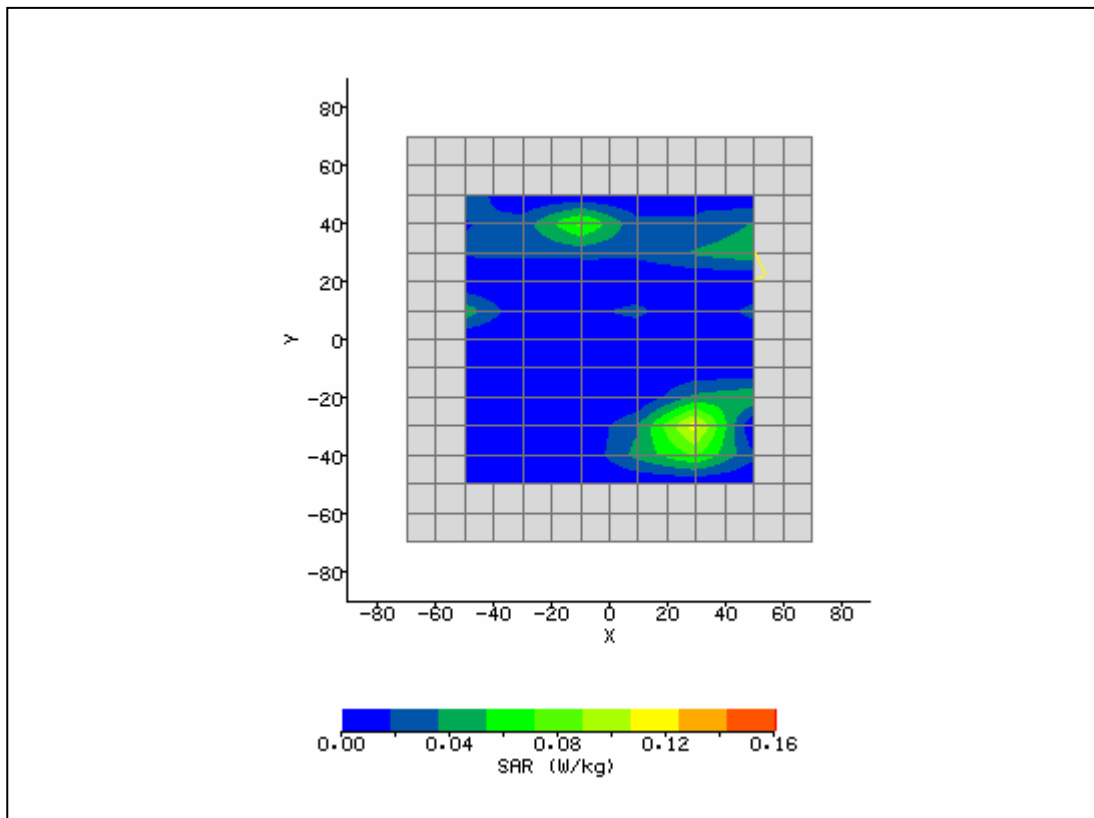


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/22/2007 3:09:43 PM	DUT Battery Model/No:	
Filename:	LapAux165_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5800
Device Under Test:	HP Optimator - Bevos	Relative Permittivity:	47.81
Relative Humidity:	30%	Conductivity:	6.062
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR X-axis Location:	-50.00 mm
DUT Position:	Right side 0mm.	Max SAR Y-axis Location:	50.00 mm
Antenna Configuration:	Integral-Main.	Max E Field:	6.13 V/m
Test Frequency:	5805MHz	SAR 1g:	0.105 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.583 / .583 / .583	SAR Start:	0.073 W/kg
Type of Modulation:		SAR End:	0.075 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.73 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	06/22/07
Input Power Level:	max	Extrapolation:	poly4

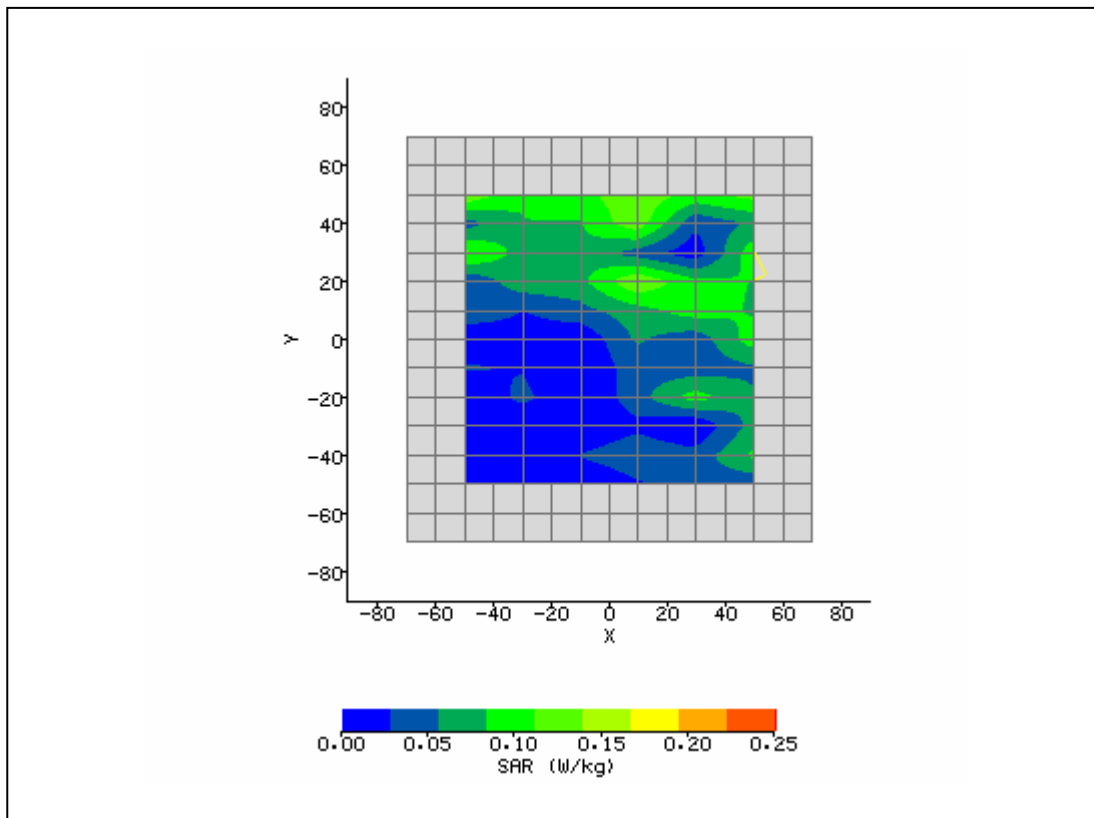

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/22/2007 3:28:13 PM	DUT Battery Model/No:	
Filename:	RightMain165_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5800
Device Under Test:	HP Optimator - Bevos	Relative Permittivity:	47.12
Relative Humidity:	30%	Conductivity:	6.062
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR X-axis Location:	-22.00 mm
DUT Position:	Right side 0mm.	Max SAR Y-axis Location:	50.00 mm
Antenna Configuration:	Integral-Main.	Max E Field:	6.38 V/m
Test Frequency:	5825MHz	SAR 1g:	0.199 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.583 / .583 / .583	SAR Start:	0.150 W/kg
Type of Modulation:		SAR End:	0.154 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.67 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	06/22/07
Input Power Level:	max	Extrapolation:	poly4

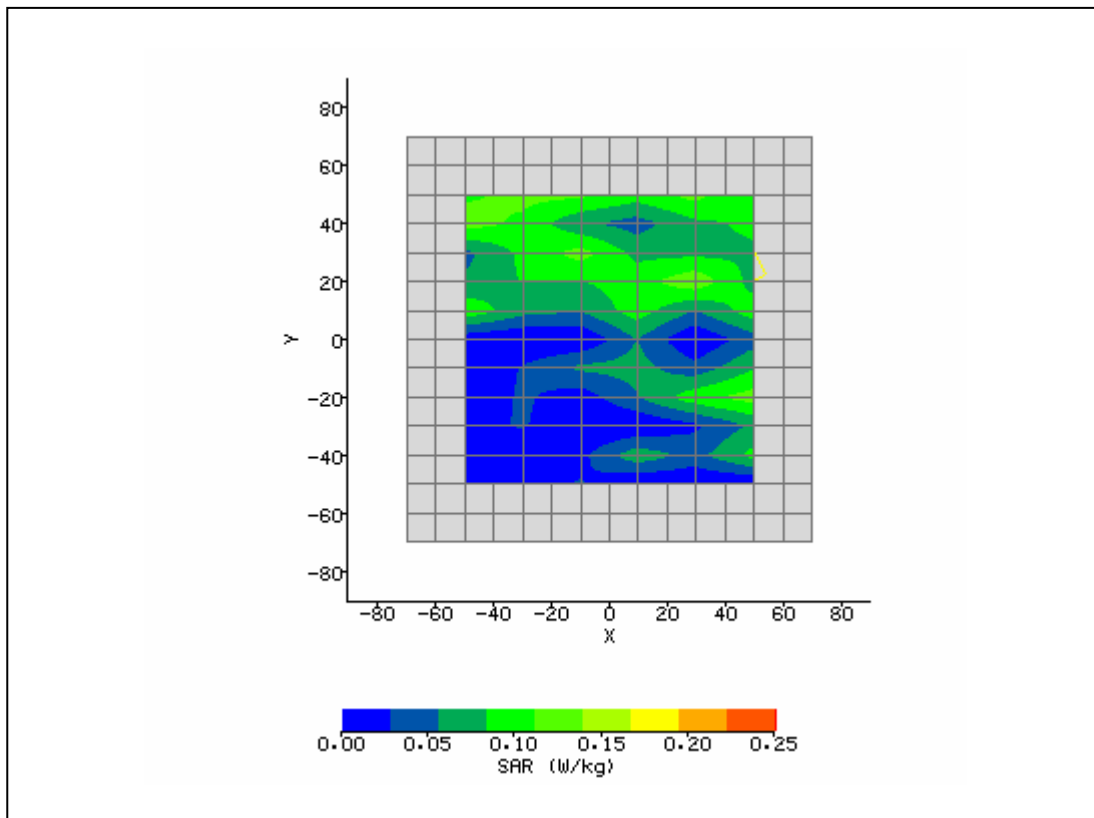

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/22/2007 2:45:03 PM	DUT Battery Model/No:	
Filename:	LeftAux165_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5800
Device Under Test:	HP Optimator - Bevos	Relative Permittivity:	47.12
Relative Humidity:	30%	Conductivity:	6.114
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR X-axis Location:	-50.00 mm
DUT Position:	Lap0mm.	Max SAR Y-axis Location:	10.00 mm
Antenna Configuration:	Integral-Aux.	Max E Field:	3.40 V/m
Test Frequency:	5805MHz	SAR 1g:	0.063 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.583 / .583 / .583	SAR Start:	0.010 W/kg
Type of Modulation:		SAR End:	0.011 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	4.48 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	06/22/07
Input Power Level:	max	Extrapolation:	poly4

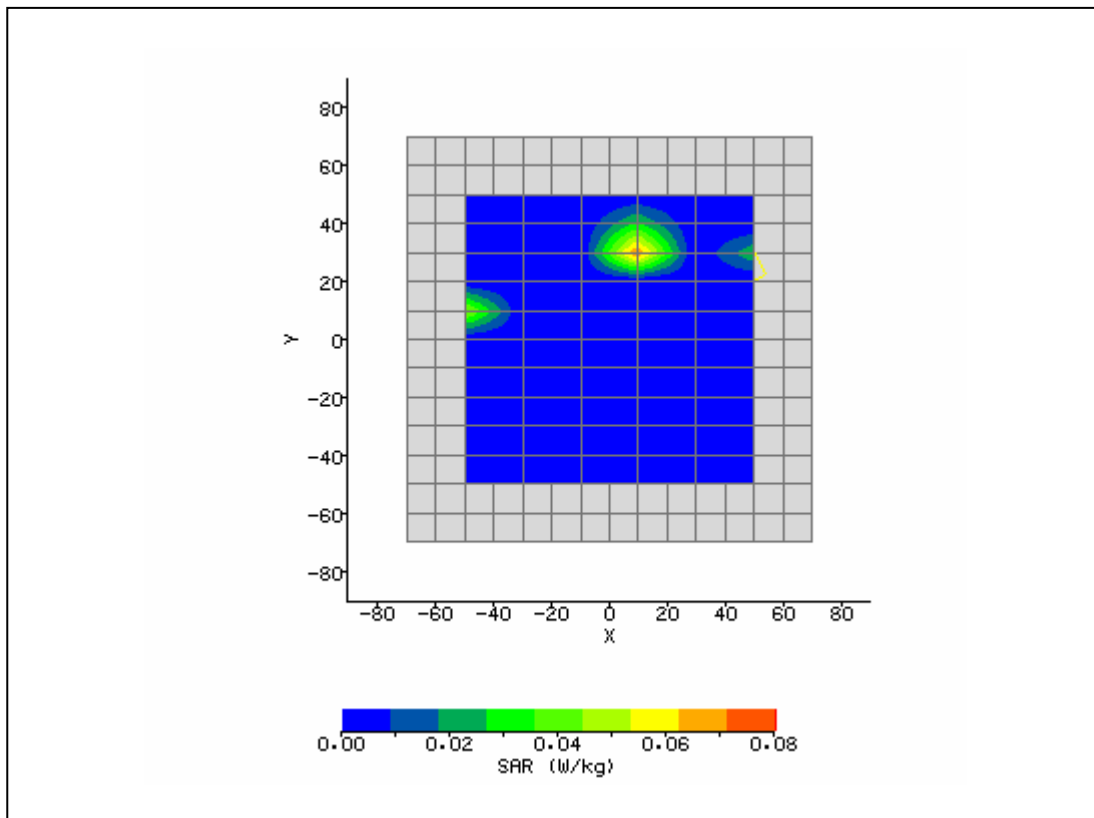

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/22/2007 2:24:16 PM	DUT Battery Model/No:	
Filename:	RightMain149_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5800
Device Under Test:	HP Optimator - Bevos	Relative Permittivity:	47.12
Relative Humidity:	30%	Conductivity:	6.114
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR X-axis Location:	-6.00 mm
DUT Position:	Left side 0mm.	Max SAR Y-axis Location:	33.00 mm
Antenna Configuration:	Integral-Aux.	Max E Field:	3.37 V/m
Test Frequency:	5805MHz	SAR 1g:	0.098 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	
Conversion Factors:	.583 / .583 / .583	SAR Start:	0.012 W/kg
Type of Modulation:		SAR End:	0.012 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.48 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	06/22/07
Input Power Level:	max	Extrapolation:	poly4

