



AirCard 319U

Test Report

FOR

FCC and IC Certifications

IC: 2417C-AC319U
FCC ID: N7NAC319U

© 2009 Sierra Wireless, Inc.

This document contains information which is proprietary and confidential to Sierra Wireless, Inc. Disclosure to persons other than the officers, employees, agents, or subcontractors of the Company or licensee of this document without the prior written permission of Sierra Wireless, Inc. is strictly prohibited.

Table of Contents

1	Introduction and Purpose	3
2	Test Summary	3
3	Description of Equipment under Test	3
4	RF Power Output	4
4.1	Test Procedure	4
4.2	Test Equipment.....	4
4.3	Test Results GSM/EDGE (GMSK: MCS4; 8-PSK: MCS9)	5
4.4	Test Results UMTS.....	5
4.4.1	Test 1: RF Output Power Results for WCDMA R99.....	5
4.4.2	Test 2: RF Output Power Results for HSDPA Rel6.....	6
4.4.3	Test 3: RF Output Power Results for HSPA (HSDPA & HSUPA) Rel6.....	8
4.5	Test Settings for UMTS Mode on CMU200	10
5	Occupied Bandwidth.....	14
5.1	Test Procedure	14
5.2	Test Equipment.....	14
5.3	Test Results	14
5.3.1	GSM Results.....	15
5.3.2	WCDMA Results	15
5.4	Test Plots.....	16
6	Block Edge Compliance	25
6.1	Test Procedure	25
6.2	Test Equipment.....	25
6.3	Test Results	25
6.4	Test Plots.....	26
7	Frequency Stability versus Temperature	32
7.1	Summary of Results.....	32
7.2	Test Procedure	32
7.3	Test Equipment.....	32
7.4	Test Results	33
7.4.1	GSM Frequency Error over Temperature	33
7.4.2	UMTS Frequency Error over Temperature	33
8	Frequency Stability versus Voltage	34
8.1	Summary of Results.....	34
8.2	Test Procedure	34
8.3	Test Equipment.....	34
8.4	Test Results	35
8.4.1	GSM Frequency Error over Voltage.....	35
8.4.2	UMTS Frequency Error over Voltage	35

1 Introduction and Purpose

This document provides test data for the AirCard 319U modem intended for FCC and Industry Canada certifications. The tests included in this report are limited to all conducted tests required. The radiated tests were performed at an external test facility.

2 Test Summary

FCC Rule	IC Standards	DESCRIPTION OF TEST	RESULT	PAGE
2.1046	RSS-132, 4.4 Issue 2 RSS-133, 6.4 Issue 5	RF Power Output	Complies	5
2.1049	RSS-Gen, 4.6 Issue 2	Occupied Bandwidth	Complies	14
2.1051, 22.901(d) 22.917, 24.238(a)	RSS-132, 4.5 Issue 2 RSS-133, 6.5 Issue 5	Out of Band Emissions at Antenna Terminals	Complies	26
2.1053	RSS-132, 4.5 Issue 2 RSS-133, 6.5 Issue 5	Field Strength of Spurious Radiation	Complies	See CCS Report
2.1055	RSS-132, 4.3 Issue 2 RSS-133, 6.3 Issue 5	Frequency Stability versus Temperature	Complies	7132
2.1055	RSS-132, 4.3 Issue 2 RSS-133, 6.3 Issue 5	Frequency Stability versus Voltage	Complies	73

3 Description of Equipment under Test

The AirCard 319U modem, referred to as “EUT” hereafter, is a multi-band wireless modem operating on the GSM/GPRS/EDGE/UMTS networks. In the US and Canada, only cellular and PCS bands are used for GSM/GPRS/UMTS operation, so this test report only contains data for these two bands (850MHz and 1900MHz).


4 RF Power Output

FCC 2.1046

4.1 Test Procedure

The transmitter output was connected to a Rohde & Schwarz CMU200 Test Set and configured to operate at maximum power in a call. The power was measured using the spectrum analyzer at three equally spaced operating frequencies for each band. The RBW was set to 300 KHz for the GSM and EDGE measurements and 5MHz for the WCDMA measurements. The spectrum analyzer was set to measure the RF output power with the cable and coupler losses accounted for.

Test Setup

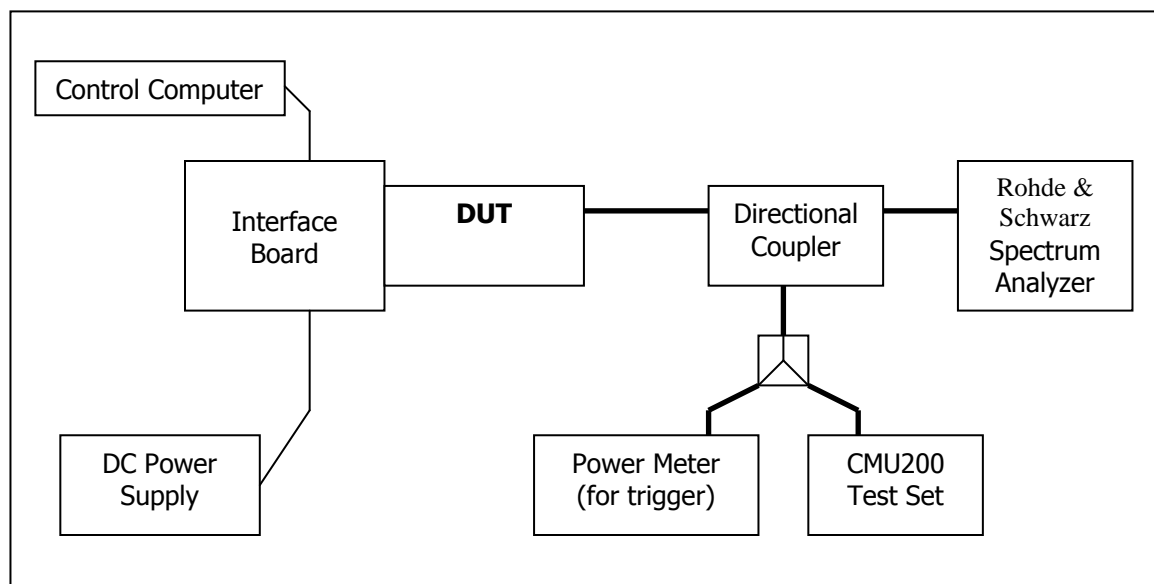

4.2 Test Equipment

EQUIPMENT	MANUFACTURER	MODEL NO.	SERIAL NO.	CAL. DATE
Control Computer	TC	Generic PC	100488	N/A
Wireless Test Set	Rohde & Schwarz	CMU200	117788	November 17, 2008
Spectrum Analyzer	Rohde & Schwarz	FSU	200078	November 15, 2008
DC Power Supply	HP	6632A	3530A	N/A
Interface Board	Shop built	ATEMux	N/A	N/A
Directional Coupler	Pasternack	PE2209-10	N/A	N/A

SIERRA WIRELESS, INC.

FCC Part 22, 24 / RSS 132, 133	AirCard 319U	December 17, 2010	Page 5 of 35
--------------------------------	--------------	-------------------	--------------

4.3 Test Results GSM/EDGE (GMSK: MCS4; 8-PSK: MCS9)

Frequency (MHz)	Channel	GMSK Mode							
		1 Time Slot		2Time Slots		3Time Slots		4Time Slots	
		RMS Power (dBm)	Peak Power (dBm)	RMS Power (dBm)	Peak Power (dBm)	RMS Power (dBm)	Peak Power (dBm)	RMS Power (dBm)	Peak Power (dBm)
824.2	128	31.89	32.00	28.46	28.57	27.62	27.73	25.91	26.10
836.6	190	31.88	32.00	28.45	28.55	27.47	27.58	25.99	26.15
848.8	251	31.91	32.10	28.67	28.78	27.60	27.70	26.16	26.30
1850.2	512	29.04	29.21	25.64	25.79	24.15	24.30	23.13	23.28
1880.0	661	29.33	29.53	25.93	26.08	24.42	24.55	23.16	23.31
1909.8	810	29.31	29.50	25.98	26.15	24.41	24.54	23.43	23.58

Frequency (MHz)	Channel	8-PSK Mode							
		1 Time Slot		2Time Slots		3Time Slots		4Time Slots	
		RMS Power (dBm)	Peak Power (dBm)	RMS Power (dBm)	Peak Power (dBm)	RMS Power (dBm)	Peak Power (dBm)	RMS Power (dBm)	Peak Power (dBm)
824.2	128	27.09	30.18	26.89	30.00	26.72	29.84	26.13	29.33
836.6	190	27.10	30.20	26.94	30.05	26.71	29.84	26.17	29.40
848.8	251	27.08	30.18	26.81	29.95	26.77	29.90	26.16	29.38
1850.2	512	26.09	29.10	25.91	29.11	23.13	26.23	22.16	25.36
1880.0	661	26.32	29.41	26.06	29.26	23.37	26.57	22.26	25.46
1909.8	810	26.31	29.41	26.09	29.30	23.21	26.42	22.25	25.45

4.4 Test Results UMTS

4.4.1 Test 1: RF Output Power Results for WCDMA R99

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 V7.5.0 specification. The EUT supports power Class 3, which has a nominal maximum output power of 24 dBm (+1.7/-3.7). RMC 12.2kps is used for this testing.

The test was performed according to section 5.2 of the 3GPP TS34.121-1 V7.5.

Frequency (MHz)	Channel	WCDMA R99	
		RMS Power (dBm)	Peak Power (dBm)
826.4	4132	22.94	26.25
836.4	4182	23.17	26.50
846.6	4233	22.70	26.01
1852.4	9262	22.00	25.35
1880.0	9400	21.93	25.30
1907.6	9538	21.84	25.17

Note: The results above reflect max power with all up bits.

4.4.2 Test 2: RF Output Power Results for HSDPA Rel6

The EUT supports Category 8 FDD HS-DSCH physical layer. As stated in the 3GPP TS25.306 V7.3.0 Table 5.1a, the details of Category 8 are as follows:

- Maximum of 10 E-DSCH received codes
- Minimum 1 inter-TTI interval
- Maximum 14411bits in an E-DSCH transport block received within an E-DSCH TTI
- Total number of soft channel bits is 134400
- Support of QPSK and 16QAM

A detailed list of all settings used is included 4.5.

The following Sub-Tests were completed according to the test requirements outlined in section 5.2A of the 3GPP TS34.121-1 V7.5.0 specification. All TX RMS and Peak power requirements for Power Class 3 were met according to table 5.2AA.5 and achieved through the outlined test procedure in section 5.2AA.4.2. All UE channels and power ratio's are set according to table C10.1.4 in the 3GPP TS34.121-1 V7.5.0 specification. A summary of these settings is illustrated below:

Subtest	Mode	Call Type	RMC (kbps)	HSDPA FRC	Power Class 3 Max Limit dBm	β_c/β_d	β_{hs}	CM (db)	MPR (db)
1	HSDPA	PS	12.2	H-Set 1 QPSK	24 (+1.7/-3.7 db)	2 /15	4/15	0.0	0.0
2	HSDPA	PS	12.2	H-Set 1 QPSK	24 (+1.7/-3.7 db)	12 /15	24/15	1.0	0.0
3	HSDPA	PS	12.2	H-Set 1 QPSK	23.5 (+2.2/-3.7 db)	15 /8	30/15	1.5	0.5
4	HSDPA	PS	12.2	H-Set 1 QPSK	23.5 (+2.2/-3.7 db)	15 /4	30/15	1.5	0.5

Note: The recommended HSDPA MPRs are implemented as per following sub-tests.

4.4.2.1 Sub-Test 1

$\beta_c=2/15$, $\beta_d=15/15$, $\beta_{hs}=4/15$. MPR=0dB translates the min. and max. power limits to 20.3dBm and 25.7dBm respectively.

Frequency (MHz)	Channel	Power (dBm)	Comments
		20.3dBm<Measured RMS (dBm)<25.7dBm	
826.4	4132	22.66	Pass
836.4	4182	22.69	Pass
846.6	4233	22.25	Pass
1852.4	9262	21.70	Pass
1880.0	9400	21.50	Pass
1907.6	9538	21.32	Pass

SIERRA WIRELESS, INC.

FCC Part 22, 24 / RSS 132, 133	AirCard 319U	December 17, 2010	Page 7 of 35
--------------------------------	--------------	-------------------	--------------

4.4.2.2 Sub-Test 2

$\beta_c=12/15$, $\beta_d=15/15$, $\beta_{hs}=24/15$. MPR=0dB translates the min. and max. power limits to 20.3dBm and 25.7dBm respectively.

Frequency (MHz)	Channel	Power (dBm)	Comments
		20.3dBm<Measured RMS (dBm)<25.7dBm	
826.4	4132	22.65	Pass
836.4	4182	22.64	Pass
846.6	4233	22.31	Pass
1852.4	9262	21.65	Pass
1880.0	9400	21.50	Pass
1907.6	9538	21.31	Pass

4.4.2.3 Sub-Test 3

$\beta_c=15/15$, $\beta_d=15/8$, $\beta_{hs}=30/15$. MPR=0.5dB translates the min. and max. power limits to 19.8dBm and 25.7dBm respectively.

Frequency (MHz)	Channel	Power (dBm)	Comments
		19.8dBm<Measured RMS (dBm)<25.7dBm	
826.4	4132	22.12	Pass
836.4	4182	22.06	Pass
846.6	4233	21.75	Pass
1852.4	9262	21.24	Pass
1880.0	9400	21.07	Pass
1907.6	9538	20.97	Pass

4.4.2.4 Sub-Test 4

$\beta_c=15/15$, $\beta_d=4/15$, $\beta_{hs}=30/15$. MPR=0.5dB translates the min. and max. power limits to 19.8dBm and 25.7dBm respectively.

Frequency (MHz)	Channel	Power (dBm)	Comments
		19.8dBm<Measured RMS (dBm)<25.7dBm	
826.4	4132	22.10	Pass
836.4	4182	22.25	Pass
846.6	4233	21.82	Pass
1852.4	9262	21.12	Pass
1880.0	9400	21.01	Pass
1907.6	9538	20.85	Pass

SIERRA WIRELESS, INC.

FCC Part 22, 24 / RSS 132, 133	AirCard 319U	December 17, 2010	Page 8 of 35
--------------------------------	--------------	-------------------	--------------

4.4.3 Test 3: RF Output Power Results for HSPA (HSDPA & HSUPA) Rel6

The EUT supports Category 5 FDD E-DCH physical layer. As stated in the 3GPP TS25.306 V7.3.0 Table 5.1g, the details of Category 5 are as follows:

- Maximum of 2 E-DCH transmitted codes
- Minimum spreading factor of SF2
- Support for only 10 ms TTI E-DCH
- Maximum 20000 bits in an E-DCH transport block within a 10 ms E-DCH TTI
- Data rate of 2 Mbps
- Support of QPSK only

A detailed list of all settings used is included in section 4.5.

The following five Sub-Tests were completed according to the test requirements outlined in section 5.2B of the 3GPP TS34.121-1 V7.5.0 specification. All TX RMS and Peak power requirements were met according to table 5.2B.5 and achieved through the outlined test procedure in section 5.2B.4.2. All UE channels and power ratio's are set according to table C11.1.3 in the 3GPP TS34.121-1 V7.5.0 specification. A summary of these settings is illustrated below:

Subtest	Mode	Call Type	RMC (kbps)	HSDPA FRC	Power Class 3 Max Limit dBm	β_{c/β_d}	β_{hs}	β_{ec}	β_{ed}	CM (db)	MPR (db)
1	HSPA	PS	12.2	H-Set 1 QPSK	24 (+1.7/-5.2 db)	11 /15	22/15	209/225	1309/225	1.0	0.0
2	HSPA	PS	12.2	H-Set 1 QPSK	22 (+3.7/-5.2 db)	6 /15	12/15	12/15	94/75	3.0	2.0
3	HSPA	PS	12.2	H-Set 1 QPSK	23 (+2.7/-5.2 db)	15 /9	30/15	30/15	47/15	2.0	1.0
4	HSPA	PS	12.2	H-Set 1 QPSK	22 (+1.7/-5.2 db)	2/15	4/15	2/15	56/75	3.0	2.0
5	HSPA	PS	12.2	H-Set 1 QPSK	24 (+1.7/-5.2 db)	15/15	30/15	24/15	134/15	1.0	0.0

Note: The recommended HSUPA MPRs are implemented as per following sub-tests.

4.4.3.1 Sub-Test 1:

$\beta_c=11/15$, $\beta_d=15/15$, $\beta_{hs}=22/15$, $\beta_{ec}=209/225$, $\beta_{ed}=1039/225$, AG=20, 1xSF4, E-TFCI=75. MPR=0dB translates the min. and max. power limits to 18.8dBm and 25.7dBm respectively.

Frequency (MHz)	Channel	Power (dBm)	Comments
		18.8dBm<Measured RMS (dBm)<25.7dBm	
826.4	4132	21.45	Pass
836.4	4182	21.42	Pass
846.6	4233	21.37	Pass
1852.4	9262	21.24	Pass
1880.0	9400	20.69	Pass
1907.6	9538	20.81	Pass

SIERRA WIRELESS, INC.

FCC Part 22, 24 / RSS 132, 133	AirCard 319U	December 17, 2010	Page 9 of 35
--------------------------------	--------------	-------------------	--------------

4.4.3.2 Sub-Test 2:

$\beta_c=6/15$, $\beta_d=15/15$, $\beta_{hs}=12/15$, $\beta_{ec}=12/15$, $\beta_{ed}=94/75$, AG=12, 1xSF4, E-TFCI=67. MPR=2dB translates the min. and max. power limits to 16.8dBm and 25.7dBm respectively.

Frequency (MHz)	Channel	Power (dBm)	Comments
		16.8dBm<Measured RMS (dBm)<25.7dBm	
826.4	4132	20.57	Pass
836.4	4182	20.45	Pass
846.6	4233	20.30	Pass
1852.4	9262	20.04	Pass
1880.0	9400	19.86	Pass
1907.6	9538	19.88	Pass

4.4.3.3 Sub-Test 3:

$\beta_c=15/15$, $\beta_d=9/15$, $\beta_{hs}=30/15$, $\beta_{ec}=30/15$, $\beta_{ed}=47/15$, AG=15, 2xSF4. E-TFCI=92, Note: # of Reference E-TFCI=2. MPR=1dB translates the min. and max. power limits to 17.8dBm and 25.7dBm respectively.

Frequency (MHz)	Channel	Power (dBm)	Comments
		17.8dBm<Measured RMS (dBm)<25.7dBm	
826.4	4132	21.05	Pass
836.4	4182	21.07	Pass
846.6	4233	20.75	Pass
1852.4	9262	20.45	Pass
1880.0	9400	20.41	Pass
1907.6	9538	20.22	Pass

4.4.3.4 Sub-Test 4:

$\beta_c=2/15$, $\beta_d=15/15$, $\beta_{hs}=4/15$, $\beta_{ec}=2/15$, $\beta_{ed}=56/75$, AG=17, 1xSF4, E-TFCI=71. MPR=2dB translates the min. and max. power limits to 16.8dBm and 25.7dBm respectively.

Frequency (MHz)	Channel	Power (dBm)	Comments
		16.8dBm<Measured RMS (dBm)<25.7dBm	
826.4	4132	20.57	Pass
836.4	4182	20.59	Pass
846.6	4233	20.41	Pass
1852.4	9262	20.05	Pass
1880.0	9400	19.97	Pass
1907.6	9538	19.95	Pass

SIERRA WIRELESS, INC.

FCC Part 22, 24 / RSS 132, 133	AirCard 319U	December 17, 2010	Page 10 of 35
--------------------------------	--------------	-------------------	---------------

4.4.3.5 Sub-Test 5:

$\beta_c=15/15$, $\beta_d=15/15$, $\beta_{hs}=30/15$, $\beta_{ec}=24/15$, $\beta_{ed}=134/15$, $AG=21$, $1xSF4$, $E-TFCI=81$.
MPR=0dB translates the min & max power limits to 18.8dBm and 25.7dBm respectively.

Frequency (MHz)	Channel	Power (dBm)	Comments
		18.8dBm<Measured RMS (dBm)<25.7dBm	
826.4	4132	21.42	Pass
836.4	4182	21.45	Pass
846.6	4233	21.36	Pass
1852.4	9262	21.25	Pass
1880.0	9400	20.70	Pass
1907.6	9538	20.80	Pass

4.5 Test Settings for UMTS Mode on CMU200

WCDMA R99 Mode Settings:

UE Power Control Settings

Maximum allowable UE-Power = 24.0 dBm

UL Target Power = 24.0 dBm

Node B Settings

Primary Scrambling Code = 9

Output Channel Power = -51.7 dBm

OCNS = Off

Total Output Power ($I_{or}+I_{oc}$) = -51.7 dBm

RMC Settings

Reference Channel Type: 12.2 kbps Downlink/Uplink

DL DTCH Transport Format: 12.2 kbps

DL Resources in Use: 100 %

UL CRC (Sym. Loop Mode 2): Off

Test Mode: Loop Mode 1

Channel Data Source DTCH: PRBS9

Voice Settings

Voice Source: Echo

Loopback Type: Off

Adaptive Multirate Settings

Active Code Set: Selection A

Codec Mode: 12.2 kbps

Signaling RAB Settings

© 2009 Sierra Wireless, Inc.

The contents of this page are subject to the confidentiality information on page one.

SRB Cell DCH: 3.4 kbps

BS Down Link Physical Channels Settings

Ior = -51.7 dBm
P-CPICH = -3.3 dB
P-SCH = -8.3 dB
S-SCH = -8.3 dB
P-CCPCH = -5.3 dB
S-CCPCH = -5.3 dB
S-CCPCH Channel Code = 2
PICH = -8.3 dB
PICH Channel Code = 3
AICH = -8.3 dB
AICH Channel Code = 6
DPDCH = -10.3 dB
DPDCH Channel Code = 96
Power Offset (DPCCH/DPDCH) = 0.0 dB
DL DPCH Timing Offset = 0
Secondary Scrambling Code = 0
Secondary Scrambling Code (HSDPA) = 0
HSDPA Channels = On

TPC Settings

Algorithm = 2
TPC Step Size = 1dB
TPC Pattern Setup = Set 1 (All 1, after linked to get maximum power)

HSDPA Mode Settings:

Node B Settings

Primary Scrambling Code = 9
Output Channel Power = -86 dBm
OCNS = Off
Total Output Power (Ior+Ioc) = -86 dBm

Network Settings

Packet Switched Domain = ON

HSDPA Test Mode Settings

Radiobearer Setup = RMC 12.2 kbps + HSPDA
RMC Test Loop = Loop Mode 1 RLC TM

HSDPA HS-DSCH

CQI Feedback Cycle = 4ms
CQI Repetition Factor = 2
ACK/NACK Repetition Factor = 3

UE Category = 8
Channel Configuration Type = FRC
H-Set Selection = H-Set 1 QPSK
RV Coding Sequence {0,2,5,6}

HSDPA Gain Factors are set according to each specific sub-test in table C.10.1.4 of 3GPP TS 34.121.

HSPA Mode Settings:

UE Power Control Settings

Maximum allowable UE-Power = 24.0 dBm
UL Target Power: Set according to each specific sub-test in table 5.2B.5 of 3GPP TS 34.121 less 5db for starting point.

UE Packet Data Gain Factors

Bc and Bd: *
 Δ ACK, Δ NACK, Δ CQI=8

HSUPA

E-DCH Physical Layer Category = 5
E-TFCI Table Index = 1
Minimum Set E-TFCI = 1*
Maximum Channelisation Code: 1xSF4 or 2xSF4*
Initial Service Grant: *

UE Gain Factors

Δ E-DPCCH: *
Number of Reference E-TFCIs: **
Reference E-TFCI's: **
E-TFCI Power offsets: **

Node B Settings

Primary Scrambling Code = 9
Output Channel Power = -86 dBm
OCNS = Off
Total Output Power ($I_{or}+I_{oc}$) = -86 dBm

Paket Switched

DCH Type: HSUPA Test Mode
Data Rate: HSDPA/HSUPA
HSDPA Test Mode Settings
Radiobearer Setup = RMC 12.2kbps + HSDPA
RMC Test Loop = Loop Mode 1 RLC TM

HSDPA HS-DSCH

CQI Feedback Cycle = 4ms
CQI Repetition Factor = 2
ACK/NACK Repetition Factor = 3
UE Category = 8
Channel Configuration Type = FRC
H-Set Selection = H-Set 1 QPSK
RV Coding Sequence {0,2,5,6}

HSUPA Test Mode Settings

Radiobearer Setup = SRB 3.4 + HSPA

HSUPA Settings

TTI mode: 10ms

E-AGCH

Pattern Length: 1 AG Value: *

Downlink Physical Channels

HSUPA Channels: On

E-AGCH: -6.0db

E-AGCH Chan. Code: 6

E-RGCH/E-HICH: -5.0db

E-RGCH Active: Off

E-RGCH/E-HICH Chan. Code: 6

*Set according to each specific sub-test in table C.11.1.3 of 3GPP TS 34.121.

** Set according to each specific sub-test in table 5.2B.2/3 of 3GPP TS 34.121.


5 Occupied Bandwidth

FCC 2.1049

5.1 Test Procedure

The transmitter output was connected to a spectrum analyzer through a calibrated coaxial cable and a coupler. The occupied bandwidth (defined as the 99% Power Bandwidth) was measured with the spectrum analyzer at low, middle, and high frequencies in each band. The -26dB bandwidth was also measured and recorded.

Test Setup

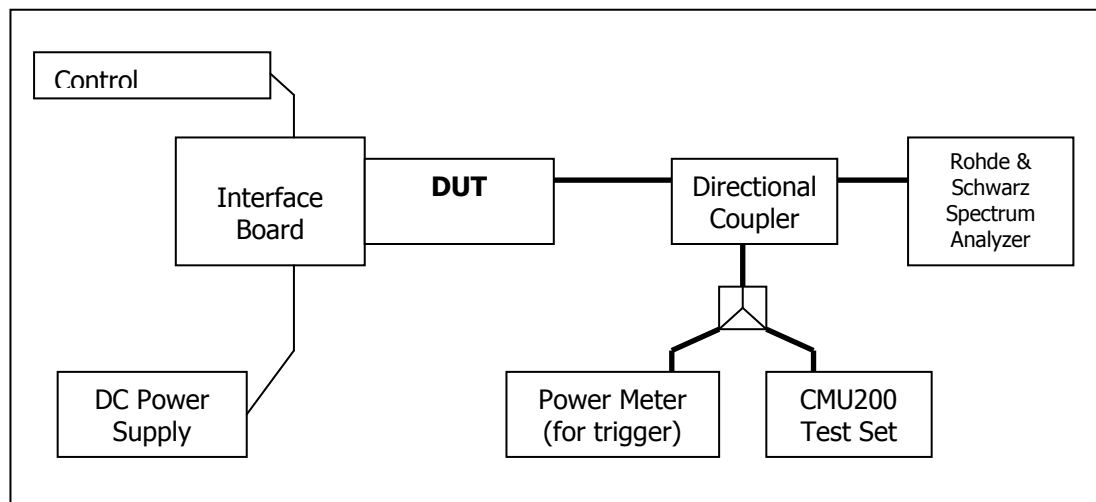

5.2 Test Equipment

EQUIPMENT	MANUFACTURER	MODEL NO.	SERIAL NO.	CAL. DATE
Control Computer	TC	Generic PC	100488	N/A
Wireless Test Set	Rohde & Schwarz	CMU200	117788	November 17, 2008
Spectrum Analyzer	Rohde & Schwarz	FSU	200078	November 15, 2008
DC Power Supply	HP	6632A	3530A	N/A
Interface Board	Shop built	ATEMux	N/A	N/A
Directional Coupler	Pasternack	PE2209-10	N/A	N/A

5.3 Test Results

The performance of the GSM 850 MHz Cellular band is shown in plots 5.3.1 to 5.3.6.

Performance of the GSM 1900 MHz PCS band is shown in plots 5.3.7 to 5.3.12.

Performance of the UMTS 850 Cellular band is shown in plots 5.3.13 to 5.3.15.

Performance of the UMTS 1900 PCS band is shown in plots 5.3.16 to 5.3.18.

The following GSM test results are based on single slot, and use CS1 for GMSK and MCS9 for 8PSK mode. For WCDMA testing, RMC 12.2kps has been used.

SIERRA WIRELESS, INC.

FCC Part 22, 24 / RSS 132, 133	AirCard 319U	December 17, 2010	Page 15 of 35
--------------------------------	--------------	-------------------	---------------

5.3.1 GSM Results

Frequency (MHz)	Channel	99% Occupied Bandwidth (kHz)		-26dBc Occupied Bandwidth (kHz)	
		GMSK Mode	8-PSK Mode	GMSK Mode	8-PSK Mode
824.2	128	245	244	318	305
836.6	190	244	250	315	310
848.8	251	244	244	316	316
1850.2	512	244	245	314	290
1880.0	661	245	245	312	301
1909.8	810	244	245	309	306

5.3.2 WCDMA Results

Frequency (MHz)	Channel	99% Occupied Bandwidth (MHz)	-26dBc Occupied Bandwidth (MHz)
826.4	4132	4.1466	4.6154
836.4	4182	4.1345	4.6513
846.6	4233	4.1466	4.6154
1852.4	9262	4.1466	4.6514
1880.0	9400	4.1587	4.6274
1907.6	9538	4.1587	4.6394

FCC Part 22, 24 / RSS 132, 133	AirCard 319U	December 17, 2010	Page 16 of 35
--------------------------------	--------------	-------------------	---------------

FCC Part 22, 24 / RSS 132, 133	AirCard 319U	December 17, 2010	Page 17 of 35
--------------------------------	--------------	-------------------	---------------

Ref 00 dBm Att 40 dB SWT 120 ms Marker 1 (T1) 25.00 dBm
 Marker 2 (T2) -17.00 dBm
 Marker 3 (T3) -10.00 dBm
 Marker 4 (T4) -10.00 dBm
 Temp 1 (T1) 0.00 dBm
 Temp 2 (T2) 0.00 dBm
 Temp 3 (T3) 0.00 dBm
 Temp 4 (T4) 0.00 dBm

Center 940.0 MHz 100 kHz/ Span 1 MHz

RBW 3 kHz VBW 3 kHz Span 1 MHz

Ref 30 dBm Att -40 dB SUT 150 mW

Marker 1 (T1) 52.41000000 MHz

Delta 2 (T1) -179.487170400 kHz

Delta 3 (T1) 125.602550100 kHz

Temp 1 (T1) 0.00 dB

Temp 2 (T1) 0.00 dB

Temp 3 (T1) 0.00 dB

Temp 4 (T1) 0.00 dB

Temp 5 (T1) 0.00 dB

Temp 6 (T1) 0.00 dB

Temp 7 (T1) 0.00 dB

Temp 8 (T1) 0.00 dB

Temp 9 (T1) 0.00 dB

Temp 10 (T1) 0.00 dB

Temp 11 (T1) 0.00 dB

Temp 12 (T1) 0.00 dB

Temp 13 (T1) 0.00 dB

Temp 14 (T1) 0.00 dB

Temp 15 (T1) 0.00 dB

Temp 16 (T1) 0.00 dB

Temp 17 (T1) 0.00 dB

Temp 18 (T1) 0.00 dB

Temp 19 (T1) 0.00 dB

Temp 20 (T1) 0.00 dB

Temp 21 (T1) 0.00 dB

Temp 22 (T1) 0.00 dB

Temp 23 (T1) 0.00 dB

Temp 24 (T1) 0.00 dB

Temp 25 (T1) 0.00 dB

Temp 26 (T1) 0.00 dB

Temp 27 (T1) 0.00 dB

Temp 28 (T1) 0.00 dB

Temp 29 (T1) 0.00 dB

Temp 30 (T1) 0.00 dB

Temp 31 (T1) 0.00 dB

Temp 32 (T1) 0.00 dB

Temp 33 (T1) 0.00 dB

Temp 34 (T1) 0.00 dB

Temp 35 (T1) 0.00 dB

Temp 36 (T1) 0.00 dB

Temp 37 (T1) 0.00 dB

Temp 38 (T1) 0.00 dB

Temp 39 (T1) 0.00 dB

Temp 40 (T1) 0.00 dB

Temp 41 (T1) 0.00 dB

Temp 42 (T1) 0.00 dB

Temp 43 (T1) 0.00 dB

Temp 44 (T1) 0.00 dB

Temp 45 (T1) 0.00 dB

Temp 46 (T1) 0.00 dB

Temp 47 (T1) 0.00 dB

Temp 48 (T1) 0.00 dB

Temp 49 (T1) 0.00 dB

Temp 50 (T1) 0.00 dB

Temp 51 (T1) 0.00 dB

Temp 52 (T1) 0.00 dB

Temp 53 (T1) 0.00 dB

Temp 54 (T1) 0.00 dB

Temp 55 (T1) 0.00 dB

Temp 56 (T1) 0.00 dB

Temp 57 (T1) 0.00 dB

Temp 58 (T1) 0.00 dB

Temp 59 (T1) 0.00 dB

Temp 60 (T1) 0.00 dB

Temp 61 (T1) 0.00 dB

Temp 62 (T1) 0.00 dB

Temp 63 (T1) 0.00 dB

Temp 64 (T1) 0.00 dB

Temp 65 (T1) 0.00 dB

Temp 66 (T1) 0.00 dB

Temp 67 (T1) 0.00 dB

Temp 68 (T1) 0.00 dB

Temp 69 (T1) 0.00 dB

Temp 70 (T1) 0.00 dB

Temp 71 (T1) 0.00 dB

Temp 72 (T1) 0.00 dB

Temp 73 (T1) 0.00 dB

Temp 74 (T1) 0.00 dB

Temp 75 (T1) 0.00 dB

Temp 76 (T1) 0.00 dB

Temp 77 (T1) 0.00 dB

Temp 78 (T1) 0.00 dB

Temp 79 (T1) 0.00 dB

Temp 80 (T1) 0.00 dB

Temp 81 (T1) 0.00 dB

Temp 82 (T1) 0.00 dB

Temp 83 (T1) 0.00 dB

Temp 84 (T1) 0.00 dB

Temp 85 (T1) 0.00 dB

Temp 86 (T1) 0.00 dB

Temp 87 (T1) 0.00 dB

Temp 88 (T1) 0.00 dB

Temp 89 (T1) 0.00 dB

Temp 90 (T1) 0.00 dB

Temp 91 (T1) 0.00 dB

Temp 92 (T1) 0.00 dB

Temp 93 (T1) 0.00 dB

Temp 94 (T1) 0.00 dB

Temp 95 (T1) 0.00 dB

Temp 96 (T1) 0.00 dB

Temp 97 (T1) 0.00 dB

Temp 98 (T1) 0.00 dB

Temp 99 (T1) 0.00 dB

Temp 100 (T1) 0.00 dB

Temp 101 (T1) 0.00 dB

Temp 102 (T1) 0.00 dB

Temp 103 (T1) 0.00 dB

Temp 104 (T1) 0.00 dB

Temp 105 (T1) 0.00 dB

Temp 106 (T1) 0.00 dB

Temp 107 (T1) 0.00 dB

Temp 108 (T1) 0.00 dB

Temp 109 (T1) 0.00 dB

Temp 110 (T1) 0.00 dB

Temp 111 (T1) 0.00 dB

Temp 112 (T1) 0.00 dB

Temp 113 (T1) 0.00 dB

Temp 114 (T1) 0.00 dB

Temp 115 (T1) 0.00 dB

Temp 116 (T1) 0.00 dB

Temp 117 (T1) 0.00 dB

Temp 118 (T1) 0.00 dB

Temp 119 (T1) 0.00 dB

Temp 120 (T1) 0.00 dB

Temp 121 (T1) 0.00 dB

Temp 122 (T1) 0.00 dB

Temp 123 (T1) 0.00 dB

Temp 124 (T1) 0.00 dB

Temp 125 (T1) 0.00 dB

Temp 126 (T1) 0.00 dB

Temp 127 (T1) 0.00 dB

Temp 128 (T1) 0.00 dB

Temp 129 (T1) 0.00 dB

Temp 130 (T1) 0.00 dB

Temp 131 (T1) 0.00 dB

Temp 132 (T1) 0.00 dB

Temp 133 (T1) 0.00 dB

Temp 134 (T1) 0.00 dB

Temp 135 (T1) 0.00 dB

Temp 136 (T1) 0.00 dB

Temp 137 (T1) 0.00 dB

Temp 138 (T1) 0.00 dB

Temp 139 (T1) 0.00 dB

Temp 140 (T1) 0.00 dB

Temp 141 (T1) 0.00 dB

Temp 142 (T1) 0.00 dB

Temp 143 (T1) 0.00 dB

Temp 144 (T1) 0.00 dB

Temp 145 (T1) 0.00 dB

Temp 146 (T1) 0.00 dB

Temp 147 (T1) 0.00 dB

Temp 148 (T1) 0.00 dB

Temp 149 (T1) 0.00 dB

Temp 150 (T1) 0.00 dB

Temp 151 (T1) 0.00 dB

Temp 152 (T1) 0.00 dB

Temp 153 (T1) 0.00 dB

Temp 154 (T1) 0.00 dB

Temp 155 (T1) 0.00 dB

Temp 156 (T1) 0.00 dB

Temp 157 (T1) 0.00 dB

Temp 158 (T1) 0.00 dB

Temp 159 (T1) 0.00 dB

Temp 160 (T1) 0.00 dB

Temp 161 (T1) 0.00 dB

Temp 162 (T1) 0.00 dB

Temp 163 (T1) 0.00 dB

Temp 164 (T1) 0.00 dB

Temp 165 (T1) 0.00 dB

Temp 166 (T1) 0.00 dB

Temp 167 (T1) 0.00 dB

Temp 168 (T1) 0.00 dB

Temp 169 (T1) 0.00 dB

Temp 170 (T1) 0.00 dB

Temp 171 (T1) 0.00 dB

Temp 172 (T1) 0.00 dB

Temp 173 (T1) 0.00 dB

Temp 174 (T1) 0.00 dB

Temp 175 (T1) 0.00 dB

Temp 176 (T1) 0.00 dB

Temp 177 (T1) 0.00 dB

Temp 178 (T1) 0.00 dB

Temp 179 (T1) 0.00 dB

Temp 180 (T1) 0.00 dB

Temp 181 (T1) 0.00 dB

Temp 182 (T1) 0.00 dB

Temp 183 (T1) 0.00 dB

Temp 184 (T1) 0.00 dB

Temp 185 (T1) 0.00 dB

Temp 186 (T1) 0.00 dB

Temp 187 (T1) 0.00 dB

Temp 188 (T1) 0.00 dB


Temp 189 (T1) 0.00 dB

Temp 190 (T1) 0.00 dB

Temp 191 (T1) 0.


© 2009 Sierra Wireless, Inc.
The contents of this page are subject to the confidentiality information on page one.

5.3.5) 8-PSK Occupied Bandwidth, Middle channel, 836.6 MHz, 99% bandwidth

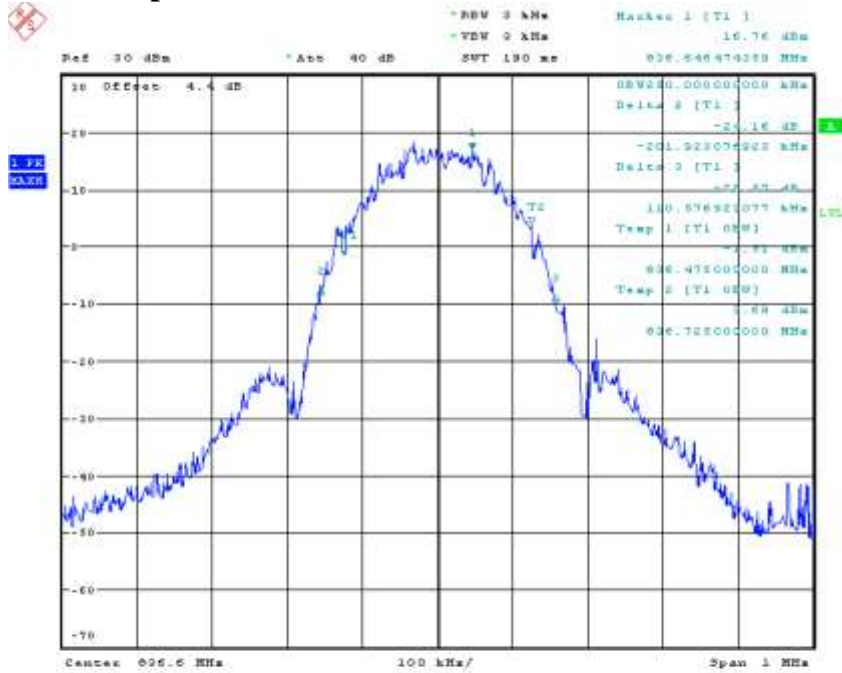

Date: 18.NOV.2010 07:27:18


5.3.6) 8-PSK Occupied Bandwidth, High channel, 848.8 MHz, 99% bandwidth

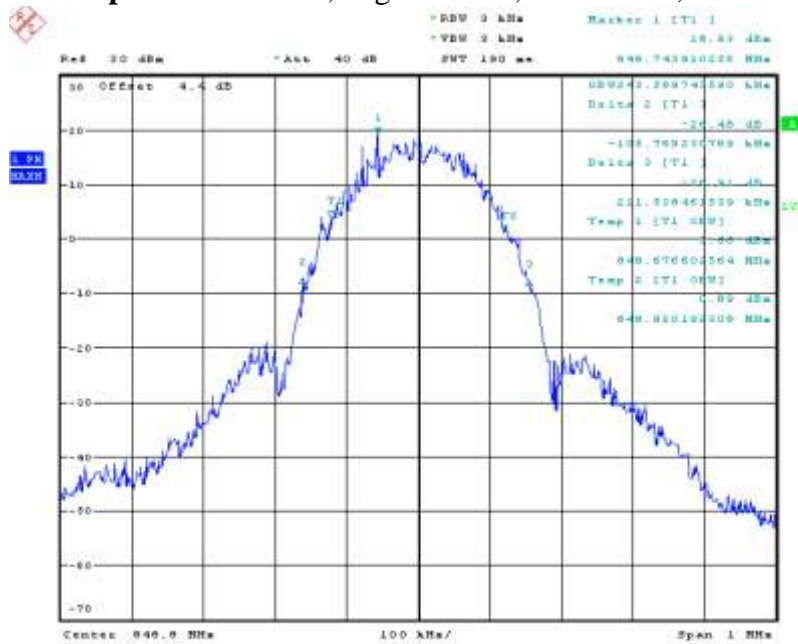

Date: 18.NOV.2010 07:25:42

SIERRA WIRELESS, INC.

5.3.7) GMSK Occupied Bandwidth, PCS Low channel, 1850.2 MHz, 99% BW

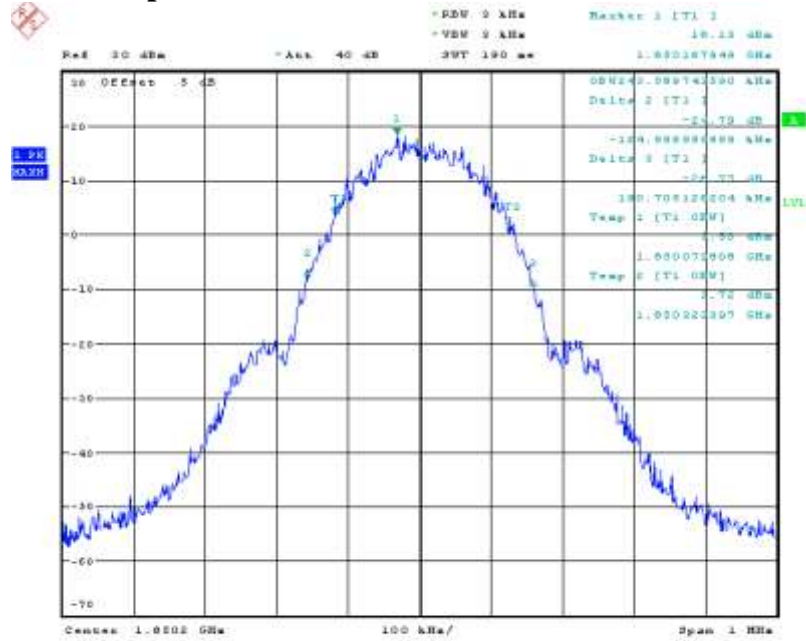


Date: 18.NOV.2010 07:35:46

5.3.8) GMSK Occupied Bandwidth, PCS Middle channel, 1880.0 MHz, 99% BW



Date: 18.NOV.2010 07:37:18


5.3.9) GMSK Occupied Bandwidth, PCS High channel, 1909.8 MHz, 99% BW

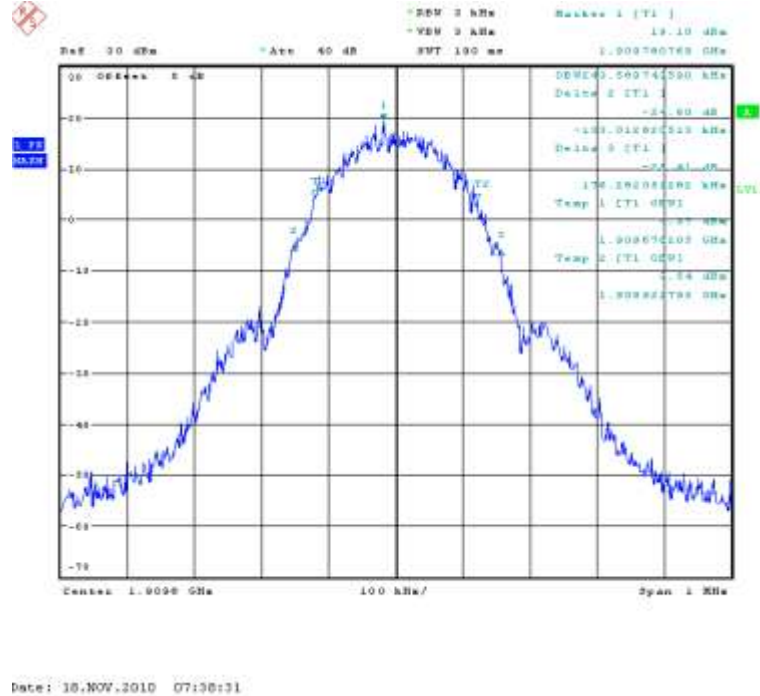

5.3.10) 8-PSK Occupied Bandwidth, PCS Low channel, 1850.2 MHz, 99% BW




5.3.11) 8-PSK Occupied Bandwidth, PCS Middle channel, 1880.0 MHz, 99% BW

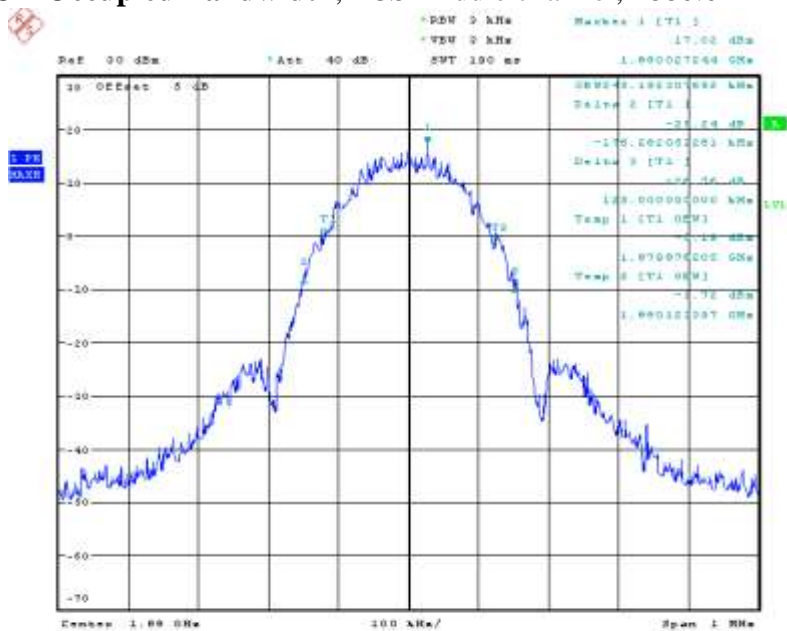

Date: 18.NOV.2010 07:41:18

5.3.12) 8-PSK Occupied Bandwidth, PCS High channel, 1909.8 MHz, 99% BW

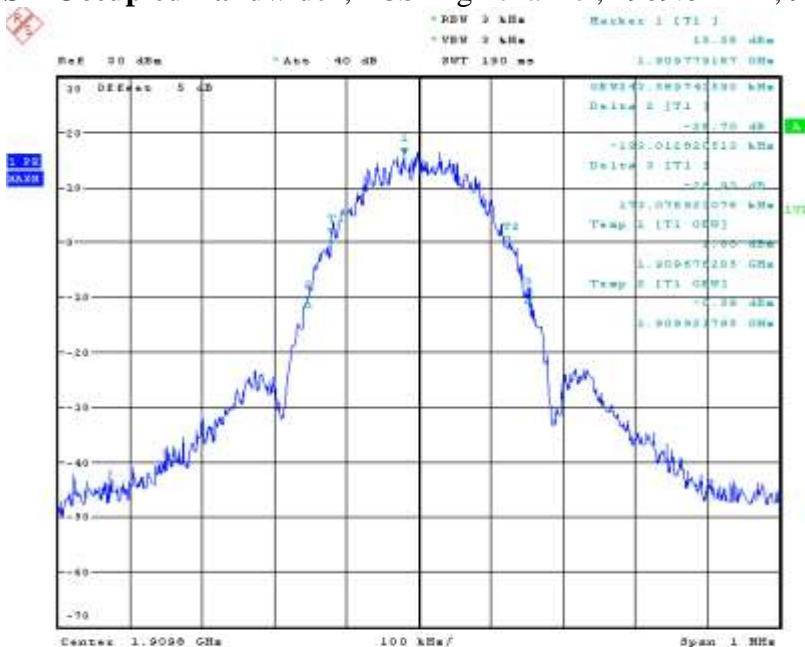

Date: 18.NOV.2010 07:40:04

SIERRA WIRELESS, INC.


FCC Part 22, 24 / RSS 132, 133

AirCard 319U

December 17, 2010


Page 22 of 35

5.3.13) WCDMA Occupied Bandwidth, Cellular Low channel, 826.4 MHz, 99% BW

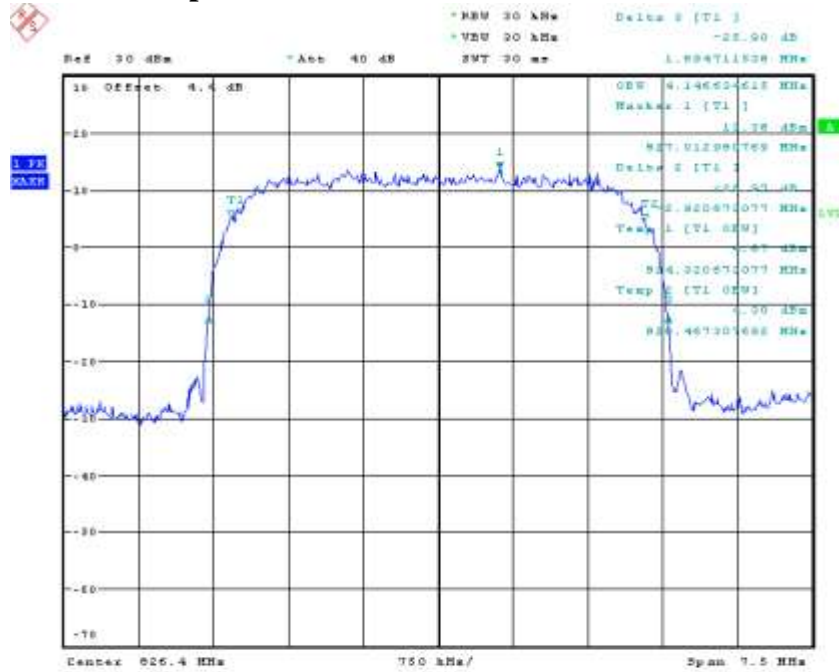

Date: 18.NOV.2010 07:03:55

5.3.14) WCDMA Occupied Bandwidth, Cellular Middle channel, 836.4 MHz, 99% BW

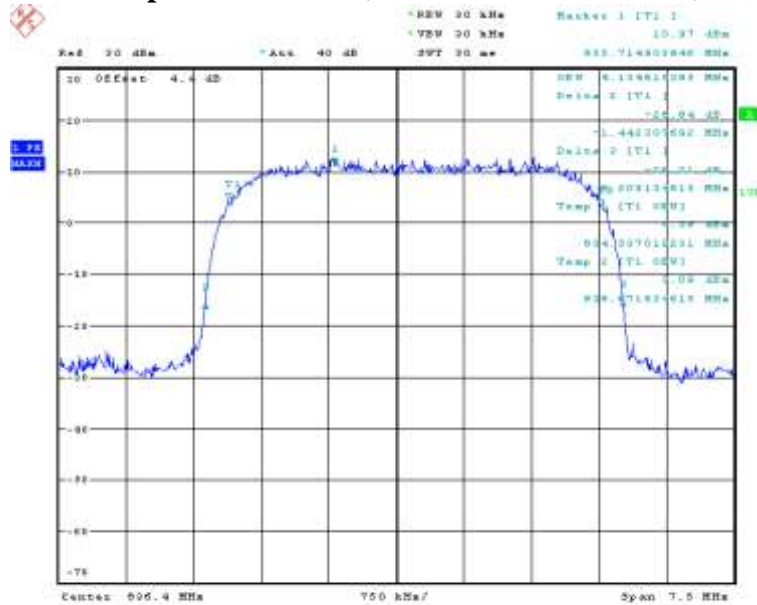

Date: 18.NOV.2010 07:06:39

© 2009 Sierra Wireless, Inc.

The contents of this page are subject to the confidentiality information on page one.

FCC Part 22, 24 / RSS 132, 133	AirCard 319U	December 17, 2010	Page 23 of 35
--------------------------------	--------------	-------------------	---------------

1.00
RAW

30 DIFF: 4.4 dB

20

10

0

-10

-20

-30

-40

-50

-60

-70

100 200 300 400 500 600 700 800 900 1000

Center 646.6 Hz 750 Hz/Hz Span 7.8 Hz

R=9 20 dBm A=0 40 dB BUT 30 ms 745.18237683 kHz


P2W 00 kHz V2W 20 kHz D=1m 3 [T1] -27.12 dB

Center 1.0524 GHz 750 kHz Span 7.5 MHz

© 2009 Sierra Wireless, Inc.
The contents of this page are subject to the confidentiality information on page one.


SIERRA WIRELESS, INC.

5.3.17) WCDMA Occupied Bandwidth, PCS Middle channel, 1880 MHz, 99% BW

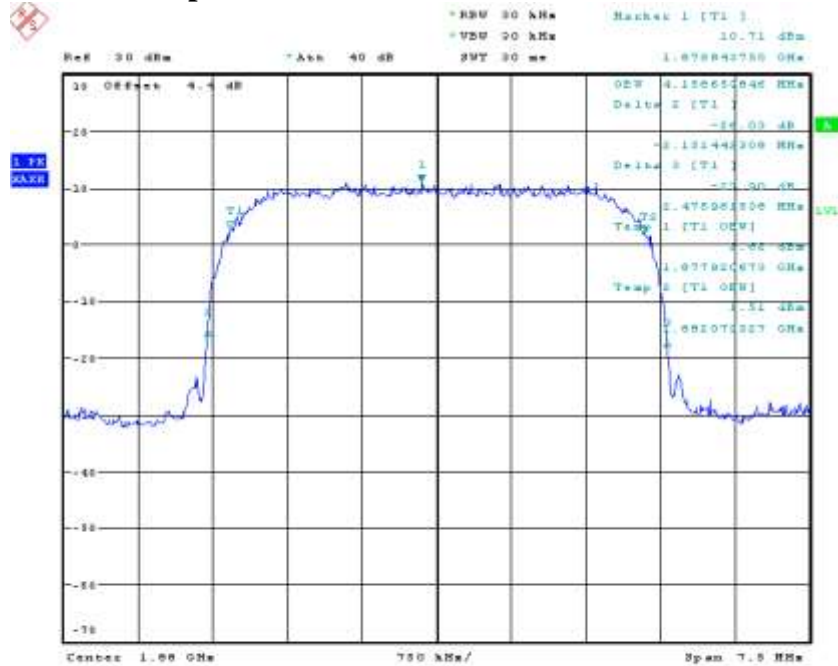

Date: 18.NOV.2010 07:12:19

5.3.18) WCDMA Occupied Bandwidth, PCS High channel, 1907.6 MHz, 99% BW

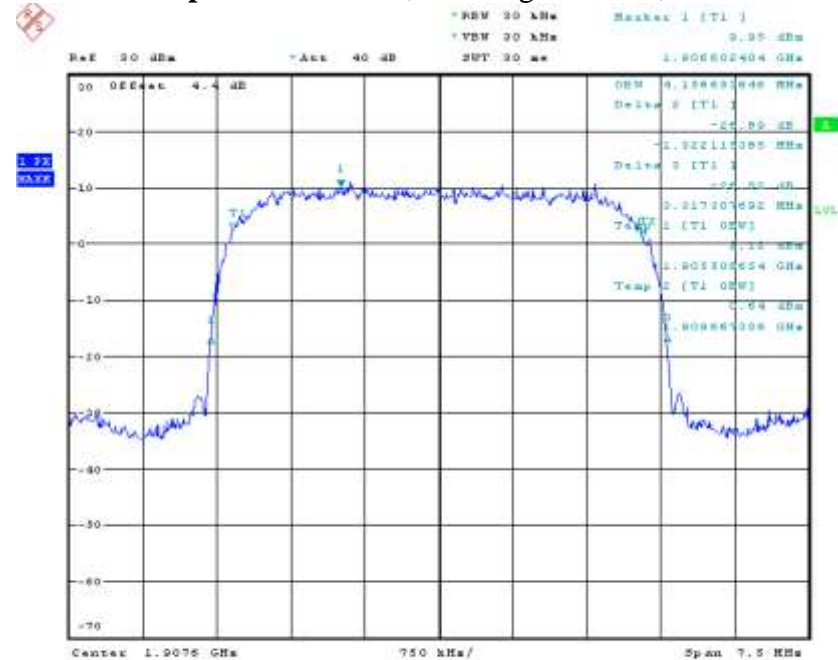

Date: 18.NOV.2010 07:15:46

© 2009 Sierra Wireless, Inc.

The contents of this page are subject to the confidentiality information on page one.


6 Block Edge Compliance

FCC Part 22H/24E

6.1 Test Procedure

The transmitter output was connected to a Rohde & Schwarz CMU200 Test Set, through a coaxial RF cable and a directional coupler, and configured to operate at maximum power. The block edge emissions were measured at the required operating frequencies in each band on the Spectrum Analyzer.

Test Setup

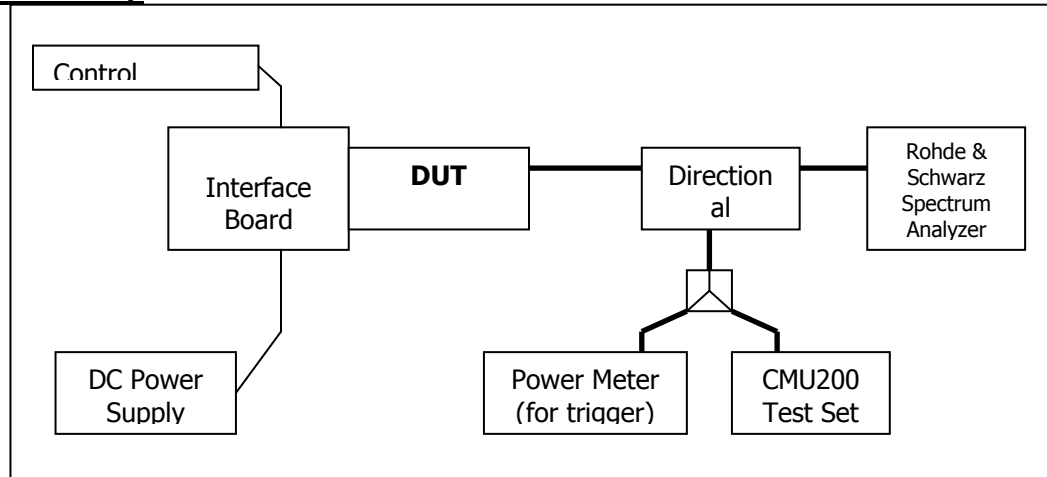

6.2 Test Equipment

EQUIPMENT	MANUFACTURER	MODEL NO.	SERIAL NO.	CAL. DATE
Control Computer	TC	Generic PC	100488	N/A
Wireless Test Set	Rohde & Schwarz	CMU200	117788	November 17, 2008
Spectrum Analyzer	Rohde & Schwarz	FSU	200078	November 15, 2008
DC Power Supply	HP	6632A	3530A	N/A
Interface Board	Shop built	ATEMux	N/A	N/A
Directional Coupler	Pasternack	PE2209-10	N/A	N/A

6.3 Test Results

Block Test	Frequency Boundaries (MHz)	Channels Tested	Corresponding Plots	Result
1	GMSK: Below 824 MHz, above 849 MHz	128, 251	7.4.1, 7.4.2	Complies
2	8PSK: Below 824 MHz, above 849 MHz	128, 251	7.4.3, 7.4.4	Complies
3	GMSK: Below 1850MHz, above 1910MHz	512, 810	7.4.5, 7.4.6	Complies
4	8PSK: Below 1850MHz, above 1910MHz	512, 810	7.4.7, 7.4.8	Complies
Block Test	Frequency Boundaries (MHz)	Channels Tested	Corresponding Plots	Result
1	WCDMA: Below 824MHz, above 849MHz	4132, 4233	7.4.9, 7.4.10	Complies
2	WCDMA: Below 1850MHz, above 1910MHz	9262, 9538	7.4.11, 7.4.12	Complies

SIERRA WIRELESS, INC.

FCC Part 22, 24 / RSS 132, 133


AirCard 319U

December 17, 2010

Page 26 of 35


6.4 Test Plots

Plot 7.4.1) GSMK; Cellular low channel, below 824 MHz

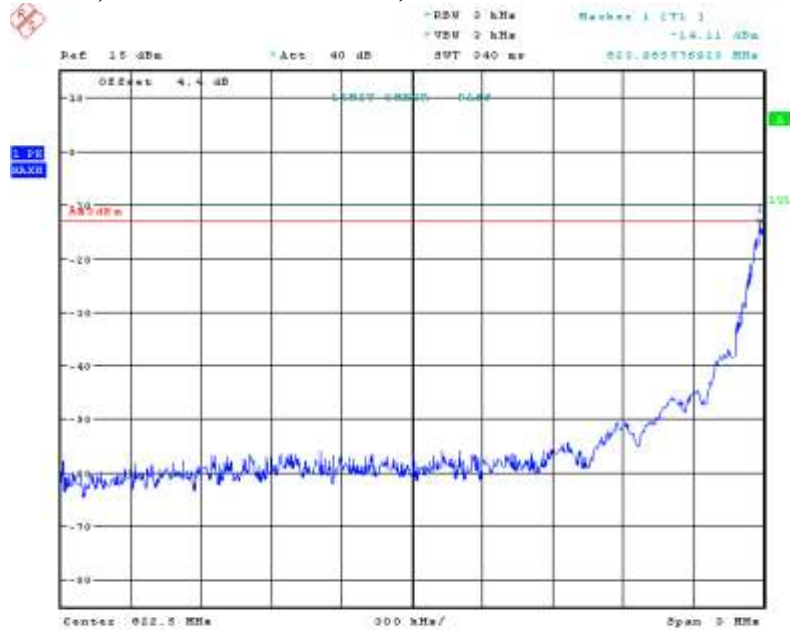

Date: 18.NOV.2010 08:08:19

Plot 7.4.2) GSMK; Cellular high channel, above 849 MHz

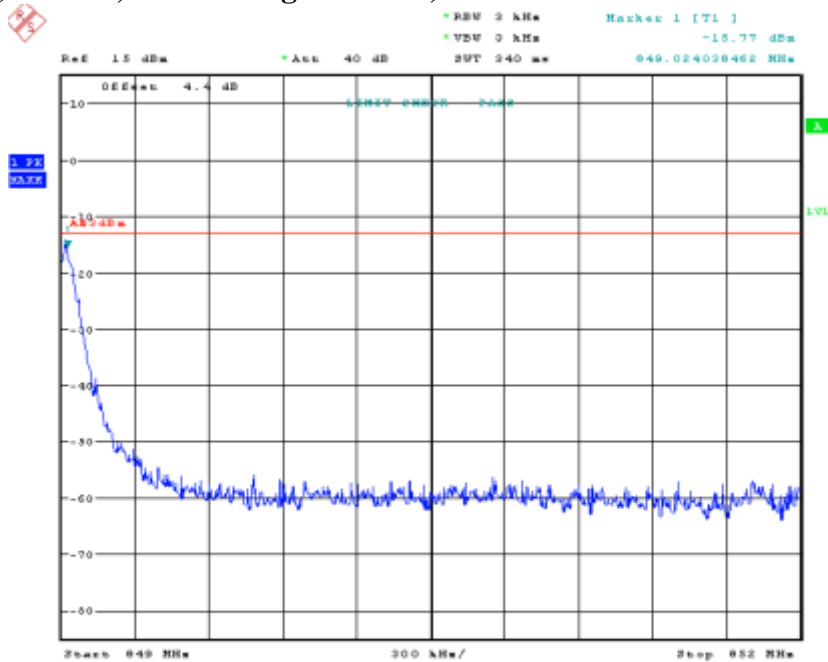


Date: 18.NOV.2010 08:14:12

© 2009 Sierra Wireless, Inc.


The contents of this page are subject to the confidentiality information on page one.

SIERRA WIRELESS, INC.

Plot 7.4.3) 8-PSK; Cellular low channel, below 824 MHz

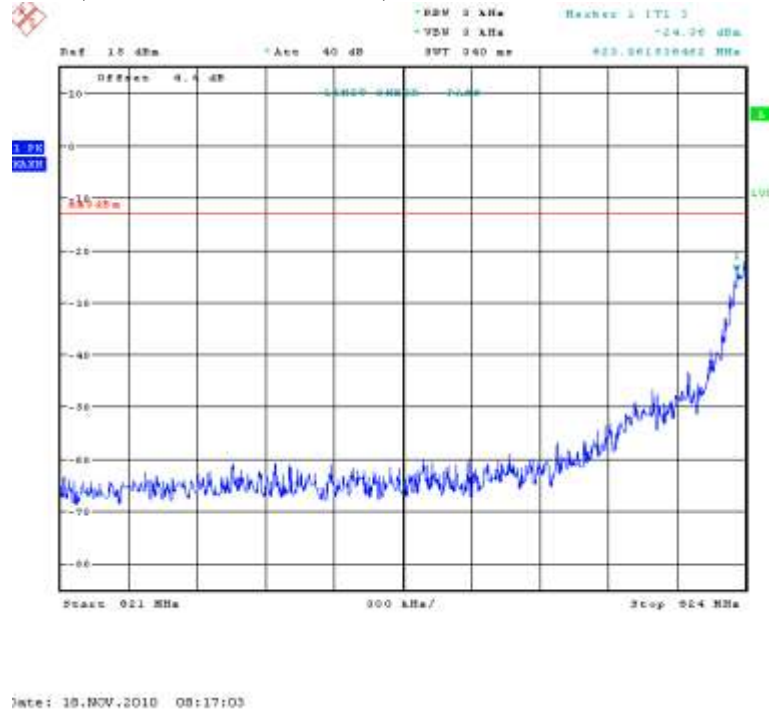


Plot 7.4.4) 8-PSK; Cellular high channel, above 849 MHz

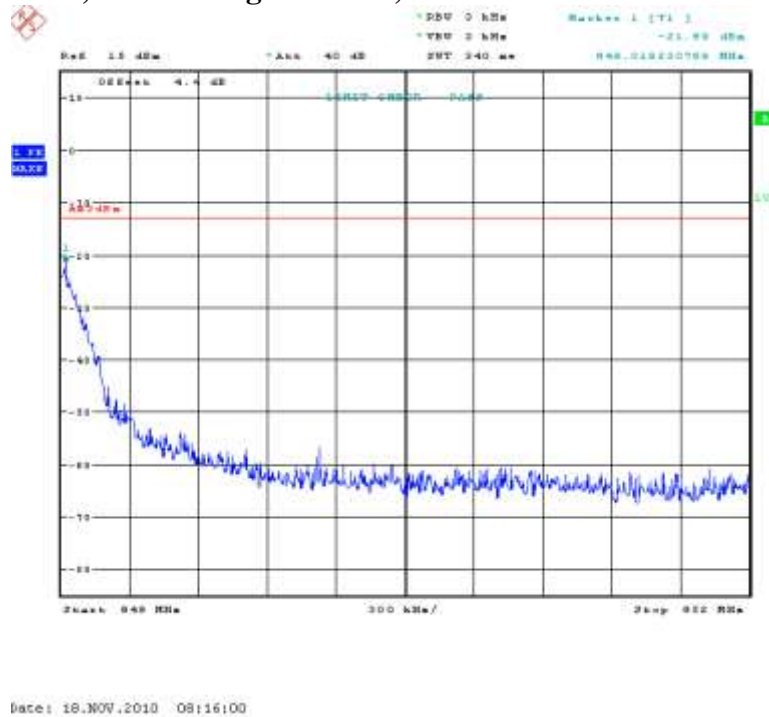


SIERRA WIRELESS, INC.

Plot 7.4.5) GMSK; PCS low channel, below 1850 MHz

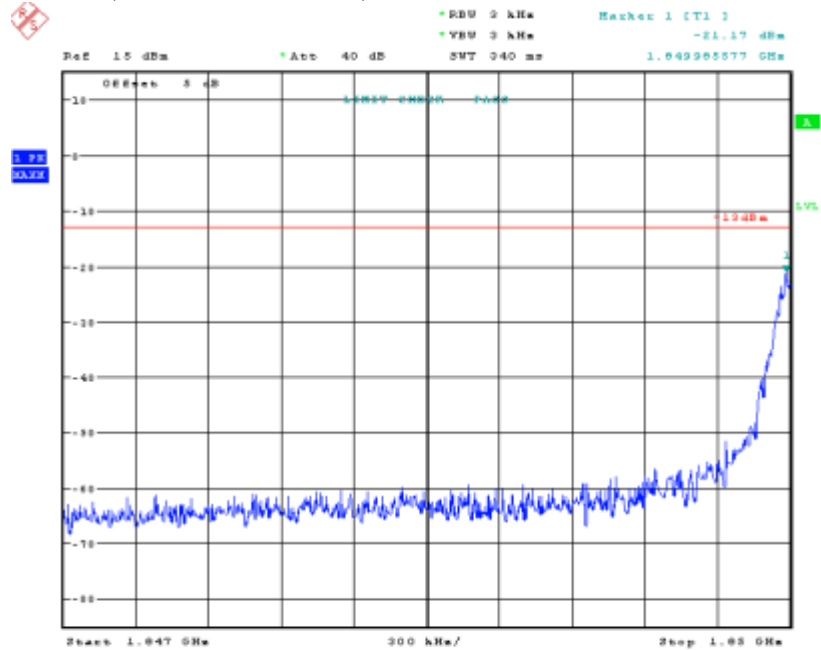

Date: 18.NOV.2010 08:19:33

Plot 7.4.6) GMSK; PCS high channel, above 1910 MHz

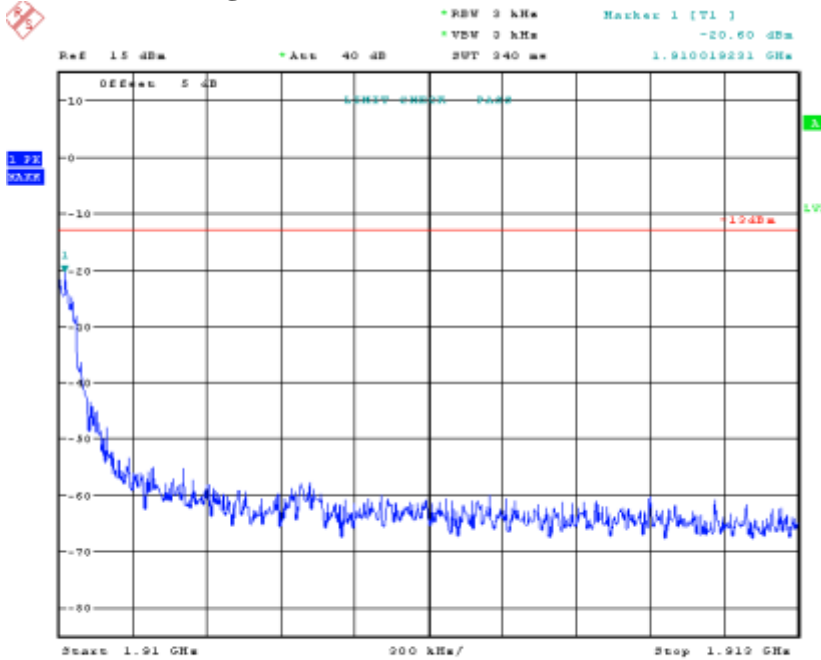


Date: 18.NOV.2010 08:20:44

SIERRA WIRELESS, INC.


FCC Part 22, 24 / RSS 132, 133	AirCard 319U	December 17, 2010	Page 29 of 35
--------------------------------	--------------	-------------------	---------------

Plot 7.4.7) 8-PSK; PCS low channel, below 1850 MHz

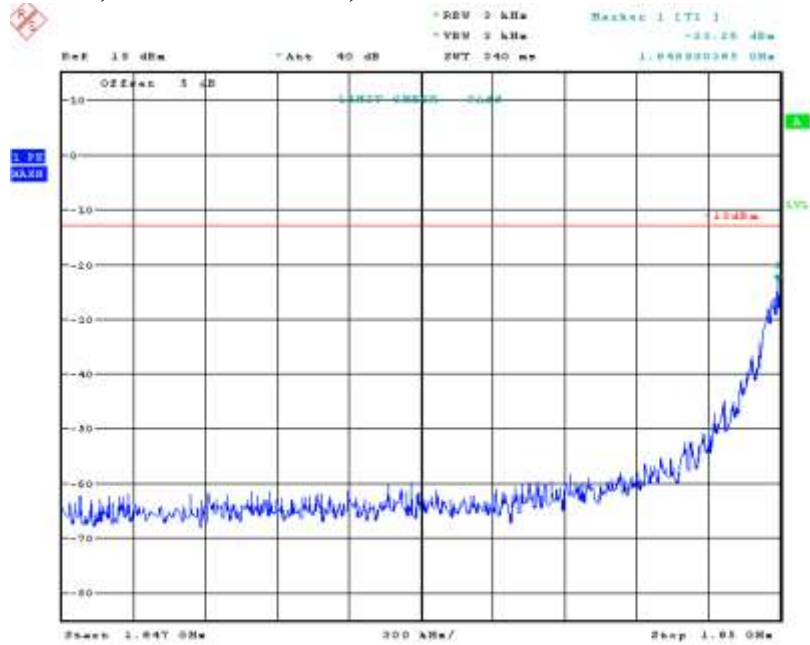

Date: 18.NOV.2010 08:22:48

Plot 7.4.8) 8-PSK; PCS high channel, above 1910 MHz

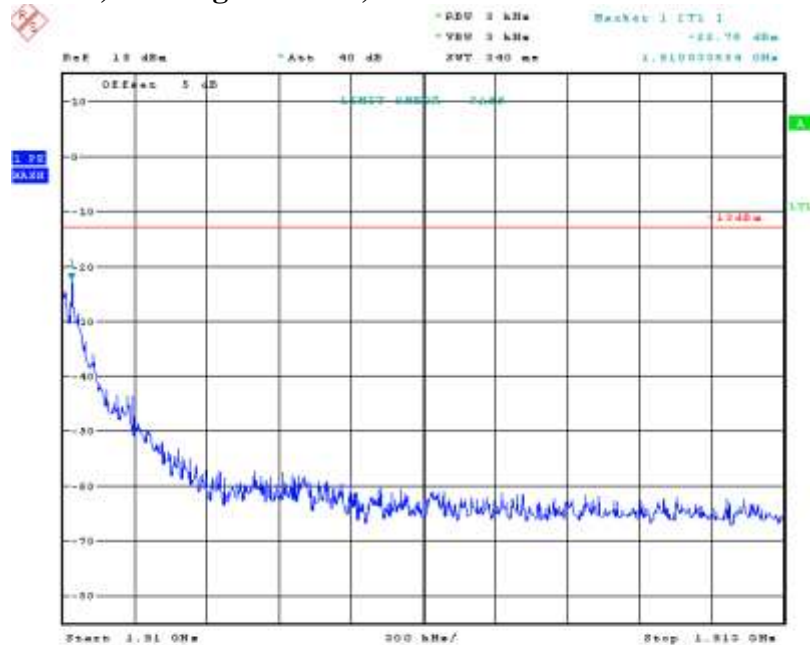

Date: 18.NOV.2010 08:21:47

© 2009 Sierra Wireless, Inc.

The contents of this page are subject to the confidentiality information on page one.

SIERRA WIRELESS, INC.


FCC Part 22, 24 / RSS 132, 133

AirCard 319U

December 17, 2010


Page 30 of 35

Plot 7.4.9) WCDMA; Cellular low channel, below 824 MHz

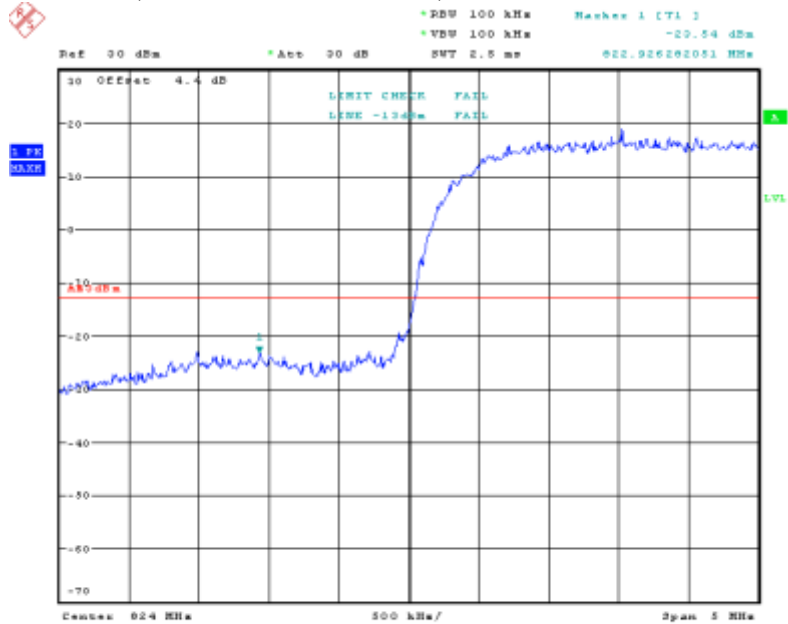

Date: 18.NOV.2010 08:29:12

Plot 7.4.10) WCDMA; Cellular high channel, above 849 MHz

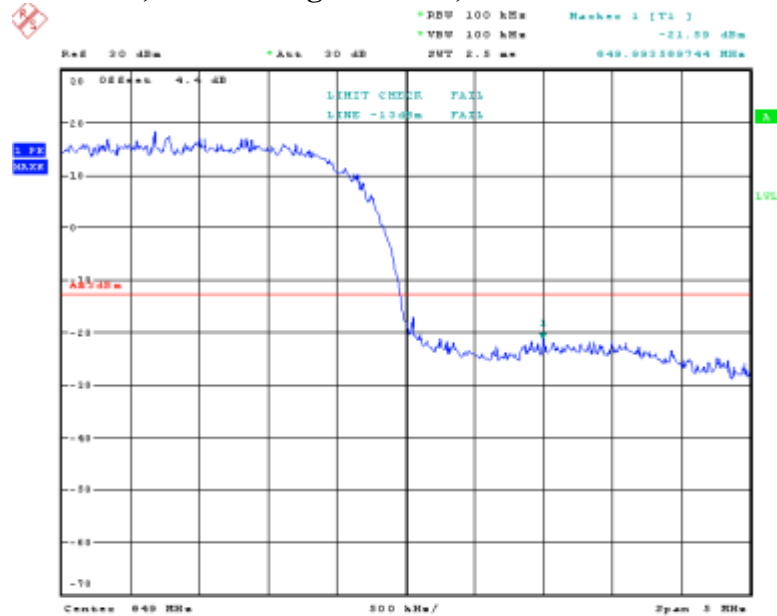


Date: 18.NOV.2010 08:30:14

© 2009 Sierra Wireless, Inc.

The contents of this page are subject to the confidentiality information on page one.


SIERRA WIRELESS, INC.

Plot 7.4.11) WCDMA; PCS low channel, below 1850 MHz

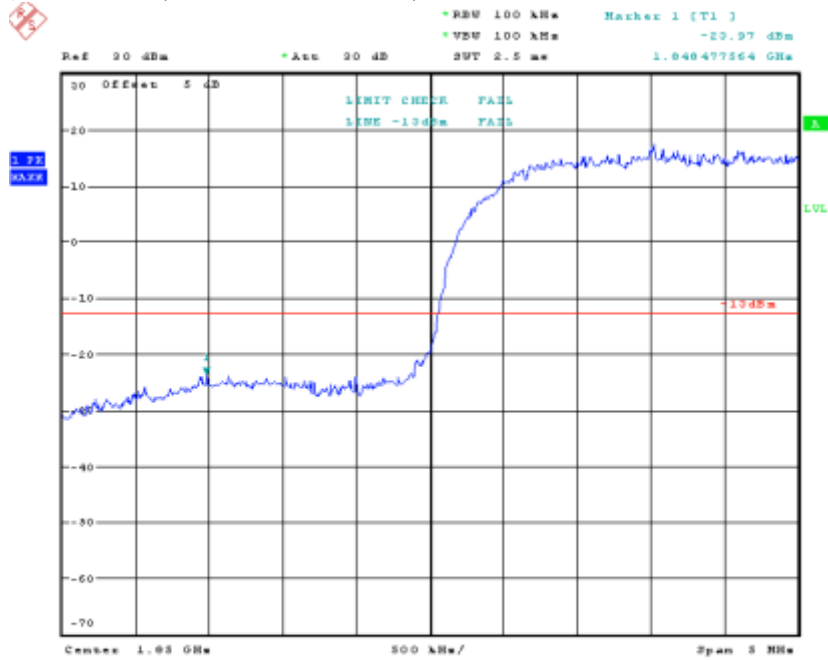

Date: 18.NOV.2010 08:25:56

Plot 7.4.12) WCDMA; PCS high channel, above 1910 MHz

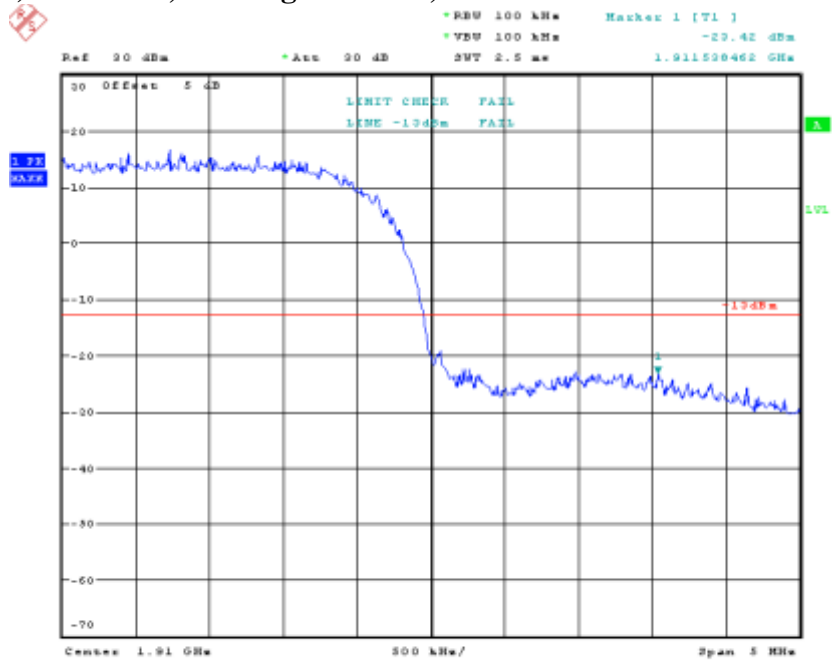

Date: 18.NOV.2010 08:27:44

© 2009 Sierra Wireless, Inc.

The contents of this page are subject to the confidentiality information on page one.

7 Frequency Stability versus Temperature

FCC 2.1055, FCC 22.355, FCC 24.235


7.1 Summary of Results

The EUT's Frequency Stability versus temperature meets the requirements of less than 2.5ppm when temperature varies from -30°C to +50°C.

7.2 Test Procedure

The EUT was placed inside a temperature chamber. The temperature was set to -30°C and maintained to stabilize. After sufficient soak time, the transmitting frequency error was measured. The temperature was then increased by 10 degrees, maintained to stabilize, and the measurement was repeated. This procedure was repeated until +50°C is reached. Frequency metering included internal averaging of the CMU200 to stabilize the reading. Reference power supply voltage for these tests is 5 volts.

Test Setup

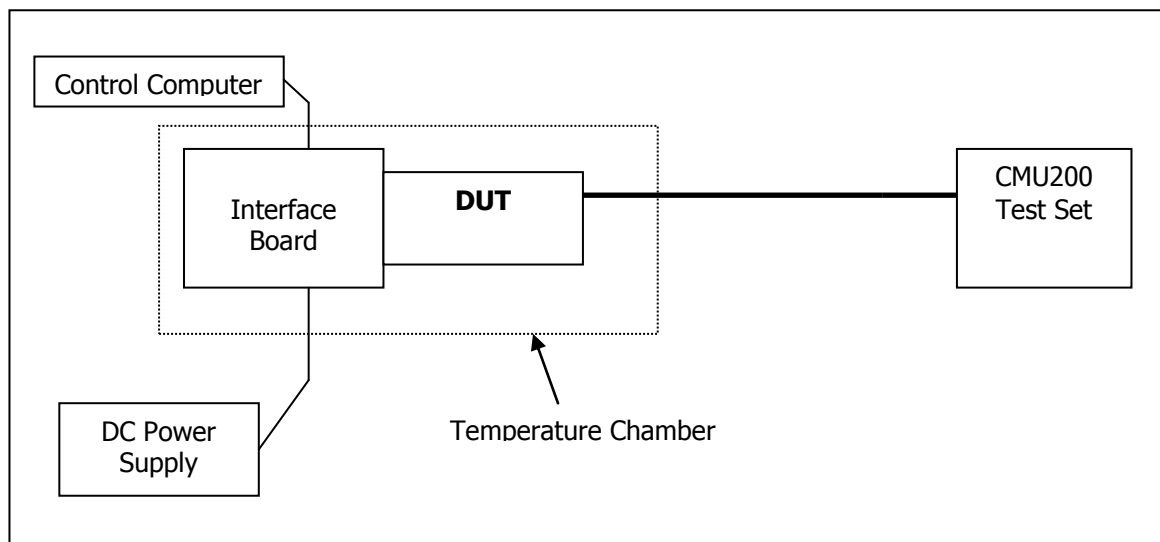

7.3 Test Equipment

EQUIPMENT	MANUFACTURER	MODEL NO.	SERIAL NO.	CAL. DATE
Control Computer	TC	Generic PC	100488	N/A
Wireless Test Set	Rohde & Schwarz	CMU200	117788	November 17, 2008
Spectrum Analyzer	Rohde & Schwarz	FSU	200078	November 15, 2008
DC Power Supply	HP	6632A	3530A	N/A
Interface Board	Shop built	ATEMux	N/A	N/A
Directional Coupler	Pasternack	PE2209-10	N/A	N/A

SIERRA WIRELESS, INC.

FCC Part 22, 24 / RSS 132, 133	AirCard 319U	December 17, 2010	Page 33 of 35
--------------------------------	--------------	-------------------	---------------

7.4 Test Results

7.4.1 GSM Frequency Error over Temperature

Temp (°C)	Cellular Band: 824MHz to 848MHz				PCS Band: 1850MHz to 1910MHz			
	GMSK Mode		8PSK Mode		GMSK Mode		8PSK Mode	
	Offset (Hz)	Offset (ppm)	Offset (Hz)	Offset (ppm)	Offset (Hz)	Offset (ppm)	Offset (Hz)	Offset (ppm)
-30	10.0	0.0180	-39.91	-0.0363	-16.40	-0.0087	-43.65	-0.0232
-20	9.17	0.0192	16.14	0.0095	-8.27	-0.0044	14.69	0.0078
-10	18.6	0.0149	22.73	0.0199	-4.78	-0.0025	0.97	0.0005
0	-1.16	-0.0014	38.97	0.0015	-7.17	-0.0038	18.27	0.0097
10	2.97	0.0036	25.18	0.0039	-0.84	-0.0004	21.41	0.0114
20	-21.10	-0.0252	25.01	0.0012	-16.50	-0.0088	-30.45	-0.0162
30	-5.10	-0.0061	37	0.0223	-20.00	-0.0106	-32.77	-0.0174
40	-26.50	-0.0317	39.58	0.0177	-39.50	-0.0210	-27.64	-0.0147
50	-29.10	-0.0348	18.27	0.0480	-57.90	-0.0308	-67.22	-0.0358

7.4.2 UMTS Frequency Error over Temperature

Temp (°C)	UMTS Mode			
	850 MHz Band		1900 MHz Band	
	Offset (Hz)	Offset (ppm)	Offset (Hz)	Offset (ppm)
-30	1.92	0.0023	-2.91	-0.0016
-20	-1.59	-0.0019	3.16	0.0017
-10	2.17	0.0026	2.24	0.0012
0	-1.91	-0.0023	1.08	0.0006
10	1.62	0.0019	2.96	0.0016
20	0.89	0.0011	3.88	0.0021
30	1.11	0.0013	-2.44	-0.0013
40	-0.81	-0.0010	2.9	0.0015
50	-0.76	-0.0009	3.33	0.0018

8 Frequency Stability versus Voltage

FCC 2.1055, FCC 22.355, FCC 24.235

8.1 Summary of Results


The EUT is specified to operate with a supply voltage varying between 4.75VDC and 5.25VDC, having a nominal voltage of 5 VDC. It meets the frequency stability limit of less than 2.5ppm when supply voltage varies within the specified limits. Operation above or below these voltage limits is prohibited by firmware in order to prevent improper operation.

8.2 Test Procedure

The EUT was connected to a DC Power Supply and a UMTS test set (CMU 200) with frequency error measurement capability. The power supply output was adjusted to the test voltage as measured at the input terminals to the device while transmitting. A voltmeter was used to confirm the terminal voltage. The peak frequency error is recorded (worst case). The test voltages are 4.75 volts to 5.25 volts.

NOTE: Below 3.0V and above 3.6V, the device stops transmitting.

Test Setup

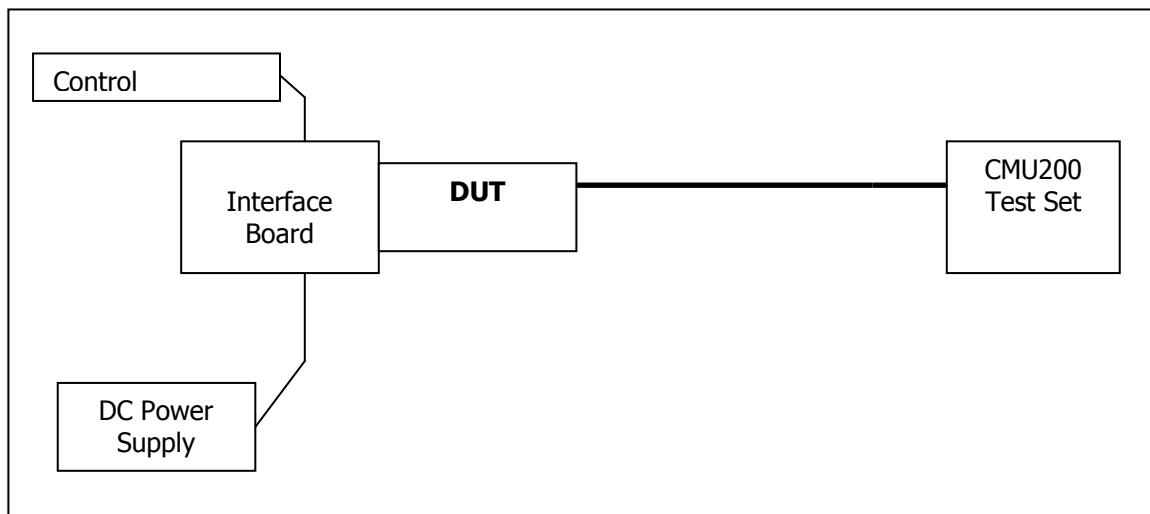

8.3 Test Equipment

EQUIPMENT	MANUFACTURER	MODEL NO.	SERIAL NO.	CAL. DATE
Control Computer	TC	Generic PC	100488	N/A
Wireless Test Set	Rohde & Schwarz	CMU200	117788	November 17, 2008
Spectrum Analyzer	Rohde & Schwarz	FSU	200078	November 15, 2008
DC Power Supply	HP	6632A	3530A	N/A
Interface Board	Shop built	ATEMux	N/A	N/A
Directional Coupler	Pasternack	PE2209-10	N/A	N/A

8.4 Test Results

8.4.1 GSM Frequency Error over Voltage

Voltage (V)	Cellular Band: 824MHz to 848MHz				PCS Band: 1850MHz to 1910MHz			
	GMSK Mode		8PSK Mode		GMSK Mode		8PSK Mode	
	Offset (Hz)	Offset (ppm)	Offset (Hz)	Offset (ppm)	Offset (Hz)	Offset (ppm)	Offset (Hz)	Offset (ppm)
4.75	-53.00	-0.0634	-59.29	-0.0710	-60.15	-0.0320	-69.94	-0.0372
5.0	-32.06	-0.0384	-38.30	-0.0458	-37.20	-0.0198	-27.30	-0.0145
5.25	20.88	0.0250	-22.69	-0.0271	-30.10	-0.0160	-37.86	-0.0201

8.4.2 UMTS Frequency Error over Voltage

Voltage (V)	UMTS Mode			
	850 MHz Band		1900 MHz Band	
	Offset (Hz)	Offset (ppm)	Offset (Hz)	Offset (ppm)
4.75	1.23	0.0015	6.45	0.0034
5.0	-0.69	-0.0008	4.35	0.0023
5.25	2.04	0.0024	2.75	0.0015