

***Specific Absorption Rate (SAR) Test Report***

for

**Sierra Wireless, Inc.**

on the

**CDPD RF Modem**

**Models: AirPath 300**

**FCC ID: N7NACRD2**

Test Report: 20378434

Date of Report: December 7, 2001

Total number of pages in report: 36.



Warnock Hersey



Tested by: <i>oll. yz for</i>	Xi-Ming Yang	Review Date: <i>12/11/01</i>
Reviewed by: <i>David Chernomordik</i>	David Chernomordik	Review Date: <i>12/11/01</i>

All services undertaken are subject to the following general policy: Reports are submitted for exclusive use of the client to whom they are addressed. Their significance is subject to the adequacy and representative character of the samples and to the comprehensiveness of the tests, examinations or surveys made. This report shall not be reproduced except in full, without written consent of Intertek Testing Services, NA Inc.

emc



**Intertek Testing Services NA, Inc.**

1365 Adams Court, Menlo Park, CA 94025

Telephone 650-463-2900 Fax 650-463-2910 Home Page [www.etlsemko.com](http://www.etlsemko.com)



**TABLE OF CONTENTS**

**1.0 JOB DESCRIPTION ..... 2**  
1.1 Client Information..... 2  
1.2 Equipment under test (EUT) ..... 2

**2.0 TEST PLAN REFERENCE ..... 3**  
2.1 System test configuration ..... 3  
2.1.1 System block diagram & Support equipment..... 3  
2.2 Test Position..... 4  
2.3 Test Condition..... 5  
2.4 Modifications required for compliance ..... 5  
2.5 Additions, deviations and exclusions from standards ..... 5

**3.0 SAR EVALUATION..... 6**  
3.1 SAR Limits..... 6  
3.2 Configuration Photographs ..... 7  
3.3 System Verification ..... 11  
3.4 Evaluation Procedures ..... 11

**4.0 TEST RESULTS..... 12**

**5.0 EQUIPMENT..... 14**  
5.1 Equipment List..... 14  
5.2 Tissue Simulating Liquid ..... 15  
5.3 E-Field Probe Calibration..... 16  
5.4 Measurement Uncertainty ..... 16  
5.5 Measurement Traceability..... 16

**6.0 WARNING LABEL INFORMATION - USA ..... 17**

**REFERENCES 18**

**APPENDIX A - SAR Evaluation Data ..... 19**

**APPENDIX B - E-Field Probe Calibration Data..... 27**

**7.0 DOCUMENT HISTORY ..... 36**

**1.0 JOB DESCRIPTION**

1.1 Client Information

The EUT has been tested at the request of:

**Company:** Sierra Wireless, Inc.  
**Address:** 13811 Wireless Way  
Richmond, BC  
Canada, V6V 3A4

**Name of contact:** Mr. Ying Wang

**Telephone:** (605) 231-1100  
**Fax:** (604) 231-1109

1.2 Equipment under test (EUT)

**Product Descriptions:**

Equipment	The Sierra Wireless Model AirPath 300 is a CDPD RF modem with a removable antenna., used in the Handspring Visor line of PDAs		
Trade Name	Sierra Wireless, Inc.	Model No.	AirPath 300
FCC ID	N7NACRD2	S/N No.	269771
Category	Portable	RF Exposure	Uncontrolled Environment
Frequency Band	824-849 MHz	System	CDPD, Release 1.1

EUT Antenna Description			
Type	Monopole	Configuration	Removable, 360° Rotation
Dimensions	13.5 cm (Length)		
Location	Right		

**Use of Product :** Portable personal communications

**Manufacturer:** SAME as above.

**Production is planned:**  Yes,  No

**EUT receive date:** December 5, 2001

**EUT received condition:** Good condition prototype

**Test start date:** December 7, 2001

**Test end date:** December 7, 2001


**2.0 TEST PLAN REFERENCE**

FCC rule part 2.1093, FCC Docket 96-326 & Supplement C to OET Bulletin 65 (01-01)

2.1 System test configuration

2.1.1 System block diagram & Support equipment

Tested with hand spring hand held PDA, model: Visor Deluxe 1001E.

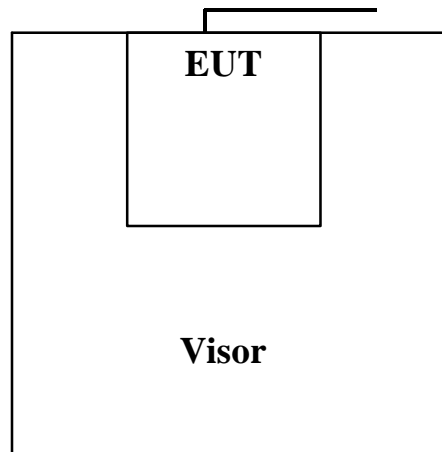


2.2 Test Position


Three test configurations were used to show compliance with the FCC RF human exposure requirements. In all configurations, the AirPath 300 was configured for testing in a typical fashion (as a customer would normally use it). Due to the application and usage of the product, SAR measurements with the human head region are not necessary. Table 1 below describes the setup and condition:

Table 1, Equipment Setup	
Configuration	Description
A	<ul style="list-style-type: none"> <li>PDA in horizontal position, Antenna in horizontal position, 22.5 mm distance from antenna to Phantom. Simulating close proximity of human body.</li> </ul>
B	<ul style="list-style-type: none"> <li>PDA in vertical position, Antenna in horizontal position, 22.5 mm distance from antenna to Phantom. Simulating close proximity of human body.</li> </ul>

**Configuration A**

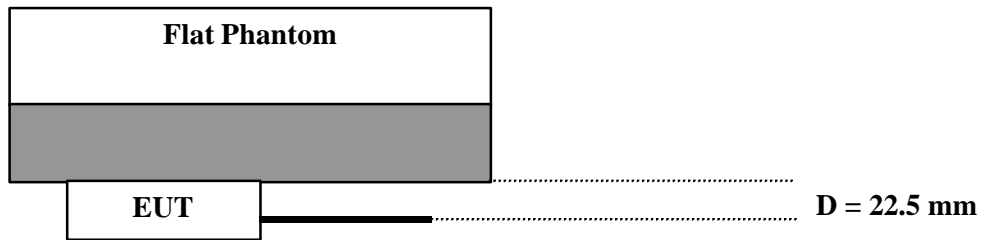

**Configuration B**

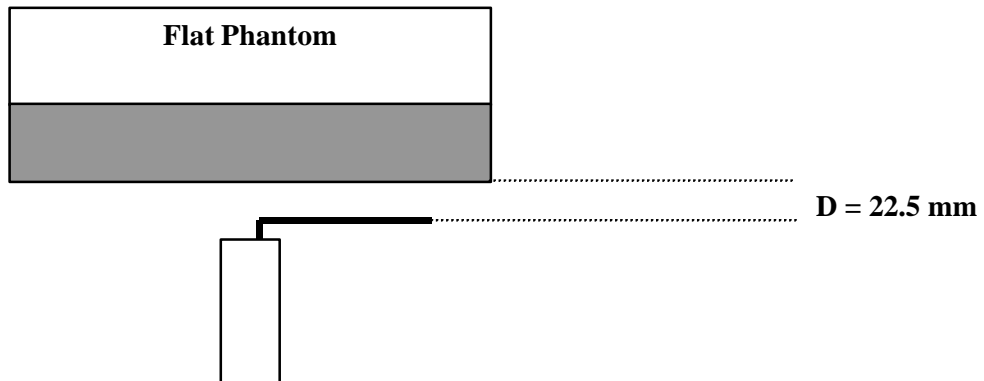

2.3 Test Condition

During tests, the worst case data (max RF coupling) was determined with following conditions:

EUT Antenna	Fixed	Orientation	Normal
Usage	Face-up	Distance between antenna axis at the joint and the liquid surface:	22.5 mm, PDA Position: face-up 22.5 mm, PDA Position: upright
Simulating human hand	Not Used	EUT Battery	Fully Charged
Power output (conducted)	27.8 dBm		

The spatial peak SAR values were accessed for lowest, middle and highest operating channels defined by the manufacturer. Tests were performed in CW mode.

2.4 Modifications required for compliance

No modifications were implemented by Intertek Testing Services.

2.5 Additions, deviations and exclusions from standards

No additions, deviations or exclusions have been made from standard.

### 3.0 SAR EVALUATION


#### 3.1 SAR Limits

The following FCC limits for SAR apply to devices operate in General Population/Uncontrolled Exposure environment:

<b>EXPOSURE (General Population/Uncontrolled Exposure environment)</b>	<b>SAR (W/kg)</b>
Average over the whole body	0.08
Spatial Peak (1g)	1.60
Spatial Peak for hands, wrists, feet and ankles (10g)	4.00

3.2 Configuration Photographs


**SAR measurement Test Setup**

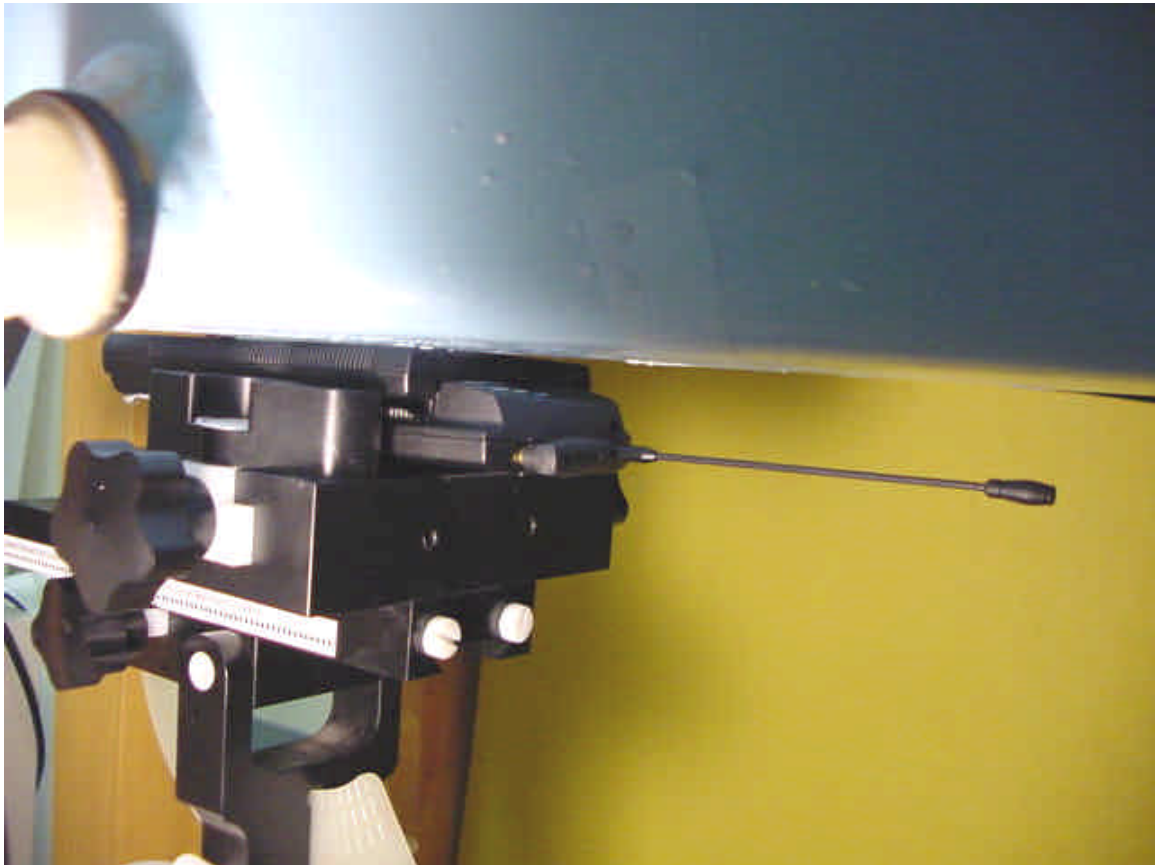




3.2 Configuration Photographs Continued

**SAR Measurement Test Setup**

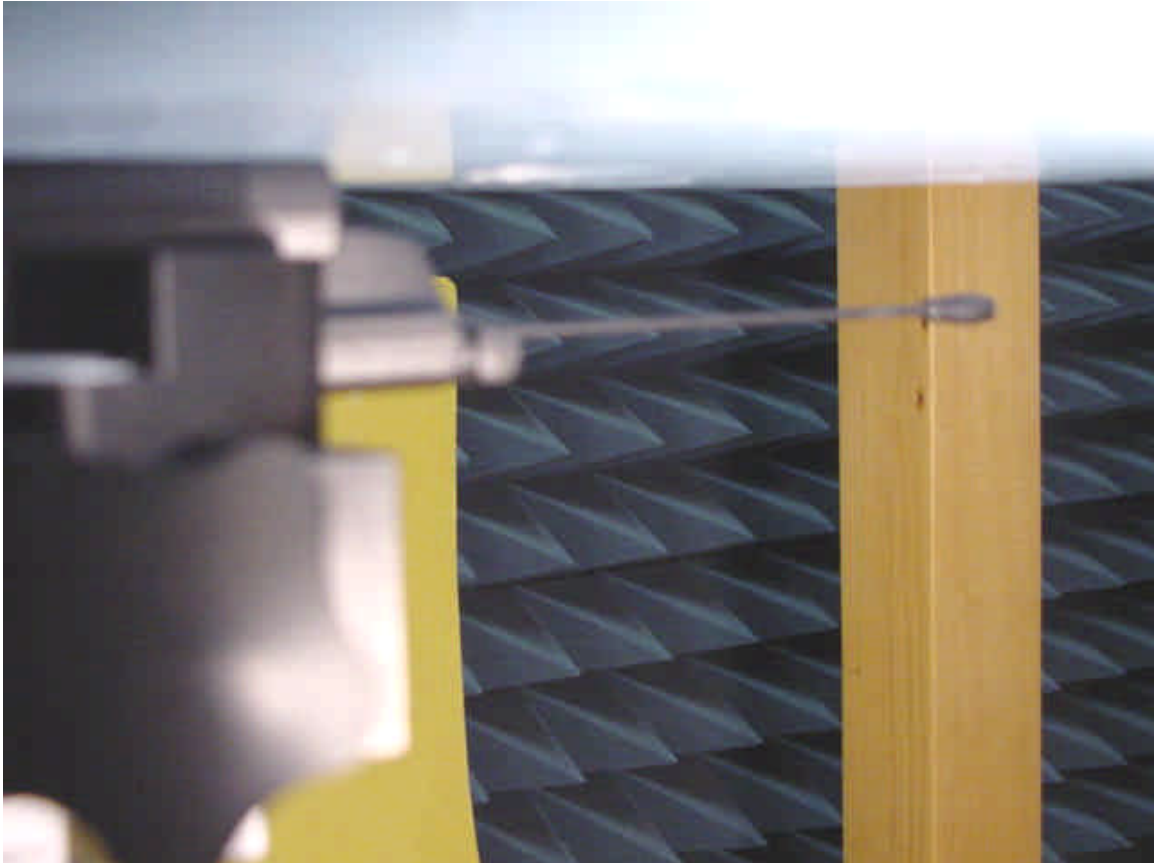

3.2 Configuration Photographs – Continued

**SAR Measurement Test Setup**

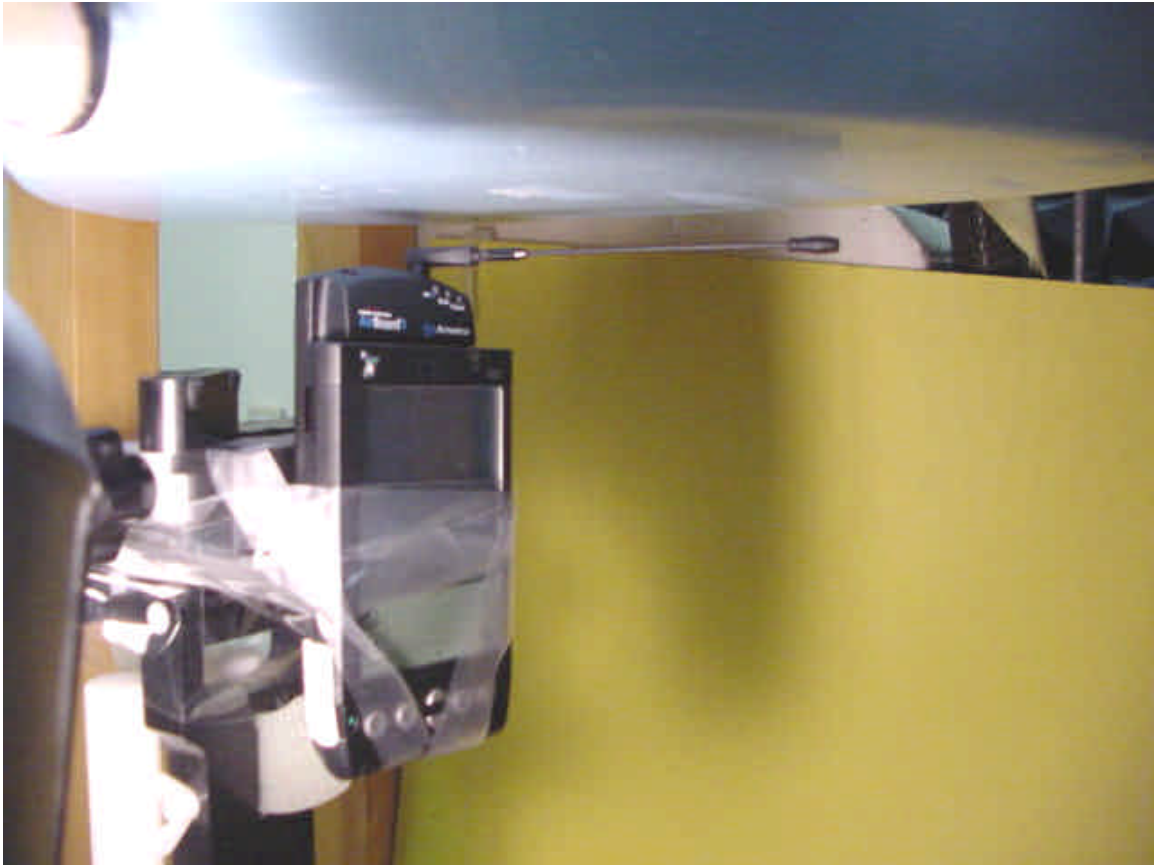

3.2 Configuration Photographs – Continued

**SAR Measurement Test Setup**



3.3 System Verification

Prior to the assessment, the system was verified to the  $\pm 10\%$  of the specifications by using the system validation kit. The validation was performed at 900 MHz using the Tissue Simulating Liquid for brain.

Validation kit	Targeted SAR <sub>1g</sub> (mW/g)	Measured SAR <sub>1g</sub> (mW/g)
D900V2, S/N #: 013	2.77	2.74 *

\* see plot #7 in the Appendix A

3.4 Evaluation Procedures

The SAR evaluation was performed with the following procedures:

- a. SAR was measured at a fixed location above the ear point and used as a reference value for the assessing the power drop.
- b. The SAR distribution at the exposed side of the head was measured at a distance of 4.0 mm from the inner surface of the shell. The area covered the entire dimension of the head and the horizontal grid spacing was 20 mm x 20 mm. Based on this data, the area of the maximum absorption was determined by spline interpolation.
- c. Around this point, a volume of 32 mm x 32 mm x 34 mm was assessed by measuring 5 x 5 x 7 points. On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure:
  - I) The data at the surface were extrapolated, since the center of the dipoles is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measurement point is 1.6 mm. The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in Z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.
    - ii) The maximum interpolated value was searched with a straight-forward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1g or 10g) were computed using the 3-D spline interpolation algorithm. The 3-D spline is composed of three one-dimensional splines with the “Not a knot” condition (in x, y and z directions). The volume was integrated with the trapezoidal algorithm. 1000 points (10 x 10 x 10) were interpolated to calculate the average.
    - iii) All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
- d. Re-measurement of the SAR value at the same location as in step a. above. If the value changed by more than 5 %, the evaluation was repeated.

#### **4.0 TEST RESULTS**

The results on the following page(s) were obtained when the device was tested in the condition described in this report. Detail measurement data and plots, which reveal information about the location of the maximum SAR with respect to the device, are reported in Appendix A.

<b>Trade Name:</b>	Sierra Wireless, Inc.	<b>Model No.:</b>	AirPath 300
<b>Serial No.:</b>	Not Labeled	<b>Test Engineer:</b>	Xi-Ming Yang

TEST CONDITIONS			
Ambient Temperature	21.5 °C	Relative Humidity	39 %
Test Signal Source	Test Mode	Signal Modulation	CW
Output Power Before SAR Test	27.8 dBm	Output Power After SAR Test	27.8 dBm
Test Duration	23 Min.	Number of Battery Change	Every Scan

PDA Position: Face-up					
Channel MHz	Operating Mode	Crest Factor	Antenna Position From Phantom	Measured SAR <sub>1g</sub> (mW/g)	Plot Number
824	CW	1	22.5 mm	1.13	1
836	CW	1	22.5 mm	1.00	2
849	CW	1	22.5 mm	1.28	4

PDA Position: upright					
Channel MHz	Operating Mode	Crest Factor	Antenna Position From Phantom	Measured SAR <sub>1g</sub> (mW/g)	Plot Number
824	CW	1	22.5 mm	1.28	5
836	CW	1	22.5 mm	1.32	6
849	CW	1	22.5 mm	1.34	3

Note: a) Worst case data were reported  
b) Uncertainty of the system is not included

**5.0 EQUIPMENT**

5.1 Equipment List

The Specific Absorption Rate (SAR) tests were performed with the SPEAG model DASY 3 automated near-field scanning system, which is a package, optimized for dosimetric evaluation of mobile radios [3]. The following major equipment/components were used for the SAR evaluations:

SAR Measurement System			
EQUIPMENT	SPECIFICATIONS	S/N #	CAL. DATE
Robot	<b>Stäubli RX60L</b>	597412-01	N/A
	Repeatability: ± 0.025mm Accuracy: 0.806x10 <sup>-3</sup> degree Number of Axes: 6		
E-Field Probe	<b>ET3DV5</b>	1333	04/23/01
	Frequency Range: 10 MHz to 6 GHz Linearity: ± 0.2 dB Directivity: ± 0.1 dB in brain tissue		
Data Acquisition	<b>DAE3</b>	317	N/A
	Measurement Range: 1µV to >200mV Input offset Voltage: < 1µV (with auto zero) Input Resistance: 200 M		
Phantom	<b>Generic Twin V3.0</b>	N/A	N/A
	Type: Generic Twin, Homogenous Shell Material: Fiberglass Thickness: 2 ± 0.1 mm Capacity: 20 liter Ear spacer: 4 mm (between EUT ear piece and tissue simulating liquid)		
Simulated Tissue	<b>Mixture</b>	N/A	12/7/01
	Please see section 6.2 for details		
Power Meter	<b>HP 8900D</b> w/ 84811A sensor	3607U00673	08/10/01
	Frequency Range: 100kHz to 18 GHz Power Range: 300µW to 3W		

5.2 Tissue Simulating Liquid

Muscle	
Ingredient	Frequency (800 – 900 MHz)
Water	52.4 %
Sugar	45.0 %
HEC	1.0 %
Salt	1.4 %
Bactericide	0.1%

The dielectric parameters were verified prior to assessment using the HP 85070A dielectric probe kit and the HP 8753C network Analyzer. The dielectric parameters were:

Frequency (MHz)	$\epsilon_r^*$	$\sigma^*$ (mho/m)	$\rho^{**}$ (kg/m <sup>3</sup> )
835	56.2	0.96	1000

\* *worst case uncertainty of the HP 85070A dielectric probe kit*

\*\* *worst case assumption*

Note: The amounts of each ingredient specified in the tables are not the exact amounts of the final test solution. The final test solution was adjusted by adding small amounts of water, sugar, and/or salt to calibrate the solution to meet the proper dielectric parameters.



5.3 E-Field Probe Calibration

Probes were calibrated by the manufacturer in the TEM cell ifi 110. To ensure consistency, a strict protocol was followed. The conversion factor (ConF) between this calibration and the measurement in the tissue simulation solution was performed by comparison with temperature measurement and computer simulations. Probe calibration factors are included in Appendix B.

5.4 Measurement Uncertainty

The uncertainty budget has been determined for the DASY3 measurement system according to the NIS81 [5] and the NIST 1297 [6] documents and is given in the following table. The extended uncertainty (K=2) was assessed to be 23.5 %

UNCERTAINTY BUDGET				
Uncertainty Description	Error	Distrib.	Weight	Std.Dev.
Probe Uncertainty				
Axial isotropy	±0.2 dB	U-shape	0.5	±2.4 %
Spherical isotropy	±0.4 dB	U-shape	0.5	±4.8 %
Isotropy from gradient	±0.5 dB	U-shape	0	
Spatial resolution	±0.5 %	Normal	1	±0.5 %
Linearity error	±0.2 dB	Rectang.	1	±2.7 %
Calibration error	±3.3 %	Normal	1	±3.3 %
SAR Evaluation Uncertainty				
Data acquisition error	±1 %	Rectang.	1	±0.6 %
ELF and RF disturbances	±0.25 %	Normal	1	±0.25 %
Conductivity assessment	±10 %	Rectang.	1	±5.8 %
Spatial Peak SAR Evaluation Uncertainty				
Extrapol boundary effect	±3 %	Normal	1	±3 %
Probe positioning error	±0.1 mm	Normal	1	±1 %
Integrat. And cube orient	±3 %	Normal	1	±3 %
Cube shape inaccuracies	±2 %	Rectang.	1	±1.2 %
Device positioning	±6 %	Normal	1	±6 %
Combined Uncertainties				<b>±11.7 %</b>

5.5 Measurement Traceability

All measurements described in this report are traceable to National Institute of Standards and Technology (NIST) standards or appropriate national standards.

**6.0 WARNING LABEL INFORMATION - USA**

To satisfy FCC radio-frequency exposure requirements, the antenna for this device must be placed 2.25 centimeters or more from all persons, while it is in operation.


## REFERENCES


- [1] ANSI, *ANSI/IEEE C95.1-1991: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3kHz to 300 Ghz*, The Institute of electrical and Electronics Engineers, Inc., New York, NY 10017, 1992
- [2] Federal Communications Commission, "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields", OET Bulletin 65, FCC, Washington, D.C. 20554, 1997
- [3] Thomas Schmid, Oliver Egger, and Niels Kuster, "Automated E-field scanning system for dosimetric assessments", *IEEE Transaction on Microwave Theory and Techniques*, vol. 44, pp. 105-113, Jan. 1996.
- [4] Niels Kuster, Ralph Kastle, and Thomas Schmid, "Dosimetric evaluation of mobile communications equipment with know precision", *IEICE Transactions on Communications*, vol. E80-B, no. 5, pp.645-652, May 1997.
- [5] NIS81, NAMAS, "The treatment of uncertainty in EMC measurement", Tech. Rep., NAMAS Executive, National Physical Laboratory, Teddinton, Middlesex, England, 1994.
- [6] Barry N. Taylor and Chris E. Kuyatt, "Guidelines for evaluating and expressing the uncertainty of NIST measurement results", Tech. Rep., National Institute of Standards and Technology, 1994.


**APPENDIX A - SAR Evaluation Data**


Please note that the graphical visualization of the phone position onto the SAR distribution gives only limited information on the current distribution of the device, since the curvature of the head results in graphical distortion. Full information can only be obtained either by H-field scans in free space or SAR evaluation with a flat phantom.

**Power drift** is the measurement of power drift of the device over one complete SAR scan.

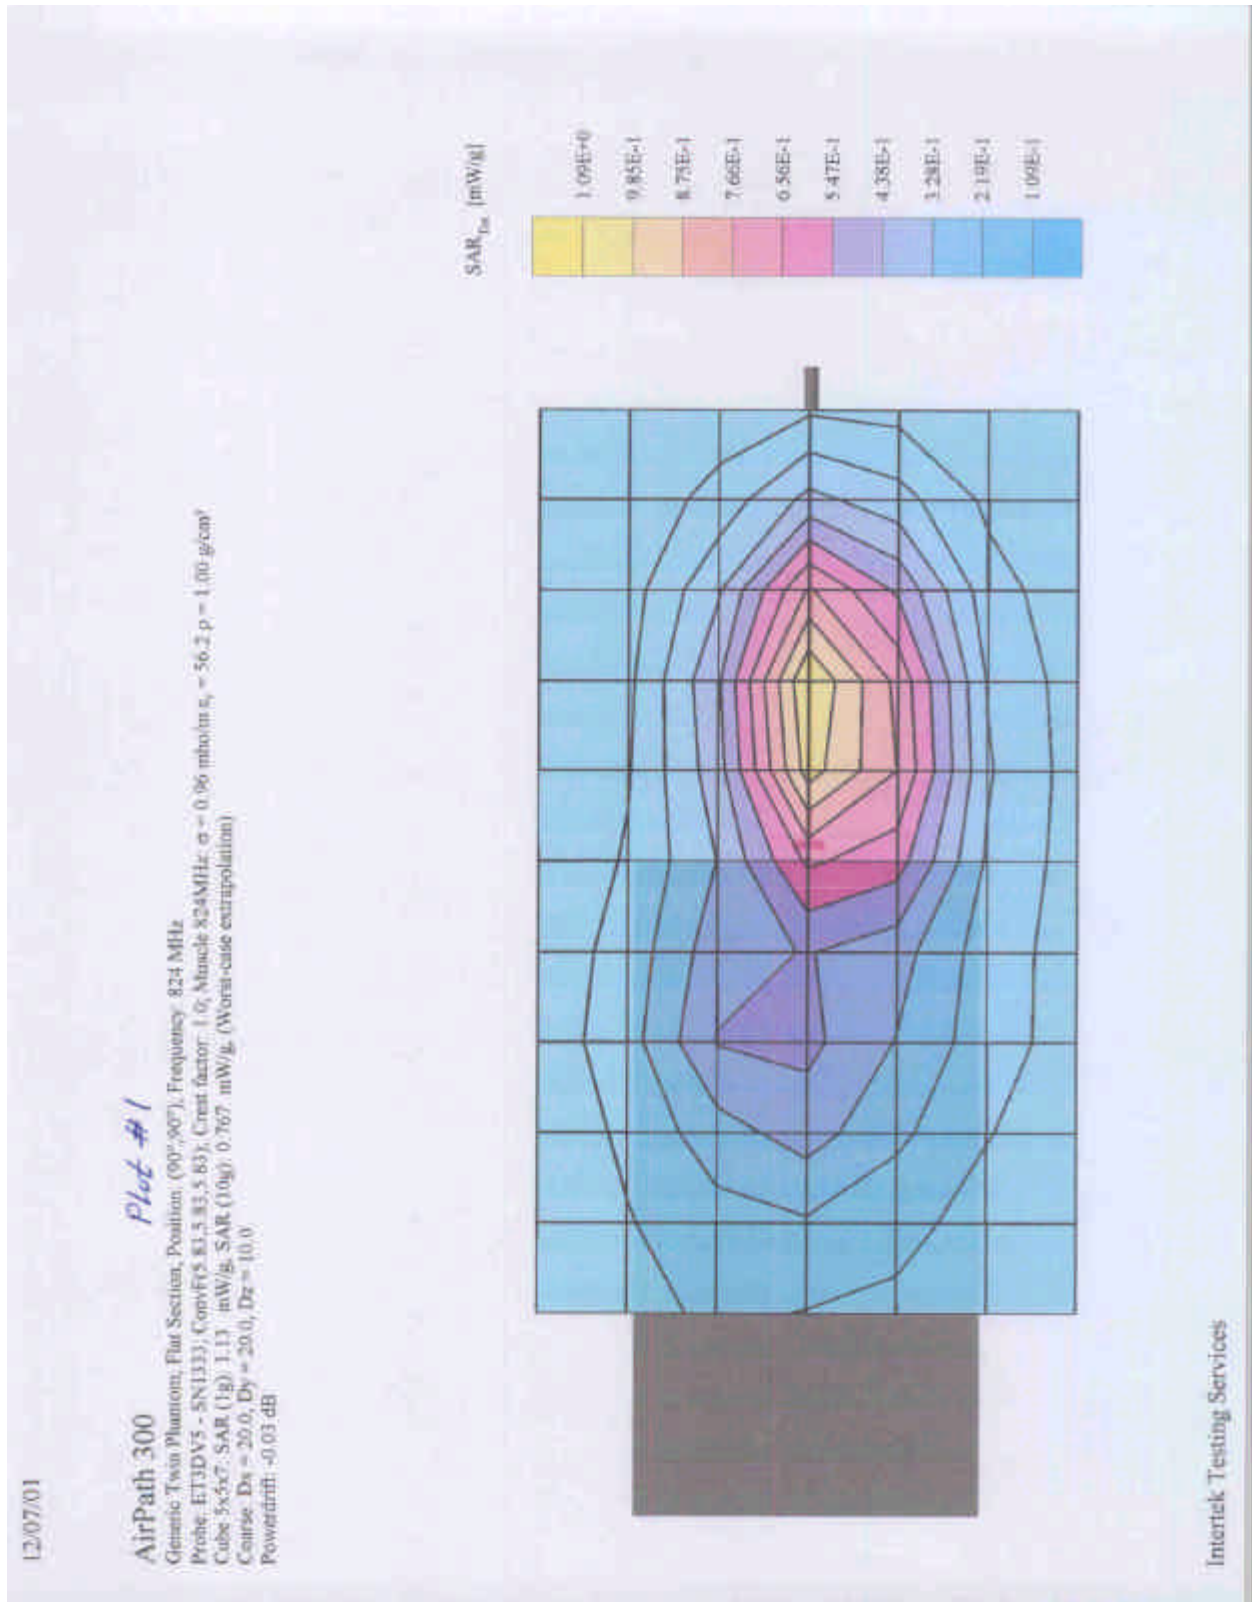


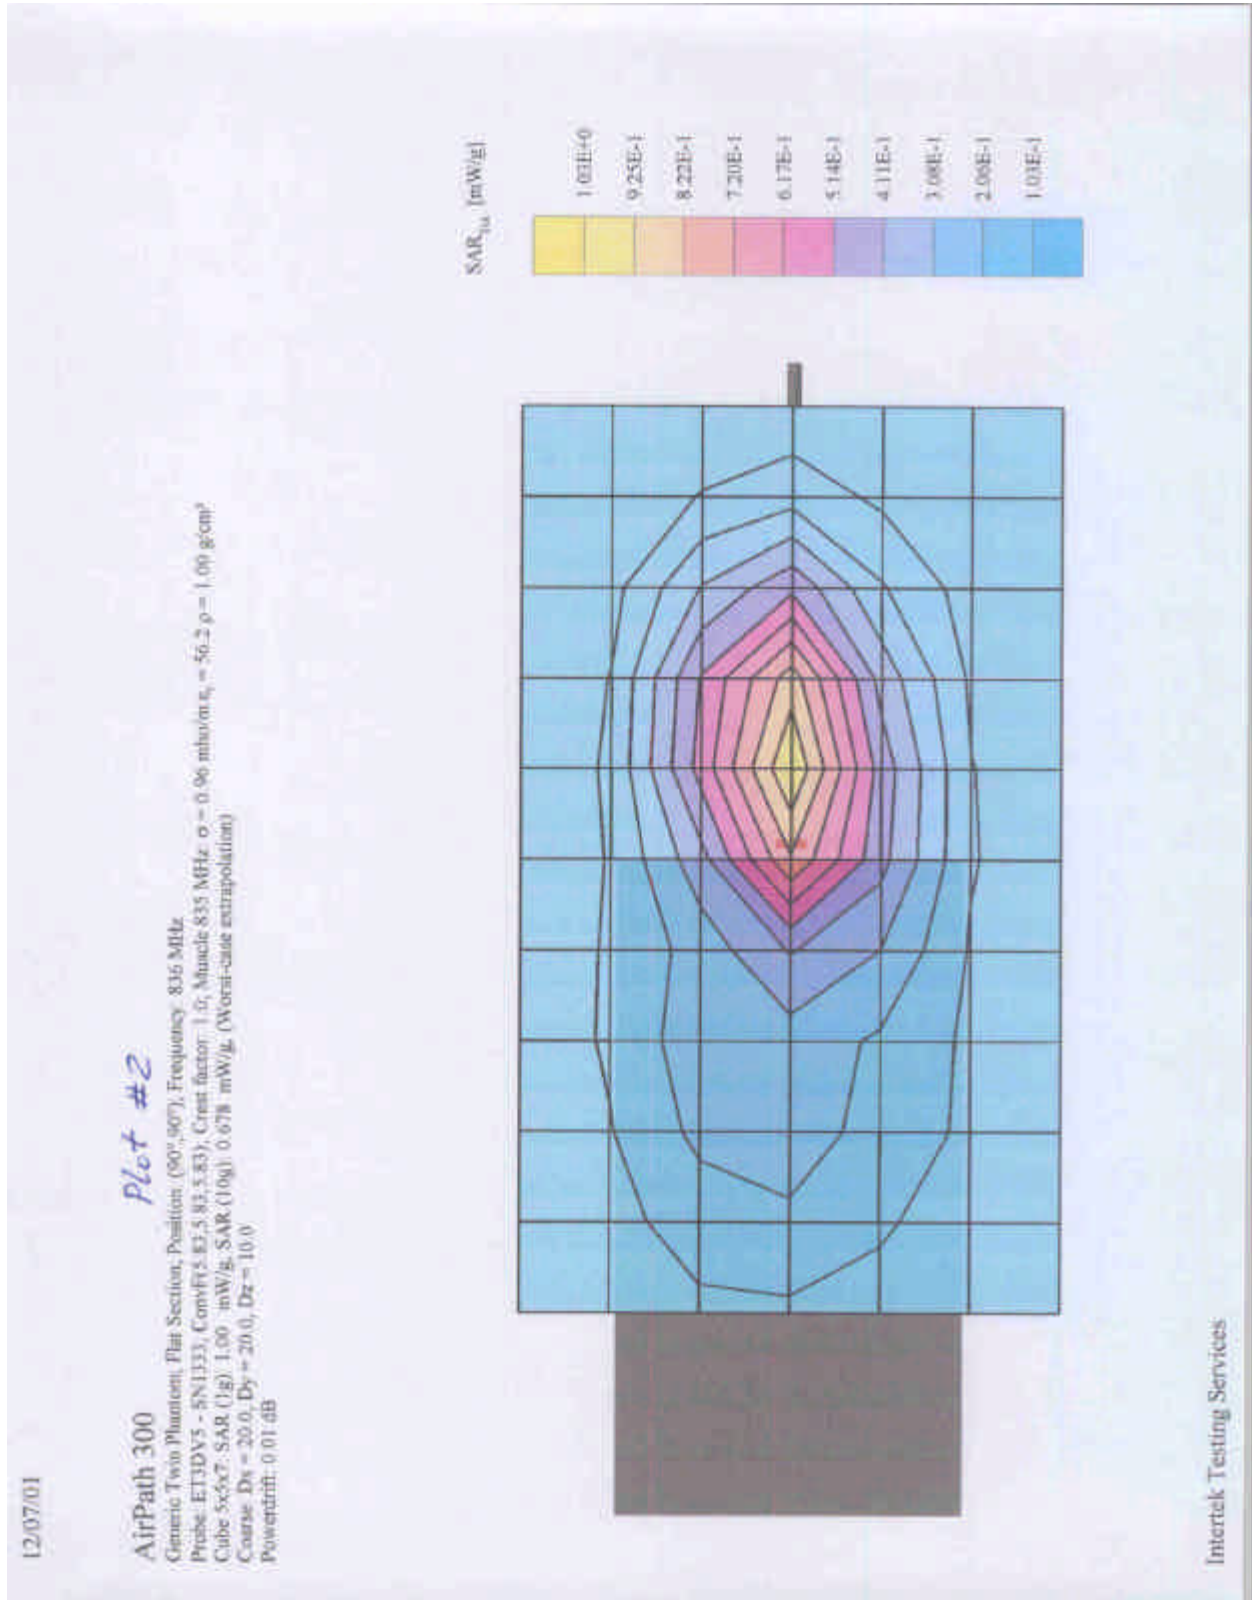


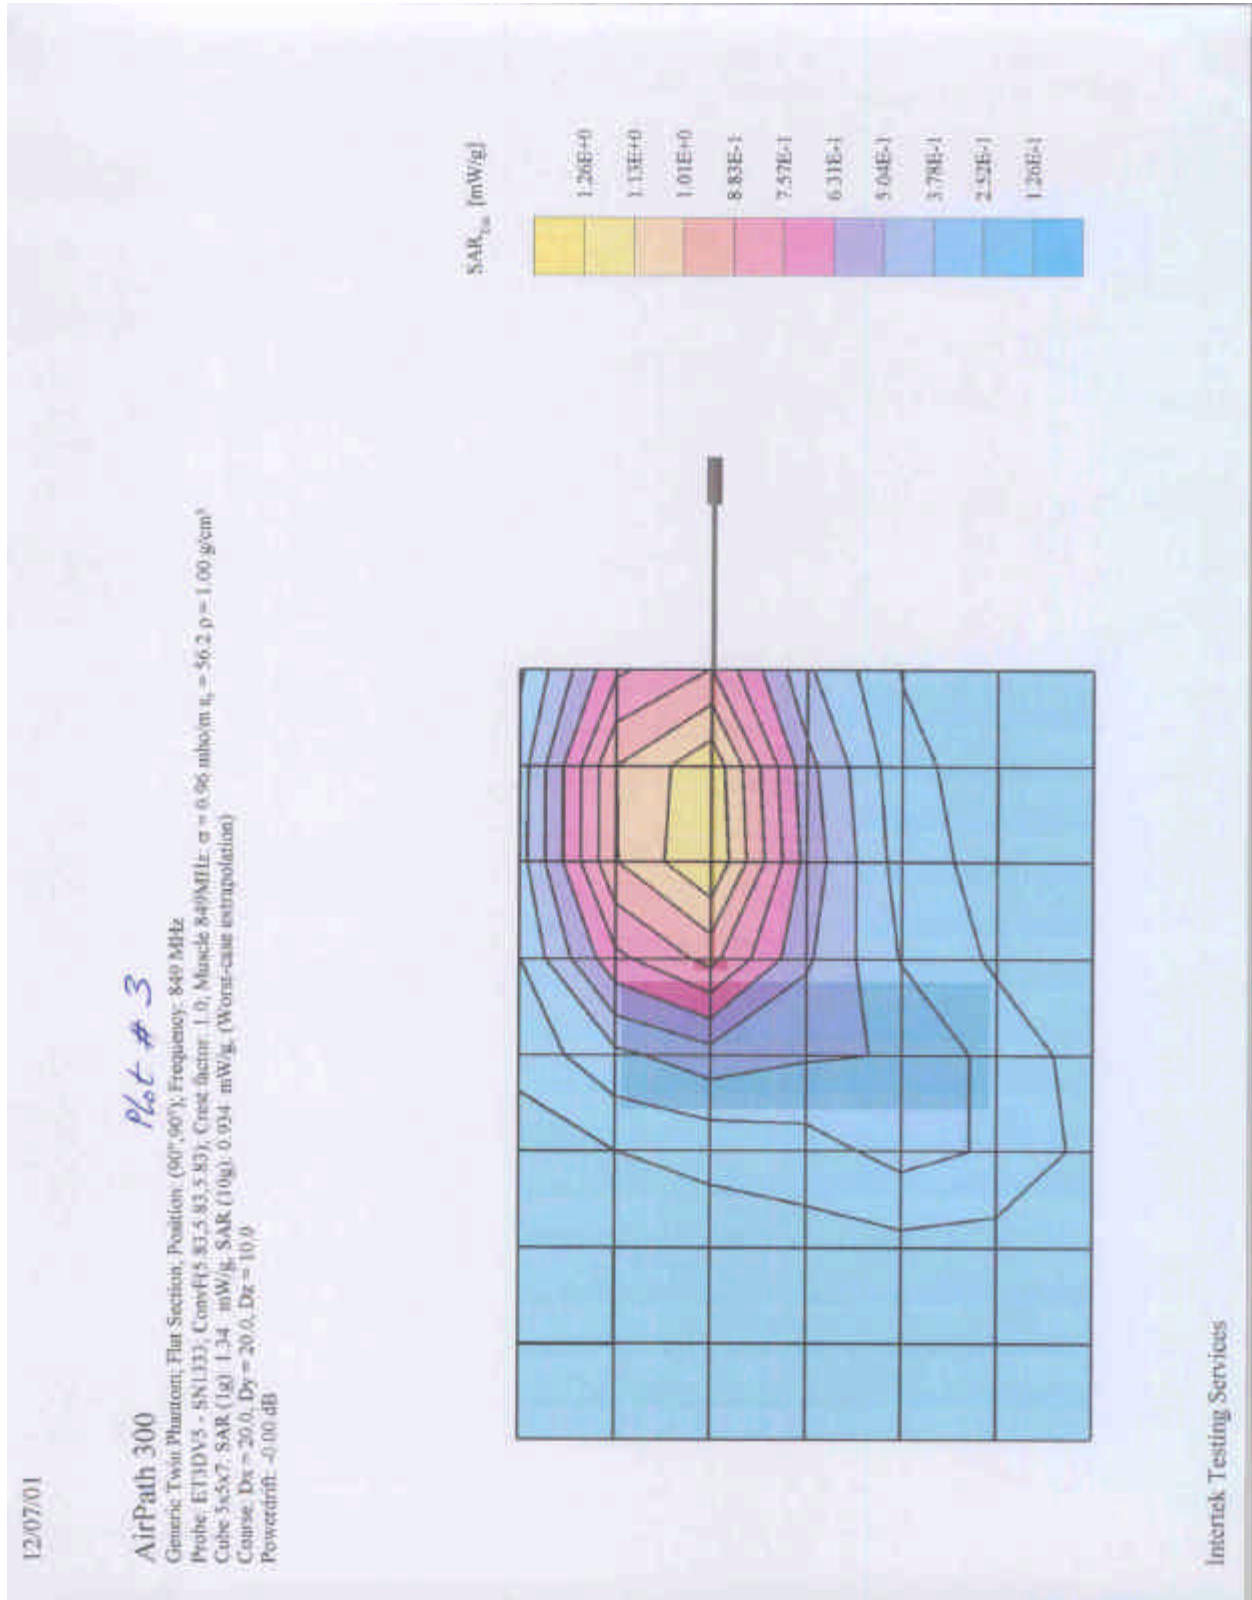


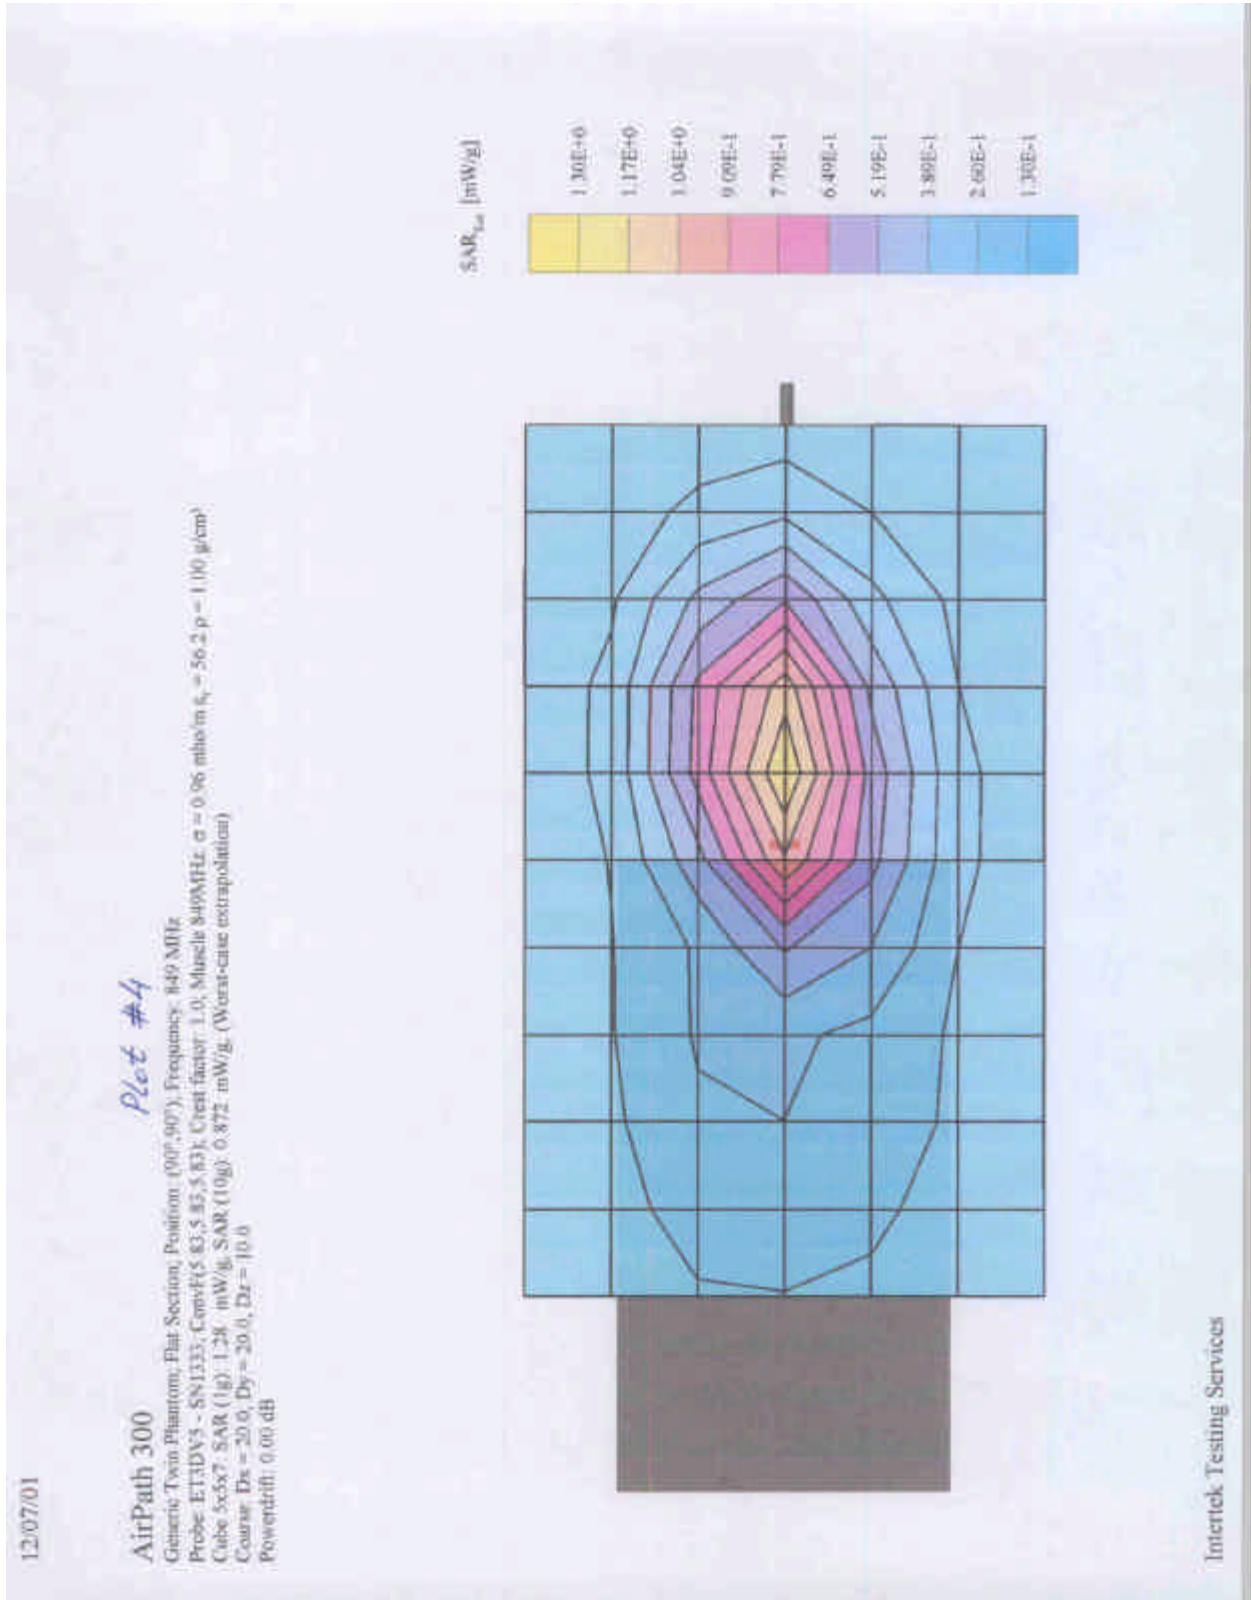



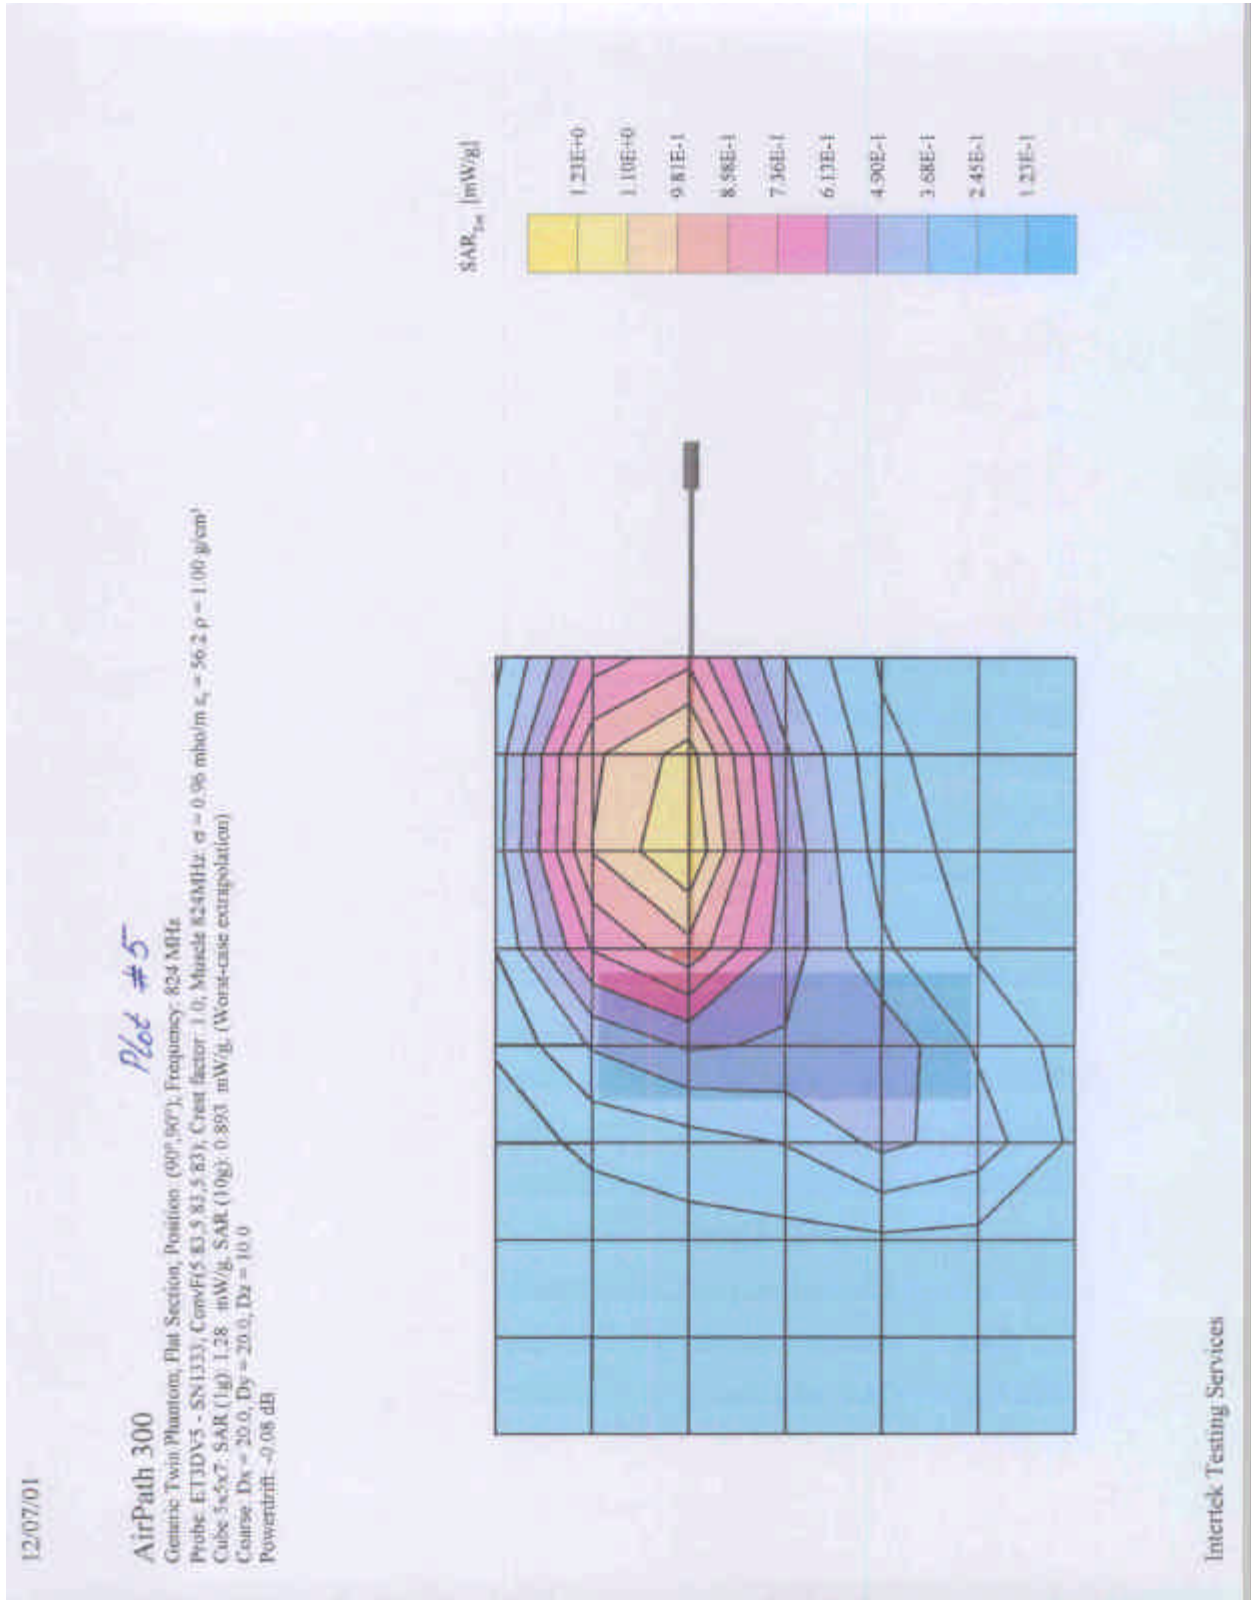

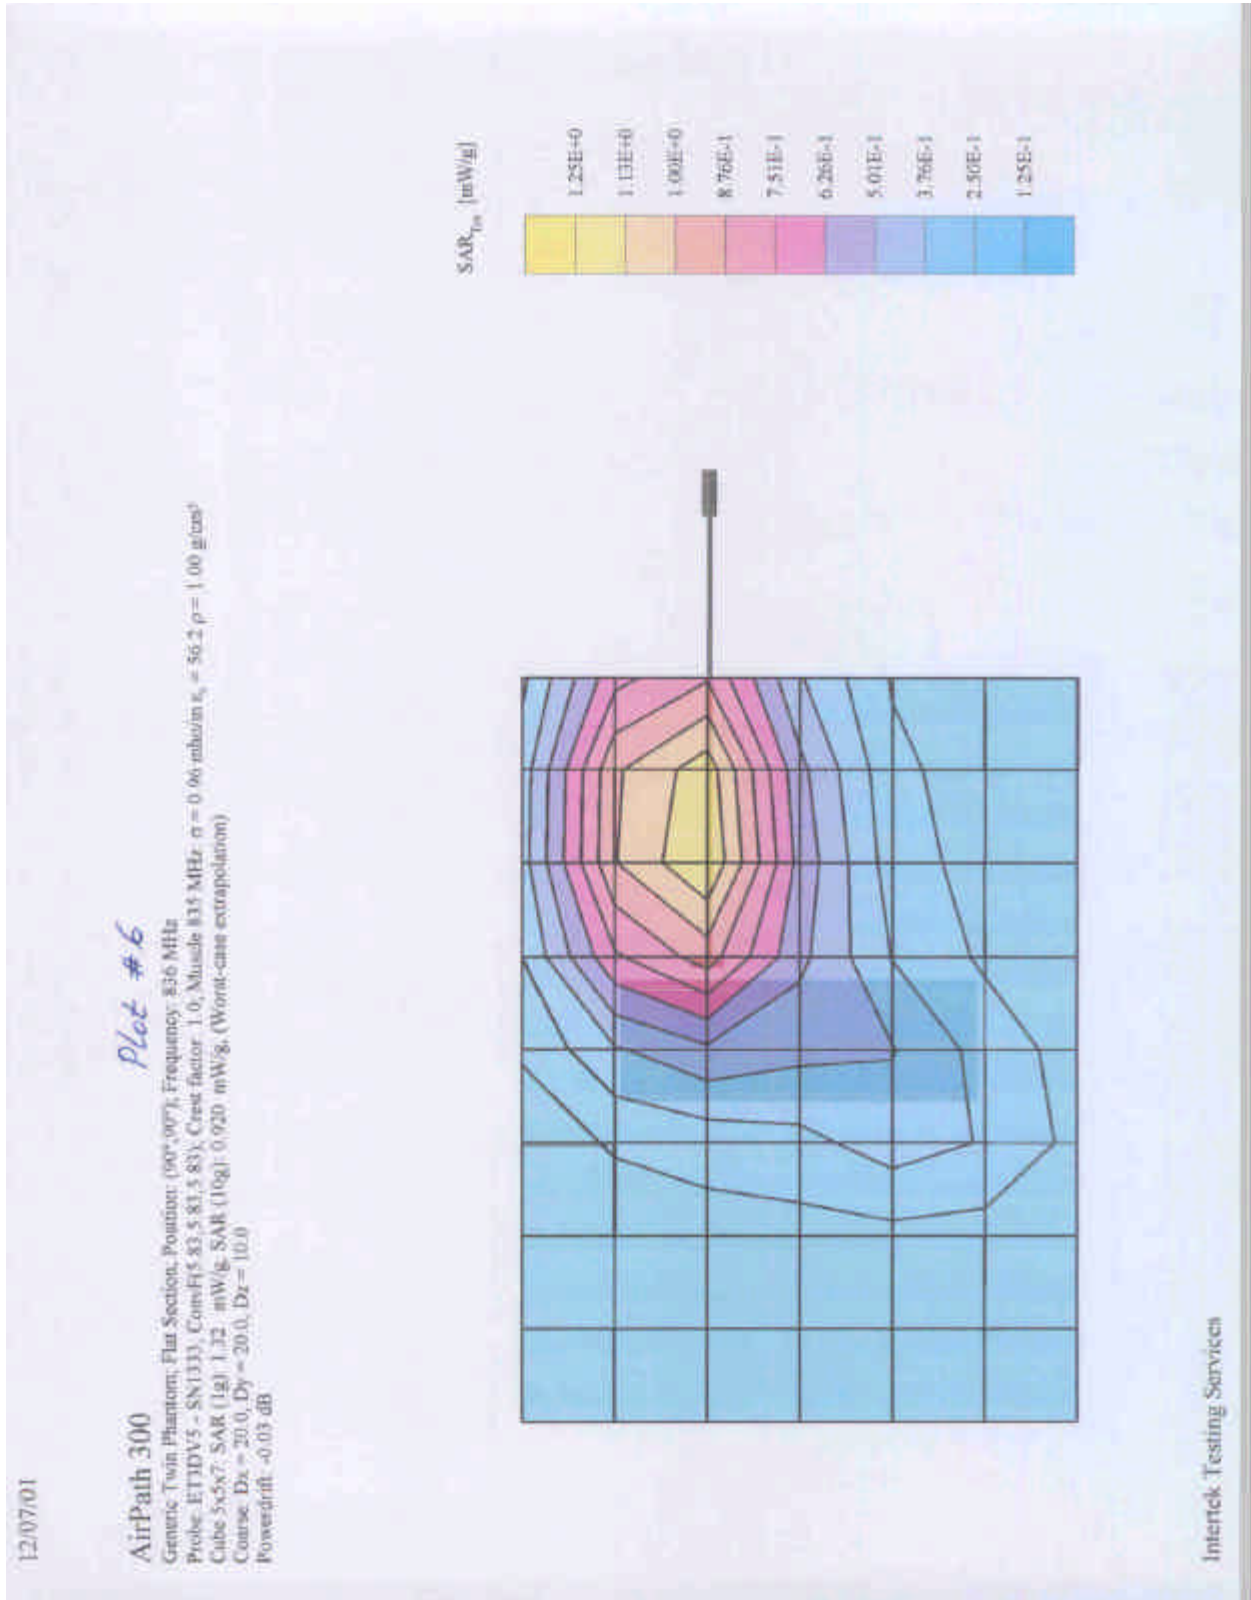

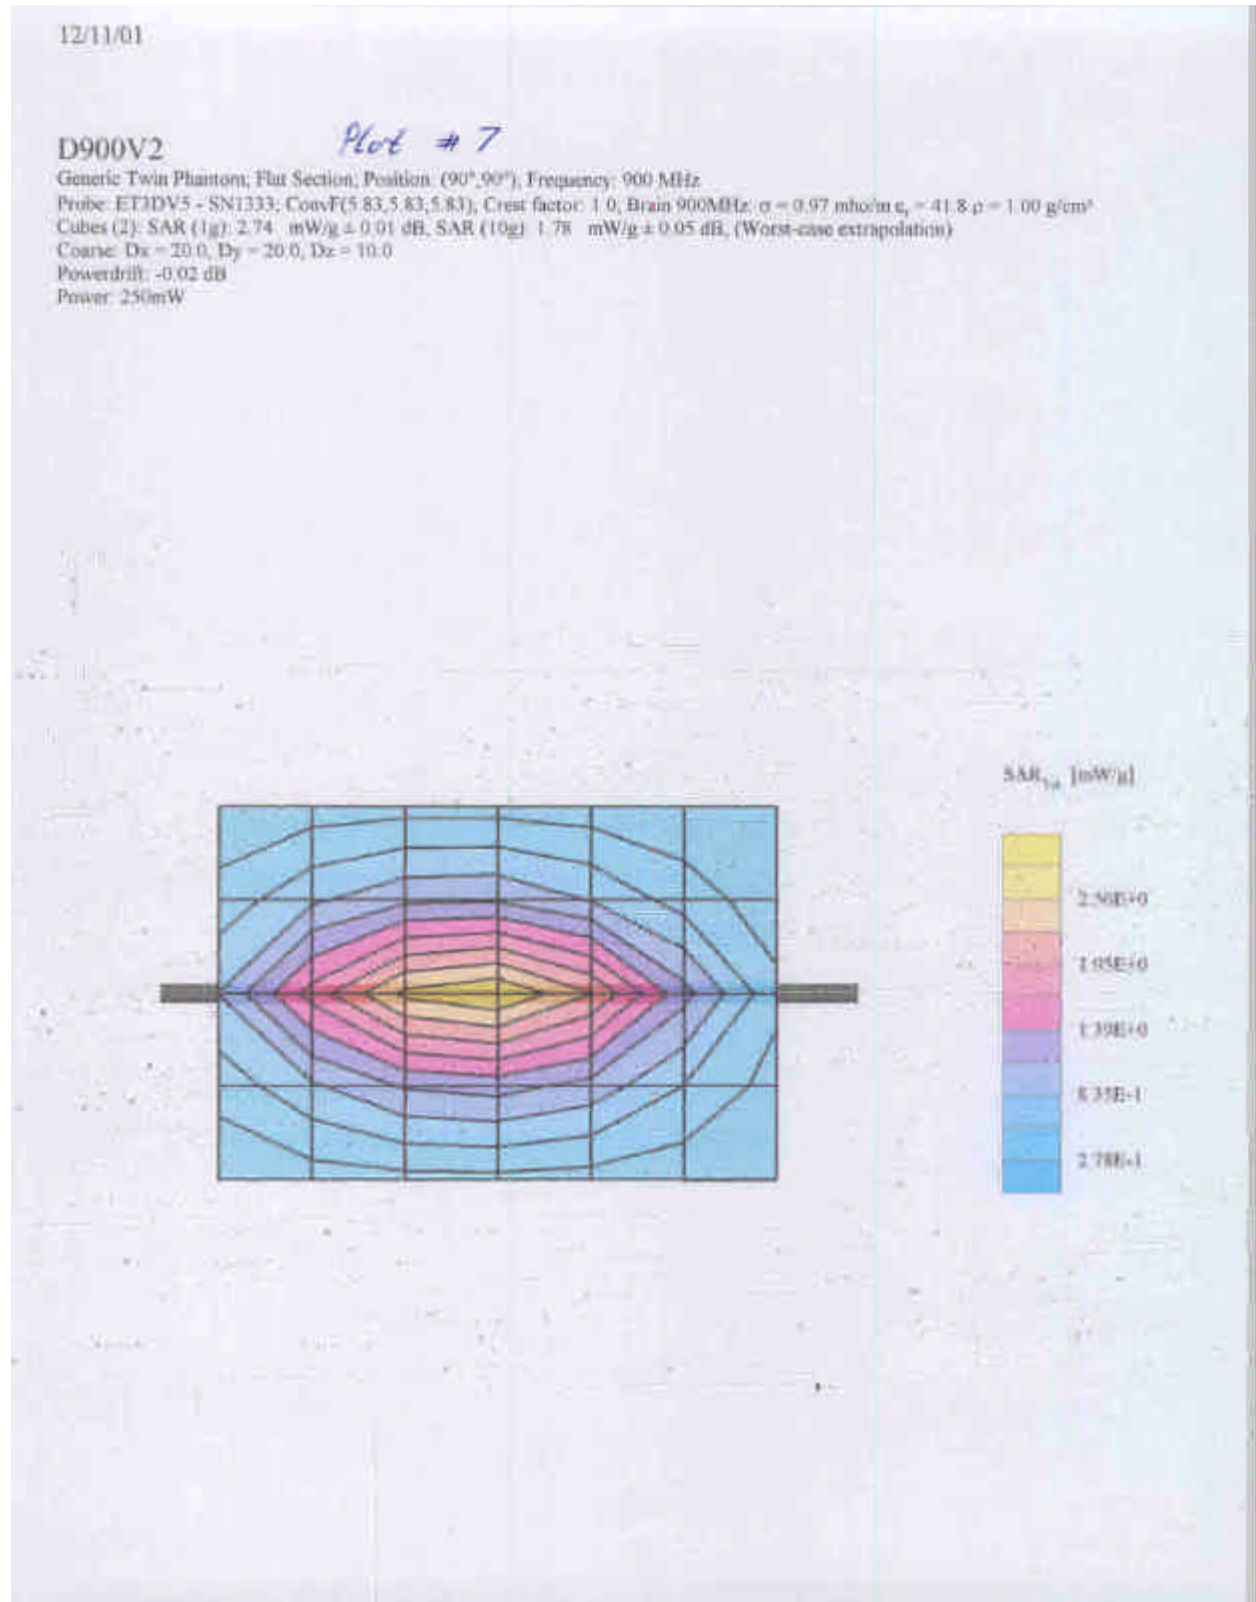

**APPENDIX B - E-Field Probe Calibration Data**  
See attached pages.



## Schmid & Partner Engineering AG

Zeughausstrasse 43, 8004 Zurich, Switzerland, Phone +41 1 245 97 00, Fax +41 1 245 97 79

### Calibration Certificate

#### Dosimetric E-Field Probe

Type:

ET3DV5

Serial Number:

1333

Place of Calibration:

Zurich

Date of Calibration:

April 23, 2001

Calibration Interval:

12 months

Schmid & Partner Engineering AG hereby certifies, that this device has been calibrated on the date indicated above. The calibration was performed in accordance with specifications and procedures of Schmid & Partner Engineering AG.

Wherever applicable, the standards used in the calibration process are traceable to international standards. In all other cases the standards of the Laboratory for EMF and Microwave Electronics at the Swiss Federal Institute of Technology (ETH) in Zurich, Switzerland have been applied.

Calibrated by:

*Nikola Stojanovic*

Approved by:

*Ilmarinen Katja*

**Schmid & Partner  
Engineering AG**

Zeughausstrasse 43, 8004 Zurich, Switzerland, Telephone +41 1 245 97 00, Fax +41 1 245 97 79

# Probe ET3DV5

## SN:1333

Manufactured:	December 20, 1997
Last calibration:	April 10, 2000
Recalibrated:	April 23, 2001

Calibrated for System DASY3

ET3DV5 SN:1333

**DASY3 - Parameters of Probe: ET3DV5 SN:1333**

Sensitivity in Free Space

NormX	2.37 $\mu\text{V}/(\text{V}/\text{m})^2$
NormY	2.38 $\mu\text{V}/(\text{V}/\text{m})^2$
NormZ	2.33 $\mu\text{V}/(\text{V}/\text{m})^2$

Diode Compression

DCP X	100 mV
DCP Y	100 mV
DCP Z	100 mV

Sensitivity in Tissue Simulating Liquid


<b>Head</b>	<b>450 MHz</b>	$\epsilon_r = 43.5 \pm 5\%$	$\sigma = 0.87 \pm 10\% \text{ mho/m}$	
ConvF X	6.25	extrapolated	Boundary effect:	
ConvF Y	6.25	extrapolated	Alpha	0.19
ConvF Z	6.25	extrapolated	Depth	3.06
<b>Head</b>	<b>900 MHz</b>	$\epsilon_r = 42 \pm 5\%$	$\sigma = 0.97 \pm 10\% \text{ mho/m}$	
ConvF X	5.83	$\pm 7\%$ (k=2)	Boundary effect:	
ConvF Y	5.83	$\pm 7\%$ (k=2)	Alpha	0.38
ConvF Z	5.83	$\pm 7\%$ (k=2)	Depth	2.70
<b>Brain</b>	<b>1500 MHz</b>	$\epsilon_r = 41 \pm 5\%$	$\sigma = 1.32 \pm 10\% \text{ mho/m}$	
ConvF X	5.27	interpolated	Boundary effect:	
ConvF Y	5.27	interpolated	Alpha	0.63
ConvF Z	5.27	interpolated	Depth	2.23
<b>Brain</b>	<b>1800 MHz</b>	$\epsilon_r = 41 \pm 5\%$	$\sigma = 1.69 \pm 10\% \text{ mho/m}$	
ConvF X	4.99	$\pm 7\%$ (k=2)	Boundary effect:	
ConvF Y	4.99	$\pm 7\%$ (k=2)	Alpha	0.75
ConvF Z	4.99	$\pm 7\%$ (k=2)	Depth	1.99

Sensor Offset

Probe Tip to Sensor Center	2.7	mm
Optical Surface Detection	1.6 $\pm$ 0.2	mm


ET3DV5 SN:1333

Receiving Pattern ( $\phi$ ),  $\theta = 0^\circ$

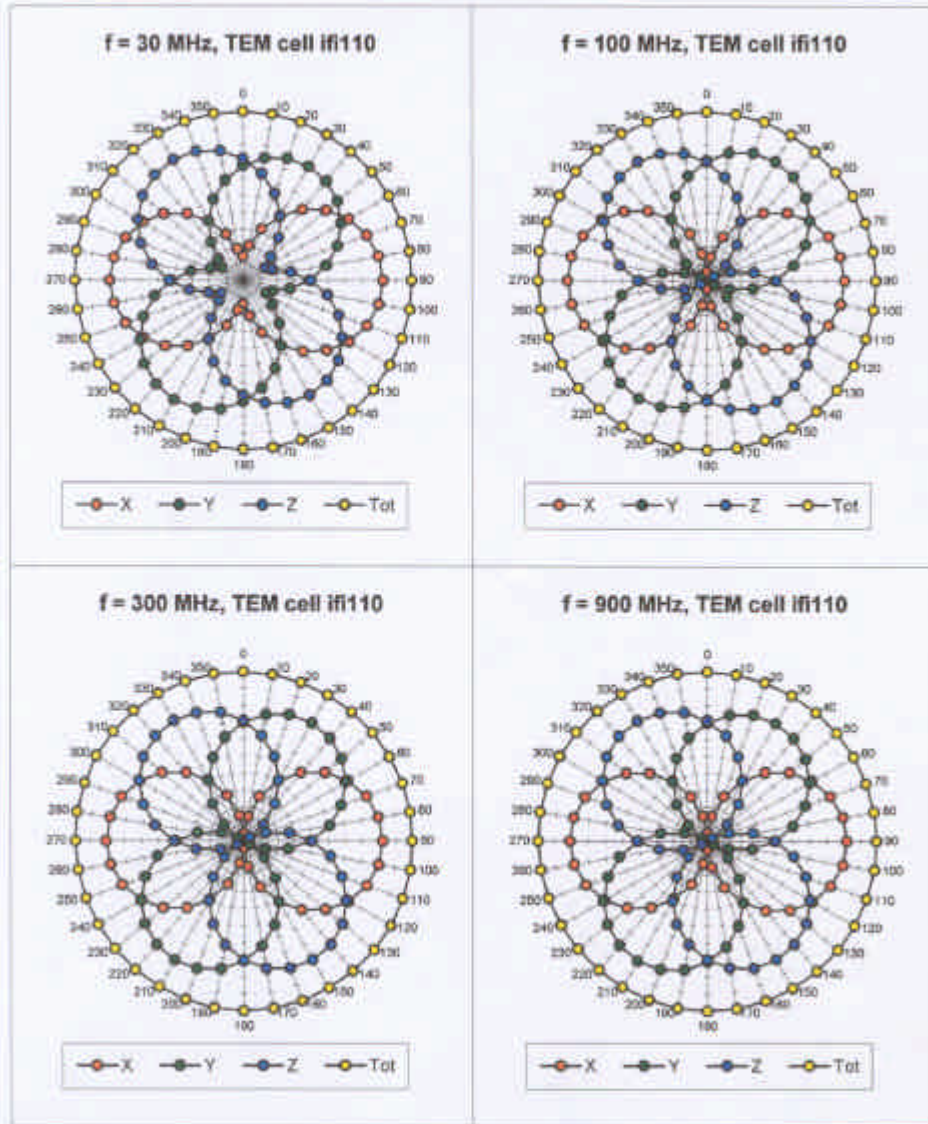




ET3DV5 SN:1333

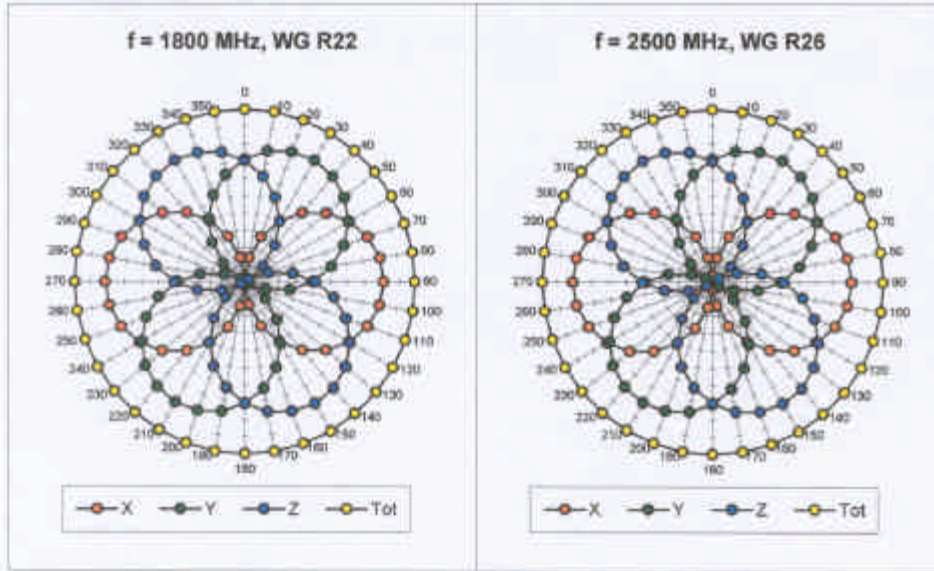


**Isotropy Error ( $\phi$ ),  $\theta = 0^\circ$**

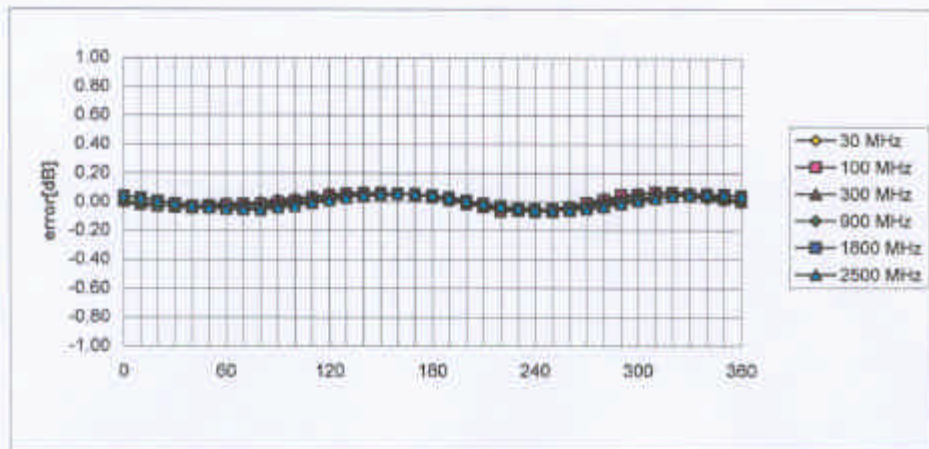



ET3DV5 SN:1333

### Frequency Response of E-Field ( TEM-Cell:ifi110, Waveguide R22)

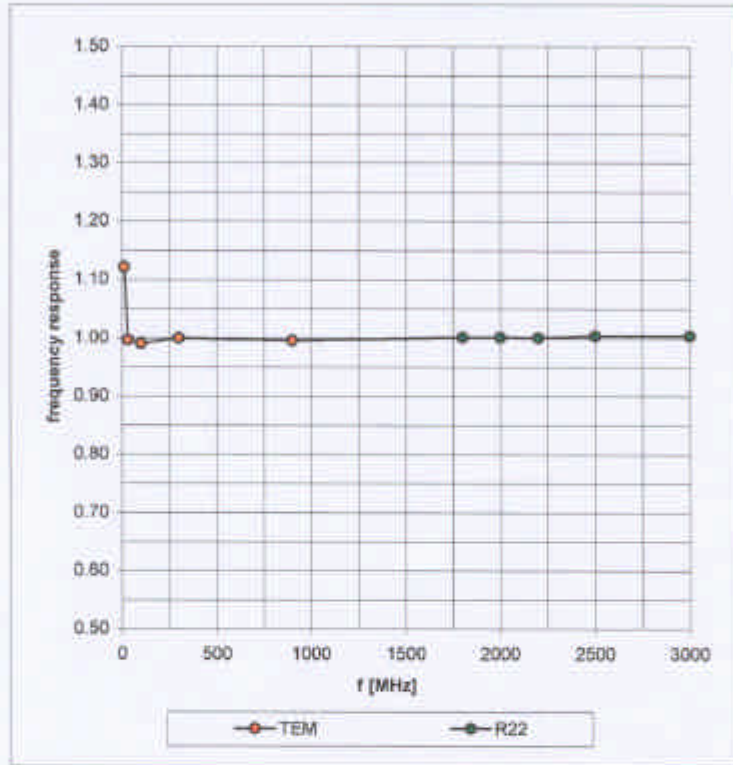


ET3DV5 SN:1333

**Dynamic Range f(SAR<sub>brain</sub>)**  
( TEM-Cell:ifi110 )

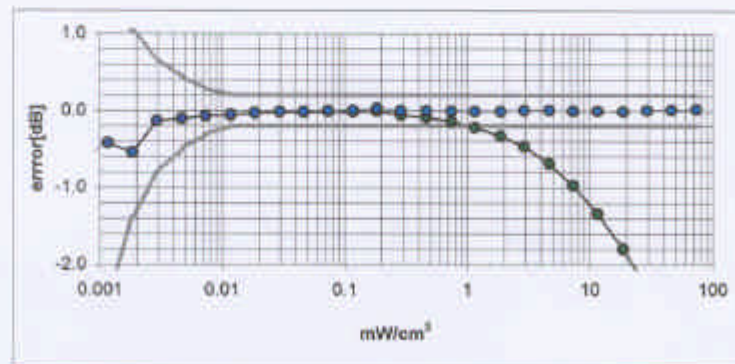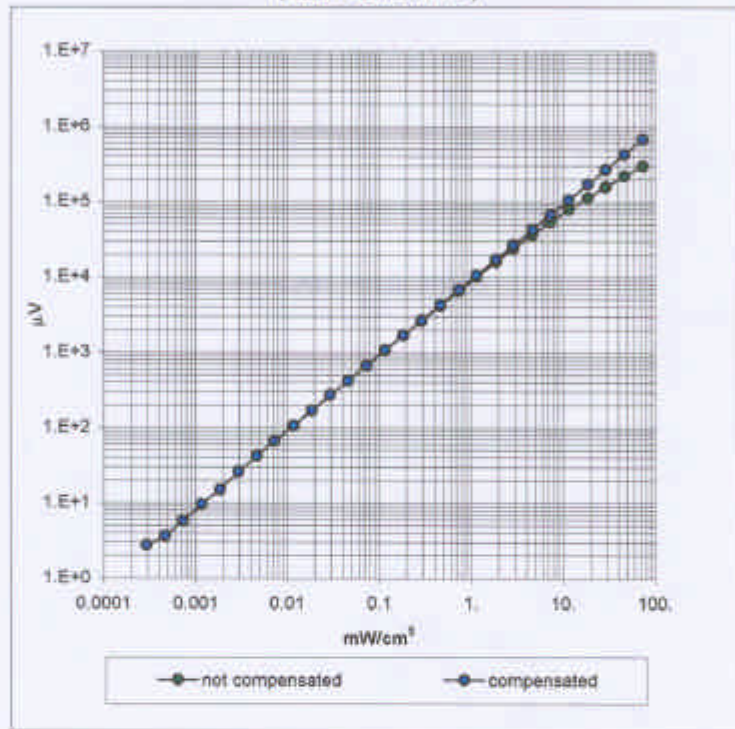

ET3DV5 SN:1333

### Conversion Factor Assessment

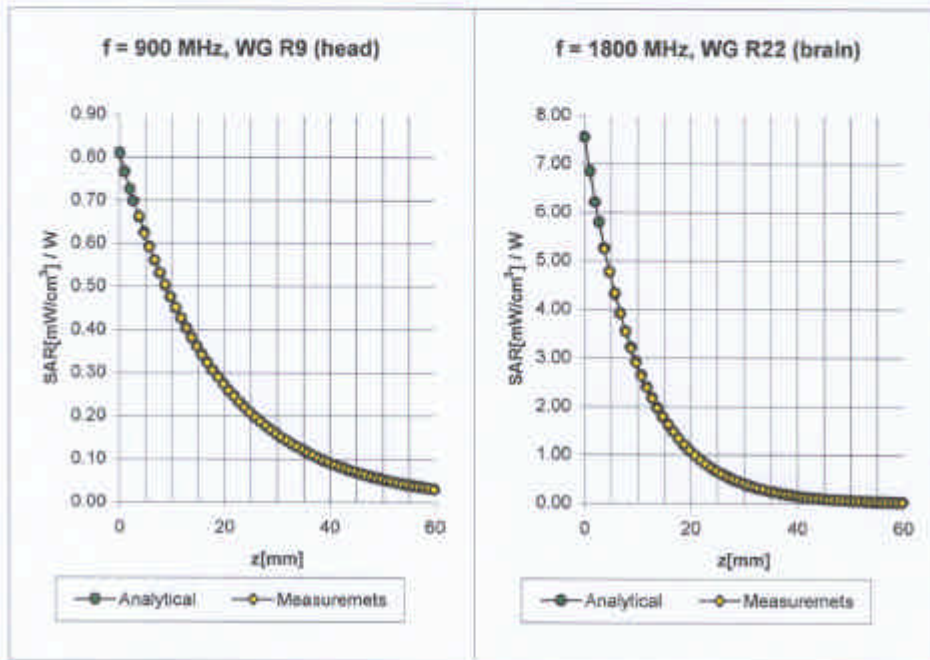

<b>Head</b>	<b>900 MHz</b>	$\epsilon_r = 42 \pm 5\%$	$\sigma = 0.97 \pm 10\%$ mho/m
	ConvF X	$5.83 \pm 7\%$ (k=2)	Boundary effect:
	ConvF Y	$5.83 \pm 7\%$ (k=2)	Alpha <b>0.38</b>
	ConvF Z	$5.83 \pm 7\%$ (k=2)	Depth <b>2.70</b>
<b>Brain</b>	<b>1800 MHz</b>	$\epsilon_r = 41 \pm 5\%$	$\sigma = 1.69 \pm 10\%$ mho/m
	ConvF X	$4.99 \pm 7\%$ (k=2)	Boundary effect:
	ConvF Y	$4.99 \pm 7\%$ (k=2)	Alpha <b>0.75</b>
	ConvF Z	$4.99 \pm 7\%$ (k=2)	Depth <b>1.99</b>

**7.0 DOCUMENT HISTORY**

<b>Revision/ Job Number</b>	<b>Writer Initials</b>	<b>Date</b>	<b>Change</b>
1.0 / J20037844	SS	December 11, 2001	Original document