

Test Laboratory: Compliance Certification Services

## Acer

DUT: USB Modem; Type: N/A; Serial: N/A

Communication System: CDMA PCS band; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1851.25$  MHz;  $\sigma = 1.46$  mho/m;  $\epsilon_r = 52.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Room Ambient Temperature: 23.0 deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3554; ConvF(6.61, 6.61, 6.61); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 11/16/2007
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Acer - 1xRTT - L ch/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.515 mW/g

**Acer - 1xRTT - L ch/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 12.3 V/m; Power Drift = 0.136 dB

Peak SAR (extrapolated) = 0.979 W/kg

**SAR(1 g) = 0.574 mW/g; SAR(10 g) = 0.325 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.642 mW/g

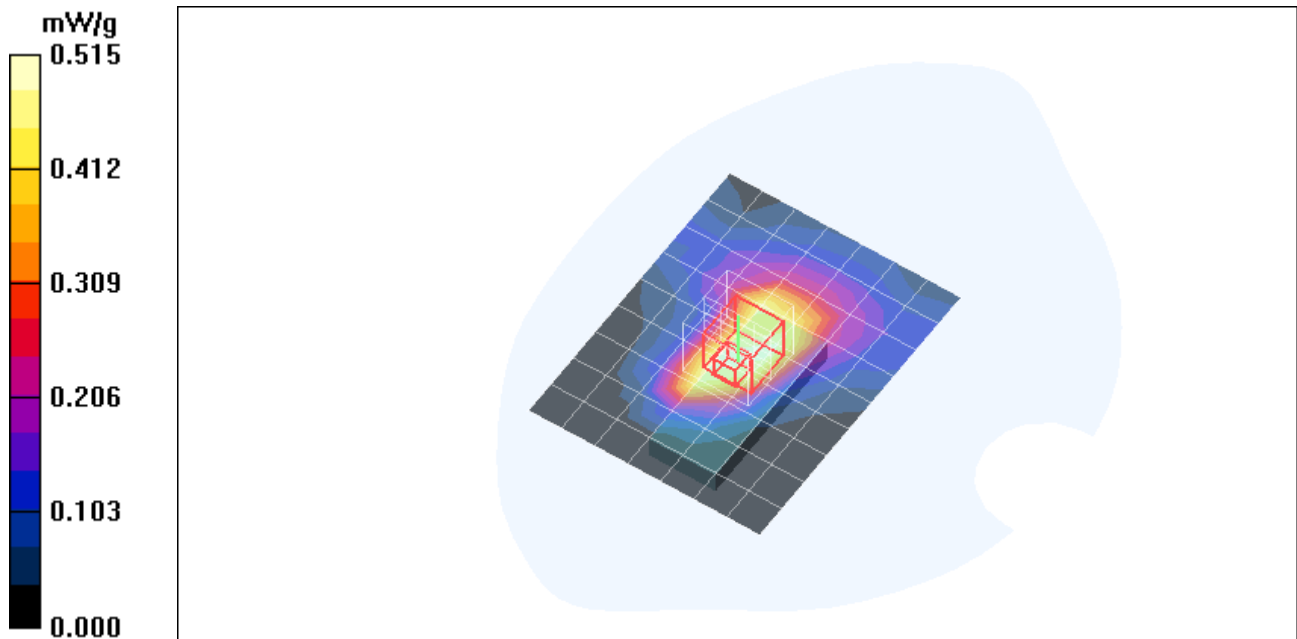

Test Laboratory: Compliance Certification Services

## Acer

DUT: USB Modem; Type: N/A; Serial: N/A

Communication System: CDMA PCS band; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.49$  mho/m;  $\epsilon_r = 52.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Room Ambient Temperature: 23.0 deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3554; ConvF(6.61, 6.61, 6.61); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 11/16/2007
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Acer - 1xRTT - M ch/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.718 mW/g


**Acer - 1xRTT - M ch/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 13.7 V/m; Power Drift = 0.107 dB

Peak SAR (extrapolated) = 1.26 W/kg

**SAR(1 g) = 0.750 mW/g; SAR(10 g) = 0.423 mW/g**

Maximum value of SAR (measured) = 0.832 mW/g

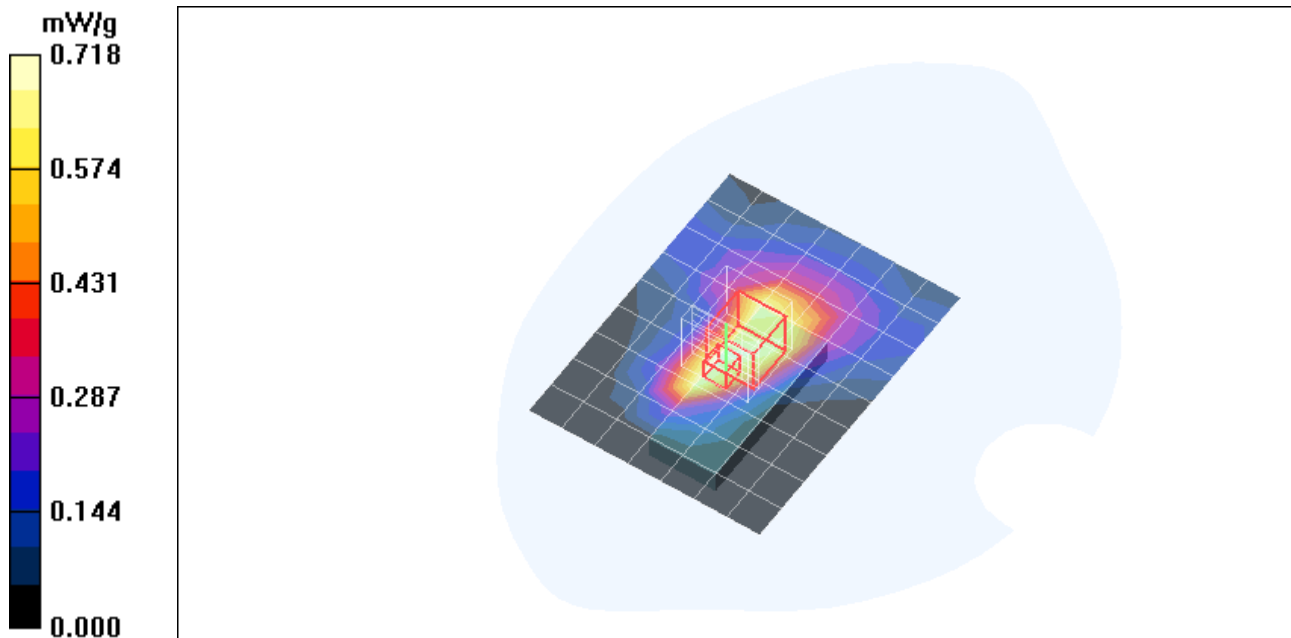

Test Laboratory: Compliance Certification Services

## Acer

DUT: USB Modem; Type: N/A; Serial: N/A

Communication System: CDMA PCS band; Frequency: 1908.75 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1908.75$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 52.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Room Ambient Temperature: 23.0 deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3554; ConvF(6.61, 6.61, 6.61); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 11/16/2007
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Acer - 1xRTT - H ch/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.818 mW/g

**Acer - 1xRTT - H ch/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 14.8 V/m; Power Drift = 0.122 dB

Peak SAR (extrapolated) = 1.52 W/kg

**SAR(1 g) = 0.892 mW/g; SAR(10 g) = 0.503 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.993 mW/g

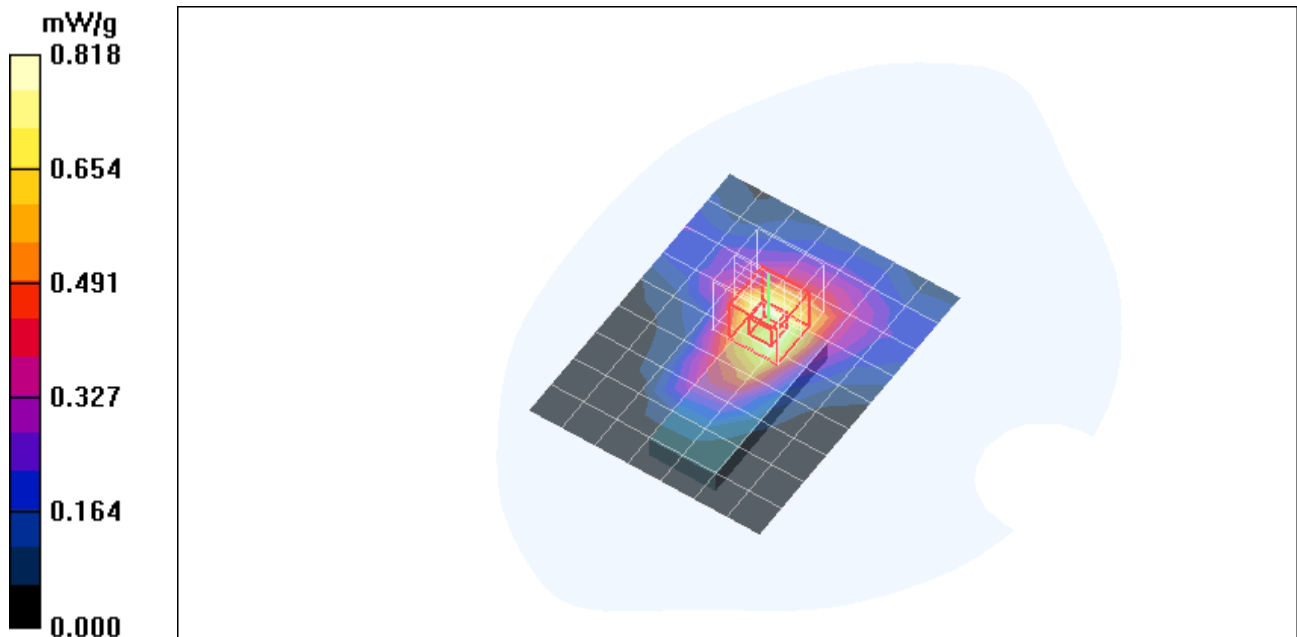

Test Laboratory: Compliance Certification Services

## Acer

DUT: USB Modem; Type: N/A; Serial: N/A

Communication System: CDMA PCS band; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.49$  mho/m;  $\epsilon_r = 52.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

Room Ambient Temperature: 23.0 deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3554; ConvF(6.61, 6.61, 6.61); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 11/16/2007
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Acer - 1xEV-DO Rel 0 - M ch/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.810 mW/g


**Acer - 1xEV-DO Rel 0 - M ch/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 19.7 V/m; Power Drift = 0.108 dB

Peak SAR (extrapolated) = 1.35 W/kg

**SAR(1 g) = 0.838 mW/g; SAR(10 g) = 0.478 mW/g**

Maximum value of SAR (measured) = 0.886 mW/g

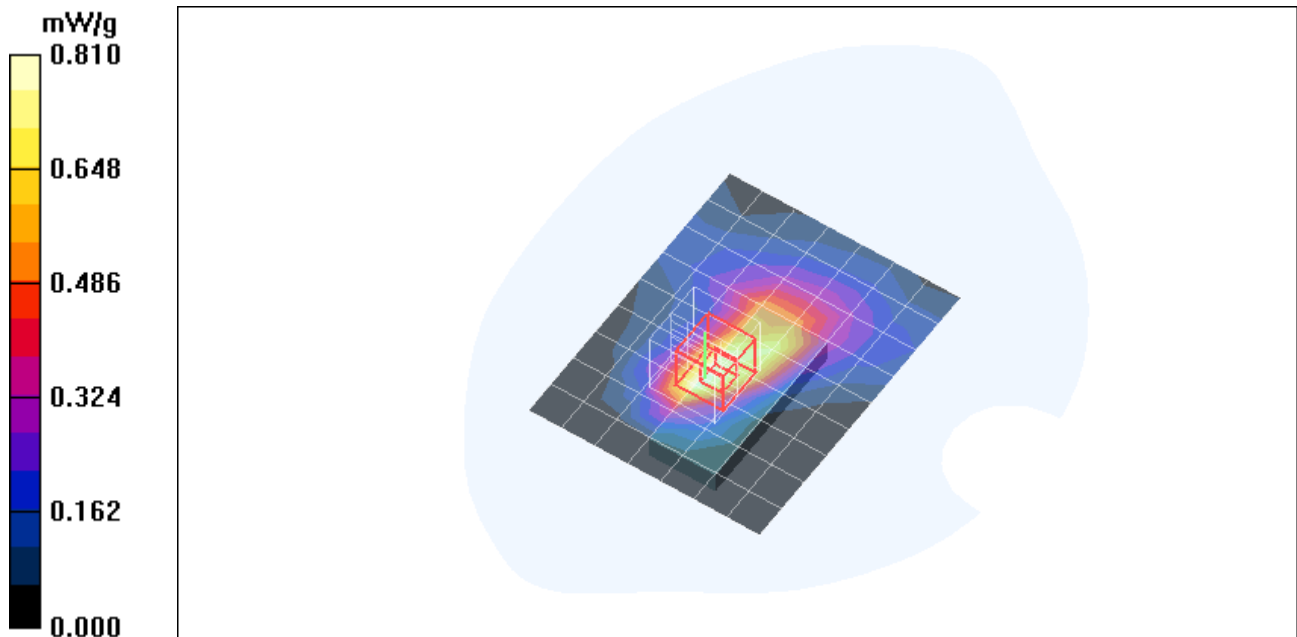

Test Laboratory: Compliance Certification Services

## Acer

DUT: USB Modem; Type: N/A; Serial: N/A

Communication System: CDMA PCS band; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1851.25$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 51.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Room Ambient Temperature: 23.0 deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3554; ConvF(6.61, 6.61, 6.61); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 11/16/2007
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Acer - 1xEV-DO Rev A - L ch/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.700 mW/g

**Acer - 1xEV-DO Rev A - L ch/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 21.8 V/m; Power Drift = 0.056 dB

Peak SAR (extrapolated) = 1.39 W/kg

**SAR(1 g) = 0.813 mW/g; SAR(10 g) = 0.450 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.917 mW/g

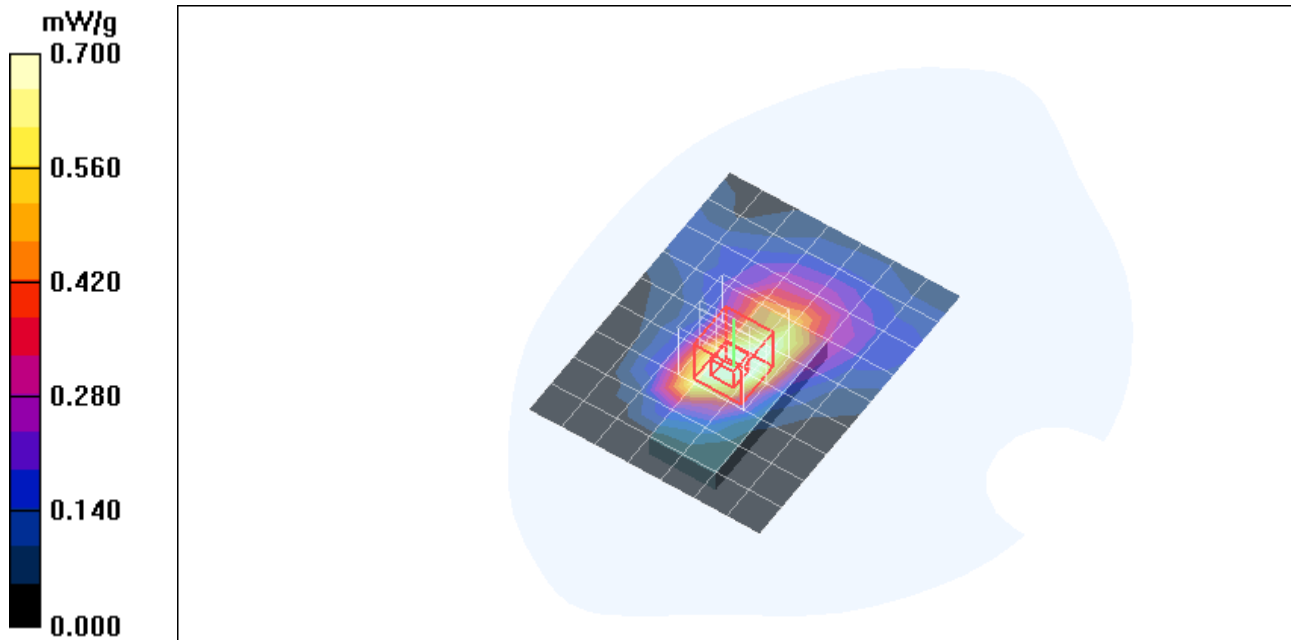

Test Laboratory: Compliance Certification Services

## Acer

DUT: USB Modem; Type: N/A; Serial: N/A

Communication System: CDMA PCS band; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.49$  mho/m;  $\epsilon_r = 52.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

Room Ambient Temperature: 23.0 deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3554; ConvF(6.61, 6.61, 6.61); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 11/16/2007
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Acer - 1xEV-DO Rev A - M ch/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm  
 Maximum value of SAR (measured) = 1.12 mW/g


**Acer - 1xEV-DO Rev A - M ch/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 21.3 V/m; Power Drift = 0.107 dB

Peak SAR (extrapolated) = 1.66 W/kg

**SAR(1 g) = 1.03 mW/g; SAR(10 g) = 0.576 mW/g**

Maximum value of SAR (measured) = 1.11 mW/g

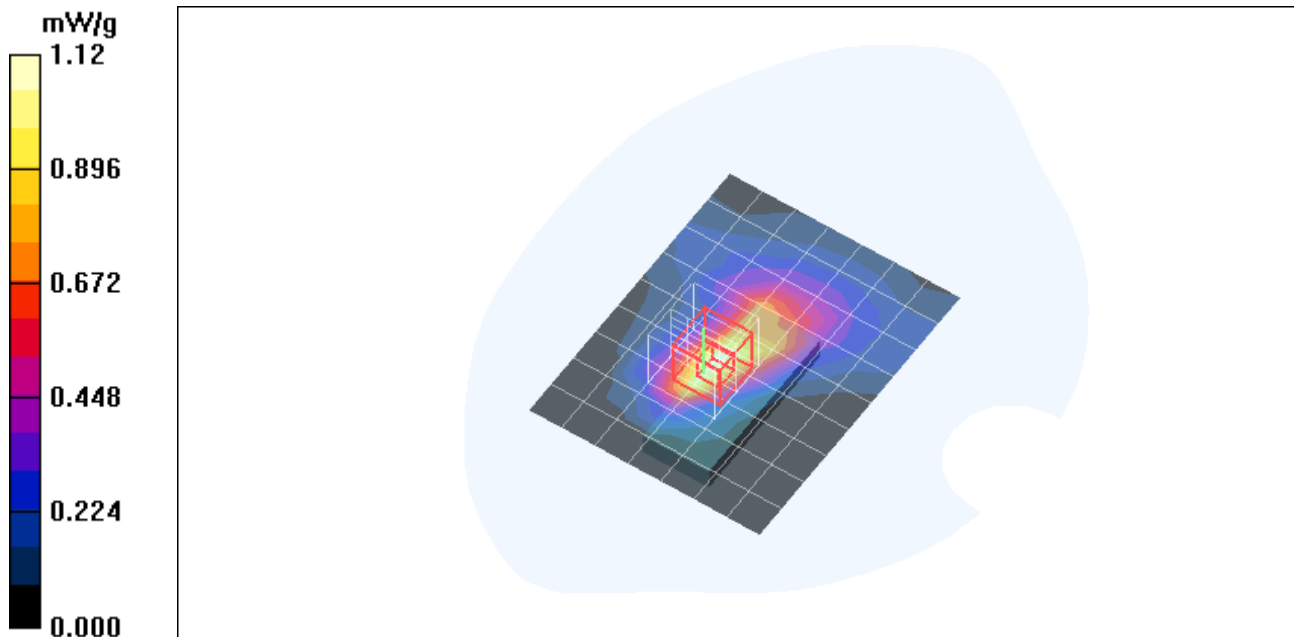


Test Laboratory: Compliance Certification Services

# Lapheld

DUT: USB Modem; Type: N/A; Serial: N/A

Communication System: CDMA PCS band; Frequency: 1880 MHz;Duty Cycle: 1:1

**Acer - 1xEV-DO Rev A - M ch/Z Scan (1x1x41):** Measurement grid: dx=20mm, dy=20mm, dz=2.5mm  
Maximum value of SAR (measured) = 0.719 mW/g

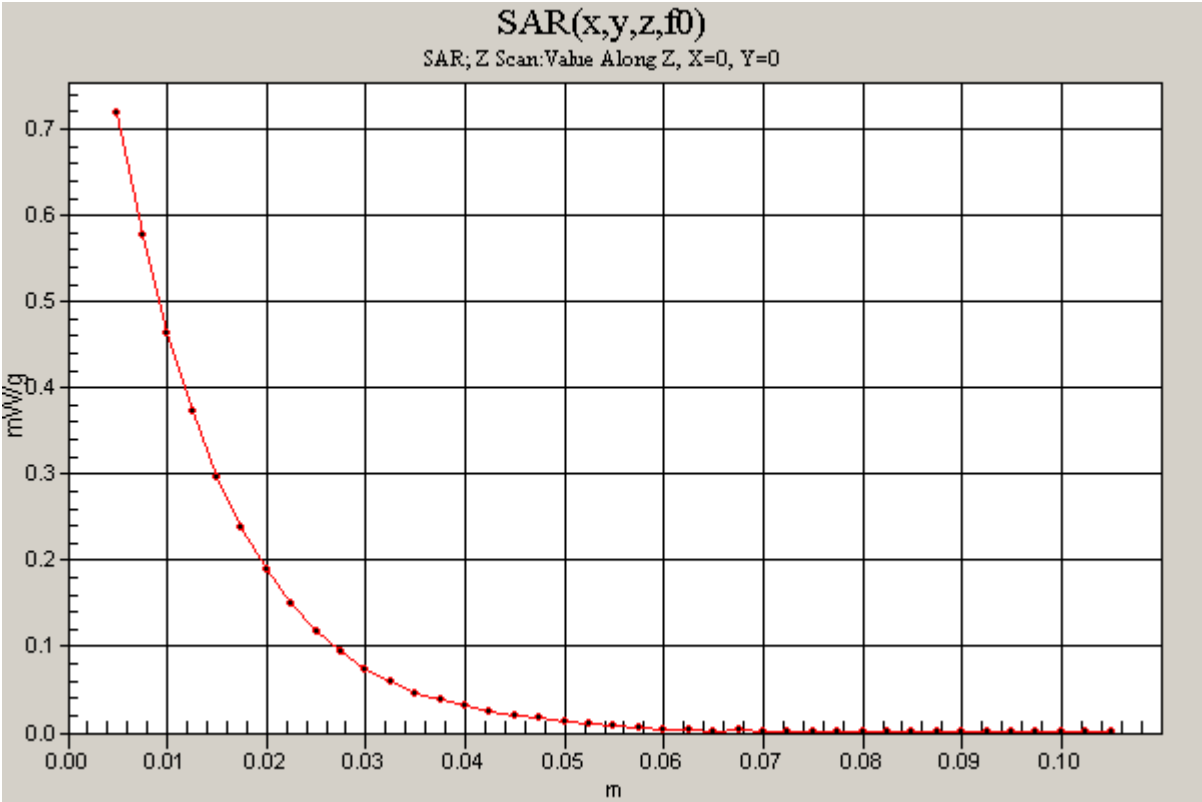

Test Laboratory: Compliance Certification Services

# Acer

DUT: USB Modem; Type: N/A;Serial: N/A


Communication System: CDMA PCS band;Frequency: 1908.75 MHz;Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 1908.75 \text{ MHz}$ ;  $\sigma = 1.56 \text{ mho/m}$ ;  $\epsilon_r = 51.3$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section

Room AmbientTemperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

- DASY4 Configuration:
- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with peak SAR value greater than 0.0012W/kg
  - Probe: EX3DV4 - SN3554; ConvF(6.61, 6.61, 6.61); Calibrated: 4/24/2007
  - Sensor-Surface: 4mm (Mechanical Surface Detection)
  - Electronics: DAE3 Sn500; Calibrated: 11/16/2007
  - Phantom: SAM 2; Type: SAM 2; Serial: 1050
  - Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Acer - 1xEV-DO Rev A - H ch/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm  
[Info: Interpolated medium parameters used for SAR evaluation.](#)  
Maximum value of SAR (measured) = 0.939 mW/g

**Acer - 1xEV-DO Rev A - H ch/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm  
Reference Value = 15.1 V/m; Power Drift = 0.062 dB  
Peak SAR (extrapolated) = 1.57 W/kg  
**SAR(1 g) = 0.910 mW/g; SAR(10 g) = 0.515 mW/g**  
[Info: Interpolated medium parameters used for SAR evaluation.](#)  
Maximum value of SAR (measured) = 0.975 mW/g

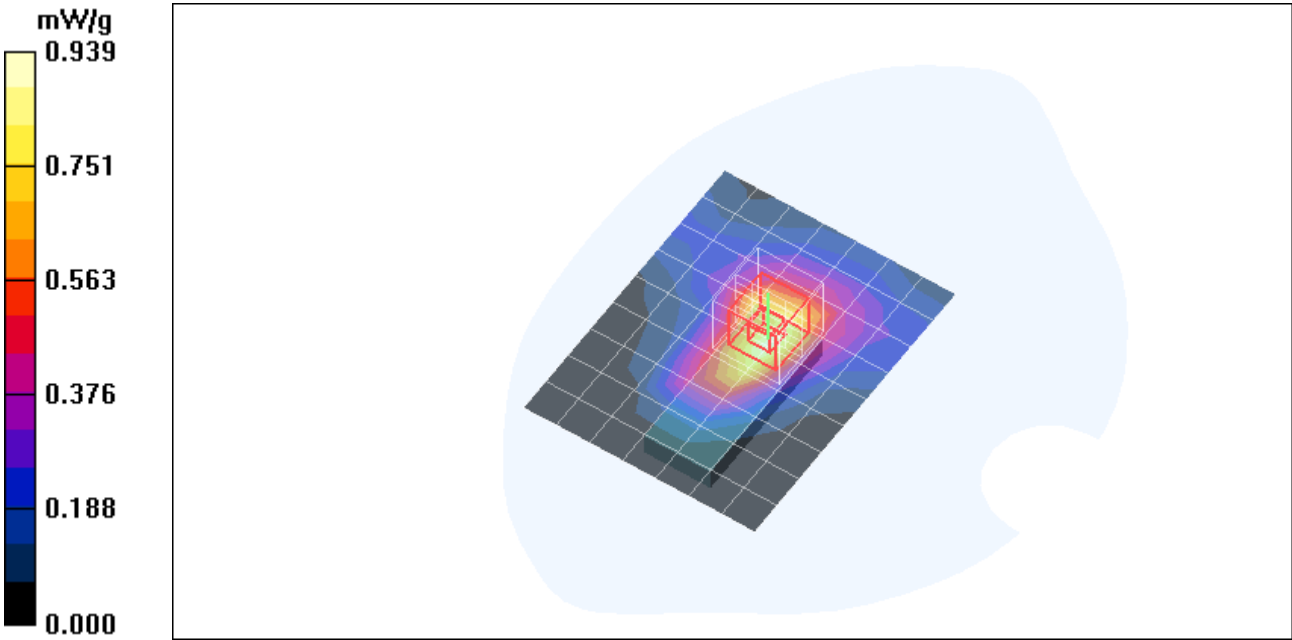



Test Laboratory: Compliance Certification Services

## Gateway

DUT: USB Modem; Type: N/A; Serial: N/A

Communication System: CDMA PCS band; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.49$  mho/m;  $\epsilon_r = 52.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Room Ambient Temperature: 23.0 deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3554; ConvF(6.61, 6.61, 6.61); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 11/16/2007
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Gateway - 1xRTT - M ch/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.713 mW/g


**Gateway - 1xRTT - M ch/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 16.3 V/m; Power Drift = 0.117 dB

Peak SAR (extrapolated) = 1.16 W/kg

**SAR(1 g) = 0.725 mW/g; SAR(10 g) = 0.415 mW/g**

Maximum value of SAR (measured) = 0.776 mW/g

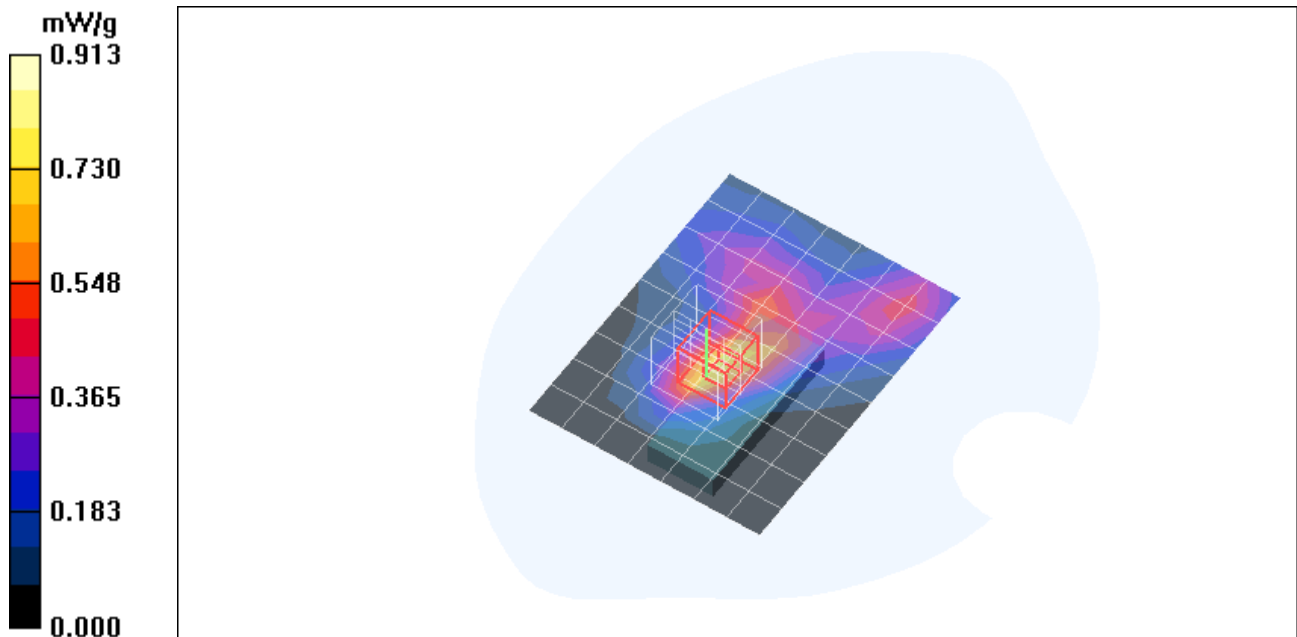

Test Laboratory: Compliance Certification Services

## Gateway

DUT: USB Modem; Type: N/A; Serial: N/A

Communication System: CDMA PCS band; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1851.25$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 51.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Room Ambient Temperature: 23.0 deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3554; ConvF(6.61, 6.61, 6.61); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 11/16/2007
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Gateway - 1xEV-DO Rev A - L ch/Area Scan (9x11x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.691 mW/g

**Gateway - 1xEV-DO Rev A - L ch/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm,

dy=7.5mm, dz=5mm



Reference Value = 21.4 V/m; Power Drift = -0.061 dB

Peak SAR (extrapolated) = 1.45 W/kg

**SAR(1 g) = 0.739 mW/g; SAR(10 g) = 0.390 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.710 mW/g

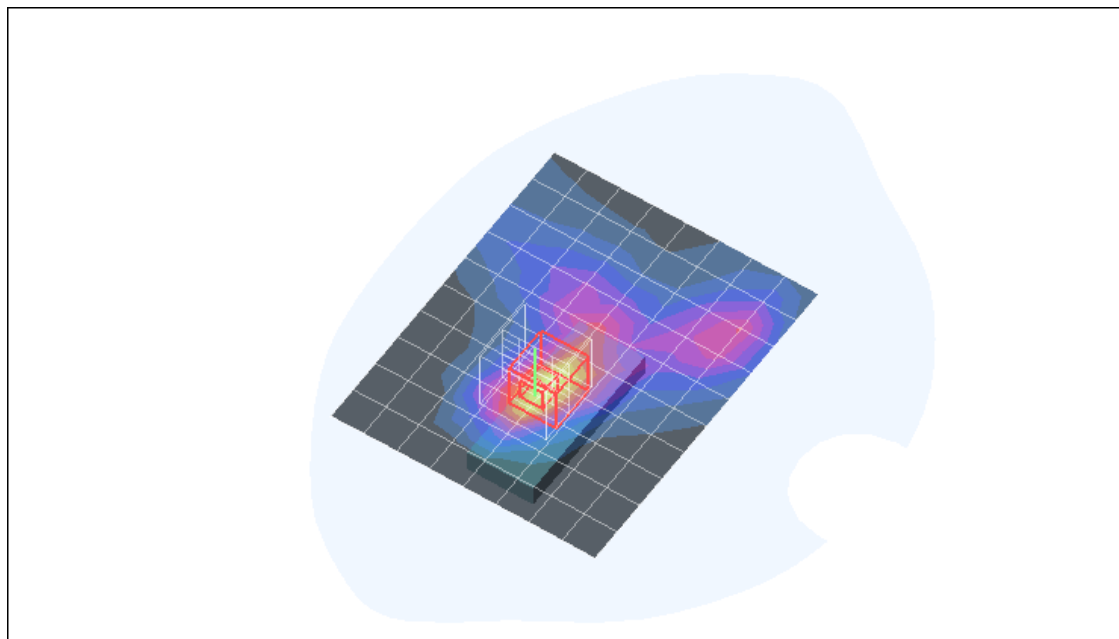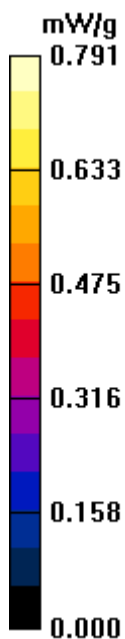

Test Laboratory: Compliance Certification Services

# Gateway

DUT: USB Modem; Type: N/A; Serial: N/A

Communication System: CDMA PCS band; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.53 \text{ mho/m}$ ;  $\epsilon_r = 51.4$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section


Room Ambient Temperature: 23.0 deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3554; ConvF(6.61, 6.61, 6.61); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 11/16/2007
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Gateway - 1xEV-DO Rev A - M ch/Area Scan (9x11x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (measured) = 0.841 mW/g

**Gateway - 1xEV-DO Rev A - M ch/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm  
Reference Value = 16.2 V/m; Power Drift = 0.146 dB  
Peak SAR (extrapolated) = 1.37 W/kg  
**SAR(1 g) = 0.844 mW/g; SAR(10 g) = 0.473 mW/g**  
Maximum value of SAR (measured) = 0.936 mW/g

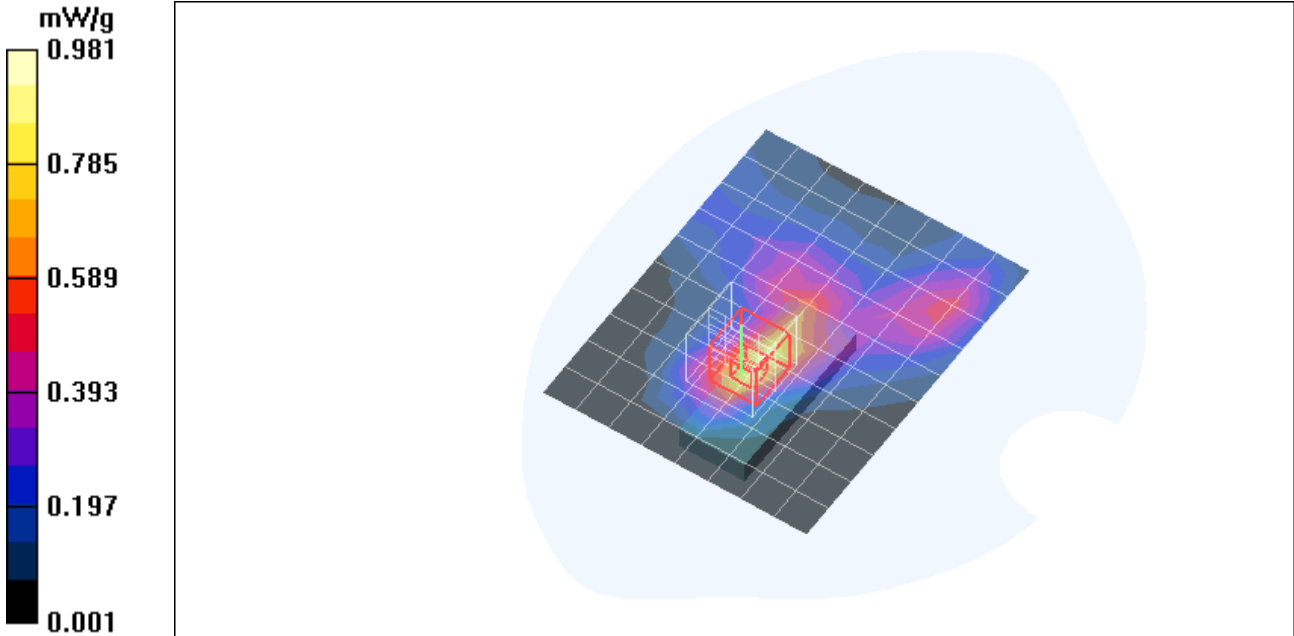

Test Laboratory: Compliance Certification Services

## Gateway

DUT: USB Modem; Type: N/A; Serial: N/A

Communication System: CDMA PCS band; Frequency: 1908.75 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1908.75$  MHz;  $\sigma = 1.56$  mho/m;  $\epsilon_r = 51.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Room Ambient Temperature: 23.0 deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3554; ConvF(6.61, 6.61, 6.61); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 11/16/2007
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

### Gateway - 1xEV-DO Rev A - H ch/Area Scan (9x11x1): Measurement grid: dx=15mm, dy=15mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.733 mW/g

### Gateway - 1xEV-DO Rev A - H ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 19.5 V/m; Power Drift = -0.085 dB

Peak SAR (extrapolated) = 1.26 W/kg

**SAR(1 g) = 0.748 mW/g; SAR(10 g) = 0.438 mW/g**Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.828 mW/g



### Gateway - 1xEV-DO Rev A - H ch/Zoom Scan 2 (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 19.5 V/m; Power Drift = -0.085 dB

Peak SAR (extrapolated) = 0.991 W/kg

**SAR(1 g) = 0.618 mW/g; SAR(10 g) = 0.373 mW/g**Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.667 mW/g

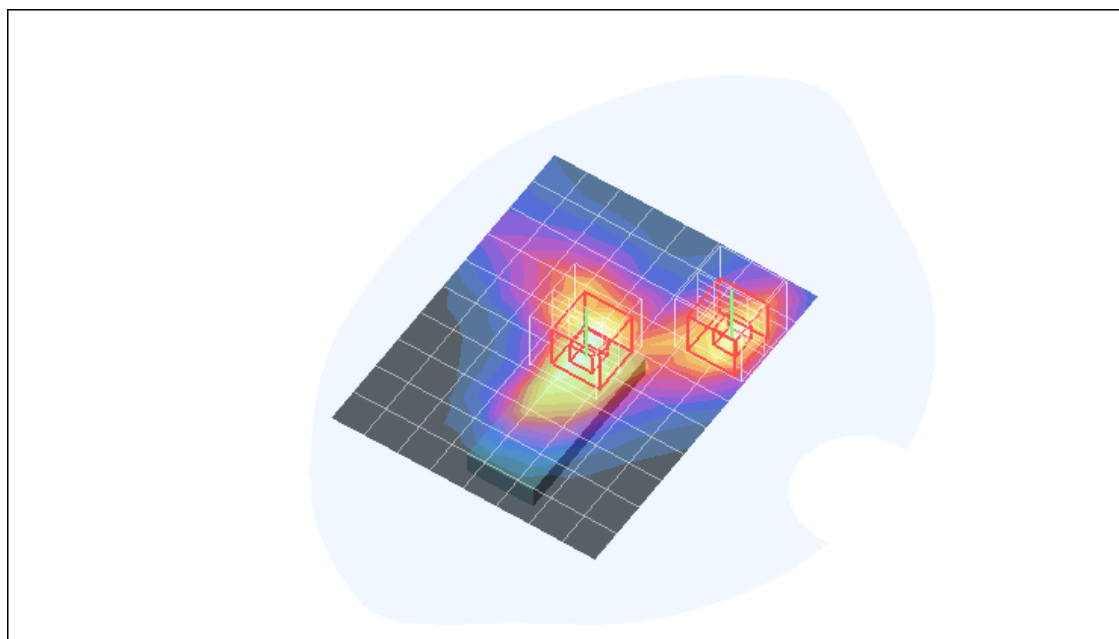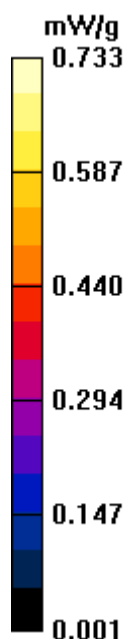

Test Laboratory: Compliance Certification Services

## Toshiba

DUT: USB Modem; Type: N/A; Serial: N/A

Communication System: CDMA PCS band; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.49$  mho/m;  $\epsilon_r = 52.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

Room Ambient Temperature: 23.0 deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3554; ConvF(6.61, 6.61, 6.61); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 11/16/2007
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Toshiba - 1xRTT - M ch/Area Scan (10x8x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.681 mW/g


**Toshiba - 1xRTT - M ch/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 21.0 V/m; Power Drift = 0.197 dB

Peak SAR (extrapolated) = 1.05 W/kg

**SAR(1 g) = 0.687 mW/g; SAR(10 g) = 0.420 mW/g**

Maximum value of SAR (measured) = 0.748 mW/g

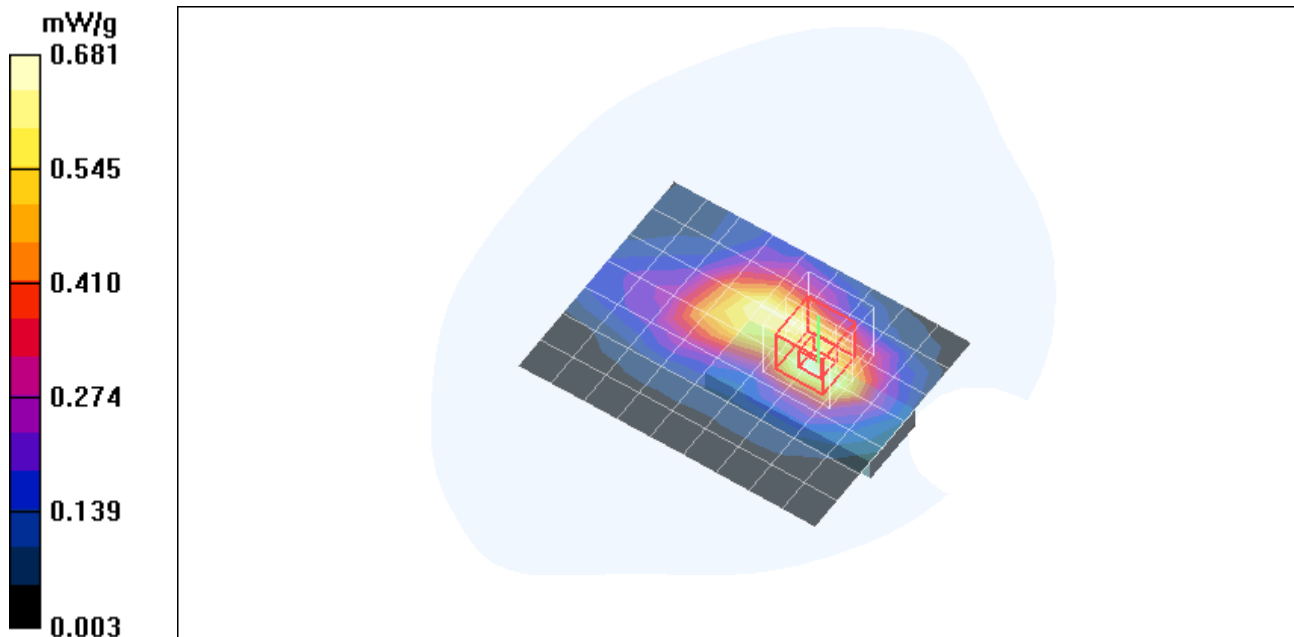

Test Laboratory: Compliance Certification Services

## Toshiba

DUT: USB Modem; Type: N/A; Serial: N/A

Communication System: CDMA PCS band; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.53$  mho/m;  $\epsilon_r = 51.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

Room Ambient Temperature: 23.0 deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3554; ConvF(6.61, 6.61, 6.61); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 11/16/2007
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Toshiba - 1xEV-DO Rev A - M ch/Area Scan (9x8x1):** Measurement grid: dx=15mm, dy=15mm  
 Maximum value of SAR (measured) = 0.774 mW/g

**Toshiba - 1xEV-DO Rev A - M ch/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 22.5 V/m; Power Drift = -0.099 dB

Peak SAR (extrapolated) = 1.18 W/kg

**SAR(1 g) = 0.742 mW/g; SAR(10 g) = 0.456 mW/g**

Maximum value of SAR (measured) = 0.789 mW/g

