



EM7355/EM7655 Modem

Test Report

FOR
WCDMA / HSPA

FCC and IC Certifications

IC: 2417C-EM7655
FCC ID: N7NEM7655

© 2010 Sierra Wireless, Inc.

This document contains information which is proprietary and confidential to Sierra Wireless, Inc. Disclosure to persons other than the officers, employees, agents, or subcontractors of the Company or licensee of this document without the prior written permission of Sierra Wireless, Inc. is strictly prohibited.

SIERRA WIRELESS, INC.

FCC Part 22/24/27, RSS-132/133/139	EM7655	Aug. 16, 2012	Page 2 of 24
------------------------------------	--------	---------------	--------------

Table of Contents

1	Introduction and Purpose	4
2	Test Summary	4
3	Description of Equipment under Test	4
3.1	<i>Differences between EM7355 and EM7655</i>	5
4	Compliance Test Equipment List	5
5	Test Setup Block Diagrams	5
5.1	<i>Test Setup 1</i>	5
5.2	<i>Test Setup 2</i>	6
6	RF Power Output	6
6.1	<i>Test Procedure</i>	6
6.1.1	WCDMA/HSDPA/HSUPA Max Power setup	6
6.2	<i>Maximum Transmit Power Test Results</i>	9
6.2.1	Test Results for WCDMA/HSDPA/HSUPA Output Power	9
7	Occupied Bandwidth	9
7.1	<i>Test Procedure</i>	9
7.2	<i>Test Results</i>	9
7.2.1	WCDMA Summary Results	9
7.2.2	WCDMA Rel99 Test Plots	10
7.2.3	HSUPA Rel6 (Subtest 5) Test Plots	11
8	Out of Band Emissions at Antenna Terminals	12
8.1	<i>Test Procedure</i>	13
8.2	<i>Test Results</i>	13
8.2.1	WCDMA Rel99 Test Plots	13
9	Block Edge Compliance	17
9.1	<i>Test Procedure</i>	17
9.2	<i>Test Results</i>	17
9.2.1	WCDMA Test Plots	18
10	Frequency Stability versus Temperature	20
10.1	<i>Summary of Results</i>	20
10.2	<i>Test Procedure</i>	21
10.3	<i>Test Results</i>	21
10.3.1	UMTS Frequency Error over Temperature	21
11	Frequency Stability versus Voltage	21
11.1	<i>Summary of Results</i>	21
11.2	<i>Test Procedure</i>	21
11.3	<i>Test Results</i>	22
11.3.1	UMTS Frequency Error over Voltage	22
12	Peak to Average Ratio	22
12.1	<i>Summary of Results</i>	22
12.2	<i>Test Procedure</i>	22
12.3	<i>Test Results</i>	22
12.3.1	Test Plots	23

SIERRA WIRELESS, INC.

FCC Part 22/24/27, RSS-132/133/139	EM7655	Aug. 16, 2012	Page 3 of 24
------------------------------------	--------	---------------	--------------

SIERRA WIRELESS, INC.

FCC Part 22/24/27, RSS-132/133/139	EM7655	Aug. 16, 2012	Page 4 of 24
------------------------------------	--------	---------------	--------------

1 Introduction and Purpose

This document provides test data for the EM7355 modem output power intended for FCC and Industry Canada certifications.

2 Test Summary

FCC Rule	IC Standards	DESCRIPTION OF TEST	RESULT	PAGE
2.1046	RSS-132, 4.4 RSS-133, 6.4	RF Power Output	Complies	5
2.1049	RSS-Gen, 4.6	Occupied Bandwidth	Complies	
2.1051, 22.917, 24.238, 27.53	RSS-132, 4.5 RSS-133, 6.5	Out of Band Emissions at Antenna Terminals	Complies	
22.917, 24.238, 27.53	RSS-Gen, 4.6	Block Edge Compliance	Complies	
2.1055, 22.355, 24.235, 27.54	RSS-132, 4.3 RSS-133, 6.3	Frequency Stability versus Temperature	Complies	
2.1055, 22.355, 24.235, 27.54	RSS-132, 4.3 RSS-133, 6.3	Frequency Stability versus Voltage	Complies	
24.232, 27.50		Peak to Average Ratio	Complies	

3 Description of Equipment under Test

The EM7355/EM7655 modem, referred to as “EUT” hereafter, is a multi-band wireless modem operating on the GSM/GPRS/EDGE/UMTS/LTE/CDMA networks. The table below shows the supported North American bands for the device.

Technology	Band	UL Freq. (MHz)	DL Freq. (MHz)	Max Power
LTE	B2	1850 – 1910	1930 – 1990	23 dBm (+/- 1 dB)
	B4	1710 – 1755	2110 – 2155	23 dBm (+/- 1 dB)
	B5	824 – 849	869 – 894	23 dBm (+/- 1 dB)
	B13	777 – 787	746 – 756	23 dBm (+/- 1 dB)
	B17	704 – 716	734 – 746	23 dBm (+/- 1 dB)
	B25	1850 – 1915	1930 – 1995	23 dBm (+/- 1 dB)
WCDMA / HSDPA/ HSUPA / HSPA+	B2	1850 – 1910	1930 – 1990	23 dBm (+/- 1 dB)
	B4	1710 – 1755	2110 – 2155	23 dBm (+/- 1 dB)
	B5	824 – 849	869 – 894	23 dBm (+/- 1 dB)
CDMA / EVDO	BC0	824 – 849	869 – 894	24 dBm (+/- 1 dB)
	BC1	1850 – 1910	1930 – 1990	24 dBm (+/- 1 dB)
	BC10*	816.0 – 823.975	861.0 – 868.975	24 dBm (+/- 1 dB)
GSM	G850	824 – 849	869 – 894	32.5 dBm (+/-1dB)
	G1900	1850 – 1910	1930 – 1990	29.5 dBm (+/-1dB)

SIERRA WIRELESS, INC.

FCC Part 22/24/27, RSS-132/133/139	EM7655	Aug. 16, 2012	Page 5 of 24
------------------------------------	--------	---------------	--------------

EDGE	G850	824 – 849	869 – 894	27dBm (+/-1dB)
	G1900	1850 – 1910	1930 – 1990	26dBm (+/-1dB)

* Only BC10 subclass 2 and 3 frequencies are supported by hardware and firmware.

3.1 Differences between EM7355 and EM7655


The EM7355 and EM7655 differ only in pcb length and host interface connector. Both products utilize the same pcb RF layout, components and firmware. Please refer to document “7x55 Comparison.pdf”.

4 Compliance Test Equipment List


EQUIPMENT	MANUFACTURER	MODEL NO.	SERIAL NO.	CAL. DUE DATE
Control Computer	TC	Generic PC	100488	N/A
Wireless Test Set	Rohde & Schwarz	CMU200	110521	October 27, 2013
Wireless Test Set	Rohde & Schwarz	CMW500	101060	June 06, 2014
Spectrum Analyzer	Rohde & Schwarz	FSP	100060	October 27, 2013
DC Power Supply	HP	6632A	3530A	N/A
Interface Board	Shop built	ATEMux	N/A	N/A
Directional Coupler	Pasternack	PE2209-10	N/A	N/A

5 Test Setup Block Diagrams

5.1 Test Setup 1

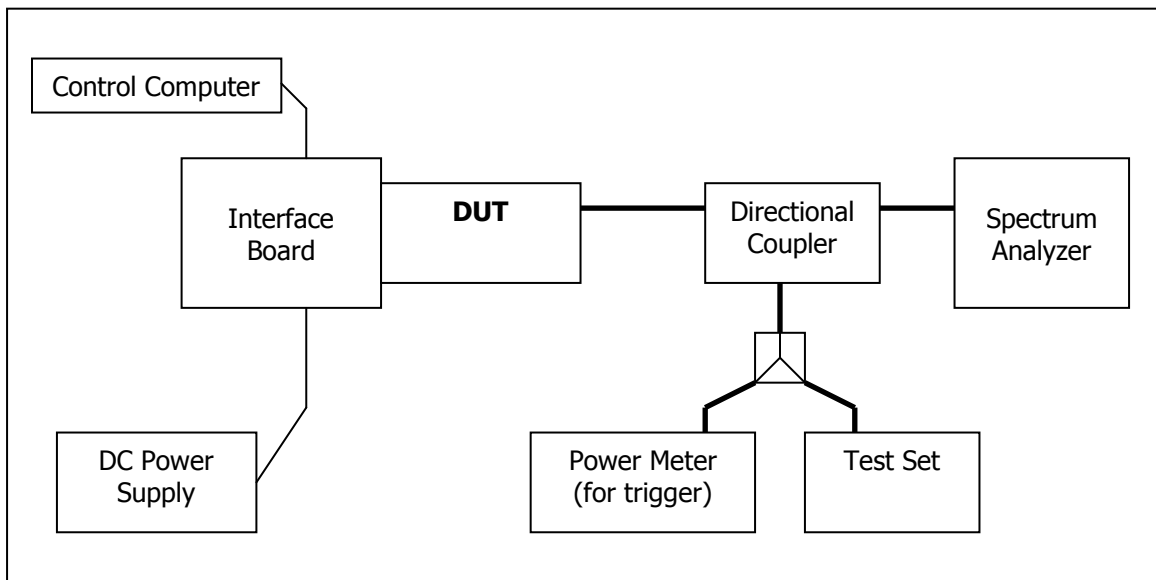

5.2 Test Setup 2

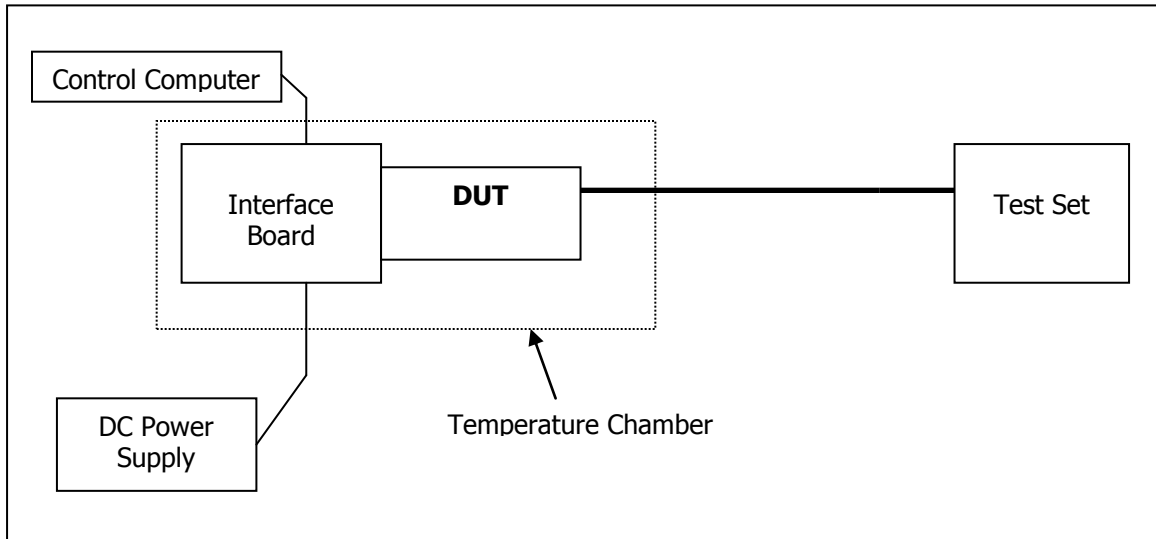

6 RF Power Output

FCC 2.1046, 27.53(h)

6.1 Test Procedure

The transmitter output was connected to a Rohde & Schwarz CMU200 Test Set and configured to operate at maximum power in a call. The power was measured using the Average Power measurement of the CMU200. Refer to Test Setup 1.

6.1.1 WCDMA/HSDPA/HSUPA Max Power setup

Configure the call box to support all WCDMA tests in respect to the 3GPP 34.121 (listed in Table 4.2). Measure the power at Ch4132, 4182 and 4233 for US cell; Ch9262, 9400 and 9538 for US PCS band.

For Rel99 per 3GPP 35.121 5.2

- Set a Test Mode 1 loop back with a 12.2kbps Reference Measurement Channel (RMC)
- Set and send continuously Up power control commands to the EM7355 module.
- Measure the power at the EM7355 module antenna connector using the power meter with average detector

For HSDPA Rel 7 3 per GPP 35.121 5.2AA

- Establish a Test Mode 1 look back with both 1 12.2kbps RMC channel and an H-Set1 Fixed Reference Channel (FRC). With the CMU200 this is accomplished by setting

SIERRA WIRELESS, INC.

FCC Part 22/24/27, RSS-132/133/139	EM7655	Aug. 16, 2012	Page 7 of 24
------------------------------------	--------	---------------	--------------

the signal Channel Coding to “Fixed Reference Channel” and configuring for HSET-1 QKSP.

- Set beta values and HSDPA settings for HSDPA Subtest1 according to Table 4.2
- Send continuously Up power control commands to the EM7355 module
- Measure the power at the EM7355 module antenna connector using the power meter with modulated average detector
- Repeat the measurement for the HSDPA Subtest2, 3 and 4 as given in Table 4.2

For HSUPA Rel 6 per 3GPP 35.121 5.2B

- Use UL RMC 12.2kbps and FRC H-Set1 QPSK, Test Mode 1 loop back. With the CMU200 this is accomplished by setting the signal Channel Coding to “E-DCH Test Channel” and configuring the equipment category to Cat5_10ms.
- Set the Absolute Grant for HSUPA Subtest1 according to Table 4.2
- Set the EM7355 module power to be at least 5dB lower than the Maximum output power
- Send power control bits to give one TPC_cmd = +1 command to the UNDP. If UNDP doesn’t send any E-DPCH data with decreased E-TFCI within 500ms, then repeat this process until the decreased E-TFCI is reported.
- Confirm that the E-TFCI transmitted by the EM7355 module is equal to the target E-TFCI in Table 4.2. If the E-TFCI transmitted by the EM7355 module is not equal to the target E-TFCI, then send power control bits to give one TPC_cmd = -1 command to the UE. If UE sends any E-DPCH data with decreased E-TFCI within 500 ms, send new power control bits to give one TPC_cmd = -1 command to the UE. Then confirm that the E-TFCI transmitted by the UE is equal to the target E-TFCI in Table 4.2. If the E-TFCI transmitted by the UE is not equal to the target E-TFCI, then fail the UE
- Measure the power using the power meter with an average detector
- Repeat the measurement for the HSUPA Subtest2, 3 and 4 as given in Table 4.2
- Test case 5 is tested using all up bits for maximum output power per 3GPP 34.521.

Table 4.2 3GPP Rel99/HSPA Subtest Settings

						Common Settings					HSDPA Specific Settings							HSUPA Sepcific Settings			HSUPA Additional Info	
Subt est	Mode	Loopba ck Mode	Rel99 RMC	HDP A FRC	HSUPA Test	β_c	β_d	C M	M PR	Power Class 3 limit (dBm)	ΔA CK	ΔN AK	ΔC QI	ACK- NAK repeti tion factor	CQI Feed back (Tabl e 5.2B. 4)	CQI Repeti tion Factor (Table 5.2B.4)	Ahs = β_{hs} / β_c	ΔE - DPC CH	$\Delta H A$ RQ	AG Ind ex	ERFCI (from 34.12 1 Table C.11. 1.3)	Associ ated Max UL Data Rate kbps
1	Rel99	Testmo de 1	12.2k bps	-	-			-		24 (+1.7/- 3.7 dB)												
1	Rel6 HSDPA	Testmo de 1	12.2k bps	H- Set 1	-	2/1 5	15/ 15	0	0	24 (+1.7/- 3.7 dB)	8	8	8	3	4 ms	2	30/ 15					
2	Rel6 HSDPA	Testmo de 1	12.2k bps	H- Set 1	-	12/ 15	15/ 15	1	0	24 (+1.7/- 3.7 dB)	8	8	8	3	4 ms	2	30/ 15					
3	Rel6 HSDPA	Testmo de 1	12.2k bps	H- Set 1	-	15/ 15	8/1 5	1. 5	0. 5	23.5 (+2.2/- 3.7 dB)	8	8	8	3	4 ms	2	30/ 15					
4	Rel6 HSDPA	Testmo de 1	12.2k bps	H- Set 1	-	15/ 15	4/1 5	1. 5	0. 5	23.5 (+2.2/- 3.7 dB)	8	8	8	3	4 ms	2	30/ 15					
1	Rel6 HSUPA	Testmo de 1	12.2k bps	H- Set 1	HSUPA Loopback	11/ 15	15/ 15	1	0	24 (+1.7/- 3.7 dB)	8	8	8	3	4 ms	2	30/ 15	6	0	20	75	242.1
2	Rel6 HSUPA	Testmo de 1	12.2k bps	H- Set 1	HSUPA Loopback	6/1 5	15/ 15	3	2	22 (+3.7/- 3.7 dB)	8	8	8	3	4 ms	2	30/ 15	8	0	12	67	174.9
3	Rel6 HSUPA	Testmo de 1	12.2k bps	H- Set 1	HSUPA Loopback	15/ 15	9/1 5	2	1	23 (+2.7/- 3.7 dB)	8	8	8	3	4 ms	2	30/ 15	8	0	15	92	482.8
4	Rel6 HSUPA	Testmo de 1	12.2k bps	H- Set 1	HSUPA Loopback	2/1 5	15/ 15	3	2	22 (+3.7/- 3.7 dB)	8	8	8	3	4 ms	2	30/ 15	5	0	17	71	205.8
5	Rel6 HSUPA	Testmo de 1	12.2k bps	H- Set 1	HSUPA Loopback	15/ 15	15/ 15	1	0	24 (+1.7/- 3.7 dB)	8	8	8	3	4 ms	2	30/ 15	7	0	81	81	308.9

© 2010 Sierra Wireless, Inc.

This document contains information which is proprietary and confidential to Sierra Wireless, Inc. Disclosure to persons other than the officers, employees, agents, or subcontractors of the Company or licensee of this document without the prior written permission of Sierra Wireless, Inc. is strictly prohibited.

6.2 Maximum Transmit Power Test Results

6.2.1 Test Results for WCDMA/HSDPA/HSUPA Output Power

Mode	3GPP Subtest	B5 (800 MHz) Channel Power (dBm)			B2 (1900 MHz) Channel Power (dBm)			B4 (1700 MHz) Channel Power (dBm)			MPR
		4132	4182	4233	9262	9400	9538	1312	1412	1513	
Rel99	1	22.95	22.88	22.86	23.2	23.02	23.08	22.93	22.87	23.01	N/A
Rel6 HSDPA	1	22.44	22.28	22.35	22.52	22.54	22.66	22.85	22.37	22.82	0
	2	22.42	22.34	22.27	22.69	22.7	22.74	22.94	22.82	22.82	0
	3	21.89	21.81	21.9	22.25	22.16	22.36	22.3	22.22	22.27	0.5
	4	21.96	21.77	21.82	22.22	22.33	22.38	22	22.16	22.34	0.5
Rel6 HSUPA	1	22.25	22.31	22.27	22.23	22.49	22.53	22.23	22.52	22.43	0
	2	20.6	20.19	20.2	20.72	20.5	20.85	20.6	20.71	20.41	2
	3	21.45	21.16	21.2	21.59	21.89	21.5	21.85	21.46	21.78	1
	4	21.62	21.26	21.3	21.41	21.63	21.57	21.74	21.41	21.6	2
	5	22.65	22.35	22.38	22.67	22.62	22.67	22.43	22.55	22.76	0

7 Occupied Bandwidth

FCC 2.1049, 24.238(a)(b), 27.53(h)

7.1 Test Procedure

The transmitter output was connected to a spectrum analyzer through a calibrated coaxial cable and a directional coupler. The occupied bandwidth (defined as the 99% Power Bandwidth) was measured with the spectrum analyzer at low, middle, and high frequencies in each band. The -26dB bandwidth was also measured and recorded. Refer to Test Setup 1.

7.2 Test Results

For WCDMA testing, Rel 99 setup used RMC 12.2kps and R6 HSUPA used setup for 3GPP subtest 5.

7.2.1 WCDMA Summary Results

Mode	Band	Frequency (MHz)	Channel	99% Occupied Bandwidth (MHz)	-26dBc Occupied Bandwidth (MHz)	Corresponding Plot number
B2	Rel99	1880	9400	4.20	4.72	7.2.2.1
	Rel 6 (HSUPA)	1880	9400	4.20	4.76	7.2.3.1

© 2010 Sierra Wireless, Inc.

This document contains information which is proprietary and confidential to Sierra Wireless, Inc. Disclosure to persons other than the officers, employees, agents, or subcontractors of the Company or licensee of this document without the prior written permission of Sierra Wireless, Inc. is strictly prohibited.


SIERRA WIRELESS, INC.

FCC Part 22/24/27, RSS-132/133/139	EM7655	Aug. 16, 2012	Page 10 of 24
------------------------------------	--------	---------------	---------------


B4	Rel99	1732.4	1412	4.20	4.70	7.2.2.2
	Rel 6 (HSUPA)	1732.4	1412	4.18	4.72	7.2.3.2
B5	Rel99	836.4	4182	4.18	4.68	7.2.2.3
	Rel 6 (HSUPA)	836.4	4182	4.16	4.70	7.2.3.3

7.2.2 WCDMA Rel99 Test Plots


7.2.2.1 WCDMA Occupied Bandwidth, B2 Middle channel, 1880 MHz, 99% BW

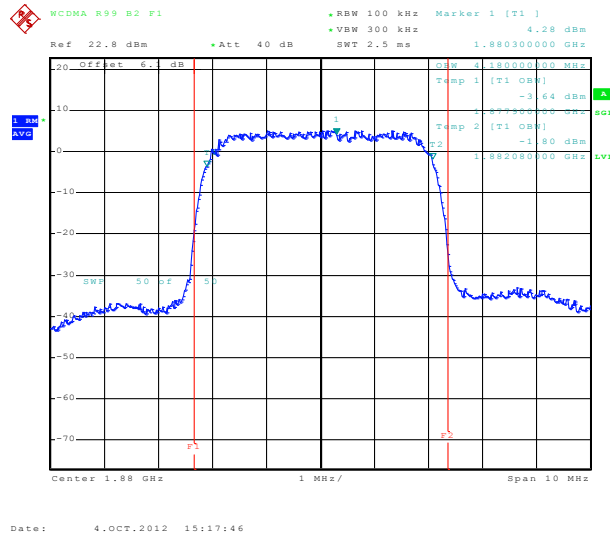

7.2.2.2 WCDMA Occupied Bandwidth, B4 Middle channel, 1732.4 MHz, 99% BW

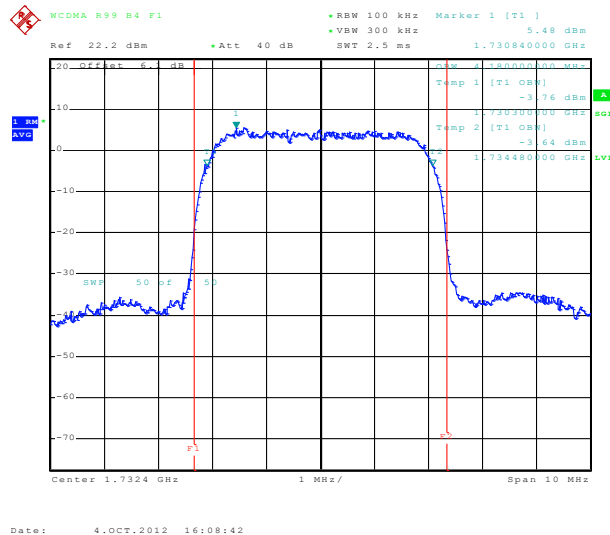


7.2.2.3 WCDMA Occupied Bandwidth, B5 Middle channel, 836.4 MHz, 99% BW

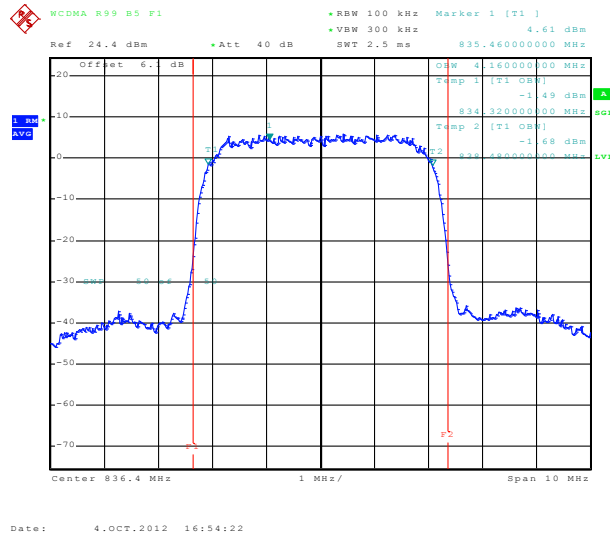

7.2.3 HSUPA Rel6 (Subtest 5) Test Plots


7.2.3.1 WCDMA Rel. 6 Occupied Bandwidth, B2 Middle channel, 1880 MHz, 99% BW

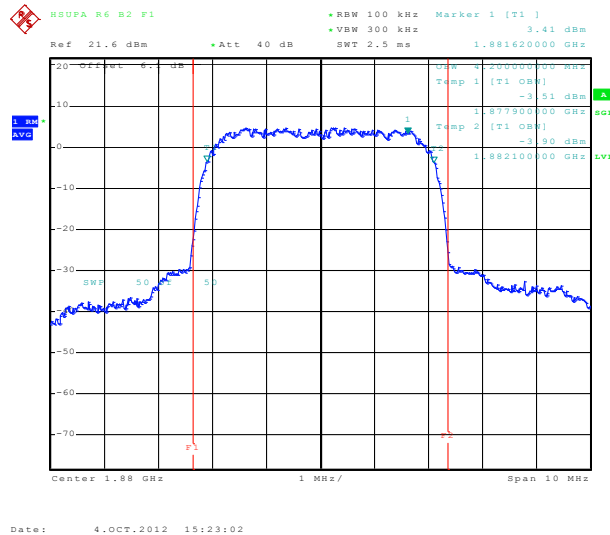


SIERRA WIRELESS, INC.

FCC Part 22/24/27, RSS-132/133/139	EM7655	Aug. 16, 2012	Page 12 of 24
------------------------------------	--------	---------------	---------------

7.2.3.2 WCDMA Rel. 6 Occupied Bandwidth, B4 Middle channel, 1732.4 MHz, 99% BW

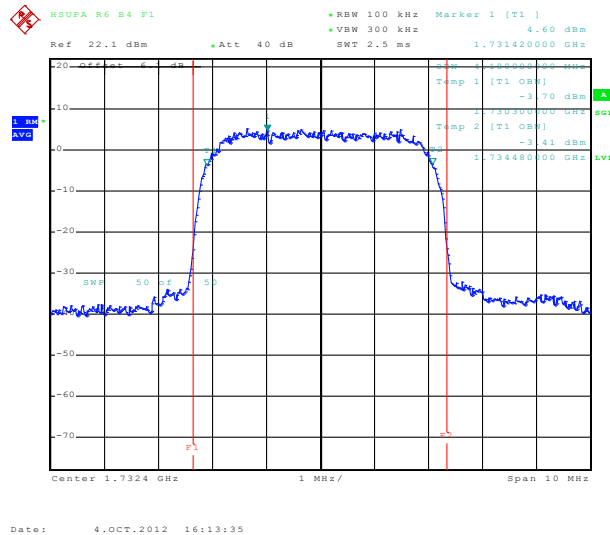

7.2.3.3 WCDMA Rel. 6 Occupied Bandwidth, B5 Middle channel, 836.4 MHz, 99% BW

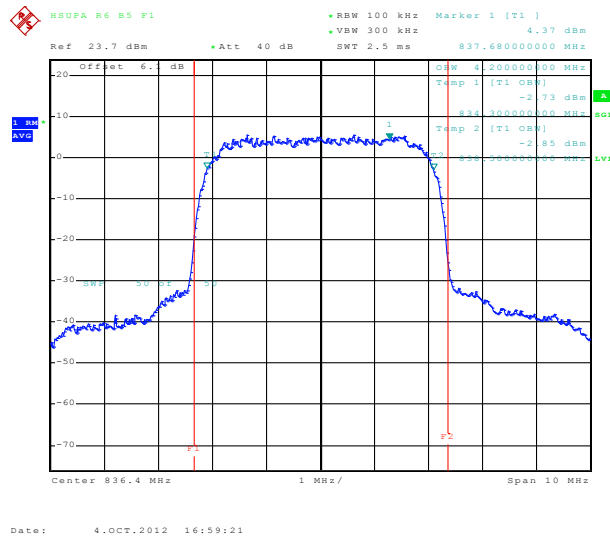

8 Out of Band Emissions at Antenna Terminals

FCC 22.901(d), 22.917, 24.238(a), 27.53(h)(m)

Out of Band Emissions:

The mean power of emissions must be attenuated below the mean power of the unmodulated carrier (P) on any frequency outside the frequency band by at least $(43 + 10 \log P)$ dB. The out of band emission limit translates to a worst case absolute limit of -13dBm in this case.

© 2010 Sierra Wireless, Inc.

The contents of this page are subject to the confidentiality information on page one.

SIERRA WIRELESS, INC.

FCC Part 22/24/27, RSS-132/133/139	EM7655	Aug. 16, 2012	Page 13 of 24
------------------------------------	--------	---------------	---------------

8.1 Test Procedure

The RF output of the transmitter was connected to a spectrum analyzer through a calibrated coaxial cable. Sufficient scans were taken to show the out-of-band emissions, if any, up to 10th harmonic. The EUT was scanned for spurious emissions from 1MHz to 20GHz with sufficient bandwidth and video resolution. Data plots are included. Multiple sweeps were recorded in maximum hold mode using a peak detector to ensure that the worst-case emissions were captured. Refer to Test Setup 1.

8.2 Test Results


Refer to the following plots.

Mode	Band	Frequency (MHz)	Channel	Corresponding Plot number
Rel99	B2	1880	9400	Plot 6.3.2.3, Plot 6.3.2.4
	B4	1732.4	1412	Plot 6.3.2.9, Plot 6.3.2.10
	B5	836.4	4182	Plot 6.3.2.11, Plot 6.3.2.11

The plots below show that the conducted emission limits requirements are met.

8.2.1 WCDMA Rel99 Test Plots


8.2.1.1 Out of Band Emissions at Antenna Terminals WCDMA B2, Middle channel, 1880 MHz, 2 Hz to 1 GHz

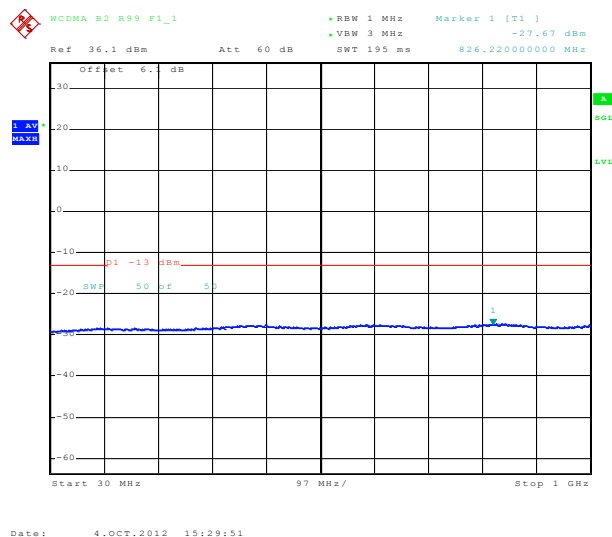

SIERRA WIRELESS, INC.

FCC Part 22/24/27, RSS-132/133/139	EM7655	Aug. 16, 2012	Page 14 of 24
------------------------------------	--------	---------------	---------------


8.2.1.2 Out of Band Emissions at Antenna Terminals WCDMA B2, Middle channel, 1880 MHz, 1 GHz to 10 GHz

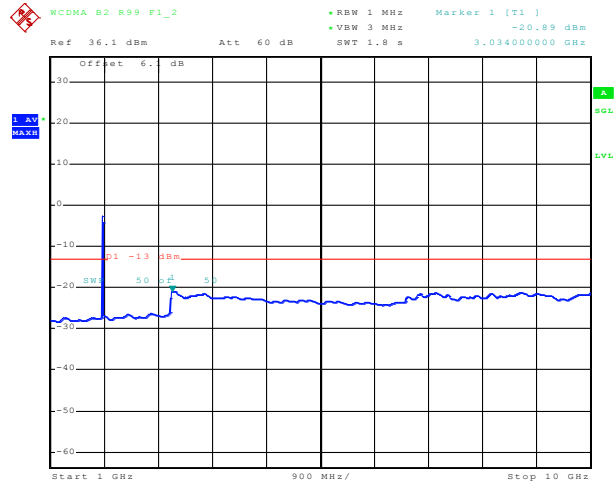

Date: 4.OCT.2012 15:32:06

Note: The strong emission shown is the carrier signal.

8.2.1.3 Out of Band Emissions at Antenna Terminals WCDMA B2, Middle channel, 1880 MHz, 10 GHz to 20 GHz

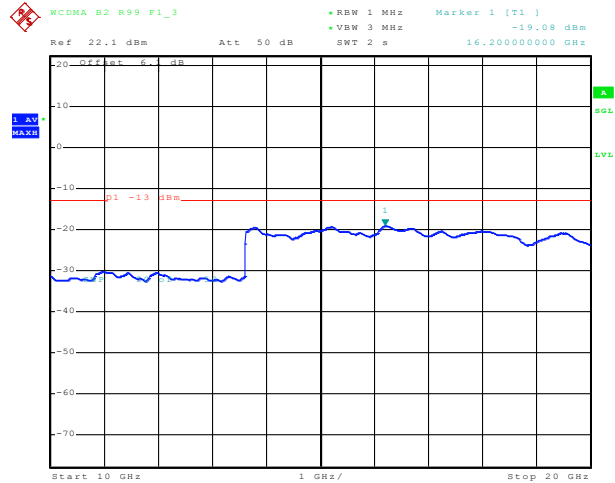


Date: 4.OCT.2012 15:34:12


SIERRA WIRELESS, INC.

FCC Part 22/24/27, RSS-132/133/139	EM7655	Aug. 16, 2012	Page 15 of 24
------------------------------------	--------	---------------	---------------

8.2.1.4 Out of Band Emissions at Antenna Terminals WCDMA B4, Middle channel, 1880 MHz, 2 Hz to 1 GHz

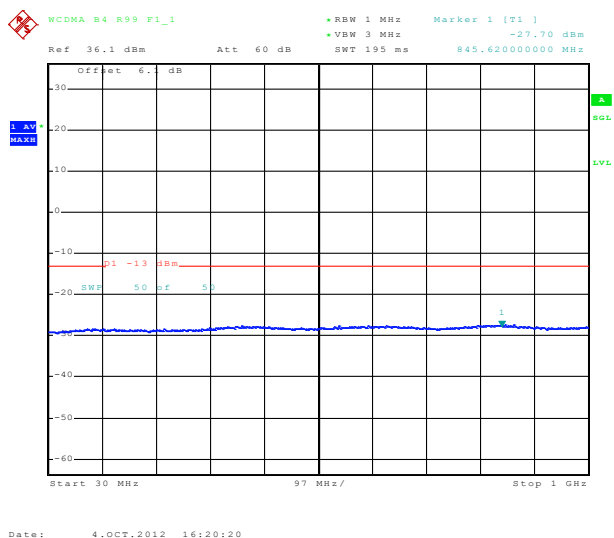

8.2.1.5 Out of Band Emissions at Antenna Terminals WCDMA B4, Middle channel, 1880 MHz, 1 GHz to 10 GHz

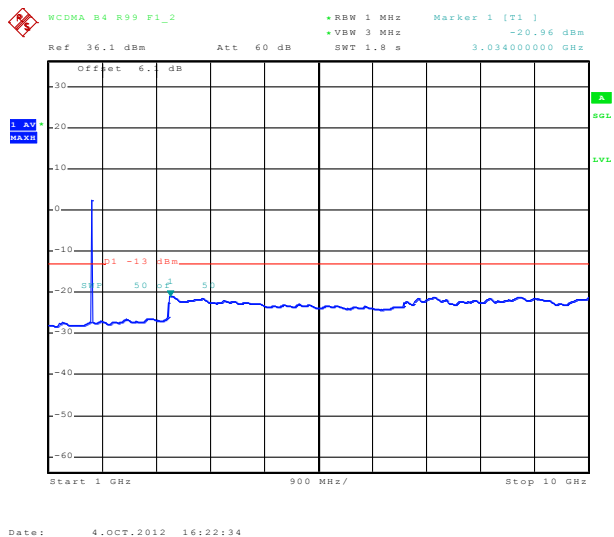


Note: The strong emission shown is the carrier signal.


SIERRA WIRELESS, INC.

FCC Part 22/24/27, RSS-132/133/139	EM7655	Aug. 16, 2012	Page 16 of 24
------------------------------------	--------	---------------	---------------

8.2.1.6 Out of Band Emissions at Antenna Terminals WCDMA B4, Middle channel, 1880 MHz, 10 GHz to 20 GHz

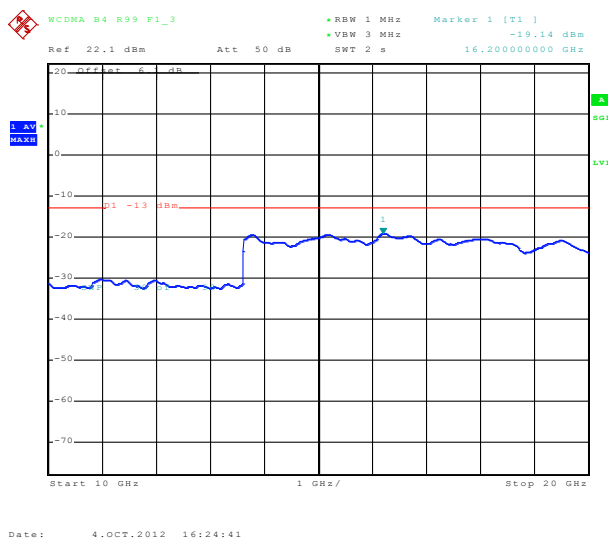


8.2.1.7 Out of Band Emissions at Antenna Terminals WCDMA B5, Middle channel, 836.4 MHz, 2 Hz to 1 GHz

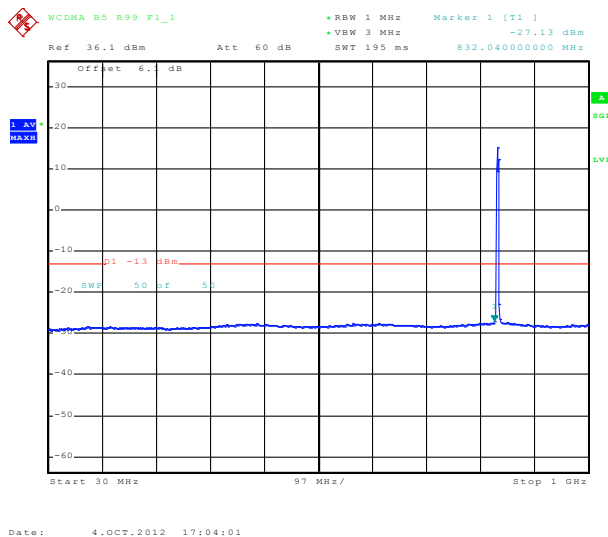

Note: The strong emission shown in each case is the carrier signal.

8.2.1.8 Out of Band Emissions at Antenna Terminals WCDMA B5, Middle channel, 836.4 MHz, 1 GHz to 10 GHz

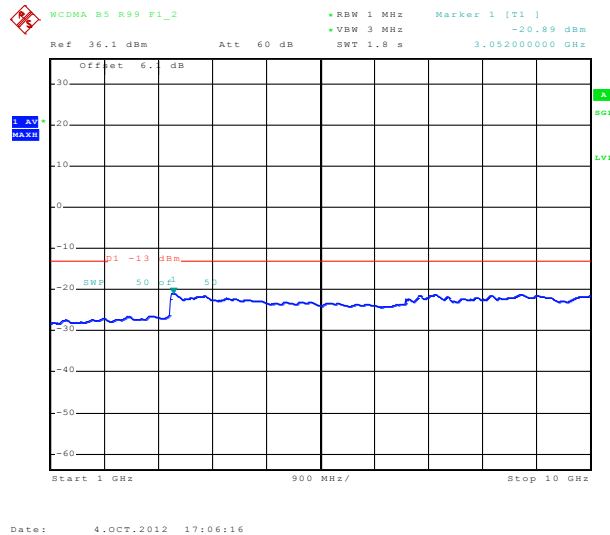

9 Block Edge Compliance

FCC Part 22(h)/24(e)/27.53(h)(m)

9.1 Test Procedure

The transmitter output was connected to a Rohde & Schwarz CMU200 Test Set, through a coaxial RF cable and a directional coupler, and configured to operate at maximum power. The block edge emissions were measured at the required operating frequencies in each band on the Spectrum Analyzer. Refer to Test Setup 1.

The resolution bandwidth was set to at least 1% of the emission bandwidth (where applicable). The power was scaled accordingly:

$$\text{Power offset} = 10 \cdot \log(\text{FCC_RBW} / \text{Measurement_RBW})$$

9.2 Test Results


Block Test	Band	Frequency Boundaries (MHz)	Channels Tested	Corresponding Plots	Result
WCDMA	B2	Below 1850 MHz, above 1910 MHz	9262, 9538	9.2.1.1, 9.2.1.2	Complies
	B4	Below 1710 MHz, above 1755 MHz	1312, 1513	9.2.1.3, 9.2.1.4	Complies
	B5	Below 824 MHz, above 849 MHz	4132, 4233	9.2.1.5, 9.2.1.6	Complies

SIERRA WIRELESS, INC.


FCC Part 22/24/27, RSS-132/133/139	EM7655	Aug. 16, 2012	Page 18 of 24
------------------------------------	--------	---------------	---------------

9.2.1 WCDMA Test Plots

9.2.1.1 WCDMA B2 low channel, below 1850 MHz

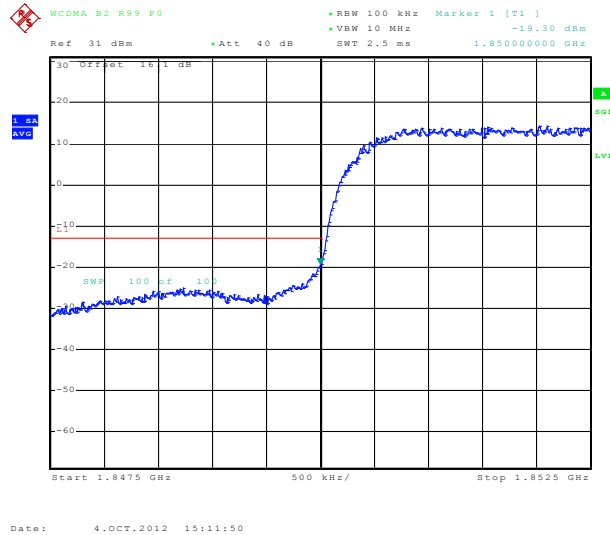


9.2.1.2 WCDMA B2 high channel, above 1910 MHz

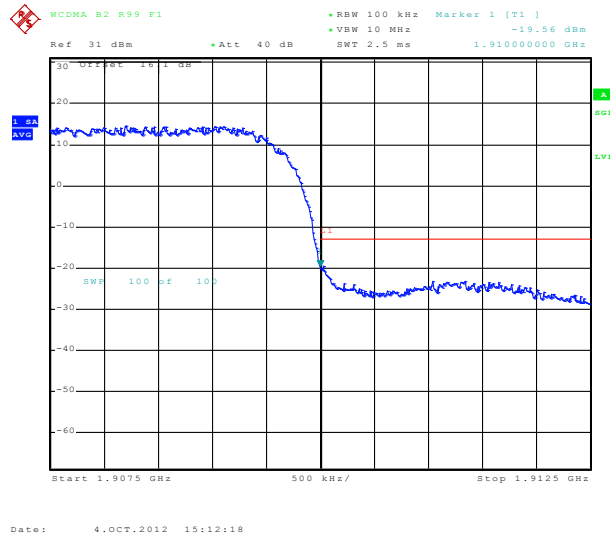


SIERRA WIRELESS, INC.

FCC Part 22/24/27, RSS-132/133/139	EM7655	Aug. 16, 2012	Page 19 of 24
------------------------------------	--------	---------------	---------------


9.2.1.3 WCDMA B4 low channel, below 1710 MHz

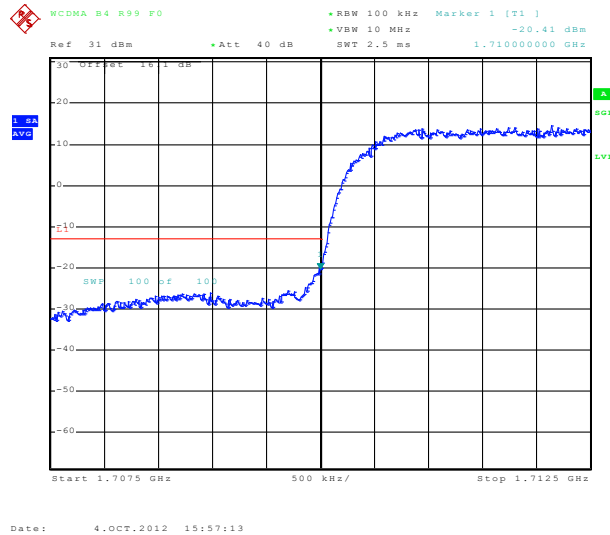


9.2.1.4 WCDMA B4 high channel, above 1755 MHz

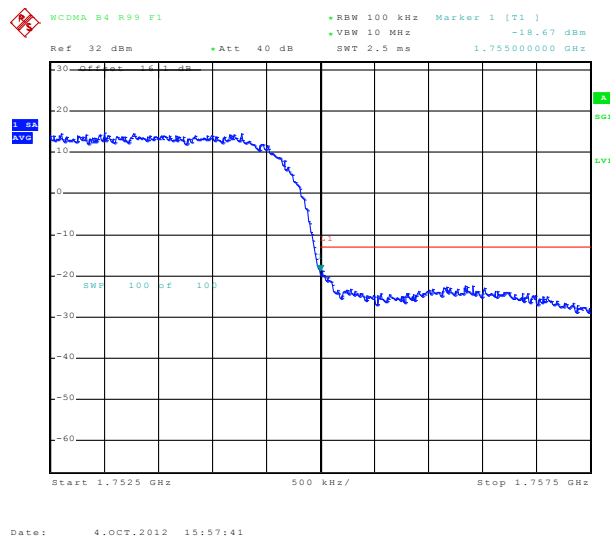

9.2.1.5 WCDMA B5 low channel, below 824 MHz

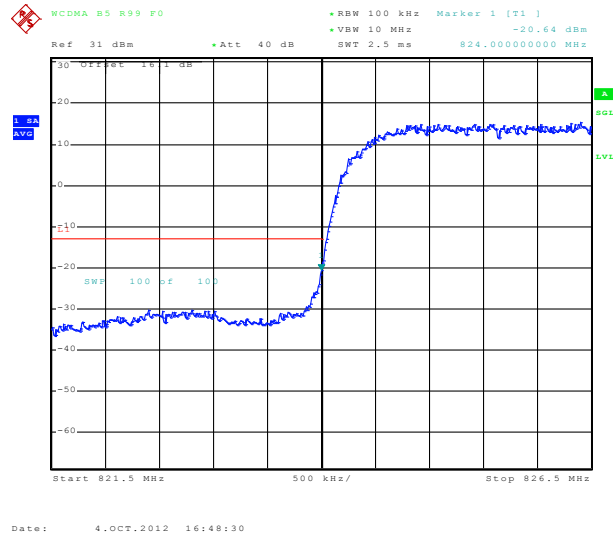

9.2.1.6 WCDMA B5 high channel, above 849 MHz

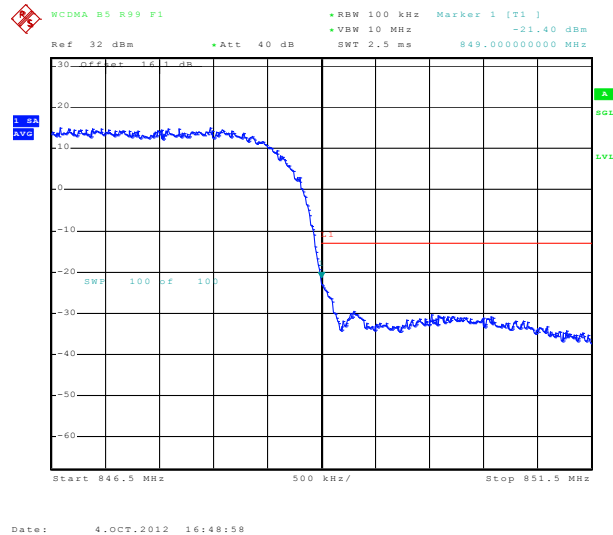

10 Frequency Stability versus Temperature

FCC 2.1055, FCC 22.355, FCC 24.235, FCC 27.54

10.1 Summary of Results

The EUT's Frequency Stability versus temperature meets the requirements of less than 2.5ppm when temperature varies from -30°C to +50°C.

10.2 Test Procedure

The EUT was placed inside a temperature chamber. The temperature was set to -30°C and maintained to stabilize. After sufficient soak time, the transmitting frequency error was measured. The temperature was then increased by 10 degrees, maintained to stabilize, and the measurement was repeated. This procedure was repeated until +50°C is reached. Frequency metering included internal averaging of the CMU200 to stabilize the reading. Reference power supply voltage for these tests is 3.7 volts. Refer to Test Setup 2.

10.3 Test Results

10.3.1 UMTS Frequency Error over Temperature

Temp (°C)	WCDMA R99 Mode					
	B2 (1900 MHz)		B4 (1700 MHz)		B5 (800 MHz)	
	Offset (Hz)	Offset (ppm)	Offset (Hz)	Offset (ppm)	Offset (Hz)	Offset (ppm)
-30	-5.7	-0.0029	-11.0	-0.0063	-0.3	-0.0003
-20	-6.3	-0.0032	-11.1	-0.0063	-4.2	-0.0050
-10	0.6	0.0003	-10.9	-0.0062	-6.1	-0.0073
0	-6.1	-0.0031	-12.3	-0.0070	-0.8	-0.0010
10	-5.8	-0.0030	-10.9	-0.0062	-5.3	-0.0064
20	1.4	0.0007	-10.7	-0.0061	-5.4	-0.0064
30	-6.5	-0.0033	-11.7	-0.0067	-6.3	-0.0075
40	-7.0	-0.0036	-12.4	-0.0071	-4.3	-0.0052
50	0.3	0.0002	-9.7	-0.0056	-5.9	-0.0071

11 Frequency Stability versus Voltage

FCC 2.1055, FCC 22.355, FCC 24.235, FCC 27.54

11.1 Summary of Results

The EUT is specified to operate with a supply voltage varying between 3.0 VDC and 4.2 VDC, having a nominal voltage of 3.7 VDC. It meets the frequency stability limit of less than 2.5ppm when supply voltage varies within the specified limits. Operation above or below these voltage limits is prohibited by firmware in order to prevent improper operation.

11.2 Test Procedure

The EUT was connected to a DC Power Supply and a UMTS test set (CMU 200) with frequency error measurement capability. The power supply output was adjusted to the test voltage as measured at the input terminals to the device while transmitting. A voltmeter was used to confirm the terminal voltage. The peak frequency error is recorded (worst case). The test voltages are 3.0 volts to 4.2 volts. Refer to Test Setup 2.

SIERRA WIRELESS, INC.

FCC Part 22/24/27, RSS-132/133/139	EM7655	Aug. 16, 2012	Page 22 of 24
------------------------------------	--------	---------------	---------------

11.3 Test Results

11.3.1 UMTS Frequency Error over Voltage

Voltage (V)	WCDMA R99 Mode					
	B2 (1900 MHz)		B4 (1700 MHz)		B5 (800 MHz)	
	Offset (Hz)	Offset (ppm)	Offset (Hz)	Offset (ppm)	Offset (Hz)	Offset (ppm)
3	-12.4	-0.0064	-3.1	-0.0018	-6.0	-0.0072
3.7	-9.7	-0.0050	-2.7	-0.0016	-4.1	-0.0049
4.2	-11.6	-0.0059	-8.3	-0.0048	-6.4	-0.0076

12 Peak to Average Ratio

FCC 27.50(d)

12.1 Summary of Results

The EUT meets the requirement of having a peak to average ratio of less than 13dB.

12.2 Test Procedure


The transmitter output was connected to a Rohde & Schwarz CMU200 through a coaxial RF cable and directional coupler, and configured to operate at maximum power. The peak to average ratio was measured at the required operating frequencies in each band on the Spectrum Analyzer. Refer to Test Setup 1.

12.3 Test Results

Band	Frequency (MHz)	Channel	Modulation	Plots	Peak to Average Ratio (dB)
B2	1880	9400	QPSK	12.3.1.1	3.36
B4	1732.4	1412		12.3.1.2	3.06
B5	836.4	4182		12.3.1.3	3.22


12.3.1 Test Plots

12.3.1.1 WCDMA peak to average ratio, QPSK Band 2, Mid channel, 1880 MHz

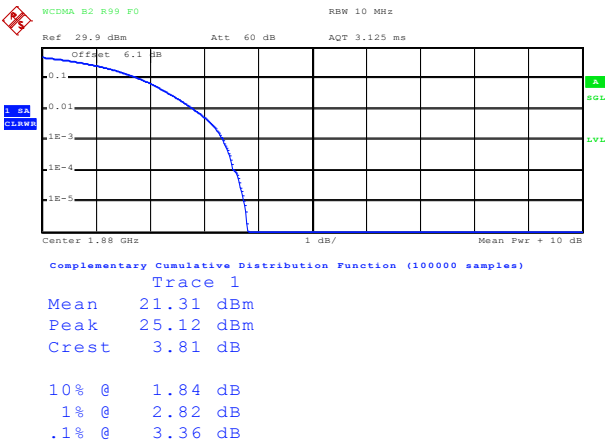

Date: 4.OCT.2012 14:50:20

12.3.1.2 WCDMA peak to average ratio, QPSK Band 4, Mid channel, 1732.4 MHz

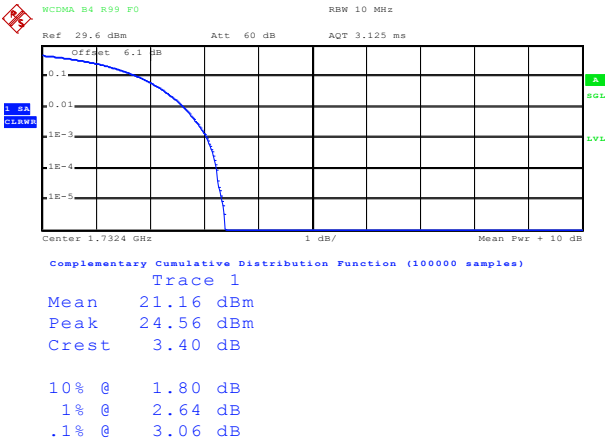


Date: 4.OCT.2012 15:52:57

SIERRA WIRELESS, INC.

FCC Part 22/24/27, RSS-132/133/139	EM7655	Aug. 16, 2012	Page 24 of 24
------------------------------------	--------	---------------	---------------

12.3.1.3 WCDMA peak to average ratio, QPSK Band 5, Mid channel, 836.4 MHz

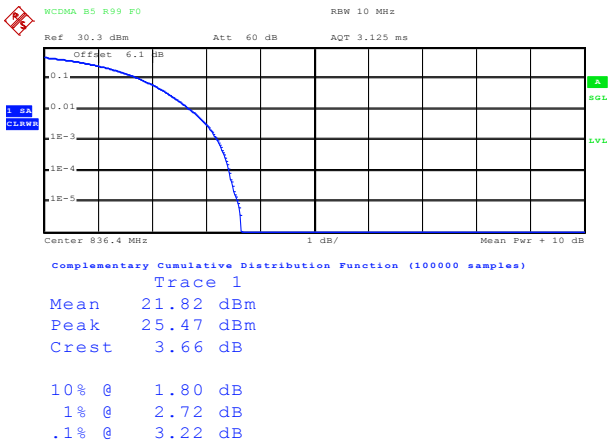

Date: 4.OCT.2012 16:43:47