

Test Laboratory: UL CCS

1_Lap-held

DUT: Panasonic; Type: Tablet; Serial: 1BKSA00017

Communication System: CDMA PCS Band; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $s = 1.531$ mho/m; $\epsilon_r = 53.724$; $\rho = 1000$ kg/m³
Phantom section: Flat Section


Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.99, 6.99, 6.99); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

CDMA2000/PCS_RC3, SO32_CH 600/Area Scan (10x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.013 mW/g

CDMA2000/PCS_RC3, SO32_CH 600/Zoom Scan (7x8x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 2.586 V/m; Power Drift = 0.14 dB
Peak SAR (extrapolated) = 0.023 W/kg
SAR(1 g) = 0.011 mW/g; SAR(10 g) = 0.00632 mW/g

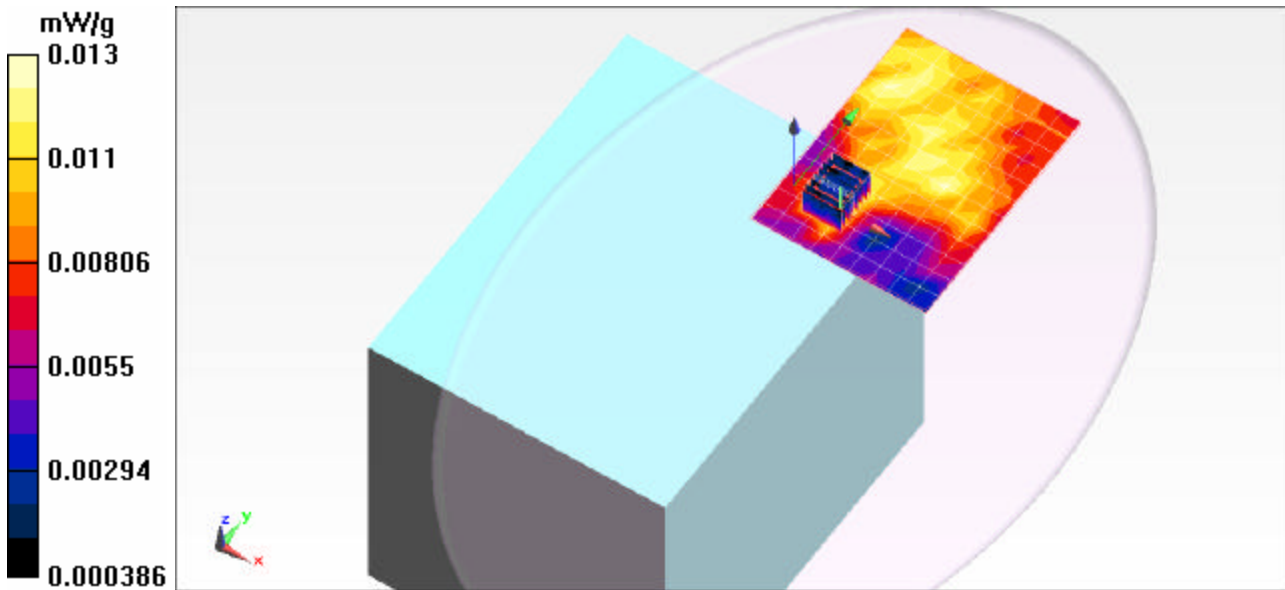

Test Laboratory: UL CCS

4_Bottom Face

DUT: Panasonic ; Type: Tablet; Serial: 1BKKSAA00017

Communication System: CDMA PCS Band; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $s = 1.515$ mho/m; $\epsilon_r = 53.608$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.99, 6.99, 6.99); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.6 (1);SEMCAD X Version 14.4.2 (2595)

CDMA2000/PCS_RC3_SO32_CH 600/Area Scan (11x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.035 mW/g


CDMA2000/PCS_RC3_SO32_CH 600/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 4.978 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.105 W/kg

SAR(1 g) = 0.030 mW/g; SAR(10 g) = 0.014 mW/g

Maximum value of SAR (measured) = 0.037 mW/g

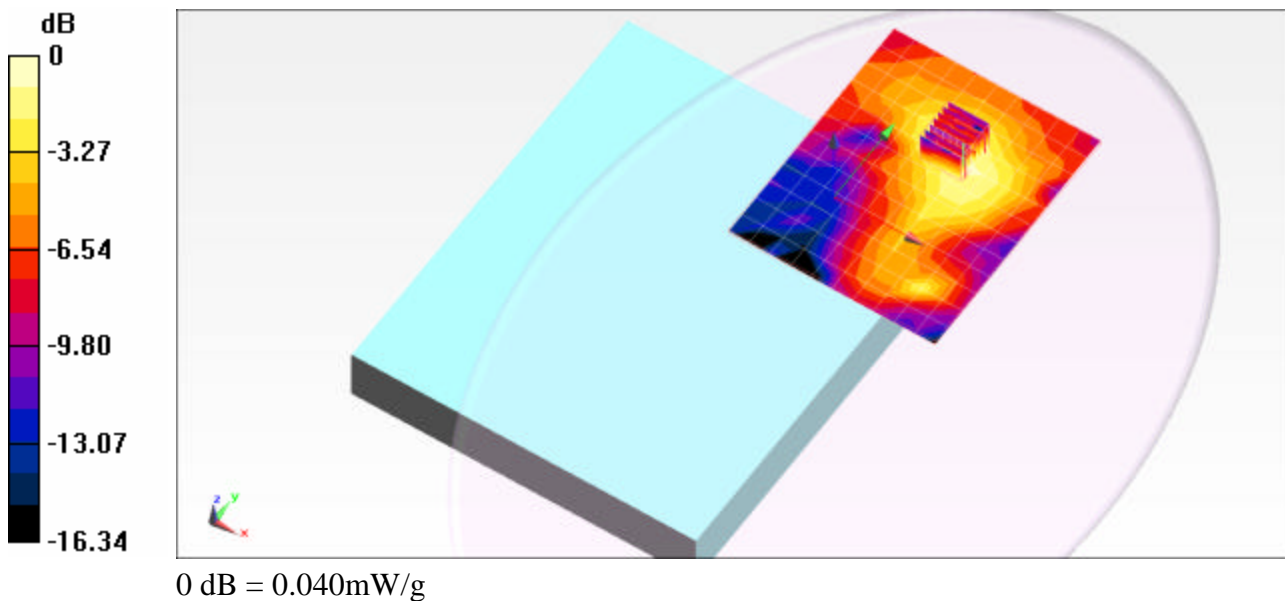

Test Laboratory: UL CCS

5_Secondary Landscape

DUT: Panasonic ; Type: Tablet; Serial: 1BKKSA00017

Communication System: CDMA PCS Band; Frequency: 1880 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $s = 1.515$ mho/m; $\epsilon_r = 53.608$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.99, 6.99, 6.99); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.6 (1);SEMCAD X Version 14.4.2 (2595)

CDMA2000/PCS_RC3, SO32_CH 600/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.602 mW/g

CDMA2000/PCS_RC3, SO32_CH 600/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 19.938 V/m; Power Drift = 0.007 dB

Peak SAR (extrapolated) = 0.963 W/kg

SAR(1 g) = 0.485 mW/g; SAR(10 g) = 0.239 mW/g

Maximum value of SAR (measured) = 0.667 mW/g

