


3.5 Occupied Bandwidth

3.5.1 Test Procedures


1. Set resolution bandwidth (RBW) = 100 kHz, Video bandwidth=300kHz.
2. Detector = Peak, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Using occupied bandwidth measurement function of spectrum analyzer to measure occupied bandwidth.

3.5.2 Test Setup

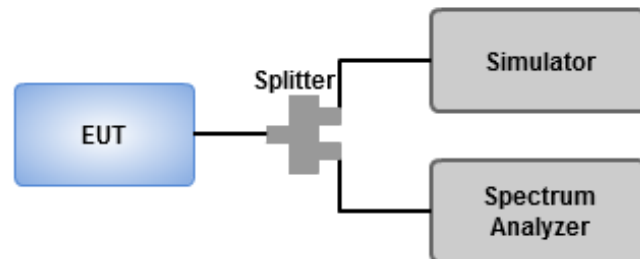

3.5.3 Test Result of Occupied Bandwidth


| BW (MHz) | Modulation | Channel | Frequency (MHz) | 26dB BW (MHz) | 99% OBW (MHz) |
|----------|------------|---------|-----------------|---------------|---------------|
| 1.4 | QPSK | 19957 | 1710.7 | 1.2783 | 1.09 |
| 1.4 | QPSK | 20175 | 1732.5 | 1.2609 | 1.09 |
| 1.4 | QPSK | 20393 | 1754.3 | 1.2783 | 1.09 |
| 1.4 | 16QAM | 19957 | 1710.7 | 1.2739 | 1.09 |
| 1.4 | 16QAM | 20175 | 1732.5 | 1.2870 | 1.09 |
| 1.4 | 16QAM | 20393 | 1754.3 | 1.2870 | 1.09 |

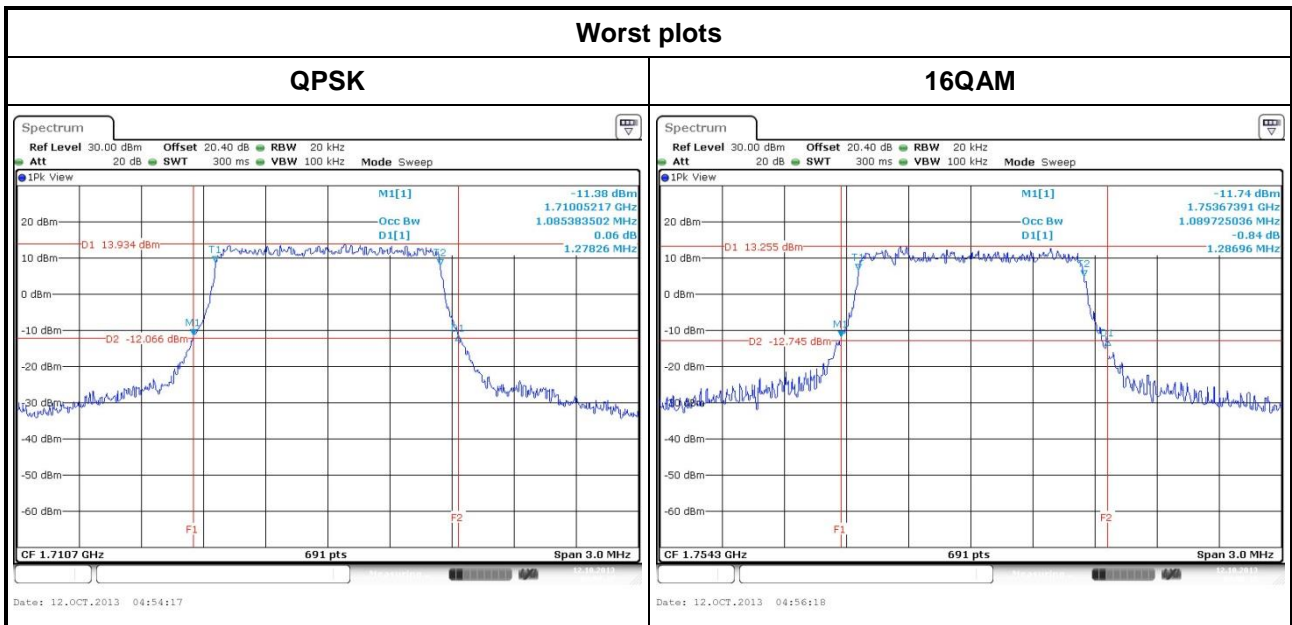


| BW (MHz) | Modulation | Channel | Frequency (MHz) | 26dB BW (MHz) | 99% OBW (MHz) |
|----------|------------|---------|-----------------|---------------|---------------|
| 3 | QPSK | 19965 | 1711.5 | 3.0087 | 2.69 |
| 3 | QPSK | 20175 | 1732.5 | 3.0087 | 2.69 |
| 3 | QPSK | 20385 | 1753.5 | 3.0000 | 2.68 |
| 3 | 16QAM | 19965 | 1711.5 | 3.0174 | 2.69 |
| 3 | 16QAM | 20175 | 1732.5 | 3.0348 | 2.69 |
| 3 | 16QAM | 20385 | 1753.5 | 3.0000 | 2.69 |




| BW (MHz) | Modulation | Channel | Frequency (MHz) | 26dB BW (MHz) | 99% OBW (MHz) |
|----------|------------|---------|-----------------|---------------|---------------|
| 5 | QPSK | 19975 | 1712.5 | 5.1159 | 4.50 |
| 5 | QPSK | 20175 | 1732.5 | 5.1449 | 4.49 |
| 5 | QPSK | 20375 | 1752.5 | 5.1304 | 4.50 |
| 5 | 16QAM | 19975 | 1712.5 | 5.1014 | 4.49 |
| 5 | 16QAM | 20175 | 1732.5 | 5.1159 | 4.50 |
| 5 | 16QAM | 20375 | 1752.5 | 5.0580 | 4.50 |

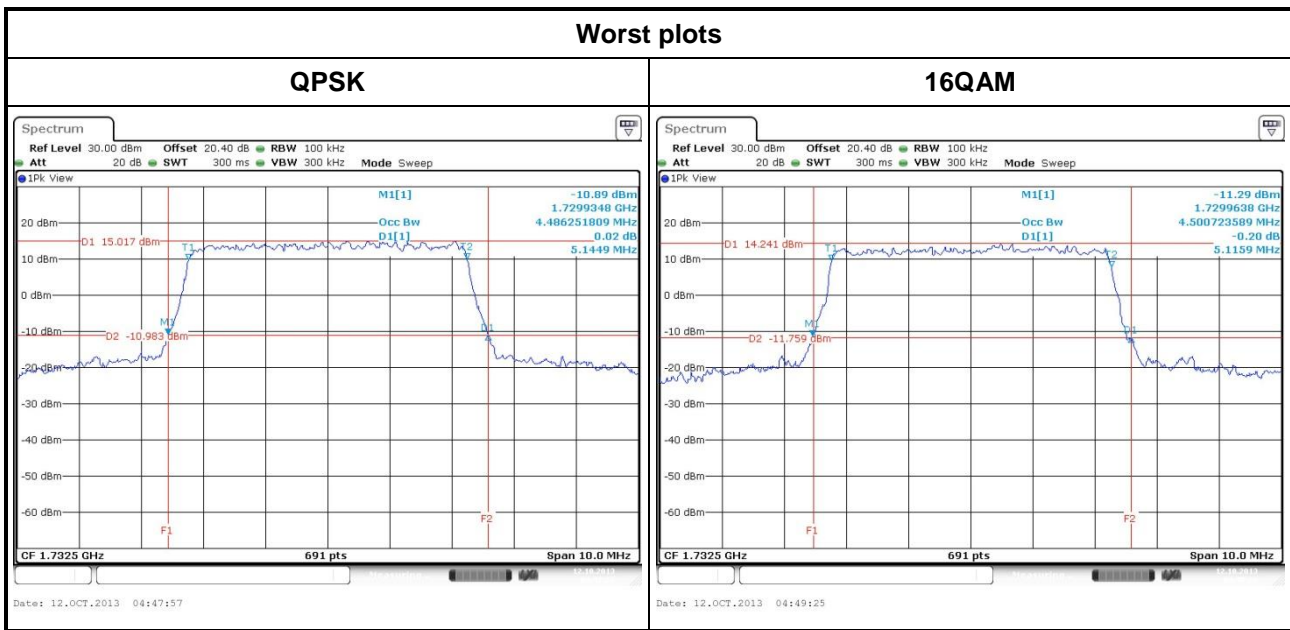


| BW (MHz) | Modulation | Channel | Frequency (MHz) | 26dB BW (MHz) | 99% OBW (MHz) |
|----------|------------|---------|-----------------|---------------|---------------|
| 10 | QPSK | 20000 | 1715.0 | 9.9420 | 9.00 |
| 10 | QPSK | 20175 | 1732.5 | 9.9420 | 9.03 |
| 10 | QPSK | 20350 | 1750.0 | 9.9130 | 9.03 |
| 10 | 16QAM | 20000 | 1715.0 | 9.8551 | 8.94 |
| 10 | 16QAM | 20175 | 1732.5 | 9.9130 | 8.94 |
| 10 | 16QAM | 20350 | 1750.0 | 9.8551 | 8.94 |

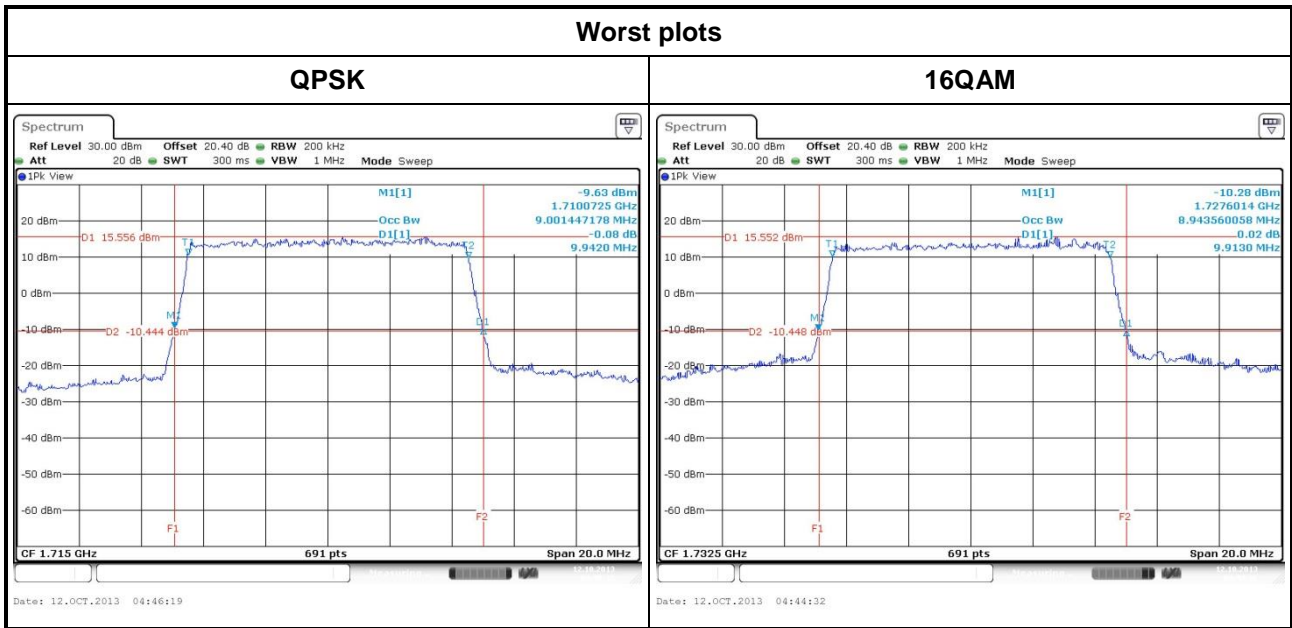

| BW (MHz) | Modulation | Channel | Frequency (MHz) | 26dB BW (MHz) | 99% OBW (MHz) |
|----------|------------|---------|-----------------|---------------|---------------|
| 15 | QPSK | 20025 | 1717.5 | 14.6522 | 13.42 |
| 15 | QPSK | 20175 | 1732.5 | 14.6957 | 13.46 |
| 15 | QPSK | 20325 | 1747.5 | 14.6087 | 13.42 |
| 15 | 16QAM | 20025 | 1717.5 | 14.9130 | 13.42 |
| 15 | 16QAM | 20175 | 1732.5 | 14.6957 | 13.42 |
| 15 | 16QAM | 20325 | 1747.5 | 14.7826 | 13.42 |

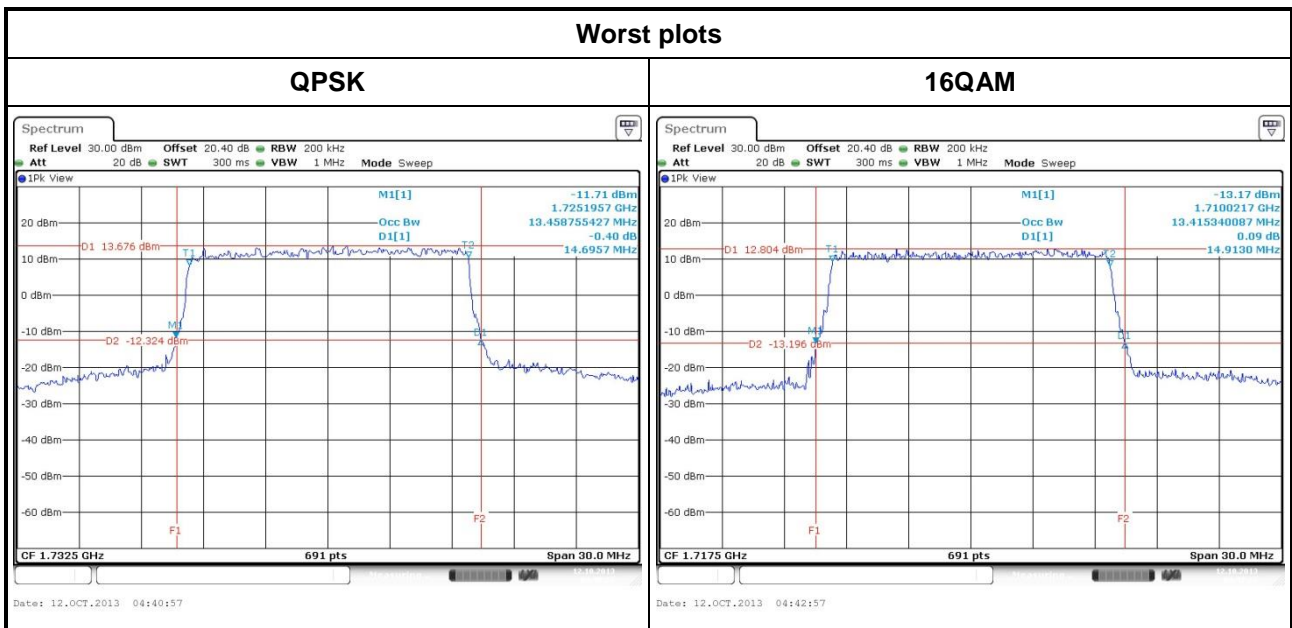

| BW (MHz) | Modulation | Channel | Frequency (MHz) | 26dB BW (MHz) | 99% OBW (MHz) |
|----------|------------|---------|-----------------|---------------|---------------|
| 20 | QPSK | 20050 | 1720.0 | 19.5362 | 17.89 |
| 20 | QPSK | 20175 | 1732.5 | 19.4783 | 17.89 |
| 20 | QPSK | 20300 | 1745.0 | 19.4783 | 17.83 |
| 20 | 16QAM | 20050 | 1720.0 | 19.5362 | 17.95 |
| 20 | 16QAM | 20175 | 1732.5 | 19.4783 | 17.89 |
| 20 | 16QAM | 20300 | 1745.0 | 19.4783 | 17.89 |

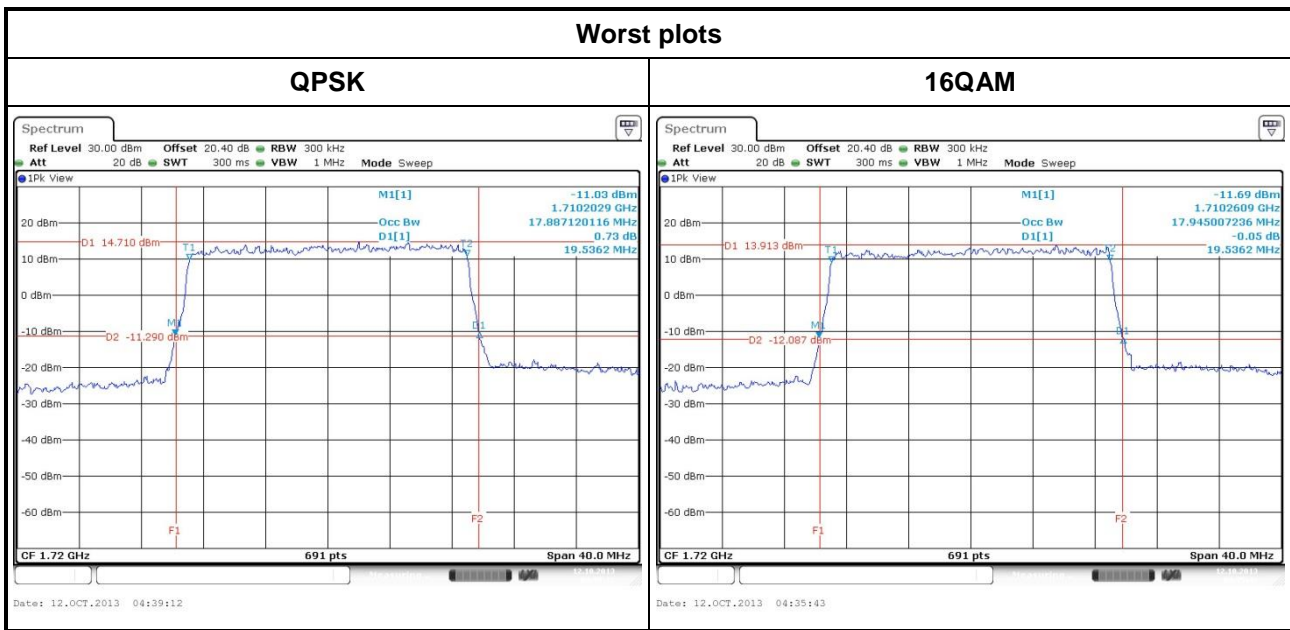

3.6 Peak to Average Ratio


3.6.1 Limit of Peak to Average Ratio

The Peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.6.2 Test Procedures

1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth.
2. Set the number of counts to a value that stabilizes the measured CCDF curve.
3. Set the measurement interval to 1 ms.
4. Record the maximum PAPR level associated with a probability of 0.1%.

3.6.3 Test Setup

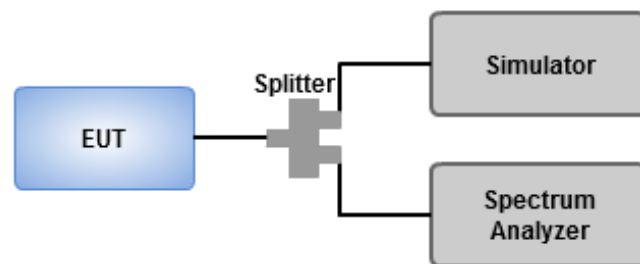


3.6.4 Test Result of Peak to Average Ratio


| BW (MHz) | Modulation | Channel | Frequency (MHz) | Peak to Average Ratio (dB) |
|----------|------------|---------|-----------------|----------------------------|
| 1.4 | QPSK | 19957 | 1710.7 | 5.88 |
| 1.4 | QPSK | 20175 | 1732.5 | 4.46 |
| 1.4 | QPSK | 20393 | 1754.3 | 5.36 |
| 1.4 | 16QAM | 19957 | 1710.7 | 6.64 |
| 1.4 | 16QAM | 20175 | 1732.5 | 5.33 |
| 1.4 | 16QAM | 20393 | 1754.3 | 6.12 |



| BW (MHz) | Modulation | Channel | Frequency (MHz) | Peak to Average Ratio (dB) |
|----------|------------|---------|-----------------|----------------------------|
| 3 | QPSK | 19965 | 1711.5 | 5.80 |
| 3 | QPSK | 20175 | 1732.5 | 4.58 |
| 3 | QPSK | 20385 | 1753.5 | 5.01 |
| 3 | 16QAM | 19965 | 1711.5 | 6.64 |
| 3 | 16QAM | 20175 | 1732.5 | 5.42 |
| 3 | 16QAM | 20385 | 1753.5 | 6.12 |

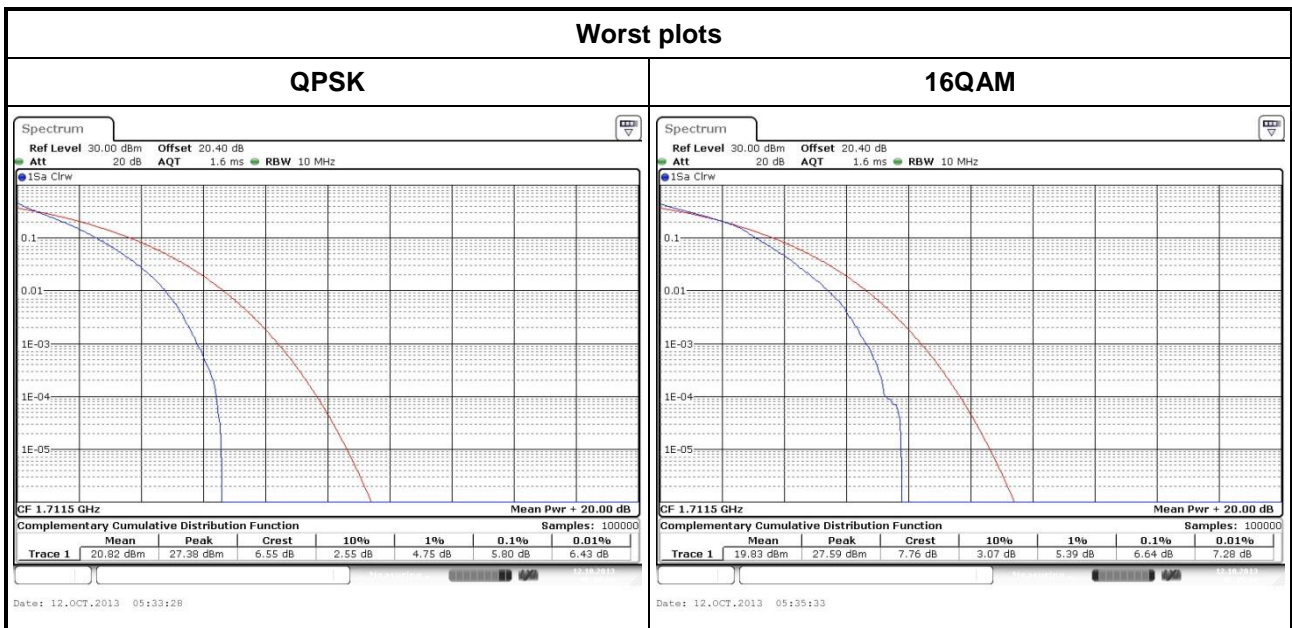


| BW (MHz) | Modulation | Channel | Frequency (MHz) | Peak to Average Ratio (dB) |
|----------|------------|---------|-----------------|----------------------------|
| 5 | QPSK | 19975 | 1712.5 | 5.86 |
| 5 | QPSK | 20175 | 1732.5 | 5.01 |
| 5 | QPSK | 20375 | 1752.5 | 5.04 |
| 5 | 16QAM | 19975 | 1712.5 | 6.58 |
| 5 | 16QAM | 20175 | 1732.5 | 5.51 |
| 5 | 16QAM | 20375 | 1752.5 | 5.94 |

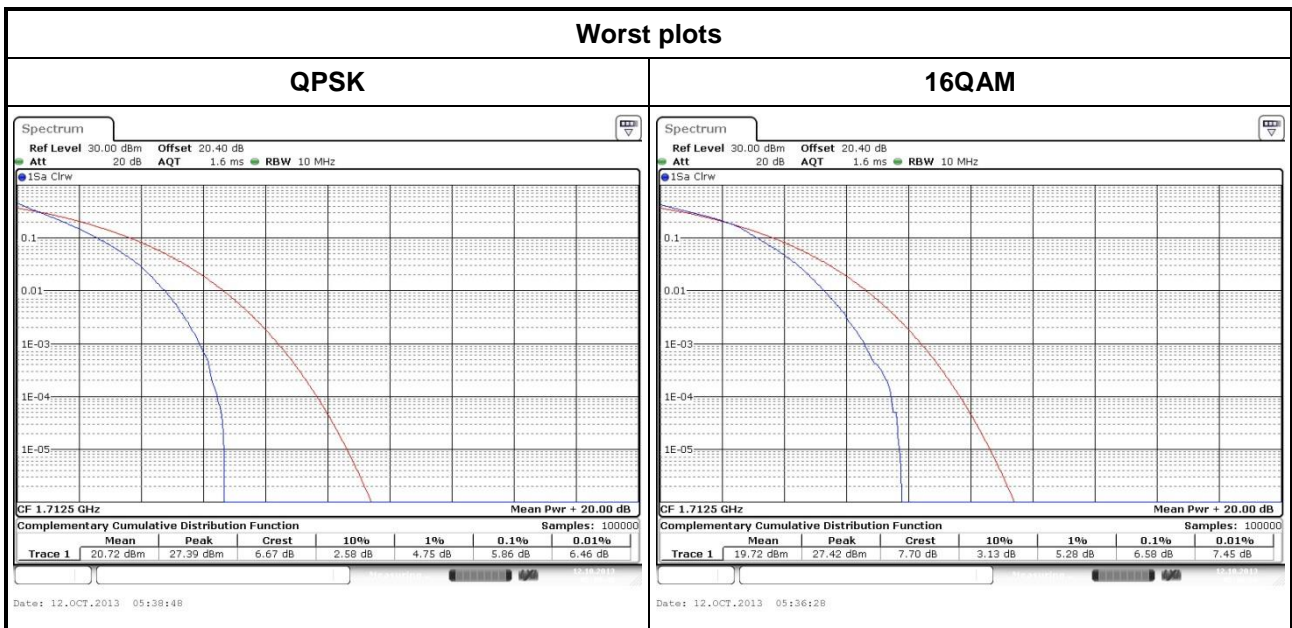


| BW (MHz) | Modulation | Channel | Frequency (MHz) | Peak to Average Ratio (dB) |
|----------|------------|---------|-----------------|----------------------------|
| 10 | QPSK | 20000 | 1715.0 | 5.65 |
| 10 | QPSK | 20175 | 1732.5 | 4.72 |
| 10 | QPSK | 20350 | 1750.0 | 4.67 |
| 10 | 16QAM | 20000 | 1715.0 | 6.52 |
| 10 | 16QAM | 20175 | 1732.5 | 5.62 |
| 10 | 16QAM | 20350 | 1750.0 | 5.65 |



| BW (MHz) | Modulation | Channel | Frequency (MHz) | Peak to Average Ratio (dB) |
|----------|------------|---------|-----------------|----------------------------|
| 15 | QPSK | 20025 | 1717.5 | 5.16 |
| 15 | QPSK | 20175 | 1732.5 | 4.35 |
| 15 | QPSK | 20325 | 1747.5 | 4.38 |
| 15 | 16QAM | 20025 | 1717.5 | 6.23 |
| 15 | 16QAM | 20175 | 1732.5 | 5.68 |
| 15 | 16QAM | 20325 | 1747.5 | 5.51 |

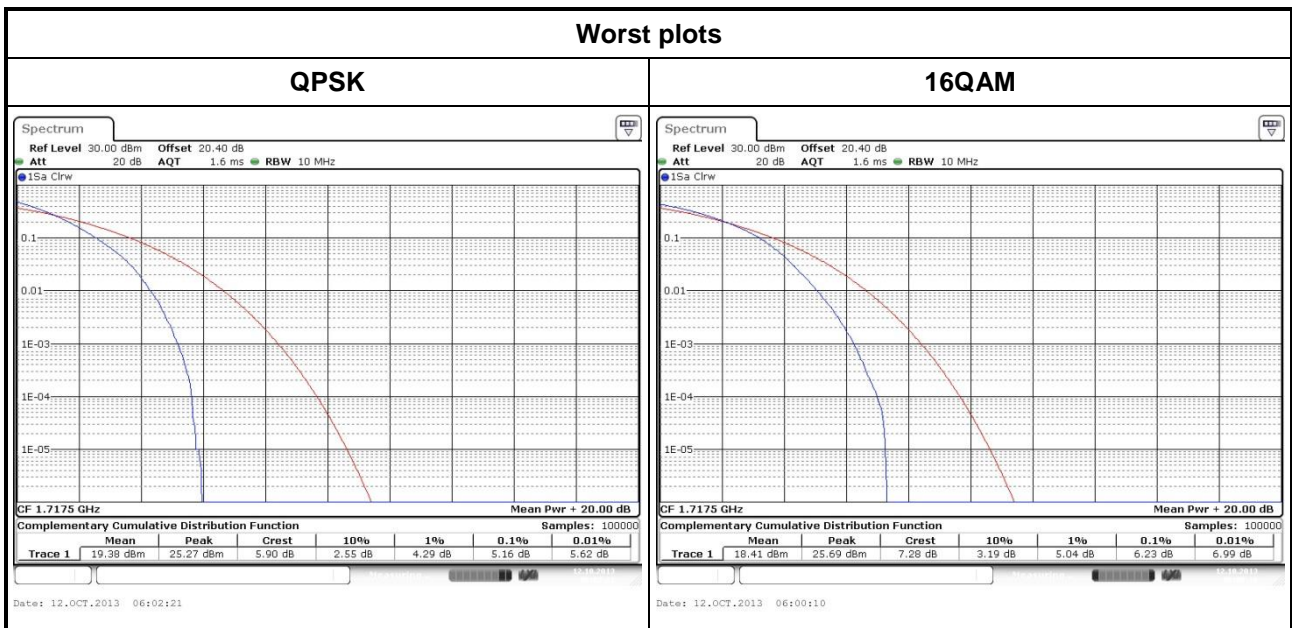

| BW (MHz) | Modulation | Channel | Frequency (MHz) | Peak to Average Ratio (dB) |
|----------|------------|---------|-----------------|----------------------------|
| 20 | QPSK | 20050 | 1720.0 | 4.43 |
| 20 | QPSK | 20175 | 1732.5 | 3.88 |
| 20 | QPSK | 20300 | 1745.0 | 3.74 |
| 20 | 16QAM | 20050 | 1720.0 | 6.00 |
| 20 | 16QAM | 20175 | 1732.5 | 5.68 |
| 20 | 16QAM | 20300 | 1745.0 | 5.51 |

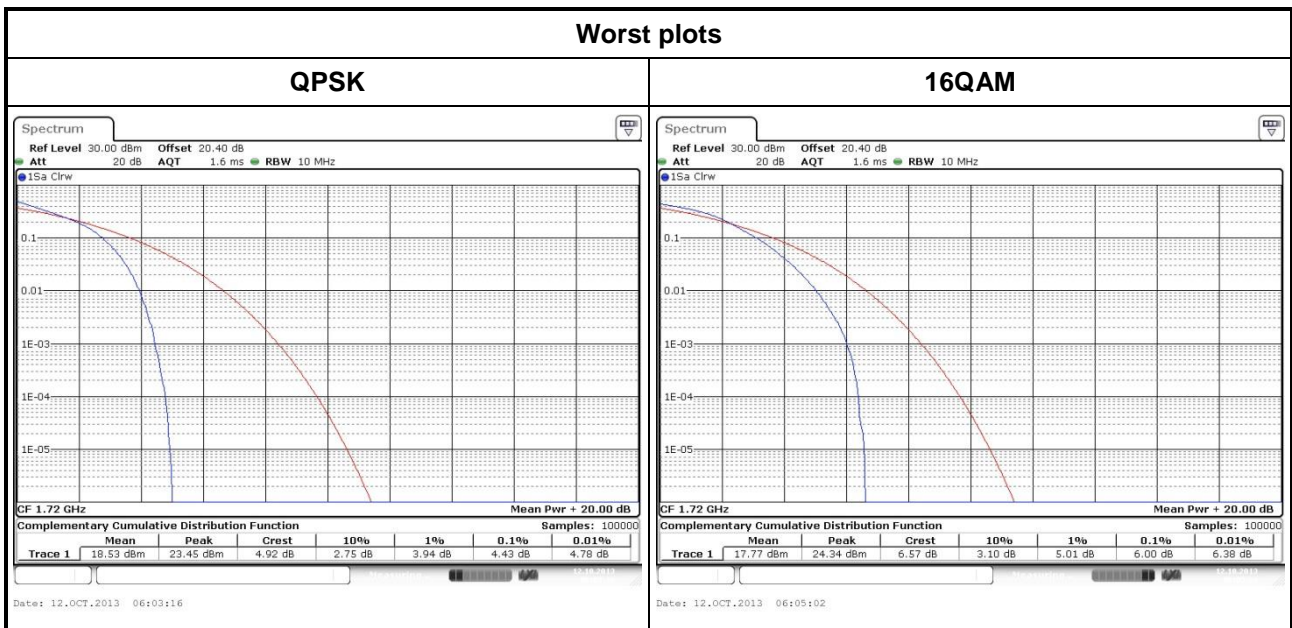

3.7 Frequency Stability


3.7.1 Limit of Frequency Stability

The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

3.7.2 Test Procedures

1. EUT was placed at temperature chamber and connected to an external power supply.
2. Temperature and voltage condition shall be tested to confirm frequency stability.
3. Temperature range is from -30~50°C and voltage range is from lowest to highest working voltage.
4. Tem Link up EUT and simulator. Confirm frequency drift value of simulator and record it.

3.7.3 Test Setup

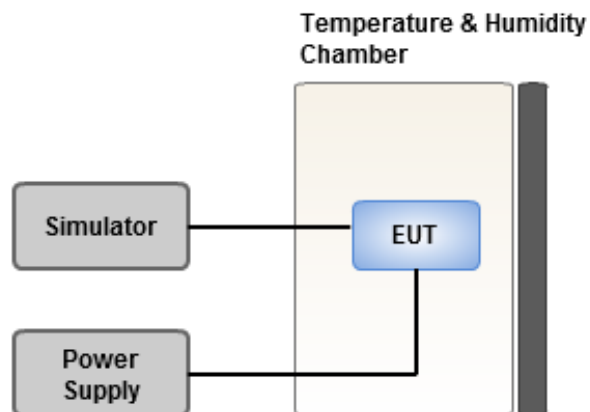

3.7.4 Test Result of Frequency Stability

| LTE Band 4, CB: 1.4MHz | | | |
|------------------------|---------------|-----------------------|-------------|
| Temperature (°C) | Voltage (Vac) | Frequency Drift (ppm) | Limit (ppm) |
| 50 | 110 | 0.009 | 2.5 |
| 40 | 110 | 0.008 | 2.5 |
| 30 | 110 | 0.010 | 2.5 |
| 20 | 110 | 0.009 | 2.5 |
| 10 | 110 | 0.010 | 2.5 |
| 0 | 110 | 0.008 | 2.5 |
| -10 | 110 | 0.009 | 2.5 |
| -20 | 110 | 0.008 | 2.5 |
| -30 | 110 | 0.008 | 2.5 |
| 20 | 126.5 | 0.012 | 2.5 |
| 20 | 93.5 | 0.009 | 2.5 |

| LTE Band 4, CB: 3MHz | | | |
|----------------------|---------------|-----------------------|-------------|
| Temperature (°C) | Voltage (Vac) | Frequency Drift (ppm) | Limit (ppm) |
| 50 | 110 | 0.011 | 2.5 |
| 40 | 110 | 0.010 | 2.5 |
| 30 | 110 | 0.010 | 2.5 |
| 20 | 110 | 0.009 | 2.5 |
| 10 | 110 | 0.009 | 2.5 |
| 0 | 110 | 0.009 | 2.5 |
| -10 | 110 | 0.009 | 2.5 |
| -20 | 110 | 0.009 | 2.5 |
| -30 | 110 | 0.008 | 2.5 |
| 20 | 126.5 | 0.013 | 2.5 |
| 20 | 93.5 | 0.012 | 2.5 |

| LTE Band 4, CB: 5MHz | | | |
|-----------------------------|----------------------|------------------------------|--------------------|
| Temperature (°C) | Voltage (Vac) | Frequency Drift (ppm) | Limit (ppm) |
| 50 | 110 | 0.013 | 2.5 |
| 40 | 110 | 0.011 | 2.5 |
| 30 | 110 | 0.009 | 2.5 |
| 20 | 110 | 0.010 | 2.5 |
| 10 | 110 | 0.011 | 2.5 |
| 0 | 110 | 0.012 | 2.5 |
| -10 | 110 | 0.008 | 2.5 |
| -20 | 110 | 0.009 | 2.5 |
| -30 | 110 | 0.011 | 2.5 |
| 20 | 126.5 | 0.013 | 2.5 |
| 20 | 93.5 | 0.011 | 2.5 |

| LTE Band 4, CB: 10MHz | | | |
|------------------------------|----------------------|------------------------------|--------------------|
| Temperature (°C) | Voltage (Vac) | Frequency Drift (ppm) | Limit (ppm) |
| 50 | 110 | 0.013 | 2.5 |
| 40 | 110 | 0.012 | 2.5 |
| 30 | 110 | 0.012 | 2.5 |
| 20 | 110 | 0.010 | 2.5 |
| 10 | 110 | 0.009 | 2.5 |
| 0 | 110 | 0.011 | 2.5 |
| -10 | 110 | 0.009 | 2.5 |
| -20 | 110 | 0.009 | 2.5 |
| -30 | 110 | 0.010 | 2.5 |
| 20 | 126.5 | 0.013 | 2.5 |
| 20 | 93.5 | 0.012 | 2.5 |

| LTE Band 4, CB: 15MHz | | | |
|------------------------------|----------------------|------------------------------|--------------------|
| Temperature (°C) | Voltage (Vac) | Frequency Drift (ppm) | Limit (ppm) |
| 50 | 110 | 0.010 | 2.5 |
| 40 | 110 | 0.009 | 2.5 |
| 30 | 110 | 0.012 | 2.5 |
| 20 | 110 | 0.010 | 2.5 |
| 10 | 110 | 0.010 | 2.5 |
| 0 | 110 | 0.009 | 2.5 |
| -10 | 110 | 0.011 | 2.5 |
| -20 | 110 | 0.008 | 2.5 |
| -30 | 110 | 0.010 | 2.5 |
| 20 | 126.5 | 0.012 | 2.5 |
| 20 | 93.5 | 0.010 | 2.5 |

| LTE Band 4, CB: 20MHz | | | |
|------------------------------|----------------------|------------------------------|--------------------|
| Temperature (°C) | Voltage (Vac) | Frequency Drift (ppm) | Limit (ppm) |
| 50 | 110 | 0.011 | 2.5 |
| 40 | 110 | 0.013 | 2.5 |
| 30 | 110 | 0.010 | 2.5 |
| 20 | 110 | 0.008 | 2.5 |
| 10 | 110 | 0.009 | 2.5 |
| 0 | 110 | 0.010 | 2.5 |
| -10 | 110 | 0.012 | 2.5 |
| -20 | 110 | 0.012 | 2.5 |
| -30 | 110 | 0.010 | 2.5 |
| 20 | 126.5 | 0.010 | 2.5 |
| 20 | 93.5 | 0.008 | 2.5 |

4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp, it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan Hsiang. Location map can be found on our website <http://www.icertifi.com.tw>.

Linkou

Tel: 886-2-2601-1640

No. 30-2, Ding Fwu Tsuen, Lin Kou District, New Taipei City, Taiwan, R.O.C.

Kwei Shan

Tel: 886-3-271-8666

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Email: ICC_Service@icertifi.com.tw

==END==