

FCC Part22H&90S Test Report

Product Name : Wireless Module
Model No. : MC7354B
FCC ID : N7NMC7354B
IC ID : 2417C-MC7354B

Applicant : Sierra Wireless Inc.

Address : 13811 Wireless Way Richmond, British Columbia,
Canada, V6V 3A4.

Date of Receipt : Jun. 08, 2015
Test Date : Jun. 08, 2015~ Jun. 24, 2015
Issued Date : Jun. 25, 2015
Report No. : 1560266R-HP-US-P07V01
Report Version : V 1.0

The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by any agency of the government.

The test report shall not be reproduced without the written approval of QuieTek Corporation.

Test Report Certification

Issued Date : Jun. 25, 2015
Report No. : 1560266R-HP-US-P07V01



Product Name : Wireless Module
Applicant : Sierra Wireless Inc.
Address : 13811 Wireless Way Richmond, British Columbia, Canada,
V6V 3A4.
Manufacturer : Sierra Wireless Inc.
Address : 13811 Wireless Way Richmond, British Columbia, Canada,
V6V 3A4.
Model No. : MC7354B
FCC ID : N7NMC7354B
IC : 2417C-MC7354B
EUT Voltage : DC 5V
Applicable Standard : FCC CFR Title 47 Part 2,TIA/EIA 603-C
FCC Part22 Subpart H
FCC Part90 Subpart S
Industry Canada RSS-132, Issue 3
Industry Canada RSS-119, Issue 12
Test Result : Complied
Performed Location : Suzhou EMC Laboratory
No.99 Hongye Rd., Suzhou Industrial Park, Suzhou, 215006,
Jiangsu, China
TEL: +86-512-6251-5088 / FAX: +86-512-6251-5098
FCC Registration Number: 800392; IC Lab Code: 4075B

Documented By : _____
Reviewed By : _____
Approved By : _____

Laboratory Information

We, **Quietek Corporation**, are an independent EMC and safety consultancy that was established the whole facility in our laboratories. The test facility has been accredited/accepted(audited or listed) by the following related bodies in compliance with ISO 17025, EN 45001 and specified testing scope:

Taiwan R.O.C.	:	BSMI, NCC
USA	:	FCC
Japan	:	VCCI

The related certificate for our laboratories about the test site and management system can be downloaded from Quietek Corporation's Web Site : <http://www.quietek.com/english/about/certificates.aspx?bval=5>
The address and introduction of Quietek Corporation's laboratories can be founded in our Web site : http://www.quietek.com/index_en.aspx
If you have any comments, Please don't hesitate to contact us. Our contact information is as below:

HsinChu Testing Laboratory :

No.75-2, 3rd Lin, Wangye Keng, Yonghxing Tsuen, Qionglin Shiang, Hsinchu County 307, Taiwan, R.O.C.
TEL:+886-3-592-8858 / FAX:+886-3-592-8859 E-Mail : service@quietek.com

LinKou Testing Laboratory :

No.5-22, Ruishukeng, Linkou Dist., New Taipei City 24451, Taiwan, R.O.C.
TEL : 886-2-8601-3788 / FAX : 886-2-8601-3789 E-Mail : service@quietek.com

Suzhou Testing Laboratory :

No.99 Hongye Rd., Suzhou Industrial Park, Suzhou, 215006, Jiangsu, China
TEL : +86-512-6251-5088 / FAX : 86-512-6251-5098 E-Mail : service@quietek.com

TABLE OF CONTENTS

Description	Page
1. General Information	7
1.1. EUT Description	7
1.2. Mode of Operation	8
1.3. Tested System Details	9
1.4. Configuration of Tested System	10
1.5. EUT Exercise Software	11
2. Technical Test	12
2.1. Summary of Test Result	12
2.2. Test Environment	14
3. Maximum Output Power and Effective Isotropic Radiated Power Measurement	15
3.1. Test Equipment	15
3.2. Test Setup	16
3.3. Test Procedure	16
3.4. Uncertainty	19
3.5. Test Result	20
4. Modulation Characteristic	22
4.1. Test Equipment	24
4.2. Test Setup	24
4.3. Uncertainty	24
4.4. Test Result	24
5. Occupied Bandwidth	25
5.1. Test Equipment	25
5.2. Test Setup	25
5.3. Test Procedure	25
5.4. Uncertainty	25
5.5. Test Result	26
6. Conducted Band Edge	38
6.1. Test Equipment	38
6.2. Test Setup	38
6.3. Test Procedure	38
6.4. Uncertainty	39
6.5. Test Result	40
7. Spurious Emission	52
7.1. Test Equipment	52
7.2. Test Setup	53
7.3. Test Procedure	55

7.4. Uncertainty 55
7.5. Test Result..... 56
8. Frequency Stability Under Temperature & Voltage Variations..... 80
8.1. Test Equipment..... 80
8.2. Test Setup..... 80
8.3. Test Procedure 81
8.4. Uncertainty 81
8.5. Test Result..... 82

History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
1560266R-HP-US-P07V01	V1.0	Initial Issued Report	Jun. 25, 2015

1. General Information

1.1. EUT Description

Product Name	Wireless Module
Model No.	MC7354B
EUT Voltage	DC 5V
CDMA	
Support Band	BC0/BC10
Uplink	BC0: 824~849MHz BC10:809~824MHz
Downlink	BC0: 869~894MHz BC10: 854~869MHz
Type of Modulation	QPSK
Antenna Type	Dipole
Peak Antenna Gain	BC0: 1dBi BC10: 1dBi
1XEVD0	
Support Band	BC0/BC10
Uplink	BC0: 824~849MHz BC10:809~824MHz
Downlink	BC0: 869~894MHz BC10: 854~869MHz
Release Version	Rel-A
Type of Modulation	QPSK
Antenna Type	Dipole
Peak Antenna Gain	BC0: 1dBi BC1: 1dBi

1.2. Mode of Operation

QuieTek has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: CDMA 2000 1X BC0 Link
Mode 2: CDMA 2000 1X BC10 Link
Mode 3: CDMA 2000 1XEVD0 BC0 Rel-0 Link
Mode 4: CDMA 2000 1XEVD0 BC10 Rel-0 Link
Mode 5: CDMA 2000 1XEVD0 BC0 Rel-A Link
Mode 6: CDMA 2000 1XEVD0 BC10 Rel-A Link

Note:


1. Regards to the frequency band operation: the lowest, middle and highest frequency of channel were selected to perform the test, then shown on this report.

1.3. Tested System Details

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product		Manufacturer	Model No.	Serial No.	Power Cord
1	CMU200	R&S	CMU200	N/A	N/A

1.4. Configuration of Tested System

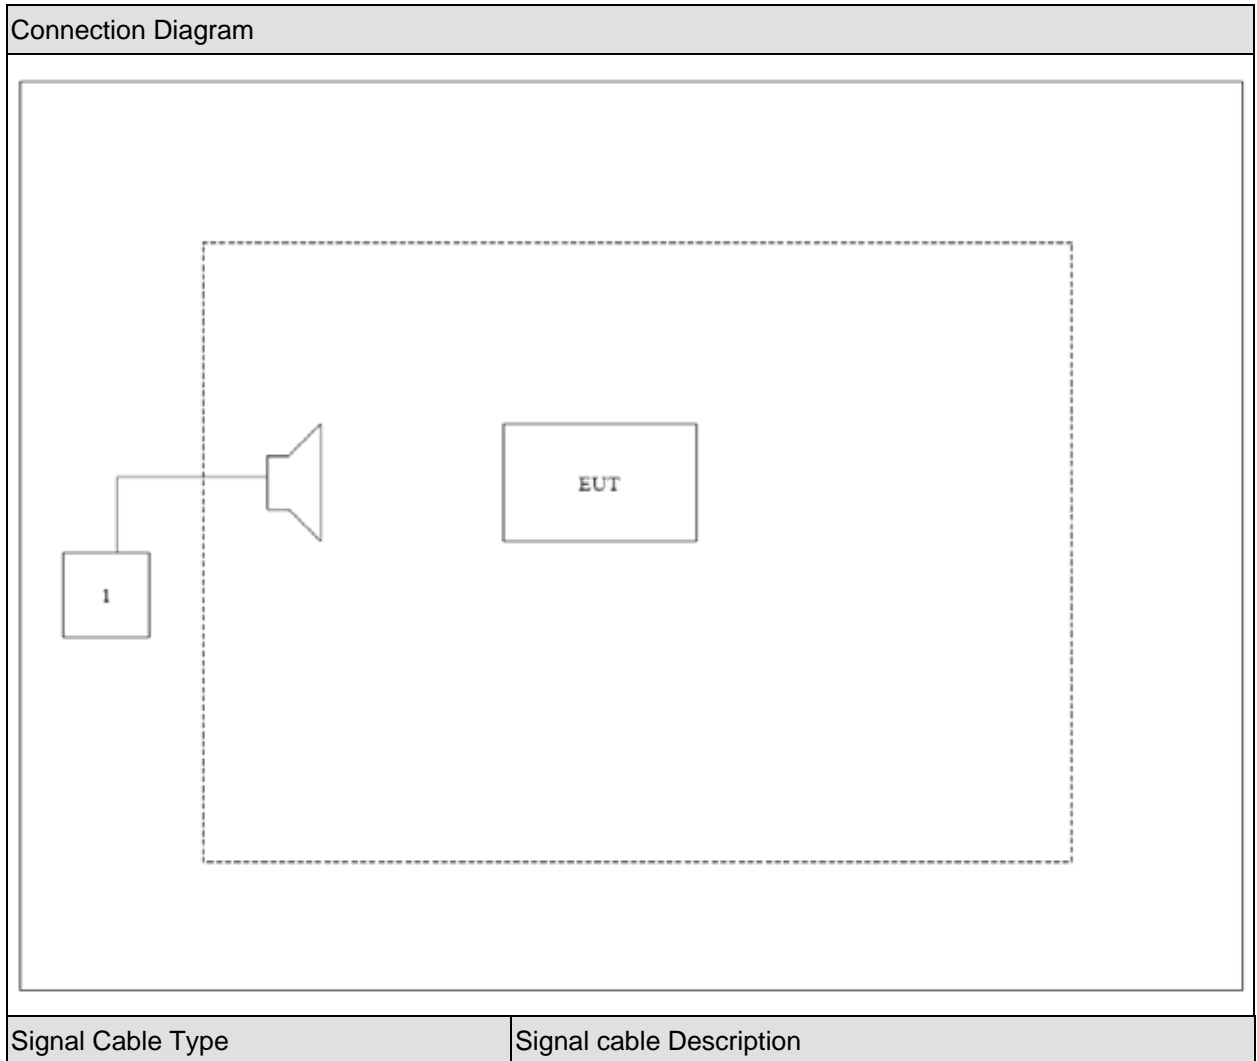

1.5. EUT Exercise Software

1	Setup the EUT and simulators as shown on above.
2	Turn on the power of all equipment.
3	EUT Communicate with CMU200, then select channel to test.

2. Technical Test

2.1. Summary of Test Result

- No deviations from the test standards
 Deviations from the test standards as below description:

For CDMA 2000 1X BC0/CDMA 2000 1XEVD0 BC0
(FCC Part 22 Subpart H & Part 2, Industry Canada RSS-132, Issue 3, Industry Canada RSS-GEN)

Performed Item	FCC Rule	IC Rule	Limit	Result
Maximum Output Power	§2.1033 §2.1046 §22.913	§5.4	< 7 Watts	Pass
Equivalent Isotropic Radiated Power	§22.913	§5.4	< 7 Watts	Pass
Modulation characteristics	§2.1047	§5.2	N/A	Pass
Occupied Bandwidth	§2.1049	RSS-GEN §4.2	N/A	Pass
Conducted Band Edge Emissions	§22.917	§5.5	< -13dBm	Pass
Field Strength of Spurious Radiation	§2.1053 §22.917	§5.5	< -13dBm	Pass
Frequency Stability Under Temperature & Voltage Variations	§2.1055 §22.335	§5.3	< 2.5 ppm	Pass

**For CDMA 2000 1X BC10/CDMA 2000 1XEVD0 BC10
(FCC Part 90 Subpart S & Part 2, Industry Canada RSS-119, Issue 12, Industry Canada
RSS-GEN)**

Performed Item	FCC Rule	IC Rule	Limit	Result
Maximum Output Power	§2.1033	§5.4	< 30 Watts	Pass
	§2.1046			
	§90.635			
Equivalent Isotropic Radiated Power	§90.635	§5.4	< 30 Watts	Pass
Modulation characteristics	§2.1047	§5.2	N/A	Pass
Occupied Bandwidth	§2.1049	RSS-GEN §4.2	N/A	Pass
Conducted Band Edge Emissions	§90.691	§5.8	< - 20dBm	Pass
Field Strength of Spurious Radiation	§2.1053	§5.8	< -13dBm	Pass
	§90.691			
Frequency Stability Under Temperature & Voltage Variations	§2.1055 §90.231	§5.3	< 2.5 ppm	Pass

2.2. Test Environment

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	23
Humidity (%RH)	25-75	52
Barometric pressure (mbar)	860-1060	950-1000

3. Maximum Output Power and Effective Isotropic Radiated Power Measurement

3.1. Test Equipment

Peak Conducted Output Power / AC-6


Instrument	Manufacturer	Type No.	Serial No	Cali. Due Date
PSA Series Spectrum Analyzer	Agilent	E4440A	MY49420184	2016/03/10
Radio Communication Tester	R&S	CMU 200	117088	2016/03/10
Dual Directional Coupler	Agilent	778D	20160	2016/03/10
10dB Coaxial Coupler	Agilent	87300C	MY44300299	2016/03/10
Temperature/Humidity Meter	Zhicheng	ZC1-2	AC6-TH	2016/01/07

Peak Radiated Output Power / AC-5


Instrument	Manufacturer	Type No.	Serial No	Cali. Due Date
Radio Communication Tester	R&S	CMU 200	117088	2016/03/10
Preamplifier	Miteq	NSP1800-25	1364185	2016/05/03
Preamplifier	Quietek	AP-040G	CHM-0906001	2016/05/03
Bilog Antenna	Teseq GmbH	CBL6112D	27612	2016/10/15
DRG Horn	ETS-Lindgren	3117	00123988	2016/01/07
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	737	2016/03/01
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C1	2016/03/01
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C2	2016/03/01
Coaxial Cable	Huber+Suhner	SUCOFLEX 102	AC5-C3	2016/03/10
EMI Receiver	Agilent	N9038A	MY51210196	2015/08/07
Temperature/Humidity Meter	Zhichen	ZC1-2	AC5-TH	2016/01/07

3.2. Test Setup

Conducted Power Measurement:

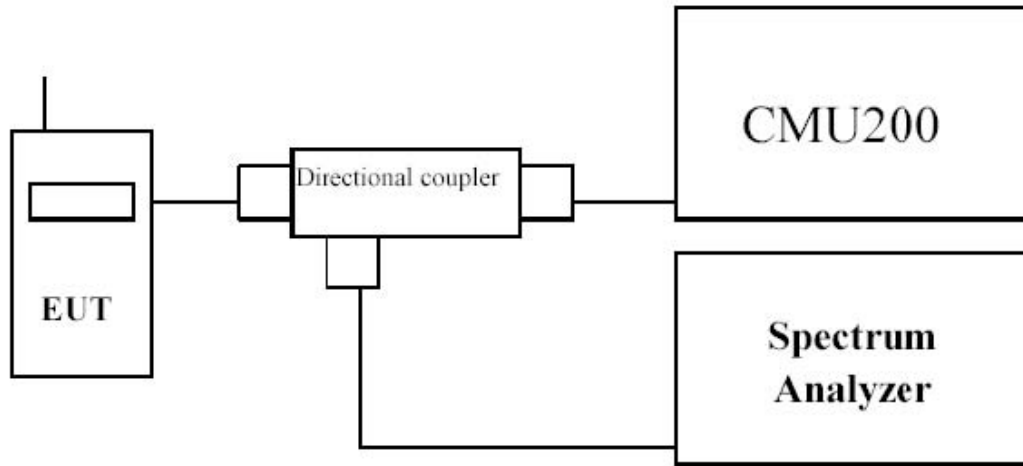

Radiated Power Measurement:

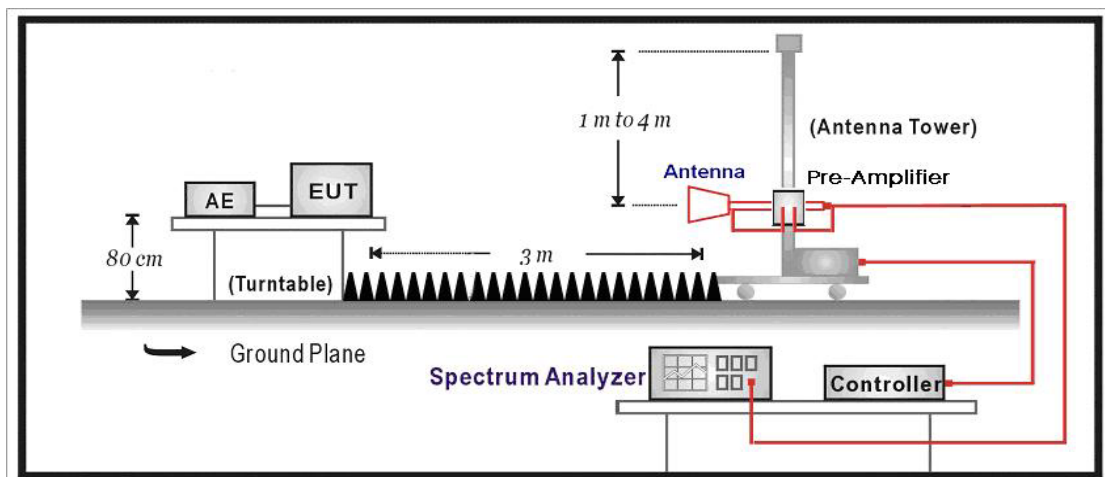

3.3. Test Procedure

For Conducted Power Measurement:

- a) The RF output of the transmitter was connected to base station simulator.
- b) The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement..
- c) Set EUT at maximum average power by base station simulator.
- d) Measure lowest, middle, and highest channels for each bandwidth and different modulation.

For Effective Isotropic Radiated Power Measurement:**Radiated Power Measurement:**

- a) The EUT shall be placed at the specified height on a support, and in the position closest to normal use as declared by provider.
- b) The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter
- c) The output of the test antenna shall be connected to the measuring receiver.
- d) The transmitter shall be switched on and the measuring receiver shall be tuned to the frequency of the transmitter under test.
- e) The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.
- f) The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- g) The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
- h) The maximum signal level detected by the measuring receiver shall be noted.
- i) The transmitter shall be replaced by a substitution antenna.
- j) The substitution antenna shall be orientated for vertical polarization and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
- k) The substitution antenna shall be connected to a calibrated signal generator.
- l) If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- m) The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
- n) The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
- o) The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.
- p) The measure of the effective radiated power is the larger of the two levels recorded at the input to the substitution antenna, corrected for gain of the substitution antenna if necessary.
 - q) Test site anechoic chamber refer to ANSI C63.4: 2009.

Base station simulator settings for each test mode:

1. For 1xRTT

Use CDMA2000 Rev 6 protocol in R&S CMU200.

1) Test for Reverse/Forward TCH RC1, Reverse/Forward TCH RC2, and RC3 Reverse FCH and demodulation of RC 3, 4 and 5.

a. Set up a call using Fundamental Channel Test Mode 1 (RC1, SO 2) with 9600 bps data rate only.

b. As per C.S0011 or TIA/EIA-98-F Table 4.4.5.2-1, set the test parameters as shown in Table 4-1.

c. Send continuously '0' power control bits to the Gobi2000 Module.

d. Measure the output power at Gobi2000 Module antenna connector as recorded on the power meter with values corrected for cables losses.

e. Repeat step b through d for Fundamental Channel Test Mode:

i. RC1, SO55

ii. RC2, SO9

iii. RC2, SO55

iv. RC3, SO55

2) Test for RC 3 Reverse FCH, RC3 Reverse SCH0 and demodulation of RC 3, 4 and 5.

a. Set up a call using Supplemental Channel Test Mode 3 (RC 3, SO 32) with 9600 bps Fundamental Channel and 9600 bps SCH0 data rate.

b. As per C.S0011 or TIA/EIA-98-F Table 4.4.5.2-2, set the test parameters as shown in Table 4-2.

c. Send alternating '0' and '1' power control bit to the Gobi2000 Module

d. Determine the active channel configuration. If the desired channel configuration is not the active channel configuration, increase $\hat{\rho}$ by 1 dB and repeat the verification. Repeat this step until the desired channel configuration becomes active.

e. Measure the output power at the Gobi2000 Module antenna connector.

f. Decrease $\hat{\rho}$ by 0.5 dB.

g. Determine the active channel configuration. If the active channel configuration is the desired channel configuration, measure the output power at the Gobi2000 Module antenna connector.

h. Repeat step f and g until the output power no longer increases or the desired channel configuration is no longer active. Record the highest output power achieved with the desired channel configuration active.

i. Repeat step a through h ten times and average the result.

Table 4-1 Parameters for Max. Power with a single traffic code channel, SR1

Parameter	Units	Value
\hat{I}_{or}	dBm/1.23 MHz	-104
(Pilot Ec) / Ior	dB	-7
(Traffic Ec) / Ior	dB	-7.4

Table 4-2 Parameters for Max. Power with multiple traffic code channel, SR1

Parameter	Units	Value
(Pilot Ec) / Ior	dB	-7
(Traffic Ec) / Ior	dB	-7.4

3.4. Uncertainty

The measurement uncertainty is defined as for Conducted Power Measurement ± 1.2 dB, for Radiated Power Measurement ± 3.2 dB

3.5. Test Result

Product	Wireless Module		
Test Item	Maximum Output Power		
Date of Test	2015/06/13	Test Site	TR-8

CDMA 2000 1X/CDMA 2000 1X EVDO Rel-0/CDMA 2000 1X EVDO Rel-A

Mode	Test Case			BC0 (850MHz) Channel		
	Num.	FWD RC/TAP	REV RC/TAP	Conducted Power (dBm)		
				1013	384	777
1x	1	RC1	RC1 (SO2)	23.58	23.37	22.51
	2	RC1	RC1 (SO55)	23.28	23.11	22.73
	3	RC2	RC2 (SO9)	23.26	23.19	22.41
	4	RC2	RC2 (SO55)	23.26	23.19	22.35
	5	RC3	RC3 (SO55)	23.47	23.37	22.57
	6	RC3	RC3 (SO32)	23.23	23.19	22.69
1x EV-DO Rel0	7a	FTAP rate = 307kbps (2 slot, QPSK)	RTAP rate = 9.6kbps	22.59	22.57	22.53
	7b		RTAP rate = 19.2kbps	22.53	22.47	22.37
	7c		RTAP rate = 38.4kbps	22.51	22.54	22.36
	7d		RTAP rate = 76.8kbps	22.59	22.55	22.54
	7e		RTAP rate = 153.6kbps	22.54	22.47	22.42
1x EV-DO Rev A	8a	FETAP rate = 307kbps (2 slot, ACK channel is transmitted at all the slots)	RETAP – payload size = 128	22.37	22.31	22.18
	8b		RETAP – payload size = 256	22.35	22.29	22.17
	8c		RETAP – payload size = 512	22.41	22.35	22.22
	8d		RETAP – payload size = 768	22.34	22.18	22.05
	8e		RETAP – payload size = 1024	22.22	22.18	22.11
	8f		RETAP – payload size = 1536	22.35	22.31	22.18
	8g		RETAP – payload size = 2048	22.36	22.33	22.21
	8h		RETAP – payload size = 3072	22.41	22.34	22.22
	8i		RETAP – payload size = 4096	22.35	22.25	22.18
	8j		RETAP – payload size = 6144	22.41	22.31	22.20
	8k		RETAP – payload size = 8192	22.33	22.26	22.11
8l	RETAP – payload size = 12288	22.25	22.14	22.05		

Mode	Test Case			BC10 (800MHz) Channel		
	Num.	FWD RC/TAP	REV RC/TAP	Conducted Power (dBm)		
				476	580	684
1x	1	RC1	RC1 (SO2)	23.24	23.19	23.13
	2	RC1	RC1 (SO55)	23.07	23.05	22.98
	3	RC2	RC2 (SO9)	23.11	23.08	23.01
	4	RC2	RC2 (SO55)	23.16	23.05	23.02
	5	RC3	RC3 (SO55)	23.21	23.08	23.05
	6	RC3	RC3 (SO32)	23.18	23.15	23.08
1x EV-DO Rel0	7a	FTAP rate = 307kbps (2 slot, QPSK)	RTAP rate = 9.6kbps	22.43	22.35	22.17
	7b		RTAP rate = 19.2kbps	22.35	22.29	22.19
	7c		RTAP rate = 38.4kbps	22.28	22.18	22.11
	7d		RTAP rate = 76.8kbps	22.31	22.08	22.01
	7e		RTAP rate = 153.6kbps	22.34	22.28	22.14
1x EV-DO Rev A	8a	FETAP rate = 307kbps (2 slot, ACK channel is transmitted at all the slots)	RETAP – payload size = 128	22.45	22.33	22.26
	8b		RETAP – payload size = 256	22.43	22.35	22.23
	8c		RETAP – payload size = 512	22.47	22.41	22.32
	8d		RETAP – payload size = 768	22.36	22.33	22.24
	8e		RETAP – payload size = 1024	22.22	22.15	22.11
	8f		RETAP – payload size = 1536	22.35	22.28	22.16
	8g		RETAP – payload size = 2048	22.3	22.21	22.11
	8h		RETAP – payload size = 3072	22.28	22.2	22.13
	8i		RETAP – payload size = 4096	22.39	22.31	22.15
	8j		RETAP – payload size = 6144	22.27	22.18	22.05
	8k		RETAP – payload size = 8192	22.38	22.16	22.09
8l	RETAP – payload size = 12288	22.31	22.17	22.04		

Note: All conducted measurements are based on an average detector.

Product	Wireless Module		
Test Item	Effective Isotropic Radiated Power		
Date of Test	2015/06/15	Test Site	AC-5

CDMA 2000 1X/CDMA 2000 1X EVDO Rel-0/CDMA 2000 1X EVDO Rel-A

Radiated Power EIRP/ERP				
Band	Modulation	Freq. (MHz)	EIRP (dBm)	H/V
CDMA 2000 1X BC0	GMSK	824.70	24.37	H
		836.52	24.11	H
		848.31	24.05	H
		824.70	22.74	V
		836.52	22.59	V
		848.31	22.32	V
CDMA 2000 1X BC10	GMSK	817.90	24.23	H
		820.50	24.15	H
		823.10	24.11	H
		817.90	22.54	V
		820.50	22.31	V
		823.10	22.14	V
CDMA 2000 1X EVDO Rel-0 BC0	QPSK	824.70	23.77	H
		836.52	23.55	H
		848.31	23.41	H
		824.70	22.11	V
		836.52	22.01	V
		848.31	21.79	V
CDMA 2000 1X EVDO Rel-0 BC10	QPSK	817.90	23.52	H
		820.50	23.33	H
		823.10	23.18	H
		817.90	21.69	V
		820.50	21.46	V

		823.10	21.57	V
CDMA 2000 1X EVDO Rel-A BC 0	QPSK	824.70	23.44	H
		836.52	23.37	H
		848.31	23.18	H
		824.70	21.63	V
		836.52	21.54	V
		848.31	21.34	V
CDMA 2000 1X EVDO Rel-A BC10	QPSK	817.90	23.49	H
		820.50	23.31	H
		823.10	23.28	H
		817.90	21.65	V
		820.50	21.58	V
		823.10	21.45	V


4. Modulation Characteristic

4.1. Test Equipment

Modulation Characteristic / AC-6

Instrument	Manufacturer	Type No.	Serial No	Cali. Due Date
PSA Series Spectrum Analyzer	Agilent	E4440A	MY49420184	2016/03/10
Radio Communication Tester	R&S	CMU 200	117088	2016/03/10
Dual Directional Coupler	Agilent	778D	20160	2016/03/10
10dB Coaxial Coupler	Agilent	87300C	MY44300299	2016/03/10
Temperature/Humidity Meter	Zhicheng	ZC1-2	AC6-TH	2016/01/07

4.2. Test Setup

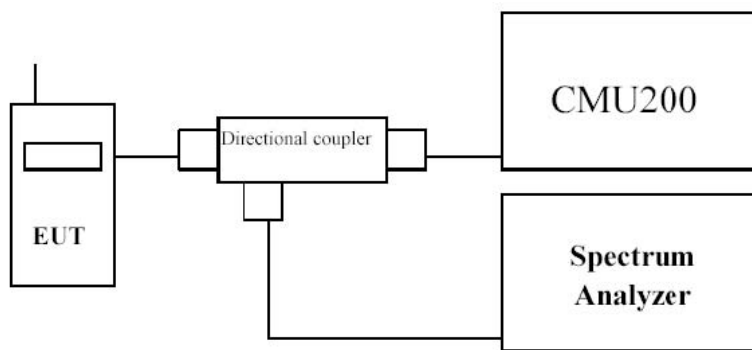

4.3. Uncertainty

The measurement uncertainty is defined as 0.1%

4.4. Test Result

The modulation of CDMA was verified and confirmed compliance with requirement.


5. Occupied Bandwidth

5.1. Test Equipment

Occupied Bandwidth / AC-6

Instrument	Manufacturer	Type No.	Serial No	Cali. Due Date
PSA Series Spectrum Analyzer	Agilent	E4440A	MY49420184	2016/03/10
Radio Communication Tester	R&S	CMU 200	117088	2016/03/10
Dual Directional Coupler	Agilent	778D	20160	2016/03/10
10dB Coaxial Coupler	Agilent	87300C	MY44300299	2016/03/10
Temperature/Humidity Meter	Zhicheng	ZC1-2	AC6-TH	2016/01/07

5.2. Test Setup

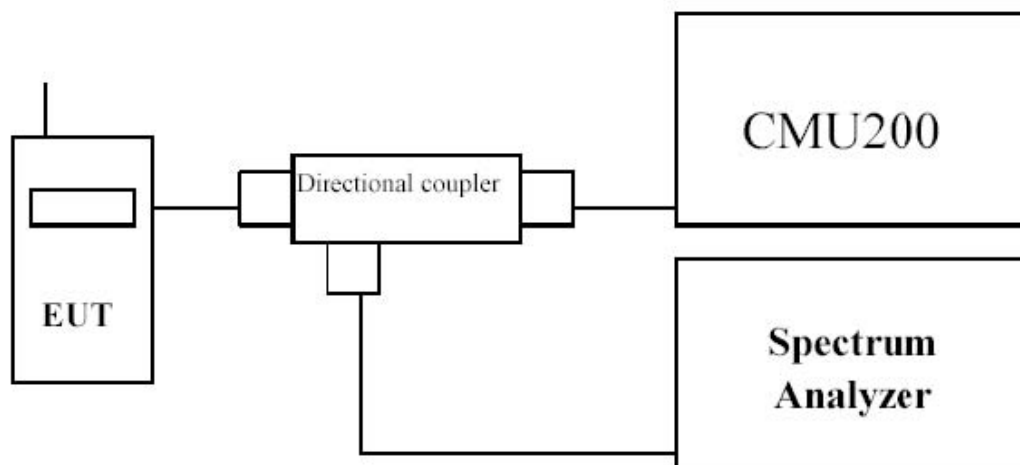

5.3. Test Procedure

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The 99% occupied bandwidth and 26 dB bandwidth of the low & middle & high channel for the highest RF powers were measured.

5.4. Uncertainty

The measurement uncertainty is defined as ± 10 Hz

5.5. Test Result

Product	Wireless Module		
Test Item	Occupied Bandwidth		
Test Mode	Mode 1: CDMA 2000 1X BC0 Link		
Date of Test	2015/06/15	Test Site	AC-6

Channel No.	Frequency (MHz)	-26dB Occupied Bandwidth (kHz)	99% Occupied Bandwidth (kHz)
1013	824.70	1423.00	1273.30
384	836.52	1419.00	1271.80
777	848.31	1421.00	1273.20

Figure Channel 1013 (824.70MHz)

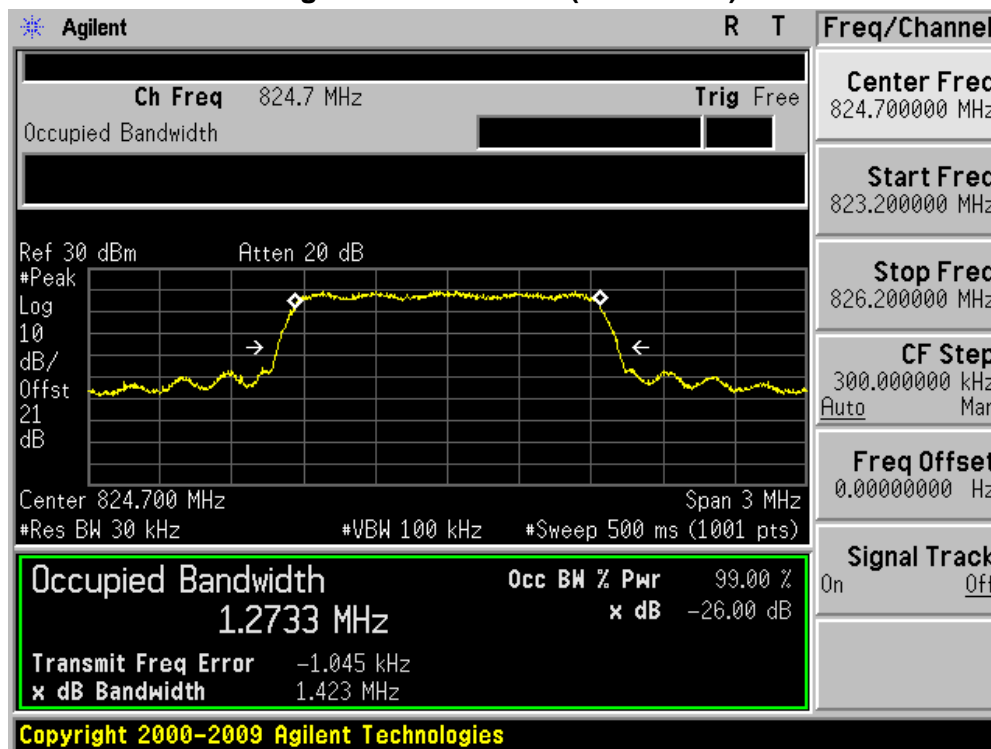


Figure Channel 384 (836.52MHz)


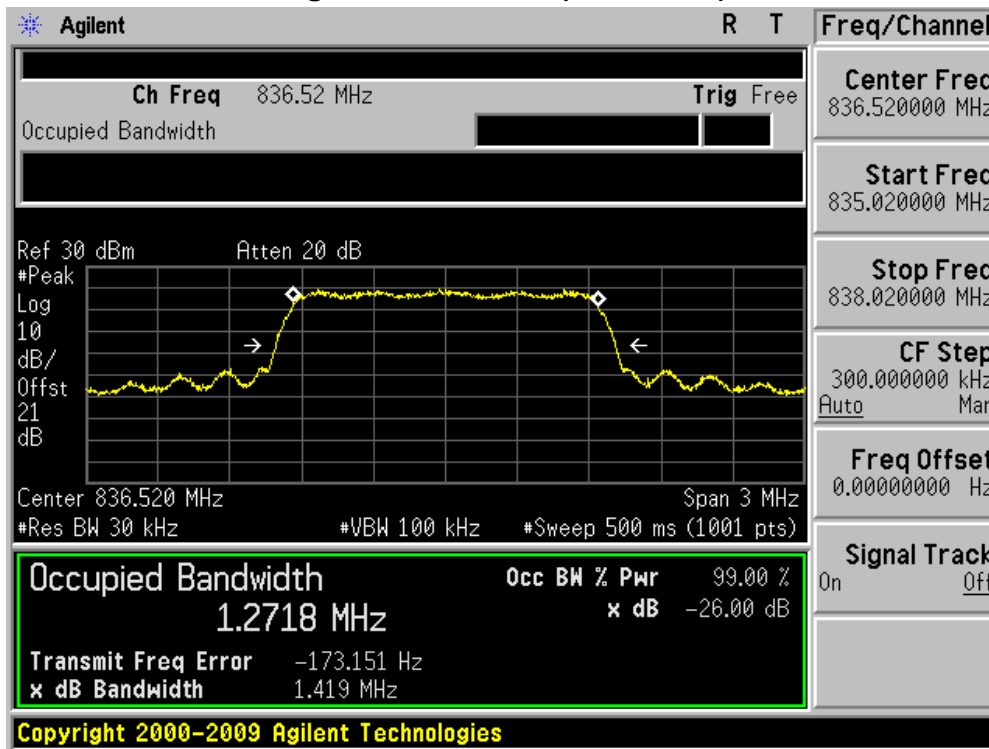


Figure Channel 777 (848.31MHz)

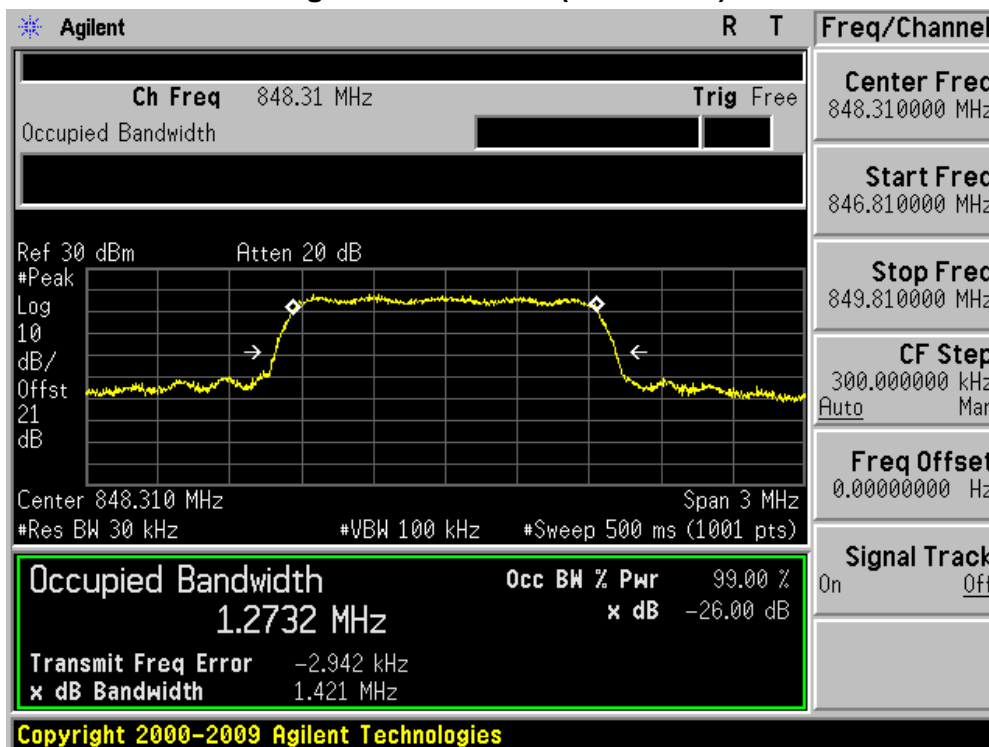

Product	Wireless Module		
Test Item	Occupied Bandwidth		
Test Mode	Mode 2: CDMA 2000 1X BC10 Link		
Date of Test	2015/06/15	Test Site	AC-6

00	Frequency (MHz)	-26dB Occupied Bandwidth (kHz)	99% Occupied Bandwidth (kHz)
476	817.90	1422.00	1273.70
580	820.50	1427.00	1272.00
684	823.10	1429.00	1271.70

Figure Channel 476 (817.90MHz)

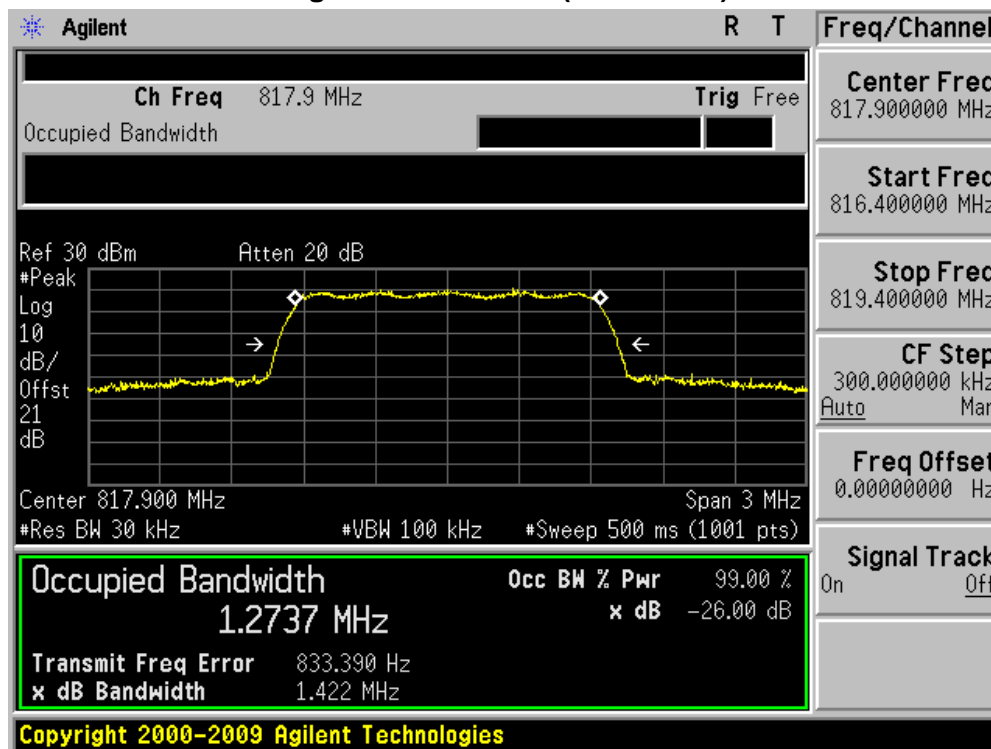


Figure Channel 580 (820.50MHz)


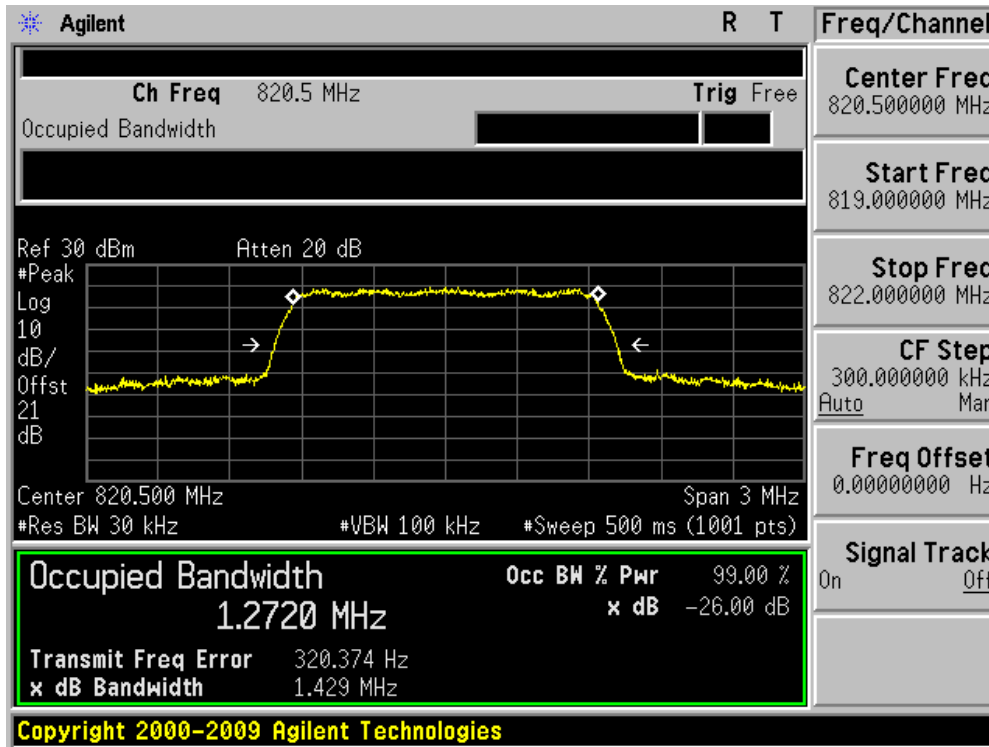


Figure Channel 684 (823.10MHz)

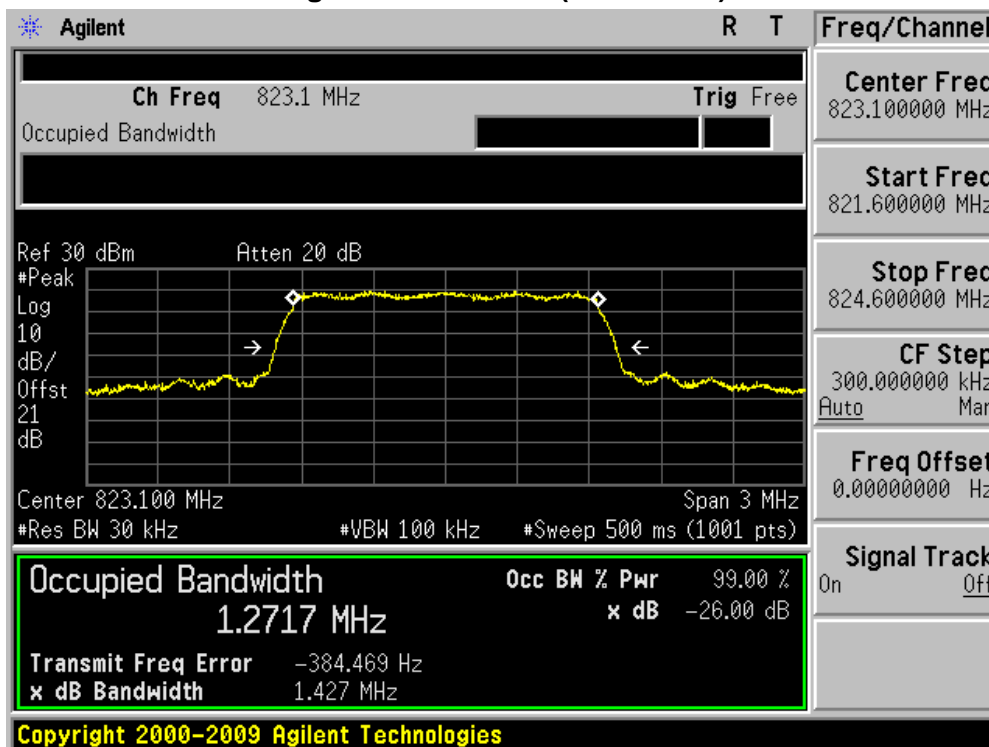

Product	Wireless Module		
Test Item	Occupied Bandwidth		
Test Mode	Mode 3: CDMA 2000 1XEVD0 Rel-0 BC0 Link		
Date of Test	2015/06/15	Test Site	AC-6

Channel No.	Frequency (MHz)	-26dB Occupied Bandwidth (kHz)	99% Occupied Bandwidth (kHz)
1013	824.70	1426.00	1269.50
384	836.52	1420.00	1267.90
777	848.31	1425.00	1267.00

Figure Channel 1013 (824.70MHz)

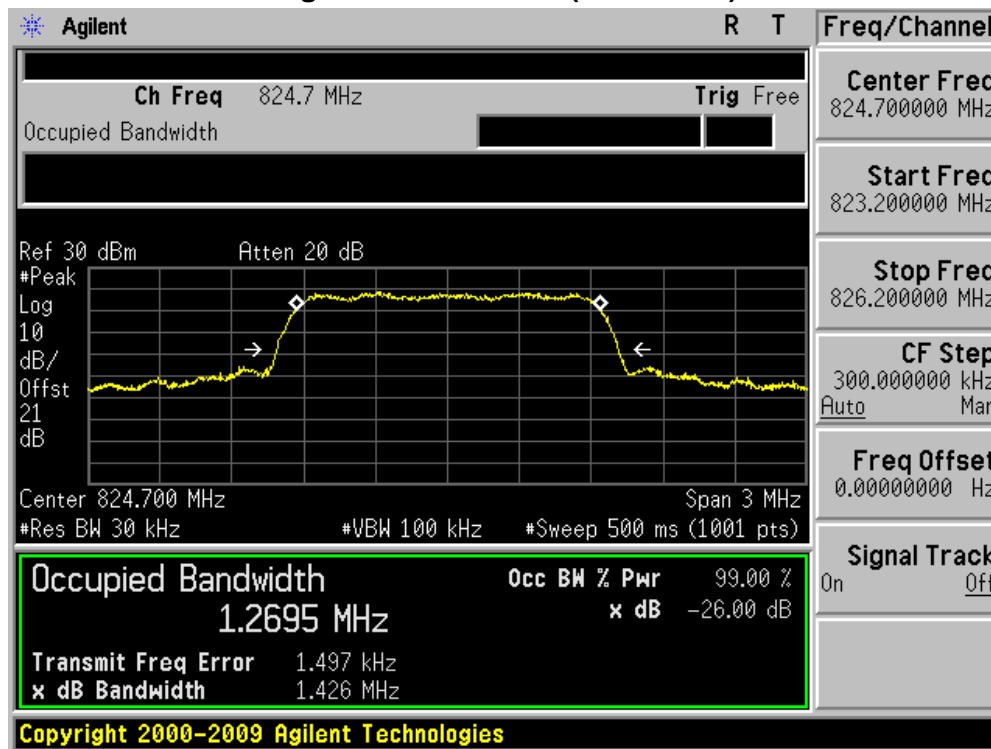


Figure Channel 384 (836.52MHz)


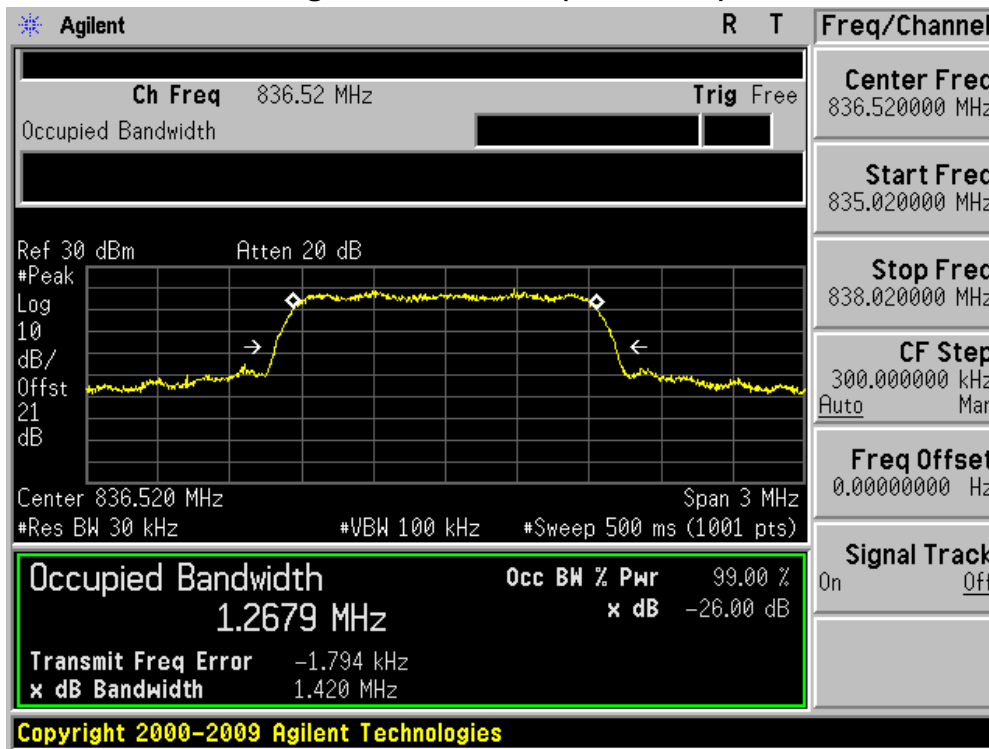


Figure Channel 777 (848.31MHz)

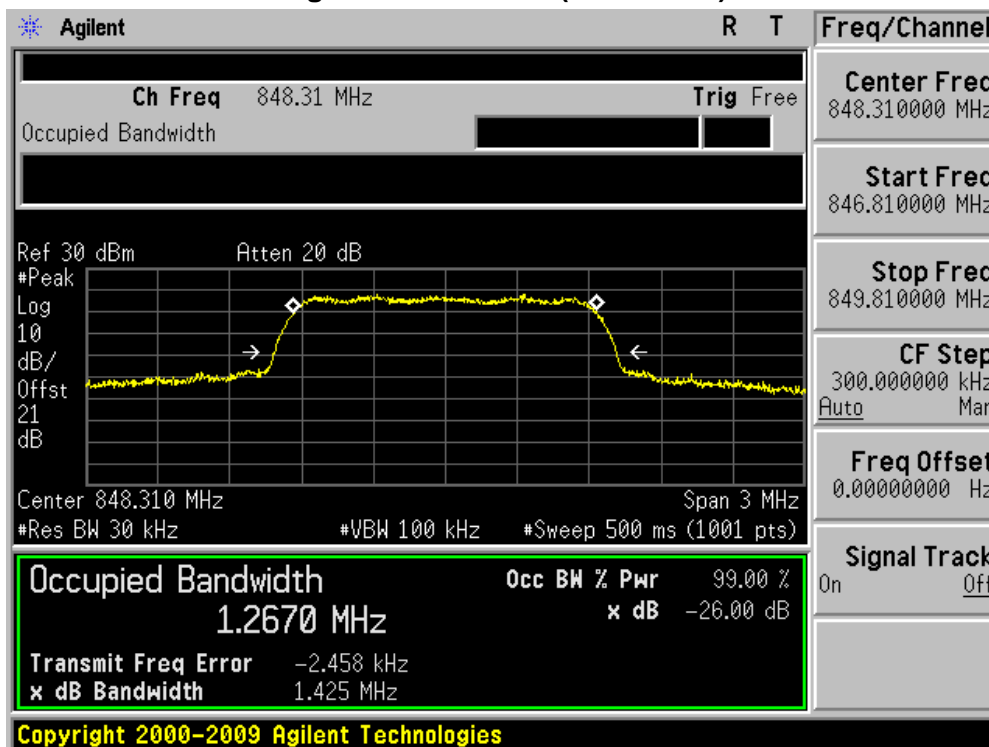

Product	Wireless Module		
Test Item	Occupied Bandwidth		
Test Mode	Mode 4 :CDMA 2000 1XEVD0 Rel-0 BC10 Link		
Date of Test	2015/06/15	Test Site	AC-6

Channel No.	Frequency (MHz)	-26dB Occupied Bandwidth (kHz)	99% Occupied Bandwidth (kHz)
476	817.90	1426.00	1272.20
580	820.50	1424.00	1267.80
684	823.10	1420.00	1272.40

Figure Channel 476 (817.90MHz)

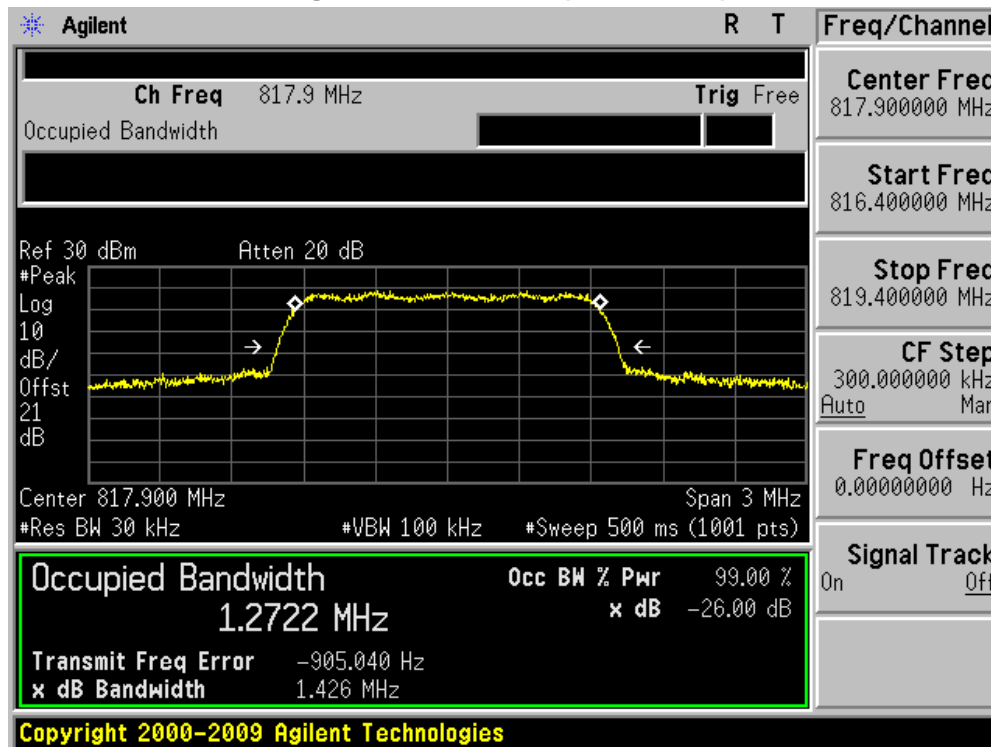


Figure Channel 580 (820.50MHz)


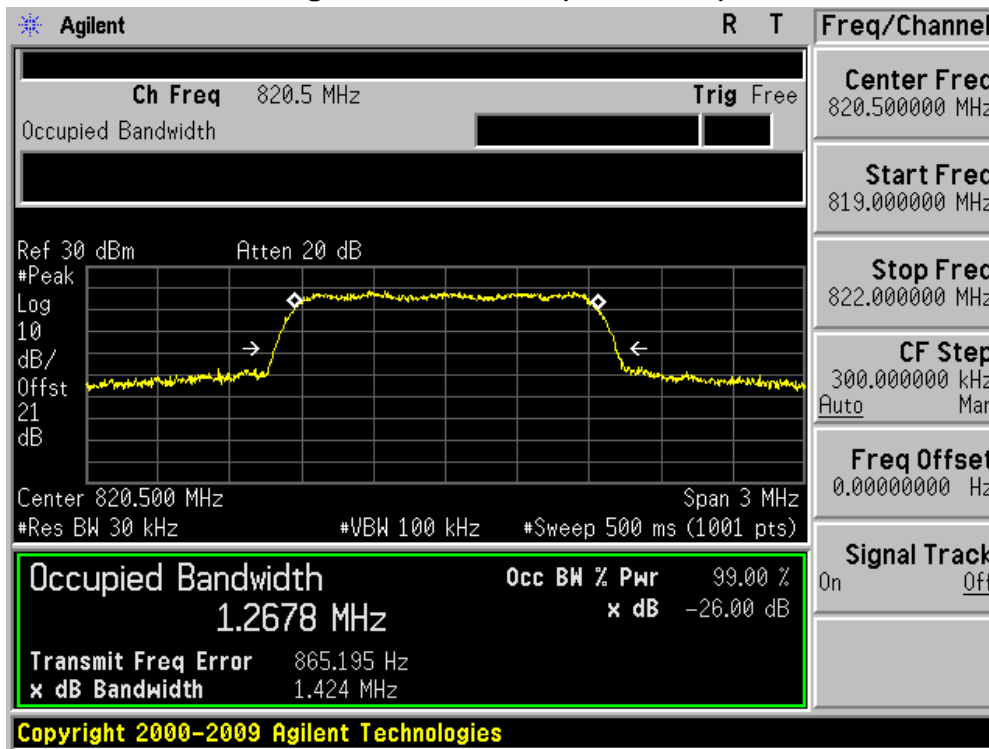


Figure Channel 684 (823.10MHz)

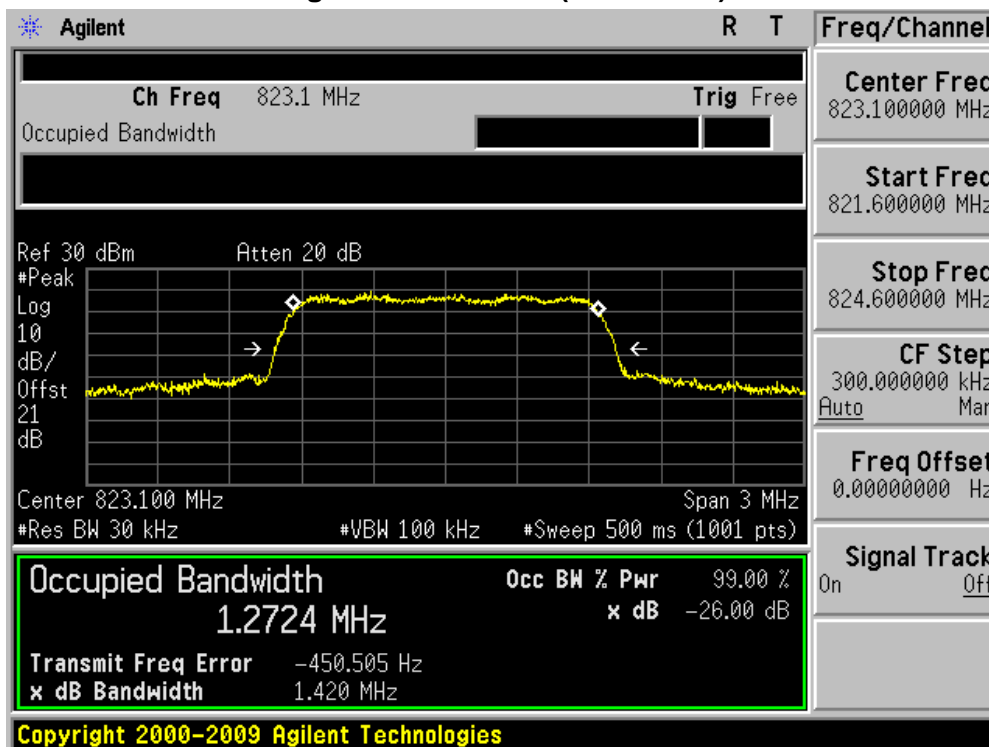

Product	Wireless Module		
Test Item	Occupied Bandwidth		
Test Mode	Mode 5 :CDMA 2000 1XEVD0 Rel-A BC0 Link		
Date of Test	2015/06/15	Test Site	AC-6

Channel No.	Frequency (MHz)	-26dB Occupied Bandwidth (kHz)	99% Occupied Bandwidth (kHz)
1013	824.70	1422.00	1271.30
384	836.52	1423.00	1268.90
777	848.31	1429.00	1268.70

Figure Channel 1013 (824.70MHz)

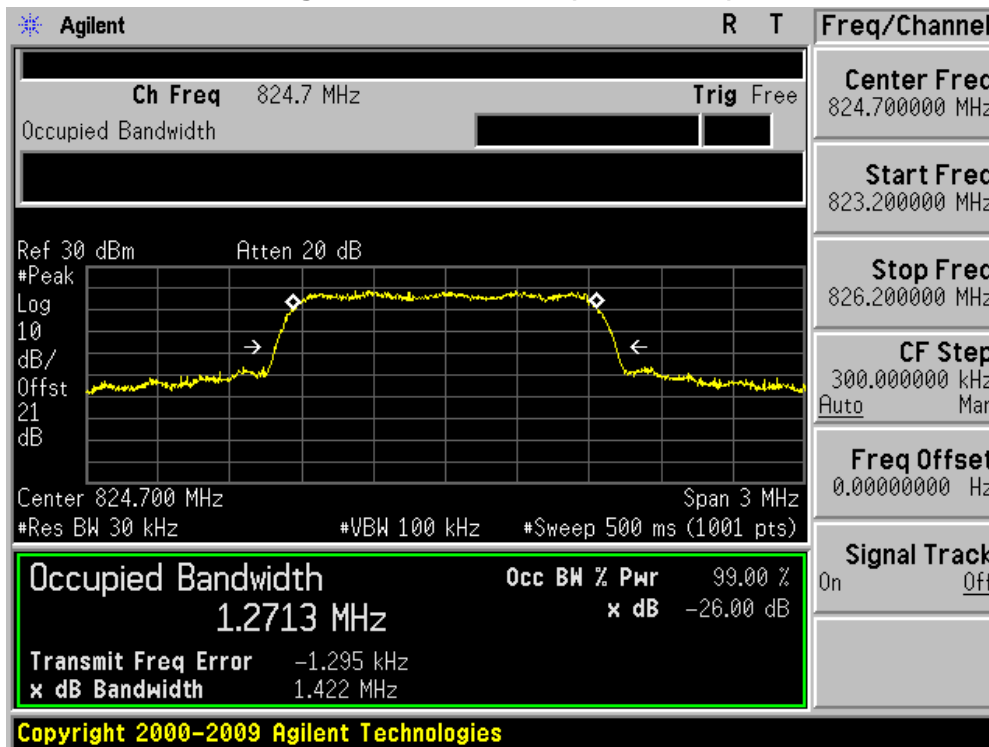


Figure Channel 384 (836.52MHz)


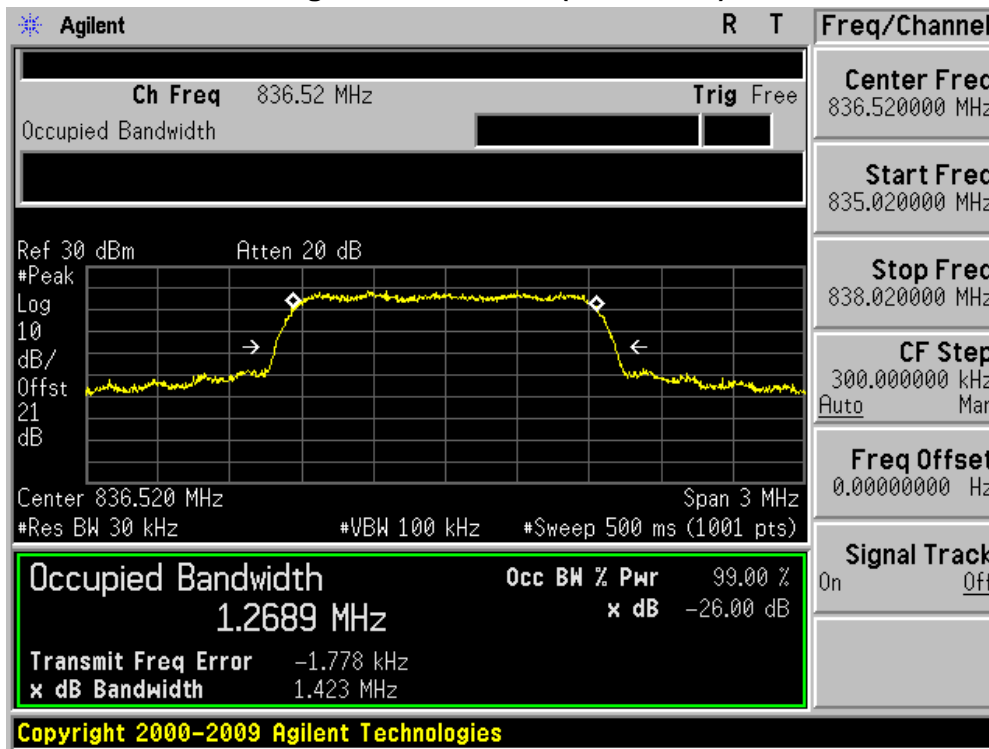


Figure Channel 777 (848.31MHz)

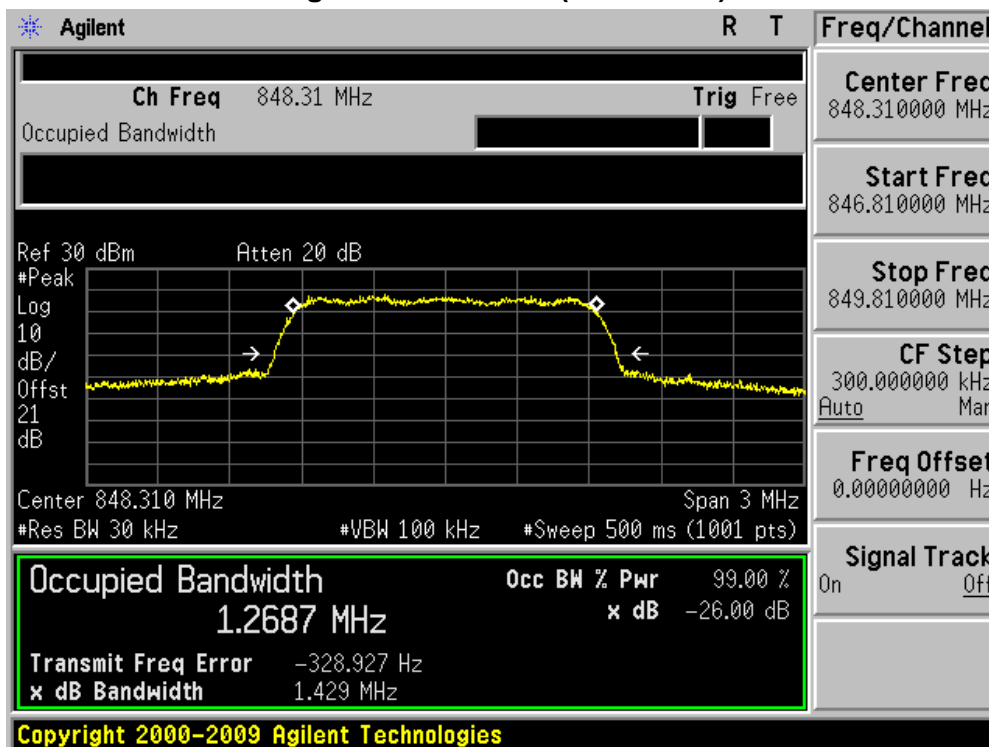

Product	Wireless Module		
Test Item	Occupied Bandwidth		
Test Mode	Mode 6: CDMA 2000 1XEVD0 Rel-A BC1 Link		
Date of Test	2015/06/15	Test Site	AC-6

Channel No.	Frequency (MHz)	-26dB Occupied Bandwidth (kHz)	99% Occupied Bandwidth (kHz)
476	817.90	1422.00	1269.30
580	820.50	1421.00	1270.80
684	823.10	1423.00	1272.70

Figure Channel 476 (817.90MHz)

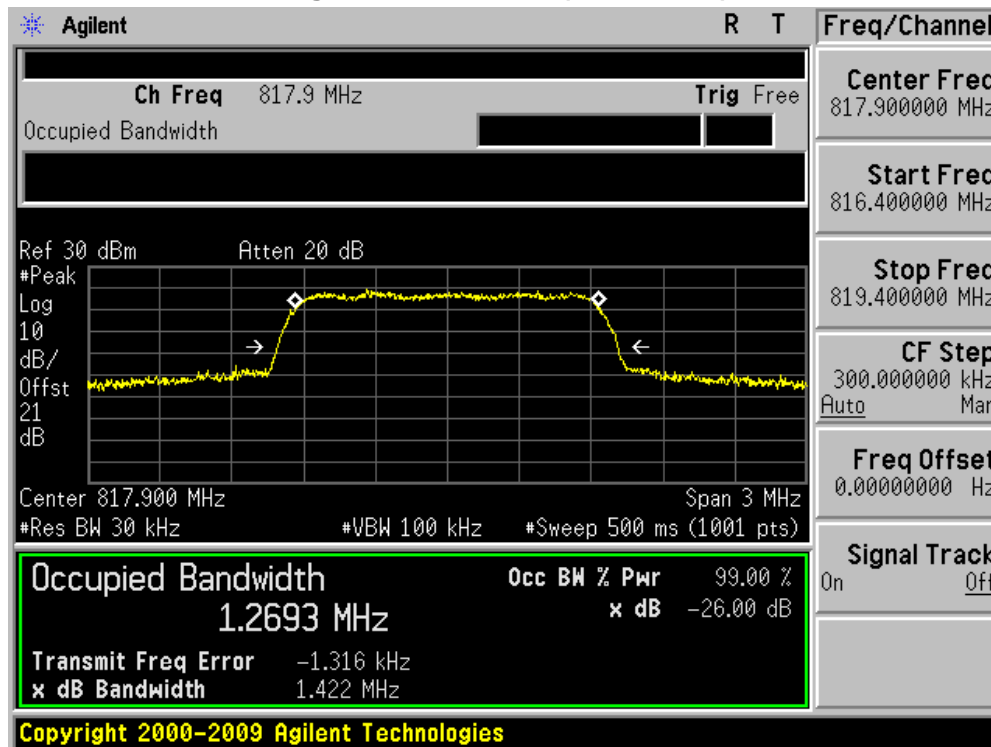


Figure Channel 580 (820.50MHz)


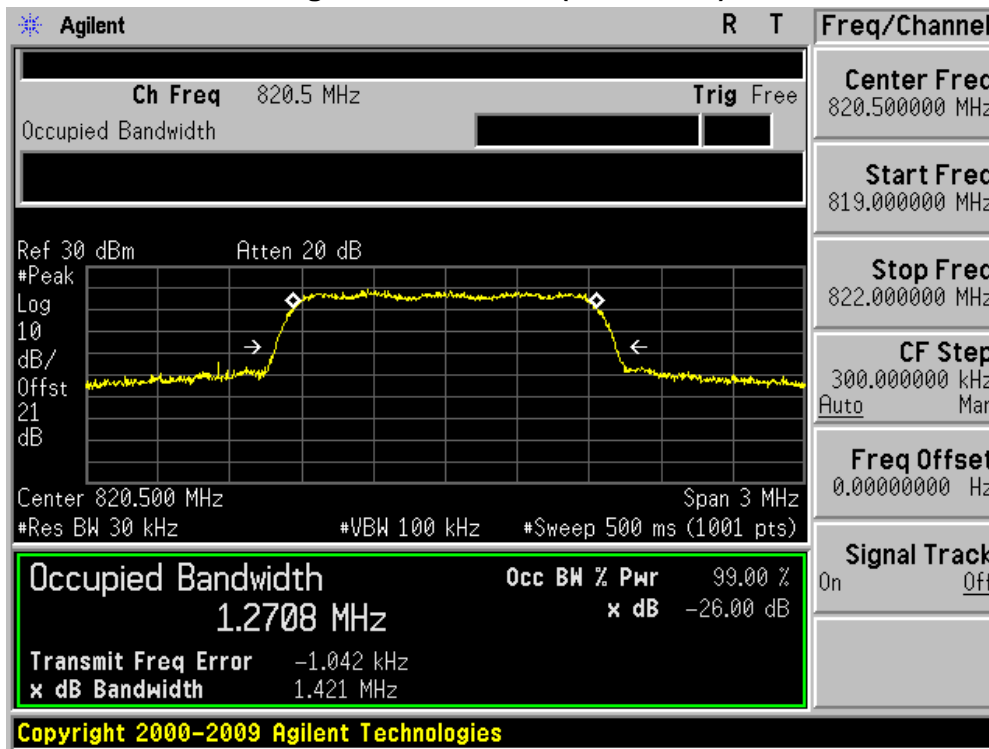


Figure Channel 684 (823.10MHz)

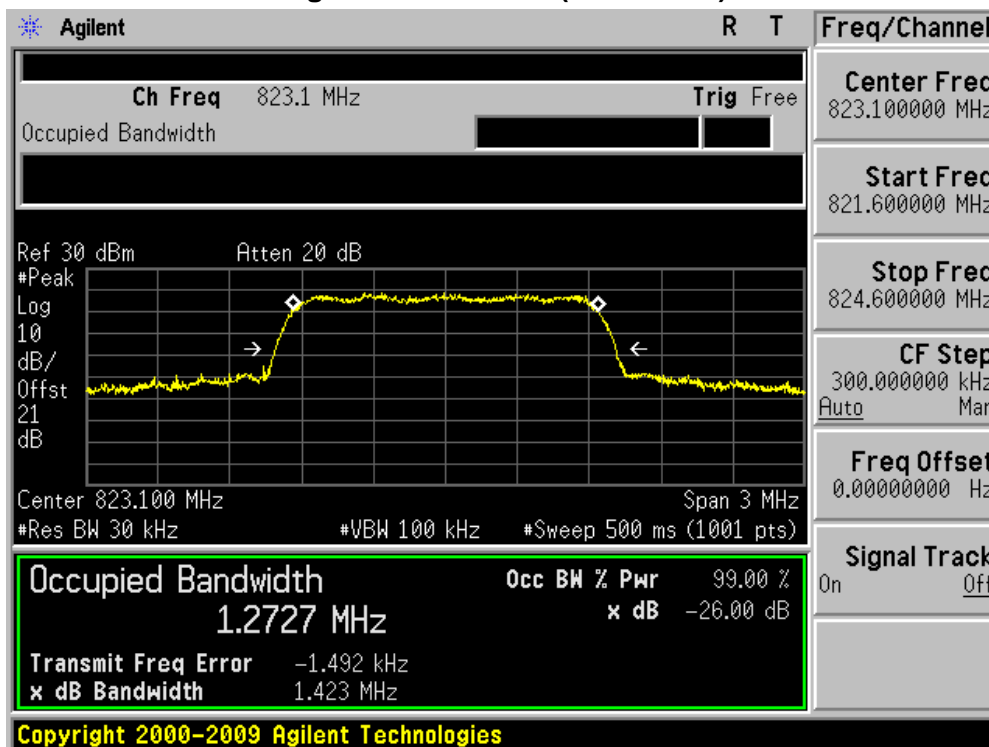


6. Conducted Band Edge

6.1. Test Equipment

Spurious Emission At Antenna Terminals (+/- 1MHz) / AC-6

Instrument	Manufacturer	Type No.	Serial No	Cali. Due Date
PSA Series Spectrum Analyzer	Agilent	E4440A	MY49420184	2016/03/10
Radio Communication Tester	R&S	CMU 200	117088	2016/03/10
Dual Directional Coupler	Agilent	778D	20160	2016/03/10
10dB Coaxial Coupler	Agilent	87300C	MY44300299	2016/03/10
Temperature/Humidity Meter	Zhicheng	ZC1-2	AC6-TH	2016/01/07

6.2. Test Setup

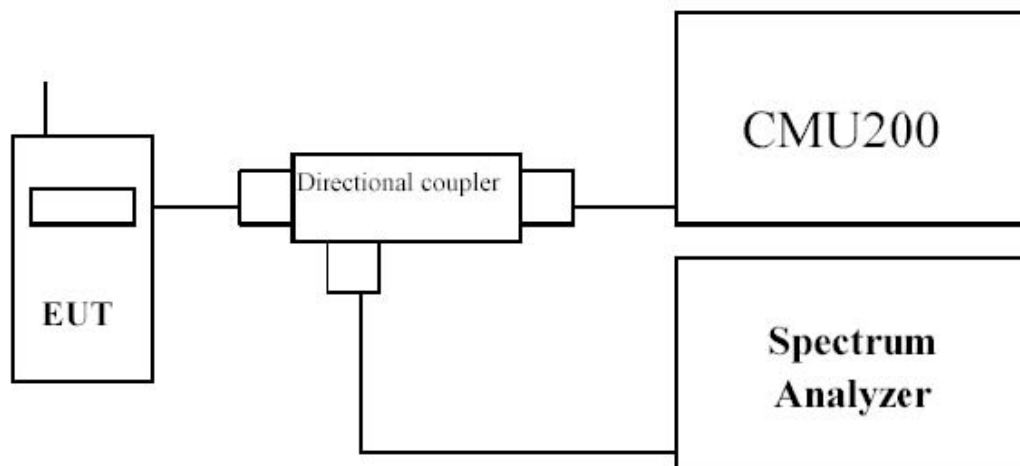

6.3. Test Procedure

1. The EUT was connected to spectrum analyzer and System Simulator via power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The conducted spurious emission for the whole frequency range was taken.
4. In the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band Emissions.

6.4. Uncertainty

The measurement uncertainty is defined as ± 1.2 dB.

6.5. Test Result

Product	Wireless Module		
Test Item	Spurious Emission At Antenna Terminals (+/- 1MHz)		
Test Mode	Mode 1: CDMA 2000 1X BC0 Link		
Date of Test	2015/06/16	Test Site	AC-6

Figure Channel 1013 (824.70MHz)




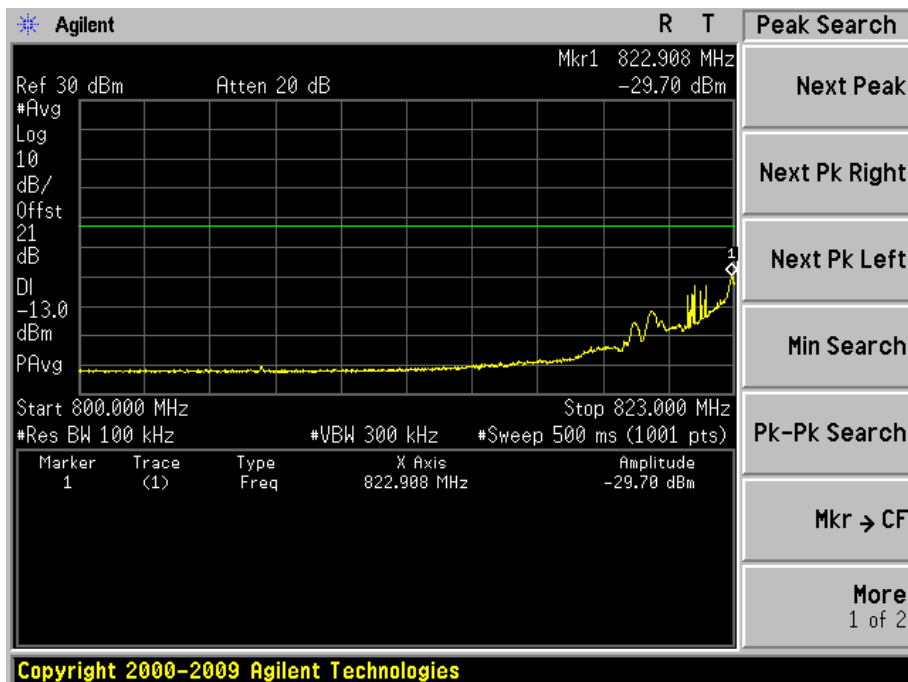


Figure Channel 777 (848.31MHz)

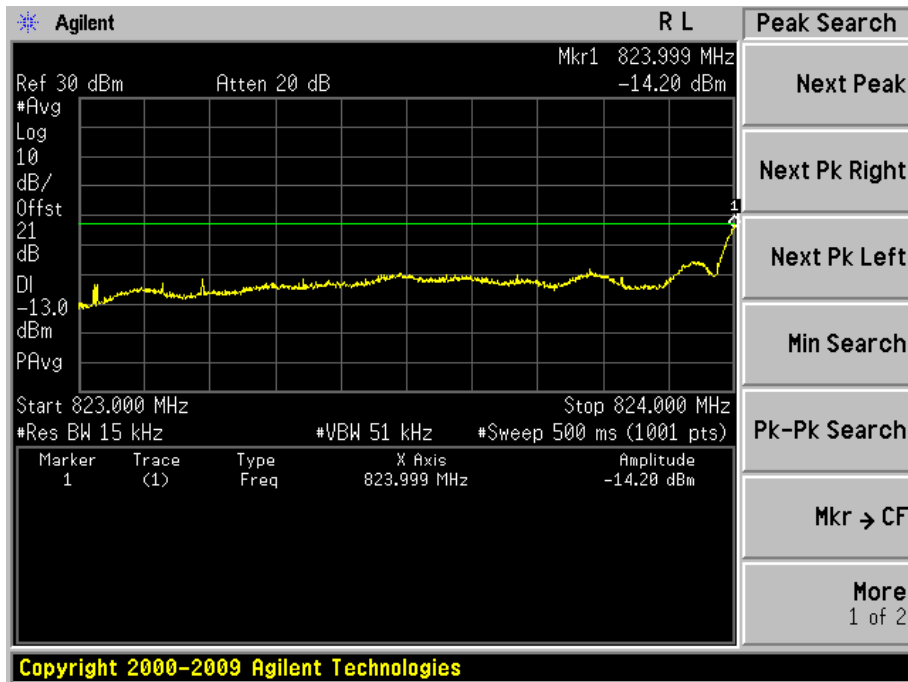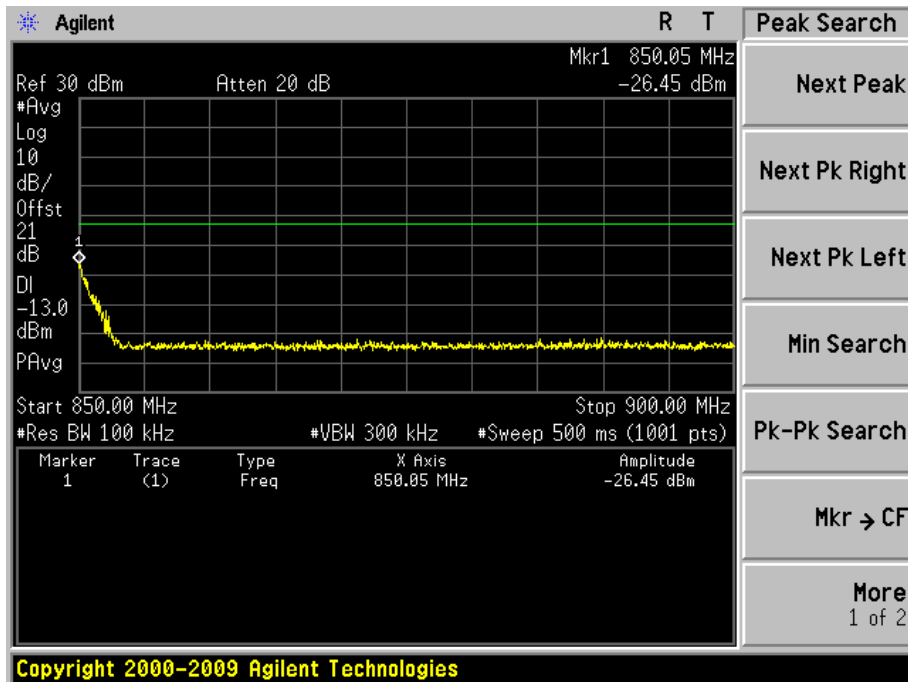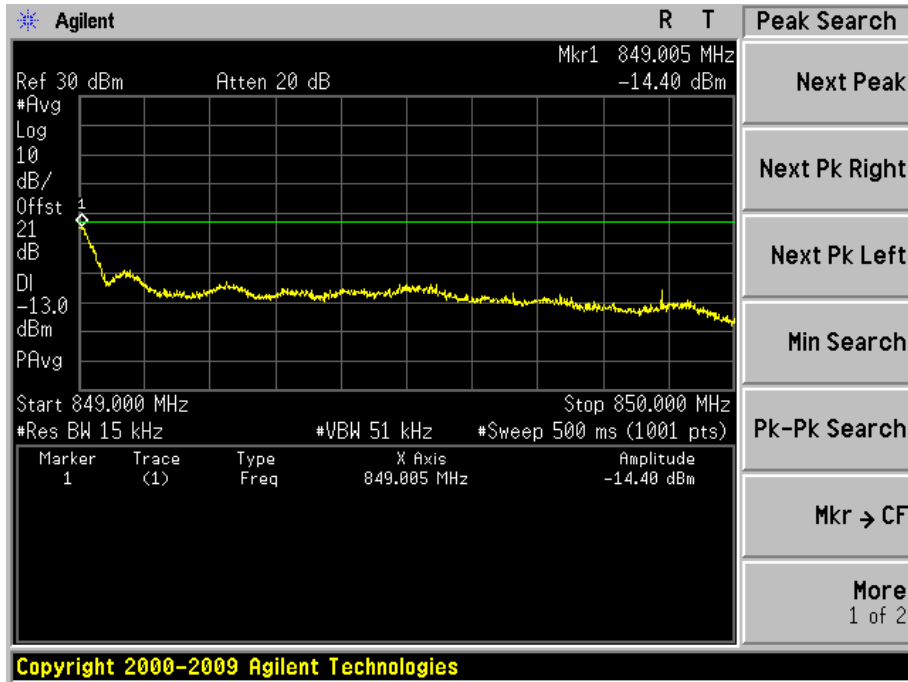

Product	Wireless Module		
Test Item	Spurious Emission At Antenna Terminals (+/- 1MHz)		
Test Mode	Mode 2: CDMA 2000 1X BC10 Link		
Date of Test	2015/06/16	Test Site	AC-6

Figure Channel 476 (817.90MHz)




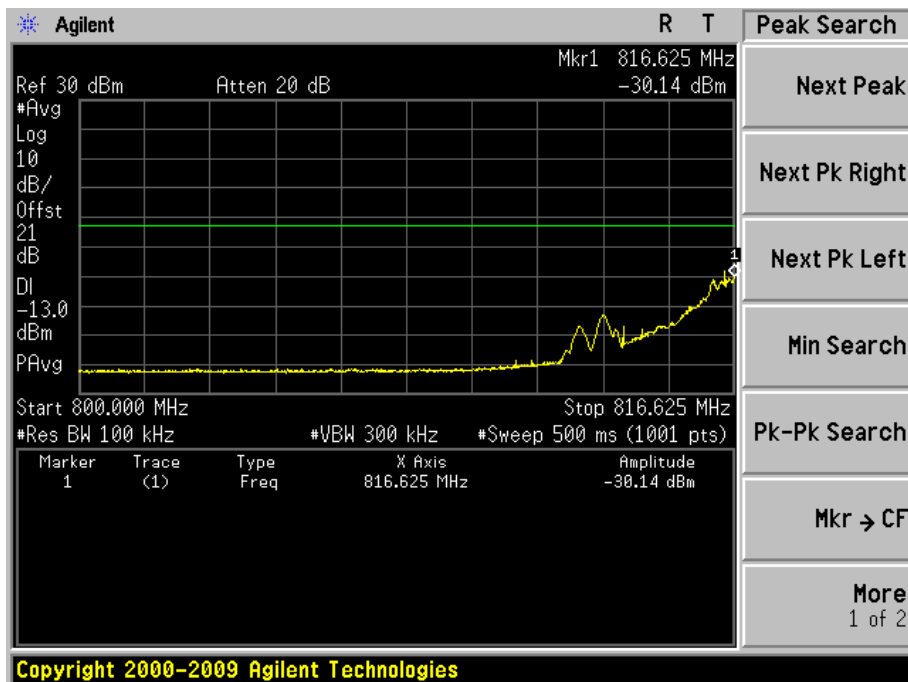


Figure Channel 684 (823.10MHz)

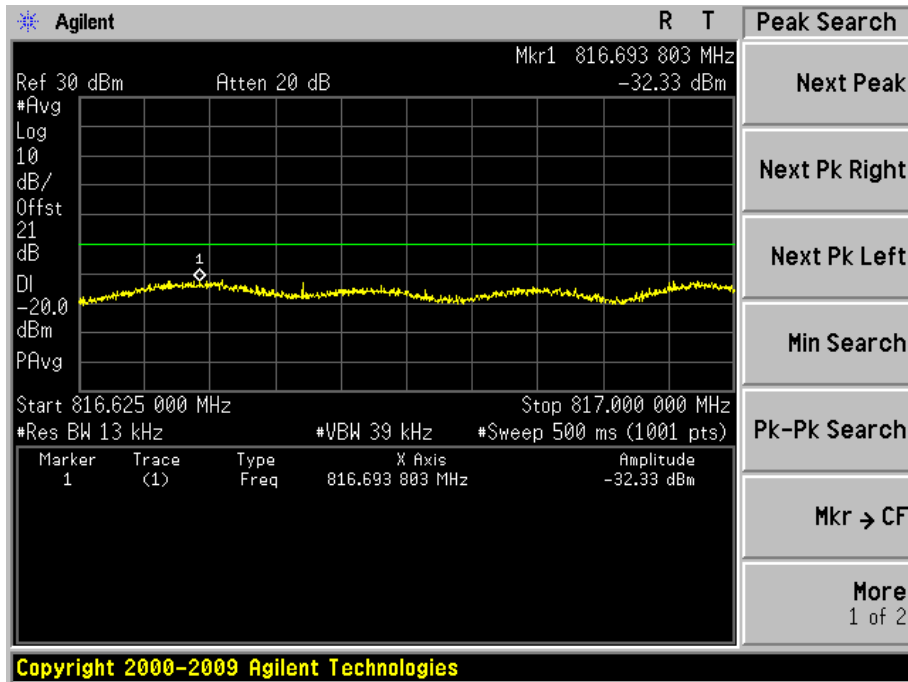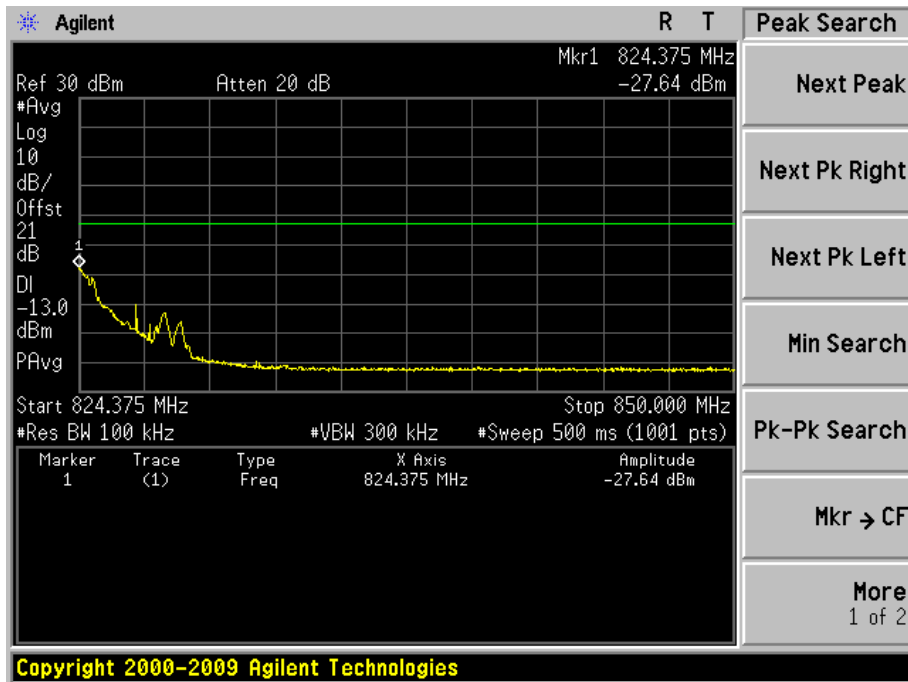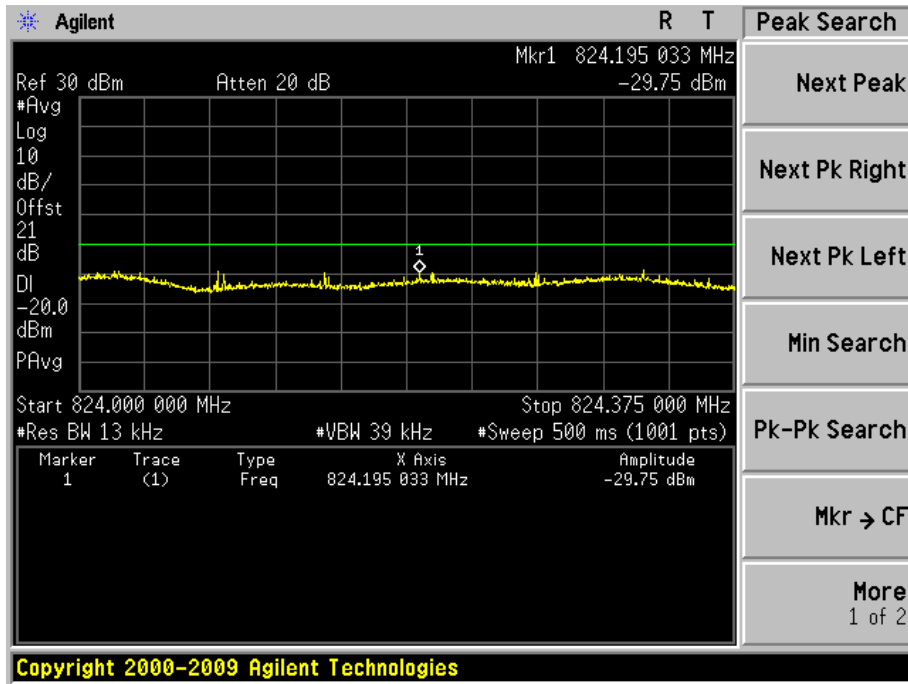

Product	Wireless Module		
Test Item	Spurious Emission At Antenna Terminals (+/- 1MHz)		
Test Mode	Mode 3: CDMA 2000 1XEVD0 Rel-0 BC0 Link		
Date of Test	2015/06/13	Test Site	AC-6

Figure Channel 1013 (824.70MHz)




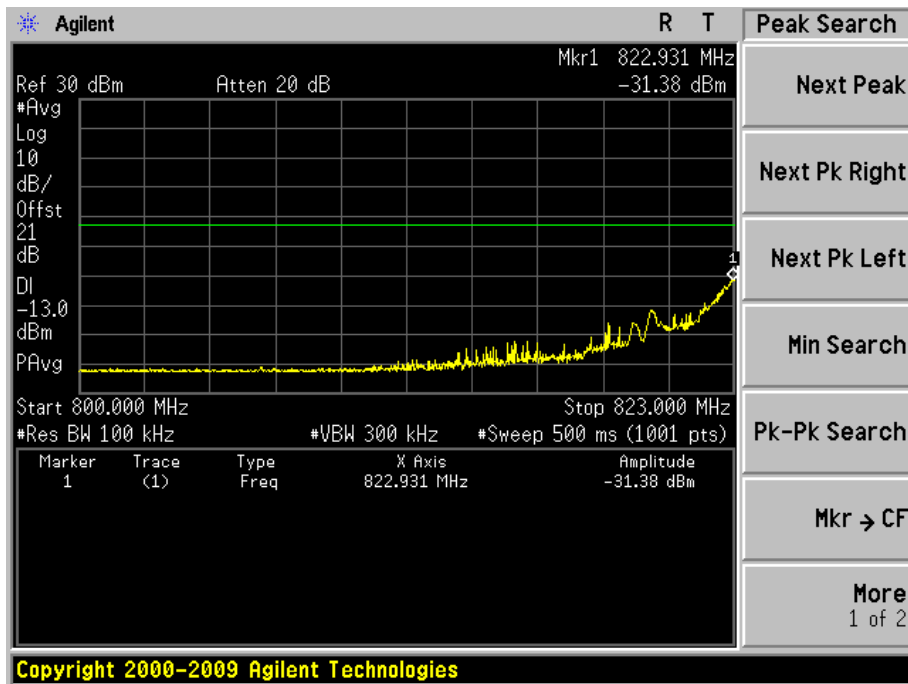


Figure Channel 777 (848.31MHz)

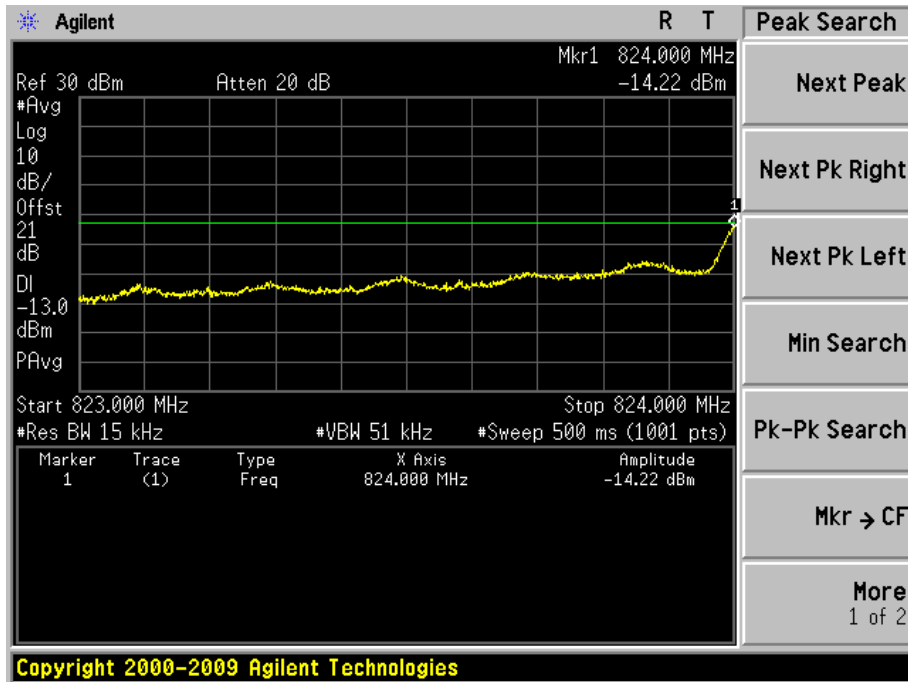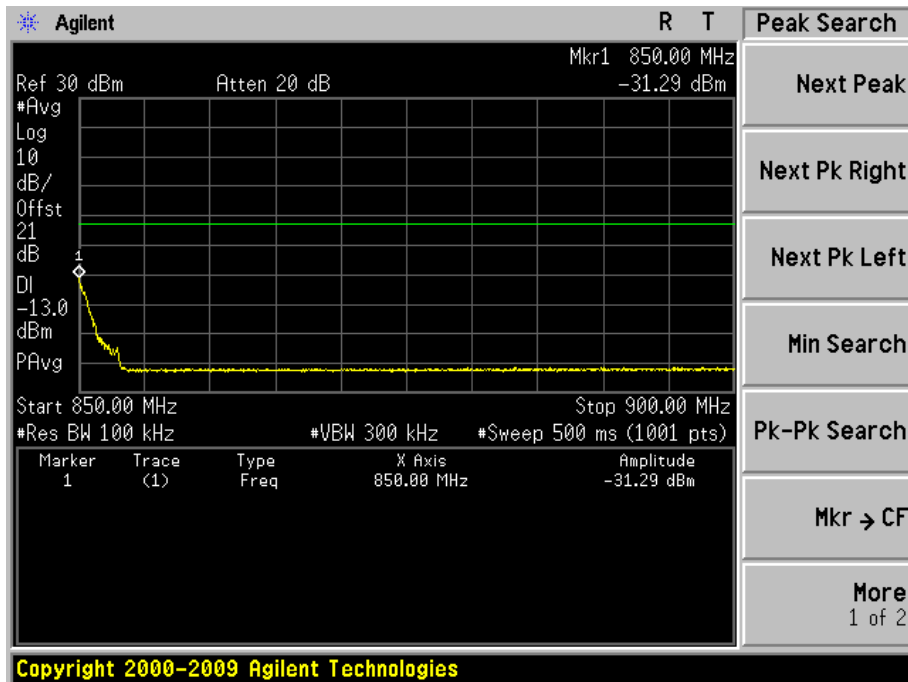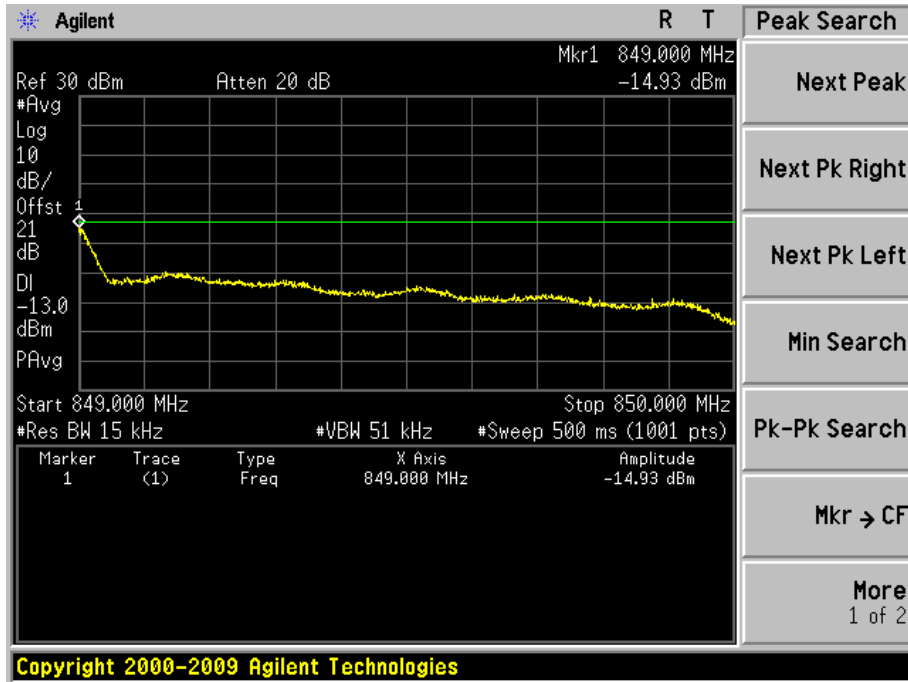

Product	Wireless Module		
Test Item	Spurious Emission At Antenna Terminals (+/- 1MHz)		
Test Mode	Mode 4: CDMA 2000 1XEVD0 Rel-0 BC10 Link		
Date of Test	2015/06/13	Test Site	AC-6

Figure Channel 476 (817.90MHz)




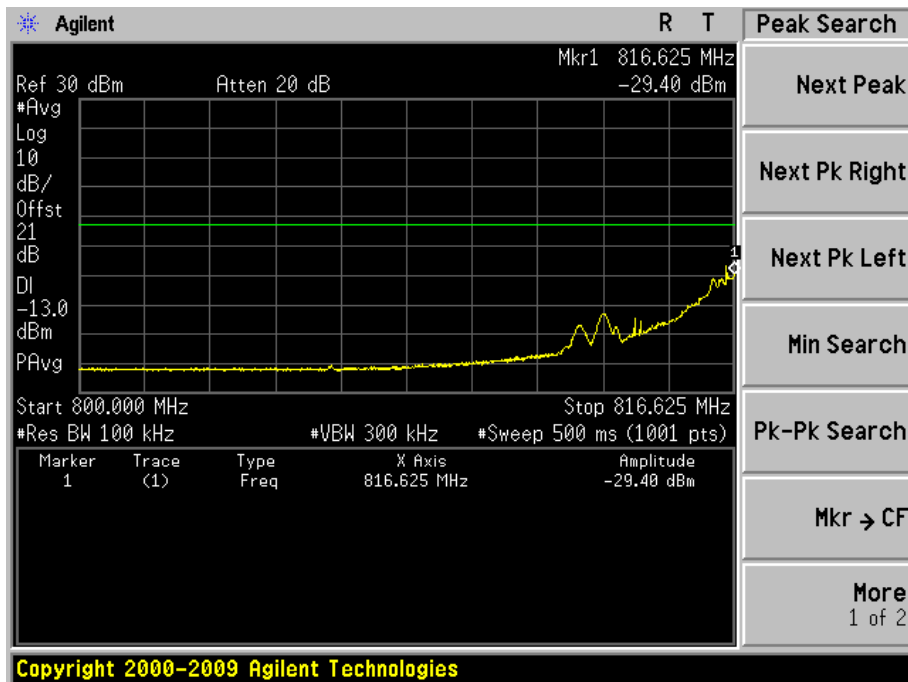


Figure Channel 684 (823.10MHz)

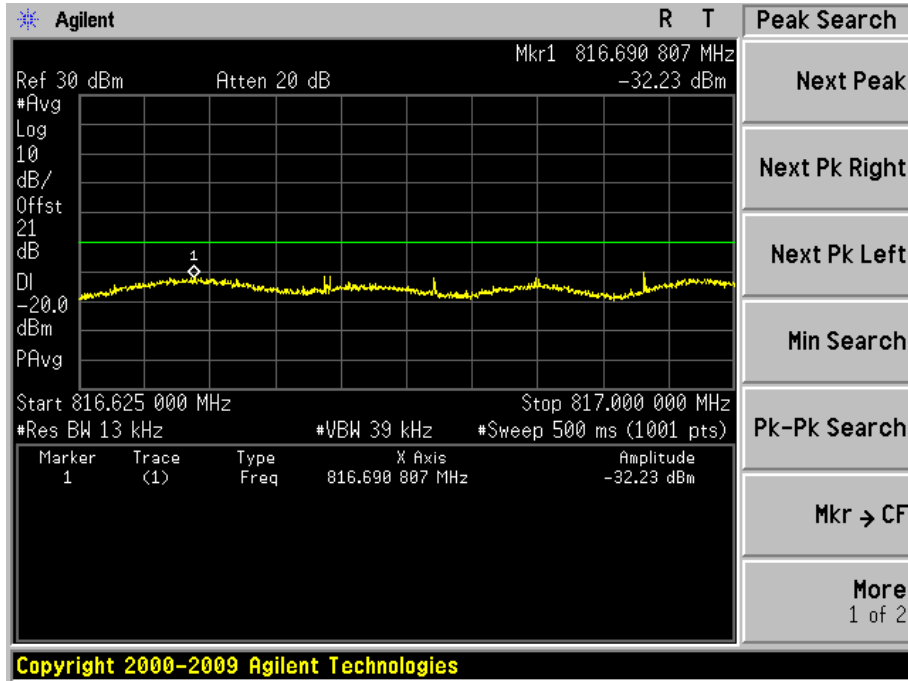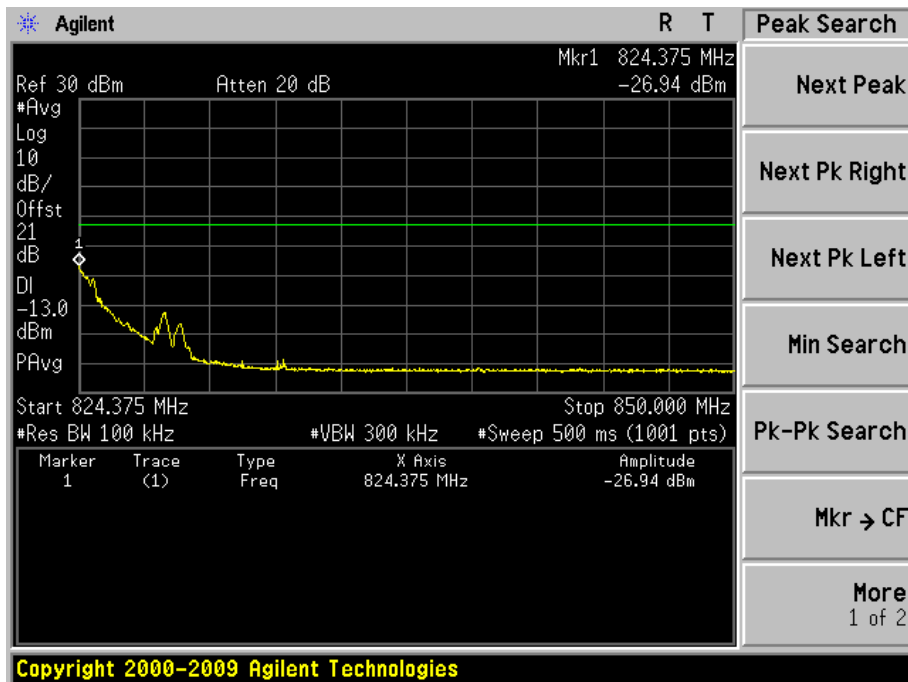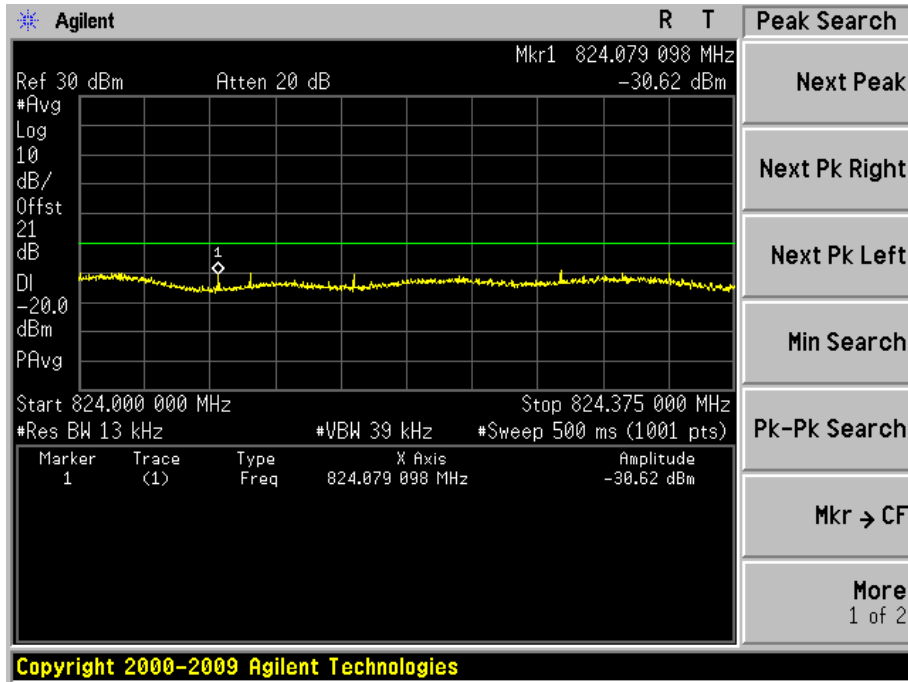

Product	Wireless Module		
Test Item	Spurious Emission At Antenna Terminals (+/- 1MHz)		
Test Mode	Mode 5: CDMA 2000 1XEVD0 Rel-A BC0 Link		
Date of Test	2015/06/13	Test Site	AC-6

Figure Channel 1013 (824.70MHz)




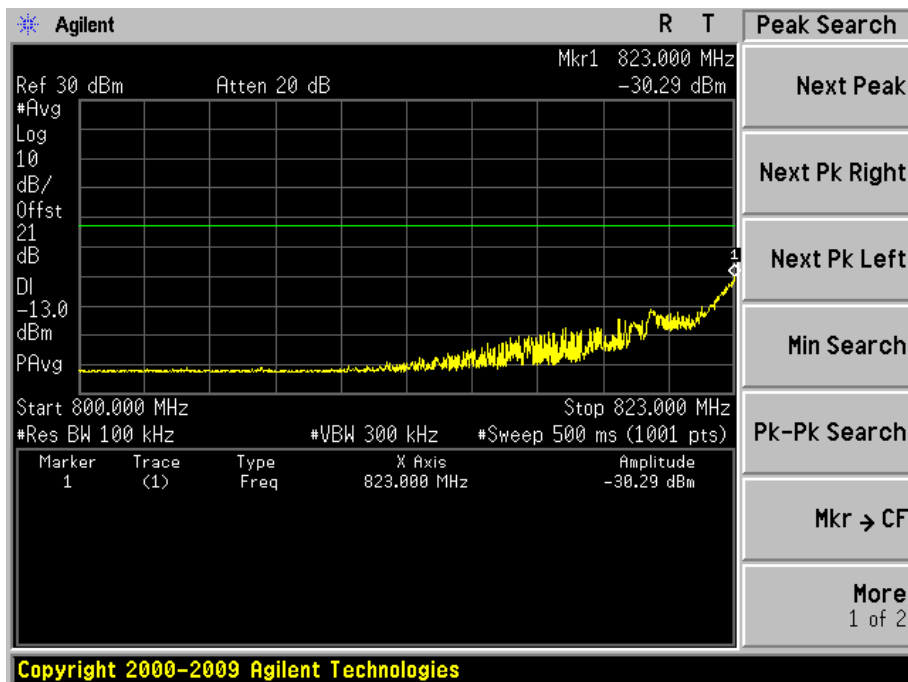


Figure Channel 777 (848.31MHz)

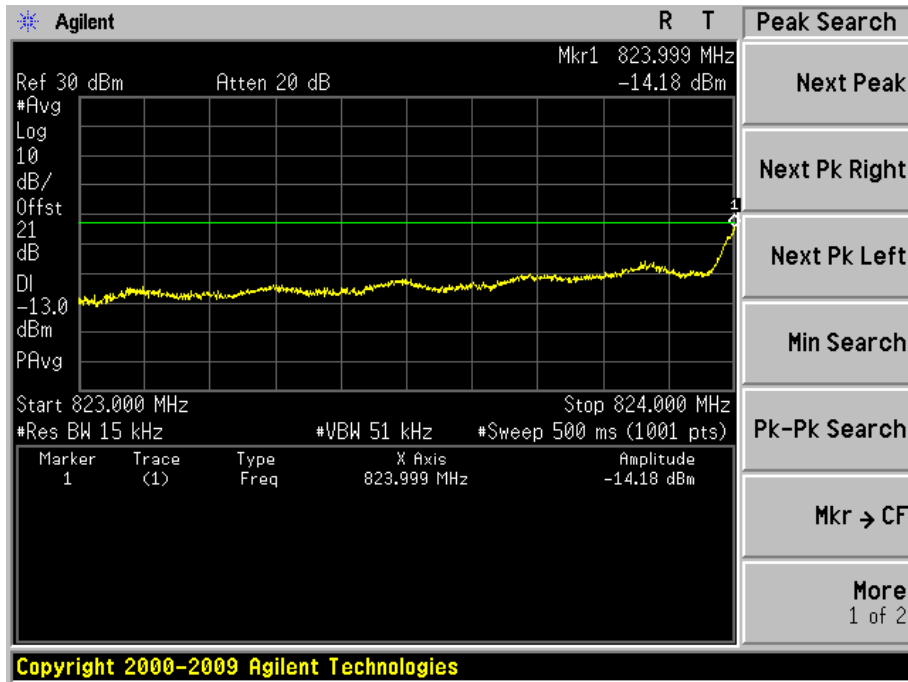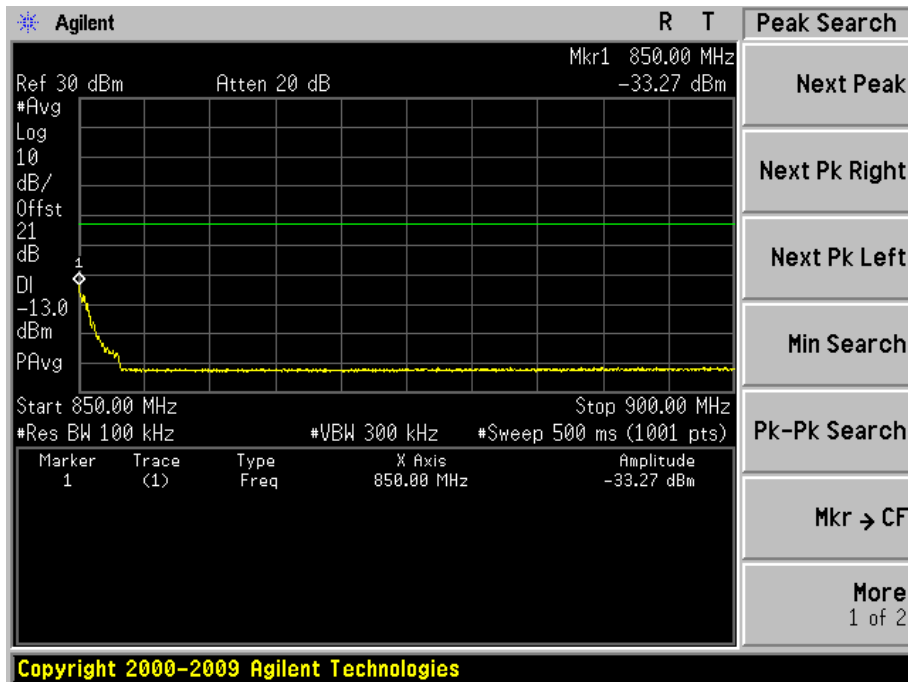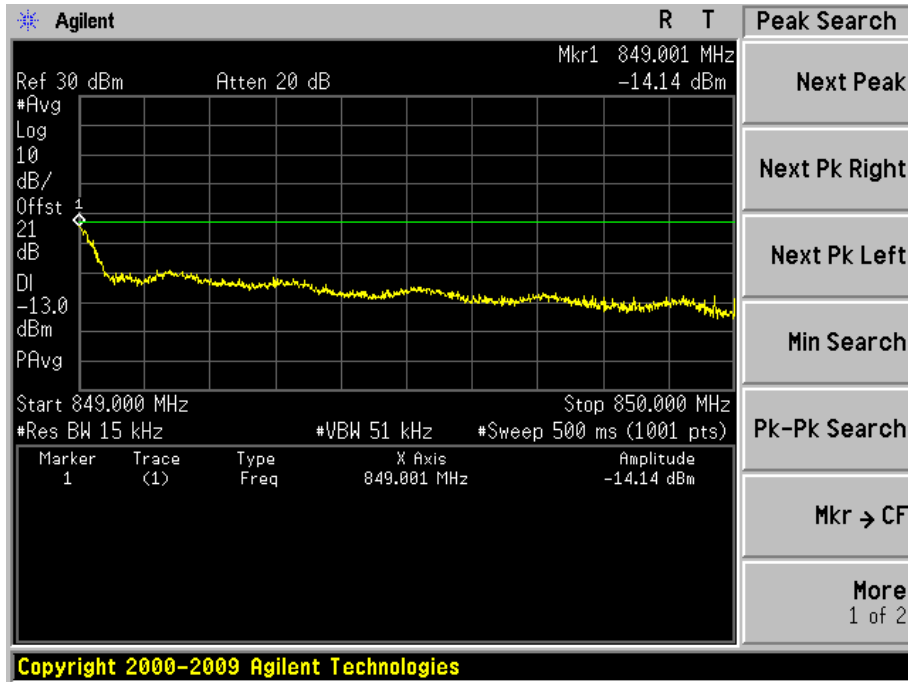

Product	Wireless Module		
Test Item	Spurious Emission At Antenna Terminals (+/- 1MHz)		
Test Mode	Mode 6: CDMA 2000 1XEVD0 Rel-A BC10 Link		
Date of Test	2015/06/13	Test Site	AC-6

Figure Channel 476 (817.90MHz)




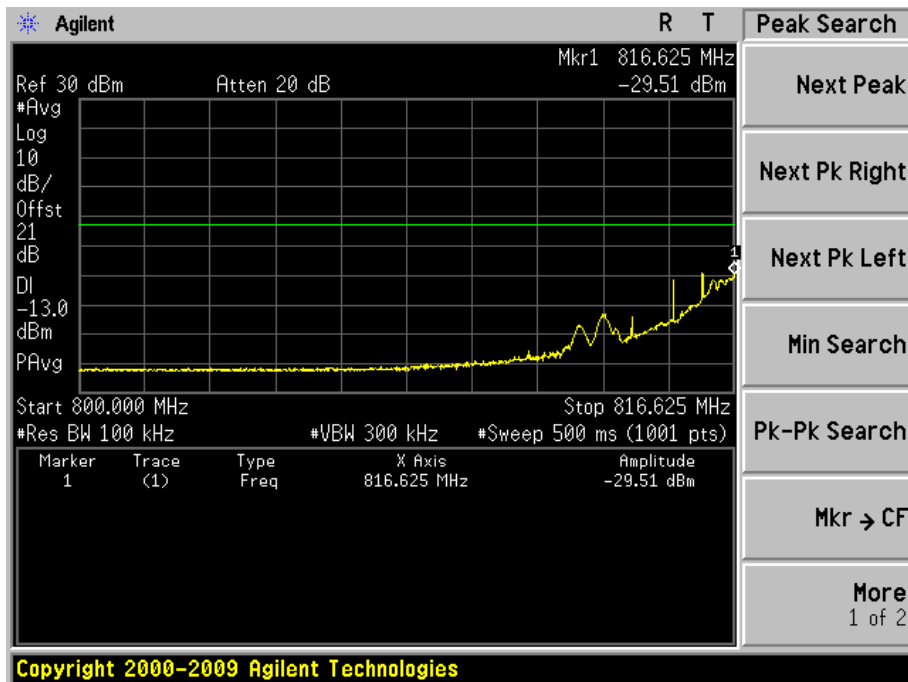


Figure Channel 684 (823.10MHz)

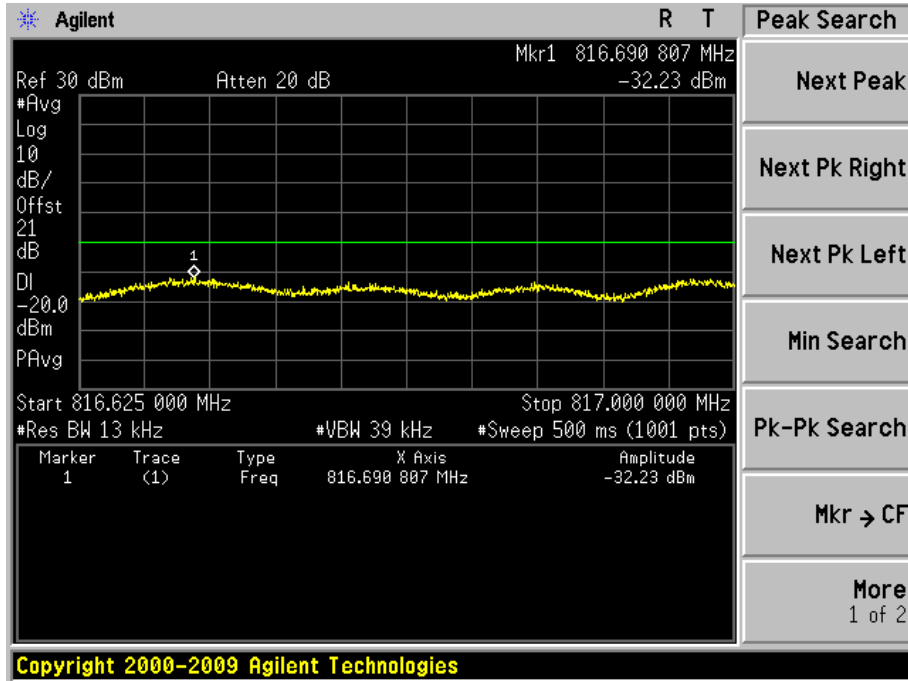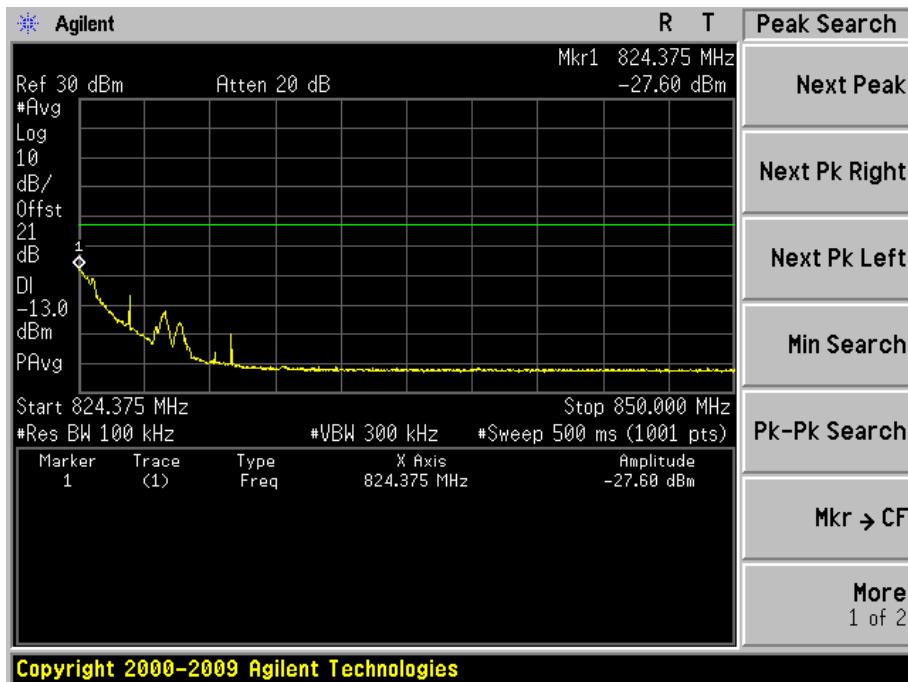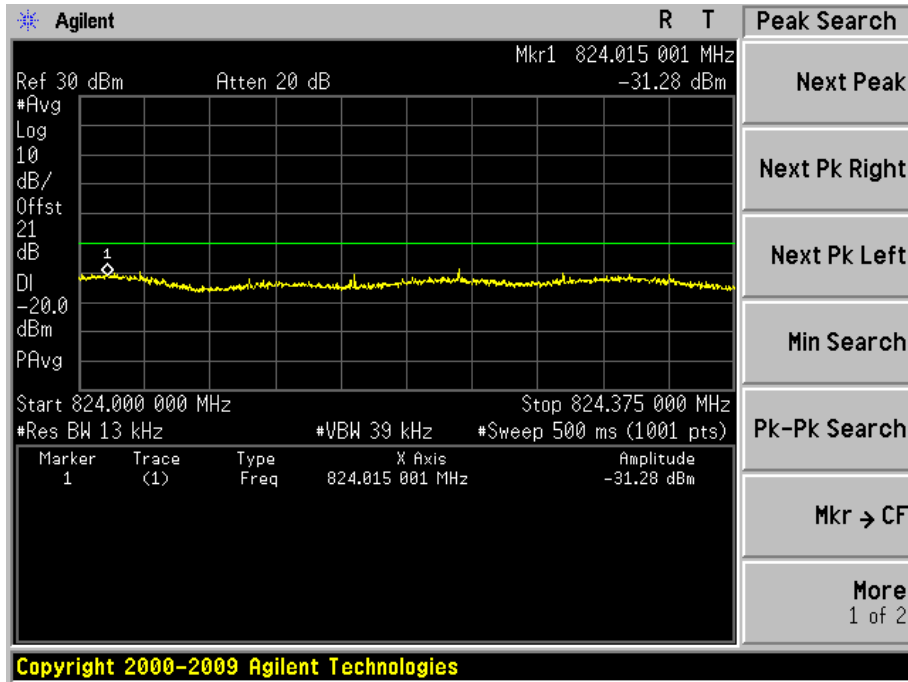

7. Spurious Emission

7.1. Test Equipment

Conducted Emission / AC-6


Instrument	Manufacturer	Type No.	Serial No	Cali. Due Date
PSA Series Spectrum Analyzer	Agilent	E4440A	MY49420184	2016/03/10
Radio Communication Tester	R&S	CMU 200	117088	2016/03/10
Dual Directional Coupler	Agilent	778D	20160	2016/03/10
10dB Coaxial Coupler	Agilent	87300C	MY44300299	2016/03/10
Temperature/Humidity Meter	Zhicheng	ZC1-2	AC6-TH	2016/01/07

Radiated Spurious Emission / AC-5


Instrument	Manufacturer	Type No.	Serial No	Cali. Due Date
EMI Receiver	Agilent	N9038A	MY51210196	2015/08/07
Radio Communication Tester	R&S	CMU 200	117088	2016/03/10
PSG Analog Signal Generator	Agilent	E8257D	MY44321116	2016/03/10
Preamplifier	Quietek	AP-025C	CHM-0503006	2016/04/11
Preamplifier	Miteq	NSP1800-25	1364185	2016/05/03
DRG Horn	ETS-Lindgren	3117	00123988	2016/01/07
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	737	2016/03/01
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C1	2016/03/01
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C2	2016/03/01
Coaxial Cable	Huber+Suhner	SUCOFLEX 102	AC5-C3	2016/03/10
EMI Receiver	Agilent	N9038A	MY51210196	2016/01/07
Temperature/Humidity Meter	Zhichen	ZC1-2	AC5-TH	2016/01/07

7.2. Test Setup


Conducted Spurious Emission Measurement:

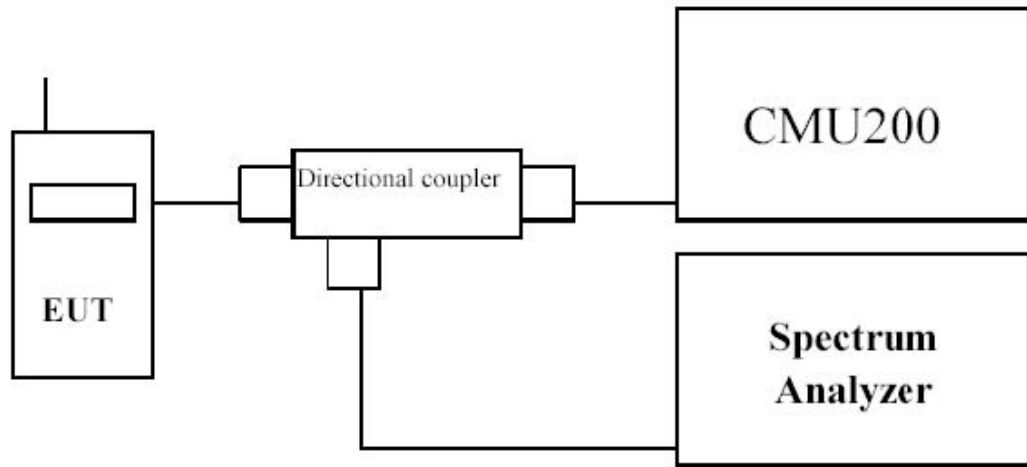

Radiated Spurious Measurement: below 1GHz

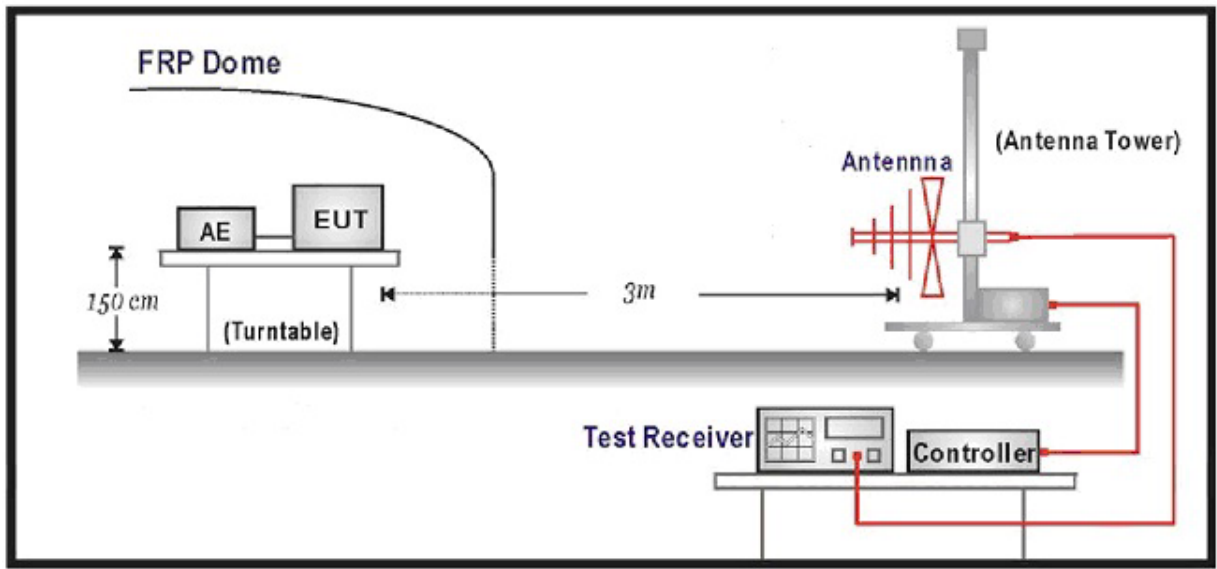

Radiated Spurious Measurement: above 1GHz

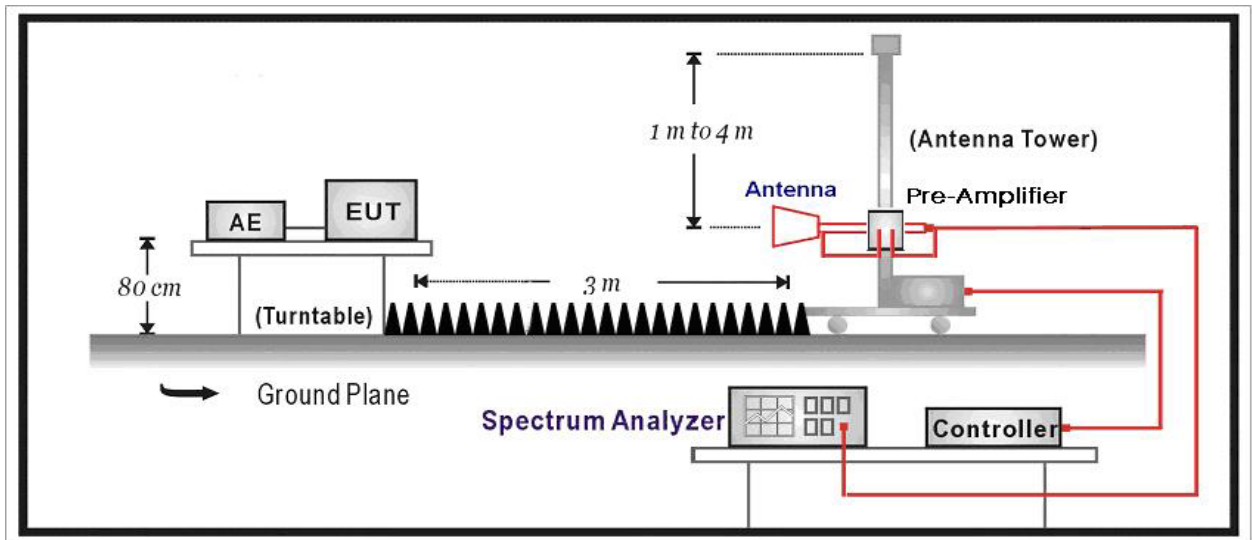

7.3. Test Procedure

Conducted Spurious Measurement:

- a) Place the EUT on a bench and set it in transmitting mode.
- b) Connect a low loss RF cable from the antenna port to a spectrum analyzer and CMU200 by a Directional Couple.
- c) EUT Communicate with CMU200, then select a channel for testing.
- d) Add a correction factor to the display of spectrum, and then test.
- e) The resolution bandwidth of the spectrum analyzer was set at 1 MHz, sufficient scans were taken to show the out of band Emission if any up to 10th harmonic.

Radiated Spurious Measurement:

- f) The EUT was placed on a rotatable wooden table with 1.5 meter above ground.
- g) The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
- h) The table was rotated 360 degrees to determine the position of the highest spurious emission.
- i) The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
- j) Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 1MHz, Sweep 500ms, Taking the record of maximum spurious emission.
- k) A horn antenna was substituted in place of the EUT and was driven by a signal generator.
- l) Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
- m) Taking the record of output power at antenna port
- n) Repeat step 7 to step 8 for another polarization.I receiver.
- o) $EIRP = SG - \text{Cable loss} + \text{Antenna Gain}$



7.4. Uncertainty

The measurement uncertainty is defined as 3.2 dB for Radiated Power Measurement.



7.5. Test Result

Product	Wireless Module		
Test Item	Conducted Spurious Emission		
Test Mode	Mode 1: CDMA 2000 1X BC0 Link Link		
Date of Test	2015/06/17	Test Site	TR-8



Low Channel 1013(824.7MHz)

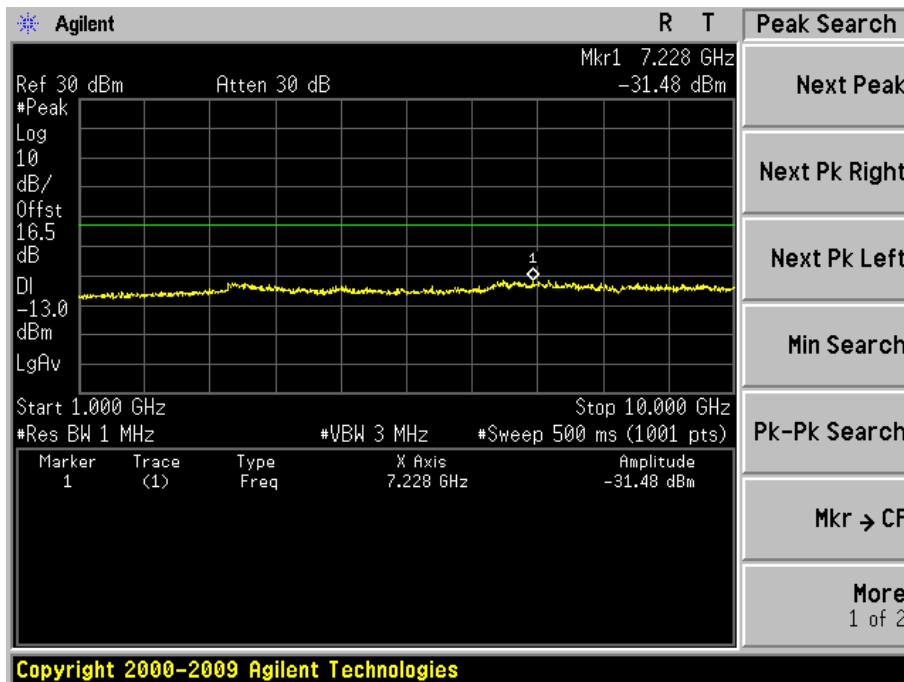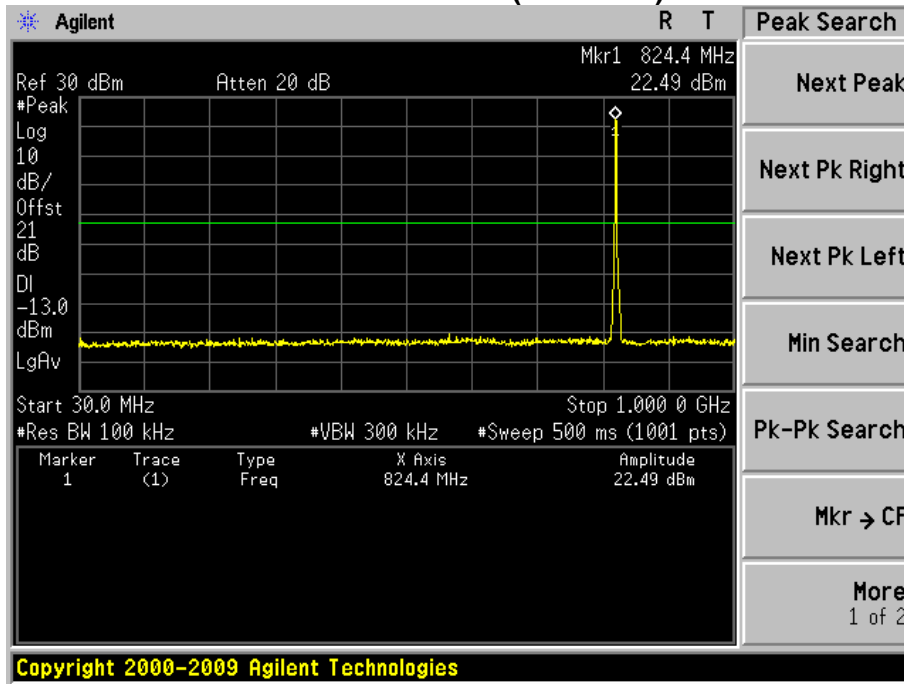

Mid Channel 384(836.52MHz)

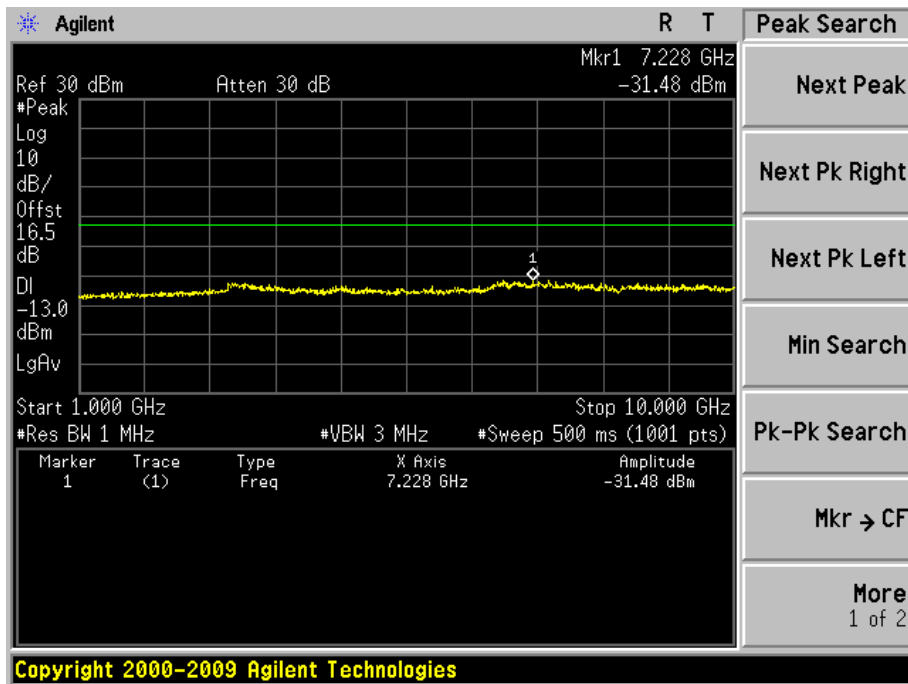
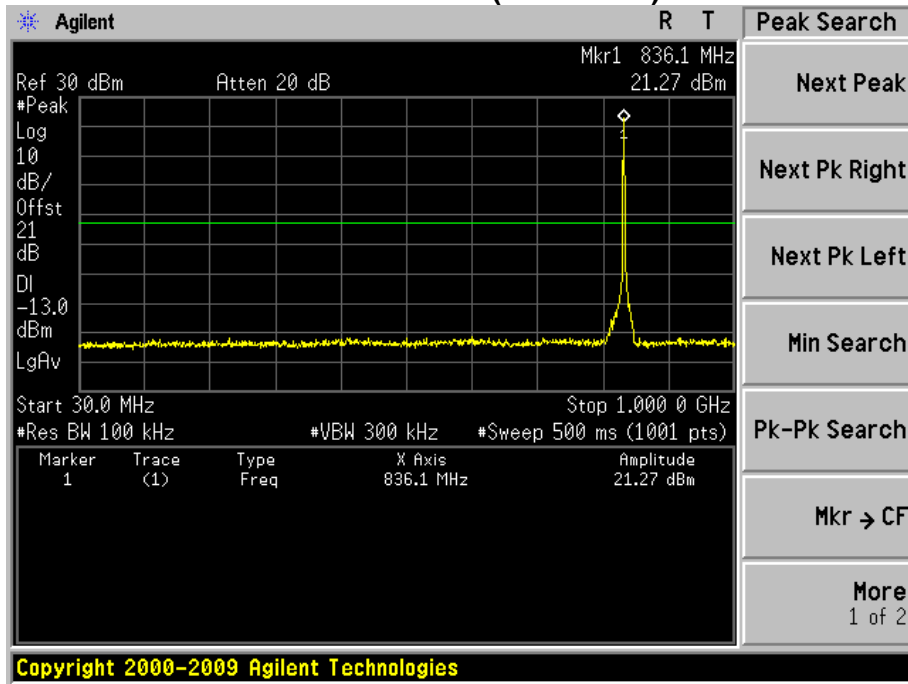


High Channel 777(848.31MHz)

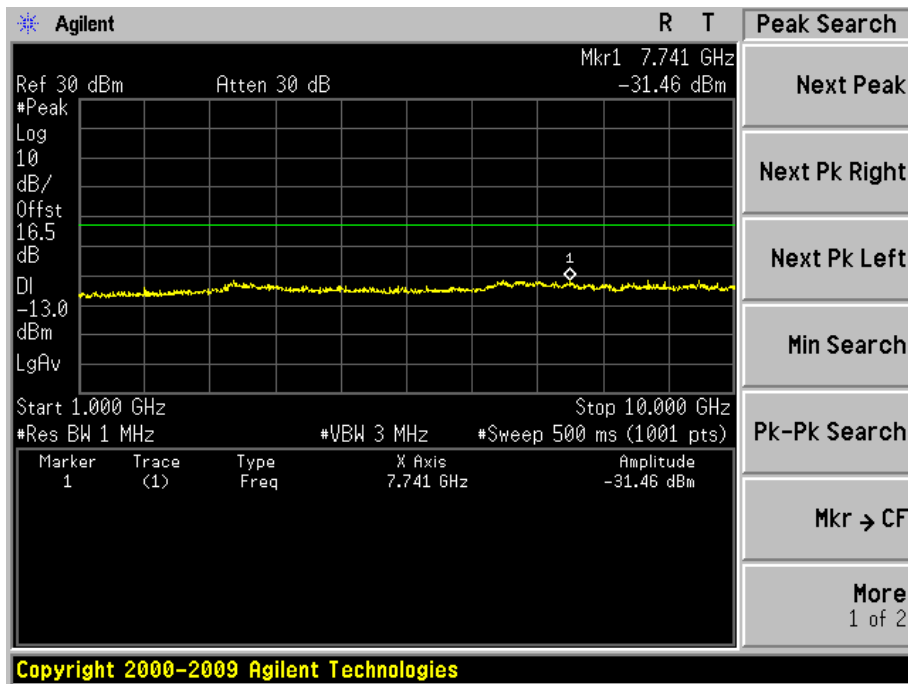
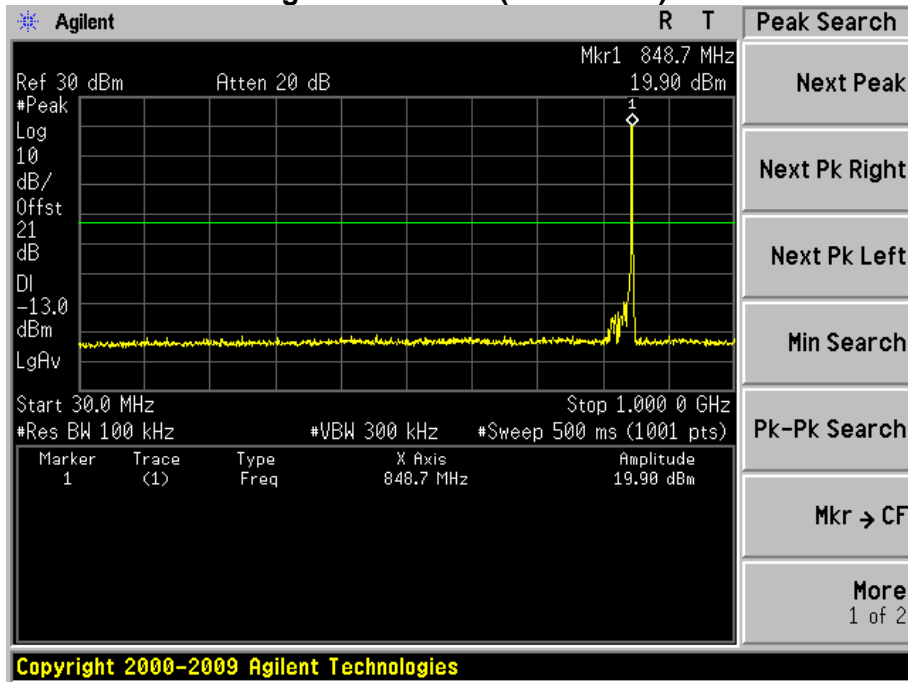


Product	Wireless Module		
Test Item	Conducted Spurious Emission		
Test Mode	Mode 2: CDMA 2000 1X BC10 Link		
Date of Test	2015/06/17	Test Site	TR-8



Low Channel 476(817.90MHz)

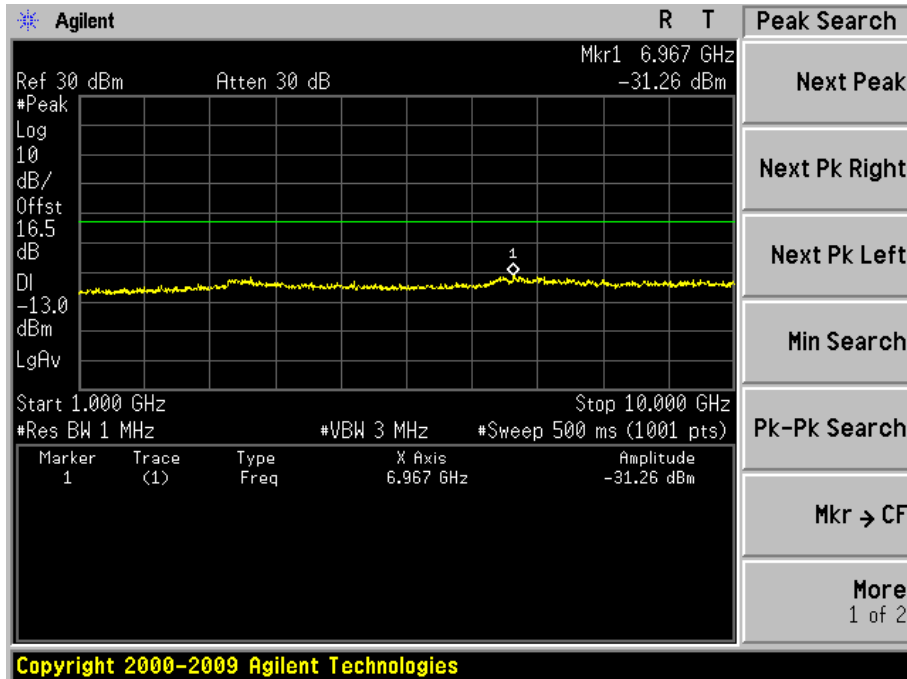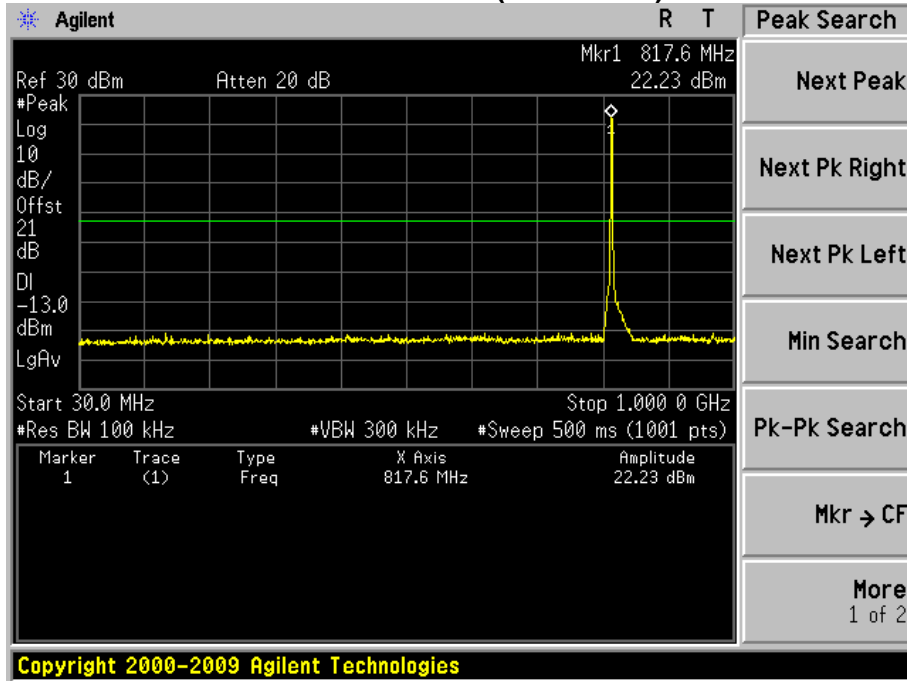

Mid Channel 580(820.50MHz)

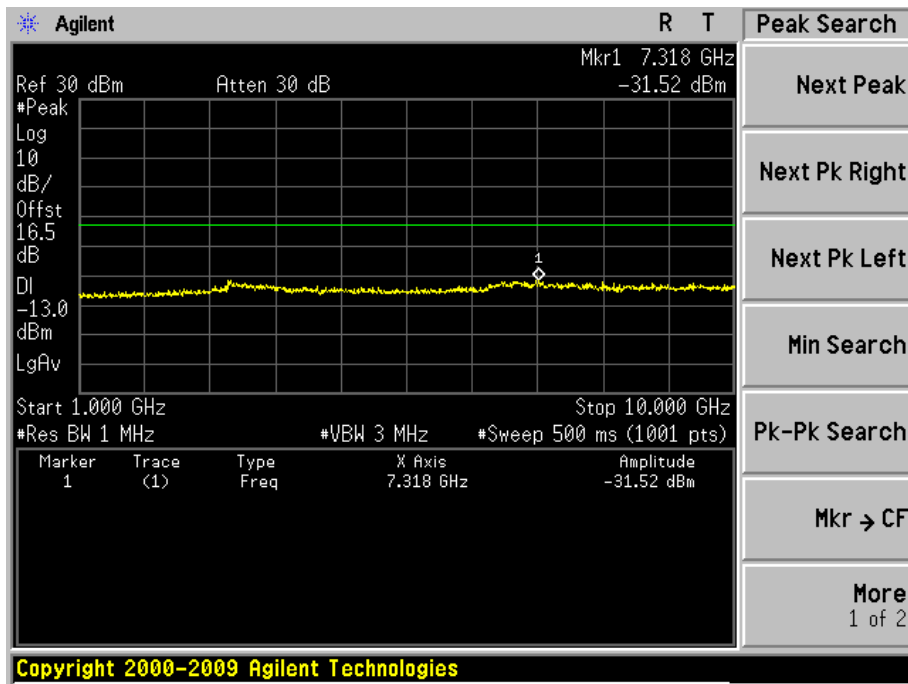
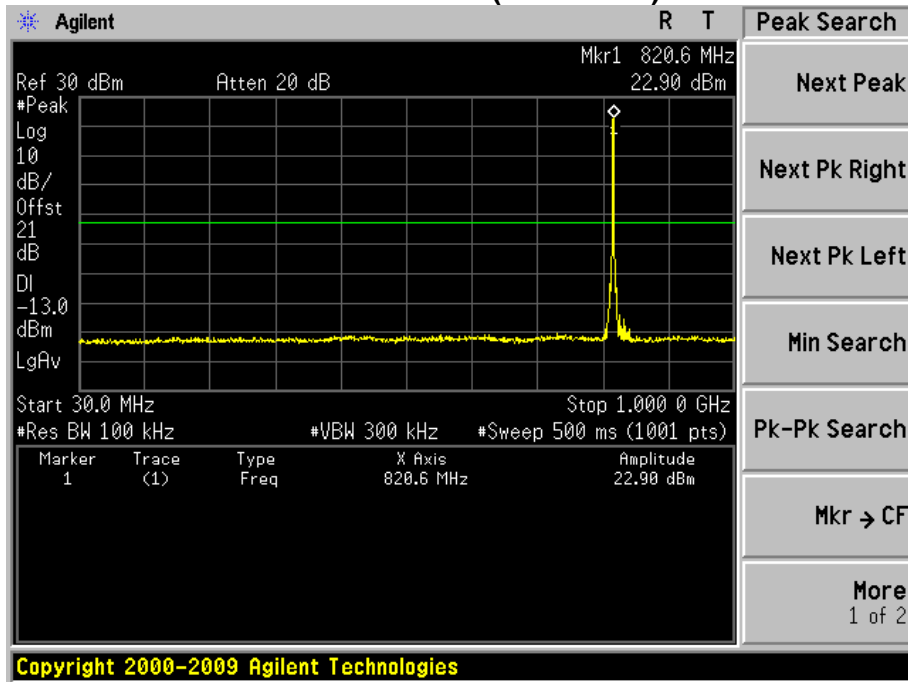


High Channel 684(823.10MHz)

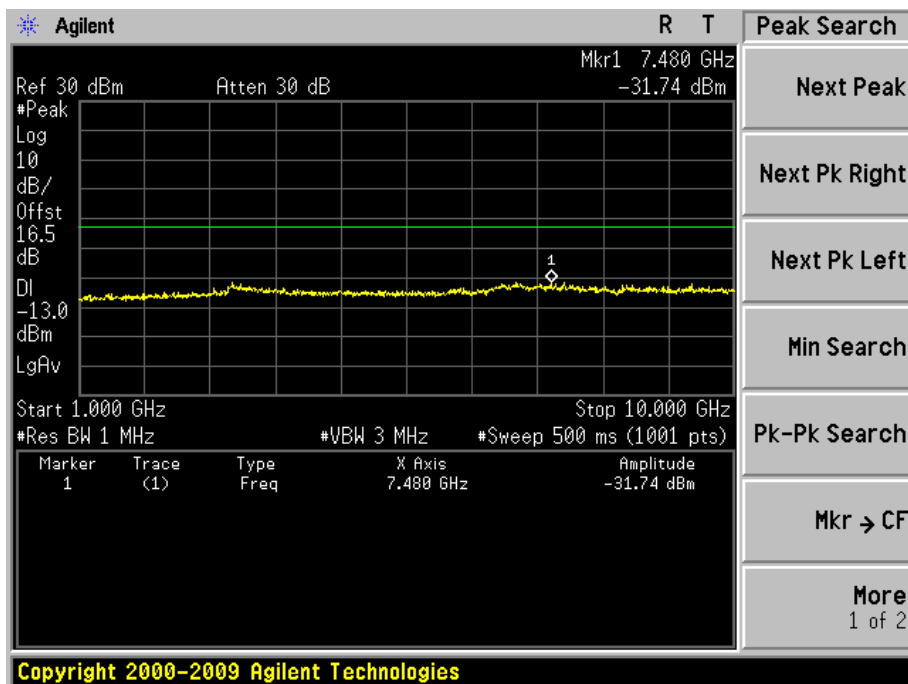
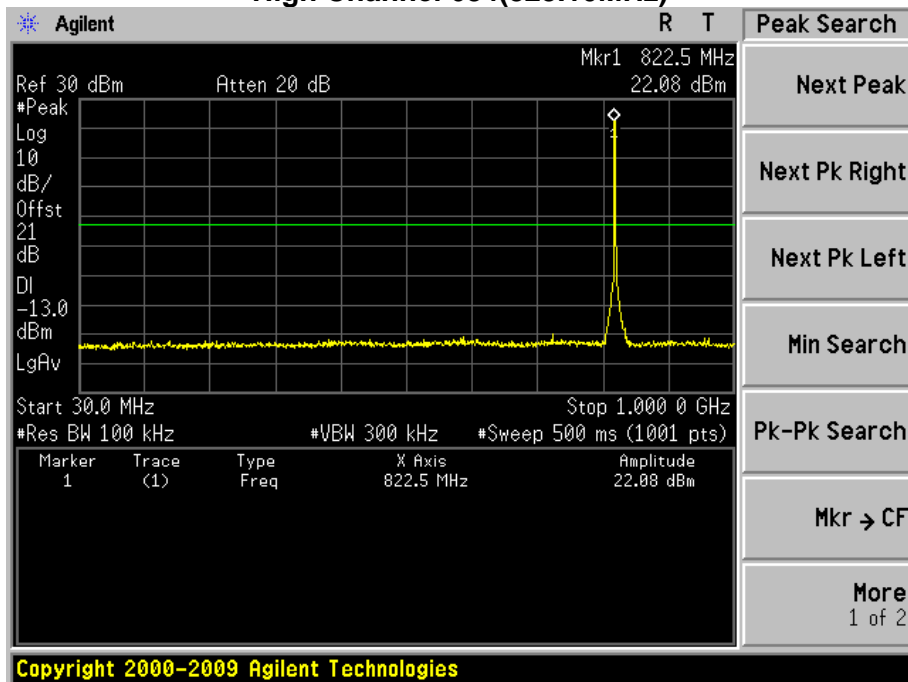


Product	Wireless Module		
Test Item	Conducted Spurious Emission		
Test Mode	Mode 3: CDMA 2000 1XEVD0 Rel-0 BC0 Link		
Date of Test	2015/06/17	Test Site	TR-8



Low Channel 1013(824.7MHz)

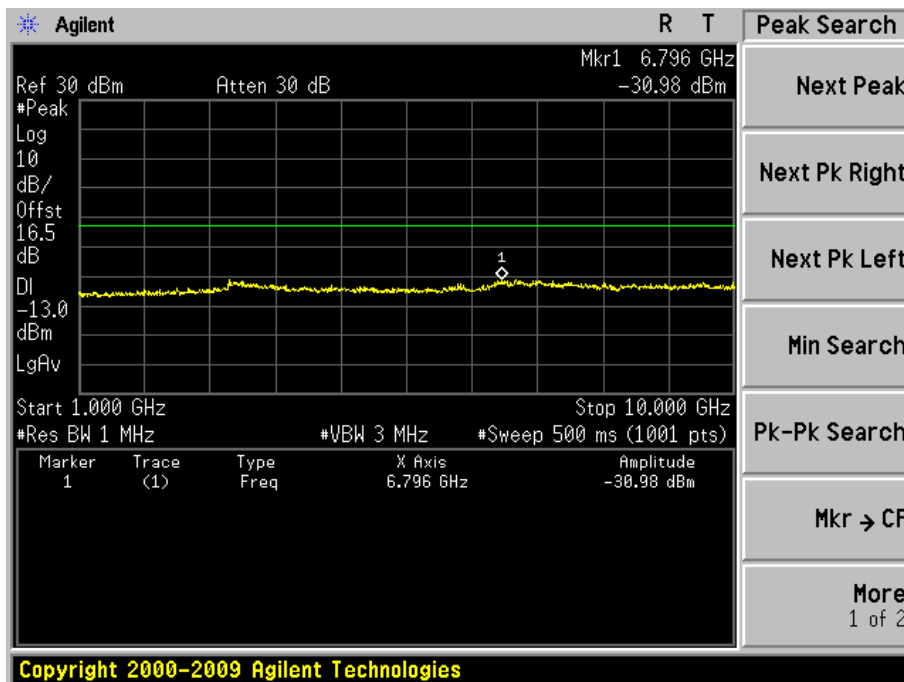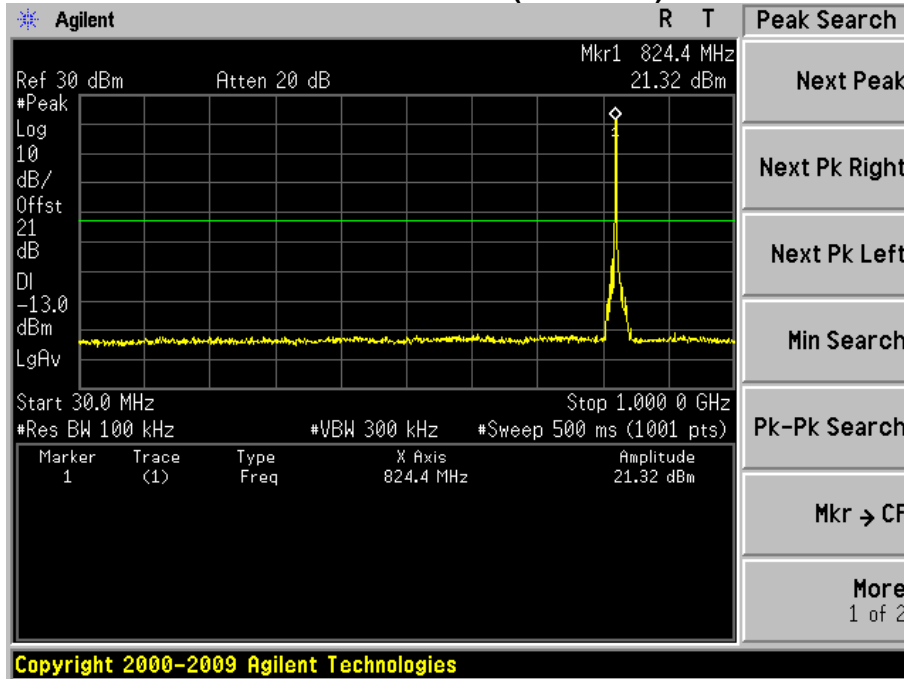

Mid Channel 384(836.52MHz)

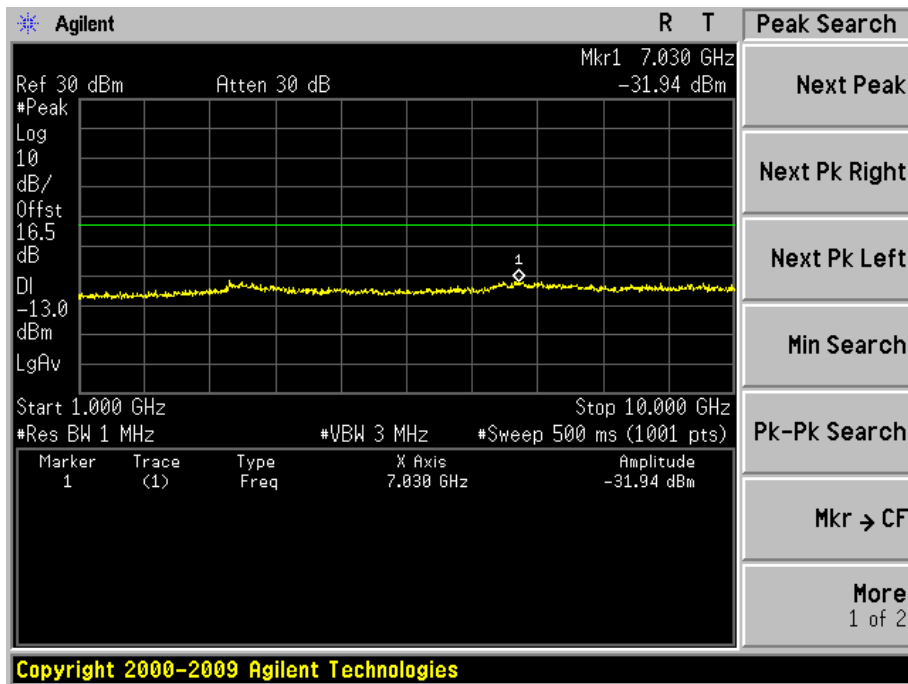
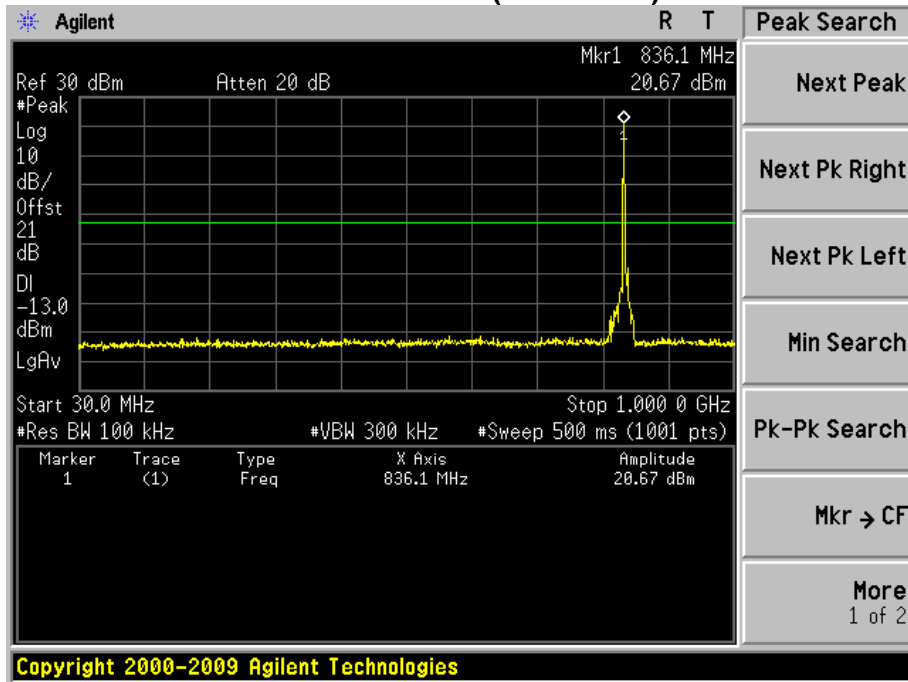


High Channel 777(848.31MHz)

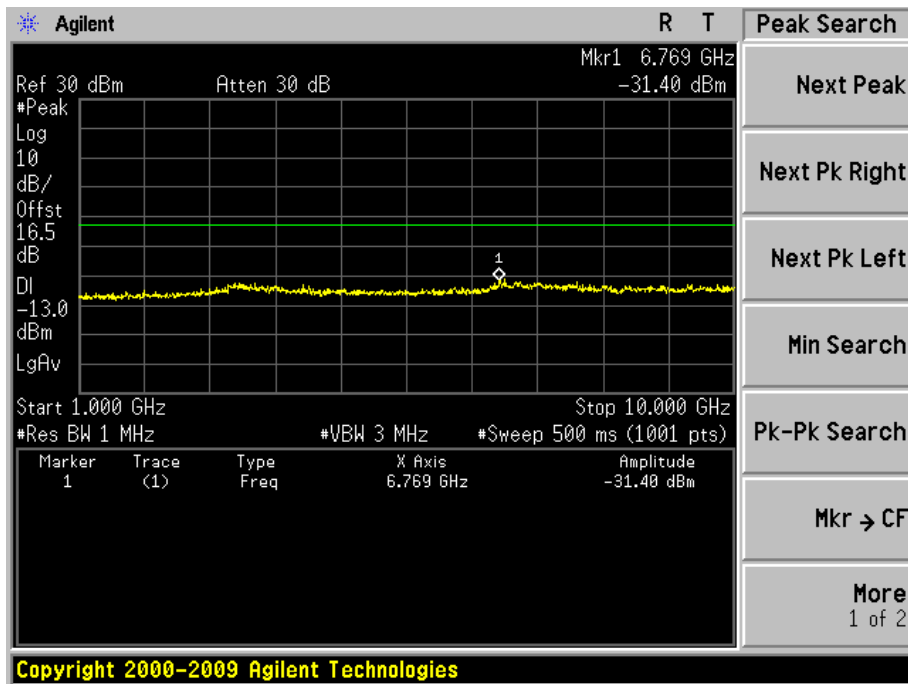
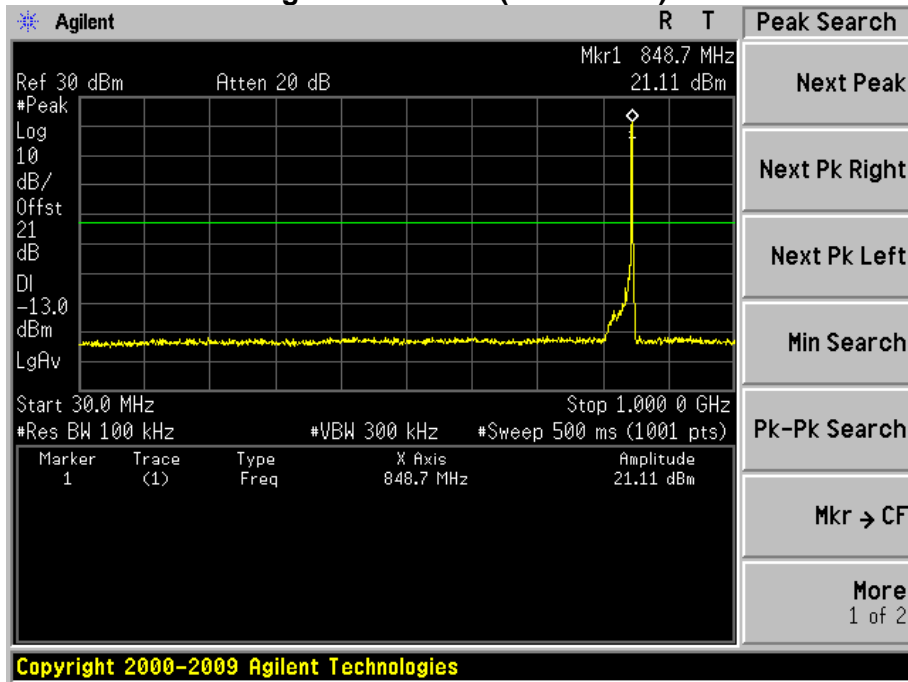


Product	Wireless Module		
Test Item	Conducted Spurious Emission		
Test Mode	Mode 4: CDMA 2000 1XEVD0 Rel-0 BC10 Link		
Date of Test	2015/06/17	Test Site	TR-8



Low Channel 476(817.90MHz)

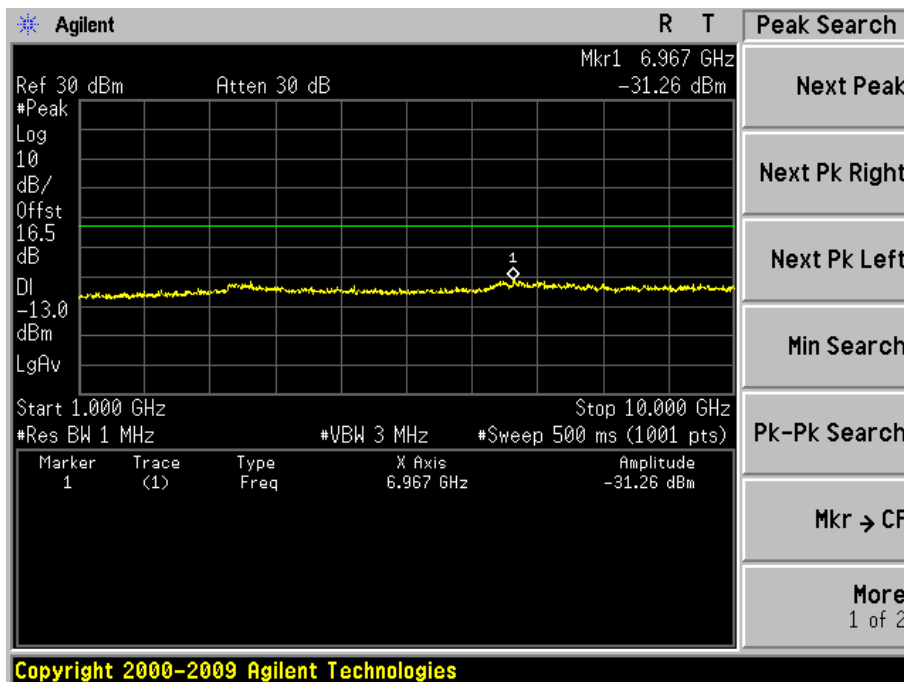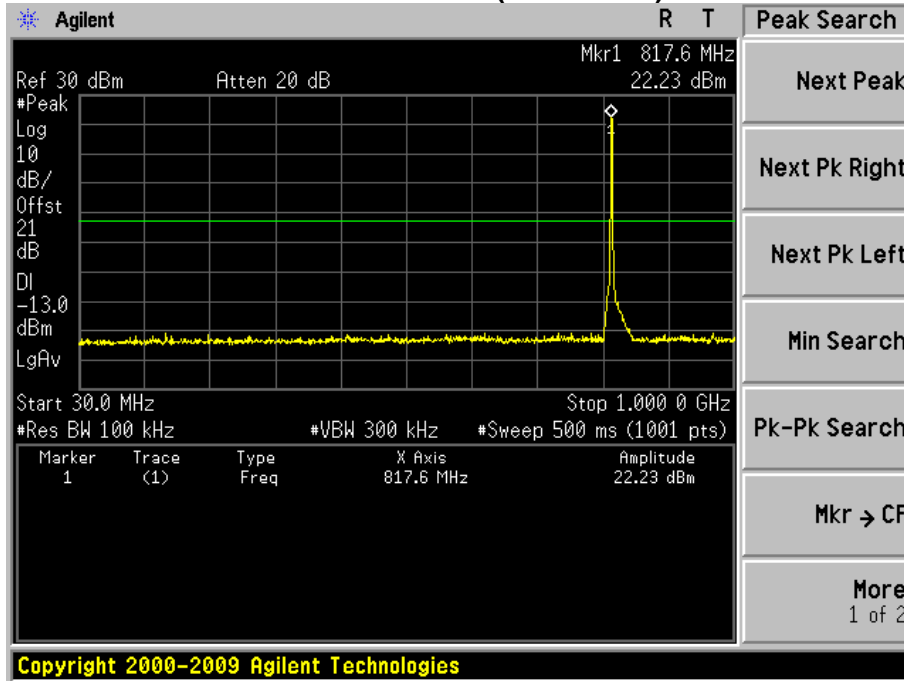

Mid Channel 580(820.50MHz)

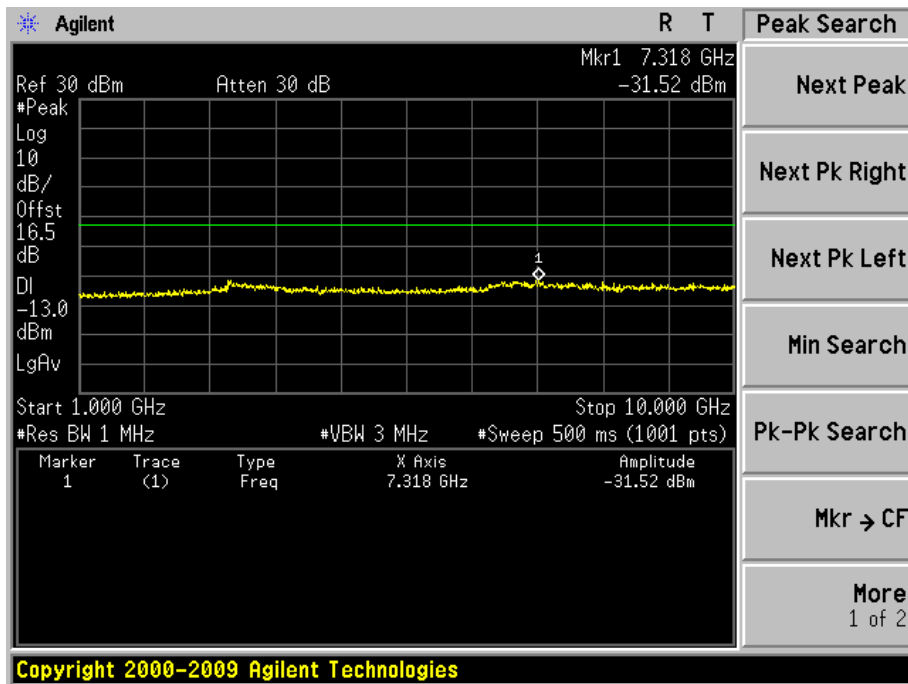
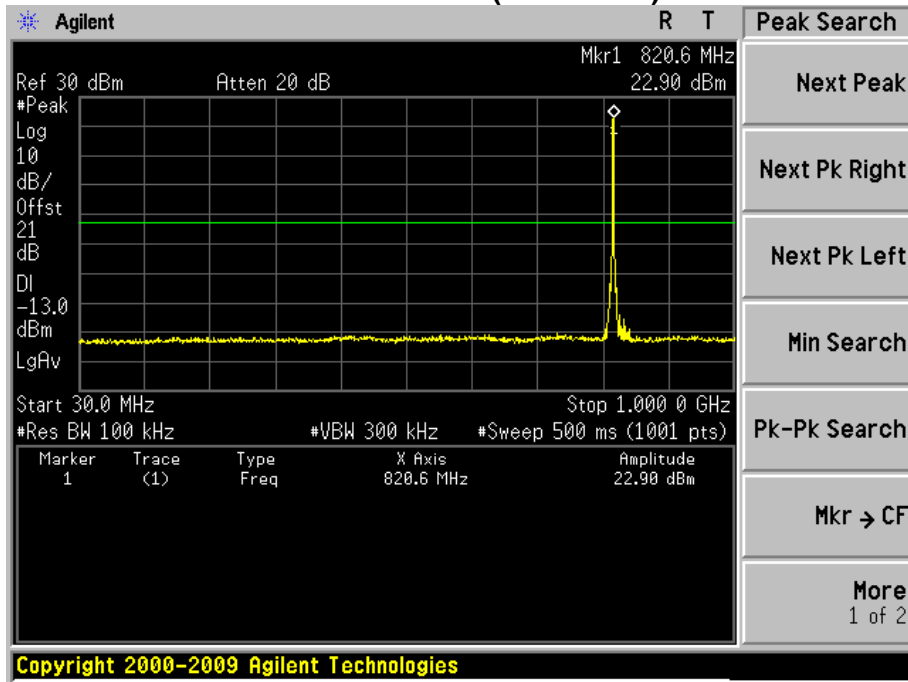


High Channel 684(823.10MHz)

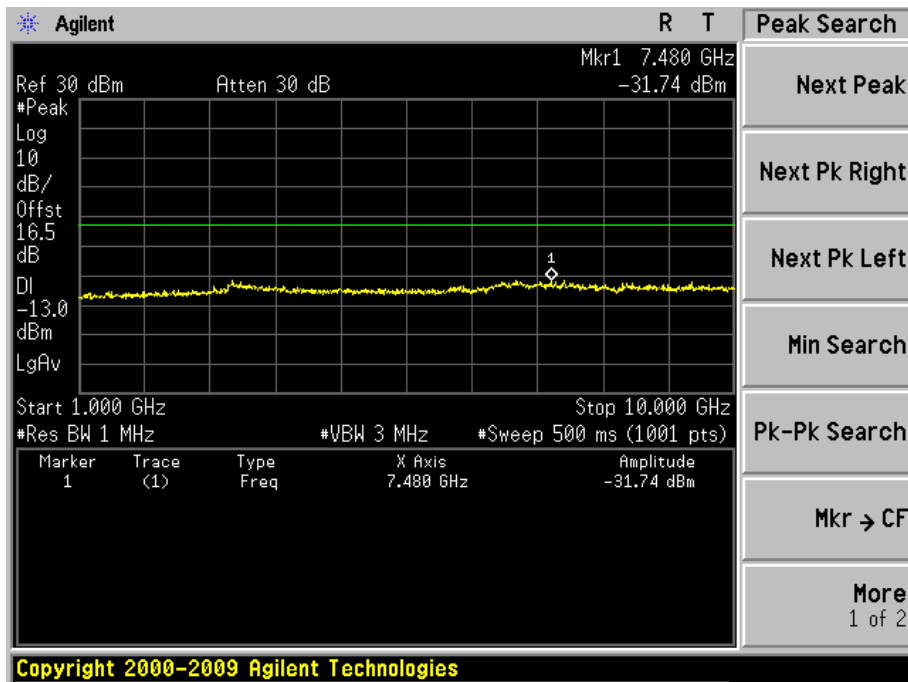
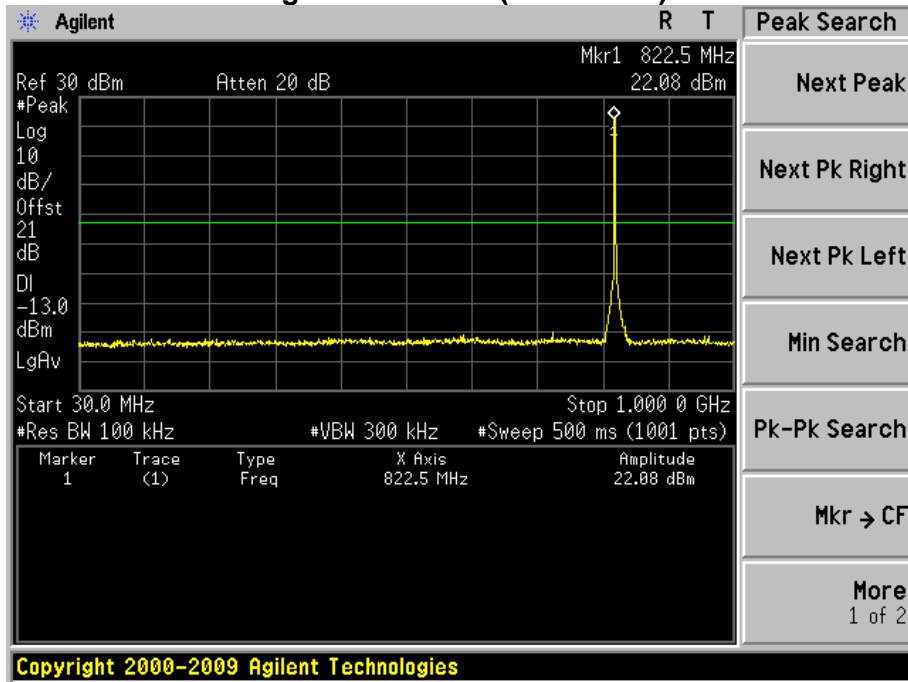


Product	Wireless Module		
Test Item	Conducted Spurious Emission		
Test Mode	Mode 5: CDMA 2000 1XEVD0 Rel-A BC0 Link		
Date of Test	2015/06/17	Test Site	TR-8



Low Channel 1013(824.7MHz)

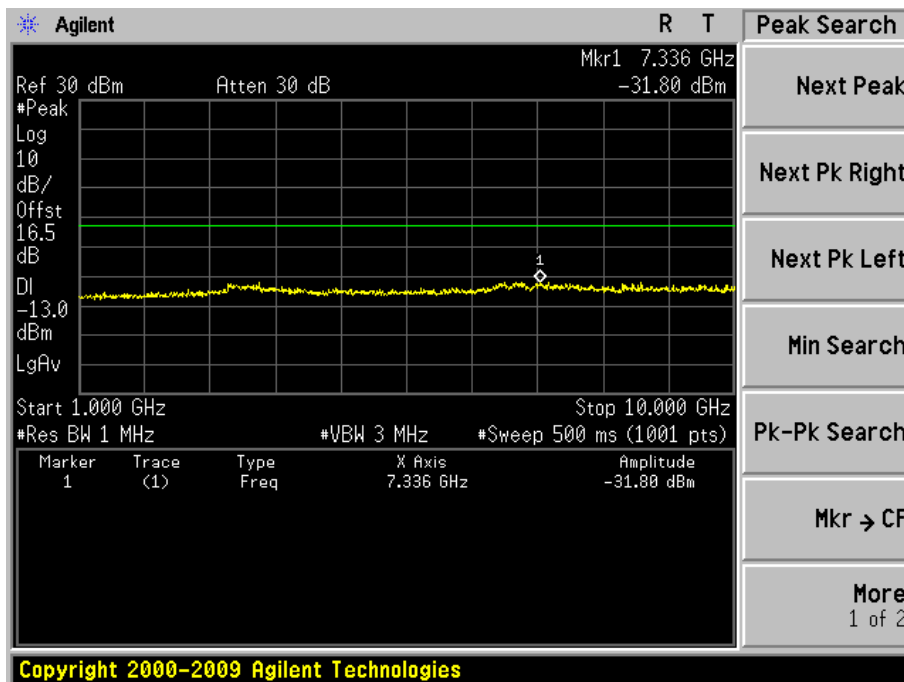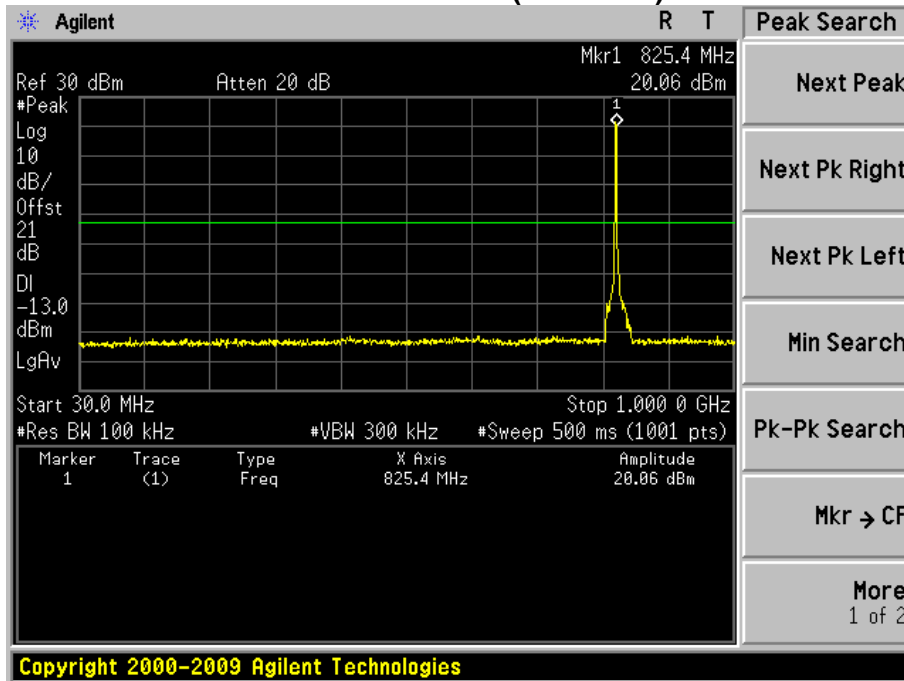

Mid Channel 384(836.52MHz)

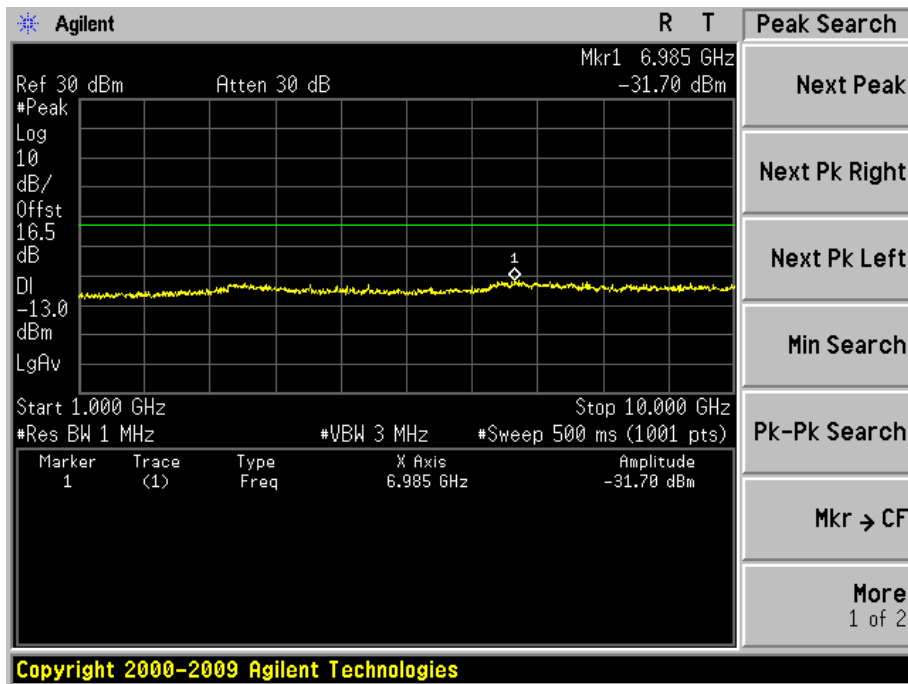
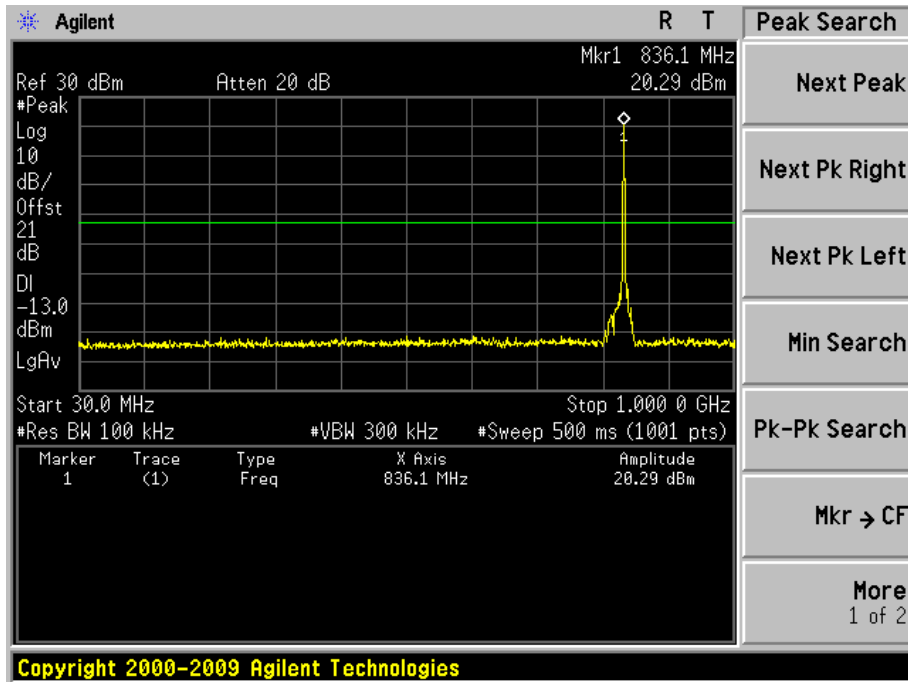


High Channel 777(848.31MHz)

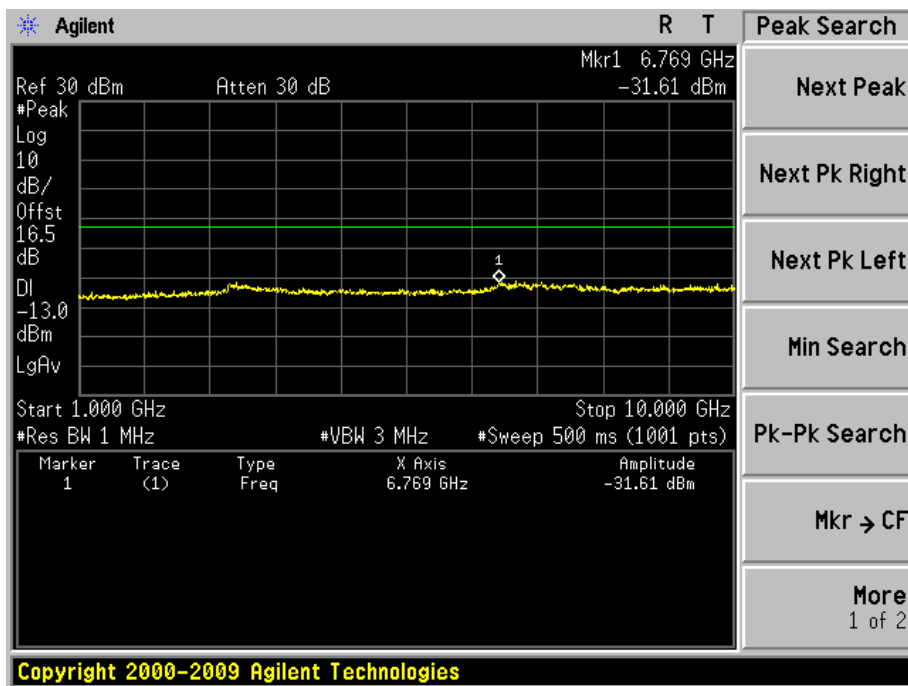
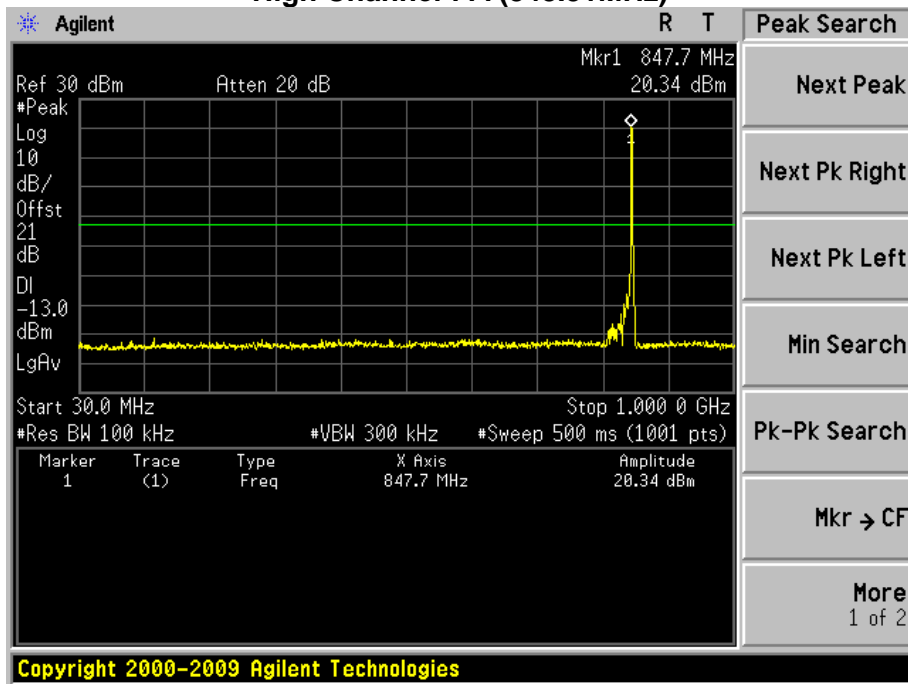


Product	Wireless Module		
Test Item	Conducted Spurious Emission		
Test Mode	Mode 6: CDMA 2000 1XEVDO Rel-A BC10 Link		
Date of Test	2015/06/17	Test Site	TR-8

Low Channel 476(817.90MHz)

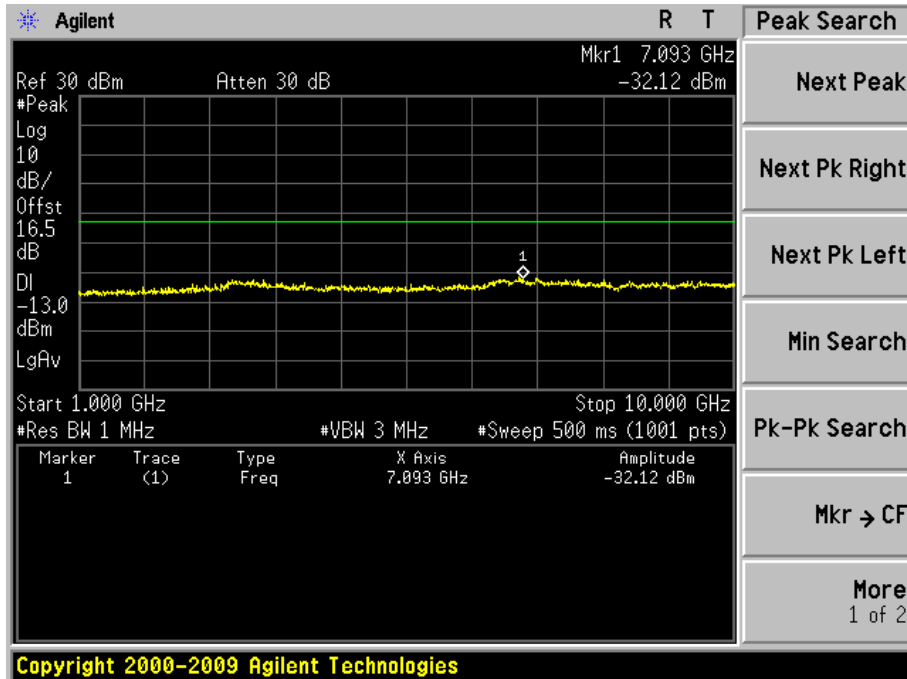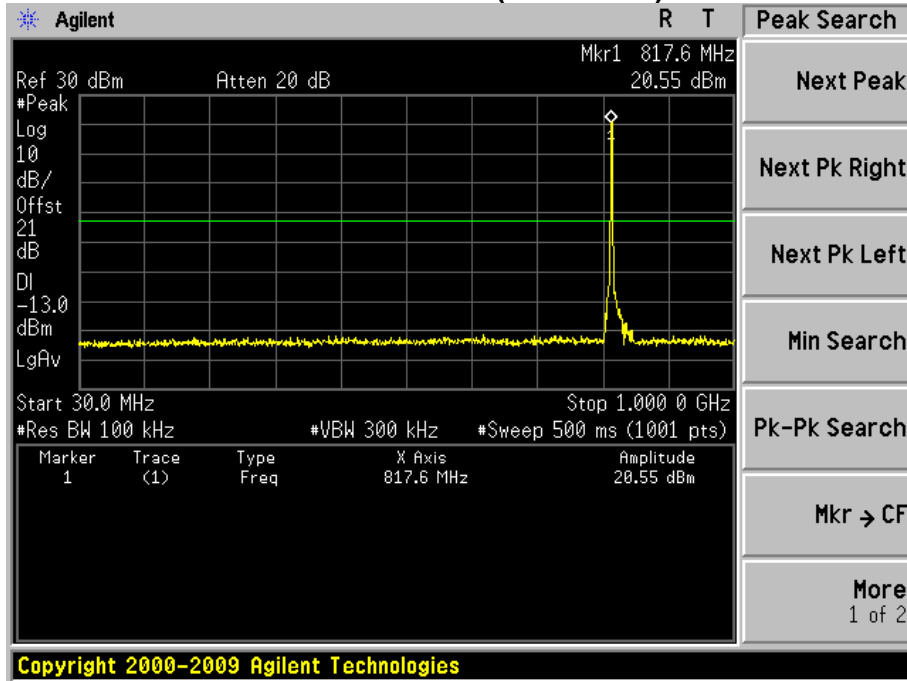

Mid Channel 580(820.50MHz)

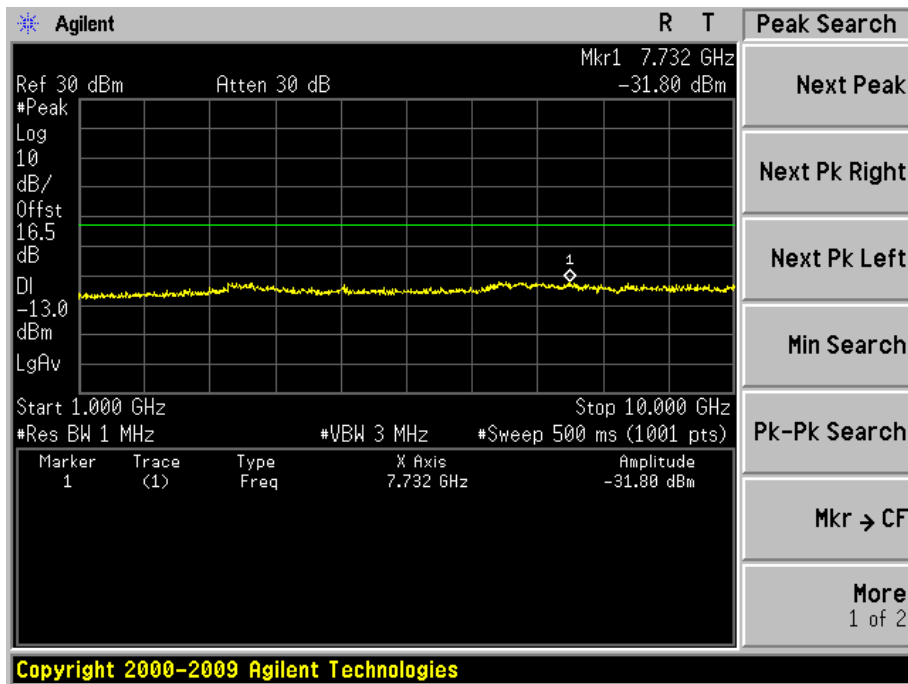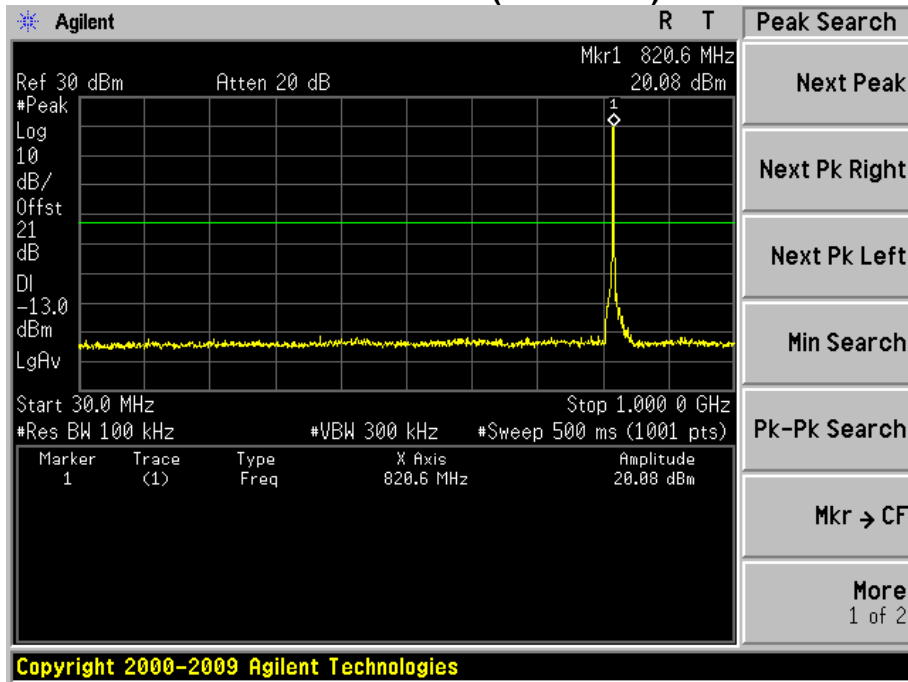

Product	Wireless Module		
Test Item	Radiated Spurious Emission		
Test Mode	Mode 1: CDMA 2000 1X BC0 Link		
Date of Test	2015/06/13	Test Site	AC-5

Frequency (MHz)	SA Reading (dBm)	Ant.Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 1013 (824.70MHz)								
1649.40	-51.58	H	-54.22	2.50	9.78	-46.94	-13.00	-33.94
2474.10	-61.45	H	-60.39	3.12	10.49	-53.02	-13.00	-40.02
1649.40	-51.23	V	-53.81	2.50	9.78	-46.53	-13.00	-33.53
2474.10	-61.00	V	-60.11	3.12	10.49	-52.74	-13.00	-39.74
Middle Channel 384 (836.52MHz)								
1672.64	-53.51	H	-55.90	2.51	9.94	-48.47	-13.00	-35.47
2508.96	-61.77	H	-60.74	3.18	10.61	-53.31	-13.00	-40.31
1672.64	-56.62	V	-59.29	2.51	9.94	-51.86	-13.00	-38.86
2508.96	-64.13	V	-63.49	3.18	10.61	-56.06	-13.00	-43.06
High Channel 777 (848.31MHz)								
1696.62	-53.32	H	-55.38	2.53	10.10	-47.81	-13.00	-34.81
2544.93	-63.00	H	-61.21	3.15	10.67	-53.69	-13.00	-40.69
1696.62	-56.31	V	-59.10	2.53	10.10	-51.53	-13.00	-38.53
2544.93	-63.65	V	-62.12	3.15	10.67	-54.60	-13.00	-41.60

Product	Wireless Module		
Test Item	Radiated Spurious Emission		
Test Mode	Mode 2: CDMA 2000 1X BC10 Link		
Date of Test	2015/06/13	Test Site	AC-5

Frequency (MHz)	SA Reading (dBm)	Ant.Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 476 (817.90MHz)								
1635.80	-54.73	V	-57.36	2.41	9.68	-50.09	-13.00	-37.09
2453.70	-61.54	V	-60.29	3.05	10.41	-52.93	-13.00	-39.93
1635.80	-57.01	H	-59.76	2.41	9.68	-52.49	-13.00	-39.49
2453.70	-63.20	H	-61.99	3.05	10.41	-54.63	-13.00	-41.63
Middle Channel 580 (820.50MHz)								
1641.00	-56.66	V	-59.35	2.42	9.72	-52.05	-13.00	-39.05
2641.50	-61.32	V	-60.52	3.09	10.85	-52.76	-13.00	-39.76
1641.00	-56.32	H	-59.01	2.42	9.72	-51.71	-13.00	-38.71
2641.50	-54.16	H	-53.42	3.09	10.85	-45.66	-13.00	-32.66
High Channel 684 (823.10MHz)								
1646.20	-51.44	V	-54.15	2.44	9.75	-46.84	-13.00	-33.84
2469.30	-58.86	V	-57.75	3.10	10.47	-50.38	-13.00	-37.38
1646.20	-55.91	H	-58.54	2.44	9.75	-51.23	-13.00	-38.23
2469.30	-55.33	H	-54.35	3.10	10.47	-46.98	-13.00	-33.98

Product	Wireless Module		
Test Item	Radiated Spurious Emission		
Test Mode	Mode 3: CDMA 2000 1XEVD0 Rel-0 BC0 Link		
Date of Test	2015/06/13	Test Site	AC-5

Frequency (MHz)	SA Reading (dBm)	Ant.Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 1013 (824.70MHz)								
1649.40	-56.04	H	-58.68	2.50	9.78	-51.40	-13.00	-38.40
2474.10	-62.67	H	-61.60	3.12	10.49	-54.23	-13.00	-41.23
1649.40	-55.20	V	-57.79	2.50	9.78	-50.51	-13.00	-37.51
2474.10	-64.11	V	-63.22	3.12	10.49	-55.85	-13.00	-42.85
Middle Channel 384 (836.52MHz)								
1672.64	-55.05	H	-57.44	2.51	9.94	-50.01	-13.00	-37.01
2508.96	-64.22	H	-63.20	3.18	10.61	-55.77	-13.00	-42.77
1672.64	-56.65	V	-59.31	2.51	9.94	-51.88	-13.00	-38.88
2508.96	-63.99	V	-63.36	3.18	10.61	-55.93	-13.00	-42.93
High Channel 777 (848.31MHz)								
1696.62	-53.84	H	-55.89	2.53	10.10	-48.32	-13.00	-35.32
2544.93	-63.75	H	-61.97	3.15	10.67	-54.45	-13.00	-41.45
1696.62	-56.66	V	-59.45	2.53	10.10	-51.88	-13.00	-38.88
2544.93	-63.30	V	-61.77	3.15	10.67	-54.25	-13.00	-41.25

Product	Wireless Module		
Test Item	Radiated Spurious Emission		
Test Mode	Mode 4: CDMA 2000 1XEVD0 Rel-0 BC10 Link		
Date of Test	2015/06/13	Test Site	AC-5

Frequency (MHz)	SA Reading (dBm)	Ant.Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 476 (817.90MHz)								
1635.80	-53.33	V	-55.97	2.41	9.68	-48.70	-13.00	-35.70
2453.70	-57.15	V	-55.90	3.05	10.41	-48.54	-13.00	-35.54
1635.80	-58.37	H	-61.11	2.41	9.68	-53.84	-13.00	-40.84
2453.70	-54.46	H	-53.25	3.05	10.41	-45.89	-13.00	-32.89
Middle Channel 580 (820.50MHz)								
1641.00	-52.41	V	-55.09	2.42	9.72	-47.79	-13.00	-34.79
2641.50	-61.13	V	-60.33	3.09	10.85	-52.57	-13.00	-39.57
1641.00	-57.79	H	-60.49	2.42	9.72	-53.19	-13.00	-40.19
2641.50	-53.70	H	-52.96	3.09	10.85	-45.20	-13.00	-32.20
High Channel 684 (823.10MHz)								
1646.20	-51.93	V	-54.65	2.44	9.75	-47.34	-13.00	-34.34
2469.30	-56.57	V	-55.46	3.10	10.47	-48.09	-13.00	-35.09
1646.20	-56.27	H	-58.90	2.44	9.75	-51.59	-13.00	-38.59
2469.30	-56.50	H	-55.52	3.10	10.47	-48.15	-13.00	-35.15

Product	Wireless Module		
Test Item	Radiated Spurious Emission		
Test Mode	Mode 5: CDMA 2000 1XEVD0 Rel-A BC0 Link		
Date of Test	2015/06/13	Test Site	AC-5

Frequency (MHz)	SA Reading (dBm)	Ant.Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 1013 (824.70MHz)								
1649.40	-53.40	H	-56.04	2.50	9.78	-48.76	-13.00	-35.76
2474.10	-63.87	H	-62.81	3.12	10.49	-55.44	-13.00	-42.44
1649.40	-55.18	V	-57.76	2.50	9.78	-50.48	-13.00	-37.48
2474.10	-64.75	V	-63.86	3.12	10.49	-56.49	-13.00	-43.49
Middle Channel 384 (836.52MHz)								
1672.64	-55.84	H	-58.23	2.51	9.94	-50.80	-13.00	-37.80
2508.96	-64.72	H	-63.70	3.18	10.61	-56.27	-13.00	-43.27
1672.64	-56.17	V	-58.83	2.51	9.94	-51.40	-13.00	-38.40
2508.96	-64.28	V	-63.65	3.18	10.61	-56.22	-13.00	-43.22
High Channel 777 (848.31MHz)								
1696.62	-57.00	H	-59.06	2.53	10.10	-51.49	-13.00	-38.49
2544.93	-63.21	H	-61.42	3.15	10.67	-53.90	-13.00	-40.90
1696.62	-56.69	V	-59.47	2.53	10.10	-51.90	-13.00	-38.90
2544.93	-63.04	V	-61.51	3.15	10.67	-53.99	-13.00	-40.99

Product	Wireless Module		
Test Item	Radiated Spurious Emission		
Test Mode	Mode 6: CDMA 2000 1XEVD0 Rel-A BC10 Link		
Date of Test	2015/06/13	Test Site	AC-5

Frequency (MHz)	SA Reading (dBm)	Ant.Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 476 (817.90MHz)								
1635.80	-53.89	V	-56.52	2.41	9.68	-49.25	-13.00	-36.25
2453.70	-58.09	V	-56.84	3.05	10.41	-49.48	-13.00	-36.48
1635.80	-58.66	H	-61.41	2.41	9.68	-54.14	-13.00	-41.14
2453.70	-63.98	H	-62.77	3.05	10.41	-55.41	-13.00	-42.41
Middle Channel 580 (820.50MHz)								
1641.00	-52.23	V	-54.91	2.42	9.72	-47.61	-13.00	-34.61
2641.50	-60.56	V	-59.76	3.09	10.85	-52.00	-13.00	-39.00
1641.00	-56.16	H	-58.85	2.42	9.72	-51.55	-13.00	-38.55
2641.50	-50.30	H	-49.56	3.09	10.85	-41.80	-13.00	-28.80
High Channel 684 (823.10MHz)								
1646.20	-51.27	V	-53.99	2.44	9.75	-46.68	-13.00	-33.68
2469.30	-60.59	V	-59.48	3.10	10.47	-52.11	-13.00	-39.11
1646.20	-56.92	H	-59.55	2.44	9.75	-52.24	-13.00	-39.24
2469.30	-53.18	H	-52.19	3.10	10.47	-44.82	-13.00	-31.82


8. Frequency Stability Under Temperature & Voltage Variations

8.1. Test Equipment

Frequency Stability Under Temperature & Voltage Variations / TR-7

Instrument	Manufacturer	Type No.	Serial No	Cali. Due Date
PSA Series Spectrum Analyzer	Agilent	E4440A	MY49420184	2016/03/10
Radio Communication Tester	R&S	CMU 200	117088	2016/03/10
Dual Directional Coupler	Agilent	778D	20160	2016/03/10
10dB Coaxial Coupler	Agilent	87300C	MY44300299	2016/03/10
DC Power Supply	IDRC	CD-035-020PR	977272	2016/03/10
Temperature & Humidity Chamber	Gaoyu	TH-1P-B	WIT-05121302	2016/01/07
Temperature/Humidity Meter	Zhicheng	ZC1-2	AC6-TH	2016/01/07

8.2. Test Setup

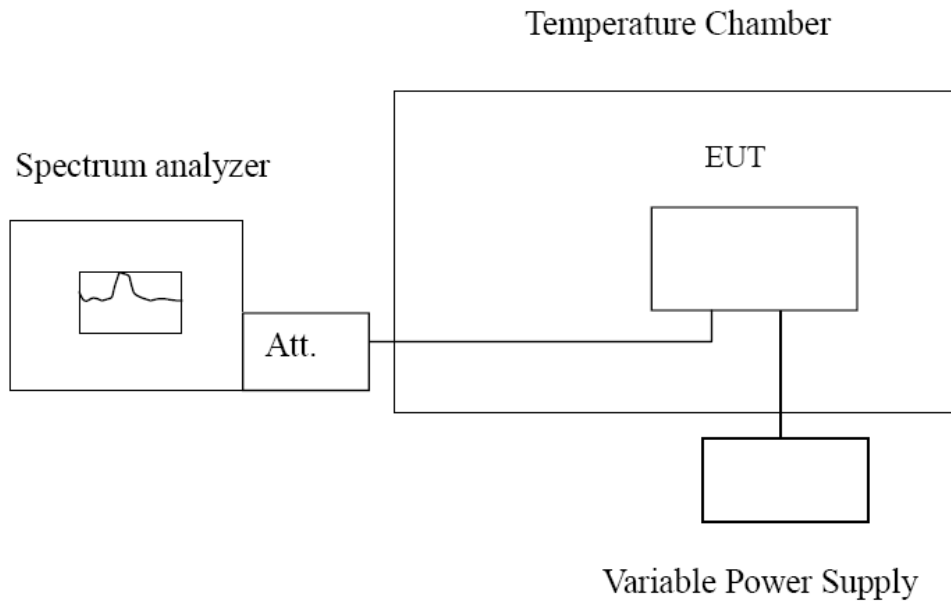

8.3. Test Procedure

Frequency Stability Under Temperature Variations:

The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to -30°C. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

8.4. Uncertainty

The measurement uncertainty is defined as ± 10 Hz.

8.5. Test Result

Product	Wireless Module		
Test Item	Frequency Stability Under Temperature & Voltage Variations		
Test Mode	Mode 1: CDMA 2000 1X BC0 Link		
Date of Test	2015/06/18	Test Site	TR-7

Frequency Stability under Temperature

Temperature Interval (°C)	Test Frequency (MHz)	Deviation (Hz)	Limit (Hz)
-30	836.52	-48	± 2091.3
-20	836.52	48	± 2091.3
-10	836.52	-38	± 2091.3
0	836.52	57	± 2091.3
10	836.52	-57	± 2091.3
20	836.52	53	± 2091.3
30	836.52	50	± 2091.3
40	836.52	49	± 2091.3
50	836.52	-35	± 2091.3

Frequency Stability under Voltage

DC Voltage (V)	Test Frequency (MHz)	Deviation (Hz)	Limit (Hz)
4.25	836.52	56	± 2091.3
5.00	836.52	33	± 2091.3
5.75	836.52	-41	± 2091.3

Product	Wireless Module		
Test Item	Frequency Stability Under Temperature & Voltage Variations		
Test Mode	Mode 2: CDMA 2000 1X BC10 Link		
Date of Test	2015/06/18	Test Site	TR-7

Frequency Stability under Temperature

Temperature Interval (°C)	Test Frequency (MHz)	Deviation (Hz)	Limit (Hz)
-30	820.50	41	± 2051.3
-20	820.50	46	± 2051.3
-10	820.50	-34	± 2051.3
0	820.50	-43	± 2051.3
10	820.50	42	± 2051.3
20	820.50	-46	± 2051.3
30	820.50	60	± 2051.3
40	820.50	63	± 2051.3
50	820.50	-48	± 2051.3

Frequency Stability under Voltage

DC Voltage (V)	Test Frequency (MHz)	Deviation (Hz)	Limit (Hz)
4.25	820.50	-44	± 2051.3
5.00	820.50	-37	± 2051.3
5.75	820.50	-28	± 2051.3

Product	Wireless Module		
Test Item	Frequency Stability Under Temperature & Voltage Variations		
Test Mode	Mode 3: CDMA 2000 1XEVD0 Rel-0 BC0 Link		
Date of Test	2015/06/18	Test Site	TR-7

Frequency Stability under Temperature

Temperature Interval (°C)	Test Frequency (MHz)	Deviation (Hz)	Limit (Hz)
-30	836.52	70	± 2091.3
-20	836.52	45	± 2091.3
-10	836.52	55	± 2091.3
0	836.52	-42	± 2091.3
10	836.52	31	± 2091.3
20	836.52	46	± 2091.3
30	836.52	56	± 2091.3
40	836.52	67	± 2091.3
50	836.52	-38	± 2091.3

Frequency Stability under Voltage

DC Voltage (V)	Test Frequency (MHz)	Deviation (Hz)	Limit (Hz)
4.25	836.52	-44	± 2091.3
5.00	836.52	36	± 2091.3
5.75	836.52	46	± 2091.3

Product	Wireless Module		
Test Item	Frequency Stability Under Temperature & Voltage Variations		
Test Mode	Mode 4: CDMA 2000 1XEVD0 Rel-0 BC10 Link		
Date of Test	2015/06/18	Test Site	TR-7

Frequency Stability under Temperature

Temperature Interval (°C)	Test Frequency (MHz)	Deviation (Hz)	Limit (Hz)
-30	820.50	41	± 2051.3
-20	820.50	46	± 2051.3
-10	820.50	-24	± 2051.3
0	820.50	-43	± 2051.3
10	820.50	42	± 2051.3
20	820.50	-34	± 2051.3
30	820.50	60	± 2051.3
40	820.50	63	± 2051.3
50	820.50	-48	± 2051.3

Frequency Stability under Voltage

DC Voltage (V)	Test Frequency (MHz)	Deviation (Hz)	Limit (Hz)
4.200	820.50	-41	± 2051.3
3.700	820.50	-33	± 2051.3
3.400	820.50	-49	± 2051.3

Product	Wireless Module		
Test Item	Frequency Stability Under Temperature & Voltage Variations		
Test Mode	Mode 5: CDMA 2000 1XEVD0 Rel-A BC0 Link		
Date of Test	2015/06/18	Test Site	TR-7

Frequency Stability under Temperature

Temperature Interval (°C)	Test Frequency (MHz)	Deviation (Hz)	Limit (Hz)
-30	836.52	-29	± 2091.3
-20	836.52	-42	± 2091.3
-10	836.52	44	± 2091.3
0	836.52	57	± 2091.3
10	836.52	-20	± 2091.3
20	836.52	50	± 2091.3
30	836.52	-54	± 2091.3
40	836.52	-30	± 2091.3
50	836.52	-45	± 2091.3

Frequency Stability under Voltage

DC Voltage (V)	Test Frequency (MHz)	Deviation (Hz)	Limit (Hz)
11.40	836.52	35	± 2091.3
12.00	836.52	45	± 2091.3
13.80	836.52	37	± 2091.3

Product	Wireless Module		
Test Item	Frequency Stability Under Temperature & Voltage Variations		
Test Mode	Mode 6: CDMA 2000 1XEVD0 Rel-A BC10 Link		
Date of Test	2015/06/18	Test Site	TR-7

Frequency Stability under Temperature

Temperature Interval (°C)	Test Frequency (MHz)	Deviation (Hz)	Limit (Hz)
-30	820.50	25	± 2051.3
-20	820.50	31	± 2051.3
-10	820.50	-41	± 2051.3
0	820.50	-39	± 2051.3
10	820.50	26	± 2051.3
20	820.50	-64	± 2051.3
30	820.50	48	± 2051.3
40	820.50	51	± 2051.3
50	820.50	-45	± 2051.3

Frequency Stability under Voltage

DC Voltage (V)	Test Frequency (MHz)	Deviation (Hz)	Limit (Hz)
4.200	820.50	-28	± 2051.3
3.700	820.50	73	± 2051.3
3.400	820.50	65	± 2051.3

_____ The End _____