

Test Laboratory: UL CCS SAR Lab B

5GHz

Communication System: IEEE 802.11a/n 5 GHz Band; Frequency: 5180 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5180$ MHz; $\sigma = 5.412$ mho/m; $\epsilon_r = 49.19$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(4.39, 4.39, 4.39); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 5/2/2011
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118
- Measurement SW: DASY52, Version 52.8 (0); SEMCAD X Version 14.6.4 (4989)

Bottom Face/802.11a_Ant A_ch 36/Area Scan (181x241x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.064 mW/g


Bottom Face/802.11a_Ant A_ch 36/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 2.788 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.1030

SAR(1 g) = 0.024 mW/g; SAR(10 g) = 0.00999 mW/g

Maximum value of SAR (measured) = 0.049 mW/g

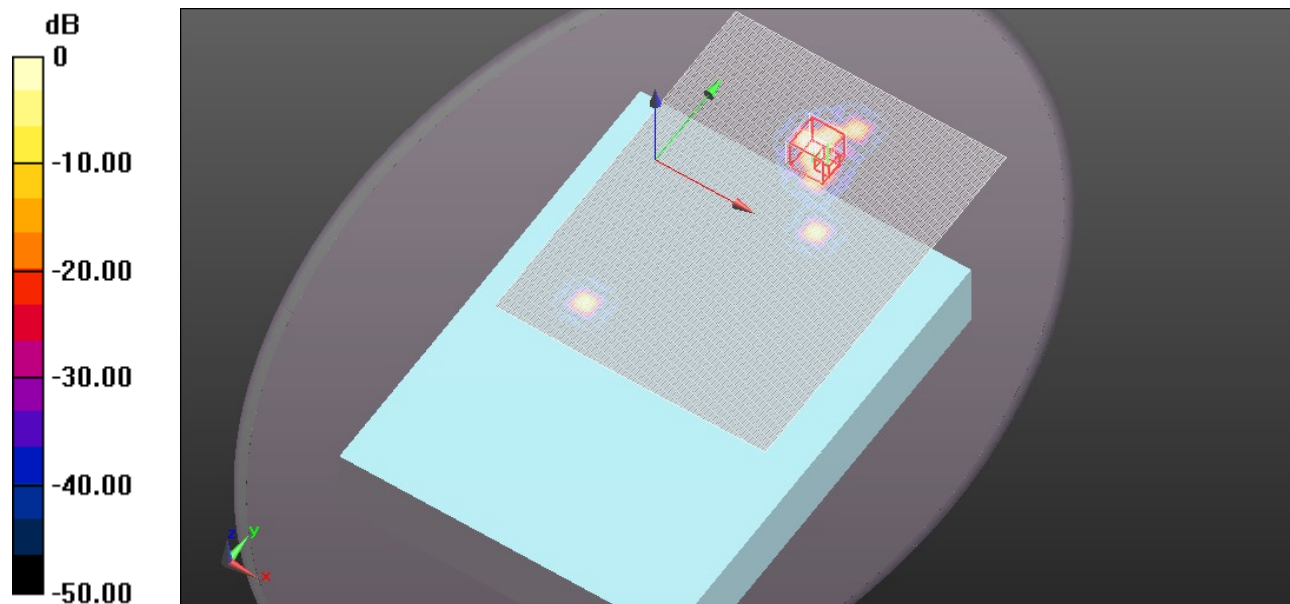

0 dB = 0.050mW/g = -26.02 dB mW/g

Test Laboratory: UL CCS SAR Lab B

5GHz

Communication System: IEEE 802.11a/n 5 GHz Band; Frequency: 5180 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5180$ MHz; $\sigma = 5.412$ mho/m; $\epsilon_r = 49.19$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(4.39, 4.39, 4.39); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 5/2/2011
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118
- Measurement SW: DASY52, Version 52.8 (0); SEMCAD X Version 14.6.4 (4989)

Bottom Face/802.11a_Ant B_ch 36/Area Scan (181x261x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 0.083 mW/g


Bottom Face/802.11a_Ant B_ch 36/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 3.088 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.1080

SAR(1 g) = 0.033 mW/g; SAR(10 g) = 0.013 mW/g

Maximum value of SAR (measured) = 0.058 mW/g

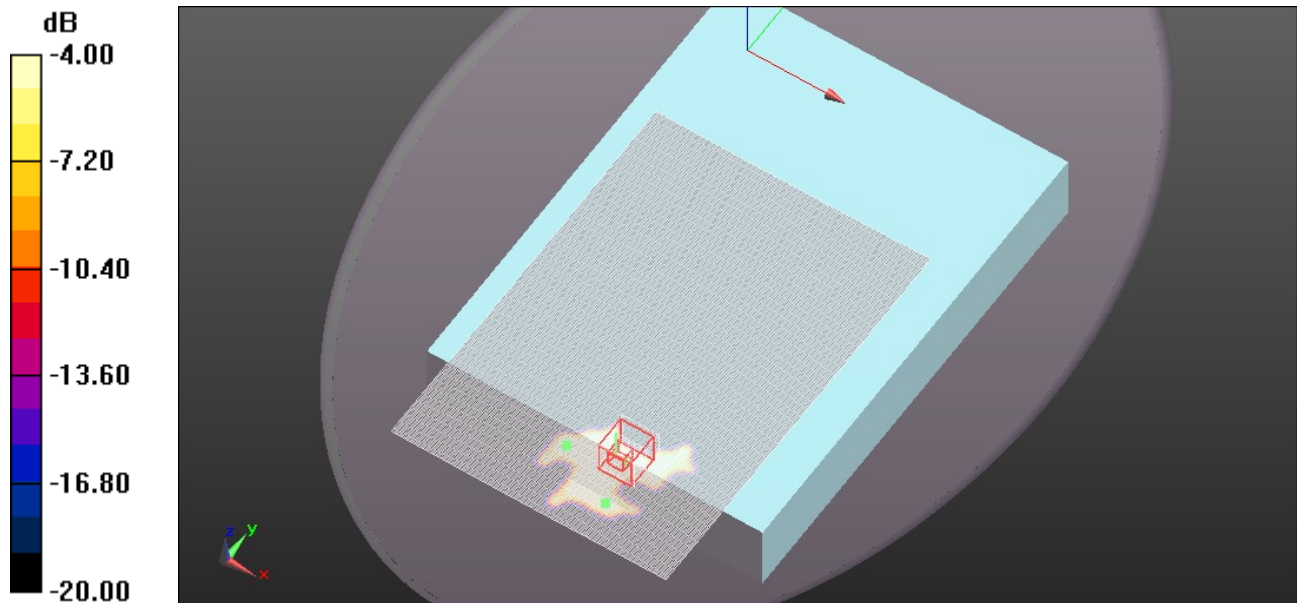

0 dB = 0.080mW/g = -21.94 dB mW/g

Test Laboratory: UL CCS SAR Lab B

5GHz

Communication System: IEEE 802.11a/n 5 GHz Band; Frequency: 5300 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5300$ MHz; $\sigma = 5.578$ mho/m; $\epsilon_r = 48.973$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section


Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(4.17, 4.17, 4.17); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 5/2/2011
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118
- Measurement SW: DASY52, Version 52.8 (0); SEMCAD X Version 14.6.4 (4989)

Bottom Face/802.11a_Ant A_ch 60/Area Scan (181x241x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 0.102 mW/g

Bottom Face/802.11a_Ant A_ch 60/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
 Reference Value = 2.950 V/m; Power Drift = -0.04 dB
 Peak SAR (extrapolated) = 0.1480
SAR(1 g) = 0.033 mW/g; SAR(10 g) = 0.013 mW/g
 Maximum value of SAR (measured) = 0.060 mW/g

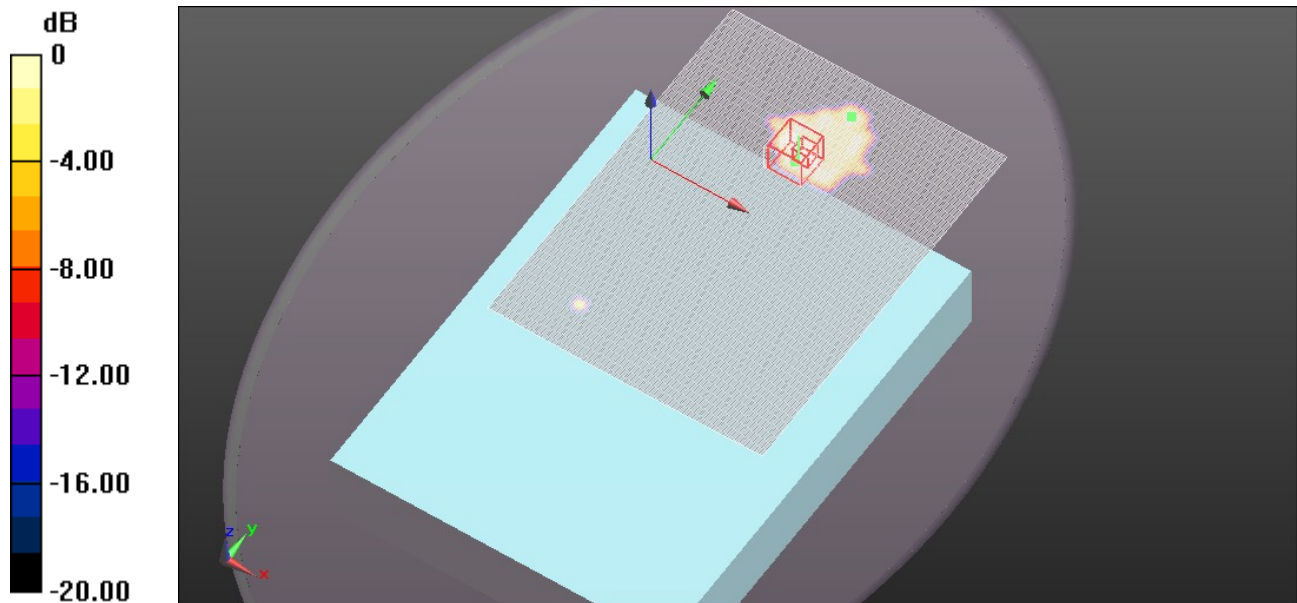

0 dB = 0.060mW/g = -24.44 dB mW/g

Test Laboratory: UL CCS SAR Lab B

5GHz

Communication System: IEEE 802.11a/n 5 GHz Band; Frequency: 5300 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5300$ MHz; $\sigma = 5.578$ mho/m; $\epsilon_r = 48.973$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(4.17, 4.17, 4.17); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 5/2/2011
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118
- Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

Bottom Face/802.11a_Ant B_ch60/Area Scan (181x261x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.054 mW/g


Bottom Face/802.11a_Ant B_ch60/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 3.369 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.1710

SAR(1 g) = 0.036 mW/g; SAR(10 g) = 0.014 mW/g

Maximum value of SAR (measured) = 0.067 mW/g

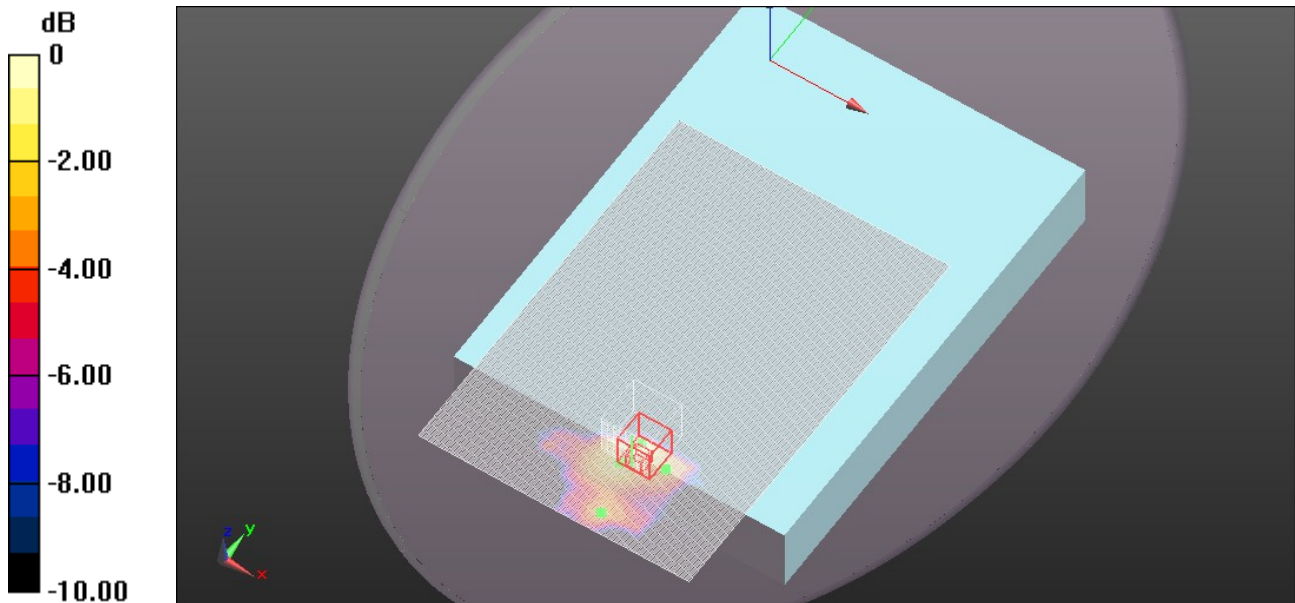

0 dB = 0.070mW/g = -23.10 dB mW/g

Test Laboratory: UL CCS SAR Lab B

5GHz

Communication System: IEEE 802.11a/n 5 GHz Band; Frequency: 5270 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5270$ MHz; $\sigma = 5.537$ mho/m; $\epsilon_r = 49.001$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(4.17, 4.17, 4.17); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 5/2/2011
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118
- Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

Bottom Face/802.11n_HT40_Ant A_ch 54/Area Scan (181x241x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.132 mW/g

Bottom Face/802.11n_HT40_Ant A_ch 54/Zoom Scan (7x7x9)/Cube 0: Measurement grid:


dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 3.287 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.1190

SAR(1 g) = 0.022 mW/g; SAR(10 g) = 0.0076 mW/g

Maximum value of SAR (measured) = 0.054 mW/g

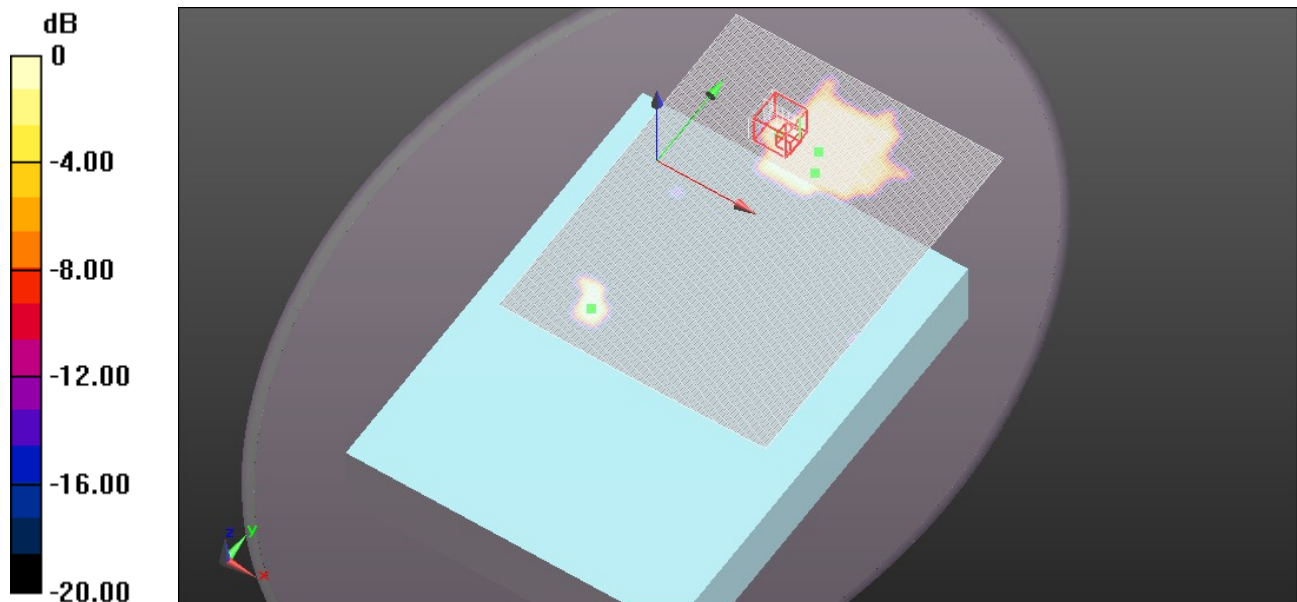

0 dB = 0.050mW/g = -26.02 dB mW/g

Test Laboratory: UL CCS SAR Lab B

5GHz

Communication System: IEEE 802.11a/n 5 GHz Band; Frequency: 5270 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5270$ MHz; $\sigma = 5.537$ mho/m; $\epsilon_r = 49.001$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(4.17, 4.17, 4.17); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 5/2/2011
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118
- Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

Bottom Face/802.11n_HT40_Ant B_ch54/Area Scan (181x261x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.078 mW/g

Bottom Face/802.11n_HT40_Ant B_ch54/Zoom Scan (7x7x9)/Cube 0: Measurement grid:


dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 3.591 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.1550

SAR(1 g) = 0.038 mW/g; SAR(10 g) = 0.015 mW/g

Maximum value of SAR (measured) = 0.065 mW/g

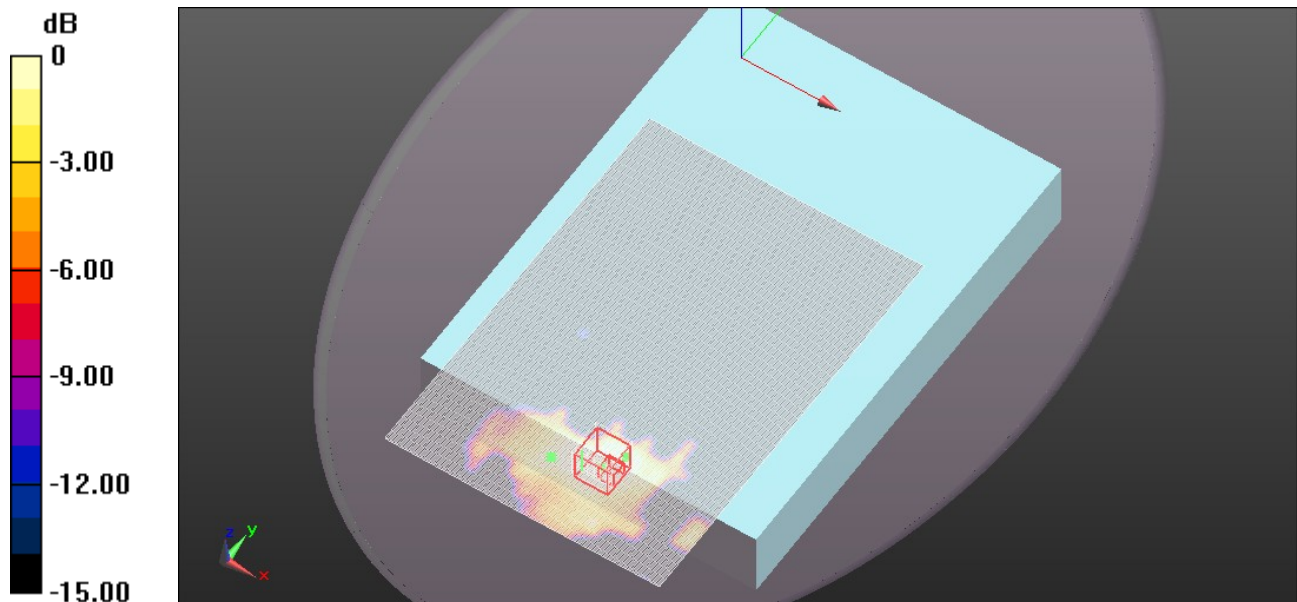

0 dB = 0.060mW/g = -24.44 dB mW/g

Test Laboratory: UL CCS SAR Lab B

5GHz

Communication System: IEEE 802.11a/n 5 GHz Band; Frequency: 5600 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5600$ MHz; $\sigma = 5.997$ mho/m; $\epsilon_r = 48.434$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(3.51, 3.51, 3.51); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 5/2/2011
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118
- Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

Bottom Face/802.11a_Ant A_ch 120/Area Scan (181x241x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.339 mW/g


Bottom Face/802.11a_Ant A_ch 120/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 5.587 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.3790

SAR(1 g) = 0.046 mW/g; SAR(10 g) = 0.016 mW/g

Maximum value of SAR (measured) = 0.085 mW/g

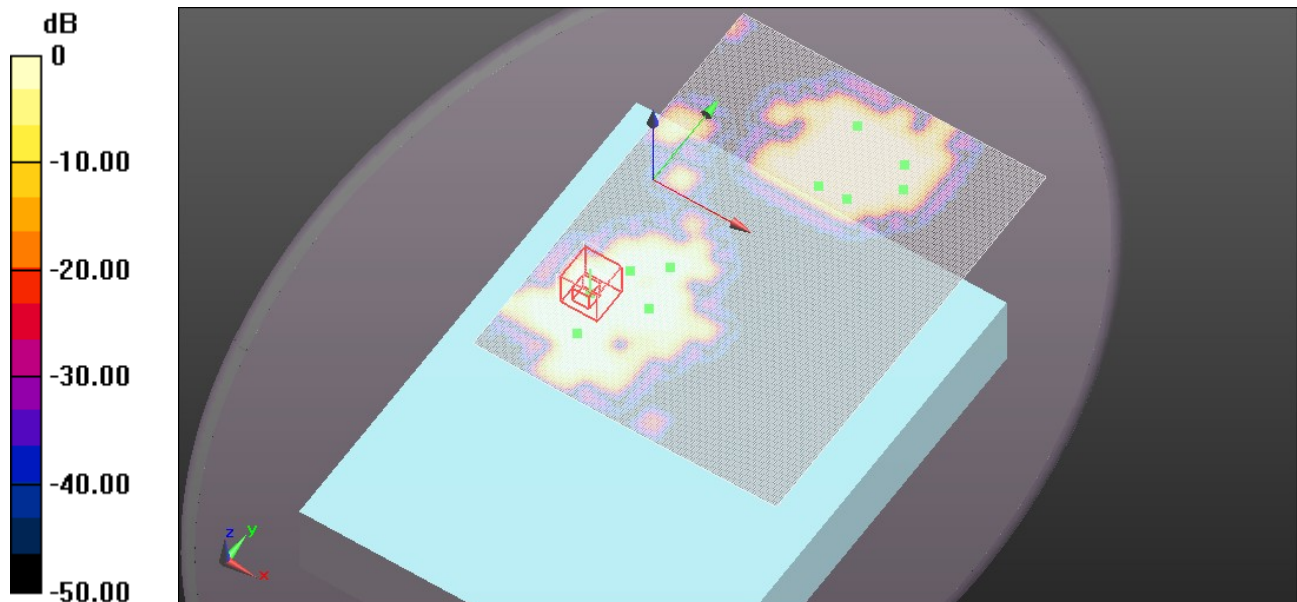

0 dB = 0.080mW/g = -21.94 dB mW/g

Test Laboratory: UL CCS SAR Lab B

5GHz

Communication System: IEEE 802.11a/n 5 GHz Band; Frequency: 5600 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5600$ MHz; $\sigma = 5.997$ mho/m; $\epsilon_r = 48.434$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(3.51, 3.51, 3.51); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 5/2/2011
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118
- Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

Bottom Face/802.11a_Ant B_ch 120/Area Scan (181x261x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.102 mW/g


Bottom Face/802.11a_Ant B_ch 120/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 3.850 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.3270

SAR(1 g) = 0.058 mW/g; SAR(10 g) = 0.022 mW/g

Maximum value of SAR (measured) = 0.089 mW/g

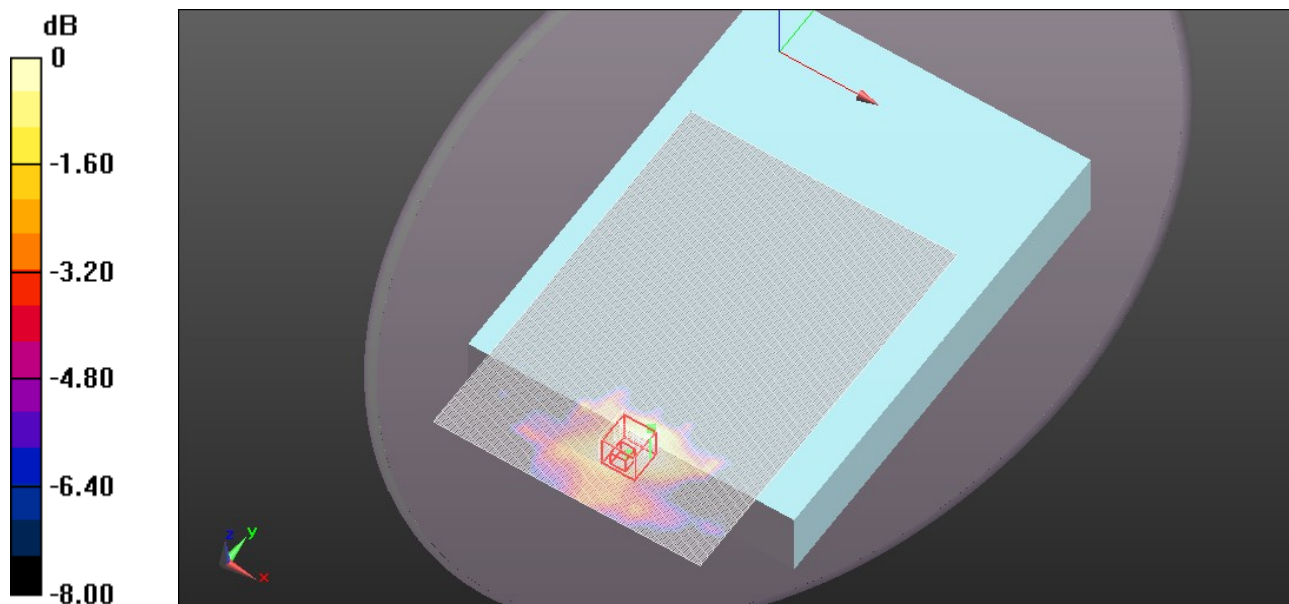

0 dB = 0.090mW/g = -20.92 dB mW/g

Test Laboratory: UL CCS SAR Lab B

5GHz

Communication System: IEEE 802.11a/n 5 GHz Band; Frequency: 5745 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 5745$ MHz; $\sigma = 6.177$ mho/m; $\epsilon_r = 48.178$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(3.67, 3.67, 3.67); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 5/2/2011
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118
- Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

Bottom Face/802.11a_Ant A_ch 149/Area Scan (181x241x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.091 mW/g


Bottom Face/802.11a_Ant A_ch 149/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 2.869 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.1770

SAR(1 g) = 0.028 mW/g; SAR(10 g) = 0.012 mW/g

Maximum value of SAR (measured) = 0.057 mW/g

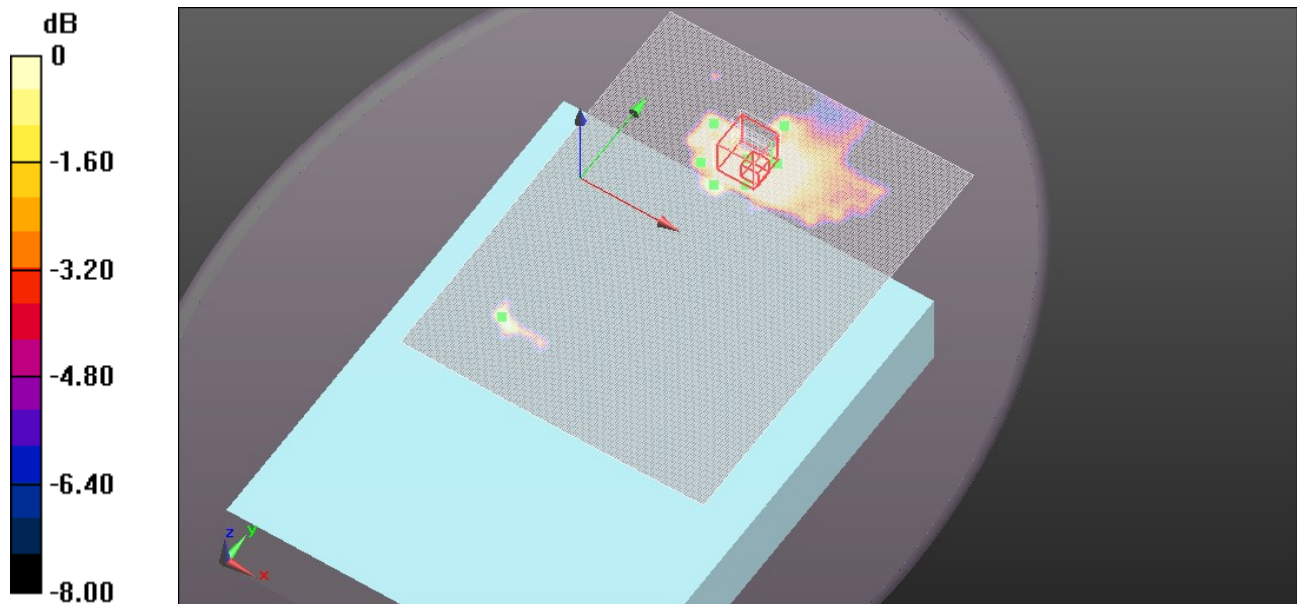

0 dB = 0.060mW/g = -24.44 dB mW/g

Test Laboratory: UL CCS SAR Lab B

5GHz

Communication System: IEEE 802.11a/n 5 GHz Band; Frequency: 5785 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 5785$ MHz; $\sigma = 6.24$ mho/m; $\epsilon_r = 48.046$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(3.67, 3.67, 3.67); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 5/2/2011
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118
- Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

Bottom Face/802.11a_Ant B_ch 157/Area Scan (181x261x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.095 mW/g


Bottom Face/802.11a_Ant B_ch 157/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 3.047 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.4430

SAR(1 g) = 0.049 mW/g; SAR(10 g) = 0.019 mW/g

Maximum value of SAR (measured) = 0.060 mW/g

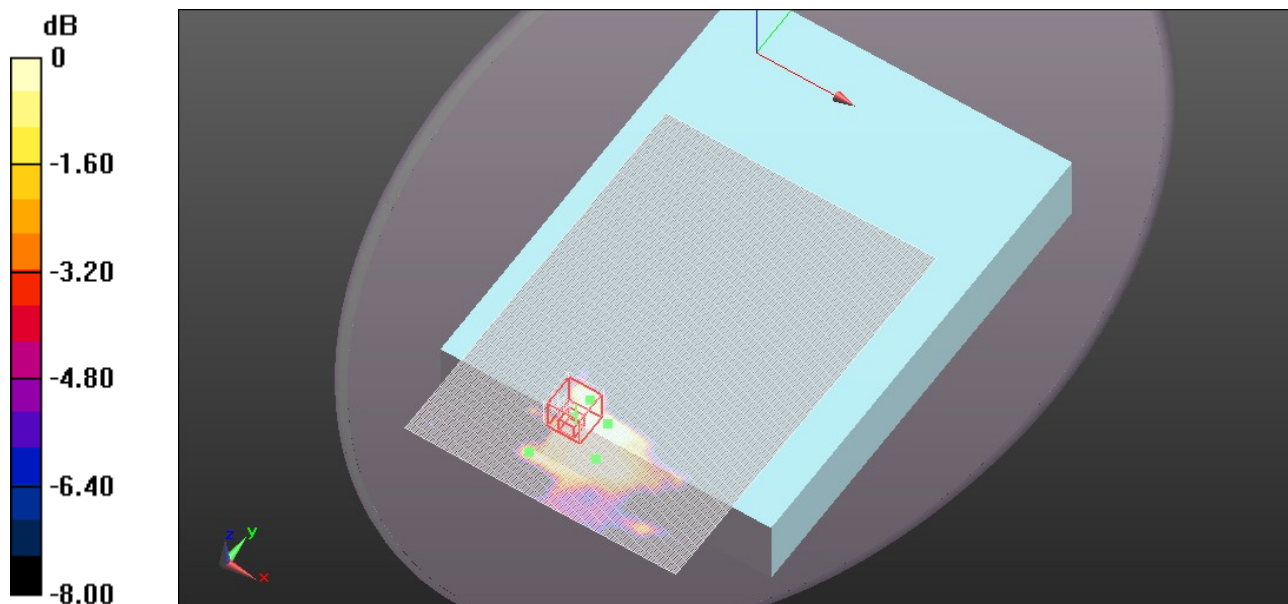

0 dB = 0.060mW/g = -24.44 dB mW/g

Test Laboratory: UL CCS SAR Lab B

5GHz

Communication System: IEEE 802.11a/n 5 GHz Band; Frequency: 5180 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5180$ MHz; $\sigma = 5.313$ mho/m; $\epsilon_r = 48.16$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(4.39, 4.39, 4.39); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 5/2/2011
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118
- Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

Primary Landscape/802.11a_Ant A_ch 36/Area Scan (221x221x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.036 mW/g

Primary Landscape/802.11a_Ant A_ch 36/Zoom Scan (7x7x9)/Cube 0: Measurement grid:


dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 2.114 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.1670

SAR(1 g) = 0.018 mW/g; SAR(10 g) = 0.00421 mW/g

Maximum value of SAR (measured) = 0.034 mW/g

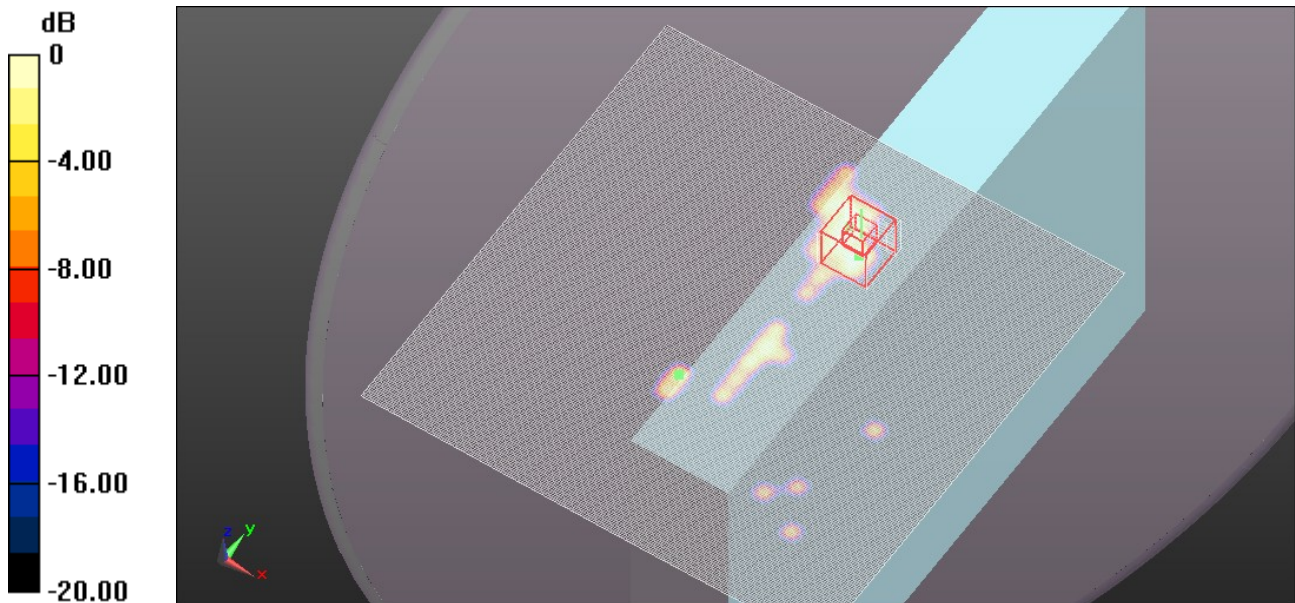

0 dB = 0.030mW/g = -30.46 dB mW/g

Test Laboratory: UL CCS SAR Lab B

5GHz

Communication System: IEEE 802.11a/n 5 GHz Band; Frequency: 5180 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5180$ MHz; $\sigma = 5.313$ mho/m; $\epsilon_r = 48.16$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section


Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(4.39, 4.39, 4.39); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 5/2/2011
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118
- Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

Primary Landscape/802.11a_Ant B_ch 36/Area Scan (221x221x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 0.124 mW/g

Primary Landscape/802.11a_Ant B_ch 36/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
 Reference Value = 4.296 V/m; Power Drift = -0.13 dB
 Peak SAR (extrapolated) = 0.1880
SAR(1 g) = 0.054 mW/g; SAR(10 g) = 0.017 mW/g
 Maximum value of SAR (measured) = 0.098 mW/g

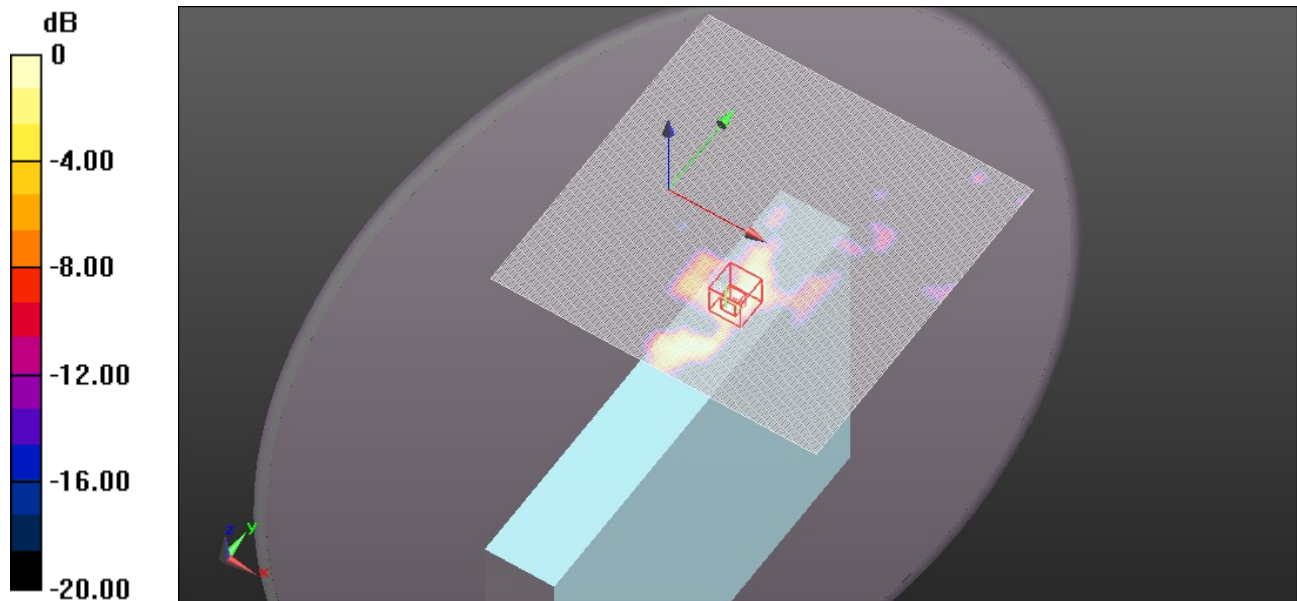

0 dB = 0.100mW/g = -20.00 dB mW/g

Test Laboratory: UL CCS SAR Lab B

5GHz

Communication System: IEEE 802.11a/n 5 GHz Band; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5300$ MHz; $\sigma = 5.473$ mho/m; $\epsilon_r = 48.065$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(4.17, 4.17, 4.17); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 5/2/2011
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118
- Measurement SW: DASY52, Version 52.8 (0); SEMCAD X Version 14.6.4 (4989)

Primary Landscape/802.11a_Ant A_ch 60/Area Scan (221x221x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.058 mW/g

Primary Landscape/802.11a_Ant A_ch 60/Zoom Scan (7x7x9)/Cube 0: Measurement grid:


dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 2.264 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.0980

SAR(1 g) = 0.013 mW/g; SAR(10 g) = 0.00402 mW/g

Maximum value of SAR (measured) = 0.031 mW/g

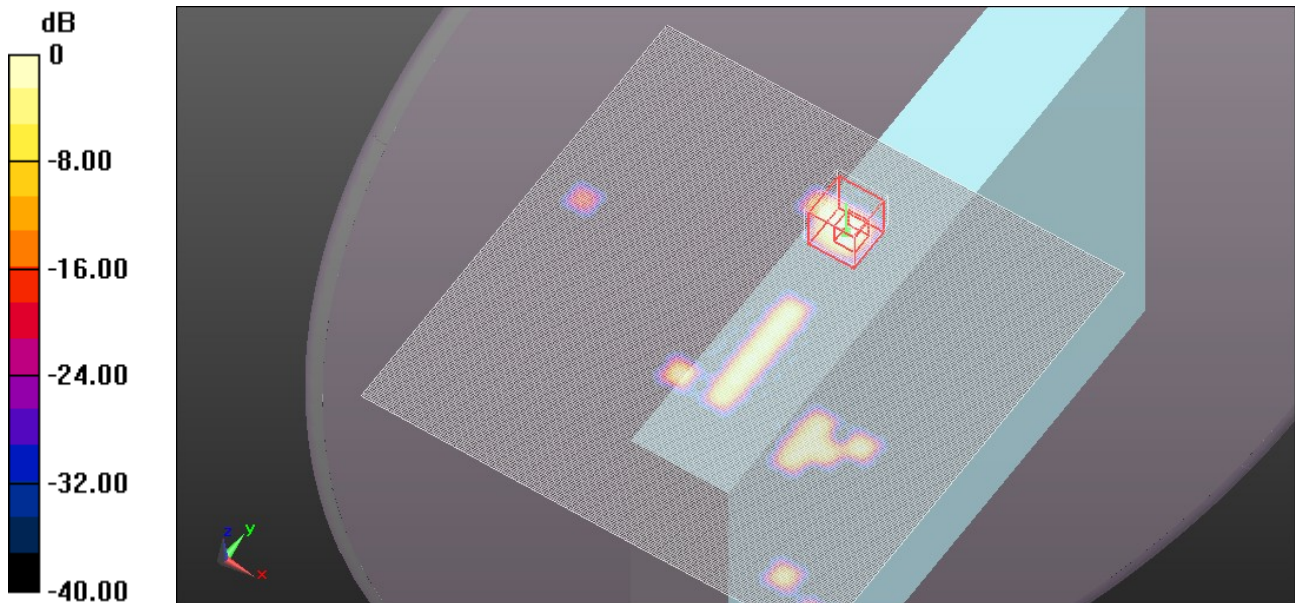

0 dB = 0.030mW/g = -30.46 dB mW/g

Test Laboratory: UL CCS SAR Lab B

5GHz

Communication System: IEEE 802.11a/n 5 GHz Band; Frequency: 5300 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5300$ MHz; $\sigma = 5.473$ mho/m; $\epsilon_r = 48.065$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section


Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(4.17, 4.17, 4.17); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 5/2/2011
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118
- Measurement SW: DASY52, Version 52.8 (0); SEMCAD X Version 14.6.4 (4989)

Primary Landscape/802.11a_Ant B_ch 60/Area Scan (221x221x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 0.128 mW/g

Primary Landscape/802.11a_Ant B_ch 60/Zoom Scan (7x7x9)/Cube 0: Measurement grid:
 dx=4mm, dy=4mm, dz=2.5mm
 Reference Value = 4.573 V/m; Power Drift = -0.12 dB
 Peak SAR (extrapolated) = 0.2230
SAR(1 g) = 0.058 mW/g; SAR(10 g) = 0.018 mW/g
 Maximum value of SAR (measured) = 0.107 mW/g

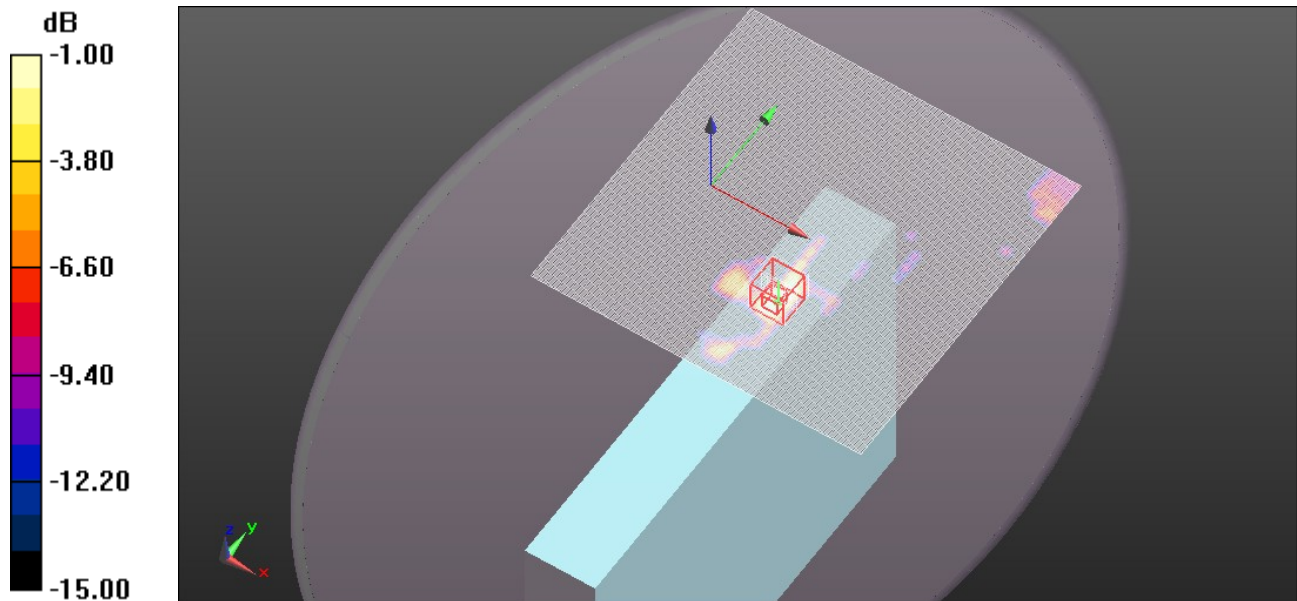

0 dB = 0.110mW/g = -19.17 dB mW/g

Test Laboratory: UL CCS SAR Lab B

5GHz

Communication System: IEEE 802.11a/n 5 GHz Band; Frequency: 5270 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5270$ MHz; $\sigma = 5.432$ mho/m; $\epsilon_r = 48.139$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(4.17, 4.17, 4.17); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 5/2/2011
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118
- Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

Primary Landscape/802.11n_HT40_Ant A_ch 54/Area Scan (221x221x1): Measurement grid:

dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.054 mW/g

Primary Landscape/802.11n_HT40_Ant A_ch 54/Zoom Scan (7x7x9)/Cube 0: Measurement


grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 2.470 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.1250

SAR(1 g) = 0.015 mW/g; SAR(10 g) = 0.00405 mW/g

Maximum value of SAR (measured) = 0.025 mW/g

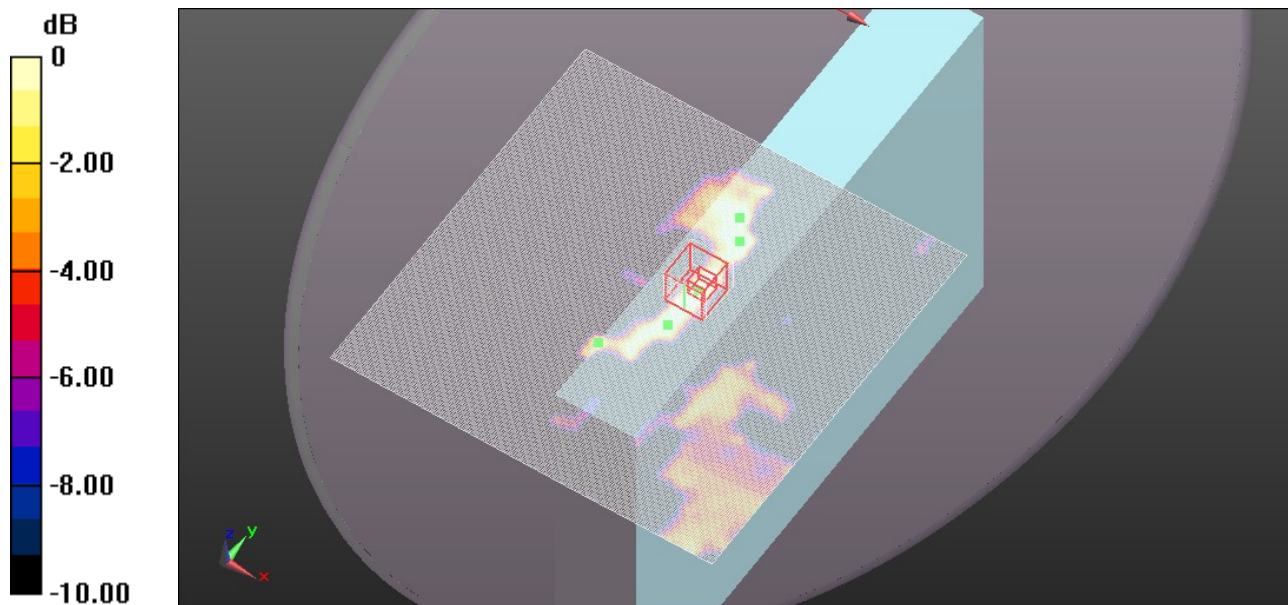

0 dB = 0.030mW/g = -30.46 dB mW/g

Test Laboratory: UL CCS SAR Lab B

5GHz

Communication System: IEEE 802.11a/n 5 GHz Band; Frequency: 5270 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5270$ MHz; $\sigma = 5.432$ mho/m; $\epsilon_r = 48.139$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(4.17, 4.17, 4.17); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 5/2/2011
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118
- Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

Primary Landscape/802.11n_HT40_Ant B_ch 54/Area Scan (221x221x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (interpolated) = 0.160 mW/g

Primary Landscape/802.11n_HT40_Ant B_ch 54/Zoom Scan (7x7x9)/Cube 0: Measurement


grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 4.721 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.2430

SAR(1 g) = 0.067 mW/g; SAR(10 g) = 0.021 mW/g

Maximum value of SAR (measured) = 0.118 mW/g

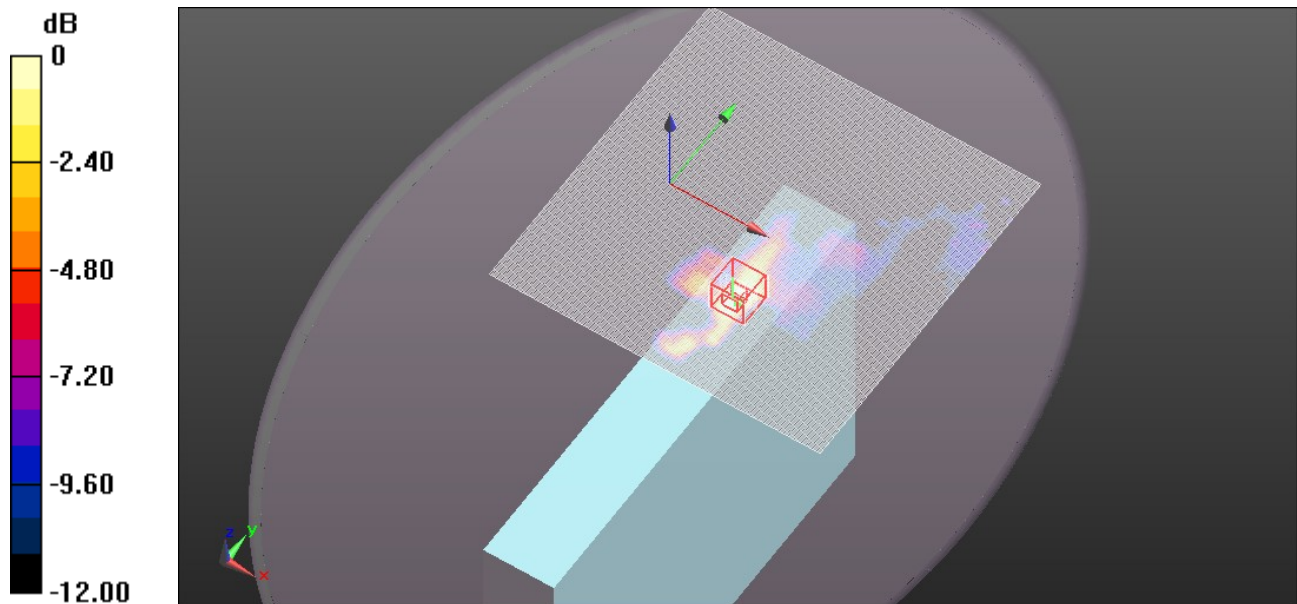

0 dB = 0.120mW/g = -18.42 dB mW/g

Test Laboratory: UL CCS SAR Lab B

5GHz

Communication System: IEEE 802.11a/n 5 GHz Band; Frequency: 5600 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5600$ MHz; $\sigma = 5.851$ mho/m; $\epsilon_r = 47.444$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(3.51, 3.51, 3.51); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 5/2/2011
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118
- Measurement SW: DASY52, Version 52.8 (0); SEMCAD X Version 14.6.4 (4989)

Primary Landscape/802.11a_Ant A_ch 120/Area Scan (221x221x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (interpolated) = 0.039 mW/g

Primary Landscape/802.11a_Ant A_ch 120/Zoom Scan (7x7x9)/Cube 0: Measurement grid:


$dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 2.118 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.1370

SAR(1 g) = 0.014 mW/g; SAR(10 g) = 0.00464 mW/g

Maximum value of SAR (measured) = 0.028 mW/g

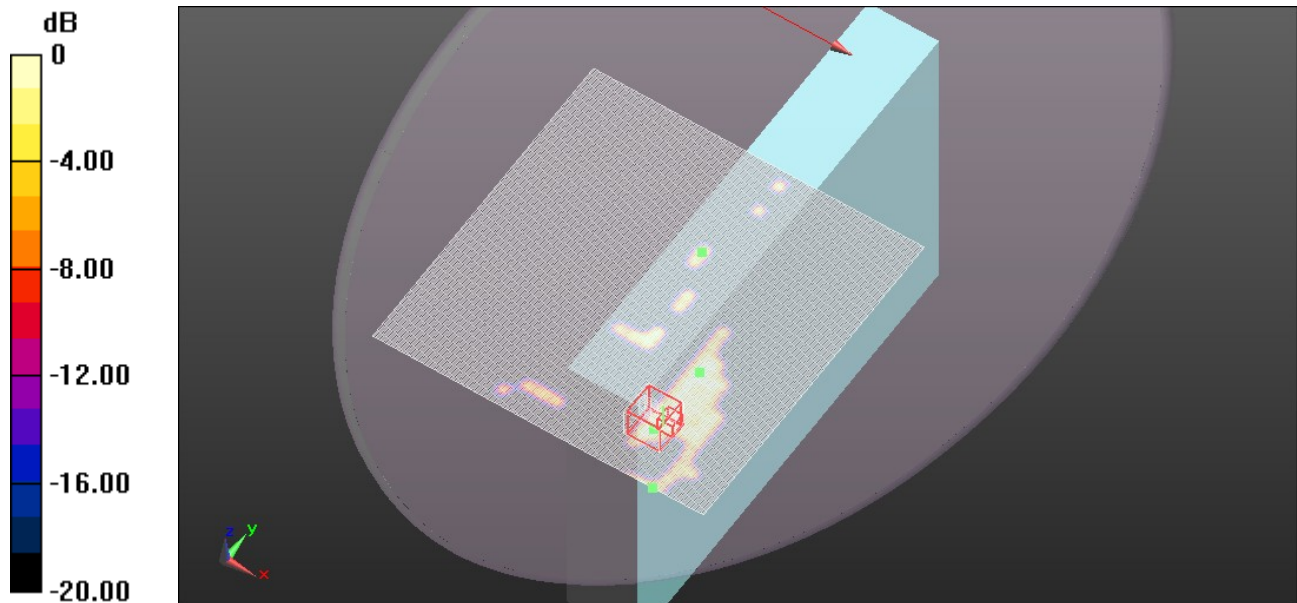

0 dB = 0.030mW/g = -30.46 dB mW/g

Test Laboratory: UL CCS SAR Lab B

5GHz

Communication System: IEEE 802.11a/n 5 GHz Band; Frequency: 5600 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5600$ MHz; $\sigma = 5.851$ mho/m; $\epsilon_r = 47.444$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(3.51, 3.51, 3.51); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 5/2/2011
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118
- Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

Primary Landscape/802.11a_Ant B_ch 120/Area Scan (221x221x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (interpolated) = 0.111 mW/g

Primary Landscape/802.11a_Ant B_ch 120/Zoom Scan (7x7x9)/Cube 0: Measurement grid:


$dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 3.292 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.1990

SAR(1 g) = 0.028 mW/g; SAR(10 g) = 0.00815 mW/g

Maximum value of SAR (measured) = 0.060 mW/g

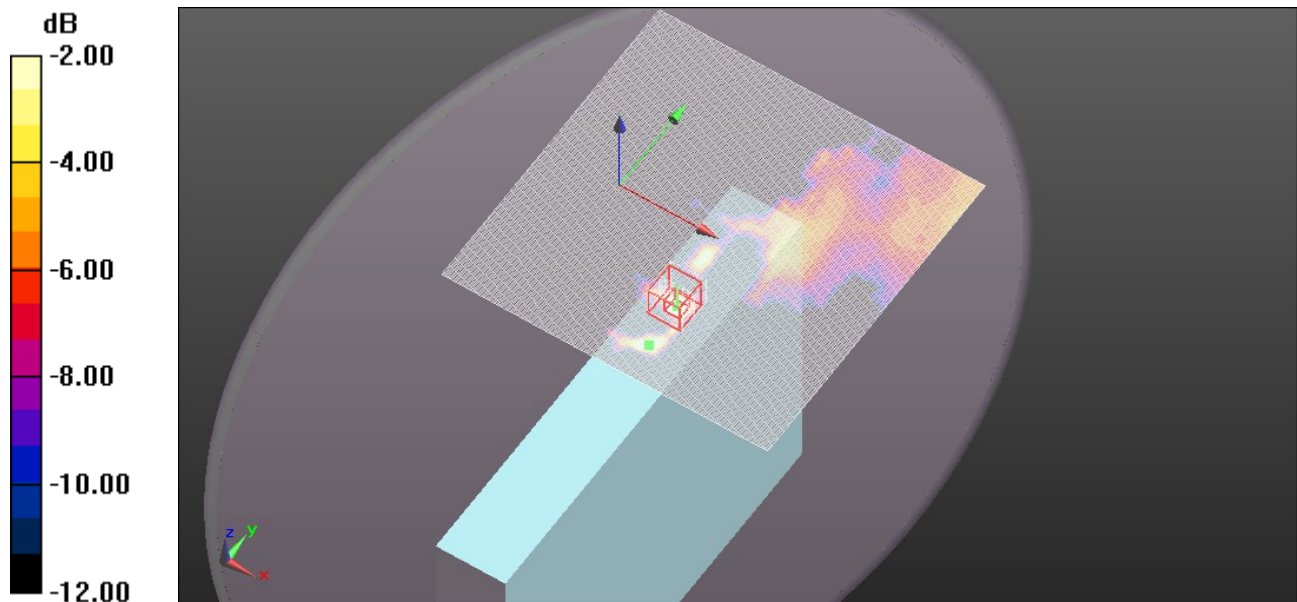

0 dB = 0.110mW/g = -19.17 dB mW/g

Test Laboratory: UL CCS SAR Lab B

5GHz

Communication System: IEEE 802.11a/n 5 GHz Band; Frequency: 5745 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5745$ MHz; $\sigma = 6.044$ mho/m; $\epsilon_r = 47.303$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(3.67, 3.67, 3.67); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 5/2/2011
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118
- Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

Primary Landscape/802.11a_Ant A_ch 149/Area Scan (221x221x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (interpolated) = 0.092 mW/g

Primary Landscape/802.11a_Ant A_ch 149/Zoom Scan (7x7x9)/Cube 0: Measurement grid:


$dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 2.910 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.1270

SAR(1 g) = 0.026 mW/g; SAR(10 g) = 0.0082 mW/g

Maximum value of SAR (measured) = 0.053 mW/g

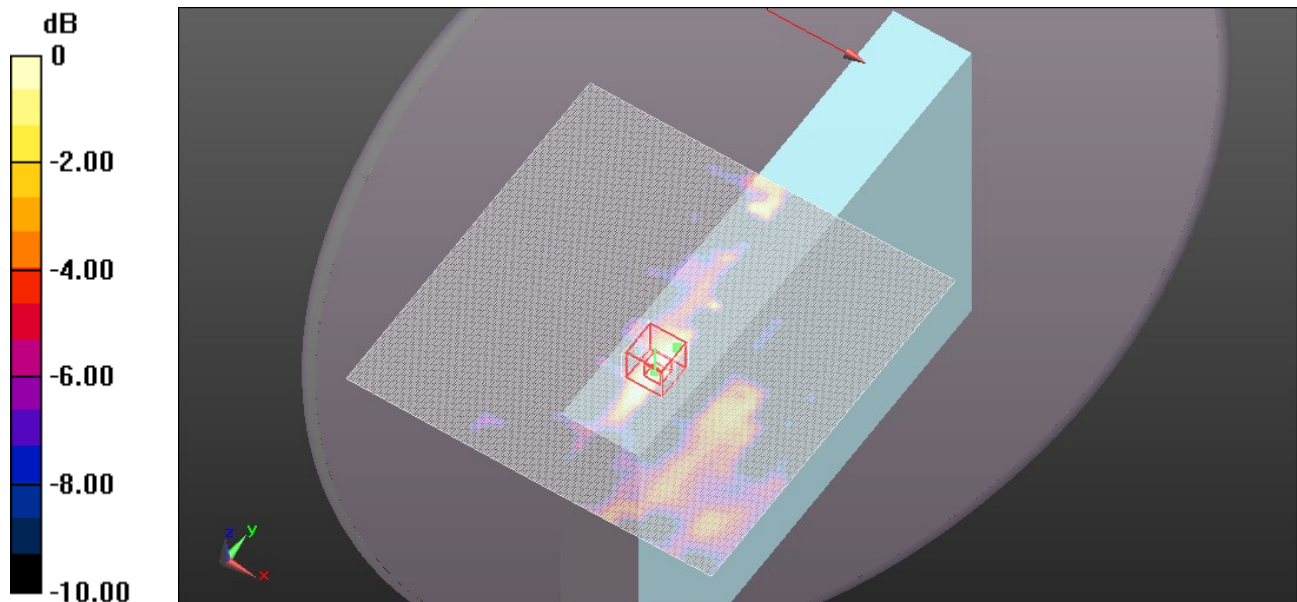

0 dB = 0.050mW/g = -26.02 dB mW/g

Test Laboratory: UL CCS SAR Lab B

5GHz

Communication System: IEEE 802.11a/n 5 GHz Band; Frequency: 5785 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5785$ MHz; $\sigma = 6.077$ mho/m; $\epsilon_r = 47.249$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(3.67, 3.67, 3.67); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 5/2/2011
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118
- Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

Primary Landscape/802.11a_Ant B_ch 157/Area Scan (221x221x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (interpolated) = 0.206 mW/g

Primary Landscape/802.11a_Ant B_ch 157/Zoom Scan (7x7x9)/Cube 0: Measurement grid:


$dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 4.182 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.2560

SAR(1 g) = 0.064 mW/g; SAR(10 g) = 0.020 mW/g

Maximum value of SAR (measured) = 0.119 mW/g

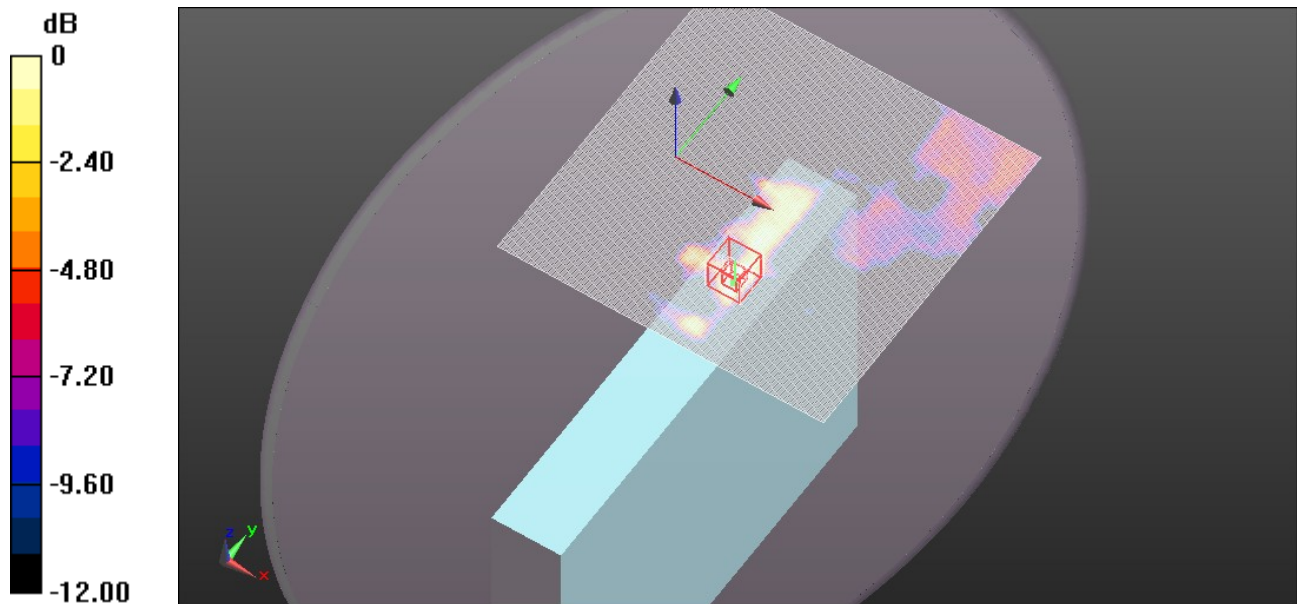

0 dB = 0.120mW/g = -18.42 dB mW/g

Test Laboratory: UL CCS SAR Lab B

5GHz

Communication System: IEEE 802.11a/n 5 GHz Band; Frequency: 5180 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5180$ MHz; $\sigma = 5.319$ mho/m; $\epsilon_r = 47.111$; $\rho = 1000$ kg/m³
Phantom section: Flat Section


Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(4.39, 4.39, 4.39); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 5/2/2011
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118
- Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

Primary Portrait/802.11a_Ant B_ch 36/Area Scan (121x221x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.848 mW/g

Primary Portrait/802.11a_Ant B_ch 36/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
Reference Value = 12.771 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 1.8990
SAR(1 g) = 0.565 mW/g; SAR(10 g) = 0.226 mW/g
Maximum value of SAR (measured) = 0.889 mW/g

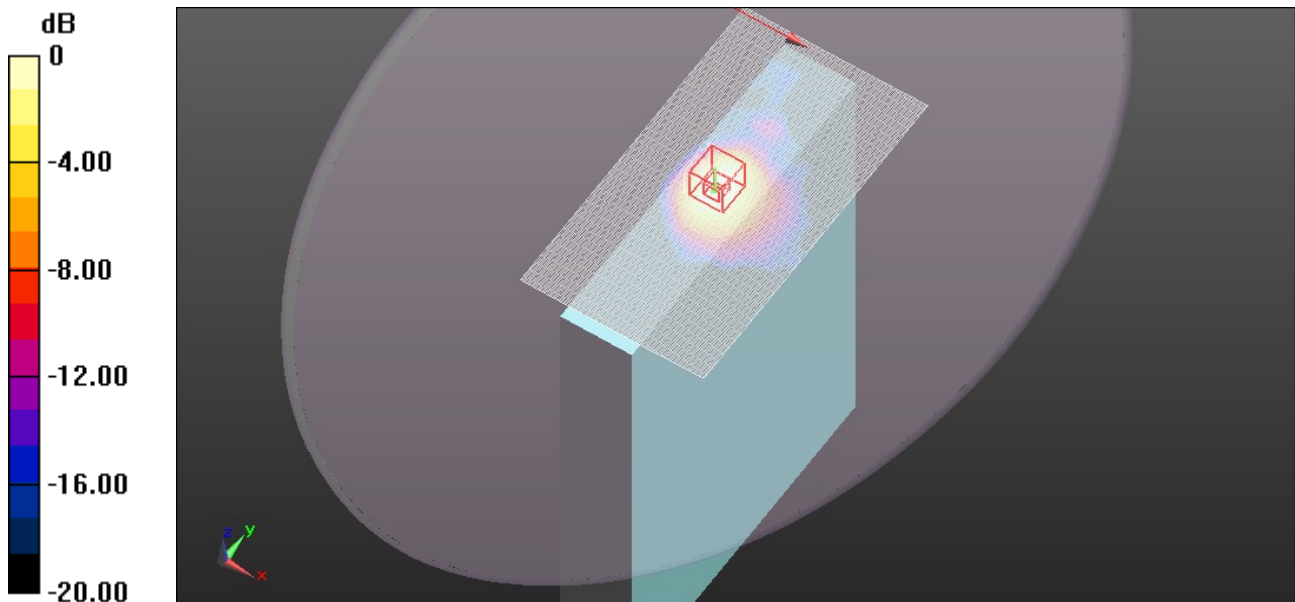

0 dB = 0.890mW/g = -1.01 dB mW/g


Test Laboratory: UL CCS SAR Lab B

5GHz

Communication System: IEEE 802.11a/n 5 GHz Band; Frequency: 5180 MHz; Duty Cycle: 1:1

Primary Portrait/802.11a_Ant B_ch 36/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 0.796 mW/g

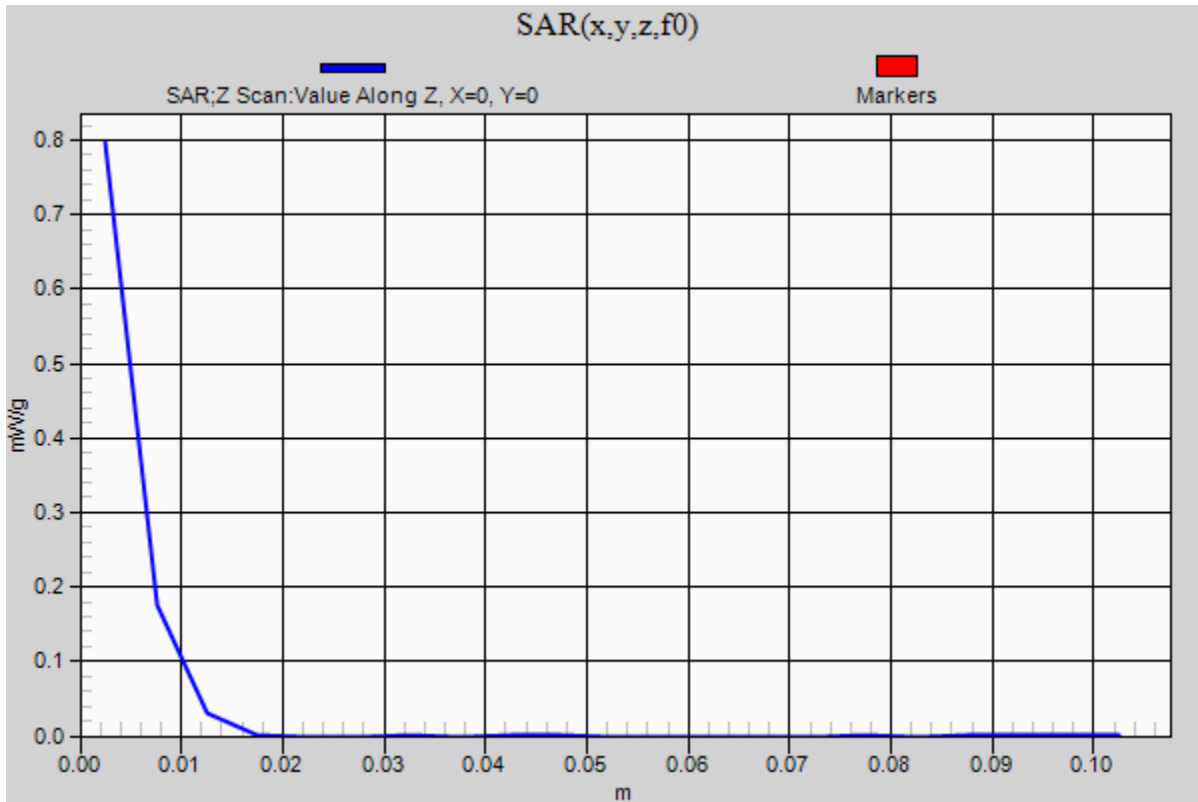

Test Laboratory: UL CCS SAR Lab B

5GHz

Communication System: IEEE 802.11a/n 5 GHz Band; Frequency: 5300 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5300$ MHz; $\sigma = 5.492$ mho/m; $\epsilon_r = 46.897$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(4.17, 4.17, 4.17); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 5/2/2011
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118
- Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

Primary Portrait/802.11a_Ant B_ch 60/Area Scan (121x221x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.105 mW/g


Primary Portrait/802.11a_Ant B_ch 60/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 14.456 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 2.3390

SAR(1 g) = 0.718 mW/g; SAR(10 g) = 0.286 mW/g

Maximum value of SAR (measured) = 1.142 mW/g

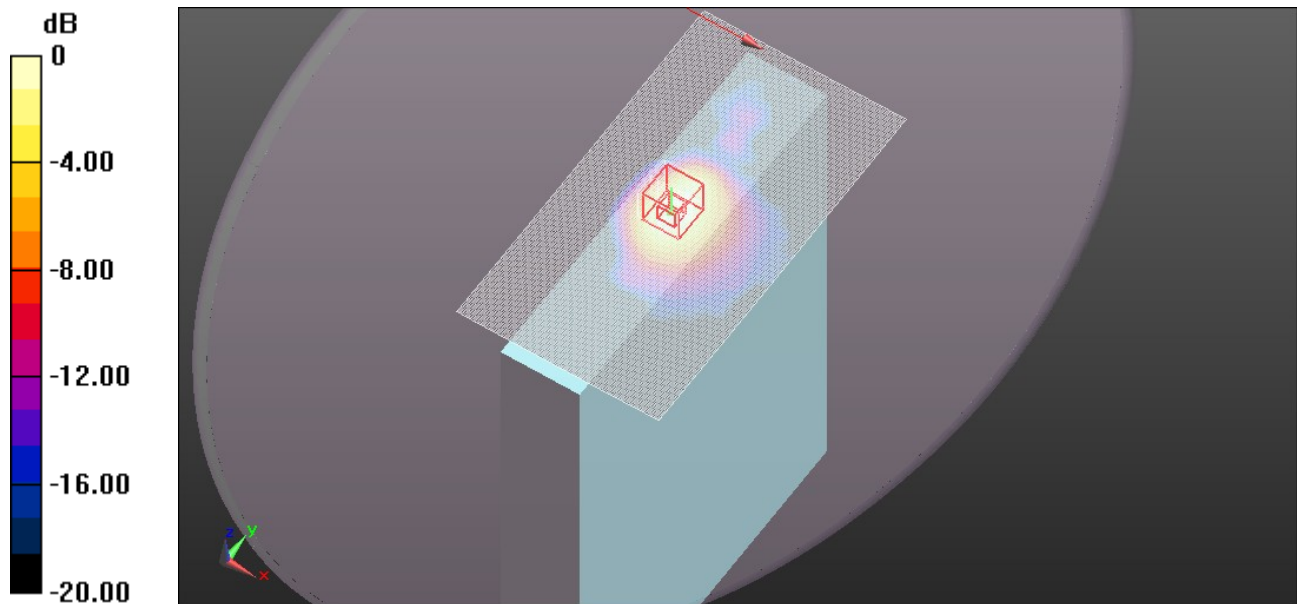

0 dB = 1.140mW/g = 1.14 dB mW/g


Test Laboratory: UL CCS SAR Lab B

5GHz

Communication System: IEEE 802.11a/n 5 GHz Band; Frequency: 5300 MHz; Duty Cycle: 1:1

Primary Portrait/802.11a_Ant B_ch 60/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 1.034 mW/g

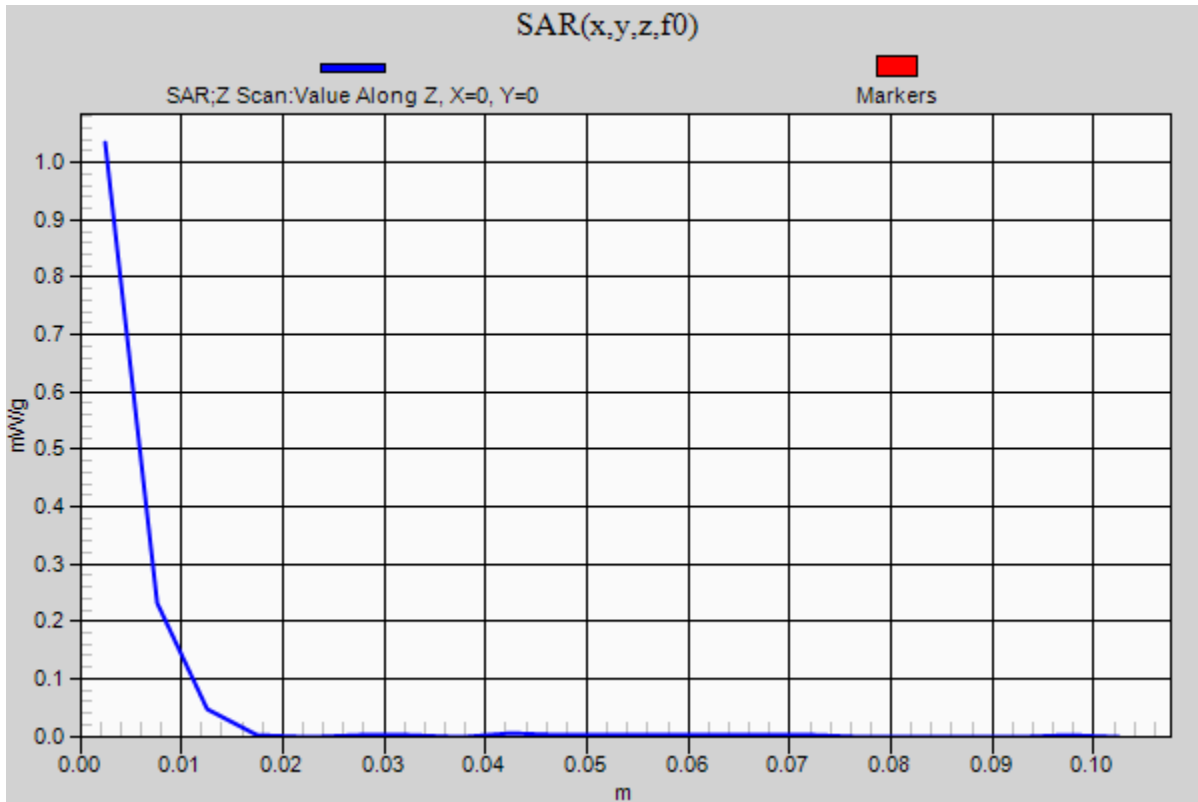

Test Laboratory: UL CCS SAR Lab B

5GHz

Communication System: IEEE 802.11a/n 5 GHz Band; Frequency: 5270 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5270$ MHz; $\sigma = 5.446$ mho/m; $\epsilon_r = 46.946$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(4.17, 4.17, 4.17); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 5/2/2011
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118
- Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

Primary Portrait/802.11n_HT40_Ant B_ch 54/Area Scan (121x221x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (interpolated) = 0.984 mW/g

Primary Portrait/802.11n_HT40_Ant B_ch 54/Zoom Scan (7x7x9)/Cube 0: Measurement grid:


$dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 13.710 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 2.0730

SAR(1 g) = 0.640 mW/g; SAR(10 g) = 0.256 mW/g

Maximum value of SAR (measured) = 1.009 mW/g

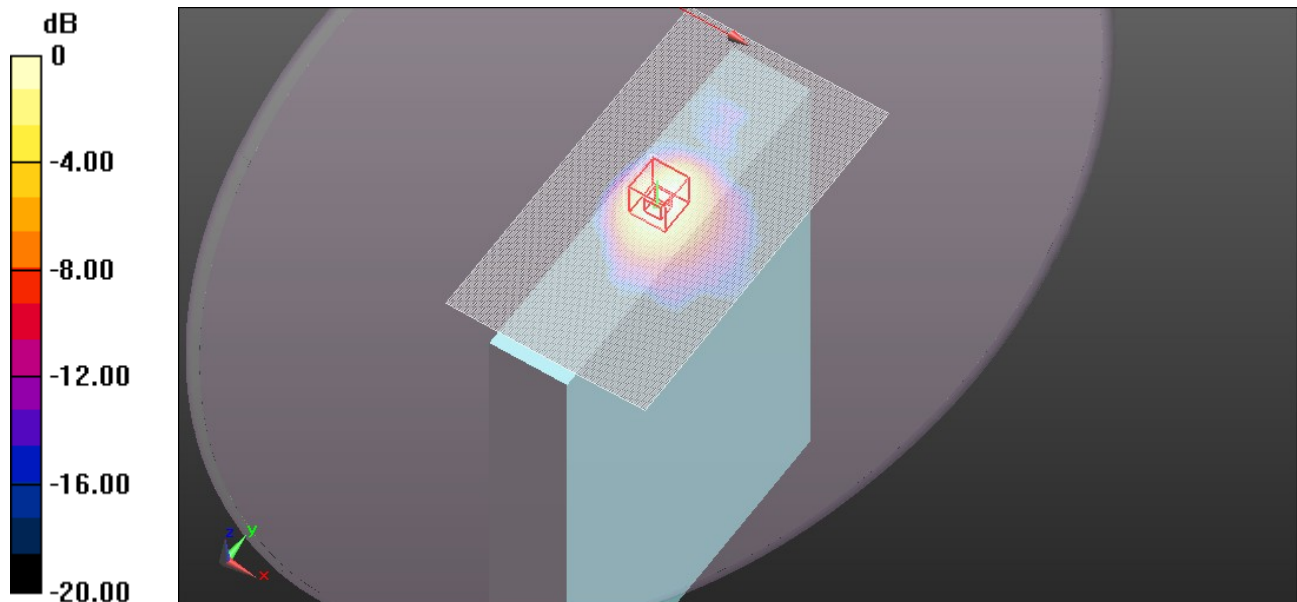

0 dB = 1.010mW/g = 0.09 dB mW/g

5GHz

Frequency: 5520 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C
 Medium parameters used: $f = 5520$ MHz; $\sigma = 5.537$ mho/m; $\epsilon_r = 47.645$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE3 Sn500; Calibrated: 7/14/2011
- Probe: EX3DV4 - SN3773; ConvF(3.49, 3.49, 3.49); Calibrated: 5/3/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (A); Type: QDOVA001BB; Serial: 1119

Primary Portrait/802.11a_Ant B_ch 104/Area Scan (13x23x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.113 mW/g

Primary Portrait/802.11a_Ant B_ch 104/Zoom Scan (7x7x9)/Cube 0: Measurement grid:


dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 15.303 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 2.1950

SAR(1 g) = 0.705 mW/g; SAR(10 g) = 0.277 mW/g

Maximum value of SAR (measured) = 1.139 mW/g

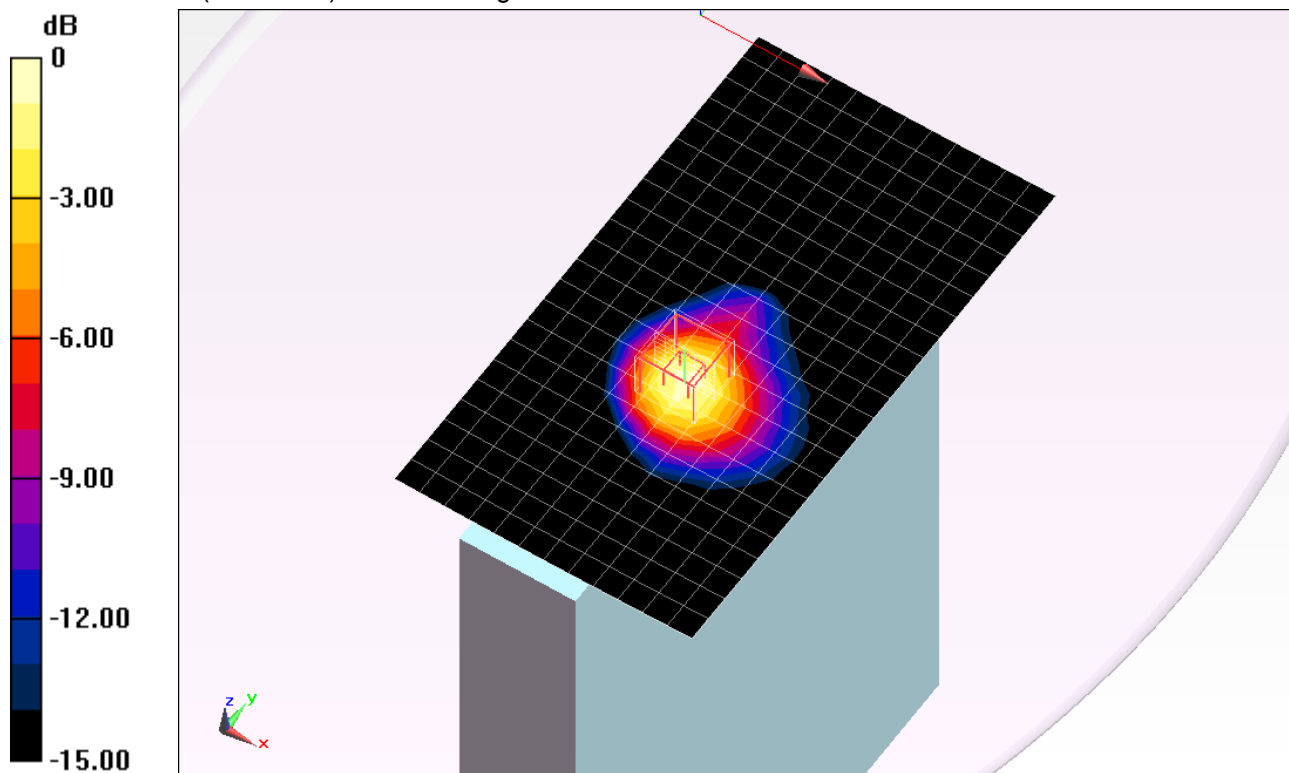

0 dB = 1.140mW/g = 1.14 dB mW/g

Test Laboratory: UL CCS SAR Lab B

5GHz

Communication System: IEEE 802.11a/n 5 GHz Band; Frequency: 5600 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5600$ MHz; $\sigma = 5.738$ mho/m; $\epsilon_r = 46.931$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(3.51, 3.51, 3.51); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 5/2/2011
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118
- Measurement SW: DASY52, Version 52.8 (0); SEMCAD X Version 14.6.4 (4989)

Primary Portrait/802.11a_Ant B_ch 120/Area Scan (121x241x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.580 mW/g

Primary Portrait/802.11a_Ant B_ch 120/Zoom Scan (7x7x9)/Cube 0: Measurement grid:


dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 15.900 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 2.8210

SAR(1 g) = 0.857 mW/g; SAR(10 g) = 0.347 mW/g

Maximum value of SAR (measured) = 1.373 mW/g

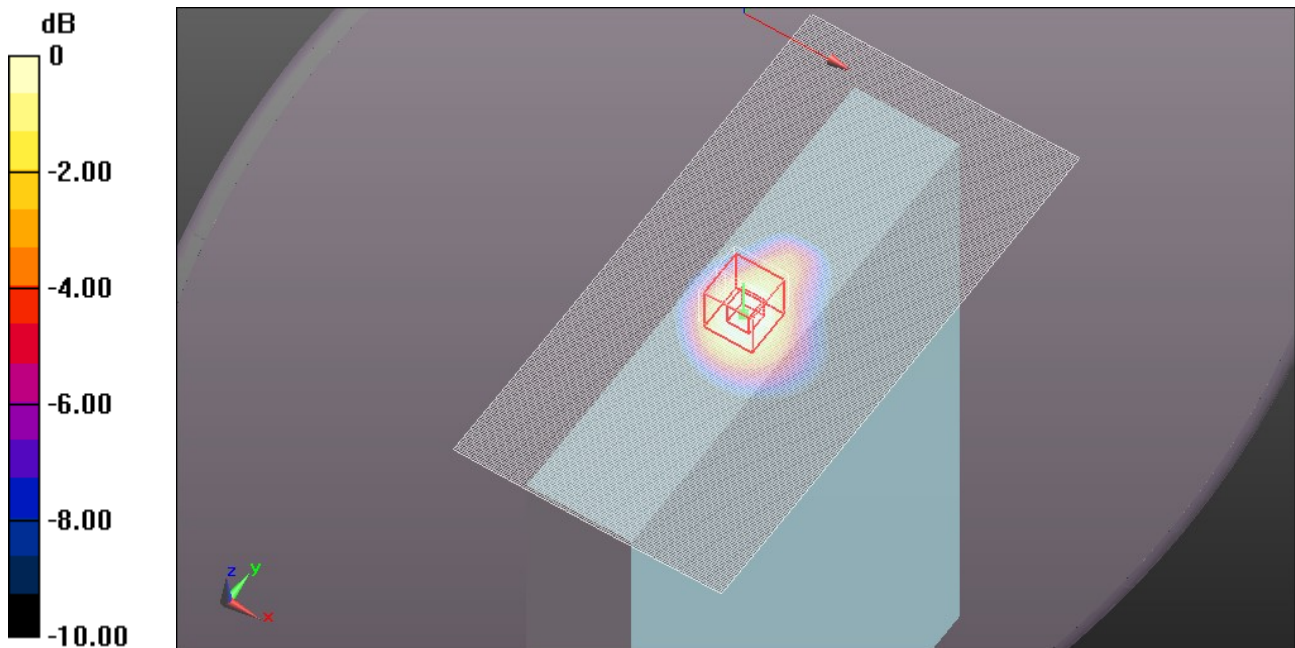

0 dB = 1.370mW/g = 2.73 dB mW/g


Test Laboratory: UL CCS SAR Lab B

5GHz

Communication System: IEEE 802.11a/n 5 GHz Band; Frequency: 5600 MHz; Duty Cycle: 1:1

Primary Portrait/802.11a_Ant B_ch 120/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 1.278 mW/g

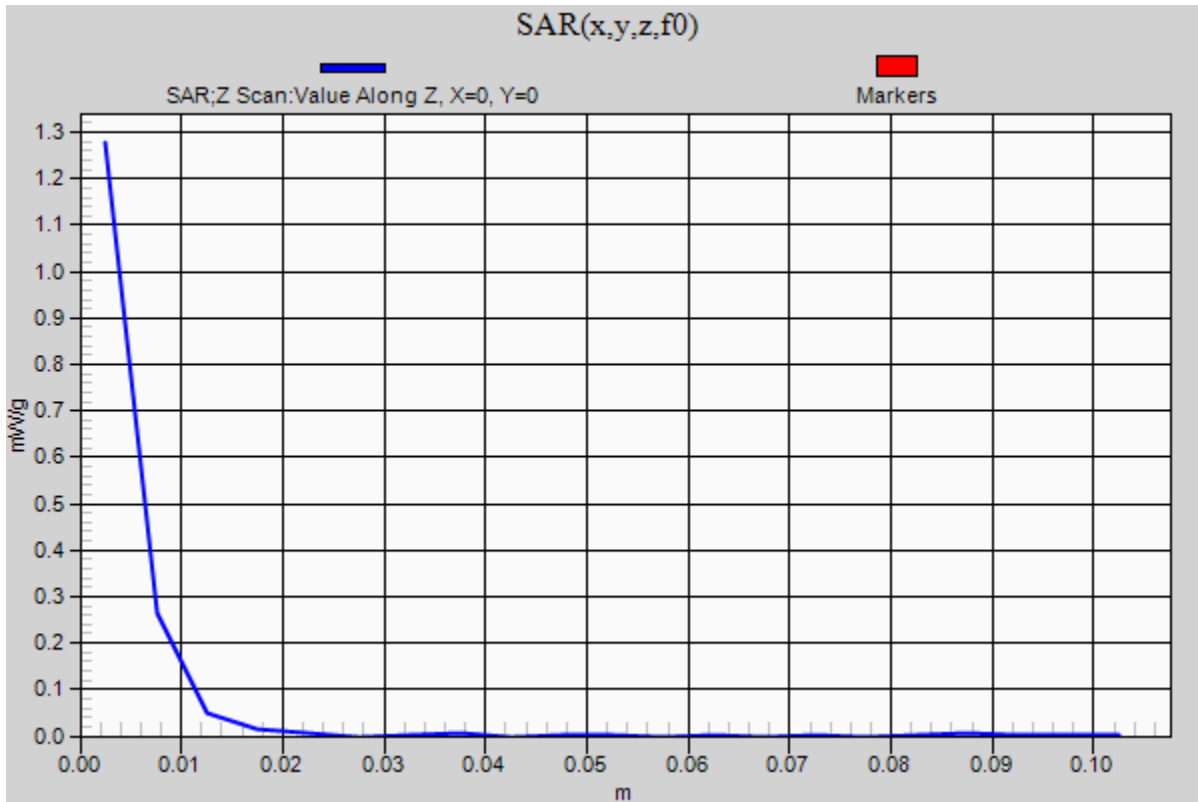

5GHz

Frequency: 5620 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5620 \text{ MHz}$; $\sigma = 5.659 \text{ mho/m}$; $\epsilon_r = 47.476$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Electronics: DAE3 Sn500; Calibrated: 7/14/2011

- Probe: EX3DV4 - SN3773; ConvF(3.26, 3.26, 3.26); Calibrated: 5/3/2011

- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)

- Phantom: ELI v5.0 (A); Type: QDOVA001BB; Serial: 1119

Primary Portrait/802.11a_Ant B_ch 124/Area Scan (13x23x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 1.160 mW/g

Primary Portrait/802.11a_Ant B_ch 124/Zoom Scan (7x7x9)/Cube 0: Measurement grid:


$dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2.5\text{mm}$

Reference Value = 15.740 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 2.3380

SAR(1 g) = 0.763 mW/g; SAR(10 g) = 0.302 mW/g

Maximum value of SAR (measured) = 1.227 mW/g

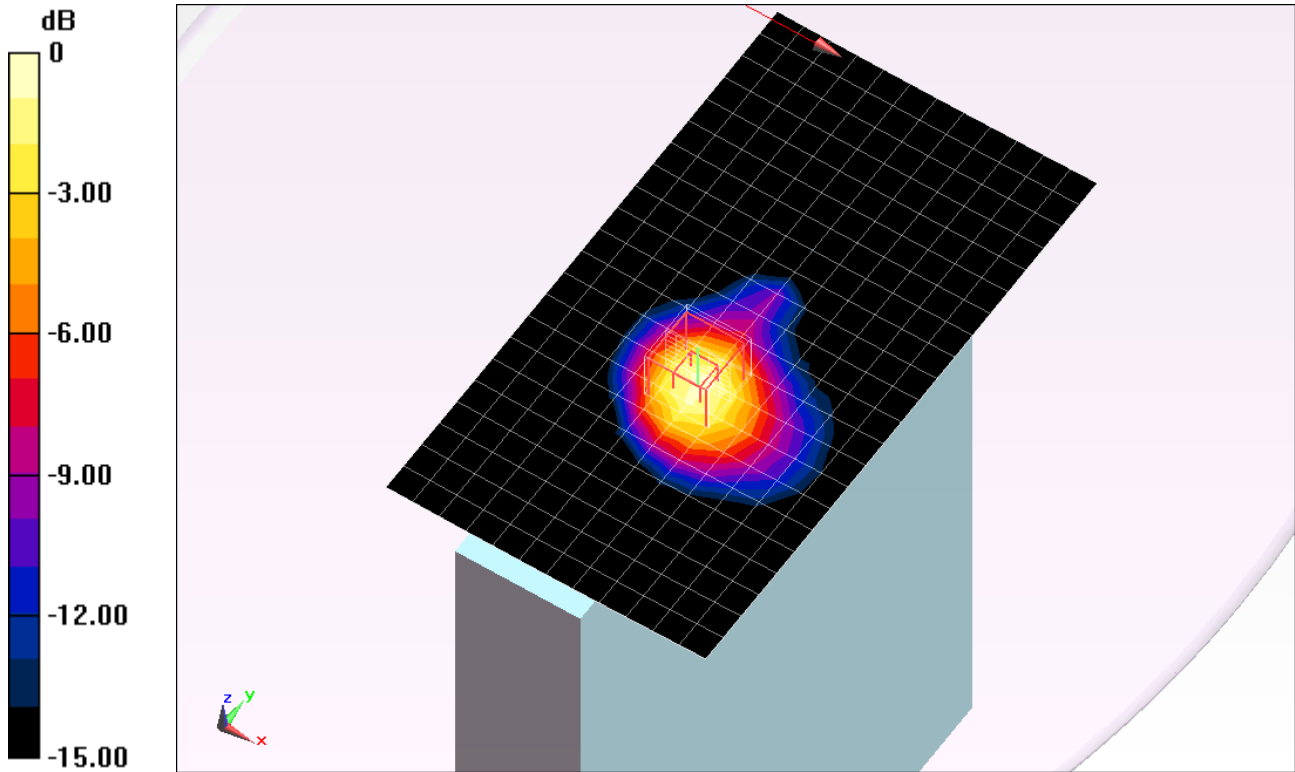

0 dB = 1.230mW/g = 1.80 dB mW/g

5GHz

Frequency: 5680 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C
 Medium parameters used: $f = 5680$ MHz; $\sigma = 5.735$ mho/m; $\epsilon_r = 47.338$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE3 Sn500; Calibrated: 7/14/2011
- Probe: EX3DV4 - SN3773; ConvF(3.26, 3.26, 3.26); Calibrated: 5/3/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (A); Type: QDOVA001BB; Serial: 1119

Primary Portrait/802.11a_Ant B_ch 136/Area Scan (13x23x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (measured) = 1.203 mW/g


Primary Portrait/802.11a_Ant B_ch 136/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 15.981 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 2.4590

SAR(1 g) = 0.804 mW/g; SAR(10 g) = 0.316 mW/g

Maximum value of SAR (measured) = 1.301 mW/g

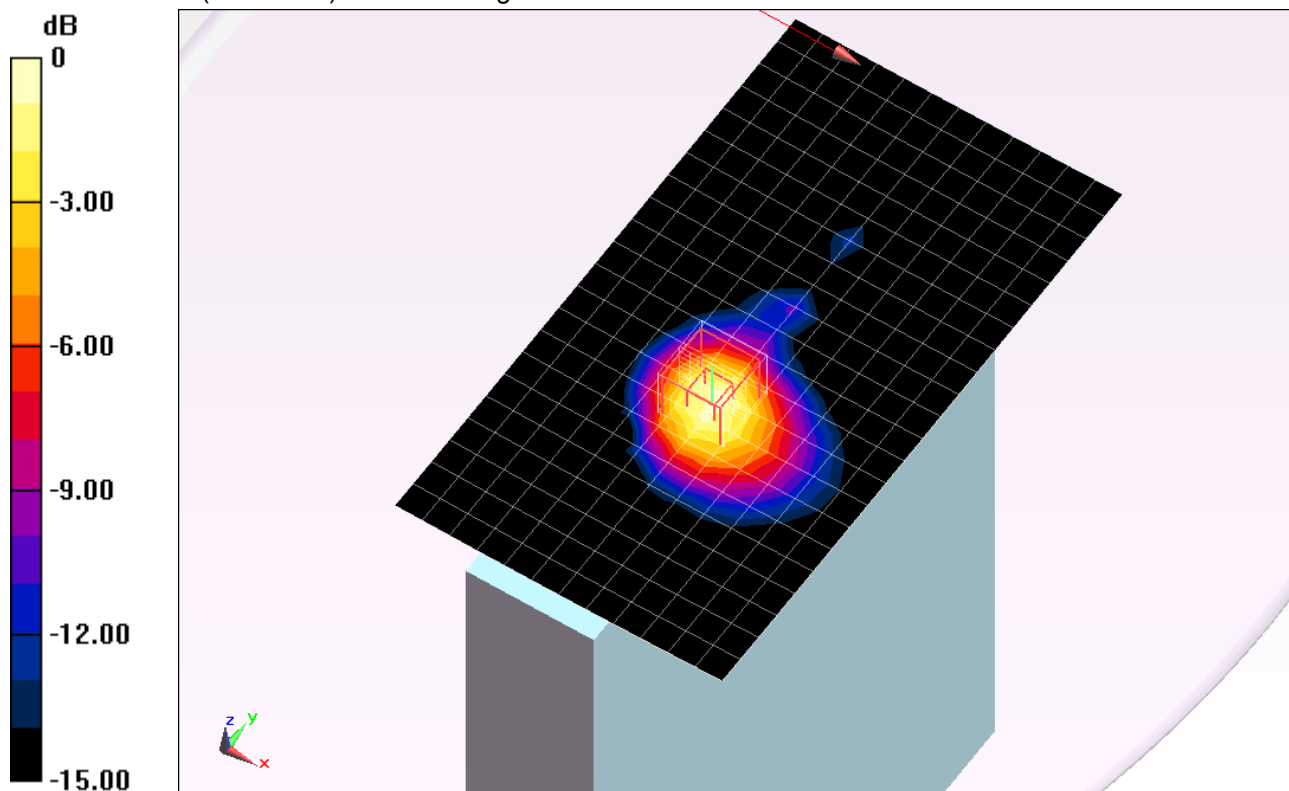

0 dB = 1.300mW/g = 2.28 dB mW/g

Test Laboratory: UL CCS SAR Lab B

5GHz

Communication System: IEEE 802.11a/n 5 GHz Band; Frequency: 5785 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5785$ MHz; $\sigma = 5.99$ mho/m; $\epsilon_r = 46.637$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(3.67, 3.67, 3.67); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 5/2/2011
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118
- Measurement SW: DASY52, Version 52.8 (0); SEMCAD X Version 14.6.4 (4989)

Primary Portrait/802.11a_Ant B_ch 157/Area Scan (121x241x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.206 mW/g

Primary Portrait/802.11a_Ant B_ch 157/Zoom Scan (7x7x9)/Cube 0: Measurement grid:


dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 13.657 V/m; Power Drift = 0.006 dB

Peak SAR (extrapolated) = 2.2260

SAR(1 g) = 0.665 mW/g; SAR(10 g) = 0.267 mW/g

Maximum value of SAR (measured) = 1.070 mW/g

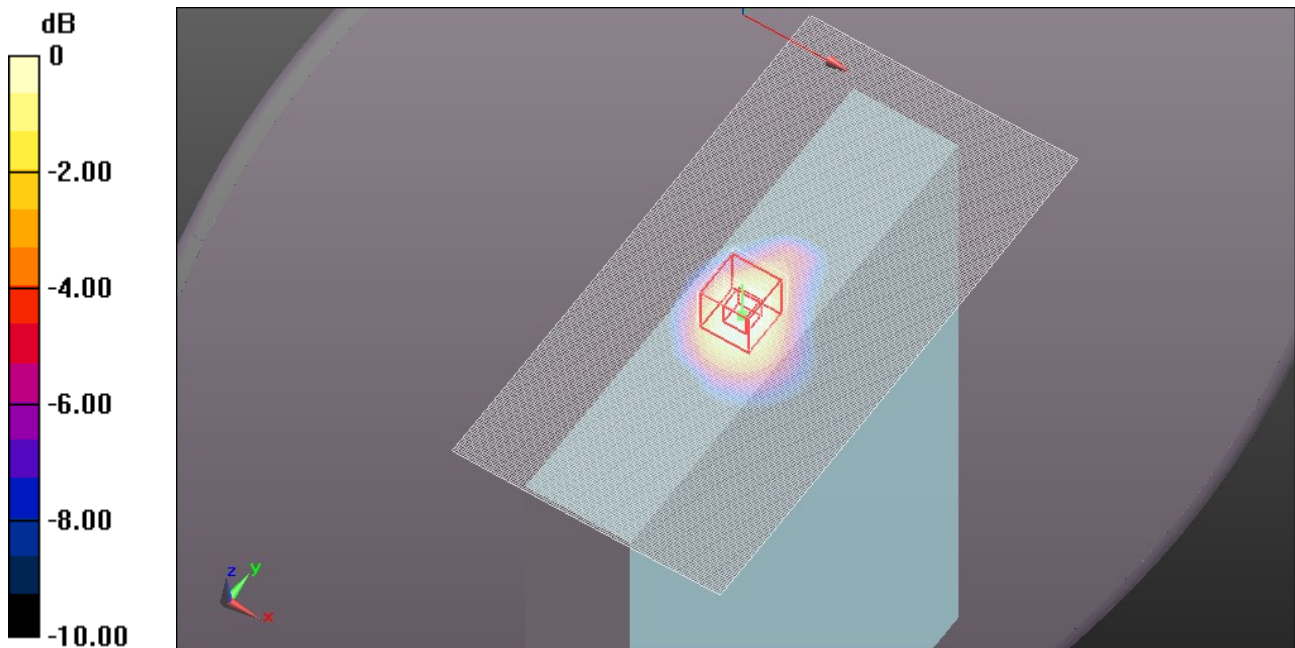

0 dB = 1.070mW/g = 0.59 dB mW/g


Test Laboratory: UL CCS SAR Lab B

5GHz

Communication System: IEEE 802.11a/n 5 GHz Band; Frequency: 5785 MHz; Duty Cycle: 1:1

Primary Portrait/802.11a_Ant B_ch 157/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 0.970 mW/g

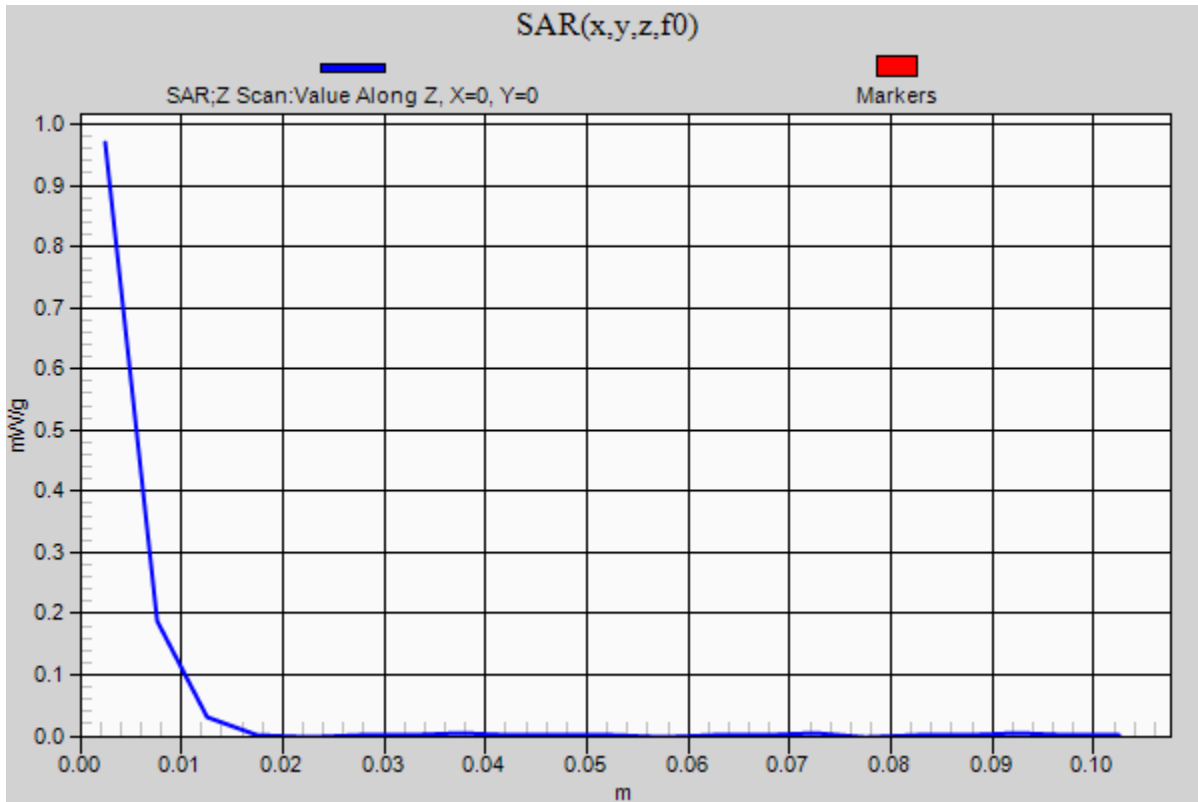

Test Laboratory: UL CCS SAR Lab B

5GHz

Communication System: IEEE 802.11a/n 5 GHz Band; Frequency: 5180 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5180$ MHz; $\sigma = 5.319$ mho/m; $\epsilon_r = 47.111$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section


Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(4.39, 4.39, 4.39); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 5/2/2011
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118
- Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

Secondary Portrait/802.11a_Ant A_ch 36/Area Scan (121x221x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 0.616 mW/g

Secondary Portrait/802.11a_Ant A_ch 36/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
 Reference Value = 10.510 V/m; Power Drift = -0.04 dB
 Peak SAR (extrapolated) = 1.3240
SAR(1 g) = 0.390 mW/g; SAR(10 g) = 0.154 mW/g
 Maximum value of SAR (measured) = 0.622 mW/g

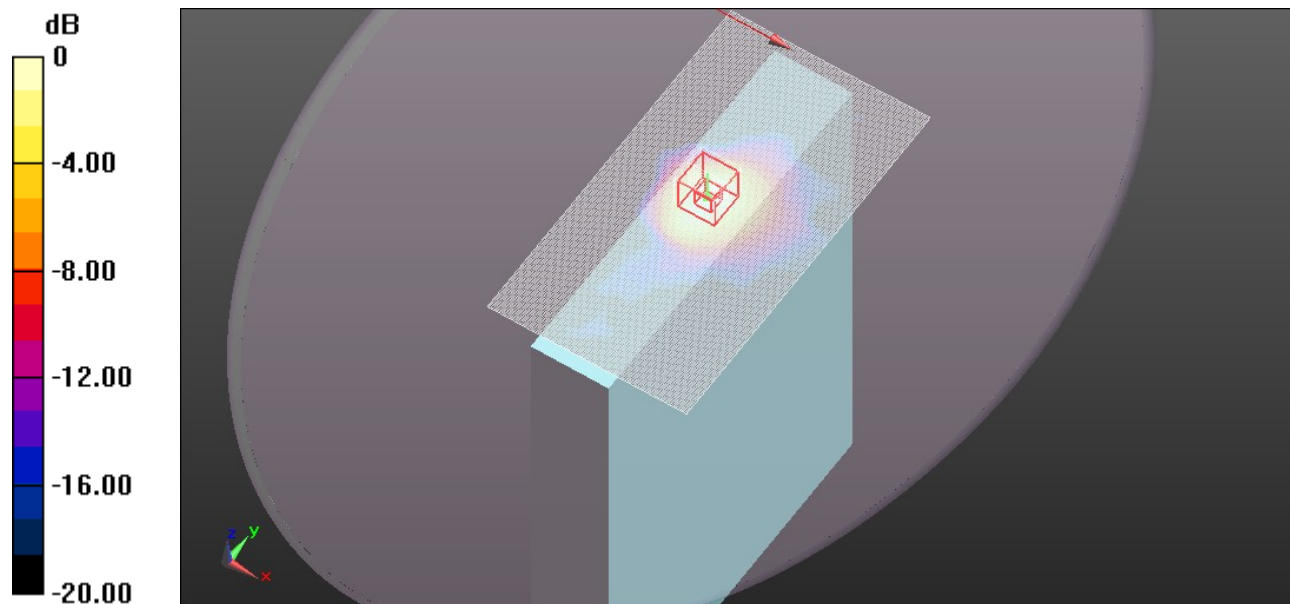

0 dB = 0.620mW/g = -4.15 dB mW/g

Test Laboratory: UL CCS SAR Lab B

5GHz

Communication System: IEEE 802.11a/n 5 GHz Band; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5300$ MHz; $\sigma = 5.492$ mho/m; $\epsilon_r = 46.897$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(4.17, 4.17, 4.17); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 5/2/2011
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118
- Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

Secondary Portrait/802.11a_Ant A_ch 60/Area Scan (121x221x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.698 mW/g


Secondary Portrait/802.11a_Ant A_ch 60/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 11.558 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.4730

SAR(1 g) = 0.450 mW/g; SAR(10 g) = 0.177 mW/g

Maximum value of SAR (measured) = 0.720 mW/g

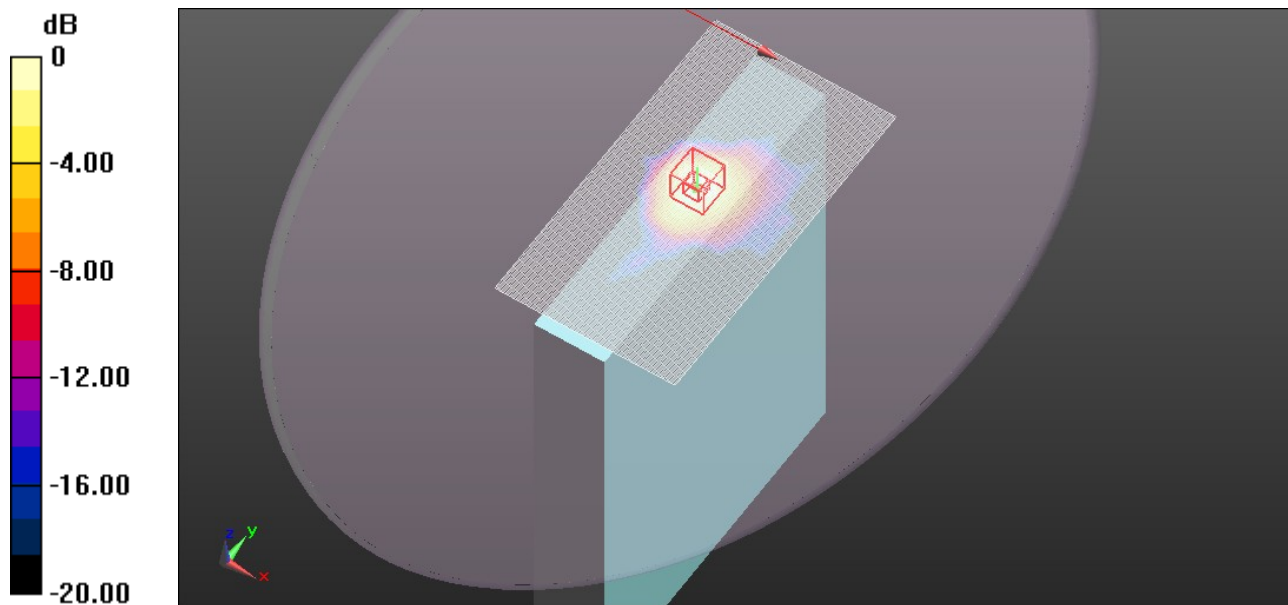

0 dB = 0.720mW/g = -2.85 dB mW/g

Test Laboratory: UL CCS SAR Lab B

5GHz

Communication System: IEEE 802.11a/n 5 GHz Band; Frequency: 5270 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5270$ MHz; $\sigma = 5.446$ mho/m; $\epsilon_r = 46.946$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(4.17, 4.17, 4.17); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 5/2/2011
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118
- Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

Secondary Portrait/802.11n_HT40_Ant A_ch 54/Area Scan (121x221x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (interpolated) = 0.758 mW/g

Secondary Portrait/802.11n_HT40_Ant A_ch 54/Zoom Scan (7x7x9)/Cube 0: Measurement


grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 12.011 V/m; Power Drift = 0.008 dB

Peak SAR (extrapolated) = 1.5650

SAR(1 g) = 0.492 mW/g; SAR(10 g) = 0.194 mW/g

Maximum value of SAR (measured) = 0.788 mW/g

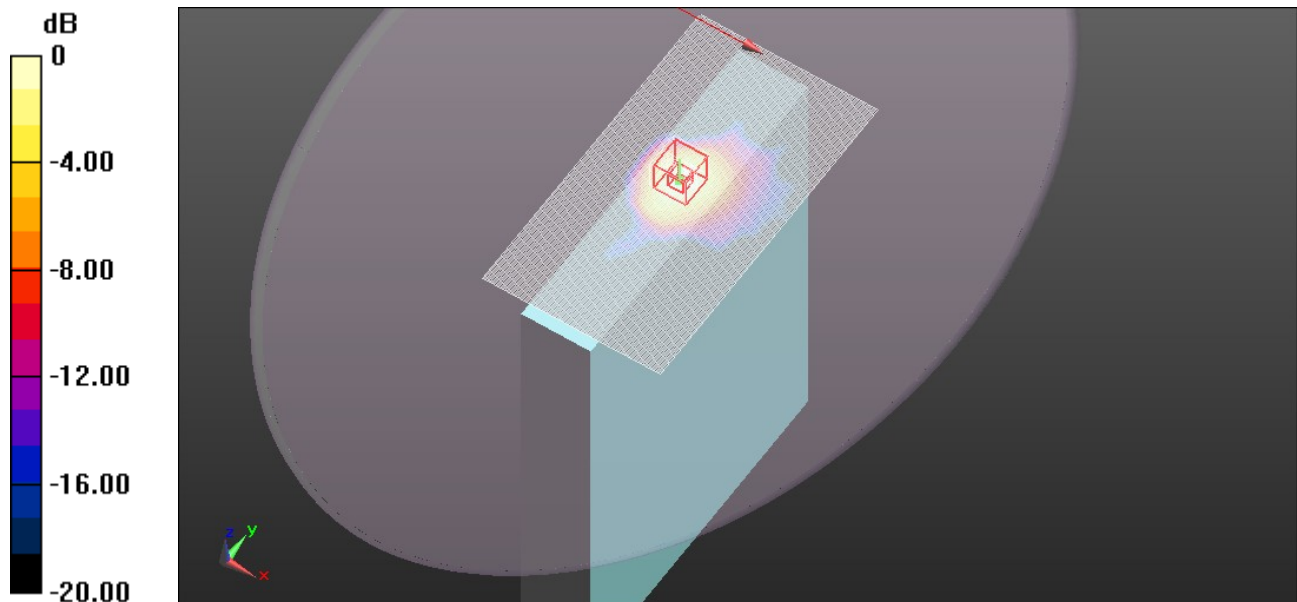

0 dB = 0.790mW/g = -2.05 dB mW/g

5GHz

Frequency: 5520 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C
 Medium parameters used: $f = 5520$ MHz; $\sigma = 5.537$ mho/m; $\epsilon_r = 47.645$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE3 Sn500; Calibrated: 7/14/2011
- Probe: EX3DV4 - SN3773; ConvF(3.49, 3.49, 3.49); Calibrated: 5/3/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (A); Type: QDOVA001BB; Serial: 1119

Secondary Portrait/802.11a_Ant A_ch 104/Area Scan (13x23x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.792 mW/g

Secondary Portrait/802.11a_Ant A_ch 104/Zoom Scan (7x7x9)/Cube 0: Measurement grid:


dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 12.891 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.5610

SAR(1 g) = 0.507 mW/g; SAR(10 g) = 0.207 mW/g

Maximum value of SAR (measured) = 0.815 mW/g

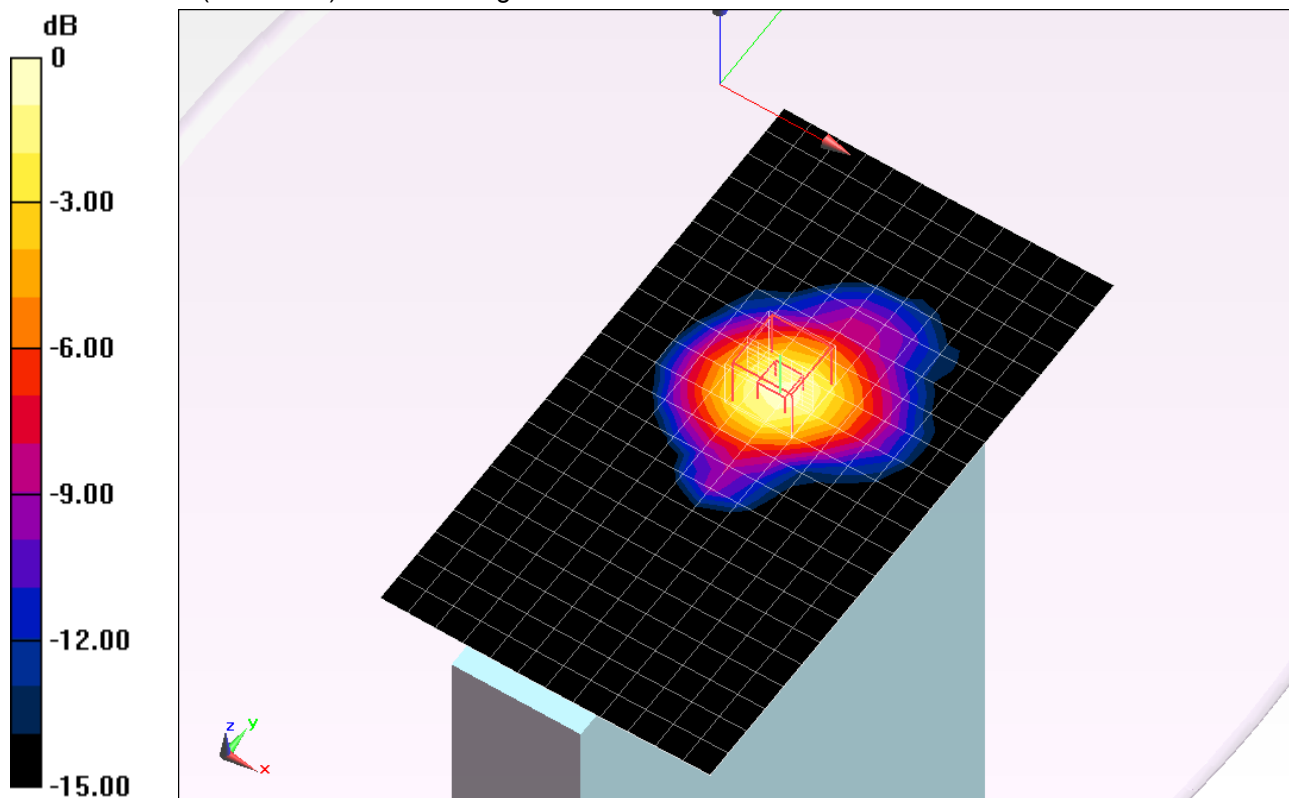

0 dB = 0.820mW/g = -1.72 dB mW/g

5GHz

Frequency: 5580 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C
 Medium parameters used: $f = 5580$ MHz; $\sigma = 5.618$ mho/m; $\epsilon_r = 47.521$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE3 Sn500; Calibrated: 7/14/2011
- Probe: EX3DV4 - SN3773; ConvF(3.26, 3.26, 3.26); Calibrated: 5/3/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (A); Type: QDOVA001BB; Serial: 1119

Secondary Portrait/802.11a_Ant A_ch 116/Area Scan (13x23x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (measured) = 0.755 mW/g


Secondary Portrait/802.11a_Ant A_ch 116/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 12.767 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.4760

SAR(1 g) = 0.490 mW/g; SAR(10 g) = 0.199 mW/g

Maximum value of SAR (measured) = 0.787 mW/g

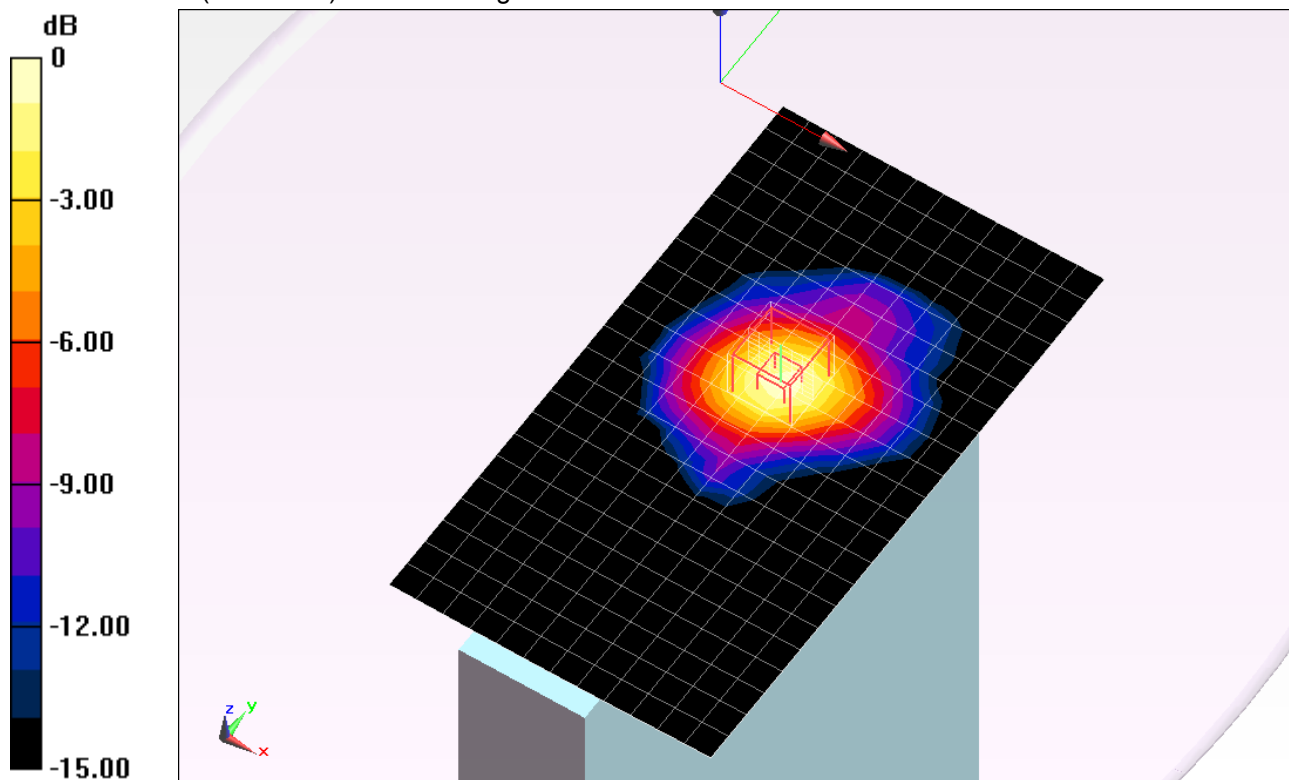

0 dB = 0.790mW/g = -2.05 dB mW/g

5GHz

Frequency: 5620 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C
 Medium parameters used: $f = 5620$ MHz; $\sigma = 5.659$ mho/m; $\epsilon_r = 47.476$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE3 Sn500; Calibrated: 7/14/2011
- Probe: EX3DV4 - SN3773; ConvF(3.26, 3.26, 3.26); Calibrated: 5/3/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (A); Type: QDOVA001BB; Serial: 1119

Secondary Portrait/802.11a_Ant A_ch 124/Area Scan (13x23x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (measured) = 0.735 mW/g


Secondary Portrait/802.11a_Ant A_ch 124/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 12.583 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.4790

SAR(1 g) = 0.475 mW/g; SAR(10 g) = 0.192 mW/g

Maximum value of SAR (measured) = 0.764 mW/g

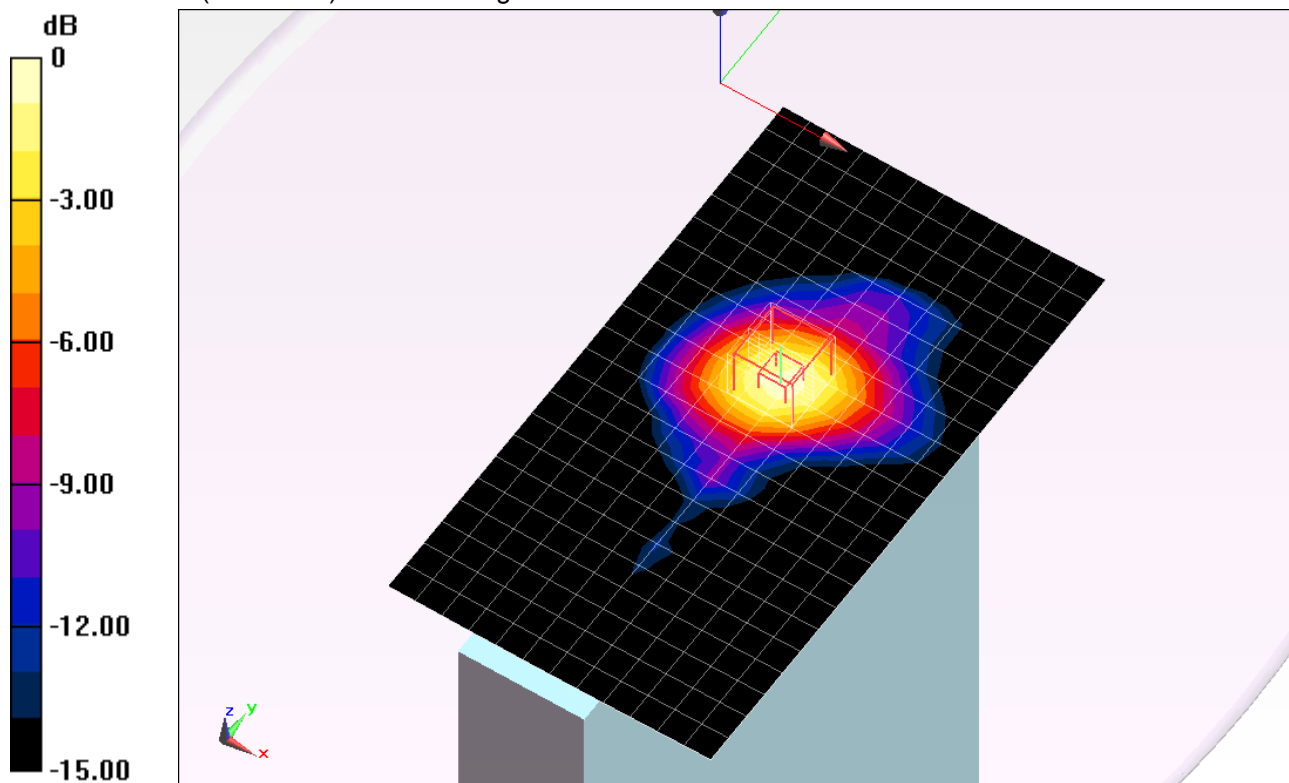

0 dB = 0.760mW/g = -2.38 dB mW/g

5GHz

Frequency: 5680 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C
 Medium parameters used: $f = 5680 \text{ MHz}$; $\sigma = 5.735 \text{ mho/m}$; $\epsilon_r = 47.338$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Electronics: DAE3 Sn500; Calibrated: 7/14/2011
- Probe: EX3DV4 - SN3773; ConvF(3.26, 3.26, 3.26); Calibrated: 5/3/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (A); Type: QDOVA001BB; Serial: 1119

Secondary Portrait/802.11a_Ant A_ch 136/Area Scan (13x23x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.713 mW/g


Secondary Portrait/802.11a_Ant A_ch 136/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 12.305 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.4900

SAR(1 g) = 0.464 mW/g; SAR(10 g) = 0.187 mW/g

Maximum value of SAR (measured) = 0.748 mW/g

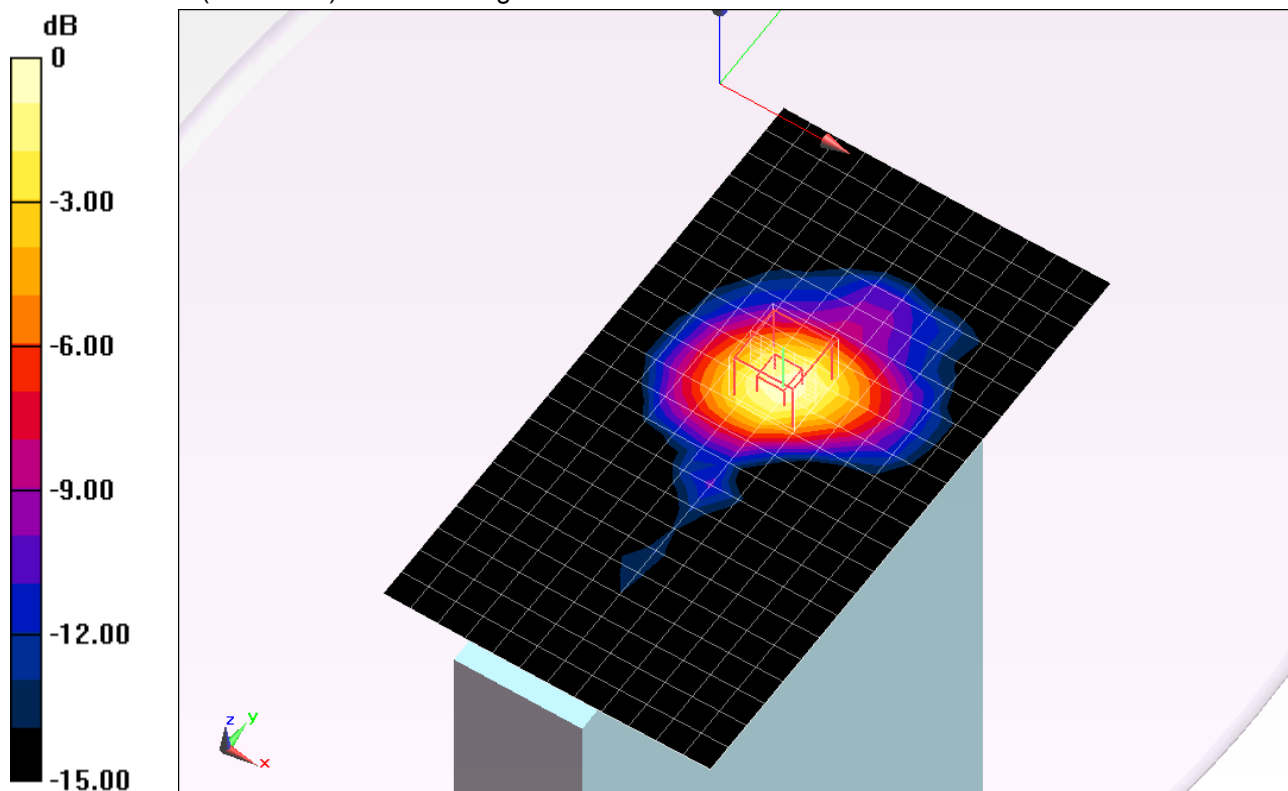

0 dB = 0.750mW/g = -2.50 dB mW/g

Test Laboratory: UL CCS SAR Lab B

5GHz

Communication System: IEEE 802.11a/n 5 GHz Band; Frequency: 5745 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5745$ MHz; $\sigma = 6.082$ mho/m; $\epsilon_r = 46.149$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(3.67, 3.67, 3.67); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 5/2/2011
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118
- Measurement SW: DASY52, Version 52.8 (0); SEMCAD X Version 14.6.4 (4989)

Secondary Portrait/802.11a_Ant A_ch 149/Area Scan (121x221x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (interpolated) = 0.656 mW/g

Secondary Portrait/802.11a_Ant A_ch 149/Zoom Scan (7x7x9)/Cube 0: Measurement grid:


$dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 10.629 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.3080

SAR(1 g) = 0.391 mW/g; SAR(10 g) = 0.150 mW/g

Maximum value of SAR (measured) = 0.651 mW/g

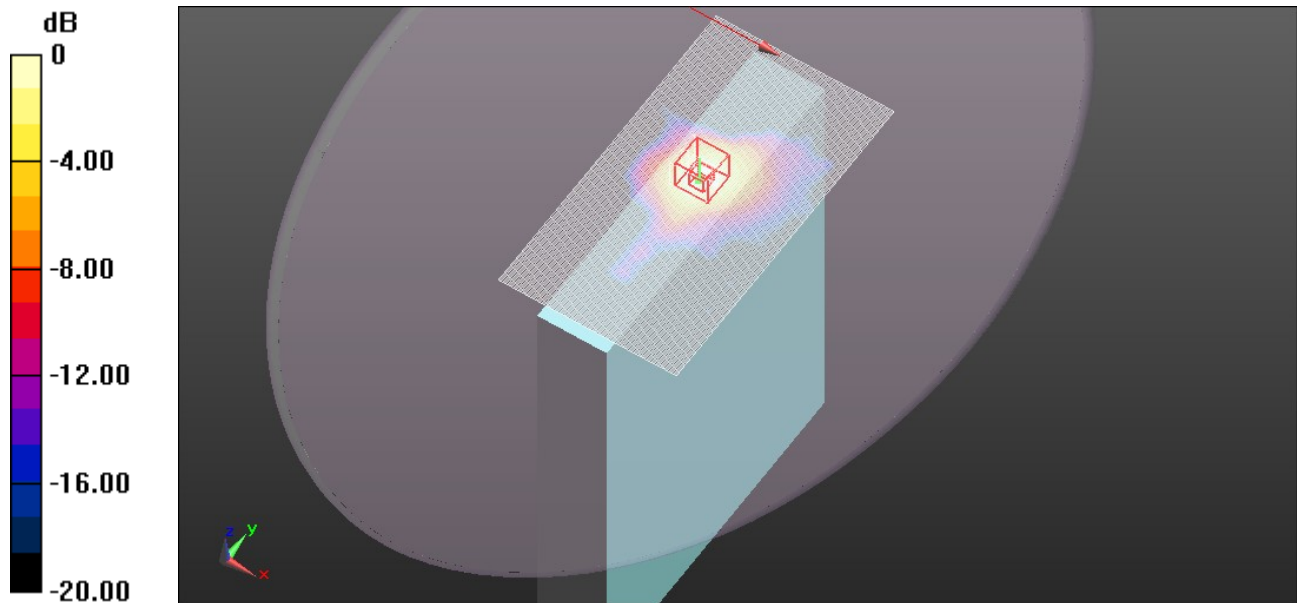

0 dB = 0.650mW/g = -3.74 dB mW/g

Test Laboratory: UL CCS SAR Lab B

5GHz

Communication System: IEEE 802.11a/n 5 GHz Band; Frequency: 5180 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5180$ MHz; $\sigma = 5.145$ mho/m; $\epsilon_r = 47.228$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C


DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(4.39, 4.39, 4.39); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 5/2/2011
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118
- Measurement SW: DASY52, Version 52.8 (0); SEMCAD X Version 14.6.4 (4989)

Lap held/802.11a_Ant A_ch 36/Area Scan (171x241x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 0.00401 mW/g

Lap held/802.11a_Ant A_ch 36/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
 Reference Value = 0.749 V/m; Power Drift = 0.14 dB
 Peak SAR (extrapolated) = 0.001810
SAR(1 g) = 2.42e-005 mW/g; SAR(10 g) = 2.51e-006 mW/g
 Maximum value of SAR (measured) = 0.00411 mW/g

Lap held/802.11a_Ant A_ch 36/Zoom Scan (7x7x9)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
 Reference Value = 0.749 V/m; Power Drift = 0.14 dB
 Peak SAR (extrapolated) = 0.002930
SAR(1 g) = 0.000104 mW/g; SAR(10 g) = 1.14e-005 mW/g
 Maximum value of SAR (measured) = 0.00614 mW/g

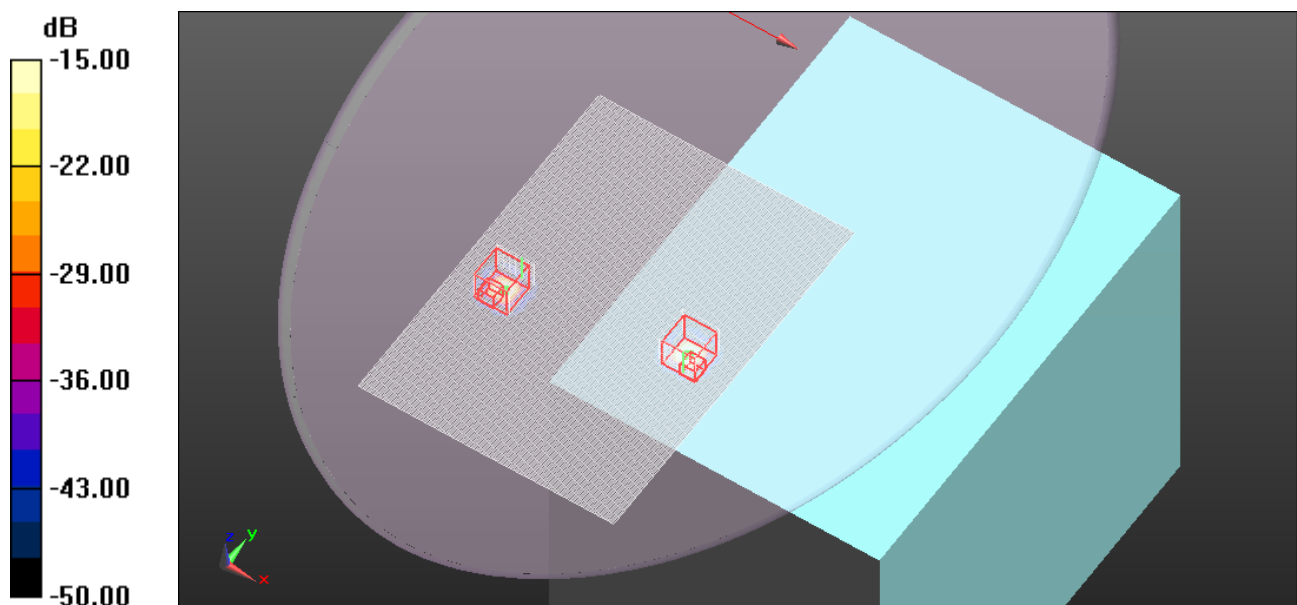

0 dB = 0.0061mW/g = -44.29 dB mW/g

Test Laboratory: UL CCS SAR Lab B

5GHz

Communication System: IEEE 802.11a/n 5 GHz Band; Frequency: 5180 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5180$ MHz; $\sigma = 5.145$ mho/m; $\epsilon_r = 47.228$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(4.39, 4.39, 4.39); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 5/2/2011
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118
- Measurement SW: DASY52, Version 52.8 (0); SEMCAD X Version 14.6.4 (4989)

Lap held/802.11a_Ant B_ch 36/Area Scan (181x221x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 0.049 mW/g


Lap held/802.11a_Ant B_ch 36/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 2.008 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.1720

SAR(1 g) = 0.018 mW/g; SAR(10 g) = 0.00674 mW/g

Maximum value of SAR (measured) = 0.023 mW/g

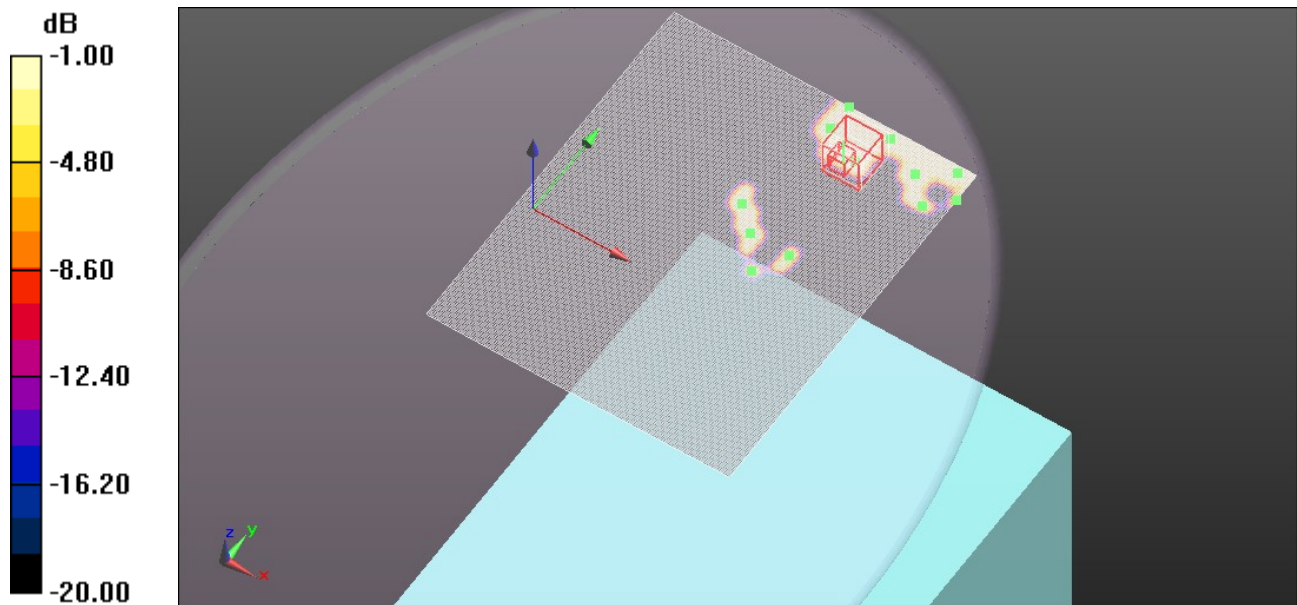

0 dB = 0.020mW/g = -33.98 dB mW/g

Test Laboratory: UL CCS SAR Lab B

5GHz

Communication System: IEEE 802.11a/n 5 GHz Band; Frequency: 5300 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5300$ MHz; $\sigma = 5.294$ mho/m; $\epsilon_r = 47.023$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(4.17, 4.17, 4.17); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 5/2/2011
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118
- Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

Lap held/802.11a_Ant A_ch 60/Area Scan (171x241x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 0.039 mW/g


Lap held/802.11a_Ant A_ch 60/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 1.634 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.0170

SAR(1 g) = 4.3e-005 mW/g; SAR(10 g) = 2.63e-006 mW/g

Maximum value of SAR (measured) = 0.017 mW/g

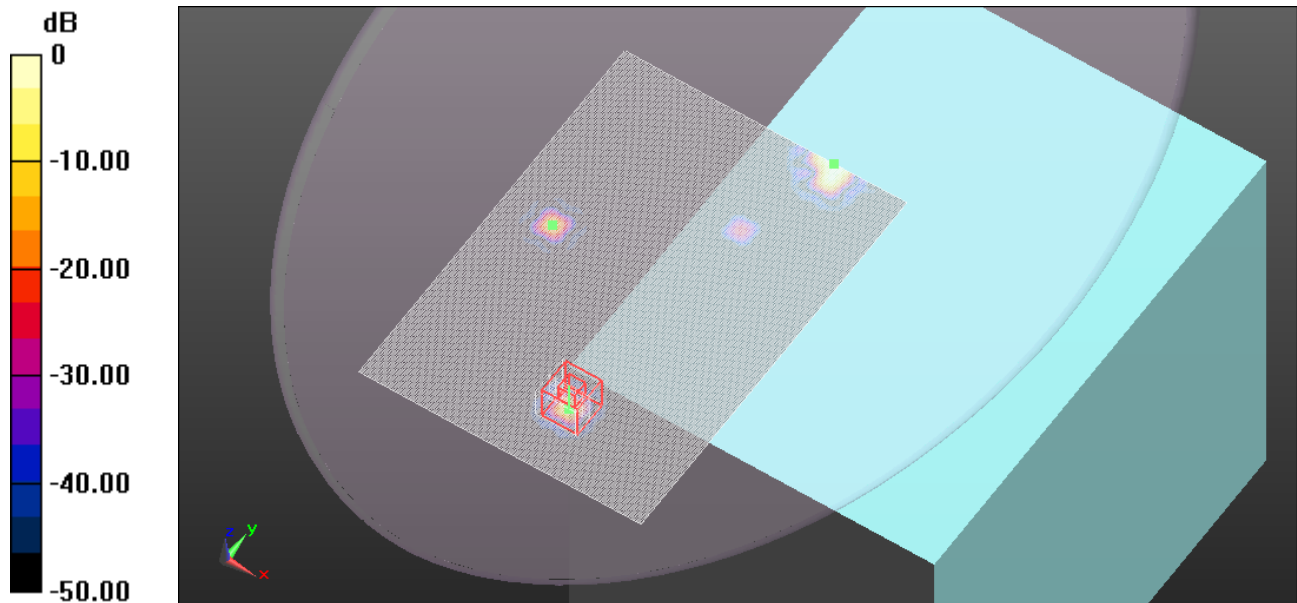

0 dB = 0.020mW/g = -33.98 dB mW/g

Test Laboratory: UL CCS SAR Lab B

5GHz

Communication System: IEEE 802.11a/n 5 GHz Band; Frequency: 5300 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5300$ MHz; $\sigma = 5.294$ mho/m; $\epsilon_r = 47.023$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(4.17, 4.17, 4.17); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 5/2/2011
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118
- Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

Lap held/802.11a_Ant B_ch 60/Area Scan (181x221x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 0.045 mW/g


Lap held/802.11a_Ant B_ch 60/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 1.887 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.1580

SAR(1 g) = 0.017 mW/g; SAR(10 g) = 0.00733 mW/g

Maximum value of SAR (measured) = 0.021 mW/g

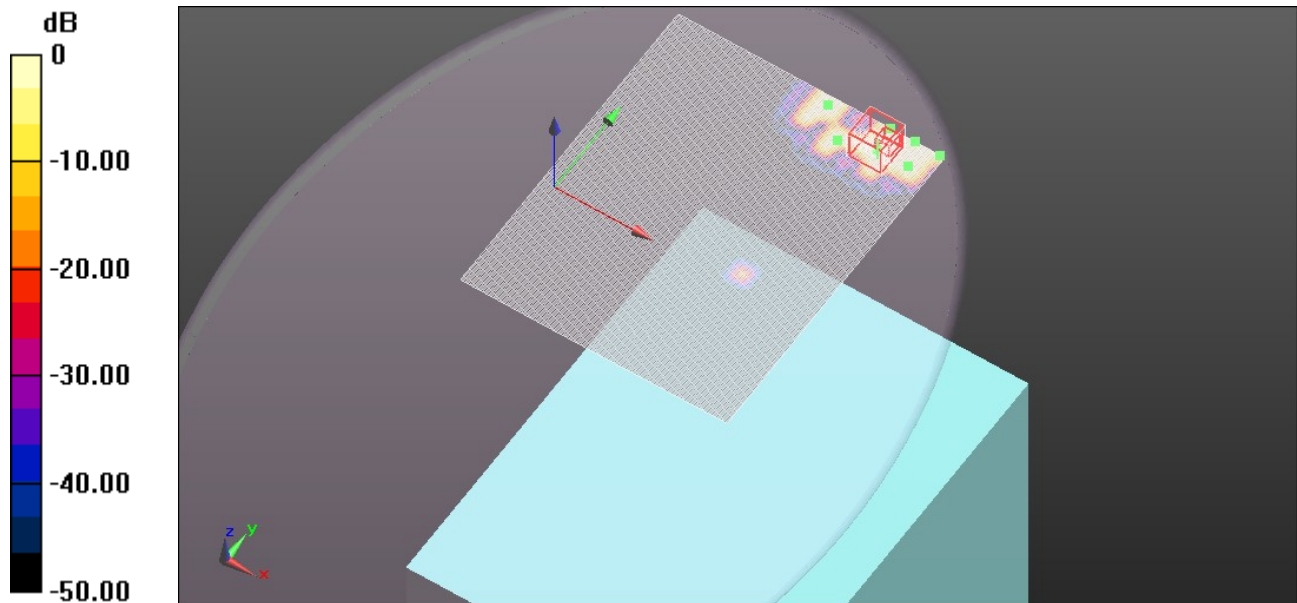

0 dB = 0.020mW/g = -33.98 dB mW/g

Test Laboratory: UL CCS SAR Lab B

5GHz

Communication System: IEEE 802.11a/n 5 GHz Band; Frequency: 5270 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5270$ MHz; $\sigma = 5.247$ mho/m; $\epsilon_r = 47.074$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(4.17, 4.17, 4.17); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 5/2/2011
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118
- Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

Lap held/802.11n_HT40_Ant A_ch 54/Area Scan (171x241x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 0.079 mW/g


Lap held/802.11n_HT40_Ant A_ch 54/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 2.385 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.0140

SAR(1 g) = 0.000383 mW/g; SAR(10 g) = 8.15e-005 mW/g

Maximum value of SAR (measured) = 0.014 mW/g

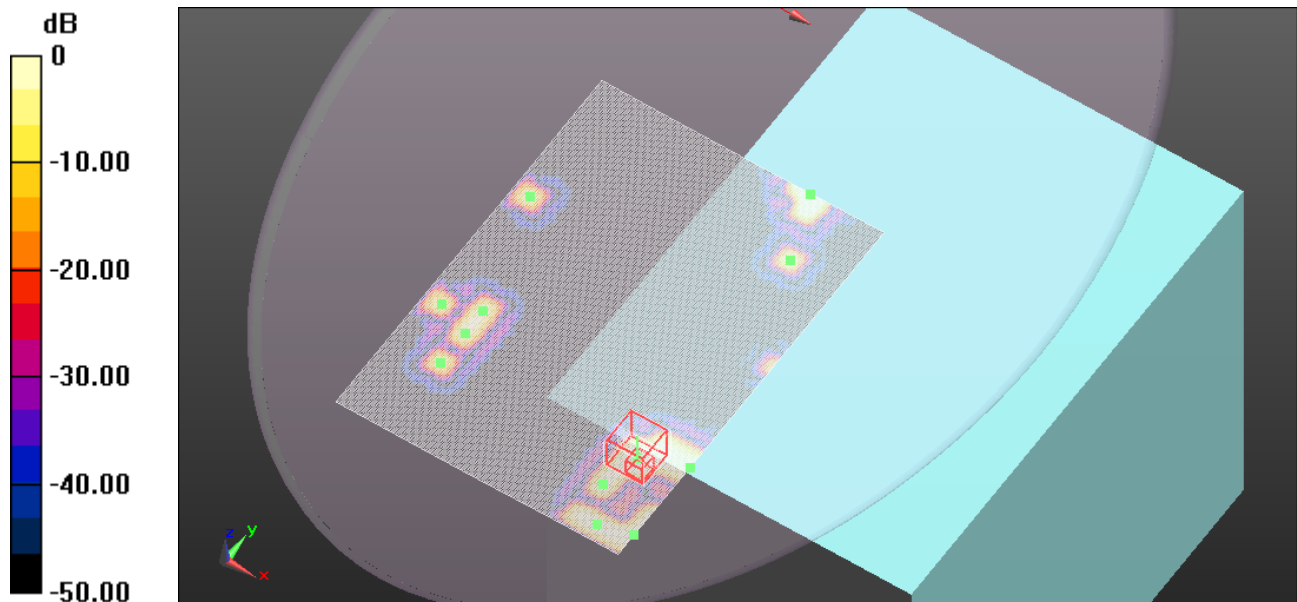

0 dB = 0.010mW/g = -40.00 dB mW/g

Test Laboratory: UL CCS SAR Lab B

5GHz

Communication System: IEEE 802.11a/n 5 GHz Band; Frequency: 5270 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5270$ MHz; $\sigma = 5.247$ mho/m; $\epsilon_r = 47.074$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section


Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(4.17, 4.17, 4.17); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 5/2/2011
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118
- Measurement SW: DASY52, Version 52.8 (0); SEMCAD X Version 14.6.4 (4989)

Lap held/802.11n_HT40_Ant B_ch 54/Area Scan (181x221x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 0.048 mW/g

Lap held/802.11n_HT40_Ant B_ch 54/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
 Reference Value = 1.967 V/m; Power Drift = 0.10 dB
 Peak SAR (extrapolated) = 0.1900
SAR(1 g) = 0.019 mW/g; SAR(10 g) = 0.00689 mW/g
 Maximum value of SAR (measured) = 0.023 mW/g

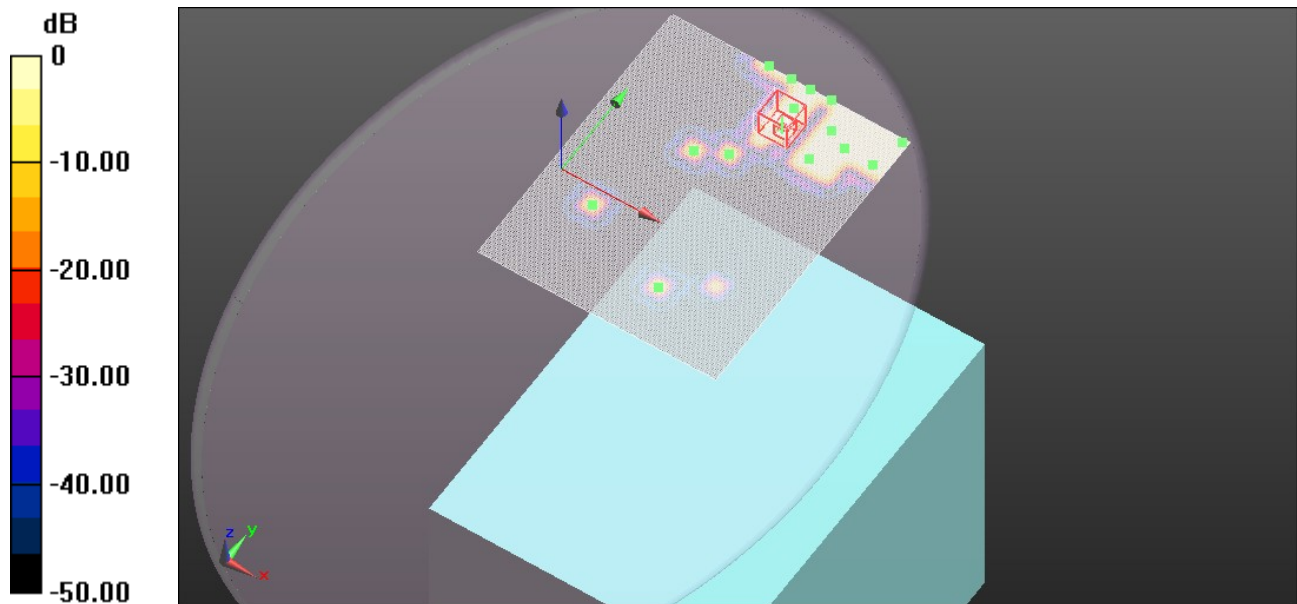

0 dB = 0.020mW/g = -33.98 dB mW/g

Test Laboratory: UL CCS SAR Lab B

5GHz

Communication System: IEEE 802.11a/n 5 GHz Band; Frequency: 5600 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5600$ MHz; $\sigma = 5.645$ mho/m; $\epsilon_r = 46.538$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(3.51, 3.51, 3.51); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 5/2/2011
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118
- Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

Lap held/802.11a_Ant A_ch 120/Area Scan (171x241x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.200 mW/g


Lap held/802.11a_Ant A_ch 120/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 5.229 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.0570

SAR(1 g) = 0.00222 mW/g; SAR(10 g) = 0.000542 mW/g

Maximum value of SAR (measured) = 0.017 mW/g

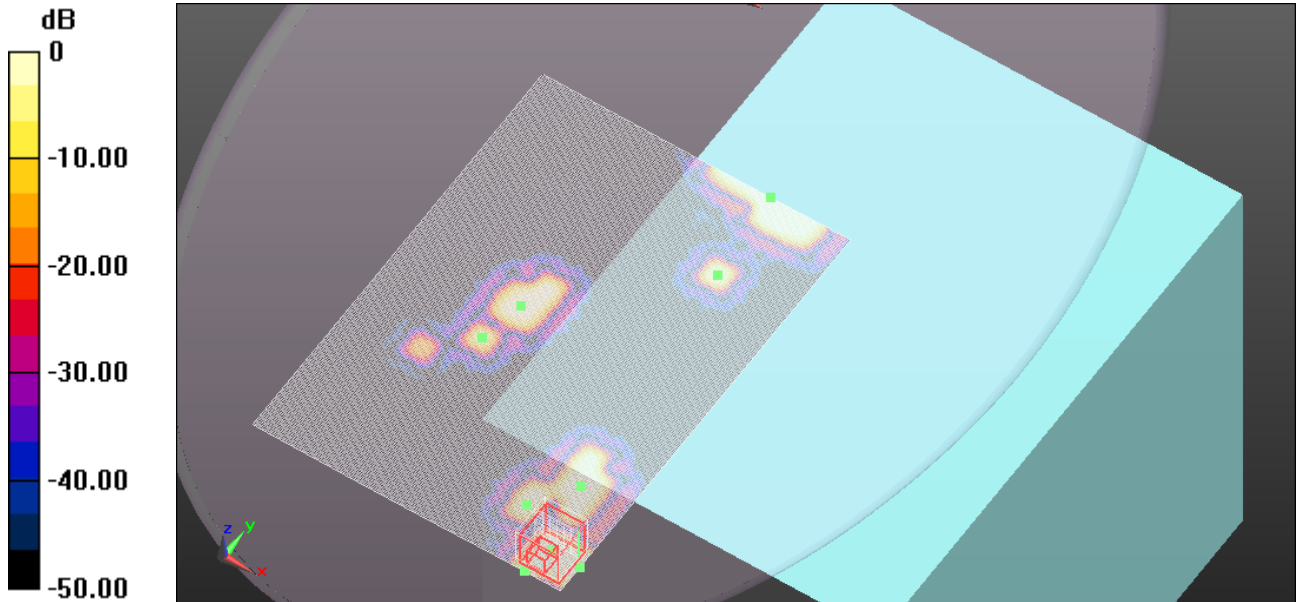

0 dB = 0.020mW/g = -33.98 dB mW/g

Test Laboratory: UL CCS SAR Lab B

5GHz

Communication System: IEEE 802.11a/n 5 GHz Band; Frequency: 5600 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5600$ MHz; $\sigma = 5.645$ mho/m; $\epsilon_r = 46.538$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(3.51, 3.51, 3.51); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 5/2/2011
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118
- Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

Lap held/802.11a_Ant B_ch 120/Area Scan (181x221x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 0.105 mW/g


Lap held/802.11a_Ant B_ch 120/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 2.507 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.2760

SAR(1 g) = 0.030 mW/g; SAR(10 g) = 0.00972 mW/g

Maximum value of SAR (measured) = 0.038 mW/g

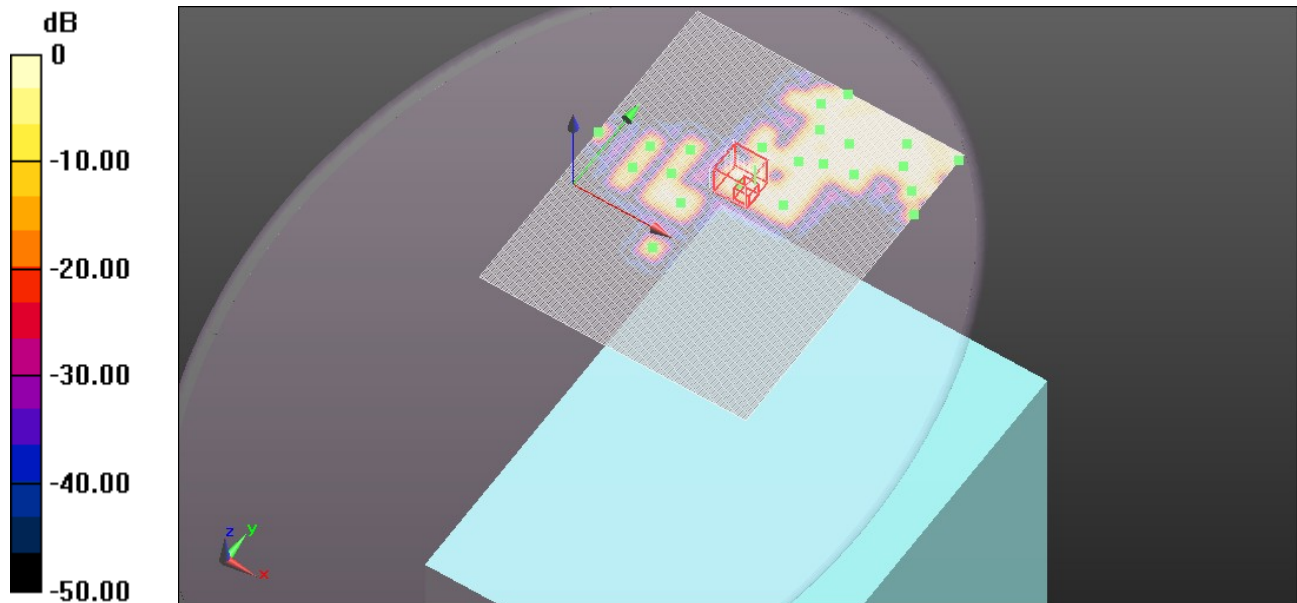

0 dB = 0.040mW/g = -27.96 dB mW/g

Test Laboratory: UL CCS SAR Lab B

5GHz

Communication System: IEEE 802.11a/n 5 GHz Band; Frequency: 5745 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5745$ MHz; $\sigma = 5.827$ mho/m; $\epsilon_r = 46.312$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(3.67, 3.67, 3.67); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 5/2/2011
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118
- Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

Lap held/802.11a_Ant A_ch 149/Area Scan (171x241x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 0.052 mW/g


Lap held/802.11a_Ant A_ch 149/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 1.933 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.1930

SAR(1 g) = 0.014 mW/g; SAR(10 g) = 0.00166 mW/g

Maximum value of SAR (measured) = 0.025 mW/g

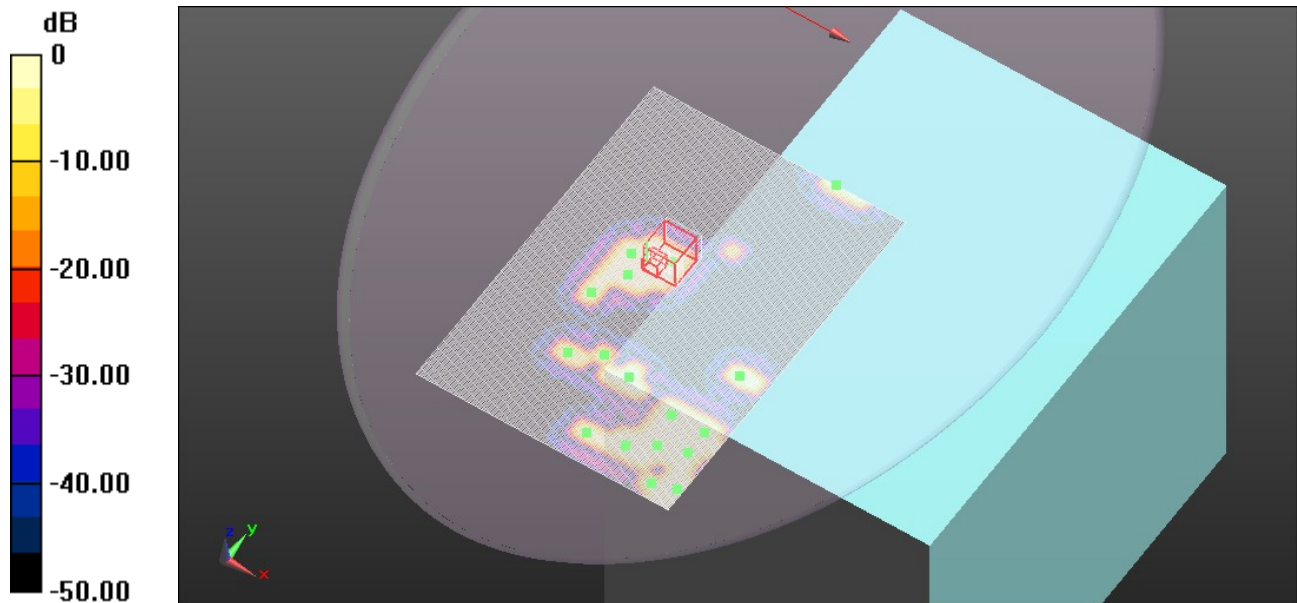

0 dB = 0.020mW/g = -33.98 dB mW/g

Test Laboratory: UL CCS SAR Lab B

5GHz

Communication System: IEEE 802.11a/n 5 GHz Band; Frequency: 5785 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5785$ MHz; $\sigma = 5.876$ mho/m; $\epsilon_r = 46.276$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(3.67, 3.67, 3.67); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1258; Calibrated: 5/2/2011
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1118
- Measurement SW: DASY52, Version 52.8 (0);SEMCAD X Version 14.6.4 (4989)

Lap held/802.11a_Ant B_ch 157/Area Scan (181x221x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 0.091 mW/g


Lap held/802.11a_Ant B_ch 157/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 2.304 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.2730

SAR(1 g) = 0.029 mW/g; SAR(10 g) = 0.00949 mW/g

Maximum value of SAR (measured) = 0.038 mW/g

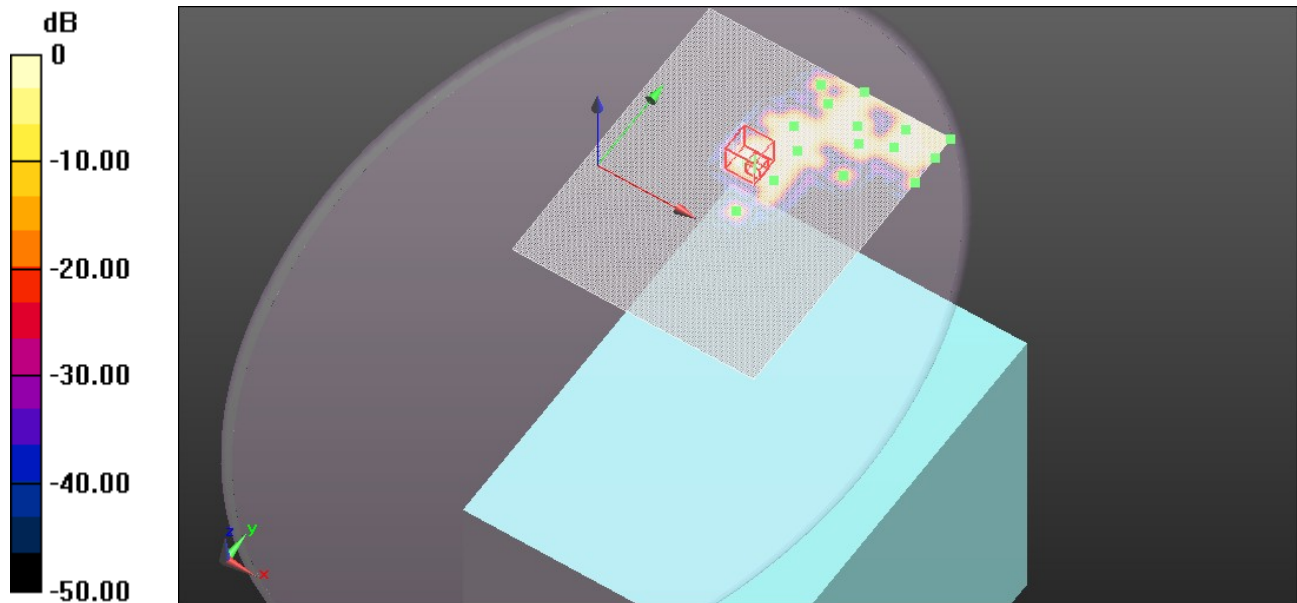

0 dB = 0.040mW/g = -27.96 dB mW/g