



**FCC OET BULLETIN 65 SUPPLEMENT C 01-01  
IEEE STD 1528:2003**

**SAR EVALUATION REPORT**

*For*  
**MC7750 PCI Express Mini Card  
(Tested inside of Panasonic Tablet PC CF-H2)**

**MODEL NUMBER: MC7750  
FCC ID: N7NMC7750**

**REPORT NUMBER: 11J14040-1B1**

**ISSUE DATE: February 1, 2012**

*Prepared for*  
**SIERRA WIRELESS INC.  
13811 WIRELESS WAY  
RICHMOND, BC, V6V 3A4  
CANADA**

*Prepared by*  
**COMPLIANCE CERTIFICATION SERVICES (UL CCS)  
47173 BENICIA STREET  
FREMONT, CA 94538, U.S.A.  
TEL: (510) 771-1000  
FAX: (510) 661-0888**



**NVLAP LAB CODE 200065-0**

Revision History

Rev.	Issue Date	Revisions	Revised By
--	December 12, 2011	Initial Issue	--
A	December 16, 2011	Updated report based on reviewer's comments. 1. Sec. 5.1: Added "A-MPR was disabled" 2. Sec. 11.2: Added Measured MPR on LTE Output Power Table 3. Sec. 16: Added BlueTooth Antenna location and distance between WWAN and WiFi Antenna 4. Sec. 11.2.1: Added Spectrum Plot for 10MHz 5. Sec. 12.2: Removed Note for LTE Bandwidth 10MHz and 5MHz	Bobby Bayani
A1	December 21, 2011	Updated report based on reviewer's comments. 1. Sec. 16: Added RFID Antenna location 2. Sec. 12.2: Added note for 10MHz Bandwidth – 16QAM and 5MHz Bandwidth – QPSK and 16QAM. Removed unnecessary 5MHz Bandwidth SAR Test Results and Test Plots for Secondary Landscape and Base 3. Sec. 13: Revised Table with updated information	Bobby Bayani
B	December 23, 2011	Updated report based on reviewer's comments. 1. Sec. 5: Added Statement 2. Sec. 12: Additional Testing for CDMA200 and LTE / Body Configuration Base/Tilt Position performed 3. Sec. 13 Updated Table 4. Sec. 16: Added Base/Tilt Set-up Photo	Bobby Bayani
B1	February 1, 2012	Updated report based on reviewer's comments. 1. Sec. 12.2: Revised Note. Additional Testing for LTE – 16QAM performed	Bobby Bayani

## Table of Contents

<b>1. Attestation of Test Results</b> .....	<b>5</b>
<b>2. Test Methodology</b> .....	<b>6</b>
<b>3. Facilities and Accreditation</b> .....	<b>6</b>
<b>4. Calibration and Uncertainty</b> .....	<b>7</b>
4.1. <i>Measuring Instrument Calibration</i> .....	7
4.2. <i>Measurement Uncertainty</i> .....	8
<b>5. Equipment Under Test</b> .....	<b>9</b>
5.1. <i>KDB 941225 D05 "SAR for LTE Devices v01"</i> .....	10
<b>6. System Specification</b> .....	<b>12</b>
<b>7. Composition of Ingredients for Tissue Simulating Liquids</b> .....	<b>13</b>
<b>8. Liquid Parameters</b> .....	<b>14</b>
8.1. <i>Simulating Liquid Check Results</i> .....	15
<b>9. System Verification</b> .....	<b>16</b>
9.1. <i>System Check Results</i> .....	17
<b>10. SAR Measurement Procedures</b> .....	<b>18</b>
<b>11. RF Output Power Verification</b> .....	<b>19</b>
11.1. <i>CDMA</i> .....	19
11.2. <i>LTE Band 13</i> .....	21
11.2.1. <i>Spectrum Plots for the Test RB allocations</i> .....	22
<b>12. Summary of Test Results</b> .....	<b>29</b>
12.1. <i>CDMA2000 Cell and PCS Band</i> .....	29
12.2. <i>LTE BAND 13</i> .....	30
<b>13. Simultaneous Transmission SAR Analysis</b> .....	<b>32</b>
<b>14. Appendixes</b> .....	<b>34</b>
14.1. <i>Appendix A: System Check Plots</i> .....	34
14.2. <i>Appendix B: SAR Test Plots for CDMA 2000</i> .....	34
14.3. <i>Appendix C: SAR Test Plots for LTE Band 13</i> .....	34
14.4. <i>Appendix D: Calibration Certificate for EX3DV4 SN 3686</i> .....	34
14.5. <i>Appendix E: Calibration Certificate for EX3DV4 SN 3773</i> .....	34
14.6. <i>Appendix F: Calibration Certificate for EX3DV4 SN 3772</i> .....	34
14.7. <i>Appendix G: Calibration Certificate for D750V3 SN1019</i> .....	34

---

14.8. *Appendix H: Calibration Certificate for D750V3 SN1024*..... 34  
14.9. *Appendix I: Calibration Certificate for D835V2 SN 4d117* ..... 34  
14.10. *Appendix J: Calibration Certificate for D1900V2 SN 5d140*..... 34



**15. Summary of Test configurations**..... **35**

**16. Antenna Locations & Separation Distances**..... **36**

**17. Setup Photos** ..... **37**

**18. Host Device Photos**..... **40**

### 1. Attestation of Test Results

Applicant name:	Sierra Wireless Inc.		
EUT description:	The EUT is the Sierra Wireless MC7750 Cell and PCS band for CDMA/EvDO and Band 13 for LTE Module (Tested inside of Panasonic Tablet PC, Model CF-H2) (GPRS/EDGE and UMTS are disabled.)		
Model number:	MC7750		
Device category:	Portable		
Exposure category:	General Population/Uncontrolled Exposure		
Date tested:	October 20-January 30, 2012		
FCC Rule Parts	Freq. Range [MHz]	Highest 1g SAR (mW/g)	Limit (mW/g)
27 (LTE Band 13)	779.5 – 784.5	0.461 (Primary Portrait)	1.6
22H	824 – 849	0.247 (Primary Portrait)	
24E	1850 – 1910	0.106 (Secondary Landscape)	
Applicable Standards			Test Results
OET Bulletin 65 Supplement C 01-01, IEEE STD 1528: 2003			Pass
<p>Compliance Certification Services, Inc. (UL CCS) tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL CCS based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.</p> <p><b>Note:</b> The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL CCS and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL CCS will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government (NIST Handbook 150, Annex A). This report is written to support regulatory compliance of the applicable standards stated above.</p>			
Approved & Released For CCS By:		Tested By:	
			
Sunny Shih Engineering Team Leader Compliance Certification Services (UL CCS)		Bobby Bayani SAR Engineer Compliance Certification Services (UL CCS)	

## 2. Test Methodology

The tests documented in this report were performed in accordance with FCC OET Bulletin 65 Supplement C Edition 01-01, IEEE STD 1528:2003 and the following KDBs Procedures.

- 447498 D01 Mobile Portable RF Exposure v04
- 941225 D01 SAR test for 3G devices v02
- 941225 D05 SAR for LTE Devices v01

## 3. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

UL CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>

## 4. Calibration and Uncertainty

### 4.1. Measuring Instrument Calibration

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due date		
				MM	DD	Year
Dielectric Probe Kit	HP	85070C	N/A	N/A		
Network Analyzer	Agilent	E5071B	MY42100131	2	2	2012
Synthesized Signal Generator	HP	83732B	US34490599	7	14	2012
E-Field Probe	SPEAG	EX3DV4	3686	1	24	2012
E-Field Probe	SPEAG	EX3DV4	3773	5	3	2012
E-Field Probe	SPEAG	EX3DV4	3772	5	3	2012
Thermometer	EXTECH	Thermometer	SCL29766	5	17	2012
Data Acquisition Electronics	SPEAG	DAE3 V1	500	7	14	2012
Data Acquisition Electronics	SPEAG	DAE4	1258	5	2	2012
Data Acquisition Electronics	SPEAG	DAE4	1239	10	18	2012
System Validation Dipole	SPEAG	D750V3	1019	12	10	2011
System Validation Dipole	SPEAG	D750V3	1024	4	20	2012
System Validation Dipole	SPEAG	D835V2	4d117	4	15	2012
System Validation Dipole	SPEAG	D1900V2	5d140	4	18	2012
Power Meter	HP	437B	3125U16345	5	13	2012
Power Sensor	HP	8481A	1834588	5	13	2012
Directional Coupler	Warlatone	C8060-102	2141	N/A		
Radio Communication Analyzer	R&S	CMU200	838114/032	3	1	2012
Radio Communication Analyzer	Anritsu	MT8820C	6200985430	6	17	2012
Amplifier	Mini-Circuits	ZVE-8G	90606	N/A		
Amplifier	Mini-Circuits	ZHL-42W	D072701-5	N/A		
Simulating Liquid	SPEAG	MSL750	N/A	Within 24 hrs of first test		
Simulating Liquid	SPEAG	MSL900	N/A	Within 24 hrs of first test		
Simulating Liquid	SPEAG	MSL1900	N/A	Within 24 hrs of first test		

## 4.2. Measurement Uncertainty

Measurement uncertainty for 300 MHz to 3 GHz averaged over 1 gram					
Component	error, %	Probe Distribution	Divisor	Sensitivity	U (Xi), %
<b>Measurement System</b>					
Probe Calibration (k=1)	5.50	Normal	1	1	5.50
Axial Isotropy	1.15	Rectangular	1.732	0.7071	0.47
Hemispherical Isotropy	2.30	Rectangular	1.732	0.7071	0.94
Boundary Effect	0.90	Rectangular	1.732	1	0.52
Probe Linearity	3.45	Rectangular	1.732	1	1.99
System Detection Limits	1.00	Rectangular	1.732	1	0.58
Readout Electronics	0.30	Normal	1	1	0.30
Response Time	0.80	Rectangular	1.732	1	0.46
Integration Time	2.60	Rectangular	1.732	1	1.50
RF Ambient Conditions - Noise	3.00	Rectangular	1.732	1	1.73
RF Ambient Conditions - Reflections	3.00	Rectangular	1.732	1	1.73
Probe Positioner Mechanical Tolerance	0.40	Rectangular	1.732	1	0.23
Probe Positioning with respect to Phantom	2.90	Rectangular	1.732	1	1.67
Extrapolation, Interpolation and Integration	1.00	Rectangular	1.732	1	0.58
<b>Test Sample Related</b>					
Test Sample Positioning	2.90	Normal	1	1	2.90
Device Holder Uncertainty	3.60	Normal	1	1	3.60
Output Power Variation - SAR Drift	5.00	Rectangular	1.732	1	2.89
<b>Phantom and Tissue Parameters</b>					
Phantom Uncertainty (shape and thickness)	4.00	Rectangular	1.732	1	2.31
Liquid Conductivity - deviation from target	5.00	Rectangular	1.732	0.64	1.85
Liquid Conductivity - measurement	3.38	Normal	1	0.64	2.16
Liquid Permittivity - deviation from target	5.00	Rectangular	1.732	0.6	1.73
Liquid Permittivity - measurement	-4.85	Normal	1	0.6	-2.91
Combined Standard Uncertainty $U_c(y)$ =					10.11
Expanded Uncertainty U, Coverage Factor = 2, > 95 % Confidence =				20.23	%
Expanded Uncertainty U, Coverage Factor = 2, > 95 % Confidence =				1.60	dB



## 5. Equipment Under Test

<p>The EUT is the Sierra Wireless MC7750 Cell and PCS band for CDMA/EvDO and Band 13 for LTE Module. Tested inside Panasonic Tablet PC, CF-H2          (GPRS/EDGE and UMTS are disabled.)          Rubber Handle located at the back of the Device is non-removable.</p>					
Normal operation:	Multiple display orientations supporting both portrait and landscape configurations.				
Antenna tested:	<table border="0"> <tr> <td><u>Manufactured:</u></td> <td><u>Part Number:</u></td> </tr> <tr> <td>Panasonic</td> <td>Chain A: DFUP2071ZA(1) Chain B: DFUP2071ZA(1)</td> </tr> </table>	<u>Manufactured:</u>	<u>Part Number:</u>	Panasonic	Chain A: DFUP2071ZA(1) Chain B: DFUP2071ZA(1)
<u>Manufactured:</u>	<u>Part Number:</u>				
Panasonic	Chain A: DFUP2071ZA(1) Chain B: DFUP2071ZA(1)				
Antenna-to-antenna/user separation distances:	See Section 16 for details of antenna locations and separation distances.				
Simultaneous transmission:	<ul style="list-style-type: none"> <li>• WWAN can transmit simultaneously with WiFi</li> <li>• WWAN can transmit simultaneously with Bluetooth</li> <li>• WiFi can transmit simultaneously with Bluetooth</li> </ul>				
Assessment for SAR evaluation for Simultaneous transmission:	<p><b>WiFi and BT</b>          Due to Bluetooth's maximum output is <math>&lt; 60/f_{(GHz)}</math> mW and standalone SAR is not required, WiFi and Bluetooth are not considered as co-located transmitters with each other.          Bluetooth Module – FCC ID: ACJ9TGBT11A, IC: 216ACFBT11A. Max. Power: 16.22 mW</p> <p><b>WWAN and BT</b>          Same as WiFi and BT</p> <p><b>WWAN and WiFi</b>          SAR is not required due to <math>\sum (SAR_{1g}) &lt; SAR</math> limit.          (Refer to Sec. 13 Simultaneous Transmission SAR Analyses.)</p>				


### 5.1. KDB 941225 D05 “SAR for LTE Devices v01”

#	Description	Parameter
1	Identify the operating frequency range of each LTE transmission band used by the device	Band 13: 779.5 - 784.5 MHz (5 MHz BW) 782 MHz (10MHz BW)
2	Identify the channel bandwidths used in each frequency band; 1.4, 3, 5, 10, 15, 20 MHz etc	5MHz, 10MHz
3	Identify the high, middle and low (H, M, L) channel numbers and frequencies in each LTE frequency band	Please refer to section 11.2
4	Specify the UE category and uplink modulations used	The UE Category is 3 Uplink modulations: QPSK, 16QAM
5	Descriptions of the LTE transmitter and antenna implementation & identify whether it is a standalone transmitter operating independently of other wireless transmitters in the device or sharing hardware components and/or antenna(s) with other transmitters etc.	Please refer Sec. 16 Antenna locations and distance
6	Identify the LTE voice/data requirements in each operating mode and exposure condition with respect to head and body test configurations, antenna locations, handset flip-cover or slide positions, antenna diversity conditions, etc.	Voice mode is not supported for the module incorporated in this host device.
7	Identify if Maximum Power Reduction (MPR) is optional or mandatory, i.e. built-in by design: a) only mandatory MPR may be considered during SAR testing, when the maximum output power is permanently limited by the MPR implemented within the UE; and only for the applicable RB (resource block) configurations specified in LTE standards b) A-MPR (additional MPR) must be disabled.	<ul style="list-style-type: none"> <li>• Built-in by design</li> <li>• A-MPR was disabled</li> </ul> Please refer to Tables in section 12
8	Include the maximum average conducted output power measured on the required test channels for each channel bandwidth and UL modulation used in each frequency band: a) with 1 RB allocated at the upper edge of a channel b) with 1 RB allocated at the lower edge of a channel c) using 50% RB allocation centered within a channel d) using 100% RB allocation	Refer to section 11.2 RF output power table
9	Identify all other U.S. wireless operating modes (3G, Wi-Fi, WiMax, Bluetooth etc), device/exposure configurations (head and body, antenna and handset flip-cover or slide positions, antenna diversity conditions etc.) and frequency bands used for these modes	3G: Cell and PCS band for CDMA/EvDO. Bluetooth and WiFi.
10	Include the maximum average conducted output power measured for the other wireless mode and frequency bands	See section 11 RF output power measurements in SAR report.
11	Identify the simultaneous transmission conditions for the voice and data configurations supported by all wireless modes, device configurations and frequency bands, for the head and body exposure conditions and device operating configurations (handset flip or cover positions, antenna diversity conditions etc.)	Voice mode is not supported

**KDB 941225 D05 "SAR for LTE Devices v01" (continued)**

12	When power reduction is applied to certain wireless modes to satisfy SAR compliance for simultaneous transmission conditions, other equipment certification or operating requirements, include the maximum average conducted output power measured in each power reduction mode applicable to the simultaneous voice/data transmission configurations for such wireless configurations and frequency bands; and also include details of the power reduction implementation and measurement setup	Not Applicable
13	Include descriptions of the test equipment, test software, built-in test firmware etc. required to support testing the device when power reduction is applied to one or more transmitters/antennas for simultaneous voice/data transmission	Not Applicable
14	When appropriate, include a SAR test plan proposal with respect to the above	Not Applicable
15	If applicable, include preliminary SAR test data and/or supporting information in laboratory testing inquiries to address specific issues and concerns or for requesting further test reduction considerations appropriate for the device; for example, simultaneous transmission configurations	Not applicable

## 6. System Specification

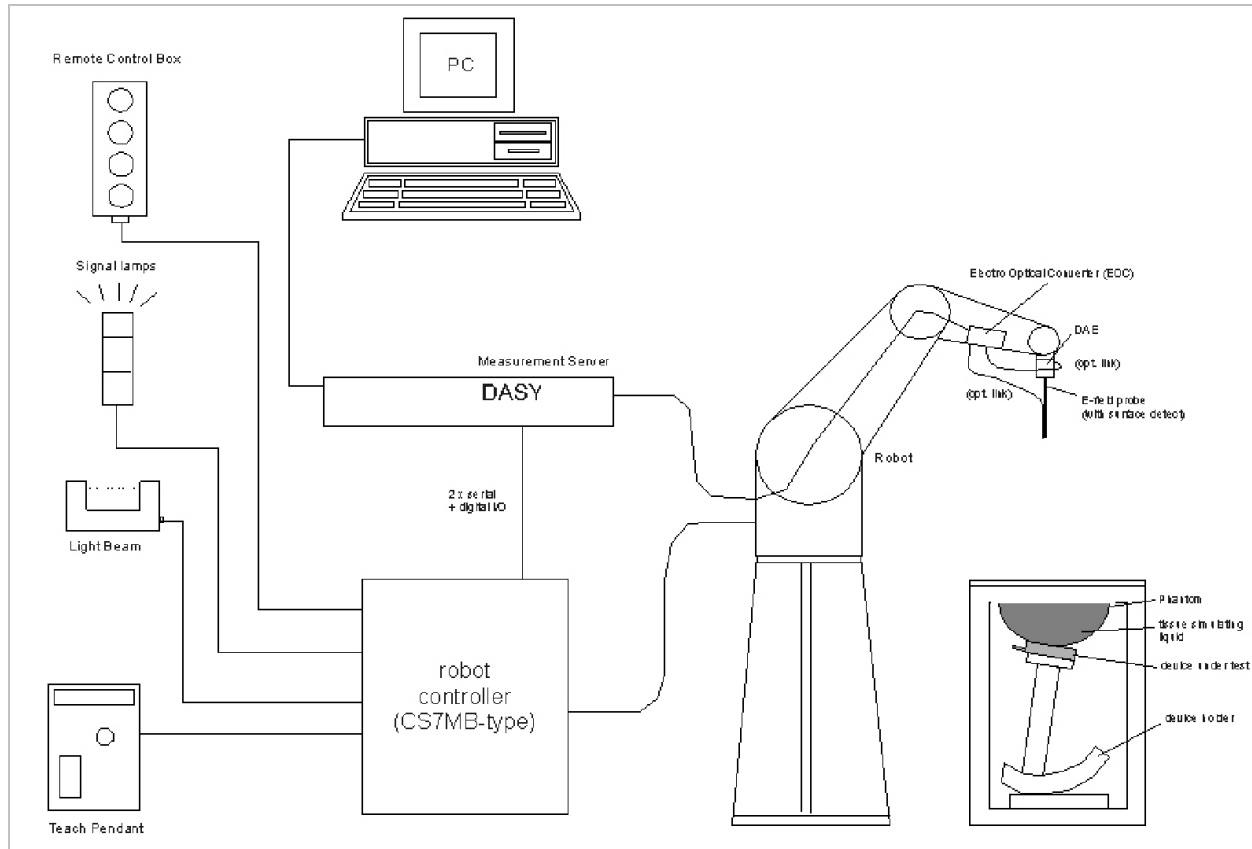

### The DASY system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 2000 or Windows XP.
- DASY software.
- Remote controls with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- Validation dipole kits allowing validating the proper functioning of the system.

## 7. Composition of Ingredients for Tissue Simulating Liquids

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Ingredients (% by weight)	Frequency (MHz)									
	450		835		915		1900		2450	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	38.56	51.16	41.45	52.4	41.05	56.0	54.9	40.4	62.7	73.2
Salt (NaCl)	3.95	1.49	1.45	1.4	1.35	0.76	0.18	0.5	0.5	0.04
Sugar	56.32	46.78	56.0	45.0	56.5	41.76	0.0	58.0	0.0	0.0
HEC	0.98	0.52	1.0	1.0	1.0	1.21	0.0	1.0	0.0	0.0
Bactericide	0.19	0.05	0.1	0.1	0.1	0.27	0.0	0.1	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	36.8	0.0
DGBE	0.0	0.0	0.0	0.0	0.0	0.0	44.92	0.0	0.0	26.7
Dielectric Constant	43.42	58.0	42.54	56.1	42.0	56.8	39.9	54.0	39.8	52.5
Conductivity (S/m)	0.85	0.83	0.91	0.95	1.0	1.07	1.42	1.45	1.88	1.78

Salt: 99+% Pure Sodium Chloride      Sugar: 98+% Pure Sucrose  
 Water: De-ionized, 16 MΩ+ resistivity      HEC: Hydroxyethyl Cellulose  
 DGBE: 99+% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]  
 Triton X-100 (ultra pure): Polyethylene glycol mono [4-(1,1, 3, 3-tetramethylbutyl)phenyl]ether

### MSL/HSL750 (Body and Head liquids for 700 – 800 MHz)

Item	Head Tissue Simulation Liquids HSL750 Muscle (body) Tissue Simulation Liquids MSL750
Type No	SL AAH 075
Manufacturer	SPEAG
The item is composed of the following ingredients:	
H <sup>2</sup> O	Water, 35 – 58%
Sucrese	Sugar, white, refined, 40-60%
NaCl	Sodium Chloride, 0-6%
Hydroxyethel-cellulsoe	Medium Viscosity (CAS# 9004-62-0), <0.3%
Preventol-D7	Preservative: aqueous preparation, (CAS# 55965-84-9), containing 5-chloro-2-methyl-3(2H)-isothiazolone and 2-methyyl-3(2H)-isothiazolone, 0.1-0.7%

### MSL/HSL1750 (Body and Head liquids for 1700 – 1800 MHz)

Item	Head Tissue Simulation Liquids HSL1750 Muscle (body) Tissue Simulation Liquids MSL1750
Type No	SL AAM 175
Manufacturer	SPEAG
The item is composed of the following ingredients:	
H <sup>2</sup> O	Water, 52 – 75%
C8H18O3	Diethylene glycol monobutyl ether (DGBE), 25-48%
NaCl	Sodium Chloride, <1.0%

## 8. Liquid Parameters

The simulating liquids are checked at the beginning of a series of SAR measurements to determine if the dielectric parameters are within the tolerances of the specified target values. For frequencies in 300 MHz to just under 2 GHz, the measured conductivity and relative permittivity were within  $\pm 5\%$  of the target values. For frequencies above 2 GHz the measured conductivity was within  $\pm 5\%$  of the target values. The measured relative permittivity tolerance was within  $\pm 10\%$  of the target value.

### Reference Values of Tissue Dielectric Parameters for Head & Body Phantom

The body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations and extrapolated according to the head parameters specified in IEEE Standard 1528.

Target Frequency (MHz)	Head		Body	
	$\epsilon_r$	$\sigma$ (S/m)	$\epsilon_r$	$\sigma$ (S/m)
150	52.3	0.76	61.9	0.8
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
750	41.96	0.89	55.6	0.96
835	41.5	0.9	55.2	0.97
900	41.5	0.97	55	1.05
915	41.5	0.98	55	1.06
1450	40.5	1.2	54	1.3
1610	40.3	1.29	53.8	1.4
1750	40.08	1.37	53.44	1.49
1800 – 2000	40	1.4	53.3	1.52
2450	39.2	1.8	52.7	1.95
3000	38.5	2.4	52	2.73

( $\epsilon_r$  = relative permittivity,  $\sigma$  = conductivity and  $\rho = 1000 \text{ kg/m}^3$ )

### 8.1. Simulating Liquid Check Results

Date	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)	
10/20/2011	Body 1900	e'	52.7751	Relative Permittivity ( $\epsilon_r$ ):	52.78	53.30	-0.98	5
		e"	13.9020	Conductivity ( $\sigma$ ):	1.47	1.52	<b>-3.38</b>	5
10/20/2011	Body 835	e'	55.7772	Relative Permittivity ( $\epsilon_r$ ):	55.78	55.20	1.05	5
		e"	21.4555	Conductivity ( $\sigma$ ):	1.00	0.97	2.70	5
10/20/2011	Body 750	e'	54.5819	Relative Permittivity ( $\epsilon_r$ ):	54.58	55.55	-1.74	5
		e"	23.5233	Conductivity ( $\sigma$ ):	0.98	0.96	1.86	5
10/21/2011	Body 750	e'	54.4097	Relative Permittivity ( $\epsilon_r$ ):	54.41	55.55	-2.05	5
		e"	23.5778	Conductivity ( $\sigma$ ):	0.98	0.96	2.09	5
12/9/2011	Body 750	e'	54.5539	Relative Permittivity ( $\epsilon_r$ ):	54.55	55.55	-1.79	5
		e"	22.3228	Conductivity ( $\sigma$ ):	0.93	0.96	-3.34	5
	Body 775	e'	54.3102	Relative Permittivity ( $\epsilon_r$ ):	54.31	55.45	-2.06	5
		e"	22.1460	Conductivity ( $\sigma$ ):	0.95	0.97	-1.11	5
	Body 790	e'	54.1793	Relative Permittivity ( $\epsilon_r$ ):	54.18	55.39	-2.19	5
		e"	22.0447	Conductivity ( $\sigma$ ):	0.97	0.97	0.23	5
12/23/2011	Body 835	e'	52.6390	Relative Permittivity ( $\epsilon_r$ ):	52.64	55.20	-4.64	5
		e"	20.8310	Conductivity ( $\sigma$ ):	0.97	0.97	-0.29	5
	Body 820	e'	52.7977	Relative Permittivity ( $\epsilon_r$ ):	52.80	55.28	-4.49	5
		e"	20.8872	Conductivity ( $\sigma$ ):	0.95	0.97	-1.66	5
	Body 830	e'	52.6909	Relative Permittivity ( $\epsilon_r$ ):	52.69	55.24	-4.61	5
		e"	20.8483	Conductivity ( $\sigma$ ):	0.96	0.97	-0.73	5
Body 850	e'	52.4833	Relative Permittivity ( $\epsilon_r$ ):	52.48	55.16	<b>-4.85</b>	5	
	e"	20.7712	Conductivity ( $\sigma$ ):	0.98	0.99	-0.55	5	
12/23/2011	Body 1900	e'	51.4268	Relative Permittivity ( $\epsilon_r$ ):	51.43	53.30	-3.51	5
		e"	14.4269	Conductivity ( $\sigma$ ):	1.52	1.52	0.27	5
12/23/2011	Body 750	e'	57.8260	Relative Permittivity ( $\epsilon_r$ ):	57.83	55.55	4.10	5
		e"	23.0072	Conductivity ( $\sigma$ ):	0.96	0.96	-0.38	5
	Body 775	e'	57.5896	Relative Permittivity ( $\epsilon_r$ ):	57.59	55.45	3.86	5
		e"	23.0072	Conductivity ( $\sigma$ ):	0.99	0.97	2.74	5
	Body 790	e'	57.4481	Relative Permittivity ( $\epsilon_r$ ):	57.45	55.39	3.71	5
		e"	22.6931	Conductivity ( $\sigma$ ):	1.00	0.97	3.17	5
1/30/2012	Body 750	e'	55.0665	Relative Permittivity ( $\epsilon_r$ ):	55.07	55.55	-0.86	5
		e"	22.7611	Conductivity ( $\sigma$ ):	0.95	0.96	-1.44	5
	Body 775	e'	54.7831	Relative Permittivity ( $\epsilon_r$ ):	54.78	55.45	-1.20	5
		e"	22.6850	Conductivity ( $\sigma$ ):	0.98	0.97	1.30	5
	Body 790	e'	54.6238	Relative Permittivity ( $\epsilon_r$ ):	54.62	55.39	-1.39	5
		e"	22.5502	Conductivity ( $\sigma$ ):	0.99	0.97	2.53	5

## 9. System Verification

The system performance check is performed prior to any usage of the system in order to verify SAR system accuracy. The system performance check verifies that the system operates within its specifications of  $\pm 10\%$ .

### System Performance Check Measurement Conditions

- The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness:  $2.0 \pm 0.2$  mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.
- The DASY5 system with an Isotropic E-Field Probe EX3DV4 was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1 GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.  
 For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 7x7x7 (2.4 GHz) fine cube was chosen for cube integration and Special 8x8x10 (5 GHz) fine cube was chosen for cube integration
- Distance between probe sensors and phantom surface was set to 2.5 mm.  
 For 5 GHz band - Distance between probe sensors and phantom surface was set to 2.5 mm
- The dipole input powers (forward power) were 100 mW.
- The results are normalized to 1 W input power.

### Reference SAR Values for HEAD & BODY-tissue from calibration certificate of SPEAG.

System validation dipole	Cal. certificate #	Cal. date	SAR Avg (mW/g)			
			Tissue:	Freq.	Head	Body
D750V3 SN: 1019	D750V3-1019_Dec10	12/10/10	1g SAR:	750 MHz	8.16	8.64
			10g SAR:		5.32	5.76
D835V2 SN: 4d117	D835V2-4d117_Apr11	4/15/11	1g SAR:	835 MHz	9.64	10.1
			10g SAR:		6.28	6.6
D1900V2 SN: 5d140	D1900V2-5d140_Apr11	4/18/11	1g SAR:	1.9 GHz	41.6	41.2
			10g SAR:		21.5	21.6
D750V3 SN: 1024	D750V3-1024_Apr11	4/20/11	1g SAR:	750 MHz	8.52	8.8
			10g SAR:		5.56	5.84



### 9.1. System Check Results

System validation dipole	Date Tested	Measured (Normalized to 1 W)		Target	Delta (%)	Tolerance (%)
		Tissue:	Body			
D1900V2 SN: 5d140	10/20/11	1g SAR:	40.20	41.20	-2.43	±10
		10g SAR:	21.10	21.60	-2.31	
D835V2 SN: 4d117	10/20/11	1g SAR:	10.20	10.10	0.99	±10
		10g SAR:	6.70	6.60	1.52	
D750V3 SN: 1019	10/20/11	1g SAR:	9.30	8.64	7.64	±10
		10g SAR:	6.18	5.76	7.29	
D750V3 SN: 1019	10/21/11	1g SAR:	8.86	8.64	2.55	±10
		10g SAR:	5.85	5.76	1.56	
D750V3 SN: 1024	12/09/11	1g SAR:	8.93	8.64	3.36	±10
		10g SAR:	5.93	5.76	2.95	
D835V2 SN: 4d117	12/23/11	1g SAR:	10.10	10.10	0.00	±10
		10g SAR:	6.60	6.60	0.00	
D1900V2 SN: 5d140	12/23/11	1g SAR:	38.40	41.20	-6.80	±10
		10g SAR:	19.90	21.60	-7.87	
D750V3 SN: 1024	12/23/11	1g SAR:	9.16	8.64	6.02	±10
		10g SAR:	6.08	5.76	5.56	
D750V3 SN: 1024	01/30/12	1g SAR:	8.87	8.80	0.80	±10
		10g SAR:	5.88	5.84	0.68	

## 10. SAR Measurement Procedures

### Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The Minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the Distance of sensor calibration points to probe tip as defined in the probe properties.

### Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY5 software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

### Step 3: Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures  $\geq 7 \times 7 \times 9$  (above 4.5 GHz) or  $5 \times 5 \times 7$  (below 3 GHz) points within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

### Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

### Step 5: Z-Scan

The Z Scan measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. In order to get a reasonable extrapolation, the extrapolated distance should not be larger than the step size in Z-direction.

## 11. RF Output Power Verification

### 11.1. CDMA

#### 1xEV-Do - Release 0 (Rel. 0)

This procedure assumes the Agilent 8960 Test Set has the following applications installed and with valid license.

#### EVDO Release 0 - RTAP

- Call Setup > Shift & Preset
- Call Control:
  - Access Network Info > Cell Parameters > Sector ID > 00000000 : 00000000 : 00000000 : 00000000 > Subnet Mask > 0
  - Generator Info > Termination Parameters > Max Forward Packet Duration > 16 Slots
- Call Params:
  - Cell Power > -105.5 dBm/1.23 MHz
  - System ID: 2004; NID: 65535, Reg. Ch. #: 610 for Cell and 600 for PCS
  - Channel > (Enter channel number)
  - Application Config > Enhanced Test Application Protocol > RTAP
  - RTAP Rate > 153.6 kbps
  - Rvs Power Ctrl > Active bits
  - Protocol Rel > 0 (1xEV-DO)
- Press “Start Data Connection” when “Session Open” appear in “Active Cell”
- Rvs Power Ctrl > All Up bits (Maximum TxPout)

#### EVDO Release 0 - FTAP

- Call Setup > Shift & Preset
- Call Control:
  - Access Network Info > Cell Parameters > Sector ID > 00000000 : 00000000 : 00000000 : 00000000 > Subnet Mask > 0
  - Generator Info > Termination Parameters > Max Forward Packet Duration > 16 Slots
- Call Params:
  - Cell Power > -105.5 dBm/1.23 MHz
  - Cell Band > (Select US Cellular or US PCS)
  - Channel > (Enter channel number)
  - Application Config > Enhanced Test Application Protocol > FTAP (default)
  - FTAP Rate > 307.2 kbps (2 Slot, QPSK)
  - Rvs Power Ctrl > Active bits
  - Protocol Rel > 0 (1xEV-DO)
- Press “Start Data Connection” when “Session Open” appear in “Active Cell”
- Rvs Power Ctrl > All Up bits (Maximum TxPout)

Band	FTAP Rate	RTAP Rate	Channel	f (MHz)	Conducted power (dBm)	
					Average	Peak
Cell	307.2 kbps (2 slot, QPSK)	153.6 kbps	1013	824.70	25.32	
			384	836.52	25.30	
			777	848.31	25.30	
PCS	307.2 kbps (2 slot, QPSK)	153.6 kbps	25	1851.25	25.30	
			600	1880.00	24.74	
			1175	1908.75	25.29	

**1xEV-Do - Revision A (Rev. A)**

This procedure assumes the Agilent 8960 Test Set has the following applications installed and with valid license.

<u>Application</u>	<u>Rev. License</u>
1xEV-DO Terminal Test	A.09.13

**EVDO Rev. A – RETAP**

- Call Setup > Shift & Preset
- Cell Power > -60 dBm/1.23 MHz
- Protocol Rev > A (1xEV-DO-A)
- Application Config > Enhanced Test Application Protocol > RETAP
- R-Data Pkt Size > 4096
- Protocol Subtype Config > Release A Physical Layer Subtype > Subtype 2
- > PL Subtype 2 Access Channel MAC Subtype > Default (Subtype 0)
- Access Network Info > Cell Parameters > Sector ID > 00000000: 00000000: 00000000: 00000000  
> Subnet Mask > 0
- Generator Info > Termination Parameters > Max Forward Packet Duration >16 Slots  
> ACK R-Data After > Subpacket 0 (All ACK)
- Rvs Power Ctrl > All Up bits (to get the maximum power)

**EVDO Rev. A - FETAP**

- Call Setup > Shift & Preset
- Cell Power > -60 dBm/1.23 MHz
- Protocol Rev > A (1xEV-DO-A)
- Application Config > Enhanced Test Application Protocol > FETAP
- F-Traffic Format > 4 (1024, 2,128) Canonical (307.2k, QPSK)
- Protocol Subtype Config > Release A Physical Layer Subtype > Subtype 2
- > PL Subtype 2 Access Channel MAC Subtype > Default (Subtype 0)
- Access Network Info > Cell Parameters > Sector ID > 00000000: 00000000: 00000000: 00000000  
> Subnet Mask > 0
- Generator Info > Termination Parameters > Max Forward Packet Duration >16 Slots  
> ACK R-Data After > Subpacket 0 (All ACK)
- Rvs Power Ctrl > All Up bits (to get the maximum power)

Band	FETAP Traffic Format	RETAP Data Payload Size	Channel	f (MHz)	Conducted power (dBm)	
					Average	Peak
Cell	307.2k, QPSK/ ACK channel is transmitted at all the slots	4096	1013	824.70	25.31	
			384	836.52	25.28	
			777	848.31	25.25	
PCS	307.2k, QPSK/ ACK channel is transmitted at all the slots	4096	25	1851.25	25.29	
			600	1880.00	24.63	
			1175	1908.75	25.27	


**11.2. LTE Band 13**

BW	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Start	Target MPR	Measure MPR	Max. Avg. Power (dBm)
5	23205	779.5	QPSK	1	0	0	0	23.40
				1	24	0	0	23.76
				12	6	1	1	22.75
				25	0	1	1	22.58
			16QAM	1	0	1	1	22.62
				1	24	1	1	22.79
				12	6	2	2	21.92
				25	0	2	2	21.88
10	23230	782.0	QPSK	1	0	0	0	23.53
				1	49	0	0	23.41
				25	12	1	1	22.60
				50	0	1	1	22.57
			16QAM	1	0	1	1	22.62
				1	49	1	1	22.82
				25	12	2	2	21.67
				50	0	2	2	21.78
5	23255	784.5	QPSK	1	0	0	0	23.41
				1	24	0	0	23.53
				12	6	1	1	22.72
				25	0	1	1	22.65
			16QAM	1	0	1	1	22.70
				1	24	1	1	22.67
				12	6	2	2	21.85
				25	0	2	2	21.96

### 11.2.1. Spectrum Plots for the Test RB allocations


The following plots are to demonstrate the tested RB allocations have been established correctly at the maximum output power conditions.

**5MHz Band Width: RB Size = 1; RB Offset = 0**

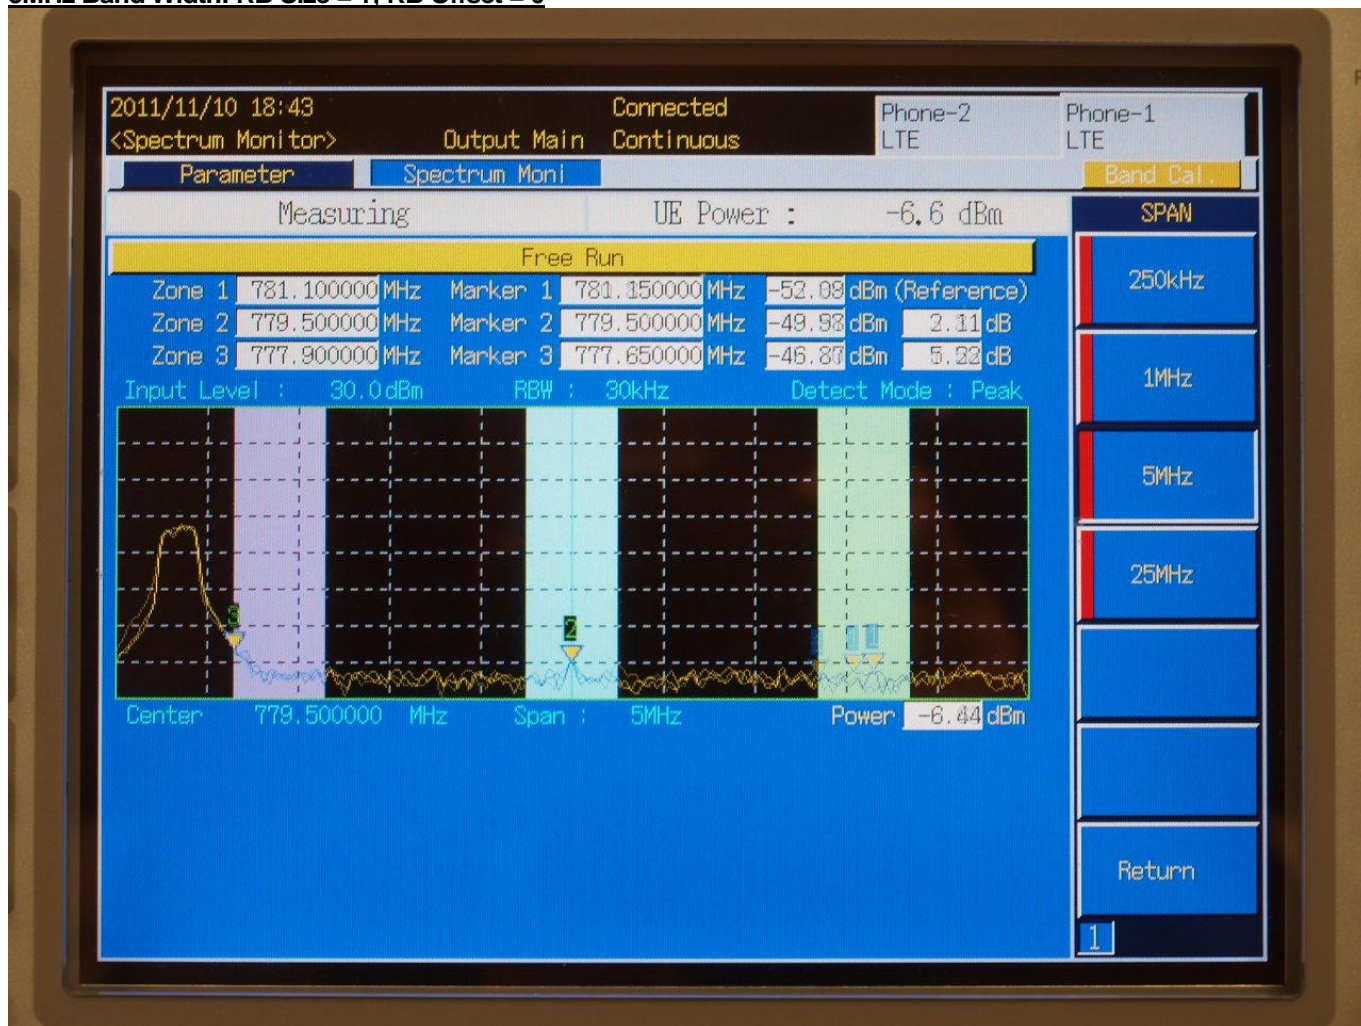



5MHz Band Width: RB Size = 1; RB Offset = 24

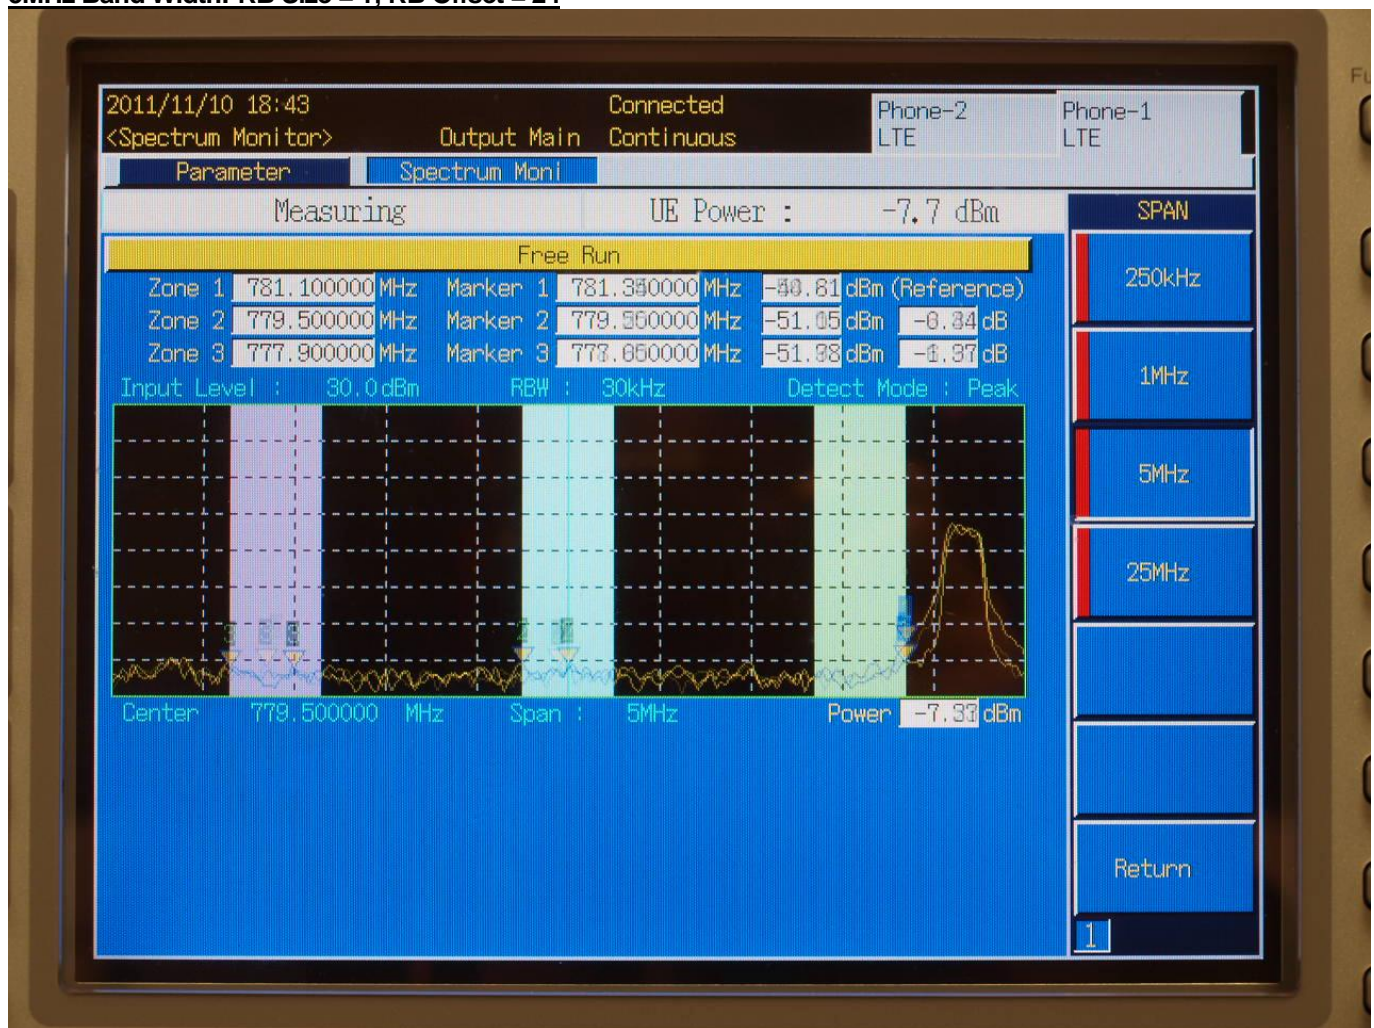


5MHz Band Width 50% RB: RB Size = 12; RB Offset = 6






10MHz Band Width: RB Size = 1; RB Offset = 0

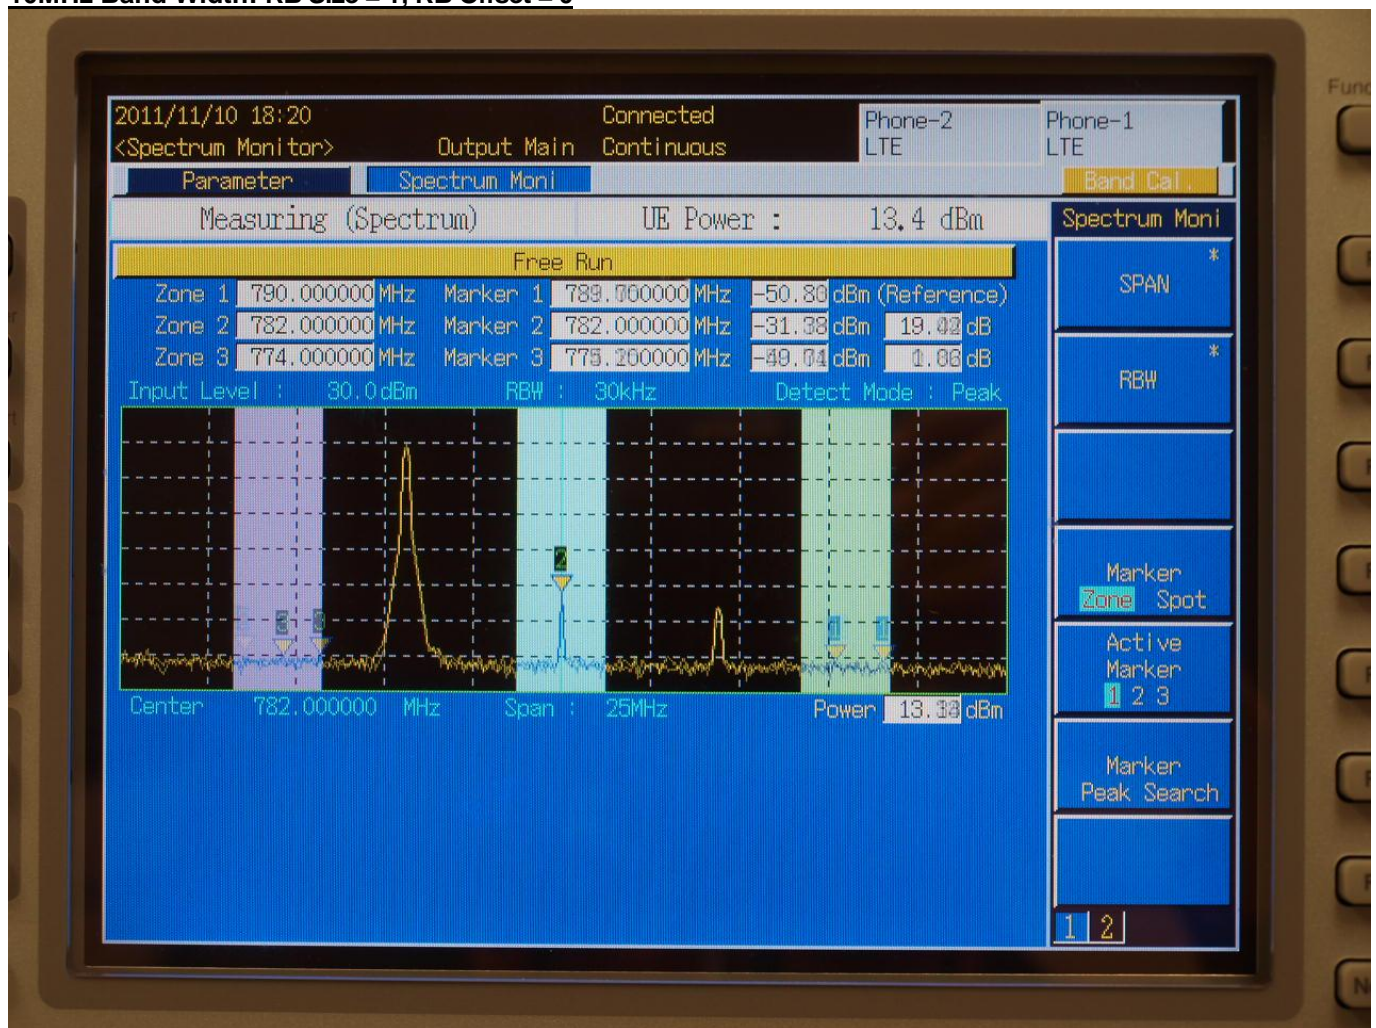


10MHz Band Width: RB Size = 1; RB Offset = 49

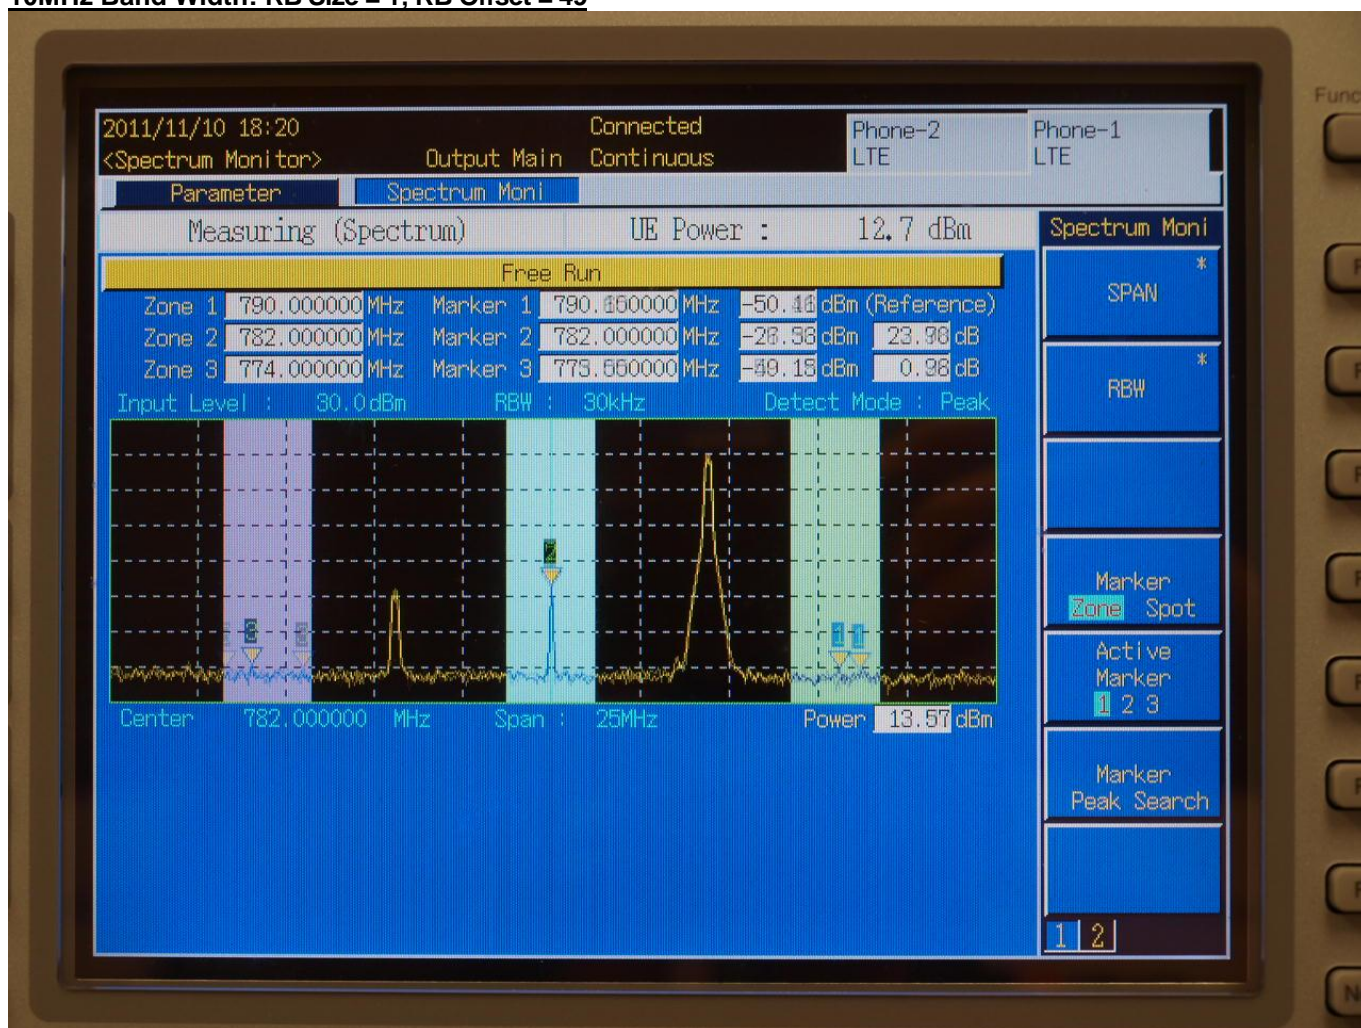




10MHz Band Width 50% RB: RB Size = 25; RB Offset = 12

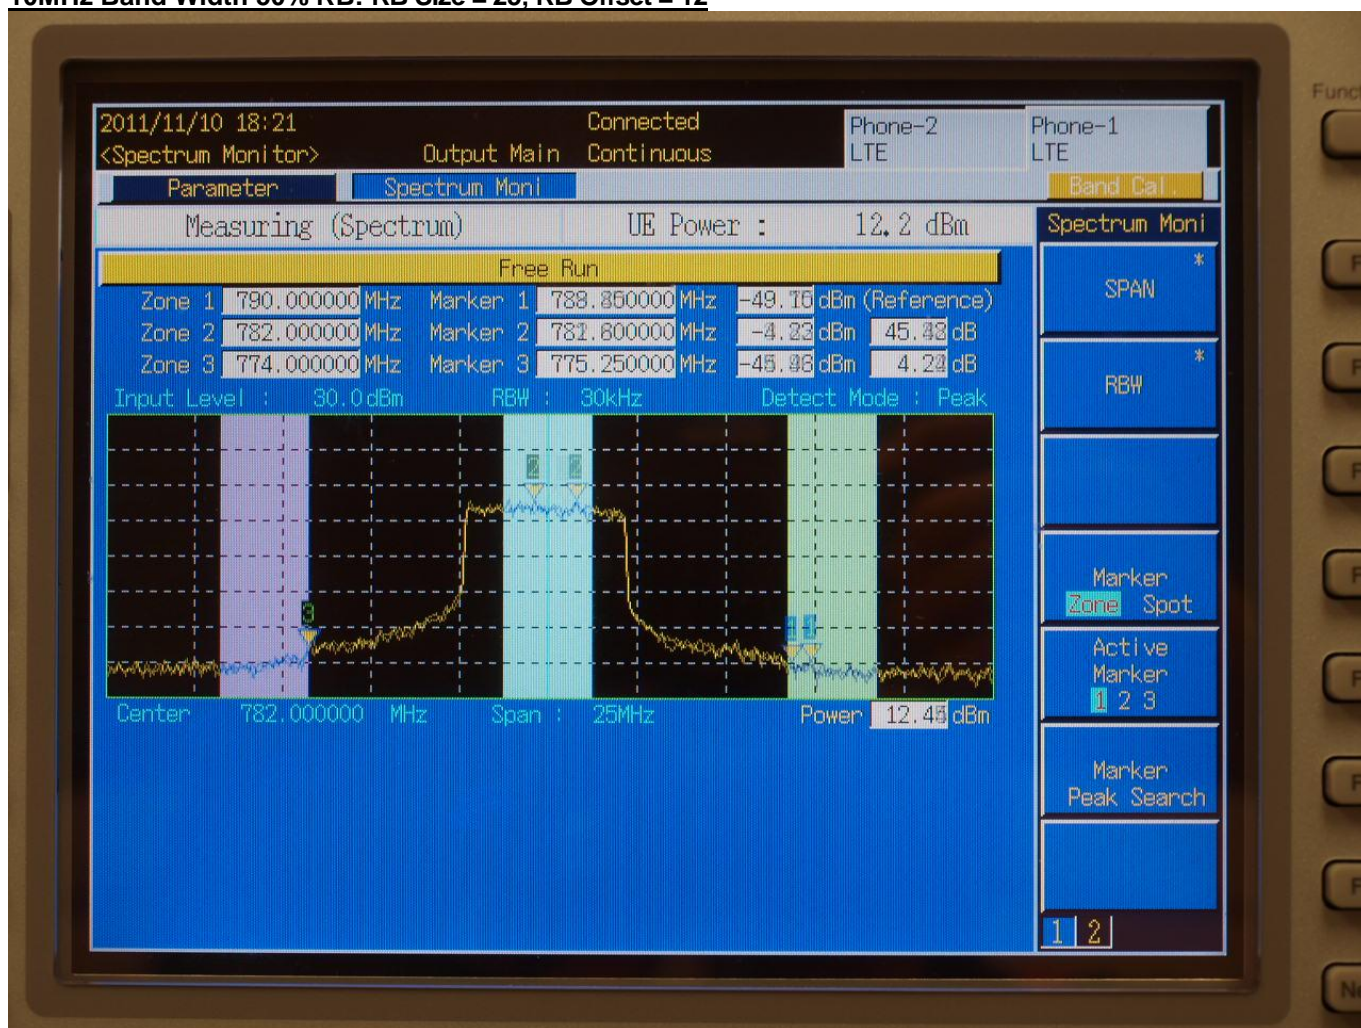

10MHz Band Width 100% RB: RB Size = 50; RB Offset = 0

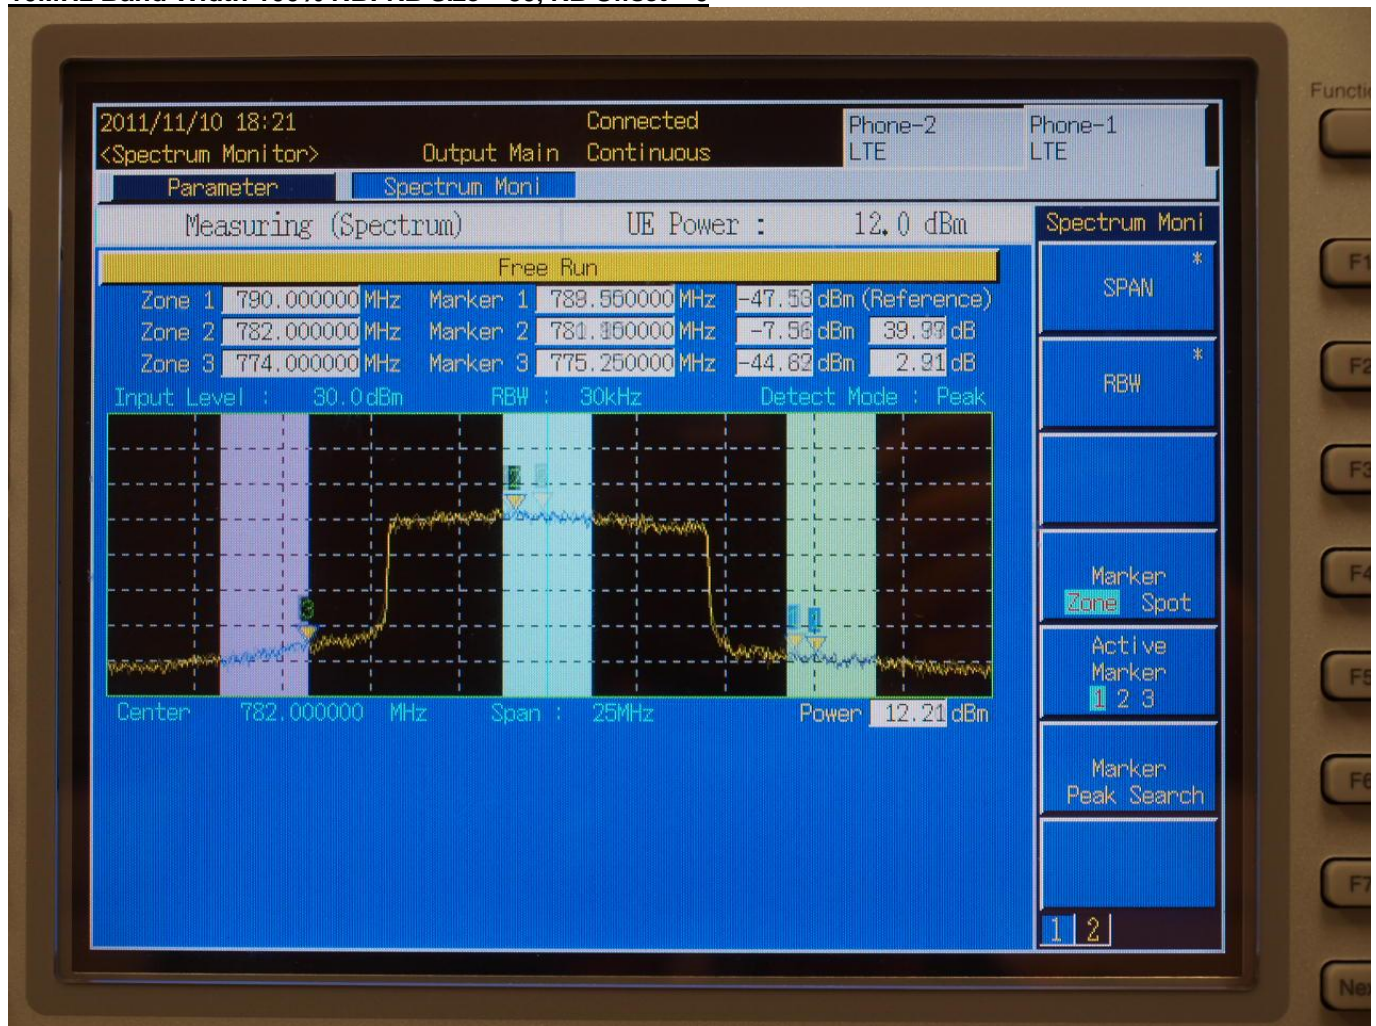

## 12. Summary of Test Results

### 12.1. CDMA2000 Cell and PCS Band

The following SAR is measured using Subtype 0/1 Physical Layer configurations for Rel. 0

#### Primary Portrait

Band	Mode	Ch No.	f (MHz)	Average Power	SAR (mW/g)	
					1-g	10-g
Cellular	1xEVDO (Rel. 0)	1013	824.70	25.32		
		384	836.52	25.30	0.247	0.160
		777	848.31	25.30		
PCS	1xEVDO (Rel. 0)	25	1851.25	25.30		
		600	1880.00	24.74	0.103	0.064
		1175	1908.75	25.29		

#### Secondary Landscape

Band	Mode	Ch No.	f (MHz)	Average Power	SAR (mW/g)	
					1-g	10-g
Cellular	1xEVDO (Rel. 0)	1013	824.70	25.32		
		384	836.52	25.30	0.071	0.048
		777	848.31	25.30		
PCS	1xEVDO (Rel. 0)	25	1851.25	25.30		
		600	1880.00	24.74	0.106	0.067
		1175	1908.75	25.29		

#### Base

Band	Mode	Ch No.	f (MHz)	Average Power	SAR (mW/g)	
					1-g	10-g
Cellular	1xEVDO (Rel. 0)	1013	824.70	25.32		
		384	836.52	25.30	0.040	0.030
		777	848.31	25.30		
PCS	1xEVDO (Rel. 0)	25	1851.25	25.30		
		600	1880.00	24.74	0.036	0.024
		1175	1908.75	25.29		

#### Base/Tilt

Band	Mode	Ch No.	f (MHz)	Average Power	SAR (mW/g)	
					1-g	10-g
Cellular	1xEVDO (Rel. 0)	1013	824.70	25.32		
		384	836.52	25.30	<b>0.450</b>	<b>0.311</b>
		777	848.31	25.30		
PCS	1xEVDO (Rel. 0)	25	1851.25	25.30		
		600	1880.00	24.74	<b>0.685</b>	<b>0.407</b>
		1175	1908.75	25.29		

#### Note(s):

- SAR for Subtype 2 Physical layer configurations is not required for Rev. A since the maximum average output of each RF channel is less than that measured in Subtype 0/1 Physical layer configurations as per KDB 941225 D01 SAR test for 3G devices v02.



## 12.2. LTE BAND 13

### Primary Portrait

SAR for 5MHz (Low and High Channel) is not needed. This is for optional testing only.

BAND 13, 10 MHz BW - Middle Channel

Mode	UL Ch #.	Freq. (MHz)	RB Size	RB Offset	Avg Pwr (dBm)	MPR	Separation Distance (mm)	SAR (mW/g)		Note
								1-g	10-g	
QPSK	23230	782	1	0	23.53	0	0	0.437	0.290	
QPSK	23230	782	1	49	23.41	0	0	0.355	0.235	
QPSK	23230	782	25	12	22.60	1	0	0.318	0.212	
QPSK	23230	782	50	0	22.57	1	0	0.307	0.205	
16QAM	23230	782	1	0	22.62	1	0	0.390	0.258	
16QAM	23230	782	1	49	22.82	1	0	0.307	0.204	
16QAM	23230	782	25	12	21.67	2	0	0.278	0.184	
16QAM	23230	782	50	0	21.78	2	0	0.251	0.167	

BAND 13, 5 MHz BW - Low Channel

Mode	UL Ch #.	Freq. (MHz)	RB Size	RB Offset	Avg Pwr (dBm)	MPR	Separation Distance (mm)	SAR (mW/g)		Note
								1-g	10-g	
QPSK	23205	779.5	1	0	23.40	0	0	<b>0.461</b>	<b>0.301</b>	
QPSK	23205	779.5	1	24	23.76	0	0	0.389	0.257	
QPSK	23205	779.5	12	6	22.75	1	0	0.346	0.229	
QPSK	23205	779.5	25	0	22.58	1	0	0.347	0.230	
16QAM	23205	779.5	1	0	22.62	1	0	0.393	0.260	
16QAM	23205	779.5	1	24	22.79	1	0	0.338	0.224	
16QAM	23205	779.5	12	6	21.92	2	0	0.278	0.184	
16QAM	23205	779.5	25	0	21.88	2	0	0.308	0.204	

BAND 13, 5 MHz BW - High Channel

Mode	UL Ch #.	Freq. (MHz)	RB Size	RB Offset	Avg Pwr (dBm)	MPR	Separation Distance (mm)	SAR (mW/g)		Note
								1-g	10-g	
QPSK	23255	784.5	1	0	23.41	0	0	0.378	0.250	
QPSK	23255	784.5	1	24	23.50	0	0	0.366	0.241	
QPSK	23255	784.5	12	6	22.72	1	0	0.287	0.192	
QPSK	23255	784.5	25	0	22.65	1	0	0.286	0.190	
16QAM	23255	784.5	1	0	22.70	1	0	0.330	0.219	
16QAM	23255	784.5	1	24	22.67	1	0	0.313	0.208	
16QAM	23255	784.5	12	6	21.85	2	0	0.233	0.154	
16QAM	23255	784.5	25	0	21.96	2	0	0.267	0.178	

**Secondary Landscape**

The test reduction for LTE SAR is based on KDB 941225 D05 SAR for LTE Devices v01.

**BAND 13, 10 MHz BW - Middle Channel**

Mode	UL Ch #.	Freq. (MHz)	RB Size	RB Offset	Avg Pwr (dBm)	MPR	Separation Distance (mm)	SAR (mW/g)		Note
								1-g	10-g	
QPSK	23230	782	1	0	23.53	0	0	0.084	0.056	
QPSK	23230	782	1	49	23.41	0	0	0.074	0.051	
QPSK	23230	782	25	12	22.60	1	0	0.055	0.037	
QPSK	23230	782	50	0	22.57	1	0			
16QAM	23230	782	1	0	22.62	1	0	0.044	0.031	
16QAM	23230	782	1	49	22.82	1	0	0.042	0.030	
16QAM	23230	782	25	12	21.67	2	0	0.039	0.027	
16QAM	23230	782	50	0	21.78	2	0			

**Base**

The test reduction for LTE SAR is based on KDB 941225 D05 SAR for LTE Devices v01.

**BAND 13, 10 MHz BW - Middle Channel**

Mode	UL Ch #.	Freq. (MHz)	RB Size	RB Offset	Avg Pwr (dBm)	MPR	Separation Distance (mm)	SAR (mW/g)		Note
								1-g	10-g	
QPSK	23230	782	1	0	23.53	0	0	0.051	0.038	
QPSK	23230	782	1	49	23.41	0	0	0.044	0.033	
QPSK	23230	782	25	12	22.60	1	0	0.036	0.027	
QPSK	23230	782	50	0	22.57	1	0			
16QAM	23230	782	1	0	22.62	1	0	0.052	0.039	
16QAM	23230	782	1	49	22.82	1	0	0.044	0.033	
16QAM	23230	782	25	12	21.67	2	0	0.043	0.033	
16QAM	23230	782	50	0	21.78	2	0			

**Base/Tilt**

The test reduction for LTE SAR is based on KDB 941225 D05 SAR for LTE Devices v01.

**BAND 13, 10 MHz BW - Middle Channel**

Mode	UL Ch #.	Freq. (MHz)	RB Size	RB Offset	Avg Pwr (dBm)	MPR	Separation Distance (mm)	SAR (mW/g)		Note
								1-g	10-g	
QPSK	23230	782	1	0	23.53	0	0	0.577	0.404	
QPSK	23230	782	1	49	23.41	0	0	0.524	0.369	
QPSK	23230	782	25	12	22.60	1	0	0.390	0.274	
QPSK	23230	782	50	0	22.57	1	0			
16QAM	23230	782	1	0	22.62	1	0	0.299	0.218	
16QAM	23230	782	1	49	22.82	1	0	0.288	0.205	
16QAM	23230	782	25	12	21.67	2	0	0.267	0.189	
16QAM	23230	782	50	0	21.78	2	0			

### 13. Simultaneous Transmission SAR Analysis

**WWAN + WiFi 2.4 GHz**

Test Configuration	(1) CDMA cell	(2) CDMA PCS	(3) LTE Band 13	(4) WiFi Main	(5) WiFi Aux	Sum of 1g SAR (mW/g)
Base	0.040			0.021	0.05	0.111
		0.036		0.021	0.05	0.107
			0.052	0.021	0.05	0.123
Base/Tilt	0.450			0.065		0.515
		0.685		0.065		0.750
			0.577	0.065		0.642
Primary Portrait	0.247				0.173	0.420
		0.103			0.173	0.276
			0.461		0.173	0.634

**WWAN + WiFi 5.2 GHz**

Test Configuration	(1) CDMA cell	(2) CDMA PCS	(3) LTE Band 13	(4) WiFi Main	(5) WiFi Aux	Sum of 1g SAR (mW/g)
Base	0.040			0.022	0.118	0.180
		0.036		0.022	0.118	0.176
			0.052	0.022	0.118	0.192
Base/Tilt	0.450			0.253		0.703
		0.685		0.253		0.938
			0.577	0.253		0.830
Primary Portrait	0.247				0.297	0.544
		0.103			0.297	0.400
			0.461		0.297	0.758

**WWAN + WiFi 5.3 GHz**

Test Configuration	(1) CDMA cell	(2) CDMA PCS	(3) LTE Band 13	(4) WiFi Main	(5) WiFi Aux	Sum of 1g SAR (mW/g)
Base	0.040			0.025	0.180	0.245
		0.036		0.025	0.180	0.241
			0.052	0.025	0.180	0.257
Base/Tilt	0.450			0.265		0.715
		0.685		0.265		0.950
			0.577	0.265		0.842
Primary Portrait	0.247				0.471	0.718
		0.103			0.471	0.574
			0.461		0.471	0.932



**WWAN + WiFi 5.5 GHz**

Test Configuration	(1) CDMA cell	(2) CDMA PCS	(3) LTE Band 13	(4) WiFi Main	(5) WiFi Aux	Sum of 1g SAR (mW/g)
Base	0.040			0.031	0.130	0.201
		0.036		0.031	0.130	0.197
			0.052	0.031	0.130	0.213
Base/Tilt	0.450			0.411		0.861
		0.685		0.411		1.096
			0.577	0.411		0.988
Primary Portrait	0.247				0.557	0.804
		0.103			0.557	0.660
			0.461		0.557	1.018

**WWAN + WiFi 5.8 GHz**

Test Configuration	(1) CDMA cell	(2) CDMA PCS	(3) LTE Band 13	(4) WiFi Main	(5) WiFi Aux	Sum of 1g SAR (mW/g)
Base	0.040			0.024	0.151	0.215
		0.036		0.024	0.151	0.211
			0.052	0.024	0.151	0.227
Base/Tilt	0.450			0.295		0.745
		0.685		0.295		0.980
			0.577	0.295		0.872
Primary Portrait	0.247				0.681	0.928
		0.103			0.681	0.784
			0.461		0.681	1.142

**Note(s)**

- \*: WiFi max. 1g SAR from SAR report "11J13820-4 SAR report" submitted under FCC ID: ACJ9TGWL11A (Panasonic Corporation of North America).  
 This WiFi module supports MIMO operation in all bands in 802.11n modes and the simultaneous evaluation has included an evaluation with both WLAN antennas operational with the WWAN antenna based on the worst case SAR in each band for each individual WLAN antenna.
- The RFID transmitter (RFID transmitter, which is approved under FCC ID ACJ9TGRI11A against FCC Part 15C (15.225) with a field strength at the operating frequency of 13.56MHz of 56.94dBuV/m @ 30m. This device is not subject to SAR test requirements based on the low operating power and excluded from simultaneous SAR evaluation for this reason.

**Conclusion:**

Simultaneous transmission SAR is not required because the sum of the 1-g SAR is < 1.6 W/kg

## 14. Appendixes

Refer to separated files for the following appendixes

- 14.1. **Appendix A: System Check Plots**
- 14.2. **Appendix B: SAR Test Plots for CDMA 2000**
- 14.3. **Appendix C: SAR Test Plots for LTE Band 13**
- 14.4. **Appendix D: Calibration Certificate for EX3DV4 SN 3686**
- 14.5. **Appendix E: Calibration Certificate for EX3DV4 SN 3773**
- 14.6. **Appendix F: Calibration Certificate for EX3DV4 SN 3772**
- 14.7. **Appendix G: Calibration Certificate for D750V3 SN1019**
- 14.8. **Appendix H: Calibration Certificate for D750V3 SN1024**
- 14.9. **Appendix I: Calibration Certificate for D835V2 SN 4d117**
- 14.10. **Appendix J: Calibration Certificate for D1900V2 SN 5d140**

## 15. Summary of Test configurations

Configuration	Antenna-to-User distance	SAR Require	Comments
<b>(1) Bottom/Base</b>	78.8 mm From WWAN antenna to user.	Yes	
<b>(2) Bottom/Base/Tilt</b>	8 mm From WWAN antenna to user.	Yes	The handle is not-removable and that is why the tilt position was used rather than a touch position during testing.
Primary Landscape	215 mm From WWAN antenna to user.	No	This is not the most conservative antenna to user distance.
<b>(3) Secondary Landscape</b>	11 mm From WWAN antenna to user.	Yes	
Secondary Portrait	220 mm From WWAN antenna to user.	No	This is not the most conservative antenna to user distance.
<b>(4) Primary Portrait</b>	13 mm From WWAN antenna to user.	Yes	