

Test Laboratory: UL CCS

## Nearby person

DUT: Fujitsu-Australia; Type: NA; Serial: NA

Communication System: CDMA Cell Band; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 836.52$  MHz;  $\sigma = 1.002$  mho/m;  $\epsilon_r = 55.412$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(8.78, 8.78, 8.78); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

**CDMA2000 (850)/1xRTT\_M-ch\_Ant retracted/Area Scan (11x12x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0074 mW/g

**CDMA2000 (850)/1xRTT\_M-ch\_Ant retracted/Zoom Scan 2 (7x7x9)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=3mm


Reference Value = 1.048 V/m; Power Drift = -0.181 dB

Peak SAR (extrapolated) = 0.010 W/kg

**SAR(1 g) = 0.00508 mW/g; SAR(10 g) = 0.00304 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.00684 mW/g

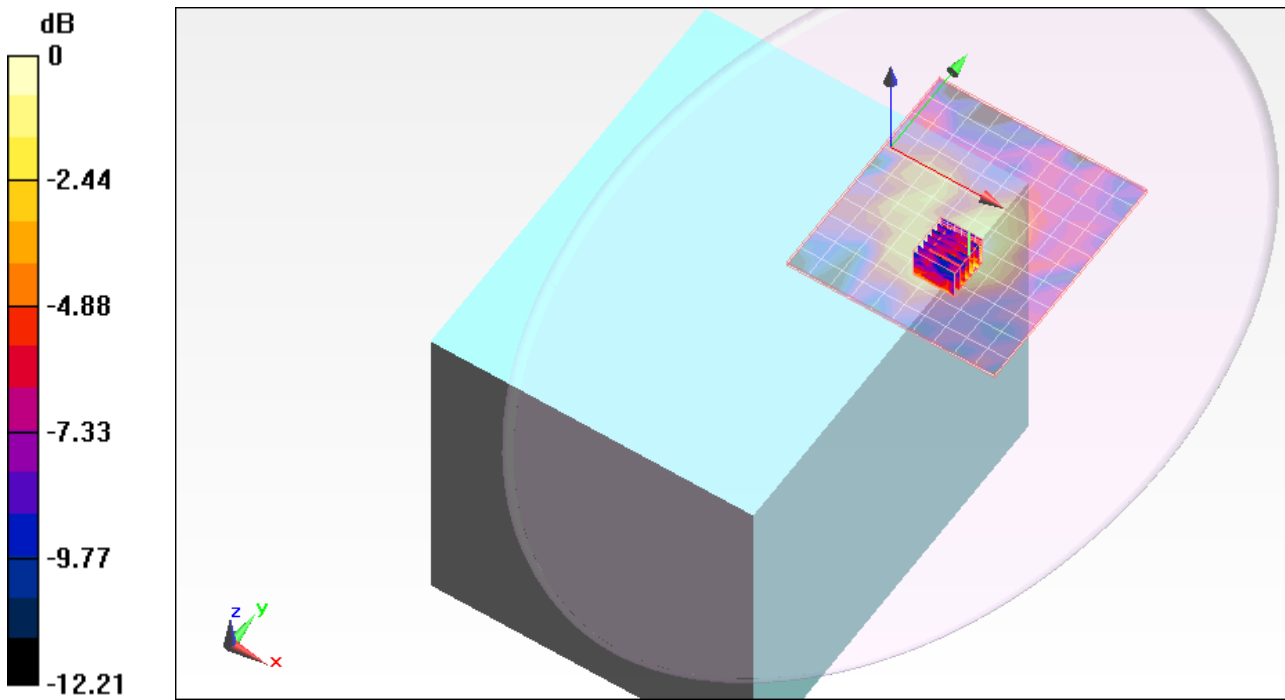

0 dB = 0.0068mW/g

Test Laboratory: UL CCS

## Nearby person

DUT: Fujitsu-Australia; Type: NA; Serial: NA

Communication System: CDMA Cell Band; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 836.52$  MHz;  $\sigma = 1.002$  mho/m;  $\epsilon_r = 55.412$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(8.78, 8.78, 8.78); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

**CDMA2000 (850)/1xRTT\_M-ch\_Ant extracted/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.414 mW/g

**CDMA2000 (850)/1xRTT\_M-ch\_Ant extracted/Zoom Scan (7x7x9)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=3mm


Reference Value = 9.825 V/m; Power Drift = 0.0011 dB

Peak SAR (extrapolated) = 0.512 W/kg

**SAR(1 g) = 0.363 mW/g; SAR(10 g) = 0.255 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.427 mW/g

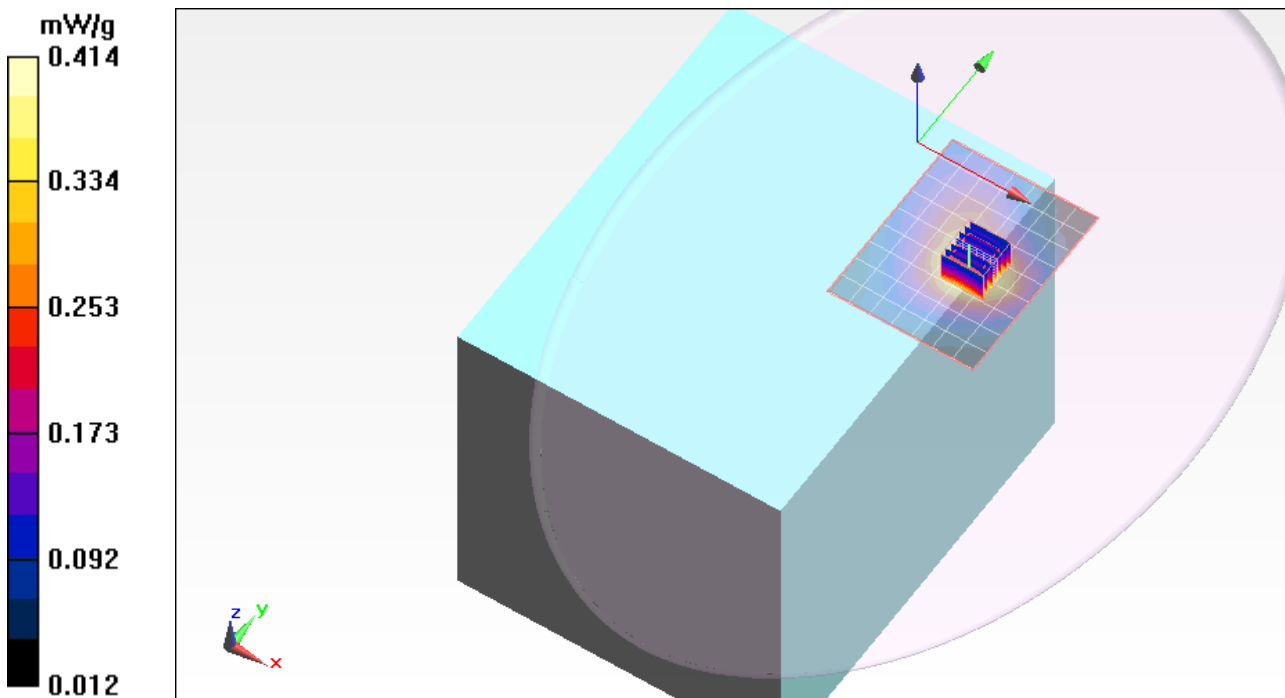

Test Laboratory: UL CCS

## Nearby person


DUT: Fujitsu-Australia; Type: NA; Serial: NA

Communication System: CDMA Cell Band; Frequency: 836.52 MHz; Duty Cycle: 1:1

**CDMA2000 (850)/1xRTT\_M-ch\_Ant extracted/Z Scan (1x1x21):** Measurement grid: dx=20mm, dy=20mm, dz=5mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.095 mW/g

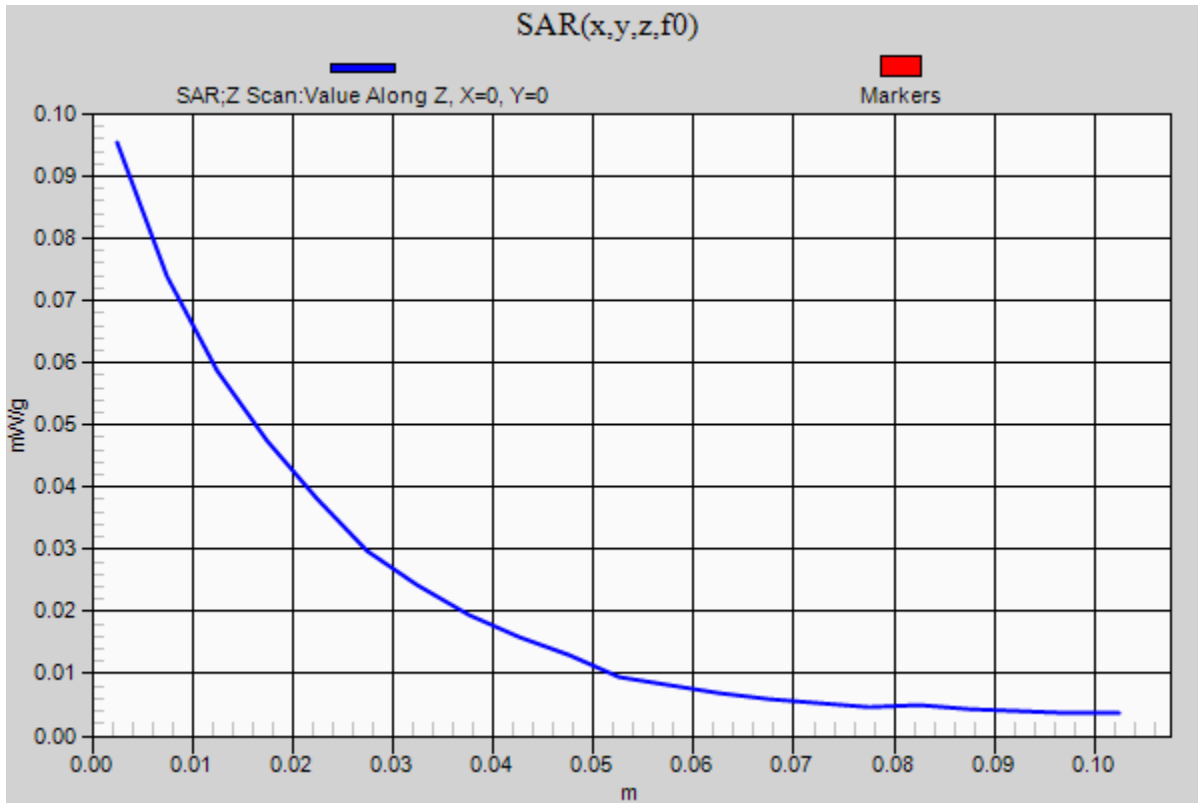

Test Laboratory: UL CCS

## Nearby person

DUT: Fujitsu-Australia; Type: NA; Serial: NA

Communication System: CDMA Cell Band; Frequency: 836.52 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 836.52$  MHz;  $\sigma = 1.002$  mho/m;  $\epsilon_r = 55.412$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(8.78, 8.78, 8.78); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

**CDMA2000 (850)/1xEVDO\_M-ch\_Ant retracted/Area Scan (11x12x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.00534 mW/g

**CDMA2000 (850)/1xEVDO\_M-ch\_Ant retracted/Zoom Scan (7x8x9)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=3mm


Reference Value = 1.146 V/m; Power Drift = 0.178 dB

Peak SAR (extrapolated) = 0.013 W/kg

**SAR(1 g) = 0.00466 mW/g; SAR(10 g) = 0.0034 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.00589 mW/g

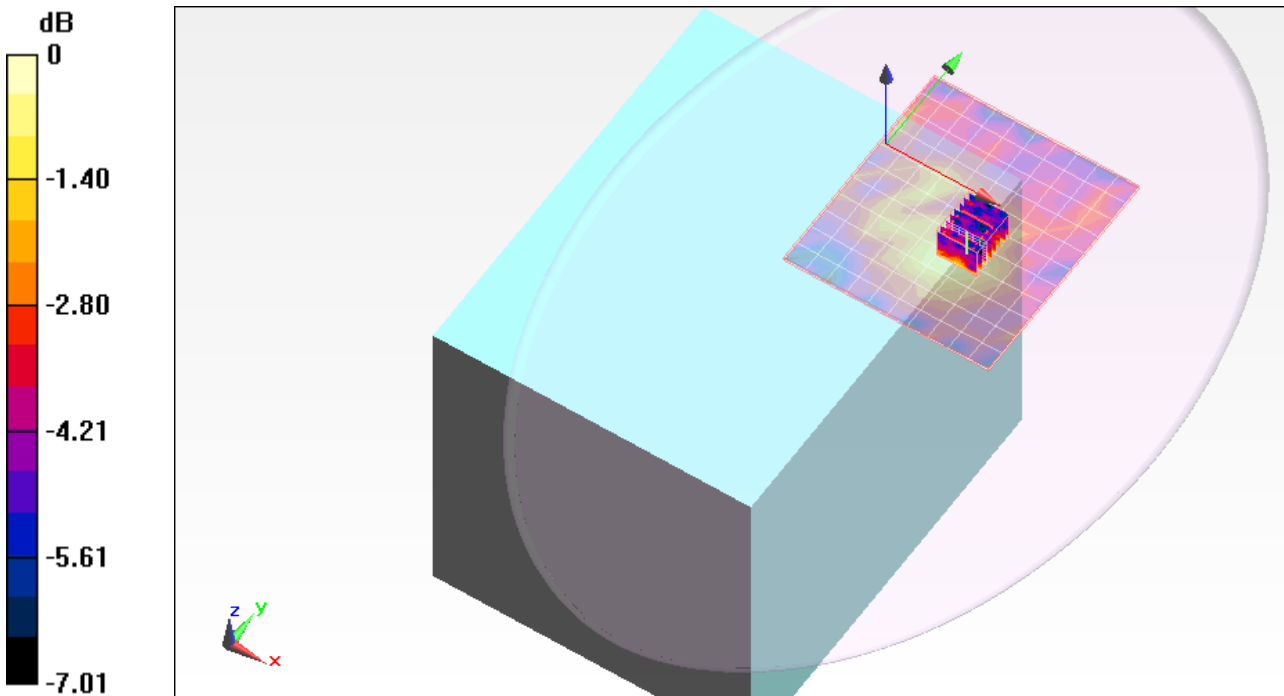

0 dB = 0.0059mW/g

Test Laboratory: UL CCS

**Nearby person**

DUT: Fujitsu-Australia; Type: NA; Serial: NA

Communication System: CDMA Cell Band; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 836.52$  MHz;  $\sigma = 1.002$  mho/m;  $\epsilon_r = 55.412$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(8.78, 8.78, 8.78); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

**CDMA2000 (850)/1xEVDO\_M-ch\_Ant extracted/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.423 mW/g

**CDMA2000 (850)/1xEVDO\_M-ch\_Ant extracted/Zoom Scan (7x7x9)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=3mm


Reference Value = 9.835 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.507 W/kg

**SAR(1 g) = 0.361 mW/g; SAR(10 g) = 0.254 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.425 mW/g

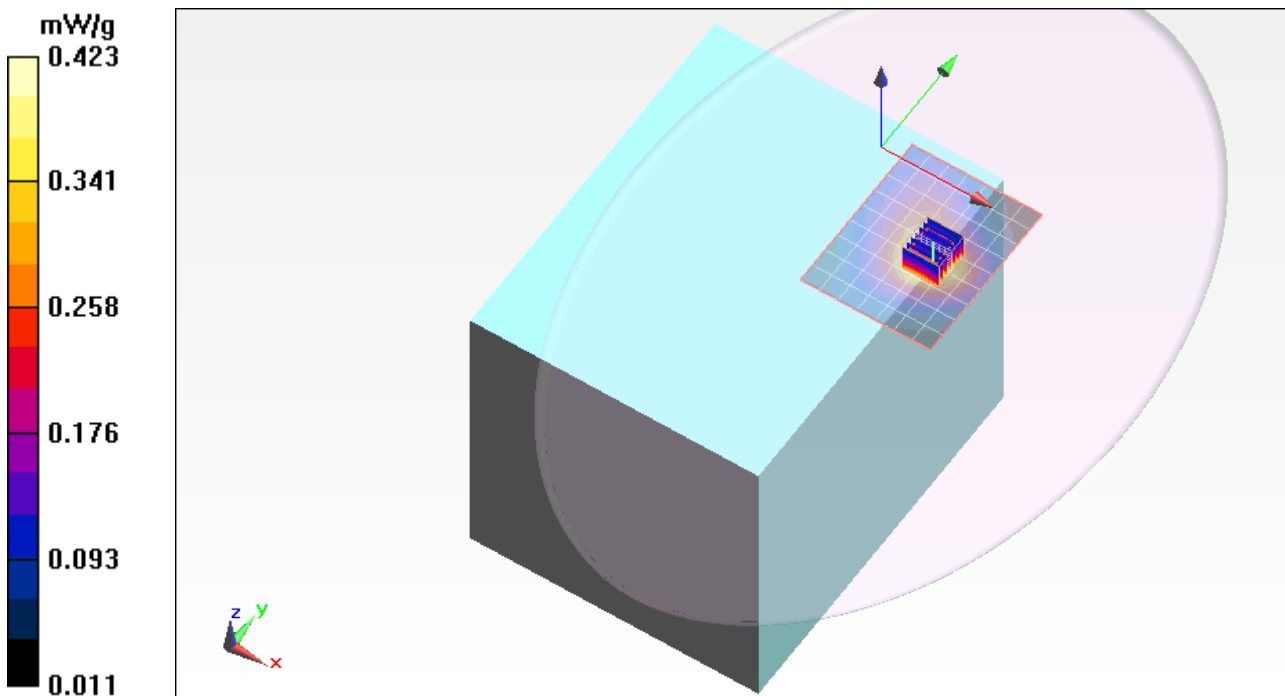

Test Laboratory: UL CCS

### Bottom face

DUT: Fujitsu-Australia; Type: NA; Serial: NA

Communication System: CDMA Cell Band; Frequency: 836.52 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 836.52$  MHz;  $\sigma = 1.002$  mho/m;  $\epsilon_r = 55.412$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(8.78, 8.78, 8.78); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

**CDMA2000 (850)/1xRTT\_M-ch\_Ant retracted/Area Scan (8x12x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.00821 mW/g

**CDMA2000 (850)/1xRTT\_M-ch\_Ant retracted/Zoom Scan (7x7x9)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=3mm


Reference Value = 2.337 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.011 W/kg

**SAR(1 g) = 0.00738 mW/g; SAR(10 g) = 0.00685 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.00851 mW/g

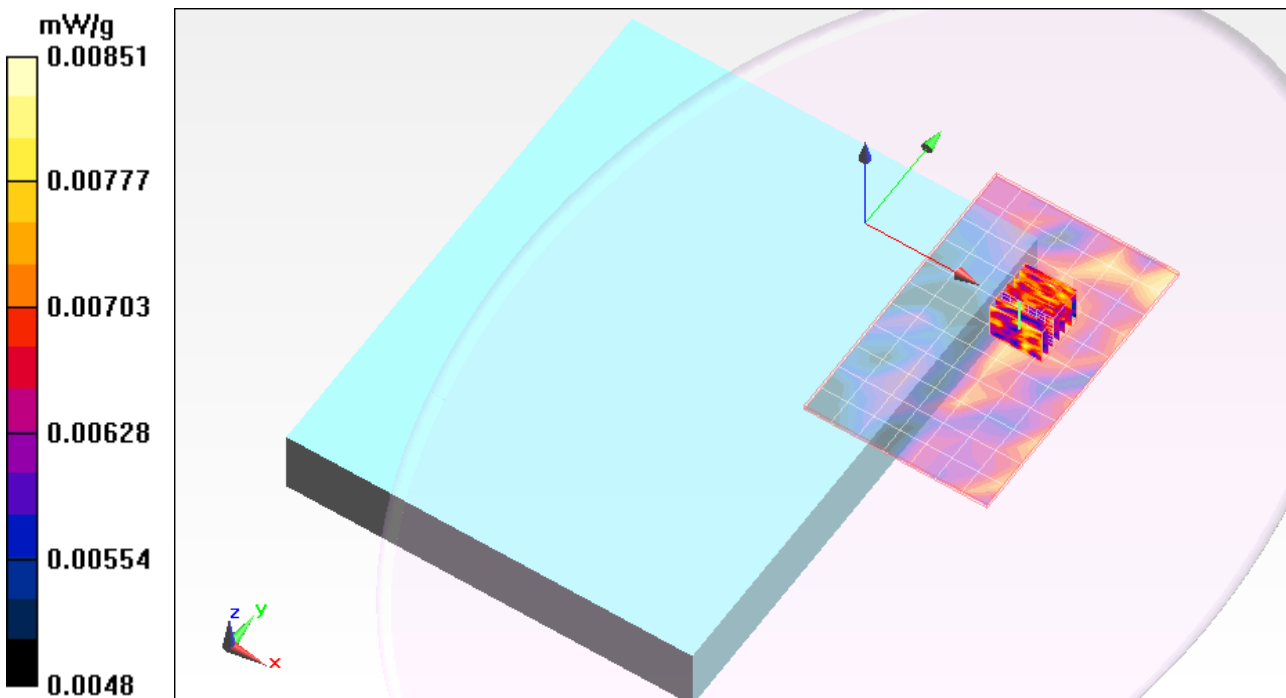

Test Laboratory: UL CCS

**Bottom face**

DUT: Fujitsu-Australia; Type: NA; Serial: NA

Communication System: CDMA Cell Band ; Frequency: 836.52 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 836.52$  MHz;  $\sigma = 1.002$  mho/m;  $\epsilon_r = 55.412$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(8.78, 8.78, 8.78); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.6 (1);SEMCAD X Version 14.4.2 (2595)

**CDMA2000 (850)/1xRTT\_M-ch\_Ant extracted/Area Scan (10x10x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.411 mW/g

**CDMA2000 (850)/1xRTT\_M-ch\_Ant extracted/Zoom Scan (8x7x9)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=3mm


Reference Value = 19.430 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.773 W/kg

**SAR(1 g) = 0.350 mW/g; SAR(10 g) = 0.249 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.417 mW/g

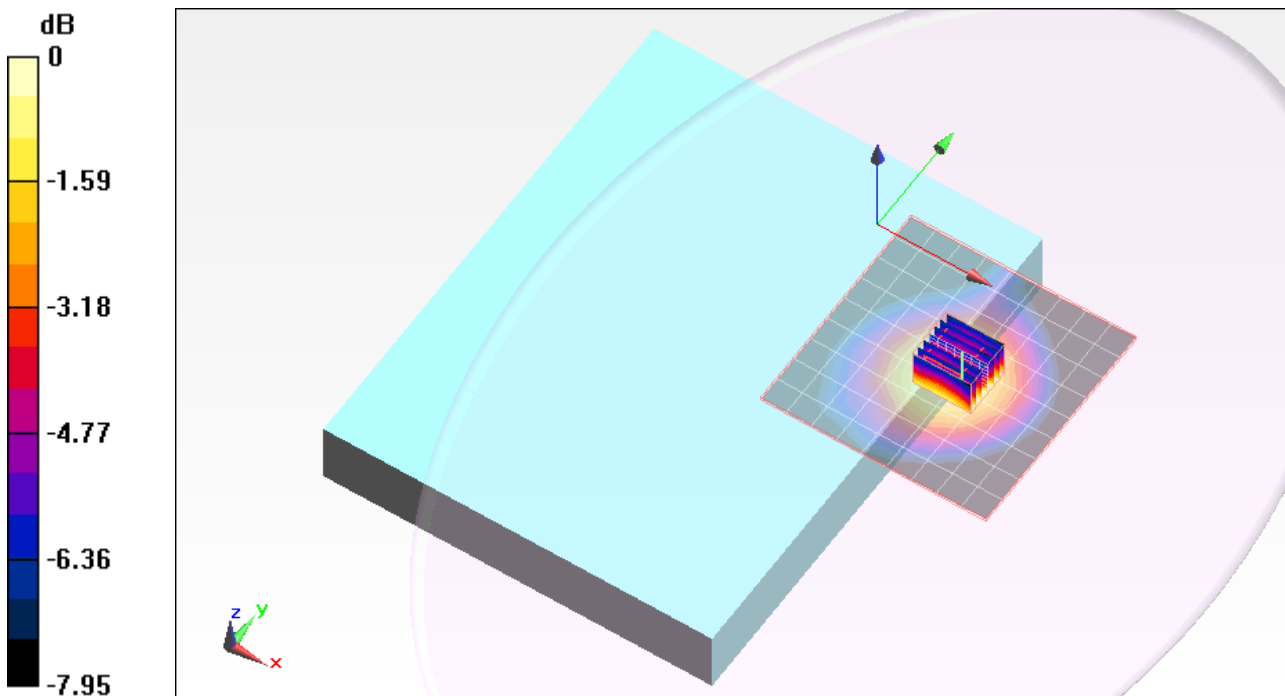

0 dB = 0.420mW/g

Test Laboratory: UL CCS

### Bottom face

DUT: Fujitsu-Australia; Type: NA; Serial: NA

Communication System: CDMA Cell Band; Frequency: 836.52 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 836.52$  MHz;  $\sigma = 1.002$  mho/m;  $\epsilon_r = 55.412$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(8.78, 8.78, 8.78); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

**CDMA2000 (850)/1xEVDO\_M-ch\_Ant retracted/Area Scan (10x13x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0087 mW/g

**CDMA2000 (850)/1xEVDO\_M-ch\_Ant retracted/Zoom Scan (7x7x9)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=3mm


Reference Value = 2.468 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.194 W/kg

**SAR(1 g) = 0.0021 mW/g; SAR(10 g) = 0.000271 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.073 mW/g

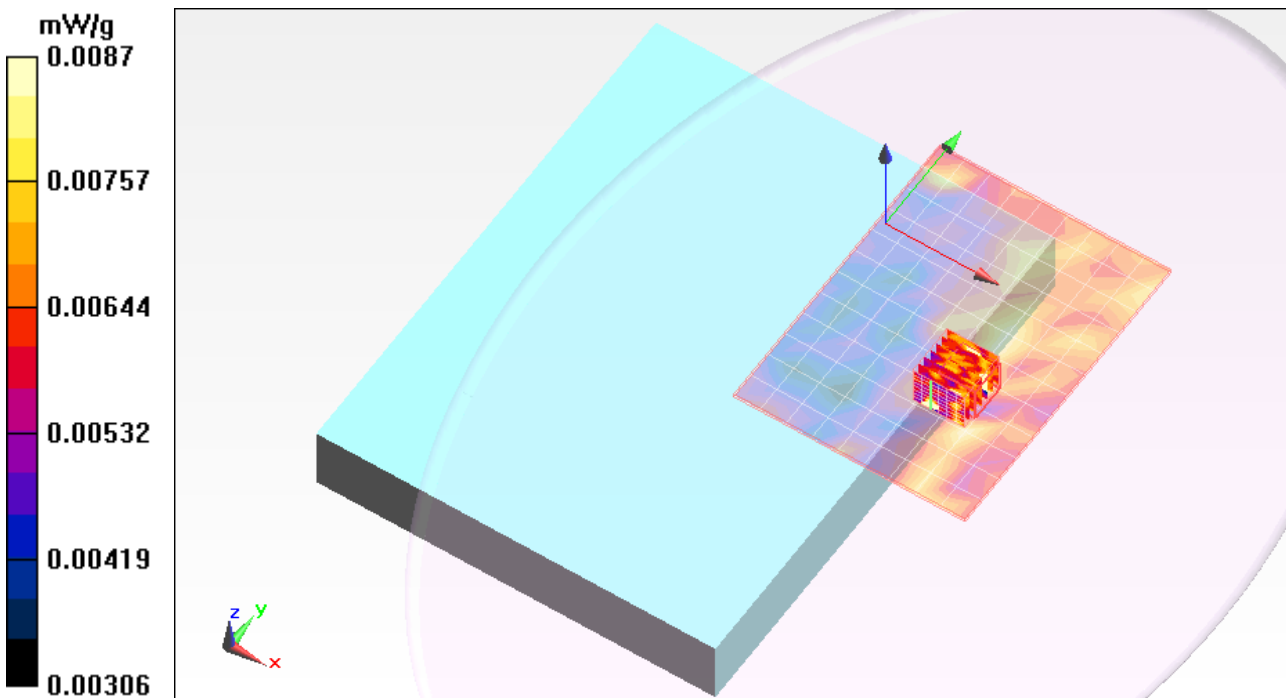



Test Laboratory: UL CCS

### Bottom face

DUT: Fujitsu-Australia; Type: NA; Serial: NA


Communication System: CDMA Cell Band ; Frequency: 836.52 MHz;Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 836.52$  MHz;  $\sigma = 1.002$  mho/m;  $\epsilon_r = 55.412$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

- DASY5 Configuration:
- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
  - Probe: EX3DV4 - SN3686; ConvF(8.78, 8.78, 8.78); Calibrated: 1/24/2011
  - Sensor-Surface: 2.5mm (Mechanical Surface Detection)
  - Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
  - Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
  - Measurement SW: DASY52, Version 52.6 (1);SEMCAD X Version 14.4.2 (2595)

**CDMA2000 (850)/1xEVDO\_M-ch\_Ant extracted/Area Scan (10x10x1):** Measurement grid: dx=15mm, dy=15mm  
[Info: Interpolated medium parameters used for SAR evaluation.](#)  
Maximum value of SAR (measured) = 0.414 mW/g

**CDMA2000 (850)/1xEVDO\_M-ch\_Ant extracted/Zoom Scan (8x7x9)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=3mm  
Reference Value = 19.677 V/m; Power Drift = 0.22 dB  
Peak SAR (extrapolated) = 0.498 W/kg  
**SAR(1 g) = 0.358 mW/g; SAR(10 g) = 0.252 mW/g**  
[Info: Interpolated medium parameters used for SAR evaluation.](#)  
Maximum value of SAR (measured) = 0.430 mW/g

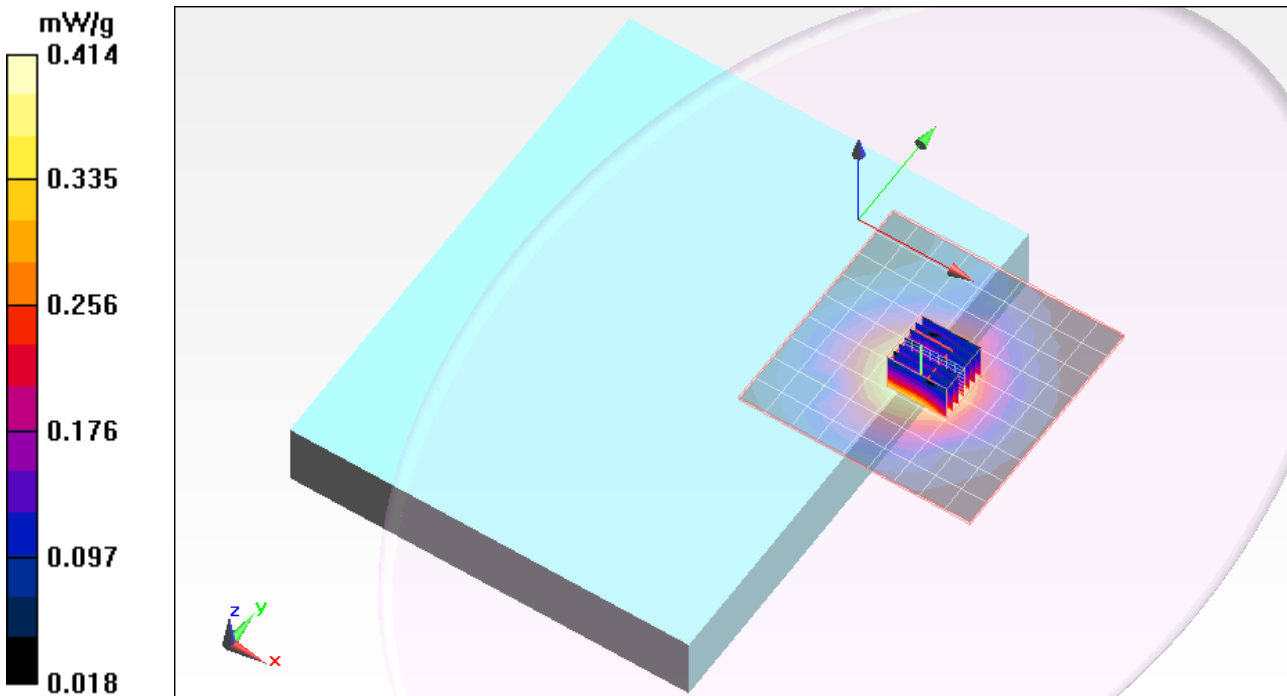

Test Laboratory: UL CCS

## Secondary Landscape

DUT: Fujitsu-Australia; Type: NA; Serial: NA

Communication System: CDMA Cell Band; Frequency: 836.52 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 836.52$  MHz;  $\sigma = 0.995$  mho/m;  $\epsilon_r = 54.673$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(8.78, 8.78, 8.78); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

**CDMA2000 (850)/1xRTT\_M-ch\_Ant retracted/Area Scan (7x12x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.172 mW/g

**CDMA2000 (850)/1xRTT\_M-ch\_Ant retracted/Zoom Scan (7x7x9)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=3mm


Reference Value = 13.184 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.893 W/kg

**SAR(1 g) = 0.252 mW/g; SAR(10 g) = 0.101 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.417 mW/g

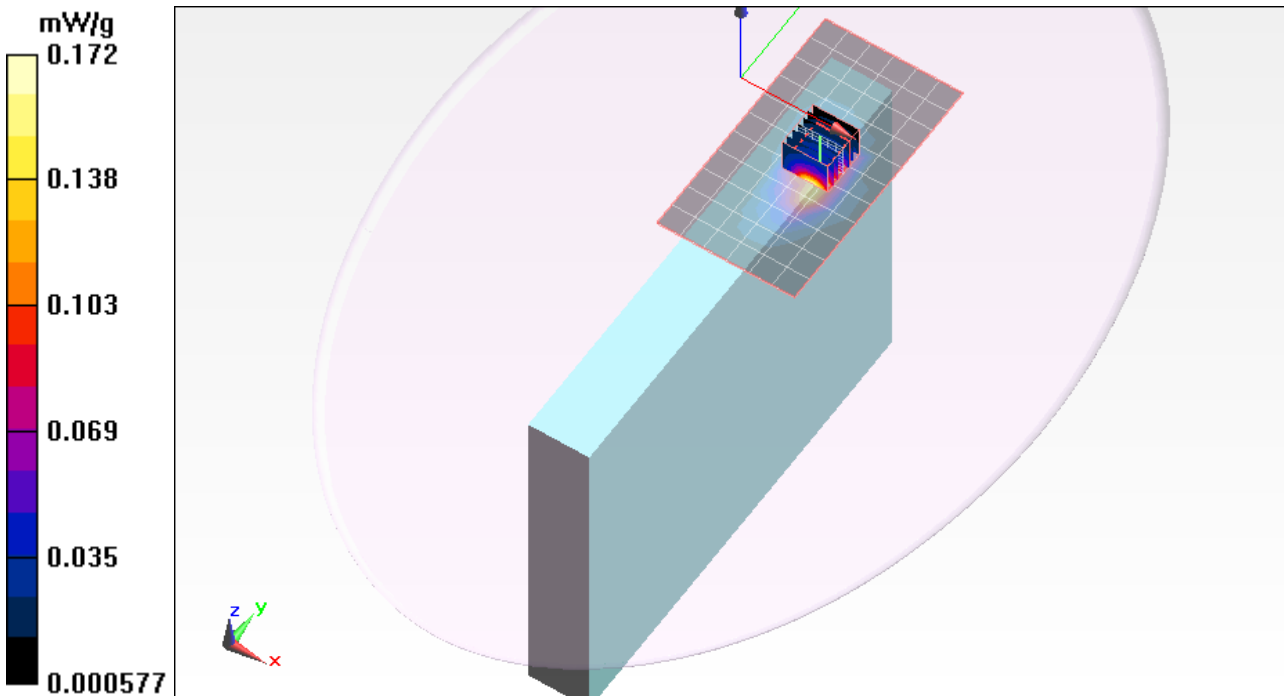

Test Laboratory: UL CCS

## Secondary Landscape

DUT: Fujitsu-Australia; Type: NA; Serial: NA

Communication System: CDMA Cell Band; Frequency: 836.52 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 836.52$  MHz;  $\sigma = 0.995$  mho/m;  $\epsilon_r = 54.673$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(8.78, 8.78, 8.78); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

**CDMA2000 (850)/1xEVDO\_M-ch\_Ant retracted/Area Scan (7x12x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.171 mW/g

**CDMA2000 (850)/1xEVDO\_M-ch\_Ant retracted/Zoom Scan (7x7x9)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=3mm


Reference Value = 13.213 V/m; Power Drift = -0.136 dB

Peak SAR (extrapolated) = 0.905 W/kg

**SAR(1 g) = 0.252 mW/g; SAR(10 g) = 0.100 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.415 mW/g

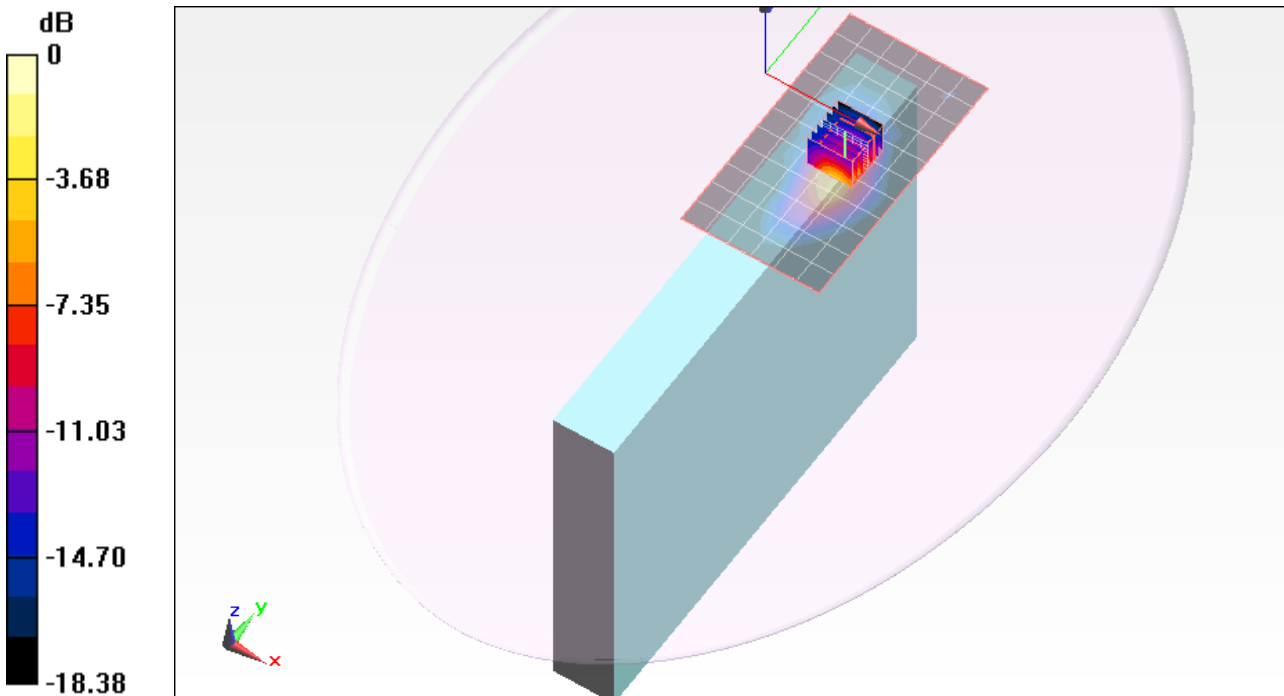

0 dB = 0.420mW/g

Test Laboratory: UL CCS

## Secondary Portrait

DUT: Fujitsu-Australia; Type: NA; Serial: NA

Communication System: CDMA Cell Band; Frequency: 836.52 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 836.52$  MHz;  $\sigma = 0.995$  mho/m;  $\epsilon_r = 54.673$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(8.78, 8.78, 8.78); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

**CDMA2000 (850)/1xRTT\_M-ch\_Ant retracted/Area Scan (7x11x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.00737 mW/g

**CDMA2000 (850)/1xRTT\_M-ch\_Ant retracted/Zoom Scan (7x7x9)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=3mm


Reference Value = 2.543 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.014 W/kg

**SAR(1 g) = 0.00485 mW/g; SAR(10 g) = 0.00272 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.00699 mW/g

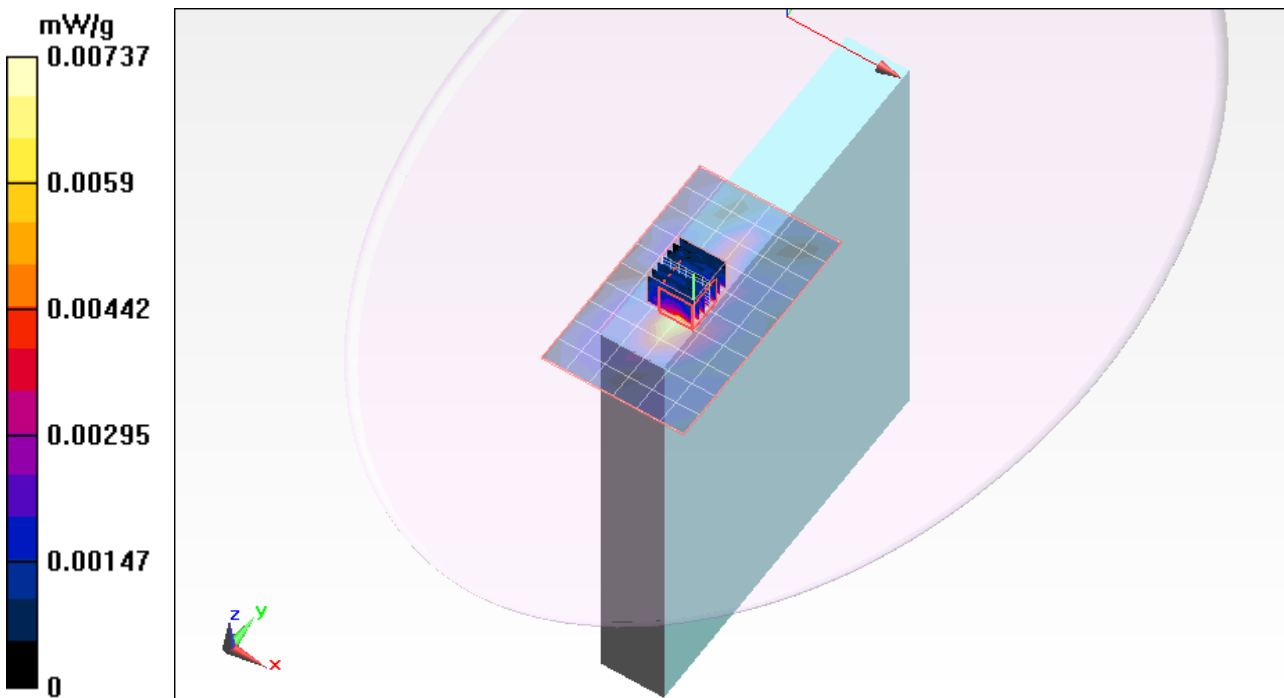

Test Laboratory: UL CCS

## Secondary Portrait

DUT: Fujitsu-Australia; Type: NA; Serial: NA

Communication System: CDMA Cell Band; Frequency: 836.52 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 836.52$  MHz;  $\sigma = 0.995$  mho/m;  $\epsilon_r = 54.673$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(8.78, 8.78, 8.78); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

**CDMA2000 (850)/1xEVDO\_M-ch\_Ant retracted/Area Scan (7x11x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.00655 mW/g

**CDMA2000 (850)/1xEVDO\_M-ch\_Ant retracted/Zoom Scan (7x7x9)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=3mm


Reference Value = 2.454 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.016 W/kg

**SAR(1 g) = 0.00473 mW/g; SAR(10 g) = 0.00197 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.016 mW/g

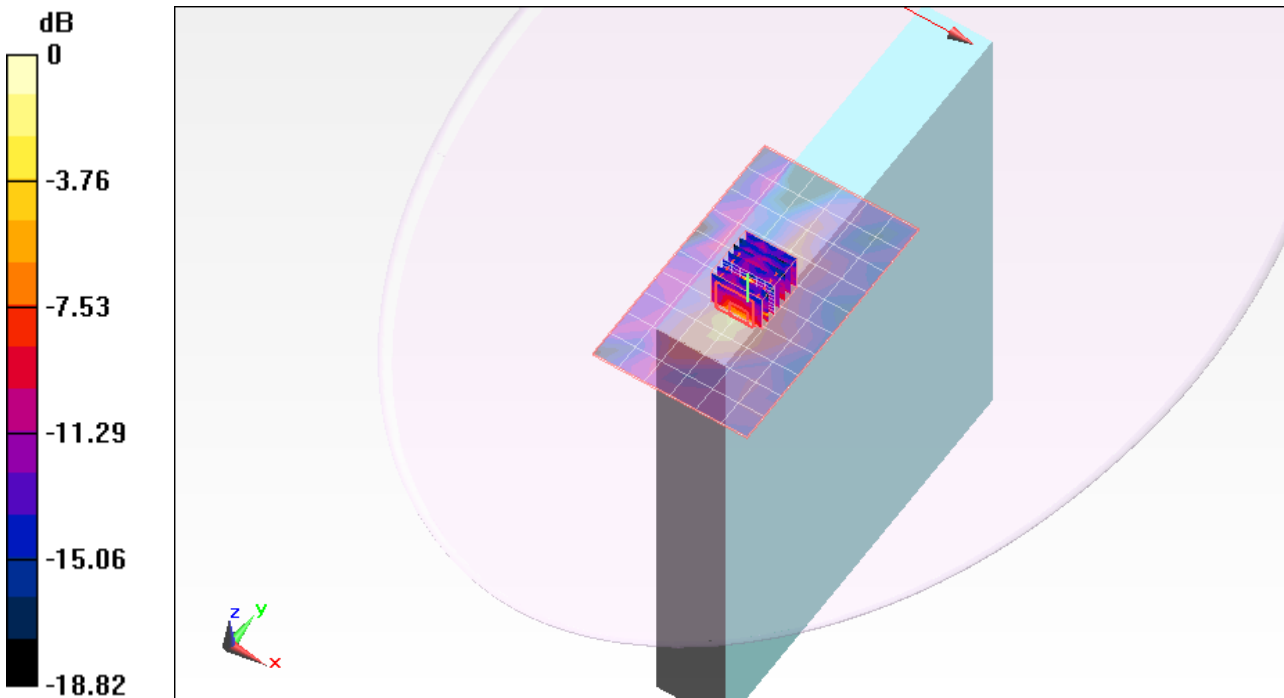

0 dB = 0.020mW/g