

Test Laboratory: UL CCS

Nearby person

DUT: Fujitsu-Australia; Type: NA; Serial: NA

Communication System: CDMA PCS Band; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.483$ mho/m; $\epsilon_r = 52.68$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C


DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.99, 6.99, 6.99); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

CDMA2000(1900)/1xRTT_M-ch_Ant retracted/Area Scan (11x12x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 0.017 mW/g

CDMA2000(1900)/1xRTT_M-ch_Ant retracted/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm
 Reference Value = 0.997 V/m; Power Drift = 0.130 dB
 Peak SAR (extrapolated) = 0.099 W/kg
SAR(1 g) = 0.014 mW/g; SAR(10 g) = 0.00628 mW/g
 Maximum value of SAR (measured) = 0.019 mW/g

CDMA2000(1900)/1xRTT_M-ch_Ant retracted/Zoom Scan 2 (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm
 Reference Value = 0.997 V/m; Power Drift = 0.130 dB
 Peak SAR (extrapolated) = 0.029 W/kg
SAR(1 g) = 0.011 mW/g; SAR(10 g) = 0.00605 mW/g
 Maximum value of SAR (measured) = 0.016 mW/g

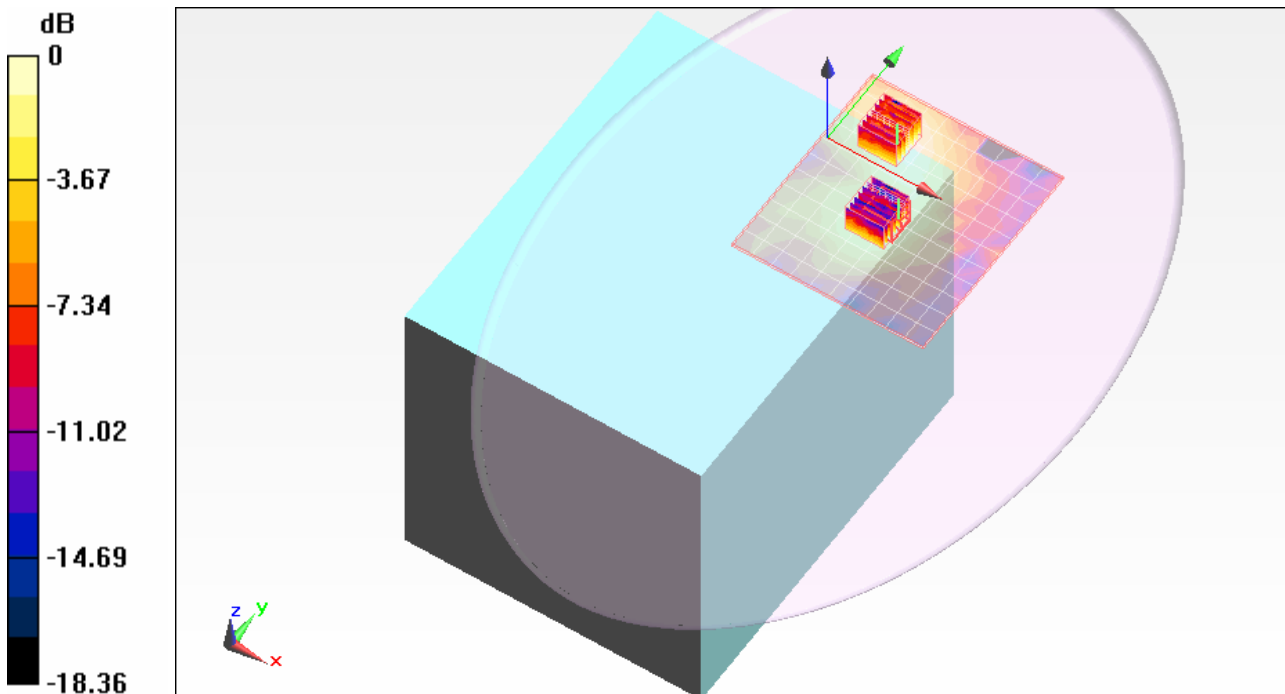

Test Laboratory: UL CCS

Nearby person

DUT: Fujitsu-Australia; Type: NA; Serial: NA

Communication System: CDMA PCS Band; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.483$ mho/m; $\epsilon_r = 52.68$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.99, 6.99, 6.99); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

CDMA2000(1900)/1xRTT_M-ch_Ant extracted/Zoom Scan (7x7x9)/Cube 0: Measurement grid:

dx=5mm, dy=5mm, dz=3mm

Reference Value = 5.680 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.375 W/kg


SAR(1 g) = 0.242 mW/g; SAR(10 g) = 0.153 mW/g

Maximum value of SAR (measured) = 0.298 mW/g

CDMA2000(1900)/1xRTT_M-ch_Ant extracted/Area Scan (8x10x1): Measurement grid: dx=15mm,

dy=15mm

Maximum value of SAR (measured) = 0.290 mW/g

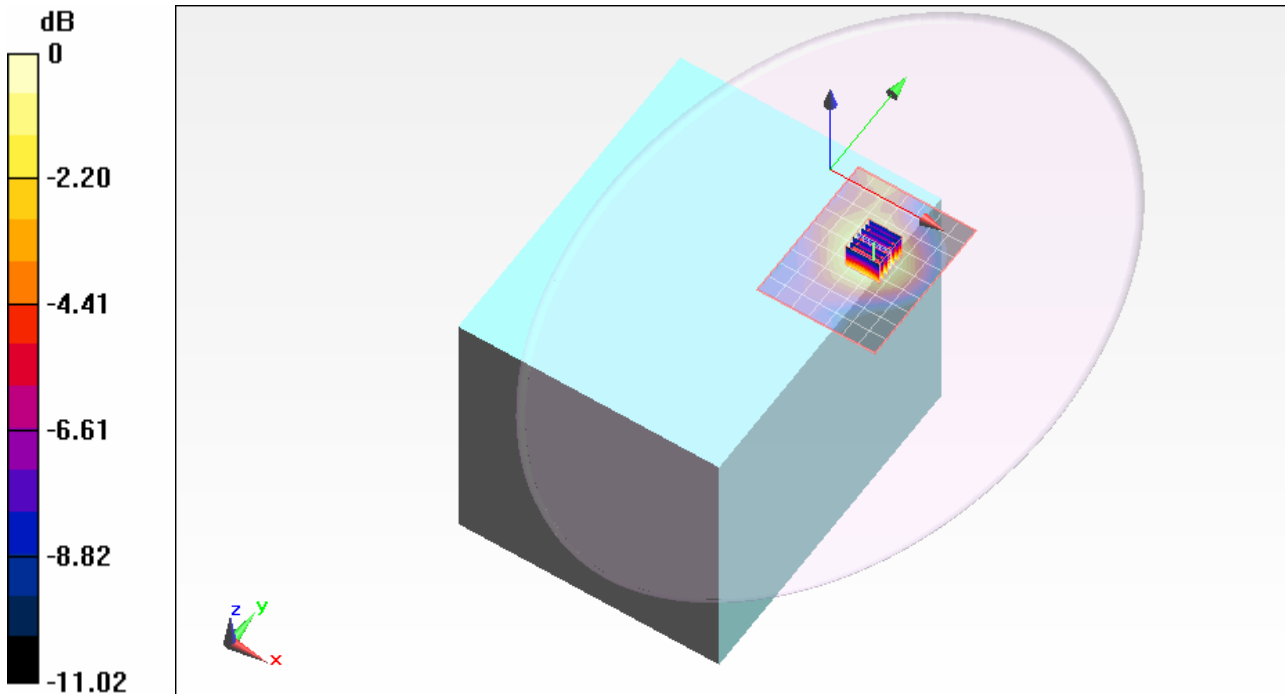

0 dB = 0.290mW/g

Test Laboratory: UL CCS

Nearby person

DUT: Fujitsu-Australia; Type: NA; Serial: NA

Communication System: CDMA PCS Band; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.454$ mho/m; $\epsilon_r = 54.317$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.99, 6.99, 6.99); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

CDMA2000(1900)/1XEVD0_M-ch_Ant retracted/Area Scan (10x13x1): Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.017 mW/g

CDMA2000(1900)/1XEVD0_M-ch_Ant retracted/Zoom Scan (7x7x9)/Cube 0: Measurement grid:

dx=5mm, dy=5mm, dz=3mm

Reference Value = 3.252 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.097 W/kg

SAR(1 g) = 0.00597 mW/g; SAR(10 g) = 0.00114 mW/g

CDMA2000(1900)/1XEVD0_M-ch_Ant retracted/Zoom Scan 2 (7x7x9)/Cube 0: Measurement grid:


dx=5mm, dy=5mm, dz=3mm

Reference Value = 3.252 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.026 W/kg

SAR(1 g) = 0.0099 mW/g; SAR(10 g) = 0.00543 mW/g

Maximum value of SAR (measured) = 0.014 mW/g

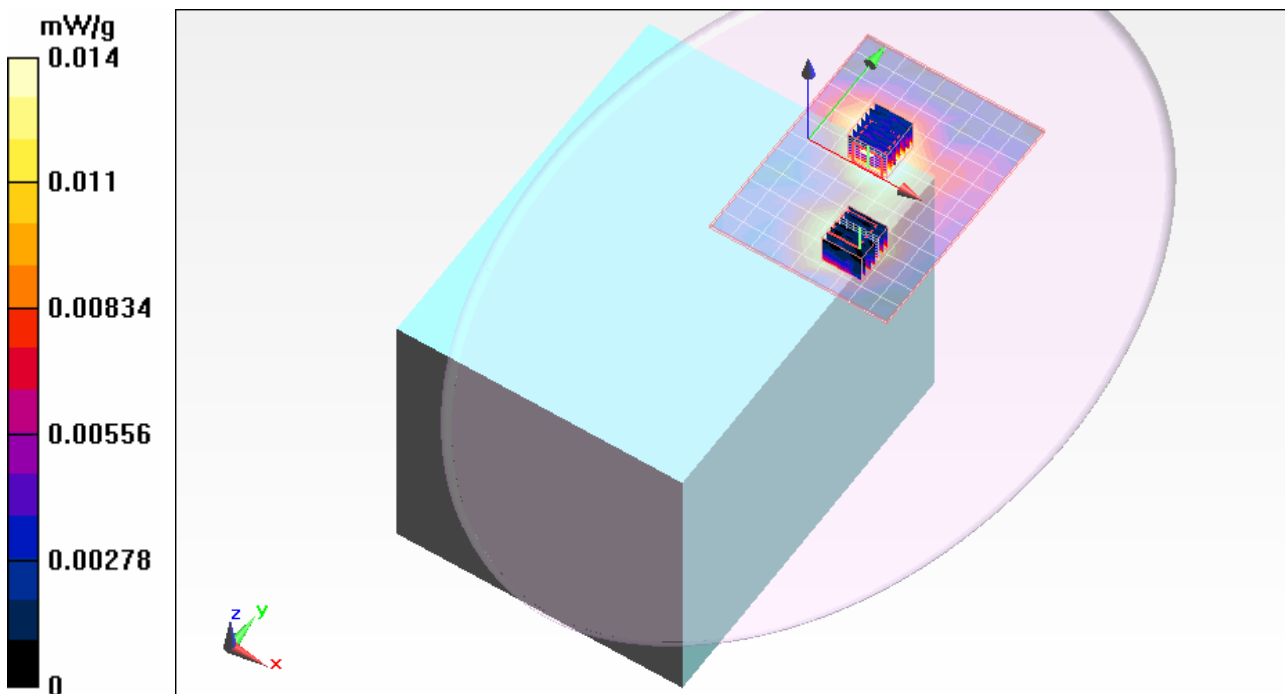

Test Laboratory: UL CCS

Nearby person

DUT: Fujitsu-Australia; Type: NA; Serial: NA

Communication System: CDMA PCS Band; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.454$ mho/m; $\epsilon_r = 54.317$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.99, 6.99, 6.99); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

CDMA2000(1900)/1xEVDO_M-ch_Ant extracted/Area Scan (10x11x1): Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.330 mW/g

CDMA2000(1900)/1xEVDO_M-ch_Ant extracted/Zoom Scan (7x7x9)/Cube 0: Measurement grid:


dx=5mm, dy=5mm, dz=3mm

Reference Value = 14.656 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.463 W/kg

SAR(1 g) = 0.251 mW/g; SAR(10 g) = 0.149 mW/g

Maximum value of SAR (measured) = 0.311 mW/g

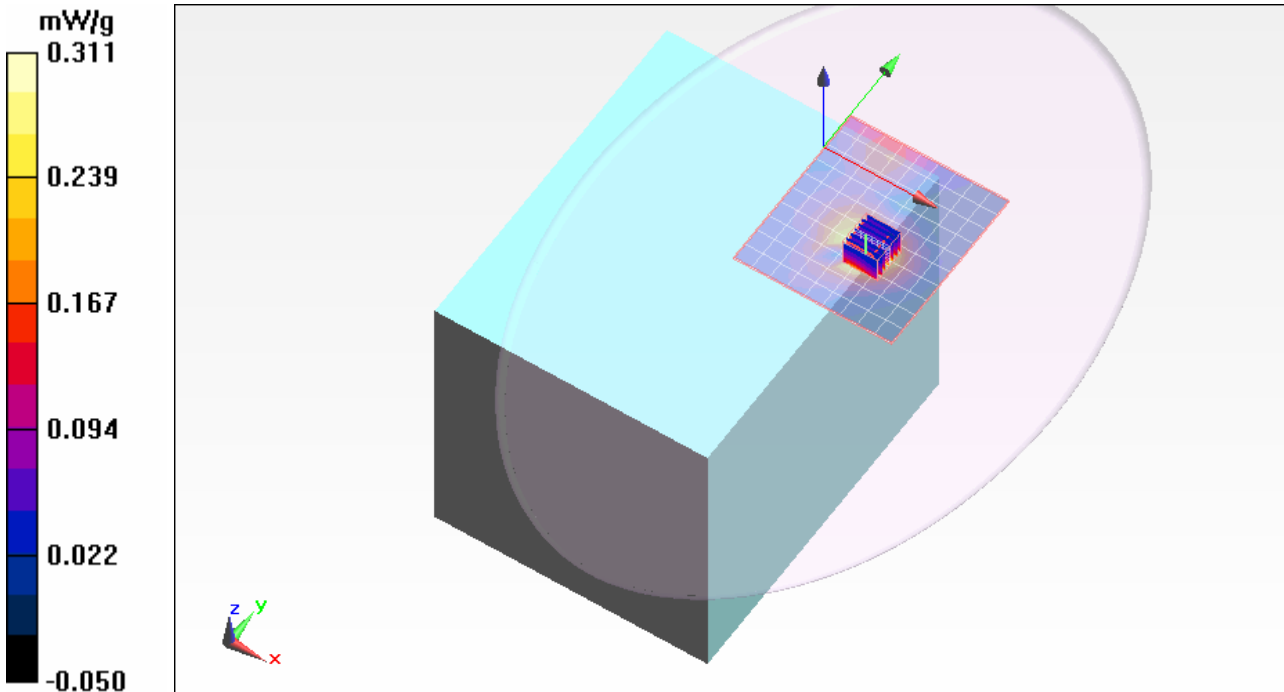

Test Laboratory: UL CCS

Bottom face

DUT: Fujitsu-Australia; Type: NA; Serial: NA

Communication System: CDMA PCS Band; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.483$ mho/m; $\epsilon_r = 52.68$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.99, 6.99, 6.99); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

CDMA2000(1900)/1xRTT_M-ch_Ant retracted/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.030 mW/g

CDMA2000(1900)/1xRTT_M-ch_Ant retracted/Zoom Scan (8x7x9)/Cube 0: Measurement grid:


dx=5mm, dy=5mm, dz=3mm

Reference Value = 3.852 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.022 W/kg

SAR(1 g) = 0.000414 mW/g; SAR(10 g) = 9.04e-005 mW/g

Maximum value of SAR (measured) = 0.027 mW/g

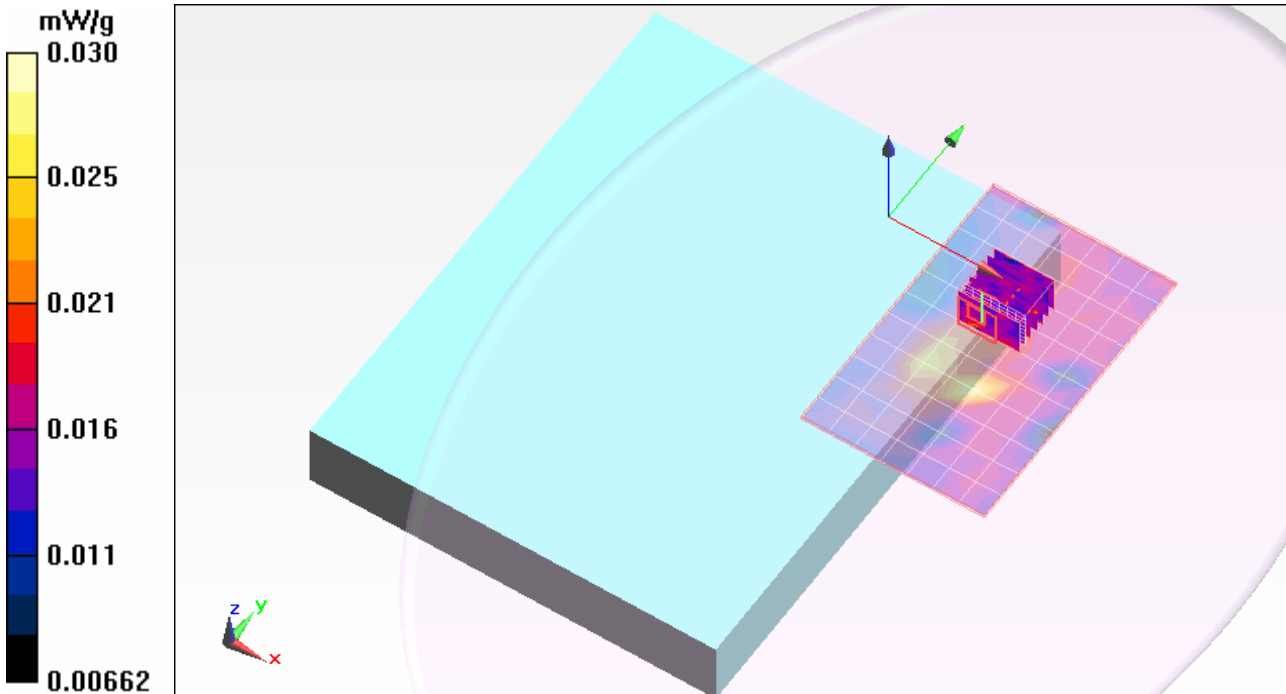

Test Laboratory: UL CCS

Bottom face

DUT: Fujitsu-Australia; Type: NA; Serial: NA

Communication System: CDMA PCS Band; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.483$ mho/m; $\epsilon_r = 52.68$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.99, 6.99, 6.99); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

CDMA2000(1900)/1xRTT_M-ch_Ant extracted/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.258 mW/g


CDMA2000(1900)/1xRTT_M-ch_Ant extracted/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 8.457 V/m; Power Drift = 0.0026 dB

Peak SAR (extrapolated) = 0.345 W/kg

SAR(1 g) = 0.228 mW/g; SAR(10 g) = 0.135 mW/g

Maximum value of SAR (measured) = 0.277 mW/g

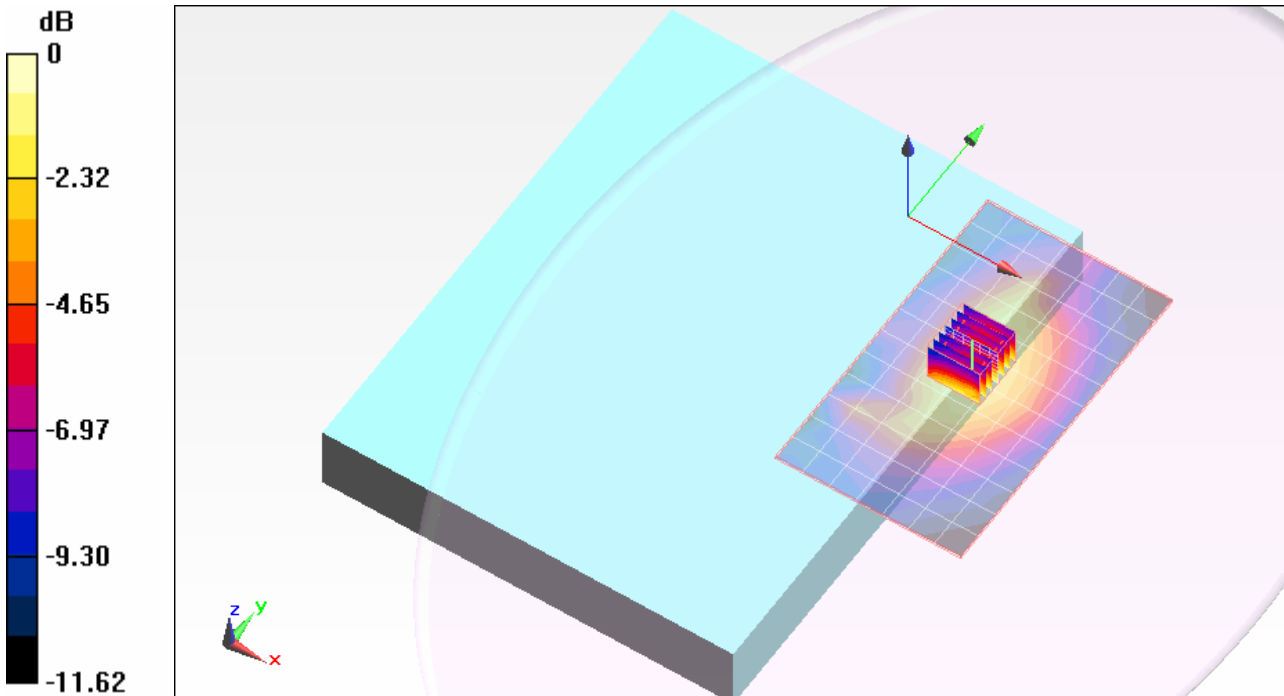

0 dB = 0.280mW/g

Test Laboratory: UL CCS

Bottom face

DUT: Fujitsu-Australia; Type: NA; Serial: NA

Communication System: CDMA PCS Band; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.454$ mho/m; $\epsilon_r = 54.317$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.99, 6.99, 6.99); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

CDMA2000(1900) 2/1xEVDO_M-ch_Ant retracted/Area Scan (8x12x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.024 mW/g

CDMA2000(1900) 2/1xEVDO_M-ch_Ant retracted/Zoom Scan (8x7x9)/Cube 0: Measurement


grid: $dx=5$ mm, $dy=5$ mm, $dz=3$ mm

Reference Value = 3.741 V/m; Power Drift = -0.182 dB

Peak SAR (extrapolated) = 0.031 W/kg

SAR(1 g) = 0.017 mW/g; SAR(10 g) = 0.00879 mW/g

Maximum value of SAR (measured) = 0.022 mW/g

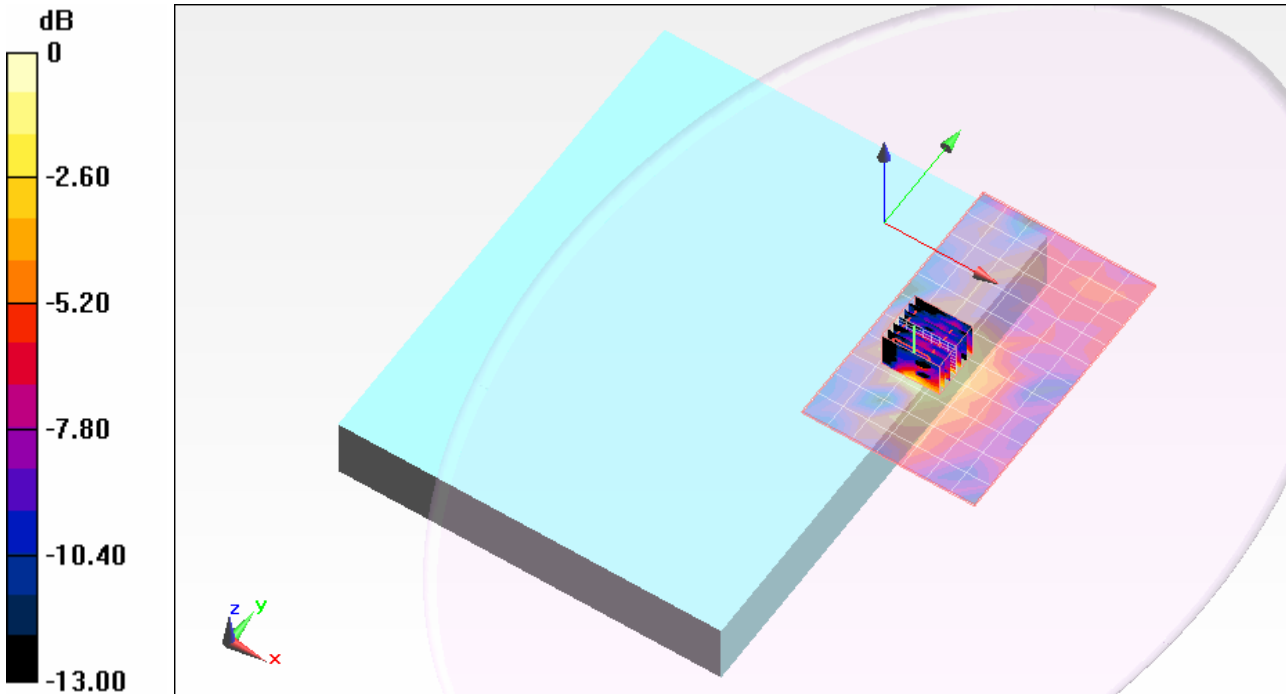

0 dB = 0.020mW/g

Test Laboratory: UL CCS

Bottom face

DUT: Fujitsu-Australia; Type: NA; Serial: NA

Communication System: CDMA PCS Band; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.454$ mho/m; $\epsilon_r = 54.317$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.99, 6.99, 6.99); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

CDMA2000(1900) 2/1xEVDO_M-ch_Ant extracted/Area Scan (8x13x1): Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.279 mW/g

CDMA2000(1900) 2/1xEVDO_M-ch_Ant extracted/Zoom Scan (7x7x9)/Cube 0: Measurement


grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 7.988 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.366 W/kg

SAR(1 g) = 0.236 mW/g; SAR(10 g) = 0.144 mW/g

Maximum value of SAR (measured) = 0.288 mW/g

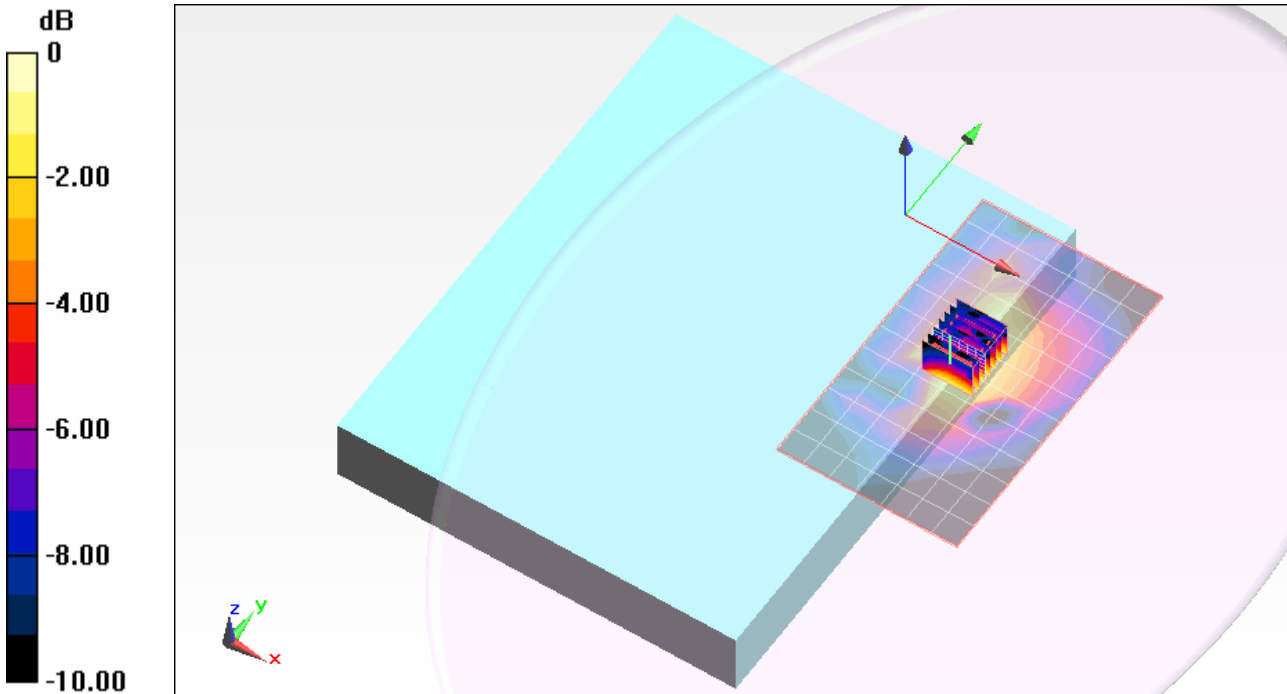

Test Laboratory: UL CCS

Secondary Landscape

DUT: Fujitsu-Australia; Type: NA; Serial: NA

Communication System: CDMA PCS Band; Frequency: 1851.25 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1851.25$ MHz; $\sigma = 1.422$ mho/m; $\epsilon_r = 54.458$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.99, 6.99, 6.99); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

CDMA2000 (1900)/1xRTT_L-ch_Ant retracted/Area Scan (7x13x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.809 mW/g

CDMA2000 (1900)/1xRTT_L-ch_Ant retracted/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm


Reference Value = 24.194 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.943 W/kg

SAR(1 g) = 0.848 mW/g; SAR(10 g) = 0.363 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.253 mW/g

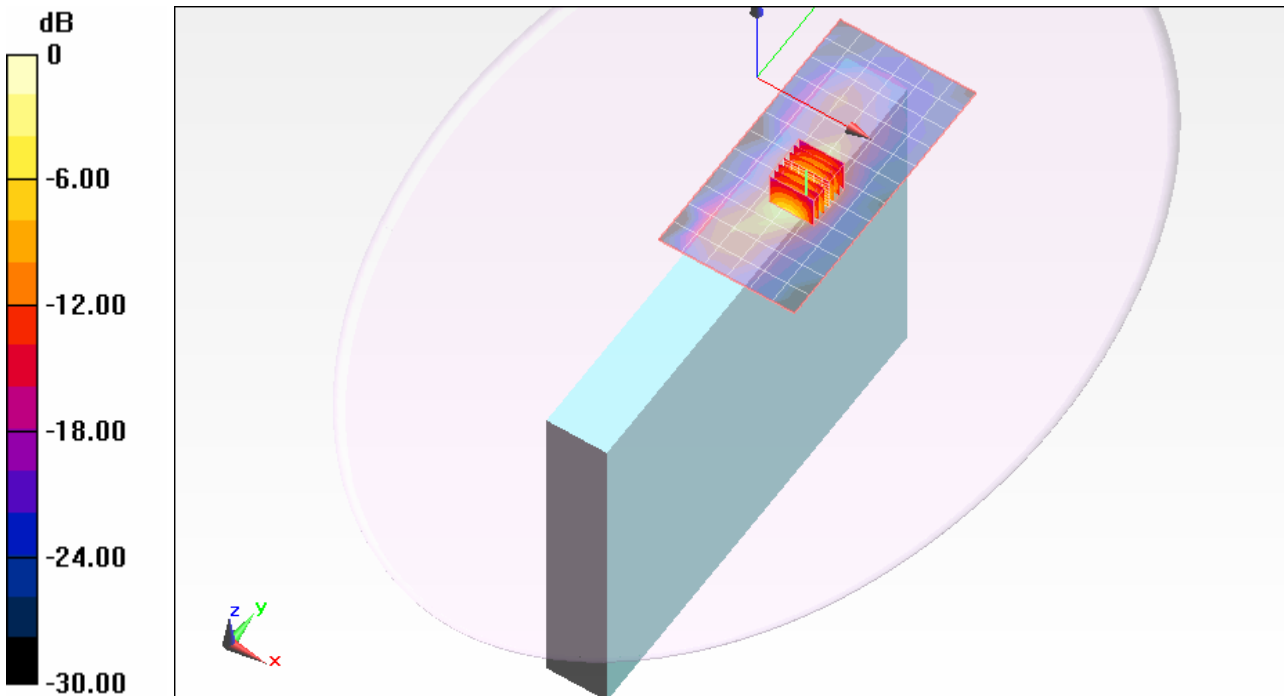

0 dB = 1.250mW/g

Test Laboratory: UL CCS

Secondary Landscape

DUT: Fujitsu-Australia; Type: NA; Serial: NA

Communication System: CDMA PCS Band; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.454$ mho/m; $\epsilon_r = 54.317$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.99, 6.99, 6.99); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

CDMA2000 (1900)/1xRTT_M-ch_Ant retracted/Area Scan (7x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.021 mW/g

CDMA2000 (1900)/1xRTT_M-ch_Ant retracted/Zoom Scan (7x7x9)/Cube 0: Measurement grid:


dx=5mm, dy=5mm, dz=3mm

Reference Value = 26.807 V/m; Power Drift = -0.21 dB

Peak SAR (extrapolated) = 2.494 W/kg

SAR(1 g) = 1.07 mW/g; SAR(10 g) = 0.456 mW/g

Maximum value of SAR (measured) = 1.611 mW/g

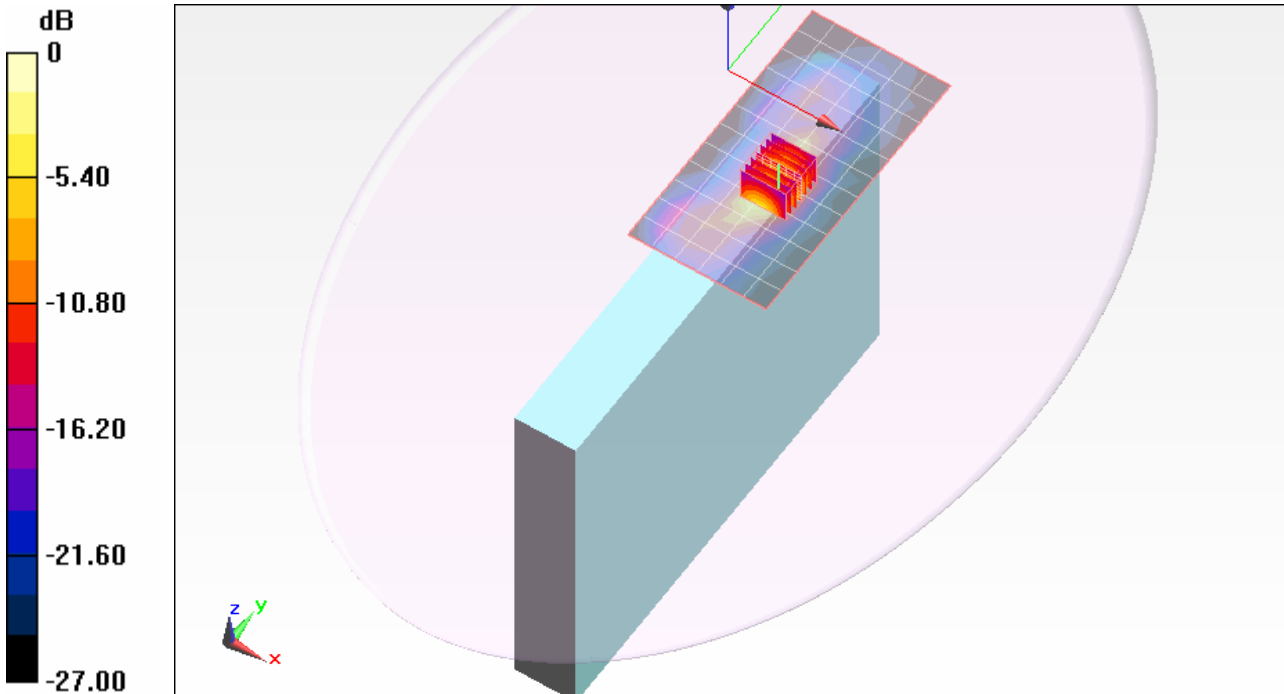

0 dB = 1.610mW/g

Test Laboratory: UL CCS

Secondary Landscape

DUT: Fujitsu-Australia; Type: NA; Serial: NA

Communication System: CDMA PCS Band; Frequency: 1908.75 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1908.75$ MHz; $\sigma = 1.486$ mho/m; $\epsilon_r = 54.196$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.99, 6.99, 6.99); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

CDMA2000 (1900)/1xRTT_H-ch_Ant retracted/Area Scan (7x13x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.797 mW/g

CDMA2000 (1900)/1xRTT_H-ch_Ant retracted/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm


Reference Value = 23.430 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.862 W/kg

SAR(1 g) = 0.806 mW/g; SAR(10 g) = 0.343 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.208 mW/g

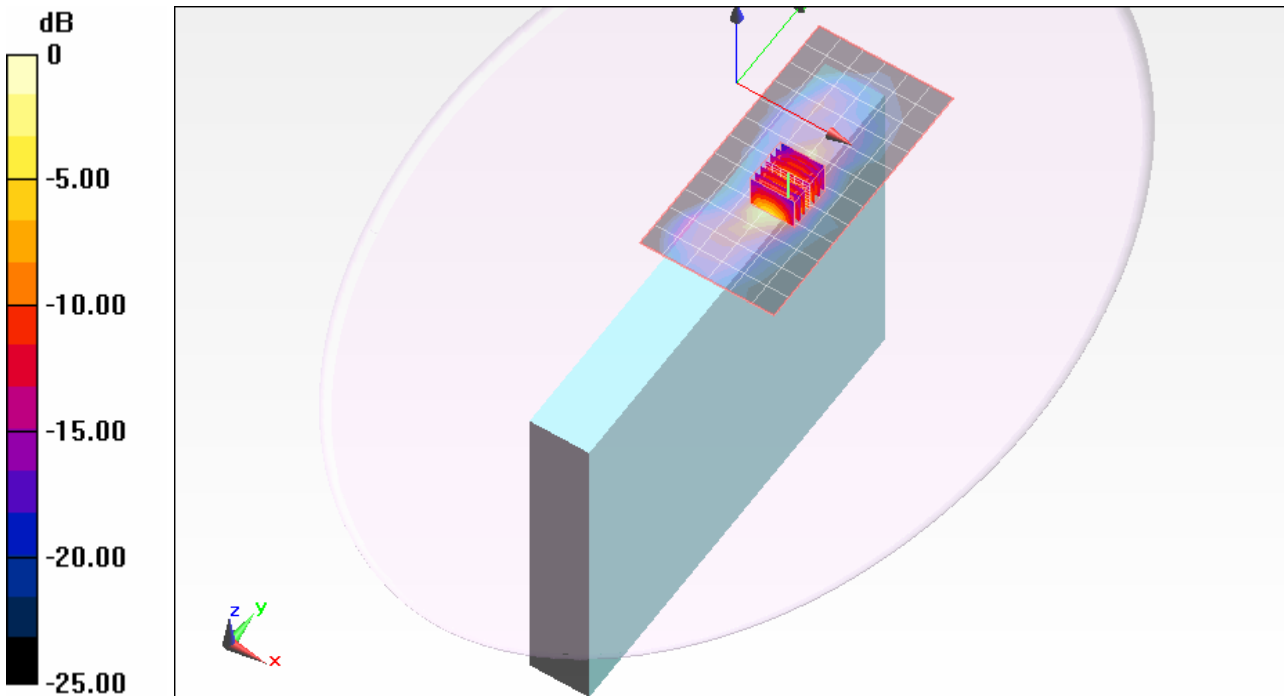

0 dB = 1.210mW/g

Test Laboratory: UL CCS

Secondary Landscape

DUT: Fujitsu-Australia; Type: NA; Serial: NA

Communication System: CDMA PCS Band; Frequency: 1851.25 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1851.25$ MHz; $\sigma = 1.422$ mho/m; $\epsilon_r = 54.458$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.99, 6.99, 6.99); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

CDMA2000 (1900) /1xEVDO_L-ch_Ant retracted/Area Scan (7x13x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.860 mW/g

CDMA2000 (1900) /1xEVDO_L-ch_Ant retracted/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm


Reference Value = 0.628 V/m; Power Drift = 0.144 dB

Peak SAR (extrapolated) = 2.061 W/kg

SAR(1 g) = 0.929 mW/g; SAR(10 g) = 0.408 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.405 mW/g

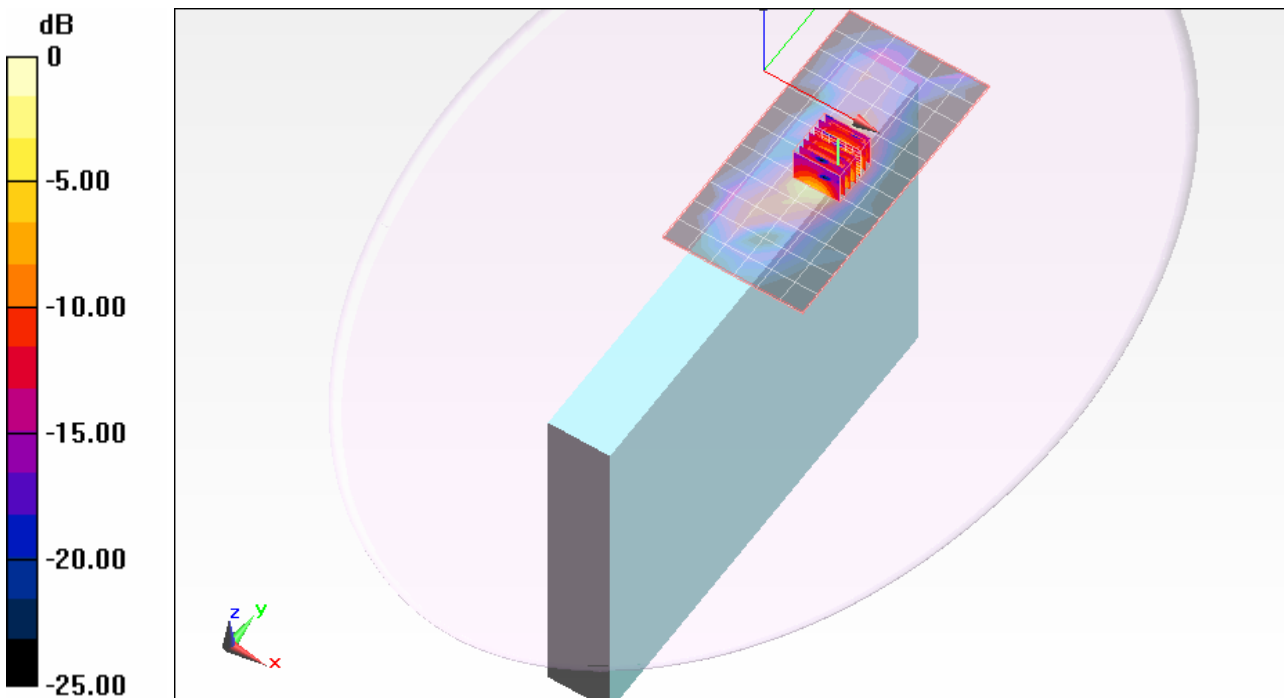

Test Laboratory: UL CCS

Secondary Landscape

DUT: Fujitsu-Australia; Type: NA; Serial: NA

Communication System: CDMA PCS Band; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.454$ mho/m; $\epsilon_r = 54.317$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.99, 6.99, 6.99); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

CDMA2000 (1900)/1xEVDO_M-ch_Ant retracted/Area Scan (7x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.780 mW/g

CDMA2000 (1900)/1xEVDO_M-ch_Ant retracted/Zoom Scan (7x7x9)/Cube 0: Measurement grid:


dx=5mm, dy=5mm, dz=3mm

Reference Value = 23.802 V/m; Power Drift = -0.24 dB

Peak SAR (extrapolated) = 3.173 W/kg

SAR(1 g) = 1.2 mW/g; SAR(10 g) = 0.401 mW/g

Maximum value of SAR (measured) = 2.157 mW/g

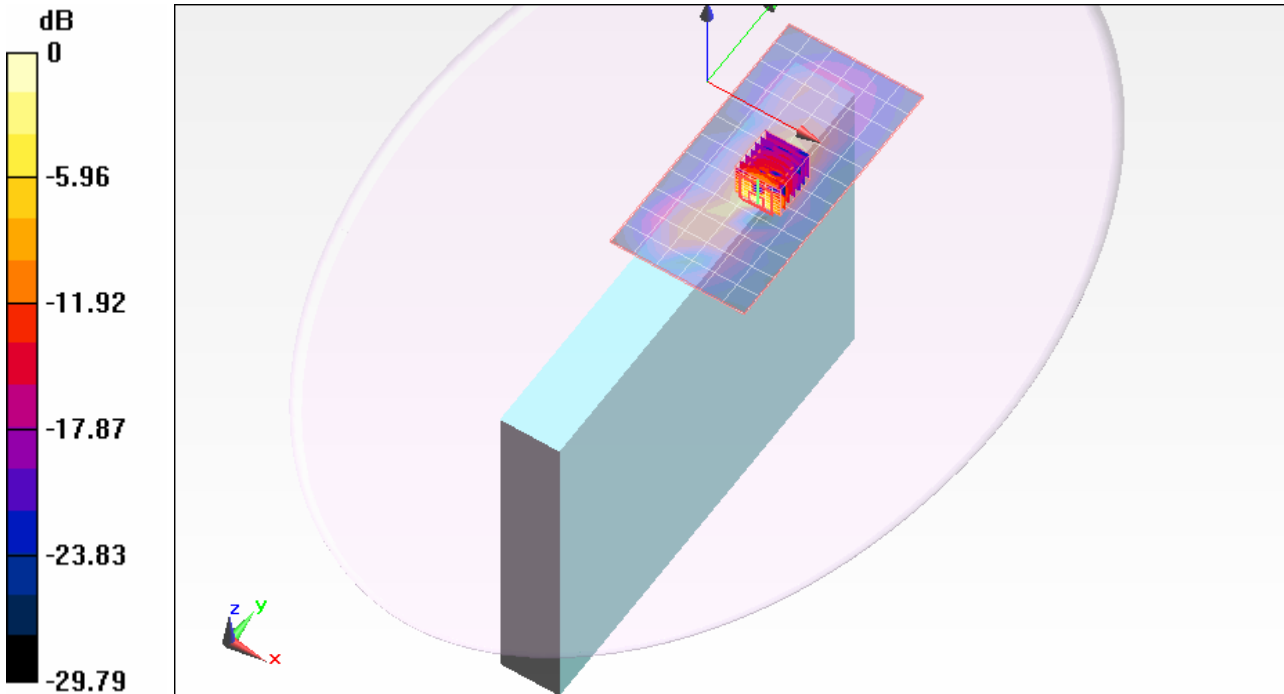

0 dB = 2.160mW/g


Test Laboratory: UL CCS

Secondary Landscape

DUT: Fujitsu-Australia; Type: NA; Serial: NA

Communication System: CDMA PCS Band; Frequency: 1880 MHz; Duty Cycle: 1:1

CDMA2000 (1900) 2/1xEVDO_M-ch_Ant retracted/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 0.075 mW/g

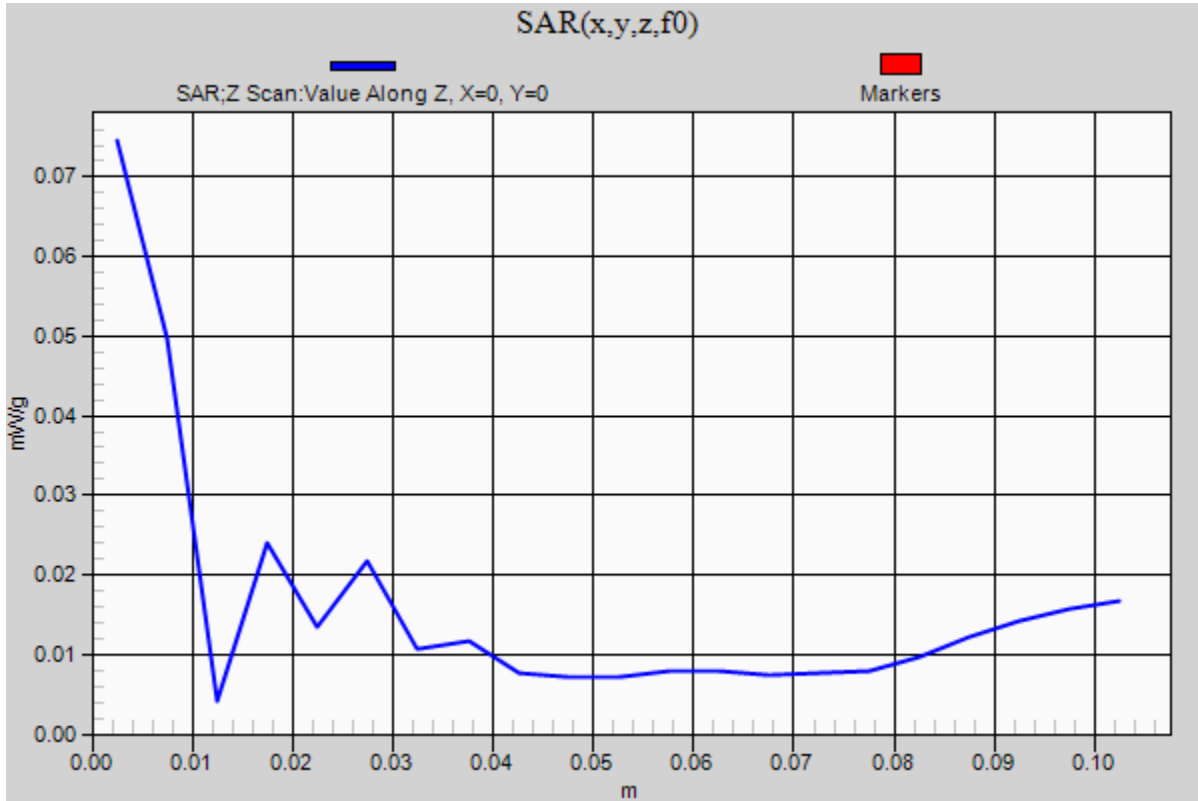

Test Laboratory: UL CCS

Secondary Landscape

DUT: Fujitsu-Australia; Type: NA; Serial: NA

Communication System: CDMA PCS Band; Frequency: 1908.75 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1908.75$ MHz; $\sigma = 1.486$ mho/m; $\epsilon_r = 54.196$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.99, 6.99, 6.99); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

CDMA2000 (1900) /1xEVDO_H-ch_Ant retracted/Area Scan (7x13x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.679 mW/g

CDMA2000 (1900) /1xEVDO_H-ch_Ant retracted/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm


Reference Value = 20.606 V/m; Power Drift = 0.21 dB

Peak SAR (extrapolated) = 2.484 W/kg

SAR(1 g) = 1.09 mW/g; SAR(10 g) = 0.463 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.585 mW/g

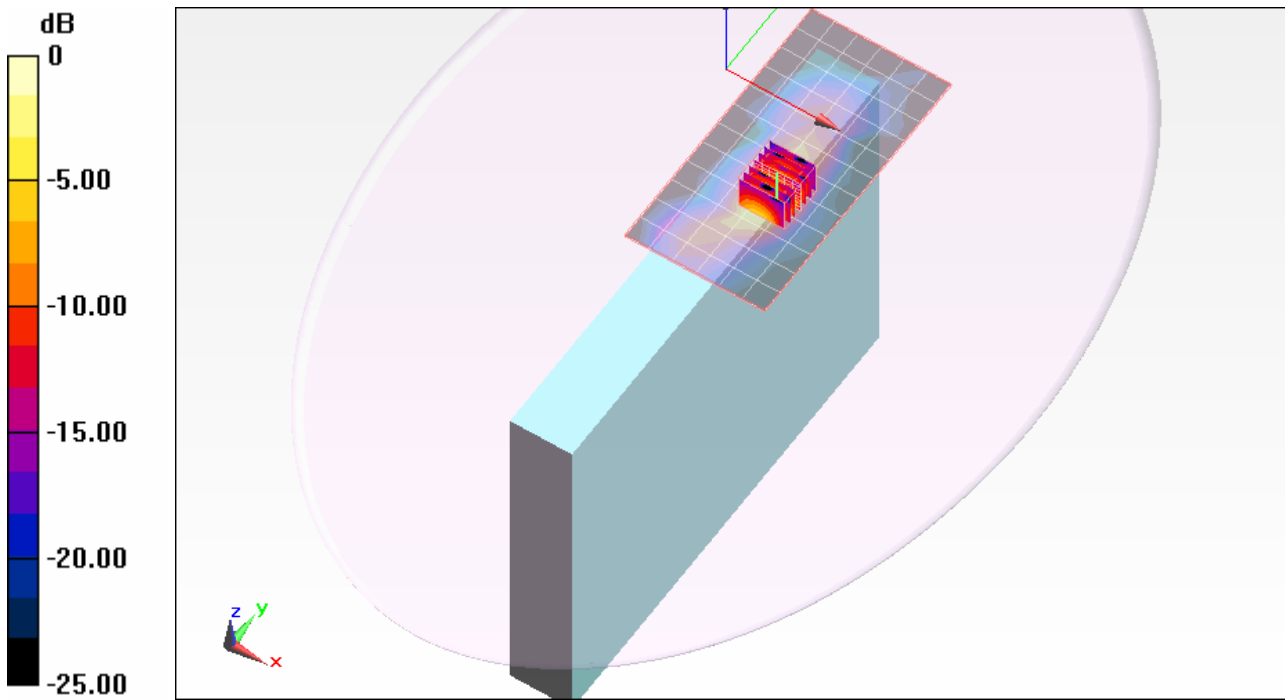

0 dB = 1.590mW/g

Test Laboratory: UL CCS

Primary Portrait

DUT: Fujitsu-Australia; Type: NA; Serial: NA

Communication System: CDMA PCS Band; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.488$ mho/m; $\epsilon_r = 52.13$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.99, 6.99, 6.99); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

CDMA2000 (1900)/1xRTT_M-ch_Ant retracted/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.163 mW/g


CDMA2000 (1900)/1xRTT_M-ch_Ant retracted/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 10.450 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.239 W/kg

SAR(1 g) = 0.110 mW/g; SAR(10 g) = 0.053 mW/g

Maximum value of SAR (measured) = 0.148 mW/g

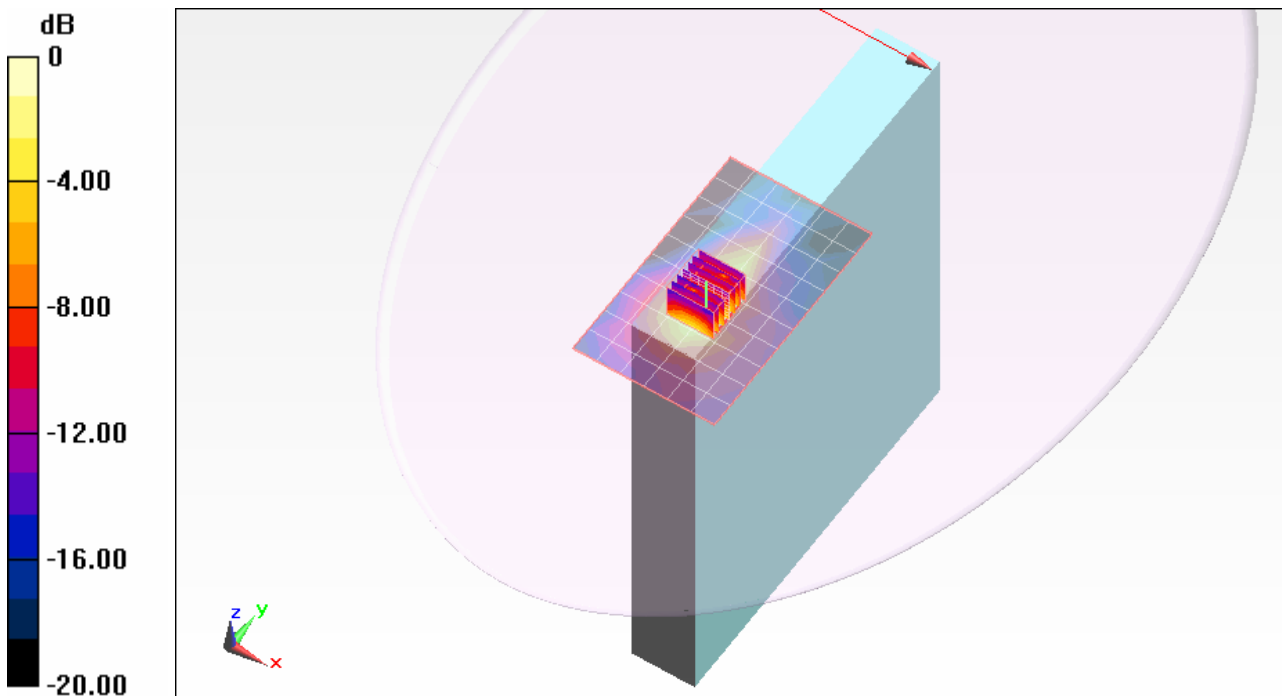

Test Laboratory: UL CCS

Primary Portrait

DUT: Fujitsu-Australia; Type: NA; Serial: NA

Communication System: CDMA PCS Band; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.454$ mho/m; $\epsilon_r = 54.317$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.99, 6.99, 6.99); Calibrated: 1/24/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1239; Calibrated: 11/17/2010
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1099
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

CDMA2000(1900)/1xEVDO_M-ch_Ant retracted/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.069 mW/g


CDMA2000(1900)/1xEVDO_M-ch_Ant retracted/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 6.839 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.179 W/kg

SAR(1 g) = 0.085 mW/g; SAR(10 g) = 0.042 mW/g

Maximum value of SAR (measured) = 0.122 mW/g

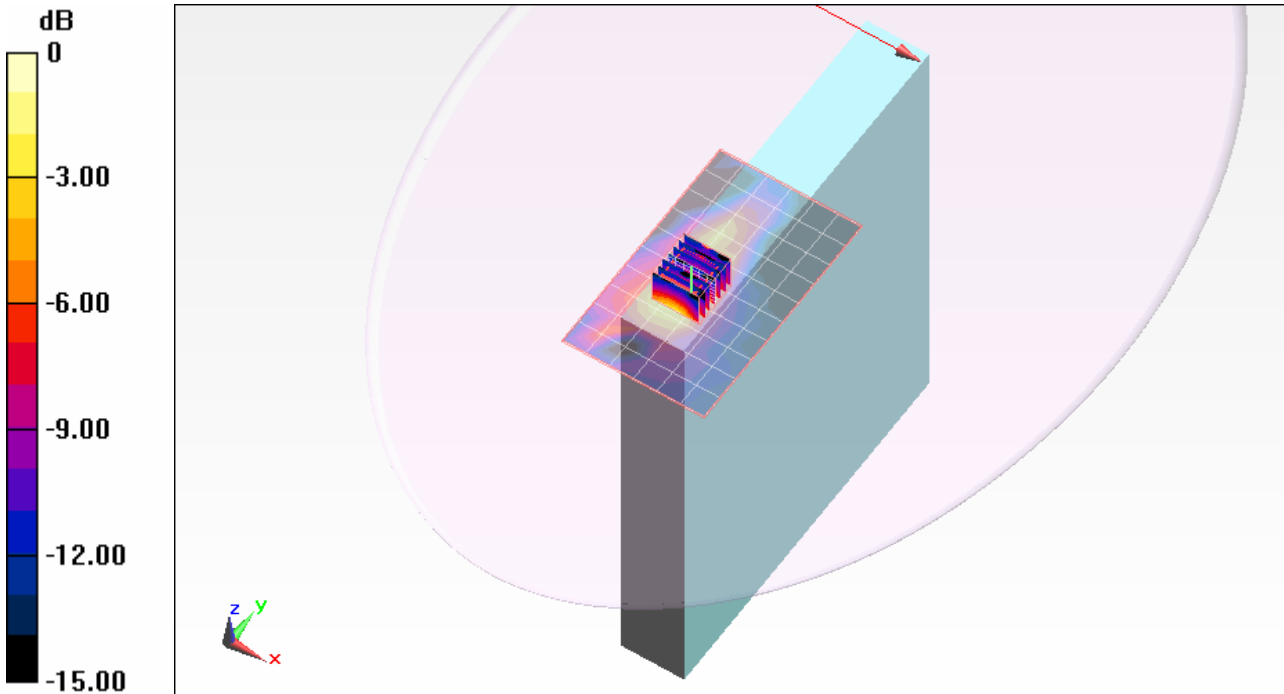

0 dB = 0.120mW/g