



# **SAR Evaluation Report**

**IN ACCORDANCE WITH THE REQUIREMENTS OF  
FCC OET BULLETIN 65 SUPPLEMENT C**

**FOR**

**850/900/1800/1900/2100 MHZ 5-BAND MINI CARD MODULE**

**MODEL: MC8755**

**FCC ID: N7NMC8755**

**REPORT NUMBER: 06U10666-1**

**(Co-Tx with BT and WLAN)**

**ISSUE DATE: OCTOBER 23, 2006**

*Prepared for*

**SIERRA WIRELESS, INC.  
13811 WIRELESS WAY  
RICHMOND, BRITISH COLUMBIA V6V 3A4  
CANADA**

*Prepared by*

**COMPLIANCE CERTIFICATION SERVICES  
561F MONTEREY ROAD,  
MORGAN HILL, CA 95037, USA  
TEL: (408) 463-0885**

**NVLAQ<sup>®</sup>**  
**LAB CODE:200065-0**

**Revision History**

Rev.	Issued date	Revisions	Revised By
--	October 23, 2006	Initial issue, base on 06U10630-3 CCS SAR report.	HS

**CERTIFICATE OF COMPLIANCE (SAR EVALUATION)**

**DATES OF TEST:** October 6, 7, 8, 18 and 19, 2006

APPLICANT: ADDRESS:	Sierra Wireless, Inc. 13811 Wireless Way Richmond, British Columbia V6V 3A4, Canada
FCC ID: MODEL:	N7NMC8755 MC8755
DEVICE CATEGORY: EXPOSURE CATEGORY:	Portable Device General Population/Uncontrolled Exposure

850/900/1800/1900/2100 MHz 5-Band Mini Card installed into Lenovo ThinkPad X60 Tablet which includes WLAN FCC ID: PPD-AR5BXB72-L and Bluetooth FCC ID: MCLJ07H081.

Note: This device contains 900/1800/2100 MHz bands that are not operational in US territories. This report is applicable to 850 and 1900 MHz bands.


Test Sample is a:	Production unit	
Host Laptop	Lenovo ThinkPad X60 Tablet	
Rule Parts	Frequency Range [MHz]	The Highest Collocation SAR Values [1g_mW/g]
22H	824.2-848.8	0.760
24E	1850.2-1909.8	0.734

This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for General Population/Uncontrolled Exposure limits specified in ANSI/IEEE Std. C95.1-1992 and had been tested in accordance with the measurement procedures specified in FCC OET 65 Supplement C (Edition 01-01).

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document. No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.

Approved & Released For CCS By:

Tested By:




Hsin Fu Shih  
Senior Engineer  
Compliance Certification Services

Ninous Davoudi  
EMC Engineer  
Compliance Certification Services

TABLE OF CONTENTS

1	EQUIPMENT UNDER TEST (EUT) DESCRIPTION.....	5
2	FACILITIES AND ACCREDITATION .....	6
3	SYSTEM DESCRIPTION .....	7
3.1	COMPOSITION OF INGREDIENTS FOR TISSUE SIMULATING LIQUIDS .....	8
4	SIMULATING LIQUID PARAMETERS CHECK.....	9
4.1	SIMULATING LIQUID PARAMETER CHECK RESULT.....	10
5	SYSTEM PERFORMANCE CHECK .....	15
5.1	SYSTEM PERFORMANCE CHECK RESULTS .....	16
6	SAR MEASUREMENT PROCEDURE .....	17
6.1	DASY4 SAR MEASUREMENT PROCEDURE .....	18
7	PROCEDURE USED TO ESTABLISH TEST SIGNAL .....	19
8	SAR MEASUREMENT RESULTS.....	20
8.1	CELL BAND .....	20
8.1.1	EDGE POSITION – PRIMARY PORTRAIT .....	20
8.1.2	LCD EDGE POSITION – SECONDARY PORTRAIT .....	21
8.1.3	LAP HELD POSITION.....	22
8.2	PCS BAND.....	23
8.2.1	EDGE POSITION – PRIMARY PORTRAIT .....	23
8.2.2	LCD EDGE POSITION – SECONDARY PORTRAIT .....	24
8.2.3	LAP HELD POSITION.....	26
9	MEASUREMENT UNCERTAINTY .....	27
9.1	MEASUREMENT UNCERTAINTY FOR 300 MHZ – 3000 MHZ .....	27
10	EQUIPMENT LIST AND CALIBRATION.....	28
11	PHOTOS .....	29
12	ATTACHMENTS.....	33

**1 EQUIPMENT UNDER TEST (EUT) DESCRIPTION**

850/900/1800/1900/2100 MHz 5-Band Mini Card installed into Lenovo ThinkPad X60 Tablet which includes WLAN FCC ID: PPD-AR5BXB72-L and Bluetooth FCC ID: MCLJ07H081.

Note: This device contains 900/1800/2100 MHz bands that are not operational in US territories. This report is applicable to 850 and 1900 MHz bands.

GPRS Multi-slot Classes:	Class 10 (2up, 3 down) for both GPRS and EGPRS
Normal operation:	Lap-held position and/or under arm positions
Duty cycle:	25% both GPRS and EGPRS modes
Host Device(s):	Lenovo ThinkPad X60 Tablet
Antenna(s)	Wistron Neweb Corp. PIFA Antenna, P/N: 60.4Q422.001
Power supply:	Power supplied through the laptop computer (host device).

## 2 FACILITIES AND ACCREDITATION


The test sites and measurement facilities used to collect data are located at 561F Monterey Road, Morgan Hill, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."



CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.

### 3 SYSTEM DESCRIPTION

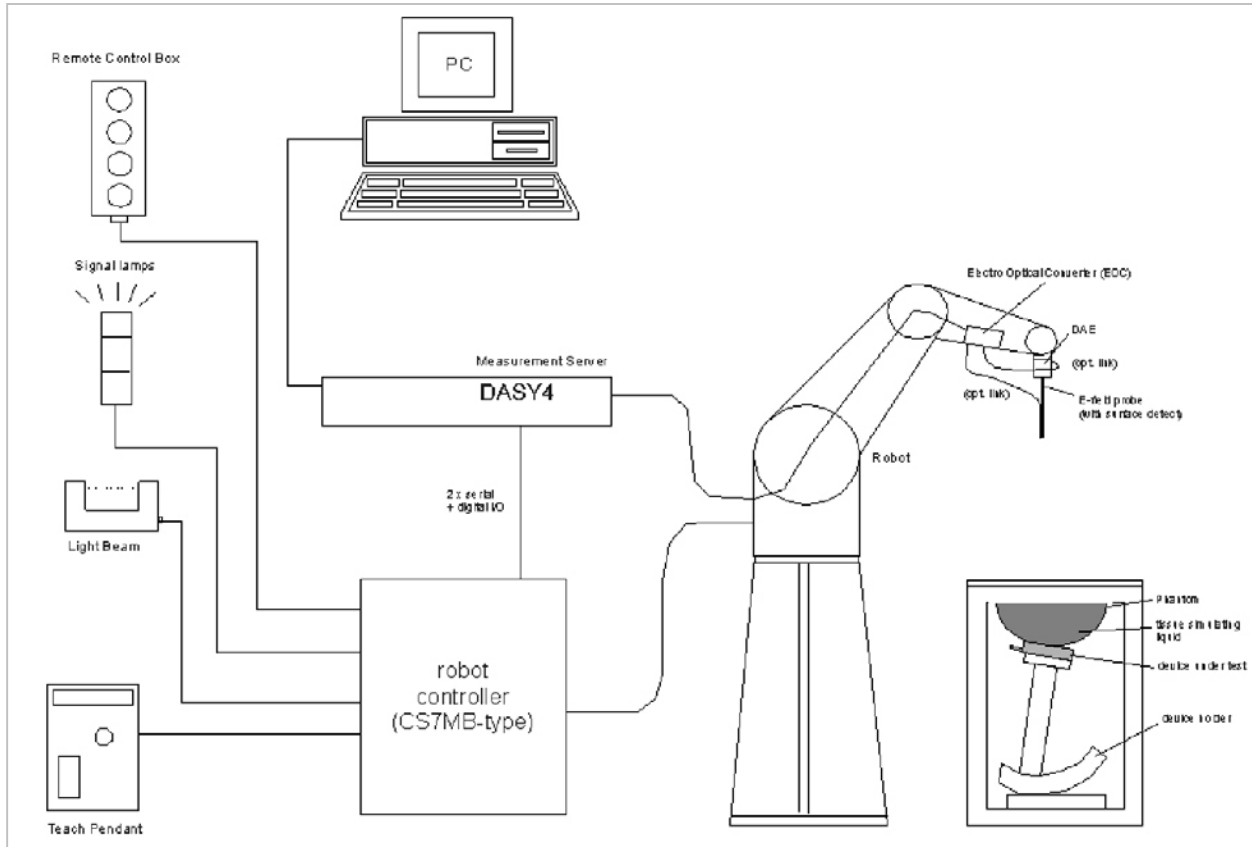

#### The DASY4 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 2000 or Windows XP.
- DASY4 software.
- Remote controls with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- Validation dipole kits allowing to validate the proper functioning of the system.

### 3.1 COMPOSITION OF INGREDIENTS FOR TISSUE SIMULATIG LIQUIDS

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Ingredients (% by weight)	Frequency (MHz)									
	450		835		915		1900		2450	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	38.56	51.16	41.45	52.4	41.05	56.0	54.9	40.4	62.7	73.2
Salt (NaCl)	3.95	1.49	1.45	1.4	1.35	0.76	0.18	0.5	0.5	0.04
Sugar	56.32	46.78	56.0	45.0	56.5	41.76	0.0	58.0	0.0	0.0
HEC	0.98	0.52	1.0	1.0	1.0	1.21	0.0	1.0	0.0	0.0
Bactericide	0.19	0.05	0.1	0.1	0.1	0.27	0.0	0.1	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	36.8	0.0
DGBE	0.0	0.0	0.0	0.0	0.0	0.0	44.92	0.0	0.0	26.7
Dielectric Constant	43.42	58.0	42.54	56.1	42.0	56.8	39.9	54.0	39.8	52.5
Conductivity (S/m)	0.85	0.83	0.91	0.95	1.0	1.07	1.42	1.45	1.88	1.78

Salt: 99+% Pure Sodium Chloride

Sugar: 98+% Pure Sucrose

Water: De-ionized, 16 MΩ+ resistivity

HEC: Hydroxyethyl Cellulose


DGBE: 99+% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]

Triton X-100 (ultra pure): Polyethylene glycol mono [4-(1,1, 3, 3-tetramethylbutyl)phenyl]ether



**4 SIMULATING LIQUID PARAMETERS CHECK**

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameters are within the tolerances of the specified target values. The relative permittivity and conductivity of the tissue material should be within  $\pm 5\%$  of the values given in the table below.

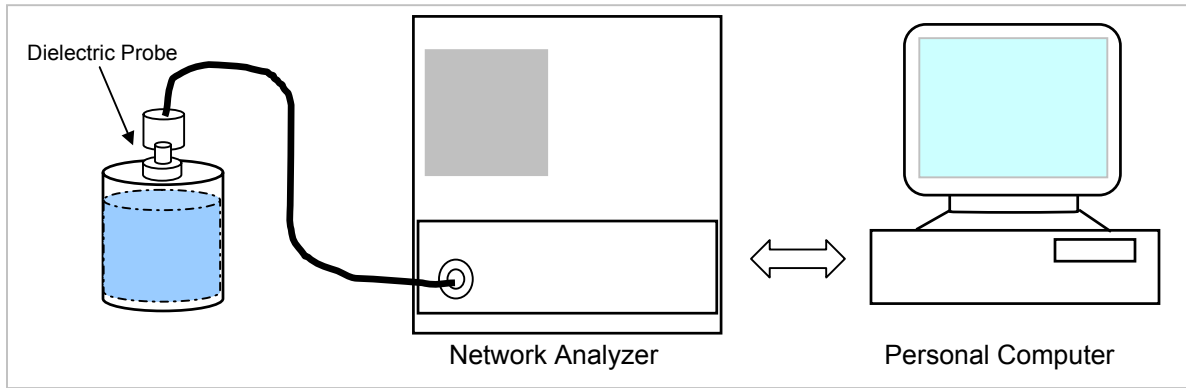

Set-up for liquid parameters check

**Reference Values of Tissue Dielectric Parameters for Head and Body Phantom (for 150 – 3000 MHz and 5800 MHz)**

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in IEEE Standard 1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations and extrapolated according to the head parameters specified in IEEE Standard 1528.

Target Frequency (MHz)	Head		Body	
	$\epsilon_r$	$\sigma$ (S/m)	$\epsilon_r$	$\sigma$ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	<b>55.2</b>	<b>0.97</b>
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	<b>53.3</b>	<b>1.52</b>
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5800	35.3	5.27	48.2	6.00

( $\epsilon_r$  = relative permittivity,  $\sigma$  = conductivity and  $\rho = 1000 \text{ kg/m}^3$ )

**4.1 SIMULATING LIQUID PARAMETER CHECK RESULT**

Simulating Liquid Dielectric Parameters Check Result @ Muscle 835 MHz

Room Ambient Temperature = 23°C; Relative humidity = 45%

Measured by: Ninous Davoudi

Simulating Liquid			Parameters		Measured	Target	Deviation (%)	Limit (%)	
f (MHz)	Temp. (°C)	Depth (cm)							
835	22	15	e'	54.412	Relative Permittivity (ε <sub>r</sub> ):	54.4120	55.2	-1.43	± 5
			e"	20.8526	Conductivity (σ):	0.96865	0.97	-0.14	± 5

Liquid Check

Ambient temperature: 23.0 deg. C; Liquid temperature: 22.0 deg C

October 06, 2006 06:31 PM

Frequency	e'	e"
800000000.	54.7187	21.0249
805000000.	54.6874	20.9984
810000000.	54.6704	20.9781
815000000.	54.6059	20.9638
820000000.	54.5632	20.9139
825000000.	54.5125	20.9007
830000000.	54.4744	20.8887
<b>835000000.</b>	<b>54.4120</b>	<b>20.8526</b>
840000000.	54.3939	20.8444
845000000.	54.3370	20.8179
850000000.	54.2681	20.7853
855000000.	54.2241	20.7872
860000000.	54.1762	20.7474
865000000.	54.1198	20.7112
870000000.	54.0658	20.7066
875000000.	54.0150	20.6797
880000000.	53.9686	20.6619
885000000.	53.9085	20.6603
890000000.	53.8605	20.6331
895000000.	53.8442	20.6042
900000000.	53.8105	20.5823

The conductivity (σ) can be given as:

$$\sigma = \omega \epsilon_0 e'' = 2 \pi f \epsilon_0 e''$$

where  $f = \text{target } f * 10^6$

$$\epsilon_0 = 8.854 * 10^{-12}$$

Simulating Liquid Dielectric Parameters Check Result @ Muscle 835 MHz

Room Ambient Temperature = 23°C; Relative humidity = 40%

Measured by: Ninous Davoudi

Simulating Liquid			Parameters		Measured	Target	Deviation (%)	Limit (%)	
f (MHz)	Temp. (°C)	Depth (cm)							
835	22	15	e'	54.4519	Relative Permittivity (ε <sub>r</sub> ):	54.4519	55.2	-1.36	± 5
			e"	20.8709	Conductivity (σ):	0.96950	0.97	-0.05	± 5

Liquid Check

Ambient temperature: 23.0 deg. C; Liquid temperature: 22.0 deg C

October 18, 2006 05:23 PM

Frequency	e'	e"
800000000.	54.7671	21.0647
805000000.	54.7548	20.9969
810000000.	54.6826	20.9963
815000000.	54.6659	20.9590
820000000.	54.6184	20.9274
825000000.	54.5523	20.9029
830000000.	54.5073	20.8877
<b>835000000.</b>	<b>54.4519</b>	<b>20.8709</b>
840000000.	54.4168	20.8469
845000000.	54.3670	20.8395
850000000.	54.3039	20.7937
855000000.	54.2561	20.7859
860000000.	54.1964	20.7721
865000000.	54.1716	20.7344
870000000.	54.1081	20.7333
875000000.	54.0642	20.7247
880000000.	54.0157	20.7287
885000000.	53.9645	20.7232
890000000.	53.9053	20.7209
895000000.	53.8854	20.6825
900000000.	53.8561	20.6584

The conductivity (σ) can be given as:

$$\sigma = \omega \epsilon_0 e'' = 2 \pi f \epsilon_0 e''$$

where  $f = \text{target } f * 10^6$

$$\epsilon_0 = 8.854 * 10^{-12}$$

Simulating Liquid Dielectric Parameters Check Result @ Muscle 1900 MHz

Room Ambient Temperature = 23°C; Relative humidity = 40%

Measured by: Ninous Davoudi

Simulating Liquid			Parameters		Measured	Target	Deviation (%)	Limit (%)	
f (MHz)	Temp. (°C)	Depth (cm)							
1900	22	15	e'	53.4741	Relative Permittivity (ε <sub>r</sub> ):	53.4741	53.3	0.33	± 5
			e"	13.8260	Conductivity (σ):	1.46140	1.52	-3.86	± 5

Liquid Check

Ambient temperature: 23.0 deg. C; Liquid temperature: 22.0 deg C

October 07, 2006 02:11 PM

Frequency	e'	e"
1710000000.	54.1322	13.1482
1720000000.	54.1061	13.1803
1730000000.	54.0630	13.1898
1740000000.	54.0175	13.2459
1750000000.	53.9765	13.2873
1760000000.	53.9364	13.3355
1770000000.	53.9092	13.3873
1780000000.	53.8590	13.4228
1790000000.	53.8211	13.4697
1800000000.	53.7982	13.4853
1810000000.	53.7674	13.5228
1820000000.	53.7405	13.5459
1830000000.	53.6837	13.5742
1840000000.	53.6589	13.6032
1850000000.	53.6386	13.6430
1860000000.	53.5909	13.6824
1870000000.	53.5559	13.7214
1880000000.	53.5170	13.7498
1890000000.	53.4790	13.7850
<b>1900000000.</b>	<b>53.4741</b>	<b>13.8260</b>
1910000000.	53.4370	13.8500

The conductivity (σ) can be given as:

$$\sigma = \omega \epsilon_0 e'' = 2 \pi f \epsilon_0 e''$$

where  $f = \text{target } f * 10^6$

$$\epsilon_0 = 8.854 * 10^{-12}$$

Simulating Liquid Dielectric Parameters Check Result @ Muscle 1900 MHz

Room Ambient Temperature = 23°C; Relative humidity = 42%

Measured by: Sunny Shih

Simulating Liquid			Parameters		Measured	Target	Deviation (%)	Limit (%)	
f (MHz)	Temp. (°C)	Depth (cm)							
1900	22	15	e'	55.5996	Relative Permittivity (ε <sub>r</sub> ):	55.5996	53.3	4.31	± 5
			e"	14.2575	Conductivity (σ):	1.50701	1.52	-0.85	± 5

Liquid Check

Ambient temperature: 23 deg. C; Liquid temperature: 22 deg C

October 08, 2006 01:10 PM

Frequency	e'	e"
1750000000.	56.2414	13.4320
1760000000.	56.1345	13.5659
1770000000.	56.0924	13.6716
1780000000.	56.0899	13.7260
1790000000.	56.1393	13.8047
1800000000.	56.1337	13.8541
1810000000.	56.0747	13.8318
1820000000.	56.0442	13.7413
1830000000.	56.0486	13.6826
1840000000.	56.0391	13.7589
1850000000.	55.9441	13.9252
1860000000.	55.7415	14.0555
1870000000.	55.5718	14.1023
1880000000.	55.5396	14.1009
1890000000.	55.5708	14.1857
<b>1900000000.</b>	<b>55.5996</b>	<b>14.2575</b>
1910000000.	55.5611	14.2857
1920000000.	55.5563	14.2009
1930000000.	55.6127	14.1685
1940000000.	55.6437	14.2146
1950000000.	55.5669	14.3246

The conductivity (σ) can be given as:

$$\sigma = \omega \epsilon_0 e'' = 2 \pi f \epsilon_0 e''$$

where  $f = \text{target } f * 10^6$

$$\epsilon_0 = 8.854 * 10^{-12}$$

Simulating Liquid Dielectric Parameters Check Result @ Muscle 1900 MHz

Room Ambient Temperature = 23°C; Relative humidity = 42%

Measured by: Sunny Shih

Simulating Liquid			Parameters		Measured	Target	Deviation (%)	Limit (%)	
f (MHz)	Temp. (°C)	Depth (cm)							
1900	22	15	e'	53.5749	Relative Permittivity (ε <sub>r</sub> ):	53.5749	53.3	0.52	± 5
			e"	14.2586	Conductivity (σ):	1.50713	1.52	-0.85	± 5

Liquid Check

Ambient temperature: 23 deg. C; Liquid temperature: 22 deg C

October 19, 2006 12:00 PM

Frequency	e'	e"
1750000000.	54.1736	13.5085
1760000000.	54.0818	13.6150
1770000000.	54.0388	13.6980
1780000000.	54.0213	13.7479
1790000000.	54.0581	13.7981
1800000000.	54.0528	13.8482
1810000000.	54.0293	13.8628
1820000000.	53.9811	13.8150
1830000000.	53.9854	13.7790
1840000000.	53.9553	13.8333
1850000000.	53.8660	13.9491
1860000000.	53.7239	14.0442
1870000000.	53.5959	14.0797
1880000000.	53.5504	14.1028
1890000000.	53.5706	14.1788
<b>1900000000.</b>	<b>53.5749</b>	<b>14.2586</b>
1910000000.	53.5711	14.2726
1920000000.	53.5772	14.2294
1930000000.	53.6399	14.2055
1940000000.	53.6376	14.2655
1950000000.	53.5636	14.3213

The conductivity (σ) can be given as:

$$\sigma = \omega \epsilon_0 e'' = 2 \pi f \epsilon_0 e''$$

where  $f = \text{target } f * 10^6$

$$\epsilon_0 = 8.854 * 10^{-12}$$

## 5 SYSTEM PERFORMANCE CHECK

The system performance check is performed prior to any usage of the system in order to guarantee reproducible results. The system performance check verifies that the system operates within its specifications of  $\pm 10\%$ .

### System Performance Check Measurement Conditions

- The measurements were performed in the flat section of the SAM twin phantom filled with Body simulating liquid of the following parameters.
- The DASY4 system with an Isotropic E-Field Probe EX3DV3-SN: 3531 was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1 GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.  
For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 5 x 5 x 7 fine cube was chosen for cube integration(dx=dy=7.5mm; dz=5mm).  
For 5 GHz band - Special 8x8x8 fine cube was chosen for cube integration(dx=dy=4.3mm; dz=3mm)
- Distance between probe sensors and phantom surface was set to 4 mm.  
For 5 GHz band - Distance between probe sensors and phantom surface was set to 2.0mm
- The dipole input power (forward power) was 250 mW $\pm 3\%$ .
- The results are normalized to 1 W input power.

### Reference SAR Values for body-tissue

In the table below, the numerical reference SAR values of a SPEAG validation dipoles placed below the flat phantom filled with body-tissue simulating liquid are given. The reference SAR values were calculated using the finite-difference time-domain method and the geometry parameters.

Dipole Type	Distance (mm)	Frequency (MHz)	SAR (1g) [W/kg]	SAR (10g) [W/kg]	SAR (peak) [W/kg]
D450V2	15	450	5.01	3.36	7.22
D835V2	15	835	<b>9.71</b>	<b>6.38</b>	14.1
D900V2	15	900	11.1	7.17	16.3
D1450V2	10	1450	29.6	16.6	49.8
D1800V2	10	1800	38.5	20.3	67.5
D1900V2	10	1900	<b>39.8</b>	<b>20.8</b>	69.6
D2000V2	10	2000	40.9	21.2	71.5
D2450V2	10	2450	51.2	23.7	97.6

Note: All SAR values normalized to 1 W forward power.

**5.1 SYSTEM PERFORMANCE CHECK RESULTS**

**System Validation Dipole: D835V2 SN:4d002**

Date: October 6, 2006

Room Ambient Temperature = 23°C; Relative humidity = 45%

Measured by: Ninous Davoudi

Body Simulating Liquid			SAR (mW/g)		Normalized to 1 W	Target	Deviation (%)	Limit (%)
f (MHz)	Temp. (°C)	Depth (cm)						
835	22	15	1g	2.48	9.92	9.71	2.16	± 10
			10g	1.63	6.52	6.38	2.19	± 10

Date: October 18, 2006

Room Ambient Temperature = 23°C; Relative humidity = 40%

Measured by: Ninous Davoudi

Body Simulating Liquid			SAR (mW/g)		Normalized to 1 W	Target	Deviation (%)	Limit (%)
f (MHz)	Temp. (°C)	Depth (cm)						
835	22	15	1g	2.48	9.92	9.71	2.16	± 10
			10g	1.64	6.56	6.38	2.82	± 10

**System Validation Dipole: D1900V2 SN:5d043**

Date: October 7, 2006

Room Ambient Temperature = 23°C; Relative humidity = 40%

Measured by: Ninous Davoudi

Body Simulating Liquid			SAR (mW/g)		Normalized to 1 W	Target	Deviation (%)	Limit (%)
f (MHz)	Temp. (°C)	Depth (cm)						
1900	22	15	1g	9.45	37.8	39.8	-5.03	± 10
			10g	5.04	20.16	20.8	-3.08	± 10

Date: October 8, 2006

Room Ambient Temperature = 23°C; Relative humidity = 42%

Measured by: Sunny Shih

Body Simulating Liquid			SAR (mW/g)		Normalized to 1 W	Target	Deviation (%)	Limit (%)
f (MHz)	Temp. (°C)	Depth (cm)						
1900	22	15	1g	9.75	39	39.8	-2.01	± 10
			10g	5.2	20.8	20.8	0.00	± 10

Date: October 19, 2006

Room Ambient Temperature = 23°C; Relative humidity = 42%

Measured by: Sunny Shih

Body Simulating Liquid			SAR (mW/g)		Normalized to 1 W	Target	Deviation (%)	Limit (%)
f (MHz)	Temp. (°C)	Depth (cm)						
1900	22	15	1g	9.75	39	39.8	-2.01	± 10
			10g	5.2	20.8	20.8	0.00	± 10



## 6 SAR MEASUREMENT PROCEDURE

A summary of the procedure follows:

- a) A measurement of the SAR value at a fixed location is used as a reference value for assessing the power drop of the EUT. The SAR at this point is measured at the start of the test, and then again at the end of the test.
- b) The SAR distribution at the exposed flat section of the flat phantom is measured at a distance of 4 mm from the inner surface of the shell. The area covers the entire dimension of the EUT and the horizontal grid spacing is 15 mm x 15 mm. Based on this data, the area of the maximum absorption is determined by Spline interpolation. The first Area Scan covers the entire dimension of the EUT to ensure that the hotspot was correctly identified.

For 5 GHz band - The SAR distribution at the exposed flat section of the flat phantom is measured at a distance of 2.0 mm from the inner surface of the shell. The area covers the entire dimension of the EUT and the horizontal grid spacing is 10 mm x 10 mm. Based on this data, the area of the maximum absorption is determined by Spline interpolation. The first Area Scan covers the entire dimension of the EUT to ensure that the hotspot was correctly identified.

- c) Around this point, a volume of X=Y= 30 and Z=21 mm is assessed by measuring 5 x 5 x 7 mm points. On the basis of this data set, the spatial peak SAR value is evaluated with the following procedure:

For 5 GHz band - Around this point, a volume of X=Y=Z=30 mm is assessed by measuring 8 x 8 x 8 mm points. On the basis of this data set, the spatial peak SAR value is evaluated with the following procedure:

- (i) The data at the surface are extrapolated, since the centre of the dipoles is 1.2 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.3 mm. The extrapolation is based on a least square algorithm. A polynomial of the fourth order is calculated through the points in z-axes. This polynomial is then used to evaluate the points between the surface and the probe tip.
- (ii) The maximum interpolated value is searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g and 10 g) are computed using the 3D-Spline interpolation algorithm. The 3D-Spline is composed of three one-dimensional splines with the "Not a knot"- condition (in x, y and z-direction). The volume is integrated with the trapezoidal – algorithm. One thousand points (10 x 10 x 10) are interpolated to calculate the averages.
- (iii) All neighbouring volumes are evaluated until no neighbouring volume with a higher average value is found.
- (iv) The SAR value at the same location as in Step (a) is again measured to evaluate the actual power drift.

## 6.1 DASY4 SAR MEASUREMENT PROCEDURE

### Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The Minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the Distance of sensor calibration points to probe tip as defined in the probe properties (for example, 1.2 mm for an EX3DV3 probe type).

### Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY4 software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528, EN 50361 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

### Step 3: Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures 5 x 5 x 7 points within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

For 5 GHz band – Same as above except the Zoom Scan measures 8 x 8 x 8 points.

### Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

### Step 5: Z-Scan

The Z Scan measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. In order to get a reasonable extrapolation, the extrapolated distance should not be larger than the step size in Z-direction.

**7 PROCEDURE USED TO ESTABLISH TEST SIGNAL**

The following procedures had been used to prepare the EUT for the SAR test.

The following setting is used to prepare the EUT in GSM850/1900MHz bands for the SAR test.

Agilent 8960 series 10 E5515C, Wireless Communication Test Set is used to control the EUT and measure the output power.

The following setting was used to establish the signal.

**System Config:** GSM/GPRS Mobile Test  
E1968A A.06.31

**Call Params:** BCH → Cell Band: GSM850/PCS  
TCH → Traffic Band: GSM850/PCS  
Traffic Channel: 128/192/251 or 512/661/810  
MS Tx Level: 3 (33dBm) for cell band; 3 (30 dBm) for PCS band  
MultiSlot Config: 2up, 3down

PDTCH → Traffic Band: GSM850/PCS  
Traffic Channel: 128/192/251 or 512/661/810  
MS Tx Level: 6 (27dBm) for cell band; 5 (26 dBm) for PCS band  
Coding Scheme: CS-4  
MultiSlot Config: 2up, 3down

**Control:** Active Cell → GSM/GPRS/EGPRS

**GSM850, GPRS**

Channel	Frequency (MHz)	Power (dBm)
128	824.2	31.82
192	836.6	31.91
251	848.8	32.07

**GSM1900, GPRS**

Channel	Frequency (MHz)	Power (dBm)
512	1850.2	28.92
661	1880.0	29.87
810	1909.8	29.04

**GSM850, EGPRS**

Channel	Frequency (MHz)	Power (dBm)
128	824.2	26.84
192	836.6	26.67
251	848.8	26.64

**GSM1900, EGPRS**


Channel	Frequency (MHz)	Power (dBm)
512	1850.2	26.11
661	1880.0	26.02
810	1909.8	25.87

**8 SAR MEASUREMENT RESULTS**

**8.1 CELL BAND**

**8.1.1 EDGE POSITION – PRIMARY PORTRAIT**

The highest reported SAR value at this configuration is: 0.082 W/kg (GSM GPRS mode, channel 192, 837 MHz), please see CCS SAR Report 06U10630-3 (WWAN) and 06U10634-4 (WLAN).

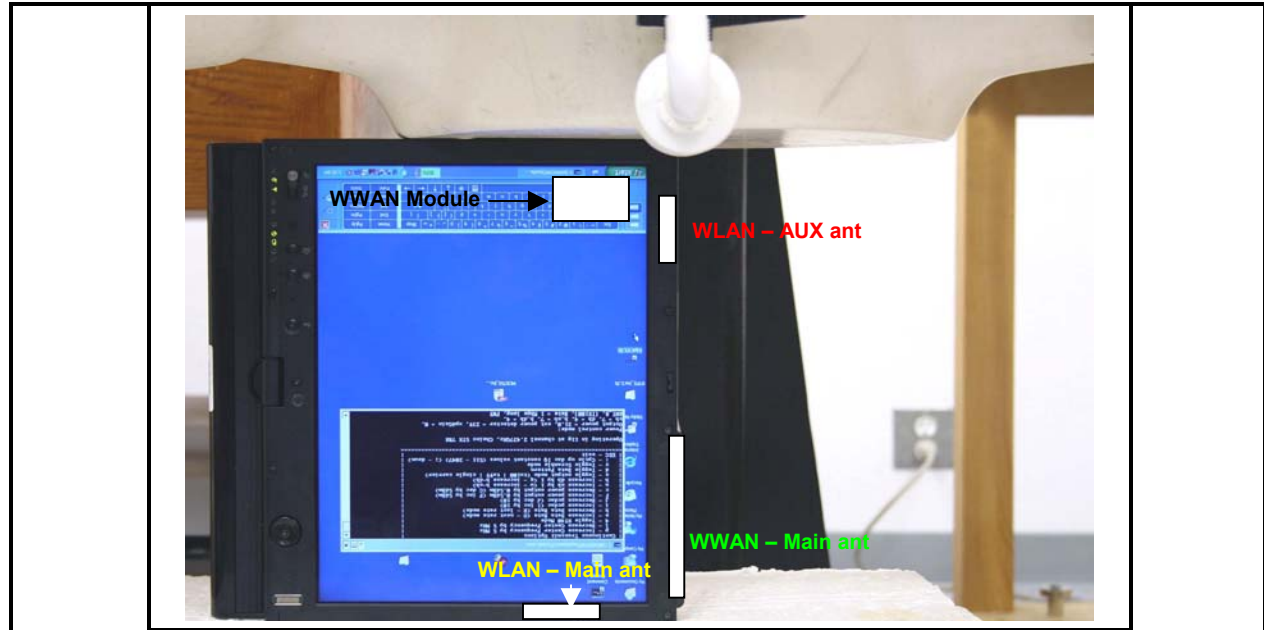


Module	Mode	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dB)	Extrapolated1) SAR 1g (mW/g)	Total SAR <sup>3</sup> 1g (mW/g)
WWAN	GPRS	837	0.082	0.000	0.082	N/A
WLAN	b	2437	0.355	-0.071	0.361	0.443
	g	2437	0.293	-0.137	0.302	0.384
	HT20	2437	0.327	-0.124	0.336	0.418
	HT40	2437	0.246	0.000	0.246	0.328
	a	5260	0.148	0.000	0.148	0.230
	<b>HT20</b>	<b>5260</b>	<b>0.677</b>	<b>-0.008</b>	<b>0.678</b>	<b>0.760</b>
	HT40	5260	0.615	0.000	0.615	0.697
	a	5785	0.178	0.000	0.178	0.260
	HT20	5785	0.153	0.000	0.153	0.235
HT40	5785	0.189	0.000	0.189	0.271	

Notes:

- 1) The exact method of extrapolation is Measured SAR x 10<sup>^(-drift/10)</sup>. The SAR reported at the end of the measurement process by the DASY4 system can be scaled up by the Power drift to determine the SAR at the beginning of the measurement process.
- 2) Please see attachments for the detailed measurement data and plots showing the maximum SAR location of the EUT.
- 3) **Total SAR is evaluated with sum of the SAR values from each band frequency.**

**8.1.2 LCD EDGE POSITION – SECONDARY PORTRAIT**

The highest reported SAR value at this configuration is: 0.194 W/kg (GSM GPRS mode, channel 251, 848.8 MHz), please see CCS SAR Report 06U10630-3.

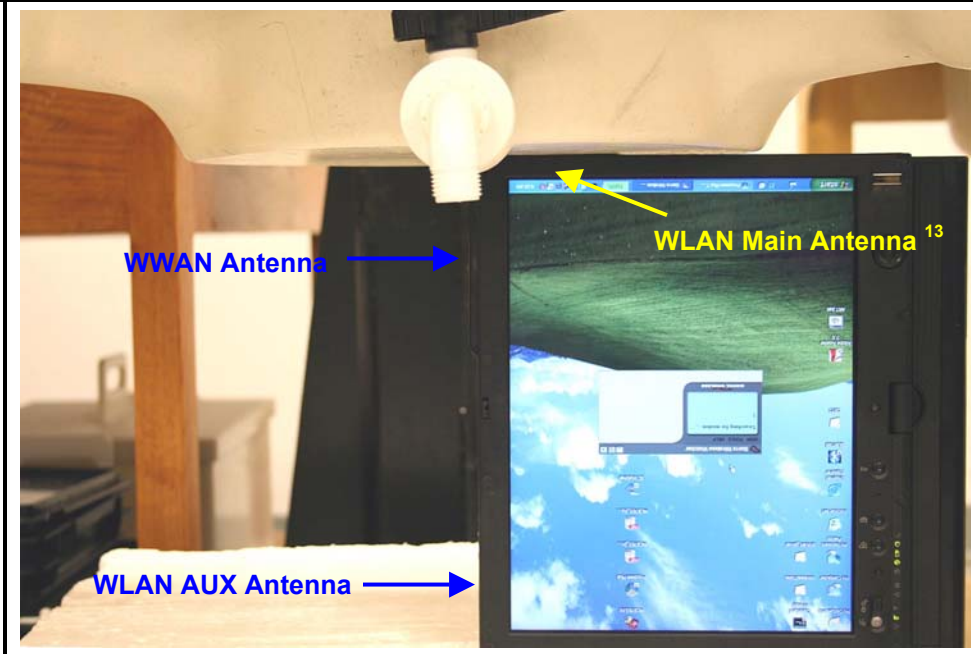

**GPRS**


Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dB)	Extrapolated <sup>1)</sup> SAR 1g (mW/g)
251 <sup>3</sup>	848.8	0.188	-0.089	0.192
251 <sup>4</sup>	848.8	0.208	-0.115	0.214
251 <sup>5</sup>	848.8	0.201	-0.176	0.209
251 <sup>6</sup>	848.8	0.185	-0.161	0.192
251 <sup>7</sup>	848.8	0.175	-0.185	0.183
251 <sup>8</sup>	848.8	0.175	-0.117	0.180
251 <sup>9</sup>	848.8	0.174	-0.133	0.179
251 <sup>10</sup>	848.8	0.176	-0.024	0.177
251 <sup>11</sup>	848.8	0.177	-0.017	0.178
251 <sup>12</sup>	848.8	0.212	0.000	0.212

Notes:

- 1) The exact method of extrapolation is  $\text{Measured SAR} \times 10^{(-\text{drift}/10)}$ . The SAR reported at the end of the measurement process by the DASY4 system can be scaled up by the Power drift to determine the SAR at the beginning of the measurement process.
- 2) Please see attachments for the detailed measurement data and plots showing the maximum SAR location of the EUT.
- 3) Collocation with Bluetooth and WLAN 802.11b legacy CDD mode.
- 4) Collocation with Bluetooth and WLAN 802.11g legacy CDD mode.
- 5) Collocation with Bluetooth and WLAN @ 802.11g HT20 MIMO mode.
- 6) Collocation with Bluetooth and WLAN @ 802.11g HT40 MIMO mode.
- 7) Collocation with Bluetooth and WLAN @ 802.11a 5.2 GHz legacy CDD mode.
- 8) Collocation with Bluetooth and WLAN @ 802.11a 5.2 GHz HT20 MIMO mode.
- 9) Collocation with Bluetooth and WLAN @ 802.11a 5.2 GHz HT40 MIMO mode.
- 10) Collocation with Bluetooth and WLAN @ 802.11a 5.8 GHz legacy CDD mode.
- 11) Collocation with Bluetooth and WLAN @ 802.11a 5.8 GHz HT20 MIMO mode.
- 12) Collocation with Bluetooth and WLAN @ 802.11a 5.8 GHz HT40 MIMO mode.
- 13) WLAN main antenna is disabled at this position.

**8.1.3 LAP HELD POSITION**

The highest reported SAR value at this configuration is: 0.142 W/kg (GSM GPRS mode, channel 192, 837 MHz), please see CCS SAR Report 06U10630-3.

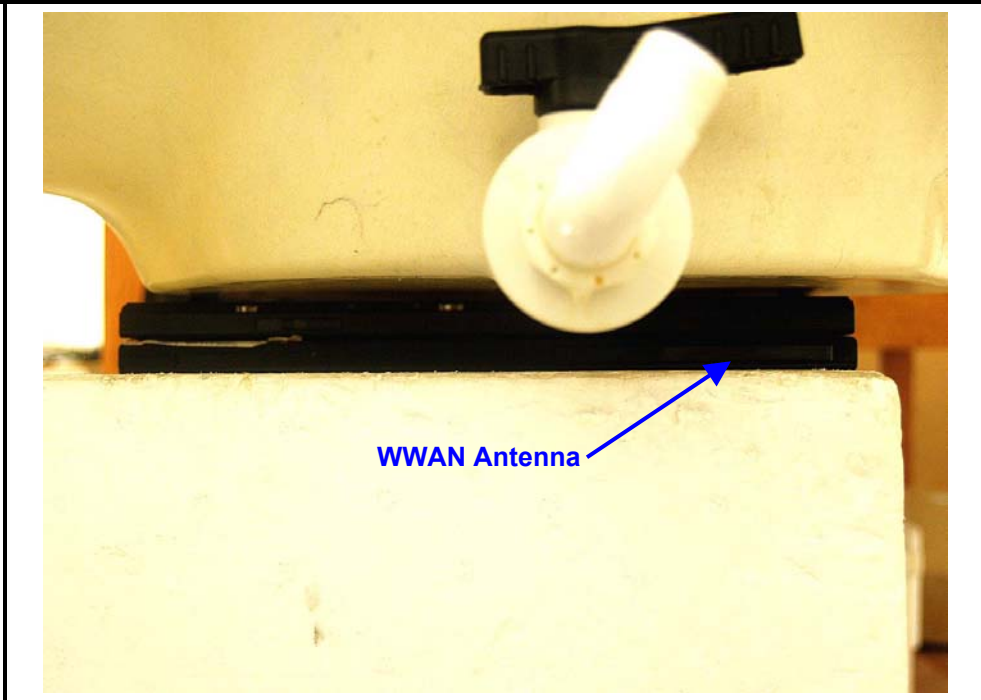

<b>GSM GPRS mode</b>				
Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dB)	Extrapolated <sup>1)</sup> SAR 1g (mW/g)
192 <sup>3</sup>	837.0	0.152	0.000	0.152
192 <sup>4</sup>	837.0	0.143	-0.046	0.145
192 <sup>5</sup>	837.0	0.112	-0.090	0.114
192 <sup>6</sup>	837.0	0.113	0.000	0.113
192 <sup>7</sup>	837.0	0.131	0.000	0.131
192 <sup>8</sup>	837.0	0.132	-0.026	0.133
192 <sup>9</sup>	837.0	0.133	0.000	0.133
192 <sup>10</sup>	837.0	0.133	0.000	0.133
192 <sup>11</sup>	837.0	0.136	0.000	0.136
192 <sup>12</sup>	837.0	0.153	0.000	0.153


Notes:

- 1) The exact method of extrapolation is  $\text{Measured SAR} \times 10^{(-\text{drift}/10)}$ . The SAR reported at the end of the measurement process by the DASY4 system can be scaled up by the Power drift to determine the SAR at the beginning of the measurement process.
- 2) Please see attachments for the detailed measurement data and plots showing the maximum SAR location of the EUT.
- 3) Collocation with Bluetooth and WLAN 802.11b legacy CDD mode.
- 4) Collocation with Bluetooth and WLAN 802.11g legacy CDD mode.
- 5) Collocation with Bluetooth and WLAN @ 802.11g HT20 MIMO mode.
- 6) Collocation with Bluetooth and WLAN @ 802.11g HT40 MIMO mode.
- 7) Collocation with Bluetooth and WLAN @ 802.11a 5.2 GHz legacy CDD mode.
- 8) Collocation with Bluetooth and WLAN @ 802.11a 5.2 GHz HT20 MIMO mode.
- 9) Collocation with Bluetooth and WLAN @ 802.11a 5.2 GHz HT40 MIMO mode.
- 10) Collocation with Bluetooth and WLAN @ 802.11a 5.8 GHz legacy CDD mode.
- 11) Collocation with Bluetooth and WLAN @ 802.11a 5.8 GHz HT20 MIMO mode.
- 12) Collocation with Bluetooth and WLAN @ 802.11a 5.8 GHz HT40 MIMO mode.

**8.2 PCS BAND**

**8.2.1 EDGE POSITION – PRIMARY PORTRAIT**

The highest reported SAR value at this configuration is: 0.056 W/kg (GSM GPRS mode, channel 661, 1880 MHz), please see CCS SAR Report 06U10630-3 (WWAN) and 06U10634-4 (WLAN).

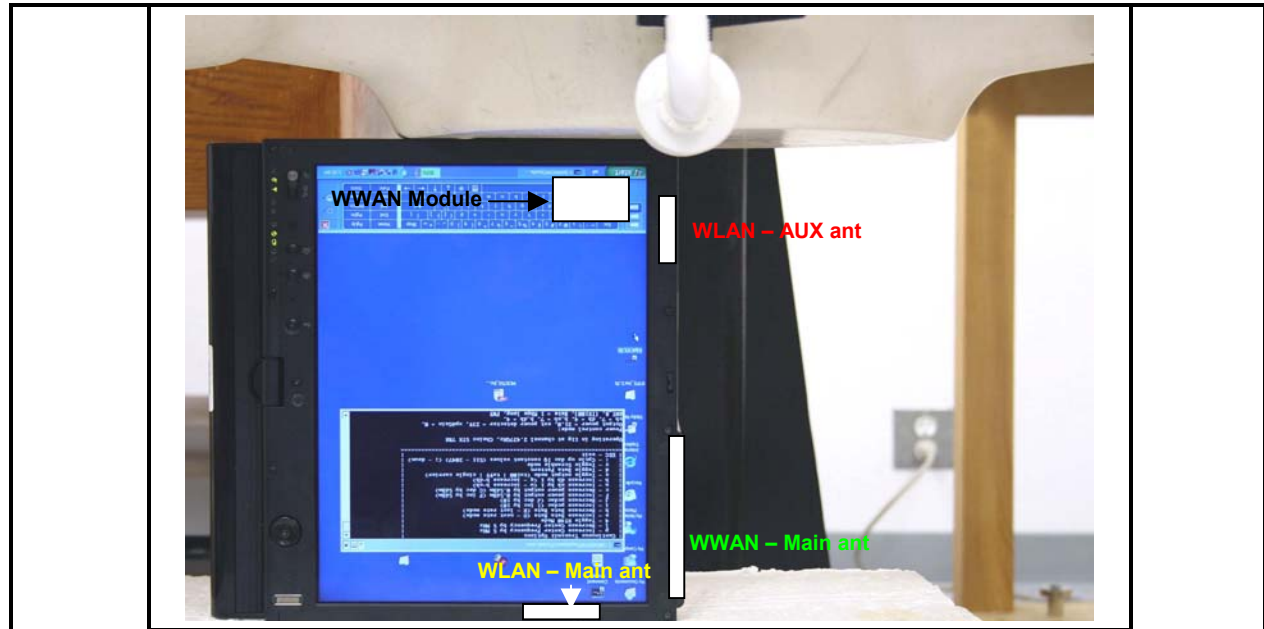


Module	Mode	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dB)	Extrapolated1) SAR 1g (mW/g)	Total SAR <sup>3</sup> 1g (mW/g)
WWAN	GPRS	1880	0.056	0.000	0.056	N/A
WLAN	b	2437	0.355	-0.071	0.361	0.417
	g	2437	0.293	-0.137	0.302	0.358
	HT20	2437	0.327	-0.124	0.336	0.392
	HT40	2437	0.246	0.000	0.246	0.302
	a	5260	0.148	0.000	0.148	0.204
	<b>HT20</b>	<b>5260</b>	<b>0.677</b>	<b>-0.008</b>	<b>0.678</b>	<b>0.734</b>
	HT40	5260	0.615	0.000	0.615	0.671
	a	5785	0.178	0.000	0.178	0.234
	HT20	5785	0.153	0.000	0.153	0.209
HT40	5785	0.189	0.000	0.189	0.245	

Notes:

- 1) The exact method of extrapolation is  $\text{Measured SAR} \times 10^{-(\text{drift}/10)}$ . The SAR reported at the end of the measurement process by the DASY4 system can be scaled up by the Power drift to determine the SAR at the beginning of the measurement process.
- 2) Please see attachments for the detailed measurement data and plots showing the maximum SAR location of the EUT.
- 3) **Total SAR is evaluated with sum of the SAR values from each band frequency.**

**8.2.2 LCD EDGE POSITION – SECONDARY PORTRAIT**

The highest reported SAR value at this configuration is: **0.064** W/kg (GSM GPRS mode, channel **661**, 1880 MHz), please see CCS SAR Report 06U10630-3.

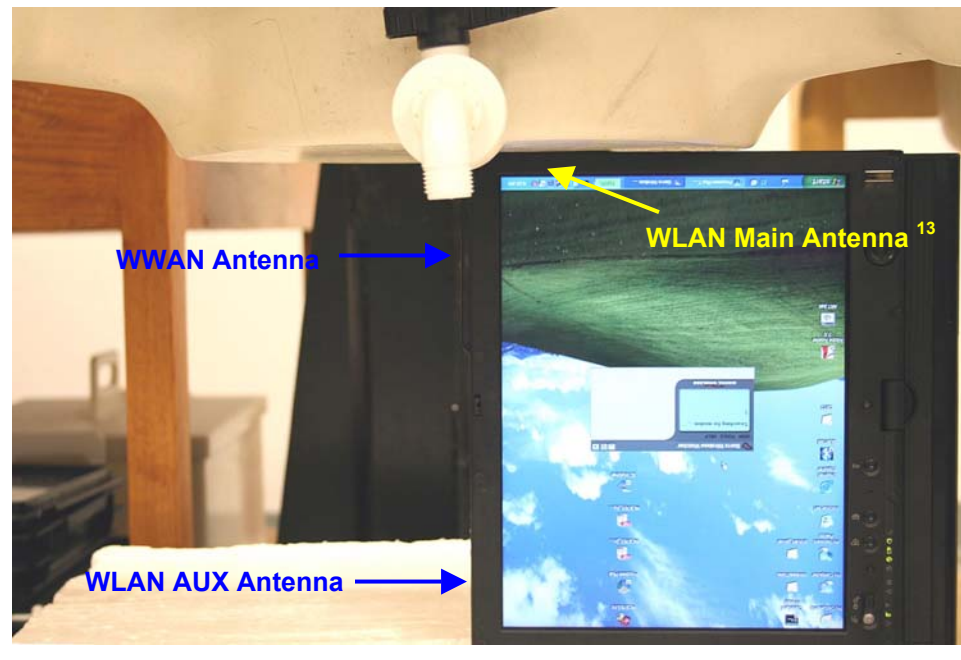

<b>GSM GPRS</b>				
Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dB)	Extrapolated <sup>1)</sup> SAR 1g (mW/g)
810 <sup>3</sup>	1909.8	0.141	0.000	0.141
810 <sup>4</sup>	1909.8	0.137	0.000	0.137
810 <sup>5</sup>	1909.8	0.136	0.000	0.136
810 <sup>6</sup>	1909.8	0.142	0.000	0.142
810 <sup>7</sup>	1909.8	0.153	0.000	0.153
810 <sup>8</sup>	1909.8	0.153	0.000	0.153
810 <sup>9</sup>	1909.8	0.140	0.000	0.140
810 <sup>10</sup>	1909.8	0.137	0.000	0.137
810 <sup>11</sup>	1909.8	0.138	0.000	0.138
810 <sup>12</sup>	1909.8	0.138	0.000	0.138




## Notes:

- 1) The exact method of extrapolation is  $\text{Measured SAR} \times 10^{(-\text{drift}/10)}$ . The SAR reported at the end of the measurement process by the DASY4 system can be scaled up by the Power drift to determine the SAR at the beginning of the measurement process.
- 2) Please see attachments for the detailed measurement data and plots showing the maximum SAR location of the EUT.
- 3) Collocation with Bluetooth and WLAN 802.11b legacy CDD mode.
- 4) Collocation with Bluetooth and WLAN 802.11g legacy CDD mode.
- 5) Collocation with Bluetooth and WLAN @ 802.11g HT20 MIMO mode.
- 6) Collocation with Bluetooth and WLAN @ 802.11g HT40 MIMO mode.
- 7) Collocation with Bluetooth and WLAN @ 802.11a 5.2 GHz legacy CDD mode.
- 8) Collocation with Bluetooth and WLAN @ 802.11a 5.2 GHz HT20 MIMO mode.
- 9) Collocation with Bluetooth and WLAN @ 802.11a 5.2 GHz HT40 MIMO mode.
- 10) Collocation with Bluetooth and WLAN @ 802.11a 5.8 GHz legacy CDD mode.
- 11) Collocation with Bluetooth and WLAN @ 802.11a 5.8 GHz HT20 MIMO mode.
- 12) Collocation with Bluetooth and WLAN @ 802.11a 5.8 GHz HT40 MIMO mode.
- 13) WLAN main antenna is disabled at this position.
- 14) For reference to WWAN SAR data, please see CCS SAR Report 06U10631-3B.
- 15) For convenience, the reference SAR data are included in attachment, Reference SAR Data.

**8.2.3 LAP HELD POSITION**

The highest reported SAR value at this configuration is: 0.194 W/kg (GSM GPRS mode, channel 512, 1850.2 MHz), please see CCS SAR Report 06U10630-3.

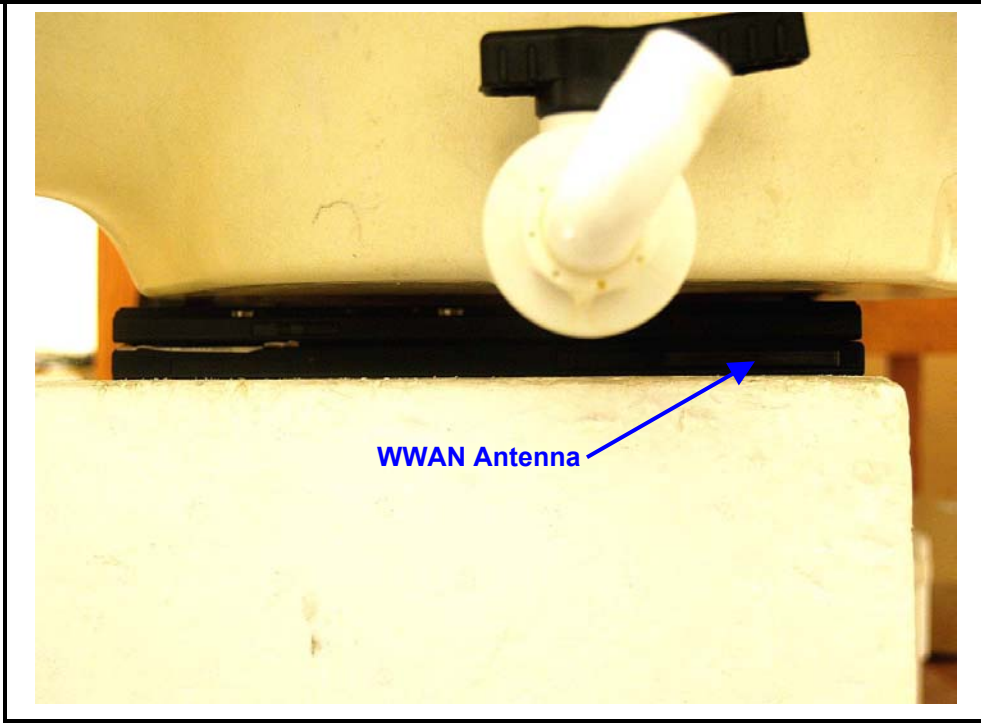

<b>GPRS</b>				
Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dB)	Extrapolated <sup>1)</sup> SAR 1g (mW/g)
512 <sup>3</sup>	1850.2	0.182	0.000	0.182
512 <sup>4</sup>	1850.2	0.184	-0.007	0.184
512 <sup>5</sup>	1850.2	0.184	0.000	0.184
512 <sup>6</sup>	1850.2	0.184	-0.034	0.185
512 <sup>7</sup>	1850.2	0.183	-0.123	0.188
512 <sup>8</sup>	1850.2	0.180	-0.152	0.186
512 <sup>9</sup>	1850.2	0.179	-0.111	0.184
512 <sup>10</sup>	1850.2	0.180	-0.058	0.182
512 <sup>11</sup>	1850.2	0.181	-0.003	0.181
512 <sup>12</sup>	1850.2	0.181	-0.019	0.182

Notes:

- 1) The exact method of extrapolation is Measured SAR x 10<sup>^(-drift/10)</sup>. The SAR reported at the end of the measurement process by the DASY4 system can be scaled up by the Power drift to determine the SAR at the beginning of the measurement process.
- 2) Please see attachments for the detailed measurement data and plots showing the maximum SAR location of the EUT.
- 3) Collocation with Bluetooth and WLAN 802.11b legacy CDD mode.
- 4) Collocation with Bluetooth and WLAN 802.11g legacy CDD mode.
- 5) Collocation with Bluetooth and WLAN @ 802.11g HT20 MIMO mode.
- 6) Collocation with Bluetooth and WLAN @ 802.11g HT40 MIMO mode.
- 7) Collocation with Bluetooth and WLAN @ 802.11a 5.2 GHz legacy CDD mode.
- 8) Collocation with Bluetooth and WLAN @ 802.11a 5.2 GHz HT20 MIMO mode.
- 9) Collocation with Bluetooth and WLAN @ 802.11a 5.2 GHz HT40 MIMO mode.
- 10) Collocation with Bluetooth and WLAN @ 802.11a 5.8 GHz legacy CDD mode.
- 11) Collocation with Bluetooth and WLAN @ 802.11a 5.8 GHz HT20 MIMO mode.
- 12) Collocation with Bluetooth and WLAN @ 802.11a 5.8 GHz HT40 MIMO mode.

**9 MEASUREMENT UNCERTAINTY**

**9.1 MEASUREMENT UNCERTAINTY FOR 300 MHz – 3000 MHz**

Uncertainty component	Tol. (±%)	Probe Dist.	Div.	Ci (1g)	Ci (10g)	Std. Unc.(±%)	
						Ui (1g)	Ui(10g)
<b>Measurement System</b>							
Probe Calibration	4.80	N	1	1	1	4.80	4.80
Axial Isotropy	4.70	R	1.732	0.707	0.707	1.92	1.92
Hemispherical Isotropy	9.60	R	1.732	0.707	0.707	3.92	3.92
Boundary Effects	1.00	R	1.732	1	1	0.58	0.58
Linearity	4.70	R	1.732	1	1	2.71	2.71
System Detection Limits	1.00	R	1.732	1	1	0.58	0.58
Readout Electronics	1.00	N	1	1	1	1.00	1.00
Response Time	0.80	R	1.732	1	1	0.46	0.46
Integration Time	2.60	R	1.732	1	1	1.50	1.50
RF Ambient Conditions - Noise	1.59	R	1.732	1	1	0.92	0.92
RF Ambient Conditions - Reflections	0.00	R	1.732	1	1	0.00	0.00
Probe Positioner Mechanical Tolerance	0.40	R	1.732	1	1	0.23	0.23
Probe Positioning With Respect to Phantom Shell	2.90	R	1.732	1	1	1.67	1.67
Extrapolation, interpolation, and integration algorithms for max. SAR evaluation	3.90	R	1.732	1	1	2.25	2.25
<b>Test sample Related</b>							
Test Sample Positioning	1.10	N	1	1	1	1.10	1.10
Device Holder Uncertainty	3.60	N	1	1	1	3.60	3.60
Power and SAR Drift Measurement	5.00	R	1.732	1	1	2.89	2.89
<b>Phantom and Tissue Parameters</b>							
Phantom Uncertainty	4.00	R	1.732	1	1	2.31	2.31
Liquid Conductivity - Target	5.00	R	1.732	0.64	0.43	1.85	1.24
Liquid Conductivity - Meas.	8.60	N	1	0.64	0.43	5.50	3.70
Liquid Permittivity - Target	5.00	R	1.732	0.6	0.49	1.73	1.41
Liquid Permittivity - Meas.	3.30	N	1	0.6	0.49	1.98	1.62
<b>Combined Standard Uncertainty</b>			RSS			11.44	10.49
<b>Expanded Uncertainty (95% Confidence Interval)</b>			K=2			22.87	20.98
Notes for table							
1. Tol. - tolerance in influence quantity							
2. N - Nomal							
3. R - Rectangular							
4. Div. - Divisor used to obtain standard uncertainty							
5. Ci - is te sensitivity coefficient							

**10 EQUIPMENT LIST AND CALIBRATION**

<u>Name of Equipment</u>	<u>Manufacturer</u>	<u>Type/Model</u>	<u>Serial Number</u>	<u>Cal. Due date</u>
Robot - Six Axes	Stäubli	RX90BL	N/A	N/A
Robot Remote Control	Stäubli	CS7MB	3403-91535	N/A
DASY4 Measurement Server	SPEAG	SEUMS001BA	1041	N/A
Probe Alignment Unit	SPEAG	LB (V2)	261	N/A
S-Parameter Network Analyzer	Agilent	8753ES-6	US39173569	2/9/07
Electronic Probe kit	Hewlett Packard	85070C	N/A	N/A
E-Field Probe	SPEAG	EX3DV4	3552	5/30/07
Thermometer	ERTCO	639-1S	1718	1/11/07
SAM Phantom (SAM1)	SPEAG	TP-1185	QD000P40CA	N/A
SAM Phantom (SAM2)	SPEAG	TP-1015	N/A	N/A
Data Acquisition Electronics	SPEAG	DAE4	558	1/20/07
System Validation Dipole	SPEAG	D835V2	4d002	1/23/08
System Validation Dipole	SPEAG	D1900V2	5d043	1/29/08
Power Meter	Giga-tronics	8651A	8651404	12/27/06
Power Sensor	Giga-tronics	80701A	1834588	12/27/07
Amplifier	Mini-Circuits	ZVE-8G	0360	N/A
Amplifier	Mini-Circuits	ZHL-42W	D072701-5	N/A
Radio Communication Tester	Rohde & Schwarz	CMU 200	838114/032	3/21/07
Radio Communication Tester	Agilent	E1968A	GB46160222	1/29/2007
Simulating Liquid	CCS	M835	N/A	Within 24 hrs of first test
Simulating Liquid	CCS	M1900	N/A	Within 24 hrs of first test

11 PHOTOS

DUT




Host laptop – Normal Mode




Host laptop – Tablet Mode



Antenna Location

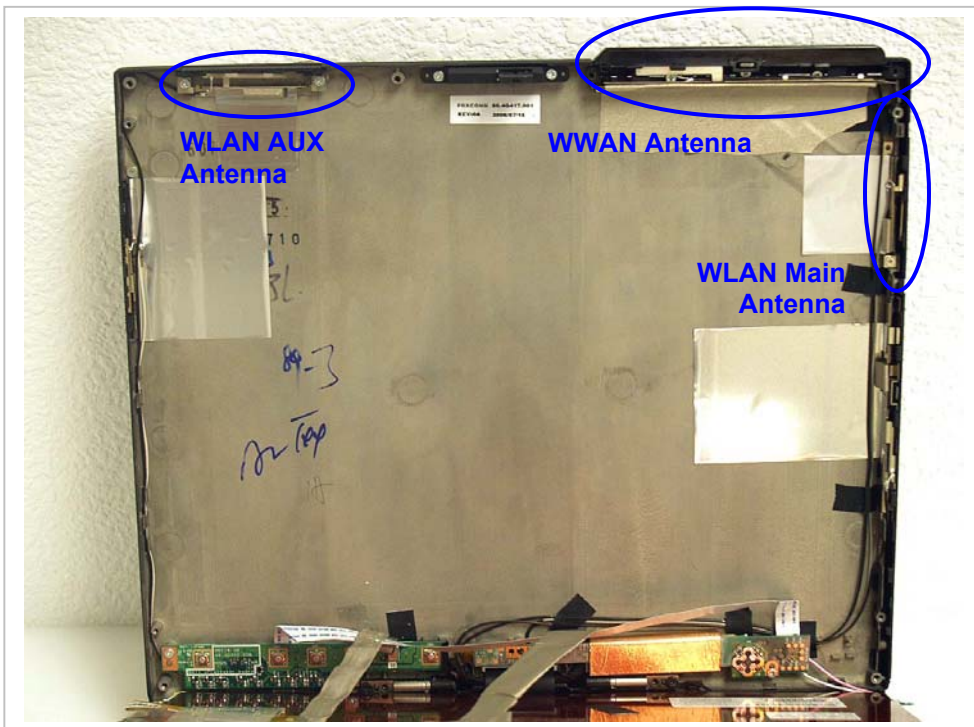

DUT Location

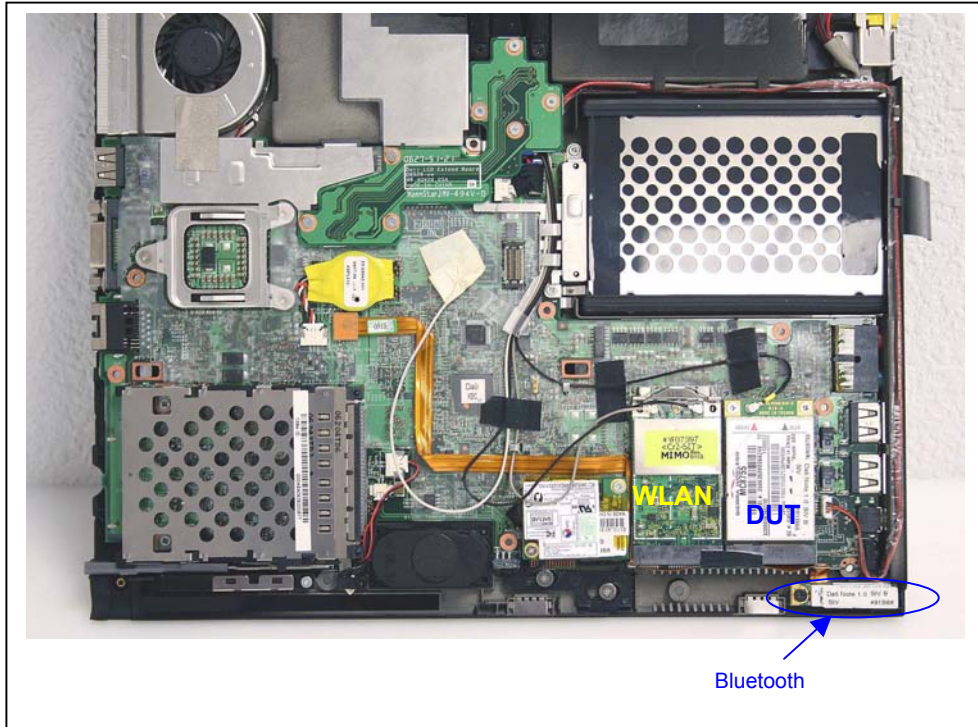



**12 ATTACHMENTS**

<b>No.</b>	<b>Contents</b>	<b>No. Of Pages</b>
1	System Performance Check Plots	10
2-1	Co-Tx SAR Test Plots – Cell band	21
2-2	Co-Tx SAR Test Plots – PCS band	21
3	Certificate of E-Field Probe - EXDV4SN3552	9
4	Certificate of System Validation Dipole - D835V2 SN:4d002	9
5	Certificate of System Validation Dipole - D1900V2 SN:5d043	9

**END OF REPORT**